

System Check:2450Mhz

Date: 2026.08.20

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71, 7.71, 7.71); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW2450/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.08 W/kg

CW2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.14 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.17 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 6.04 W/kg

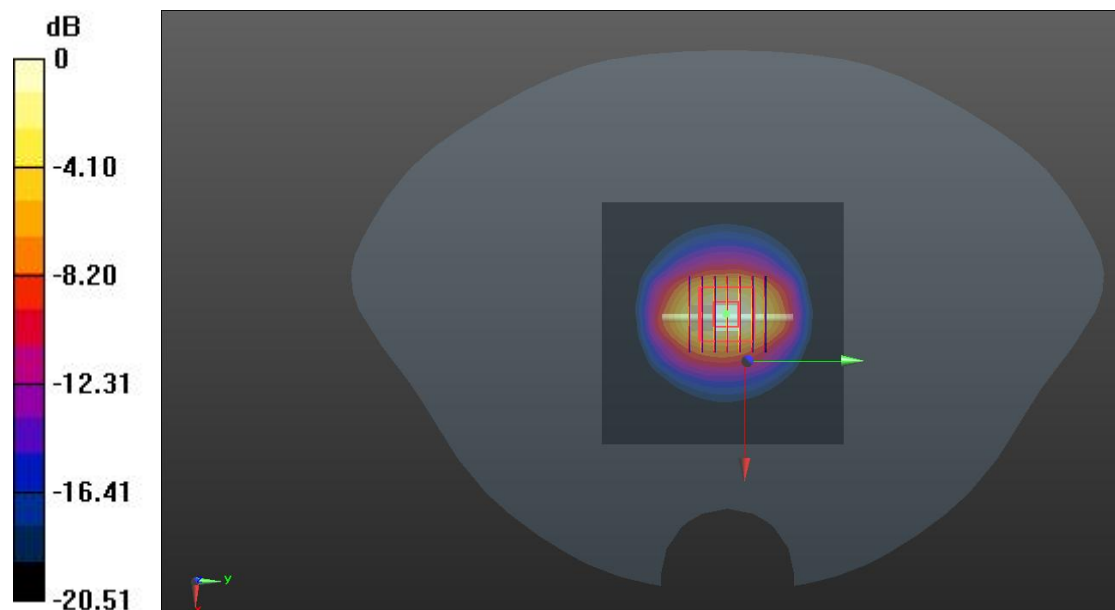

0 dB = 6.04 W/kg