

TEST REPORT

Applicant: Anker Innovations Limited
Address: Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18
Harcourt Road, Hong Kong
Equipment Type: soundcore P42i
Model Name: D1205
Brand Name: soundcore
FCC ID: 2AOKB-D1205L
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Mar. 12, 2026
Test Date: Mar. 13, 2026 - Mar. 20, 2026
Date of Issue: Apr. 16, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Zhang Guoxi

Checked by: Zong Liyao

Approved by: Tolan Tu
(Testing Director)

Zhang Guoxi

Zong Liyao

Tolan Tu

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 16, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION.....	3
1.1 Test Laboratory	3
1.2 Test Location	3
2 PRODUCT INFORMATION	4
2.1 Applicant Information.....	4
2.2 Manufacturer Information	4
2.3 General Description for Equipment under Test (EUT)	4
2.4 Ancillary Equipment.....	5
2.5 Technical Information	5
3 SUMMARY OF TEST RESULTS.....	6
3.1 Test Standards	6
3.2 Verdict	6
3.3 Test Uncertainty	6
4 GENERAL TEST CONFIGURATIONS	7
4.1 Test Enclosure List.....	7
4.2 Test Configurations	7
4.3 Test Setups	8
5 TEST ITEMS.....	10
5.1 Emission Tests	10
ANNEX A TEST RESULTS	15
A.1 Radiated Emission	15
A.2 Conducted Emission, AC Ports.....	21
ANNEX B TEST SETUP PHOTOS.....	24
ANNEX C EUT EXTERNAL PHOTOS.....	24
ANNEX D EUT INTERNAL PHOTOS.....	24

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No. 55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

2.2 Manufacturer Information

Manufacturer	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	soundcore P42i
Model Name Under Test	D1205
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.1
Software Version	V1.14
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Note: The battery connection cables for the charging case of the earphones come in two lengths: 20mm and 30mm. Both types of battery compartments have been tested, and only the worst battery compartment (30mm) data is reflected.	

2.4 Ancillary Equipment

Ancillary Equipment 1	charging case	
	Brand Name	soundcore
	Model No.	D1205
	Serial No.	N/A
	Rated Input	5 VDC, 0.5A
	Rated Output	5 VDC, 0.24A
Ancillary Equipment 2	Rechargeable Li-ion	
	Brand Name	N/A
	Model No.	652040
	Serial No.	N/A
	Capacity	690 mAh
	Rated Voltage	3.85 V
Ancillary Equipment 3	Rechargeable Li-ion Cell	
	Brand Name	N/A
	Model No.	1154C
	Serial No.	N/A
	Capacity	60mA
	Rated Voltage	3.85V
Ancillary Equipment 4	USB Cable	
	Length (Approx.)	0.32m

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE)
Classification of equipment	Class B
The highest internal frequency of EUT	2483.5 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-150 KHz)	3.36 dB
Conducted emissions (150 kHz-30 MHz)	2.92 dB
Radiated emissions (30 MHz-1 GHz)	4.24 dB
Radiated emissions (30 MHz-6 GHz)	5.10 dB
Radiated emissions (6 GHz-18 GHz)	5.30 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Mobile Phone	N/A	V20	N/A	N/A	N/A	☒
Adapter	N/A	N/A	N/A	N/A	N/A	☒
Wireless charging base	N/A	N/A	N/A	N/A	N/A	☒

4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Charging Test Mode</u> Adapter + USB Cable + Battery + EUT + Charging case
Mode 2	<u>The Music Playback Test Mode</u> Adapter + USB Cable + Battery + EUT + BT LINK + Charging case
Mode 3	<u>The Wireless Charging Test Mode</u> Adapter + USB Cable + Wireless charging base + Battery + EUT + Charging case


Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 3	1
Conducted Emission, AC Ports	Mode 1~Mode 3	1
Note: All operation modes were tested, but only test data of the worst mode was presented in this report.		

4.3 Test Setups


Test Setup 1

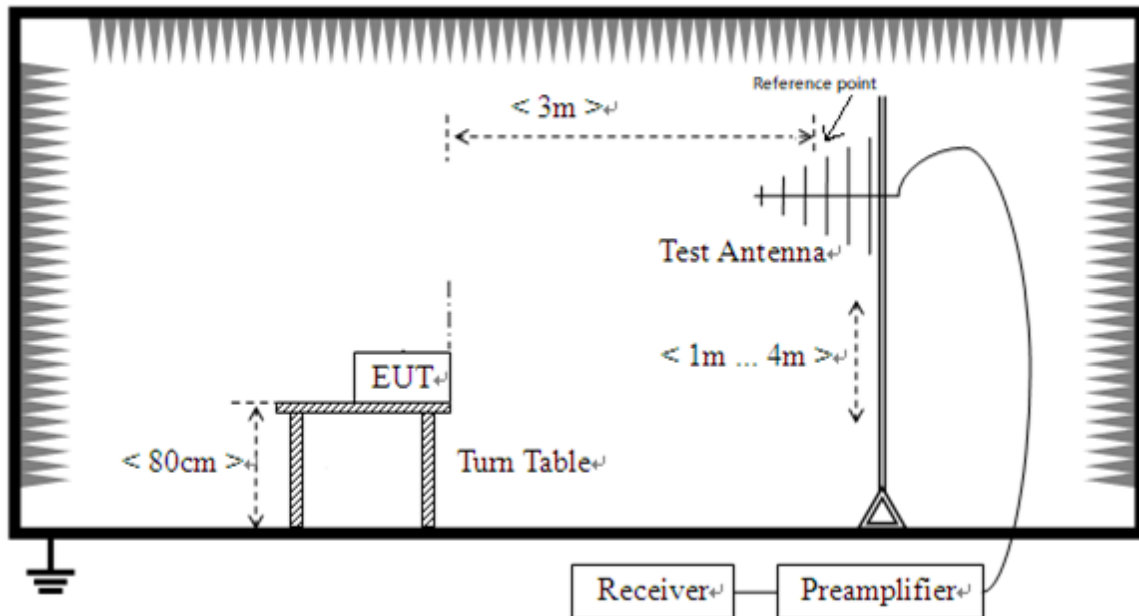

Radiated Emission (30 MHz-1 GHz)

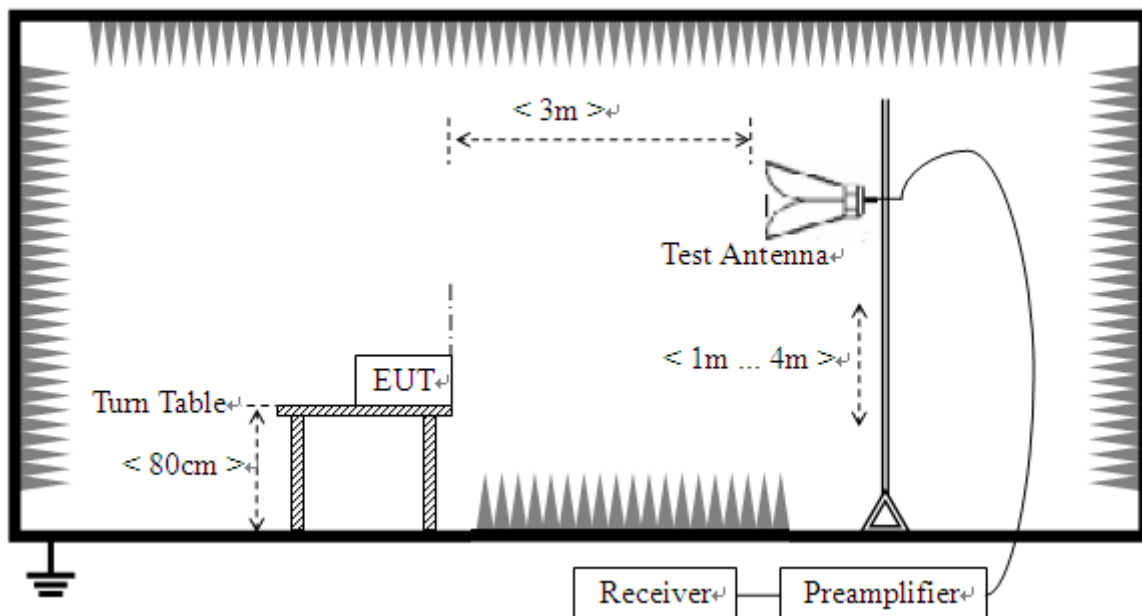

Radiated Emission (above 1 GHz)

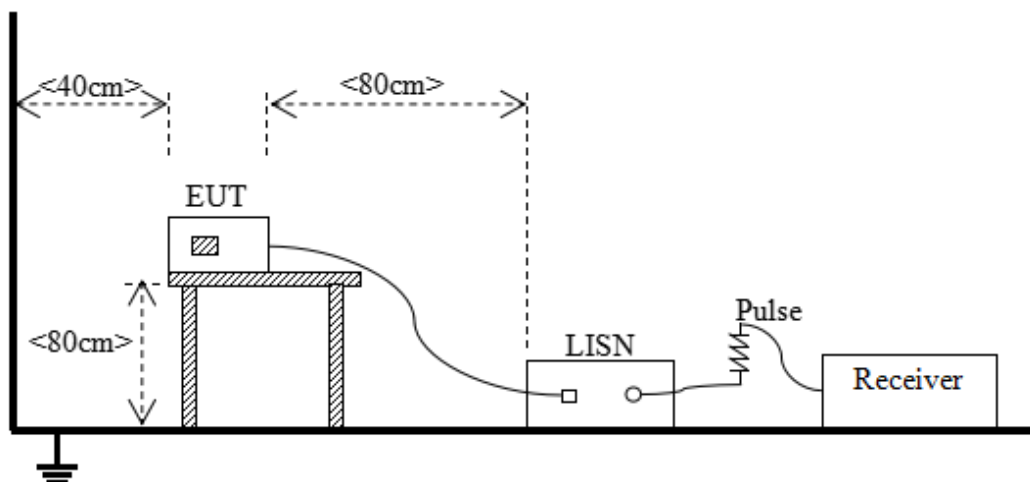Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \times \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \times \log(d_{10m}/d_{3m})$$
Where:
 L_{3m} is Average Class A limit at 3m;
 L_{10m} is Average Class A limit at 10m;
 d_{10m} is Measurement distance in 10m;
 d_{3m} is Measurement distance in 3m.
For this case: $L_{3m} = 49.5 + 20 \times \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS


A.1 Radiated Emission

Note : For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	S60	Temperature	21.5℃
Humidity	53%RH	Pressure	101.4kPa
Test Engineer	Tang Xuming	Test Date	2026.03.13


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz

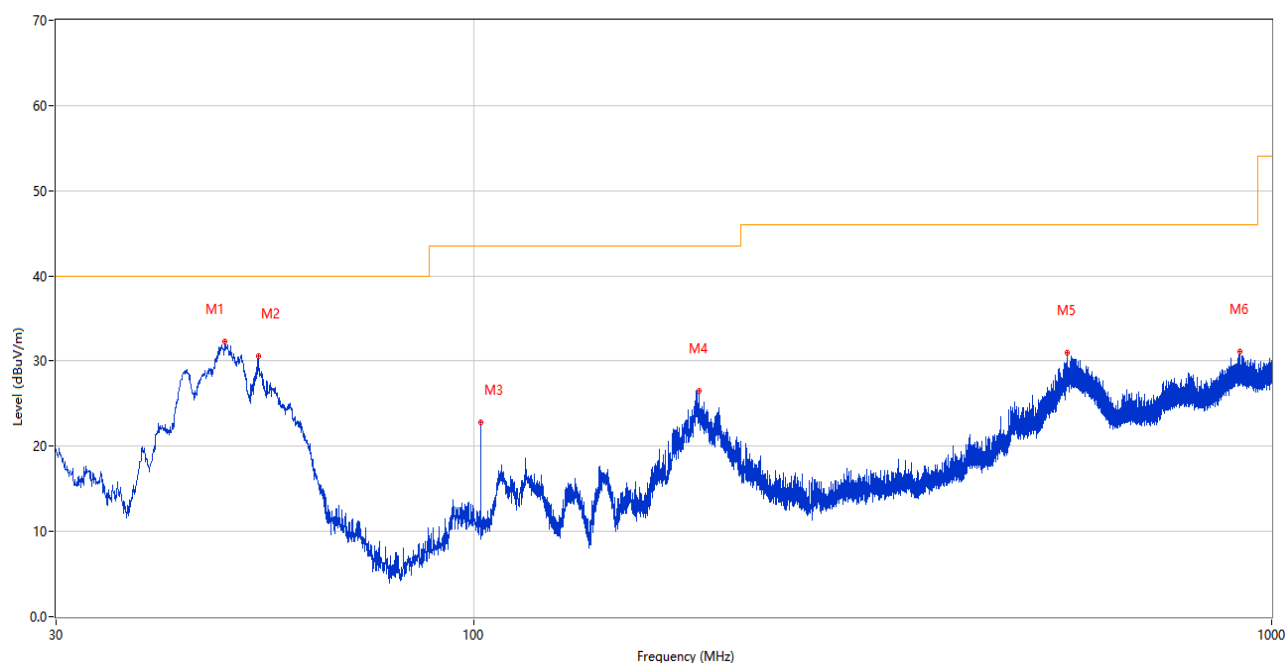

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.818	32.31	-25.94	40.0	7.69	Peak	312.00	100	Vertical	Pass
2	53.717	30.62	-25.18	40.0	9.38	Peak	24.00	100	Vertical	Pass
3	102.119	22.85	-25.99	43.5	20.65	Peak	261.00	100	Vertical	Pass
4	191.844	26.49	-26.07	43.5	17.01	Peak	156.00	100	Vertical	Pass
5	554.285	30.96	-16.99	46.0	15.04	Peak	234.00	100	Vertical	Pass
6	912.797	31.09	-8.68	46.0	14.91	Peak	133.00	200	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

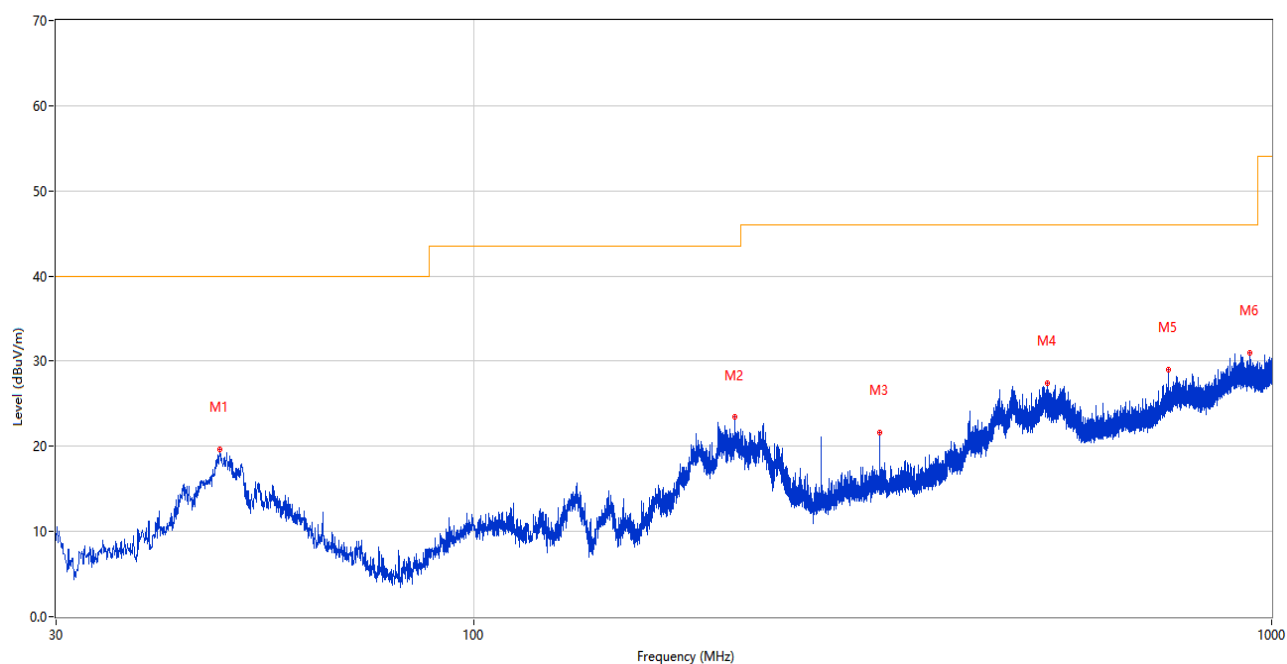

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.139	19.62	-25.28	40.0	20.38	Peak	312.00	100	Horizontal	Pass
2	212.602	23.40	-26.35	43.5	20.10	Peak	0.00	100	Horizontal	Pass
3	322.649	21.58	-22.90	46.0	24.42	Peak	246.00	200	Horizontal	Pass
4	523.342	27.43	-17.85	46.0	18.57	Peak	263.00	200	Horizontal	Pass
5	742.950	29.00	-12.13	46.0	17.00	Peak	329.00	100	Horizontal	Pass
6	939.084	31.04	-8.76	46.0	14.96	Peak	165.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.04.16	2026.04.15	☒
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9163	01414	2023.11.03	2026.11.02	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

3) Test Antenna Vertical, 1 GHz – 12.75 GHz

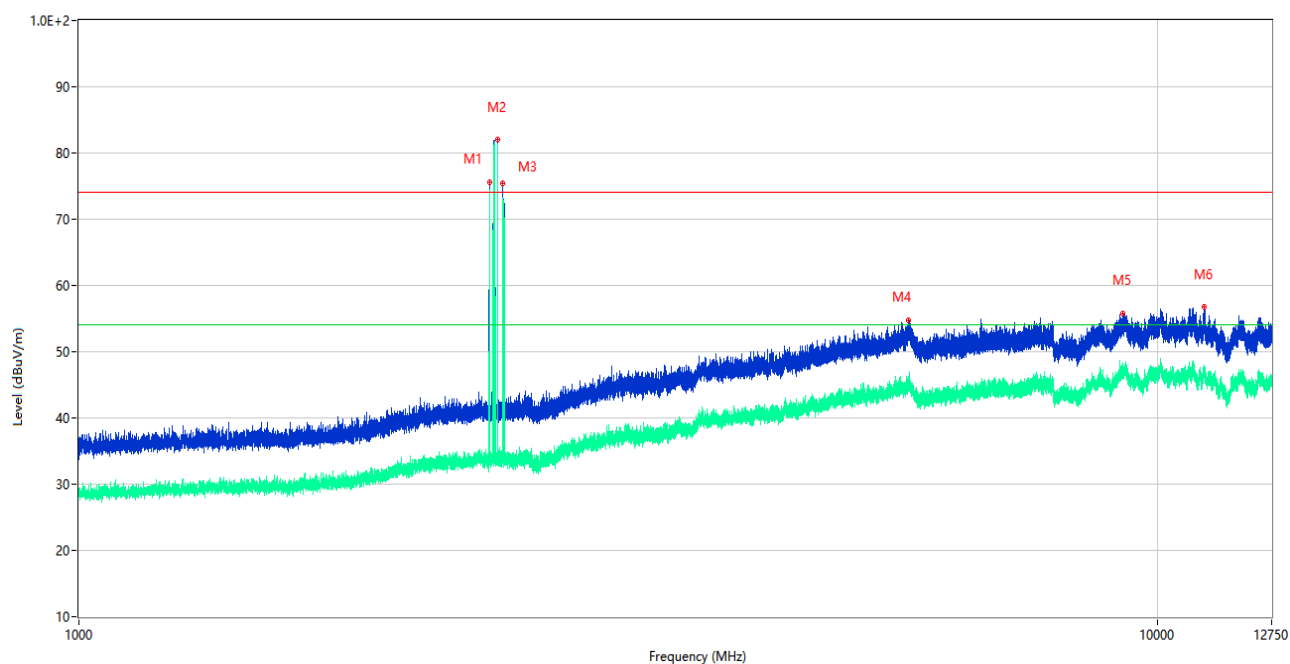

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2401.660	75.67	-11.42	74.0	-1.67	Peak	125.00	100	Vertical	N/A
1**	2401.660	74.38	-11.42	54.0	-20.38	AV	125.00	100	Vertical	N/A
2	2443.780	82.03	-11.49	74.0	-8.03	Peak	210.00	100	Vertical	N/A
2**	2443.780	81.07	-11.49	54.0	-27.07	AV	210.00	100	Vertical	N/A
3	2472.510	75.38	-10.38	74.0	-1.38	Peak	159.00	100	Vertical	N/A
3**	2472.510	72.10	-10.38	54.0	-18.10	AV	159.00	100	Vertical	N/A
4	5878.320	54.76	3.46	74.0	19.24	Peak	183.00	100	Vertical	Pass
4**	5878.320	46.00	3.46	54.0	8.00	AV	183.00	100	Vertical	Pass
5	9289.862	55.78	4.67	74.0	18.22	Peak	278.00	100	Vertical	Pass
5**	9289.862	47.56	4.67	54.0	6.44	AV	278.00	100	Vertical	Pass
6	11040.474	56.75	3.92	74.0	17.25	Peak	278.00	100	Vertical	Pass
6**	11040.474	46.56	3.92	54.0	7.44	AV	278.00	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 12.75 GHz

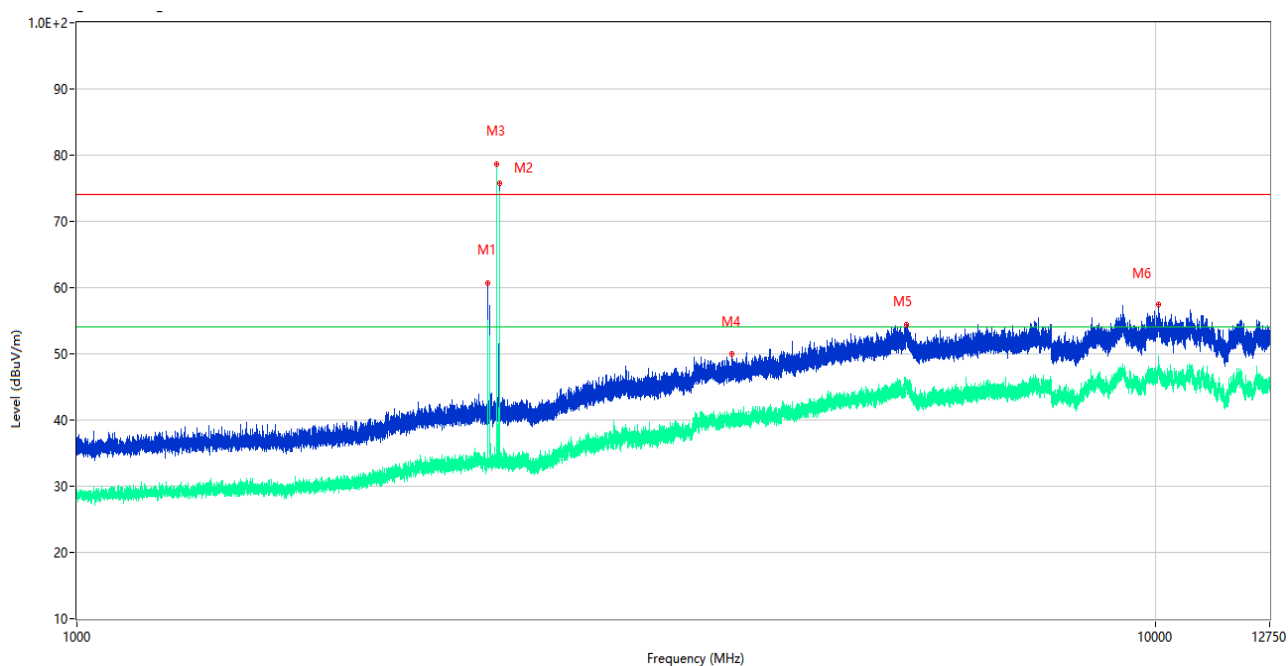

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2403.610	60.75	-11.65	74.0	13.25	Peak	333.00	100	Horizontal	N/A
1**	2403.610	54.26	-11.65	54.0	-0.26	AV	333.00	100	Horizontal	N/A
2	2463.280	75.78	-10.87	74.0	-1.78	Peak	333.00	100	Horizontal	N/A
2**	2463.280	72.20	-10.87	54.0	-18.20	AV	333.00	100	Horizontal	N/A
3	2450.020	78.70	-11.72	74.0	-4.70	Peak	0.00	100	Horizontal	N/A
3**	2450.020	41.48	-11.72	54.0	12.52	AV	0.00	100	Horizontal	N/A
4	4045.940	49.96	-2.24	74.0	24.04	Peak	168.00	100	Horizontal	Pass
4**	4045.940	40.31	-2.24	54.0	13.69	AV	168.00	100	Horizontal	Pass
5	5871.720	54.49	3.54	74.0	19.51	Peak	360.00	100	Horizontal	Pass
5**	5871.720	45.21	3.54	54.0	8.79	AV	360.00	100	Horizontal	Pass
6	10055.562	57.52	5.23	74.0	16.48	Peak	86.00	100	Horizontal	Pass
6**	10055.562	47.44	5.23	54.0	6.56	AV	86.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.04.16	2026.04.15	☒
Test Antenna-Horn	SCHWARZB ECK	BBHA 9120D	02459	2023.10.26	2026.10.25	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S59	Temperature	21.8℃
Humidity	53%RH	Pressure	101.2kPa
Test Engineer	Hua Bin	Test Date	2026.03.20


Test Mode 1

1) AC Ports - L Phase

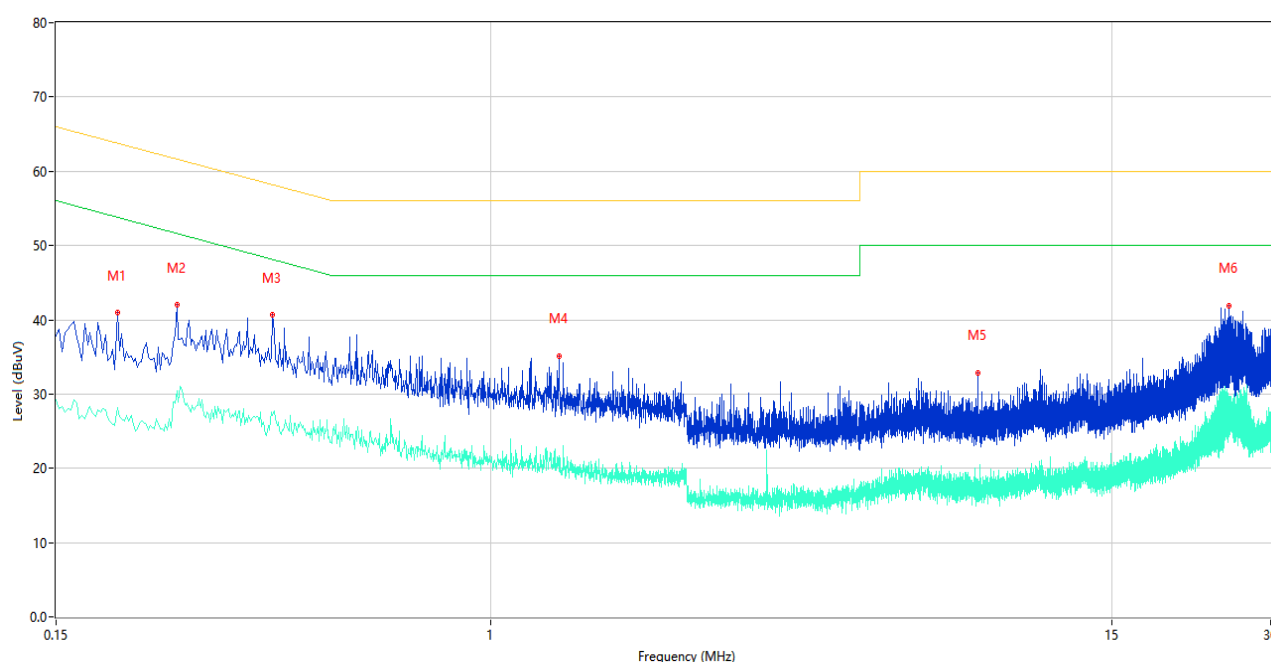

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.196	40.97	10.27	63.78	22.81	Peak	L	Pass
1**	0.196	28.22	10.27	53.78	25.56	AV	L	Pass
2	0.254	42.00	10.26	61.63	19.63	Peak	L	Pass
2**	0.254	30.48	10.26	51.63	21.15	AV	L	Pass
3	0.386	40.62	10.26	58.15	17.53	Peak	L	Pass
3**	0.386	27.07	10.26	48.15	21.08	AV	L	Pass
4	1.346	35.17	10.37	56.00	20.83	Peak	L	Pass
4**	1.346	21.63	10.37	46.00	24.37	AV	L	Pass
5	8.374	32.92	11.52	60.00	27.08	Peak	L	Pass
5**	8.374	18.58	11.52	50.00	31.42	AV	L	Pass
6	25.058	41.92	15.44	60.00	18.08	Peak	L	Pass
6**	25.058	27.58	15.44	50.00	22.42	AV	L	Pass

2) AC Ports - N Phase

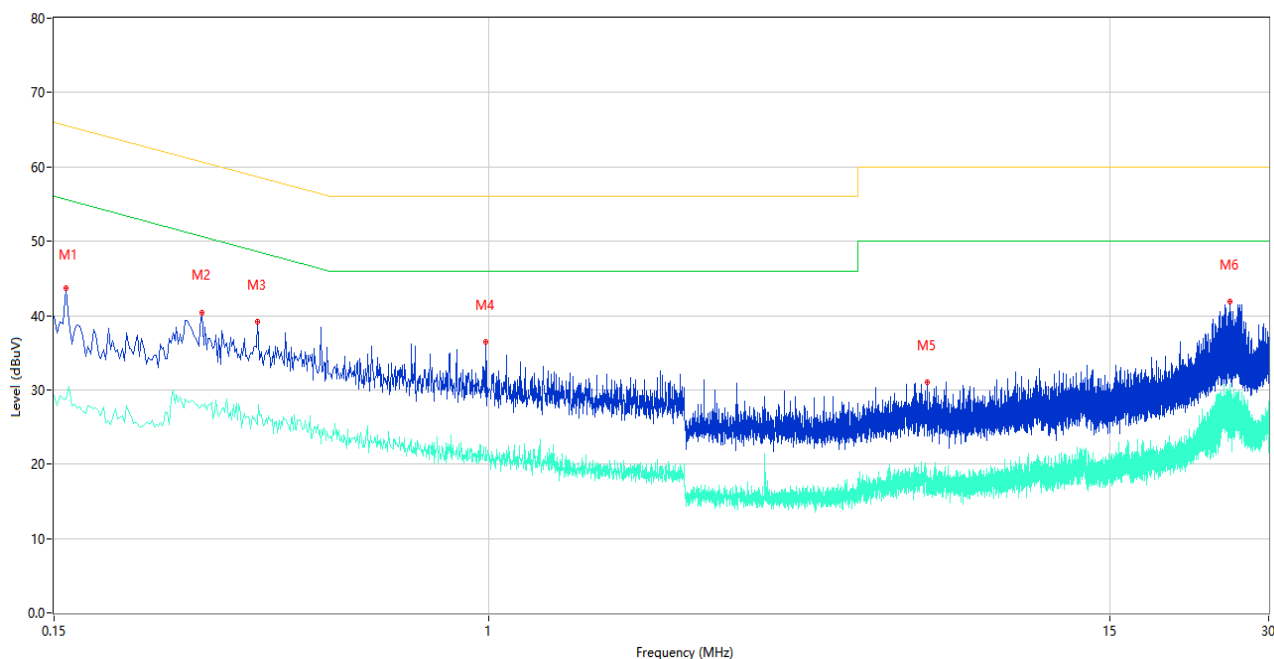

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	43.72	10.21	65.57	21.85	Peak	N	Pass
1**	0.158	28.75	10.21	55.57	26.82	AV	N	Pass
2	0.286	40.43	10.18	60.64	20.21	Peak	N	Pass
2**	0.286	27.99	10.18	50.64	22.65	AV	N	Pass
3	0.364	39.18	10.18	58.64	19.46	Peak	N	Pass
3**	0.364	25.26	10.18	48.64	23.38	AV	N	Pass
4	0.988	36.50	10.23	56.00	19.50	Peak	N	Pass
4**	0.988	22.23	10.23	46.00	23.77	AV	N	Pass
5	6.758	31.06	11.09	60.00	28.94	Peak	N	Pass
5**	6.758	16.67	11.09	50.00	33.33	AV	N	Pass
6	25.322	41.84	15.53	60.00	18.16	Peak	N	Pass
6**	25.322	26.75	15.53	50.00	23.25	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038B	MY61380132	2025.04.01	2026.03.31	☒
LISN	SCHWARZBECK	NSLK 8127	01009	2025.07.15	2026.07.14	☒
Shielded Room	YiHeng Electronic Co., Ltd	/	235	2024.11.05	2027.11.04	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ25C1748-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ25C1748-AW-1.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ25C1748-AI-1.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--