EUT INTERNAL PHOTOS

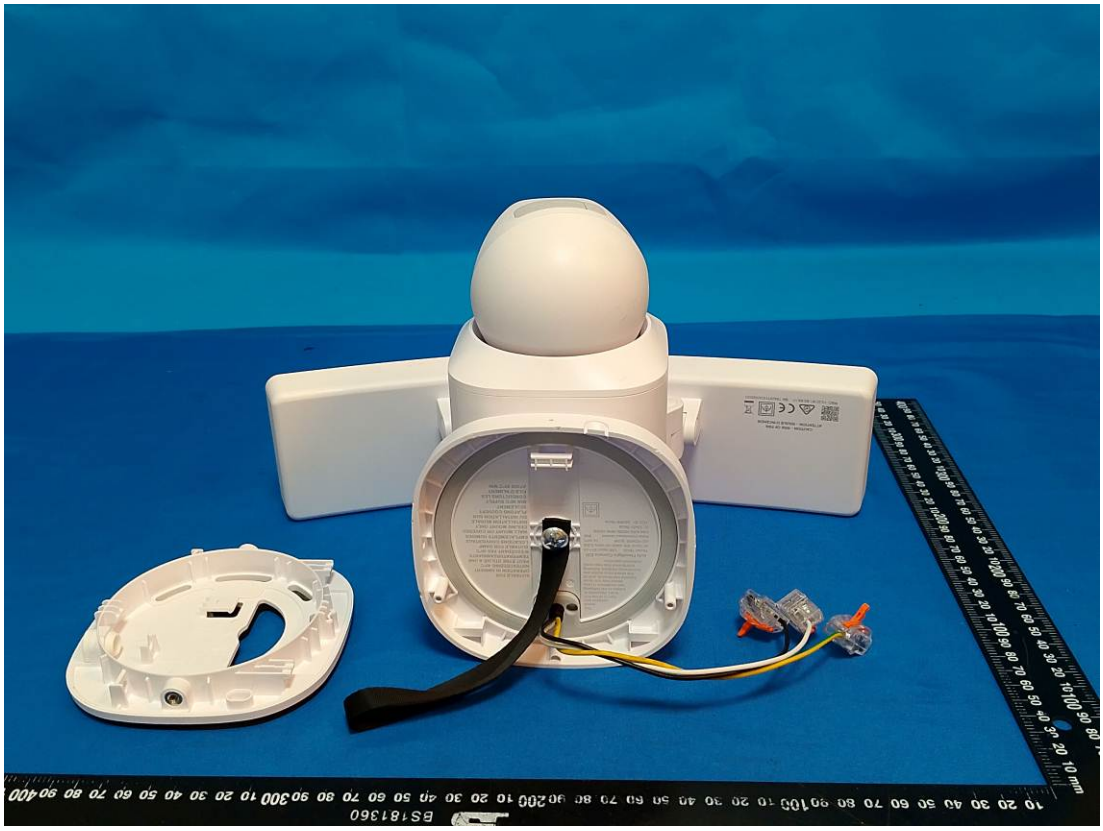

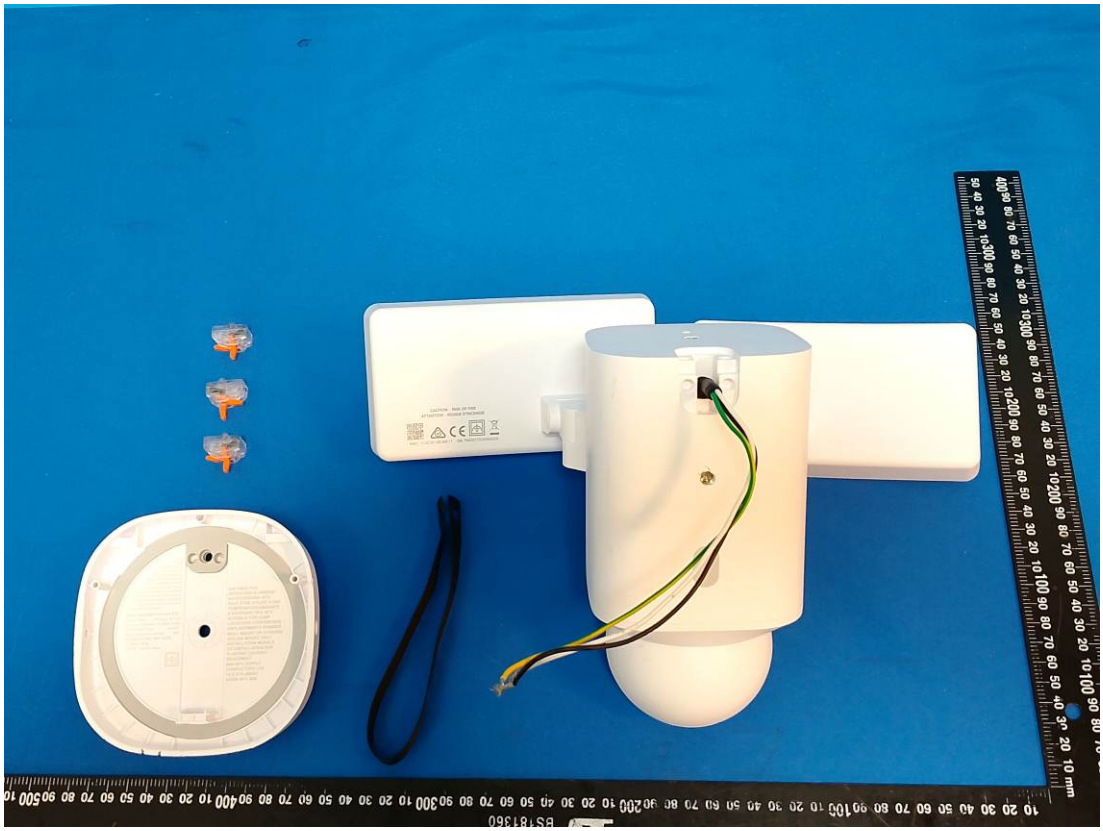

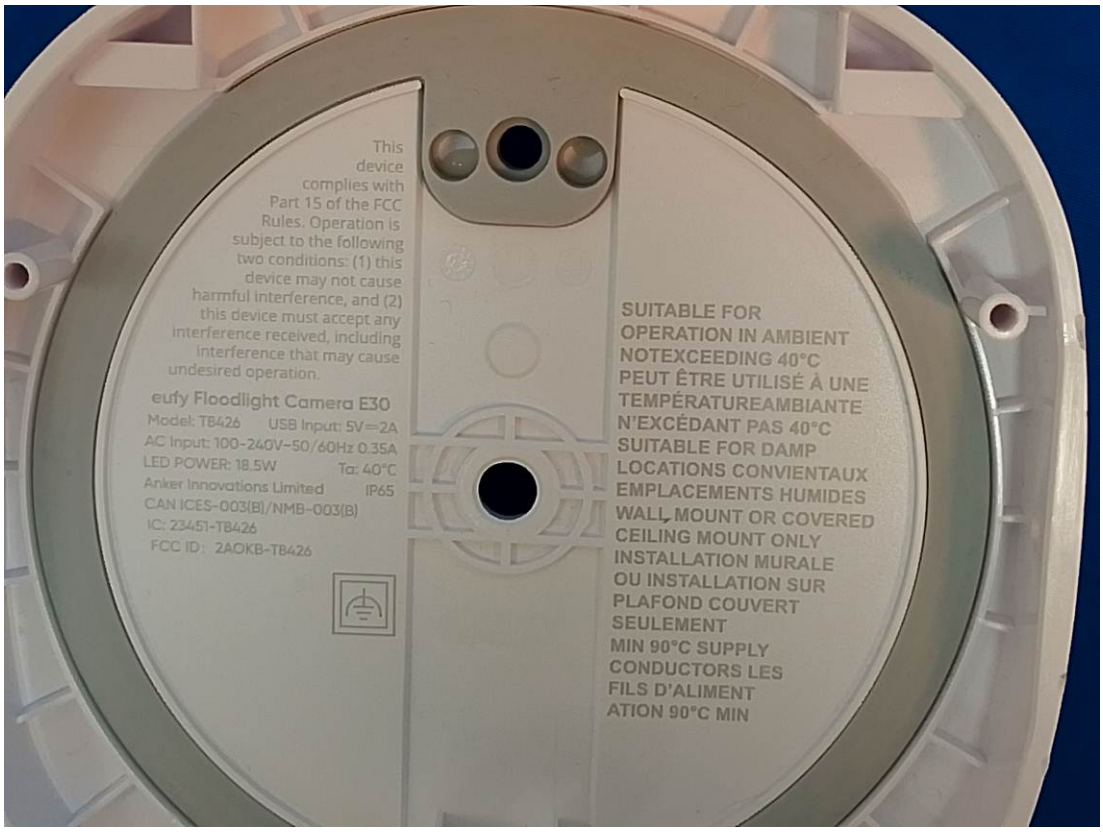
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
eufy Floodlight Camera E30
Model: T8426 USB Input: 5V⎓2A
AC Input: 100-240V~50/60Hz 0.35A
LED POWER: 18.5W Ta: 40°C
Anker Innovations Limited IP65
CAN ICES-003(B)/NMB-003(B)
IC: 23451-T8426
FCC ID: 2AOKB-T8426
SUITABLE FOR OPERATION IN AMBIENT NOTEXCEEDING 40°C
PEUT ÊTRE UTILISÉ À UNE TEMPÉRATUREAMBIANTE N'EXCÉDANT PAS 40°C
SUITABLE FOR DAMP LOCATIONS CONVIENTAUX EMPLACEMENTS HUMIDES
WALL MOUNT OR COVERED
CEILING MOUNT ONLY
INSTALLATION MURALE OU INSTALLATION SUR PLAFOND COUVERT SEULEMENT
MIN 90°C SUPPLY CONDUCTORS LES FILS D'ALIMENT ATION 90°C MIN

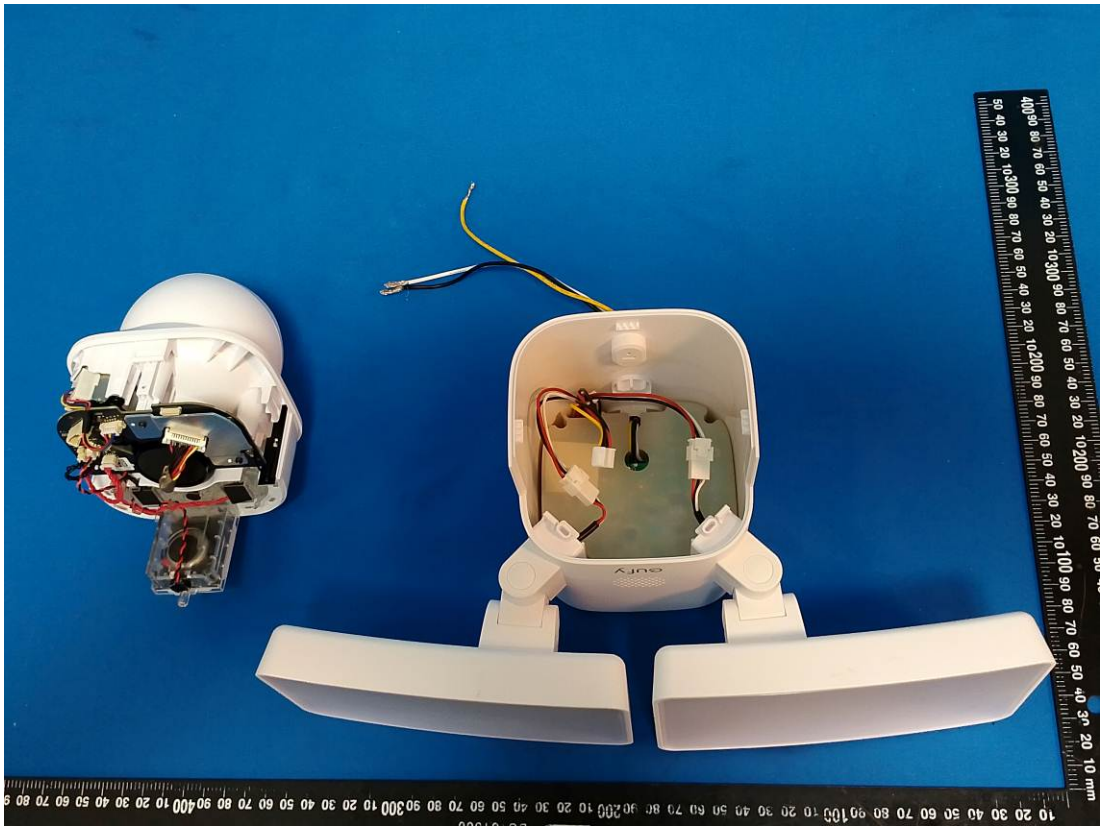

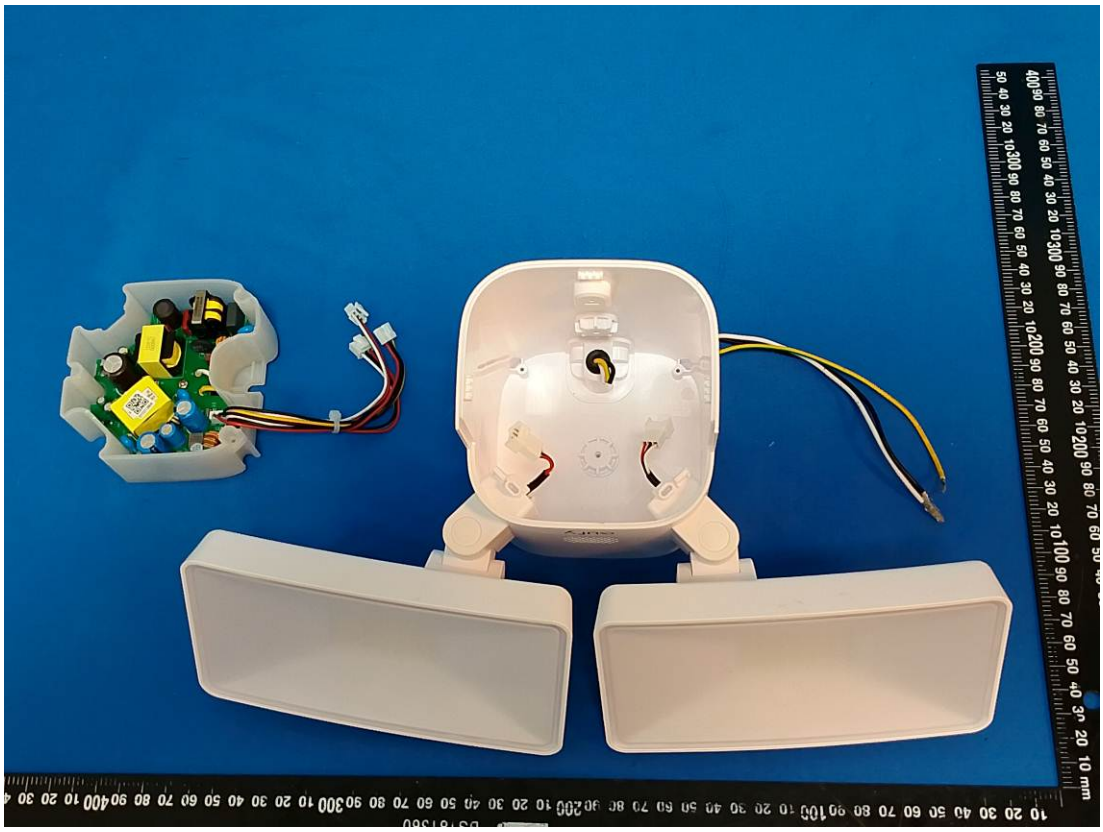

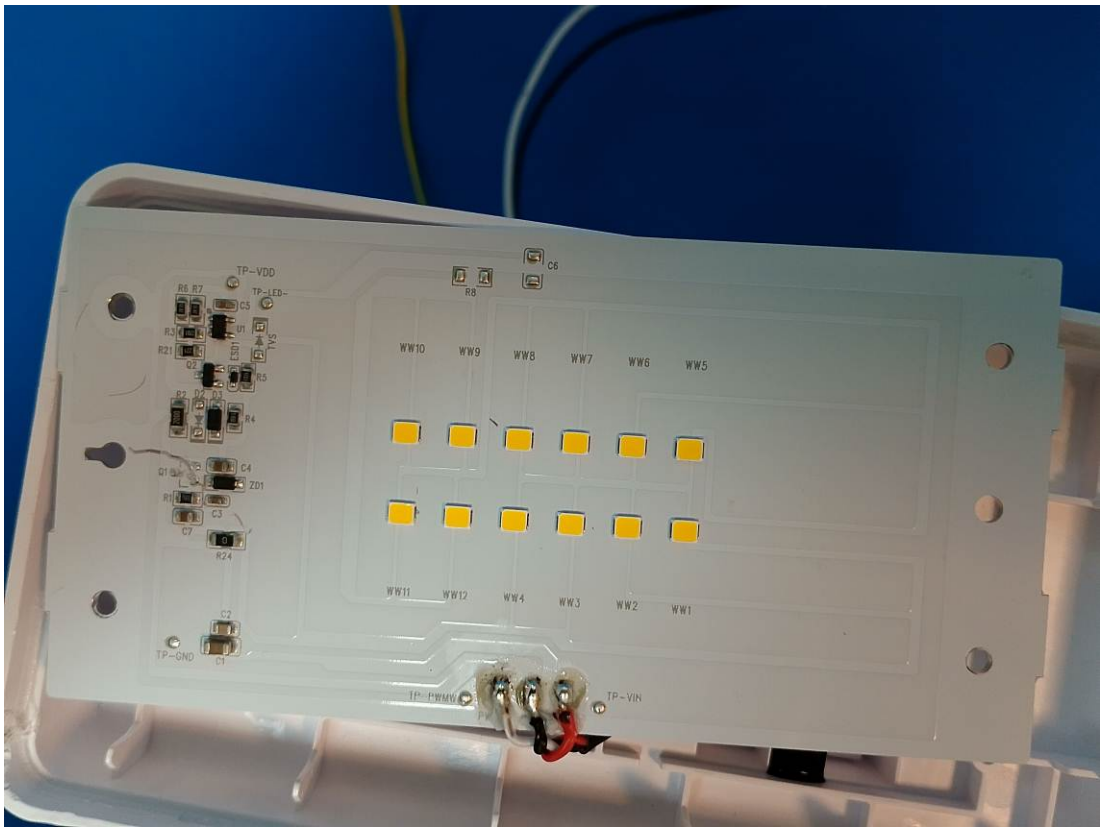
TP-VDD
TP-LED-
C6
R8
WW10
WW9
WW8
WW7
WW6
WW5
WW11
WW12
WW4
WW3
WW2
WW1
TP-GND
TP-VIN

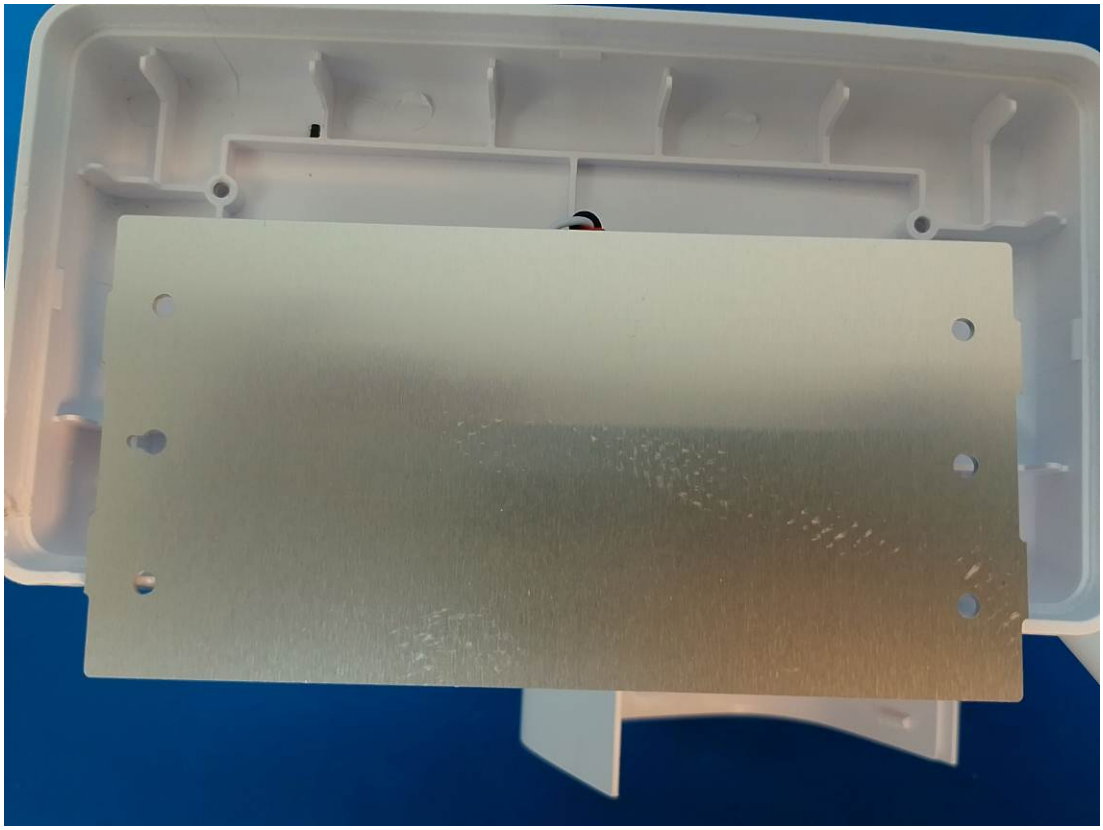

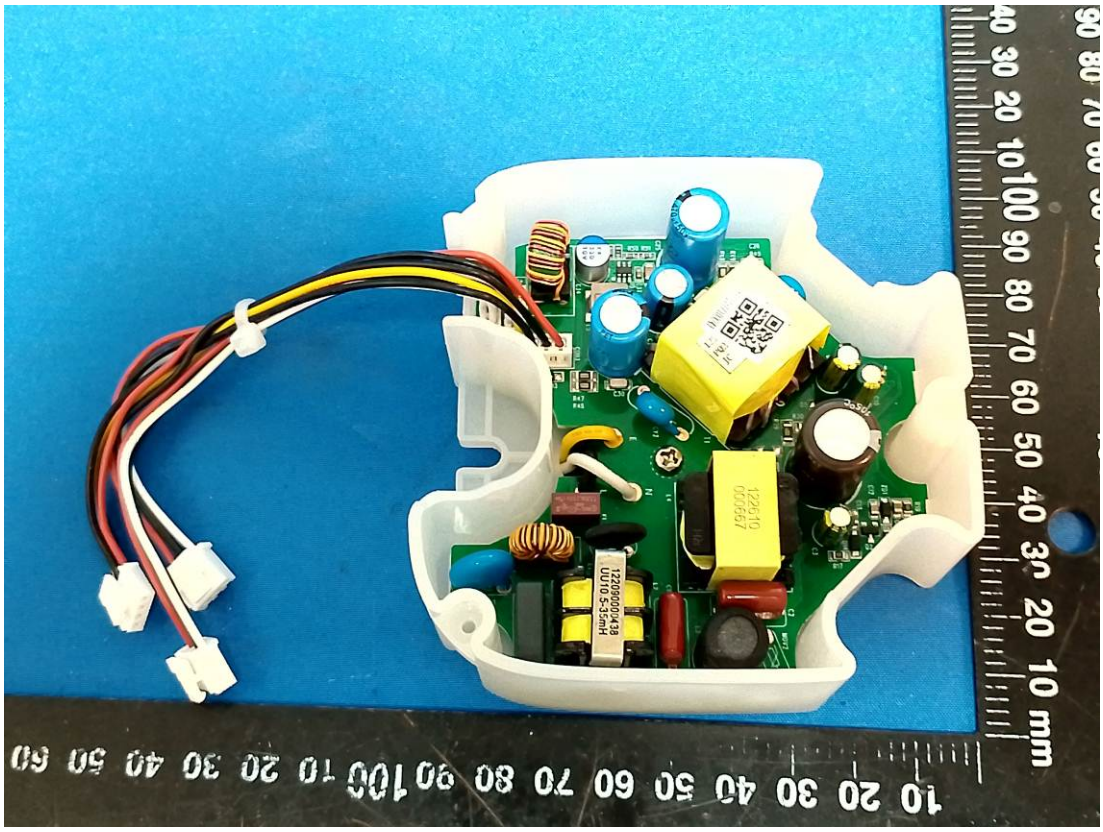

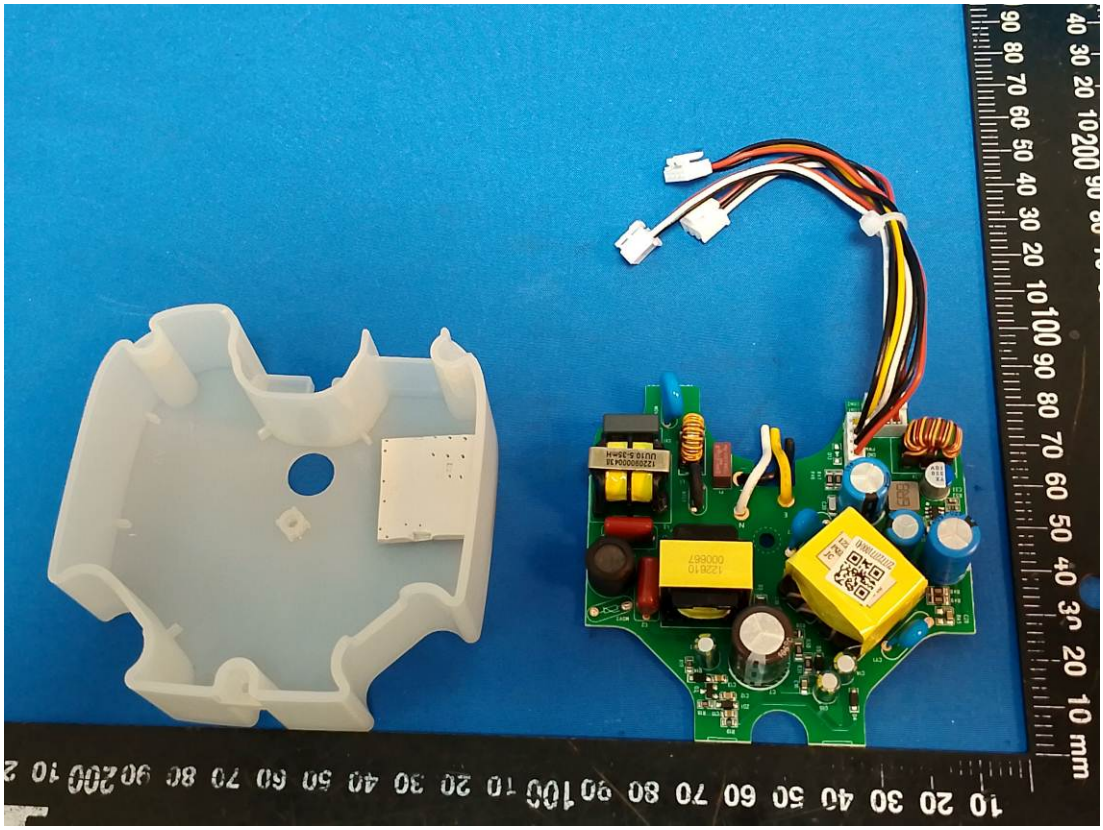

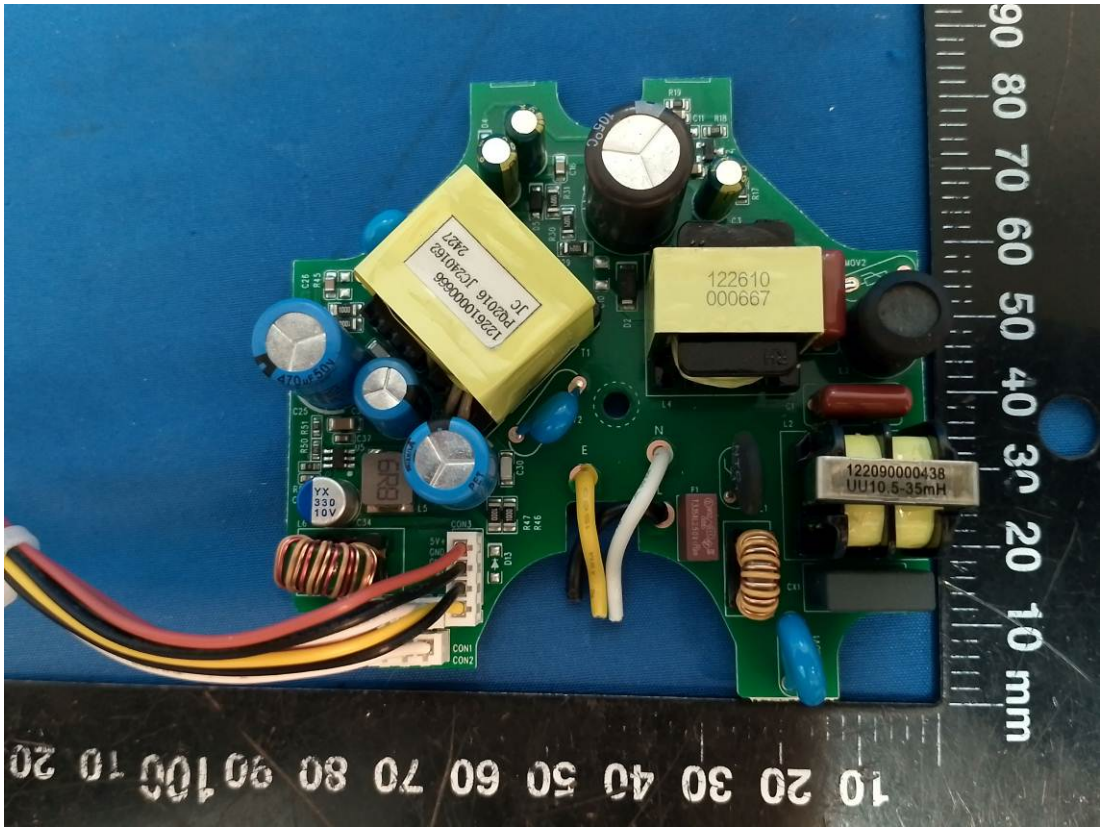
122610
000667
122090000438
UU10.5-35mH
YX
330
10V
CON1
CON2

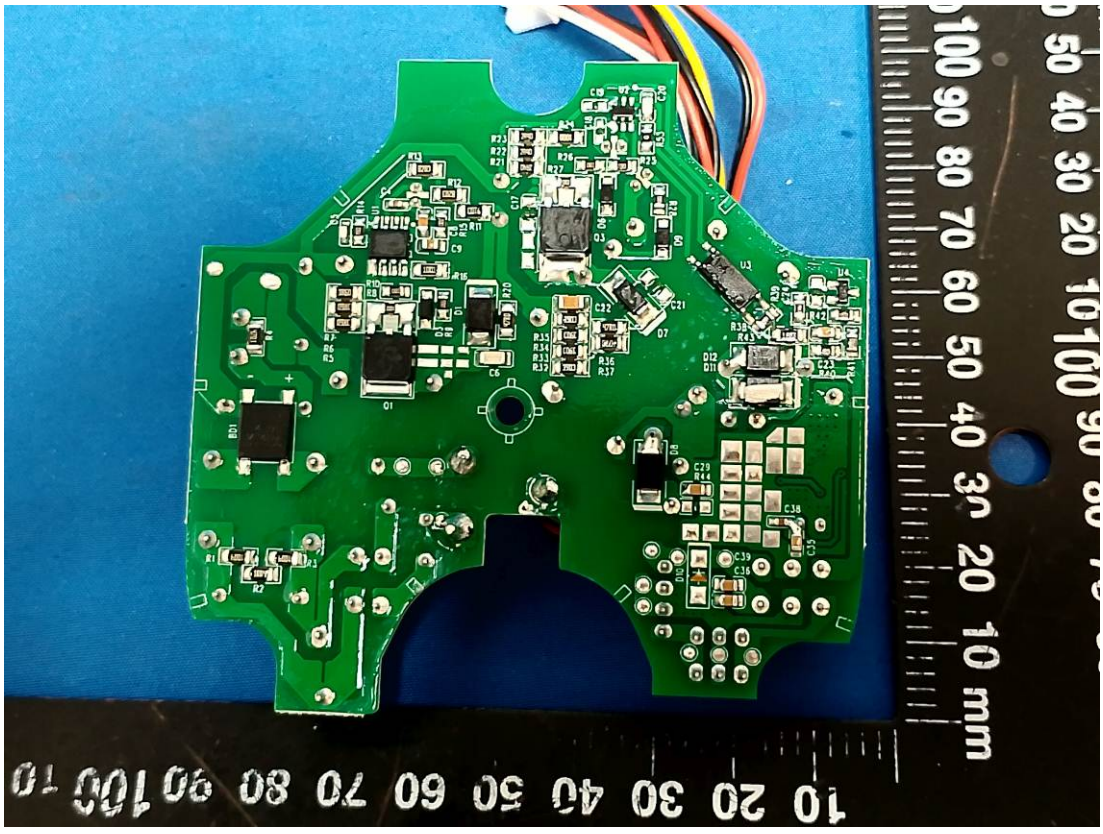

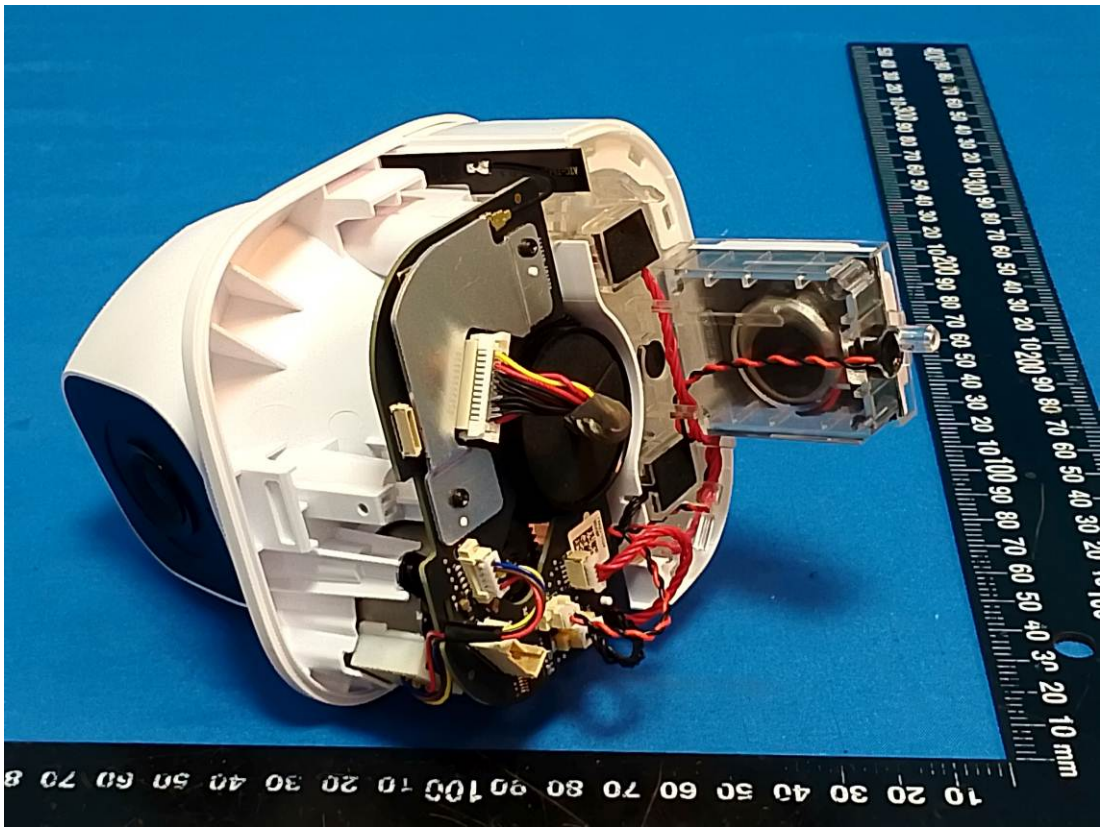

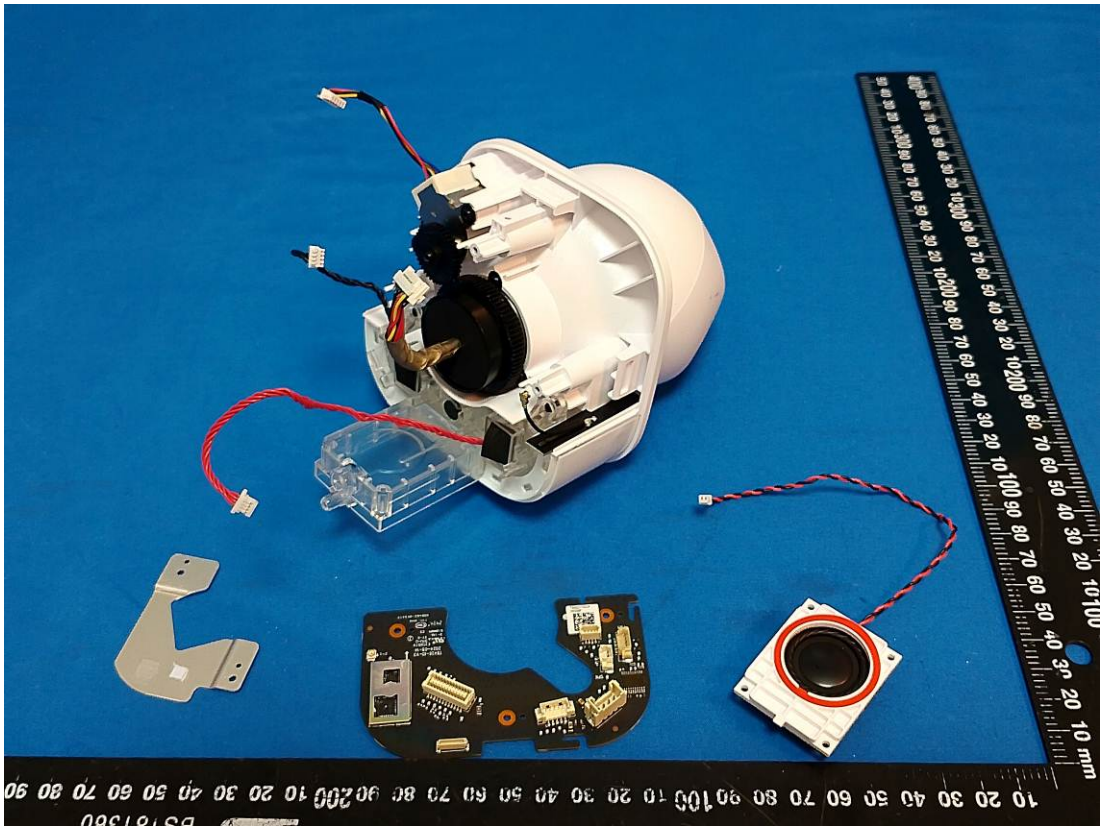

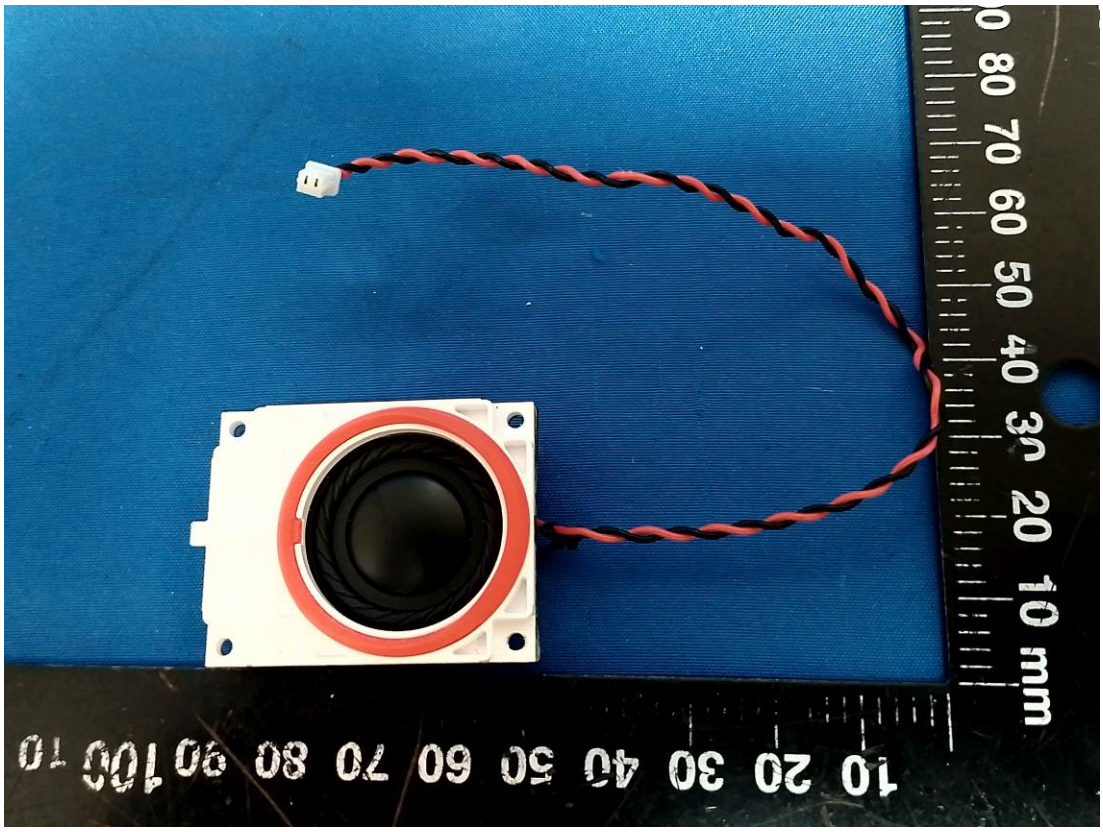
0 80 70 60 50 40 30 20 10 mm
10 20 30 40 50 60 70 80 90 100

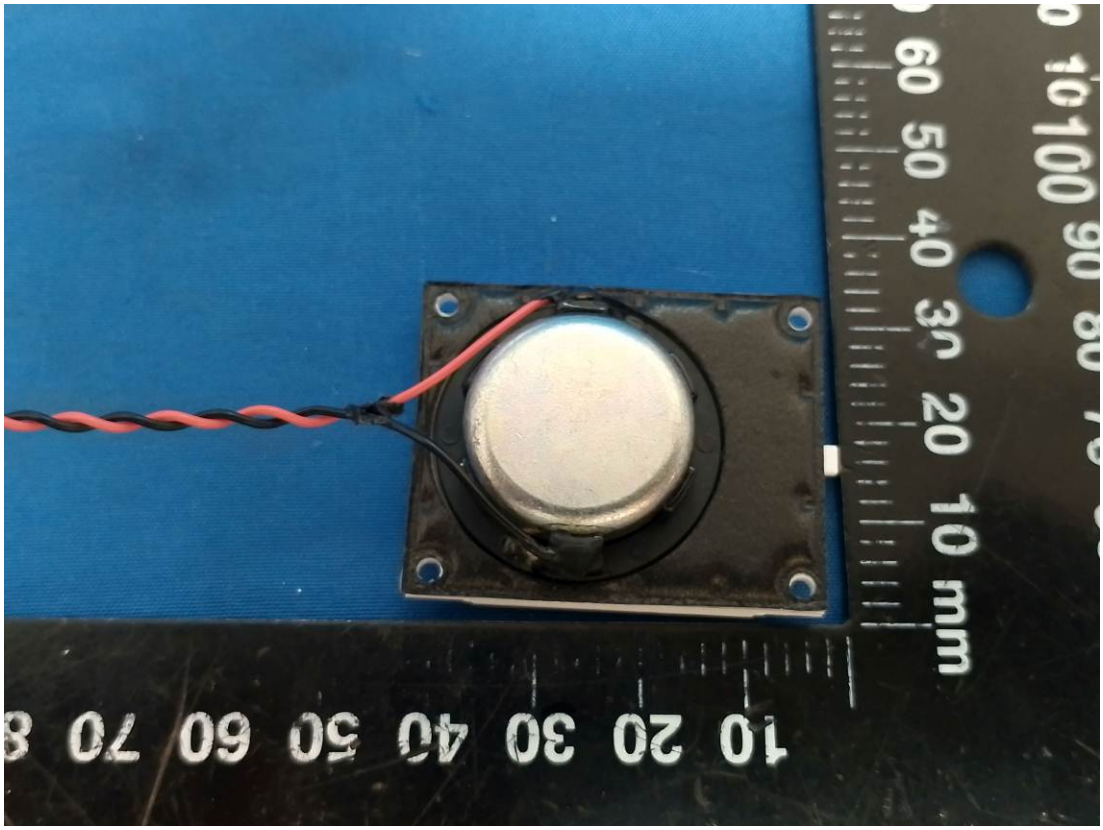
60 50 40 30 20 10 mm
10 20 30 40 50 60 70

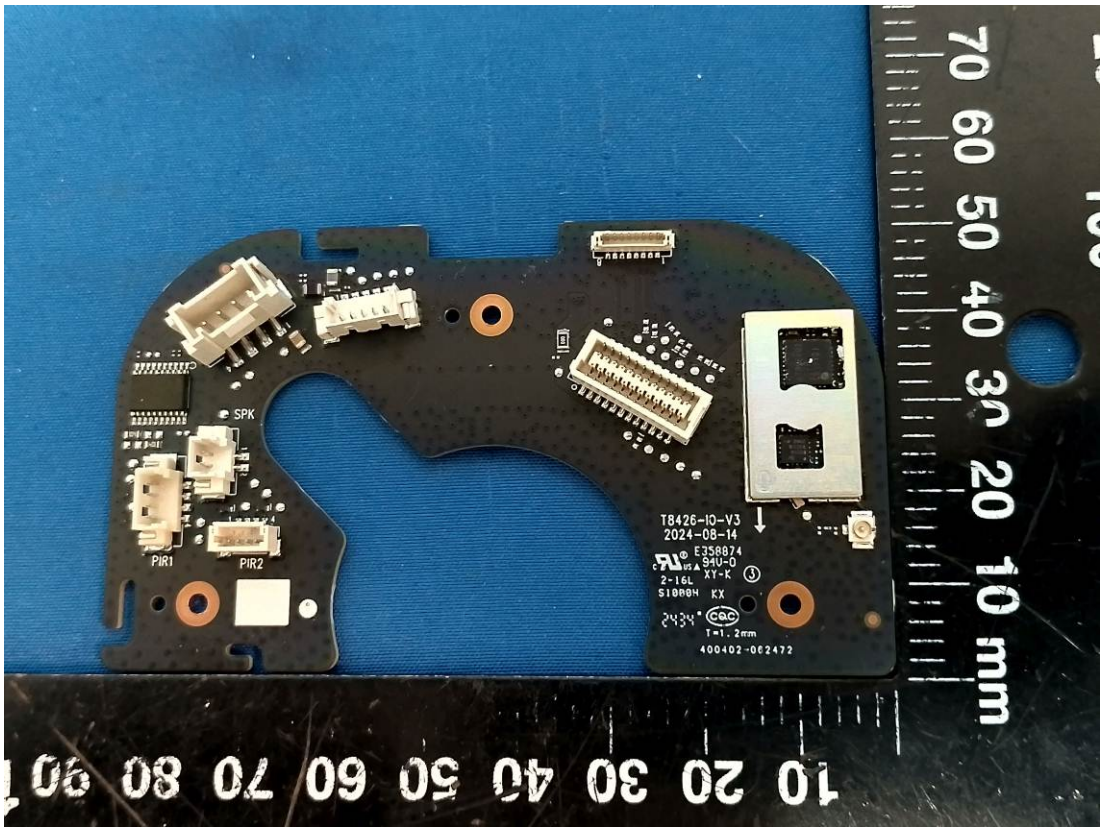
SPK
PIR1
PIR2
T8426-IO-V3
2024-08-14
E358874
94V-0
XY-K
2-16L
S1000H
KX
T=1.2mm
400402-002472

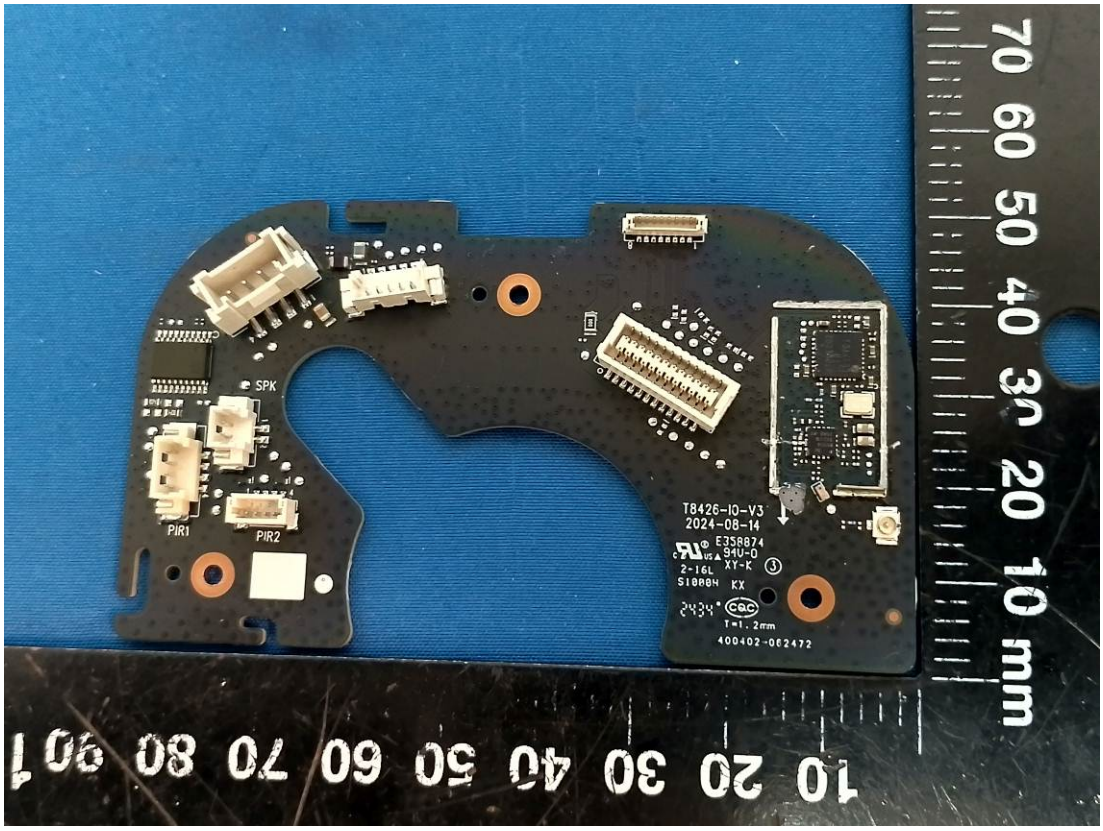
SPK
PIR1
PIR2
T8426-IO-V3
2024-08-14
E358874
94V-0
XY-K
2-16L
S1000H
KX
T=1.2mm
400402-002472

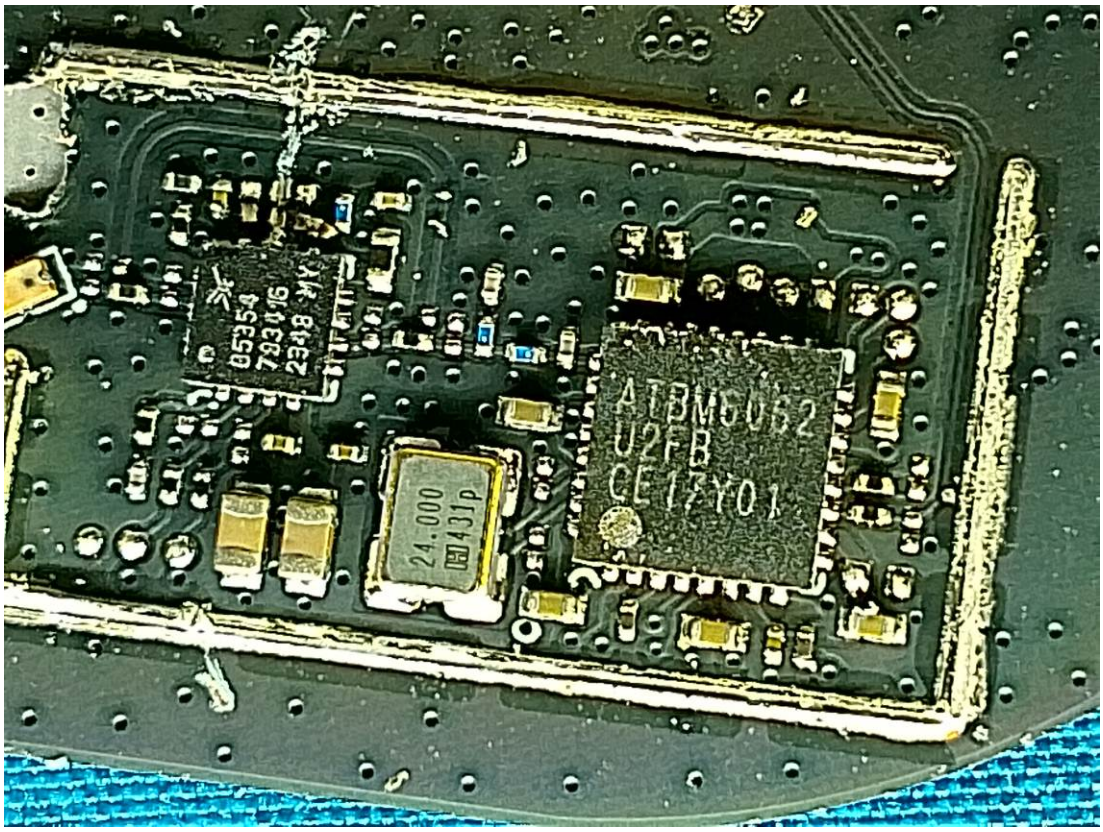
ATBM6062
U2FB
24.000
431P

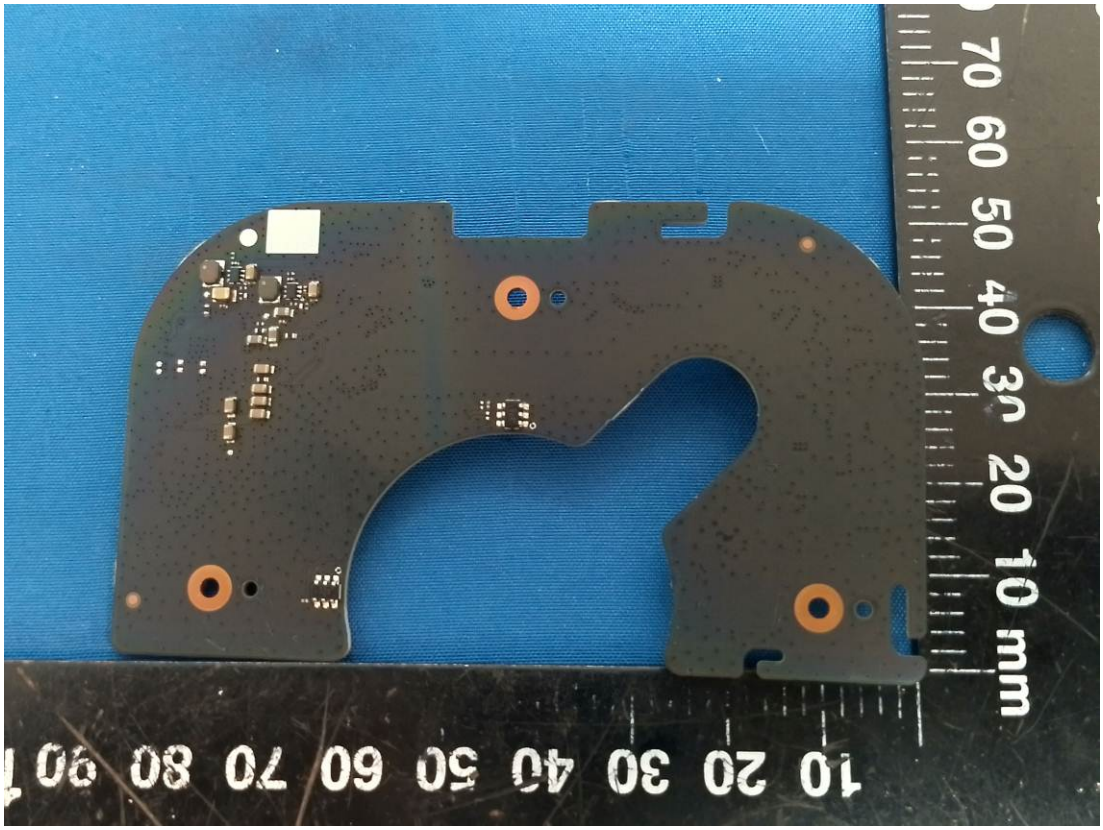
70 60 50 40 30 20 10 mm
10 20 30 40 50 60 70 80 90

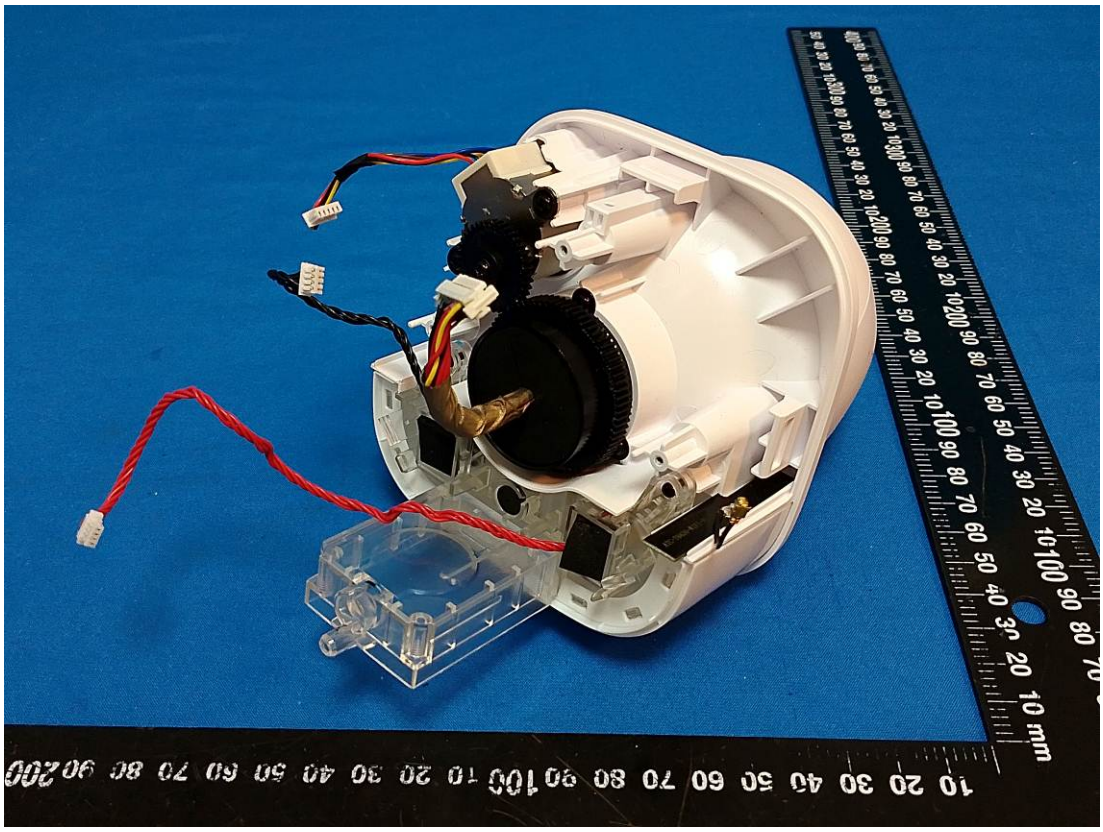

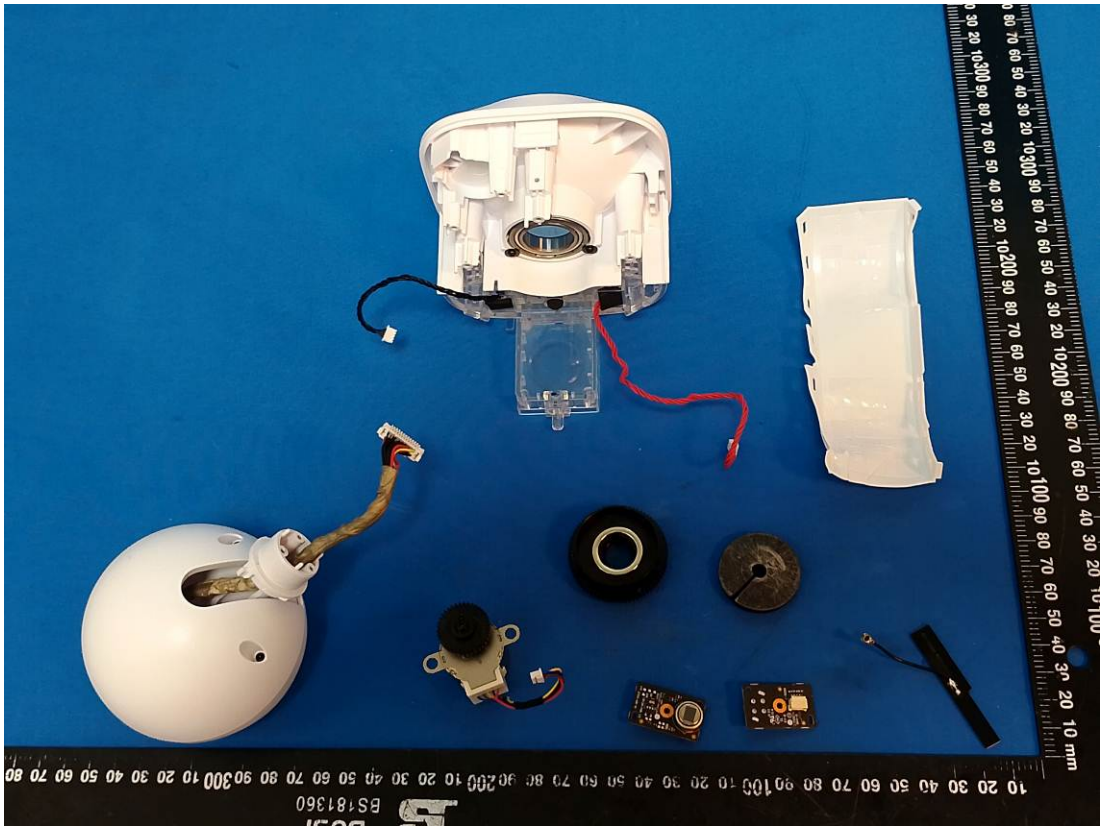

Bluetooth&Wifi Antenna

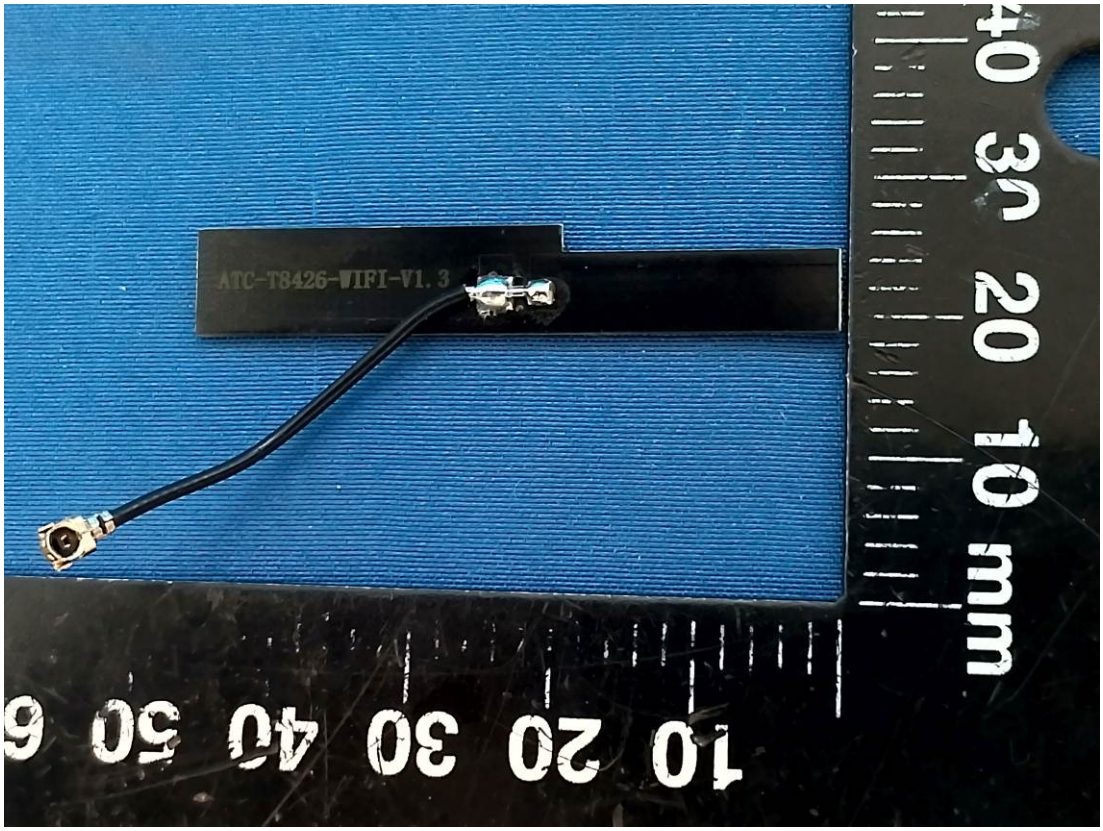

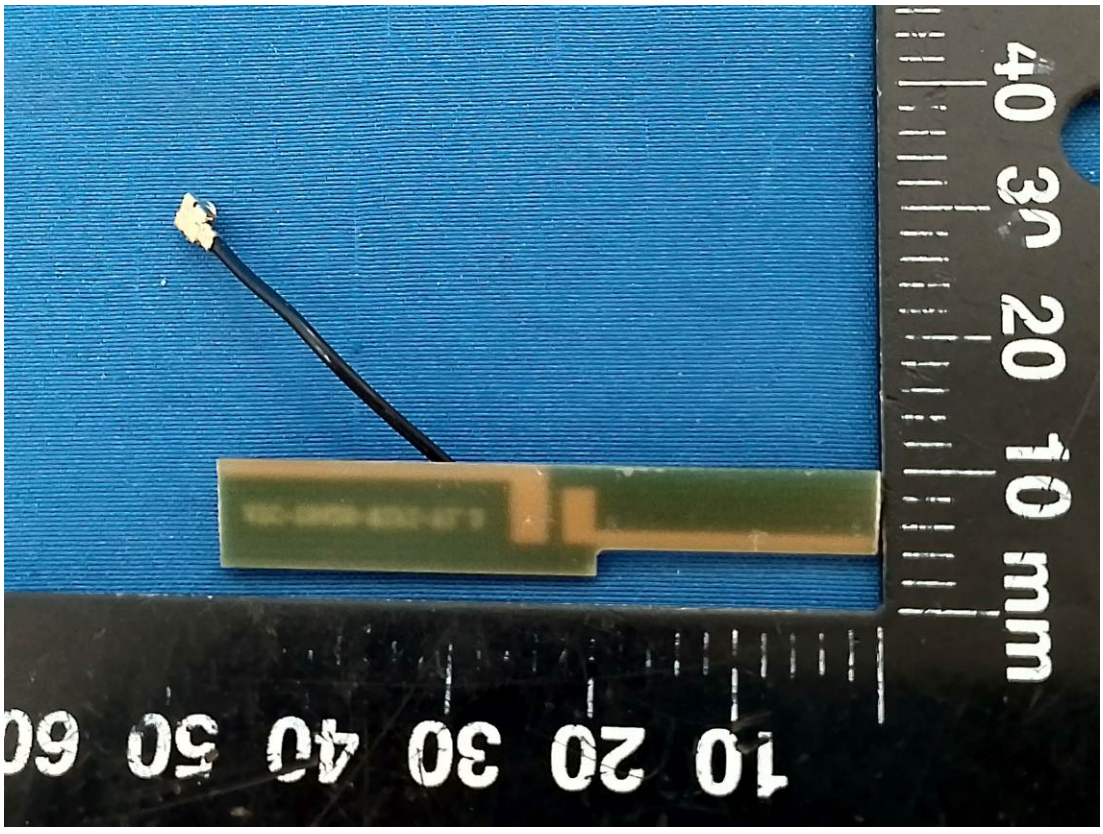

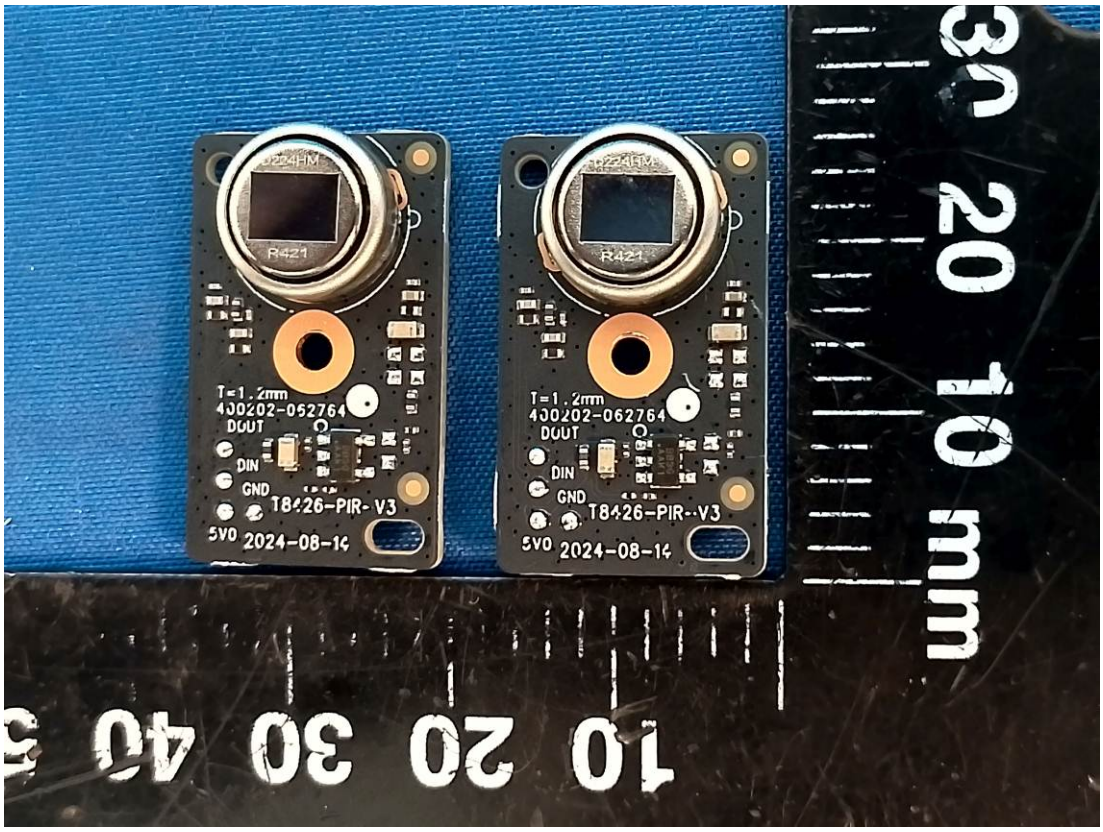
T=1.2mm
4J0202-062764
DOUT
DIN
GND
T8426-PIR-V3
5VO 2024-08-14
T=1.2mm
4J0202-062764
DOUT
DIN
GND
T8426-PIR-V3
5VO 2024-08-14

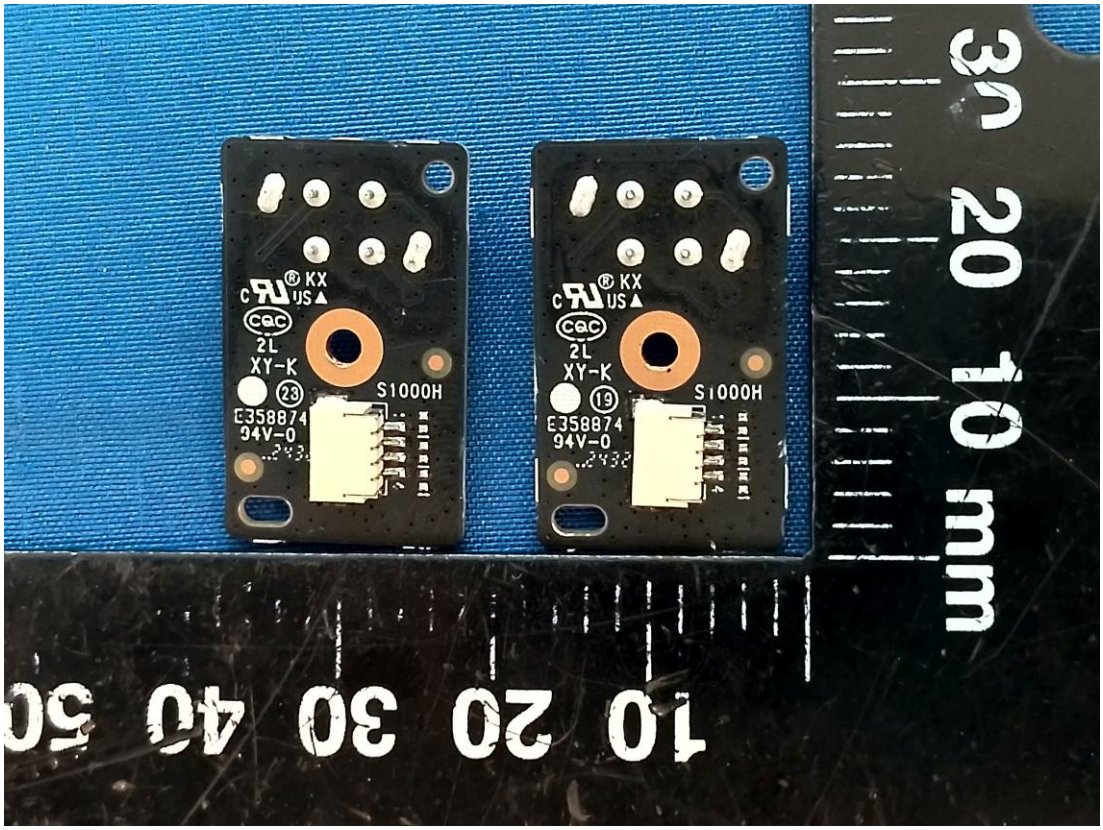
KX
2L
XY-K
S1000H
E358874
94V-0
KX
2L
XY-K
S1000H
E358874
94V-0

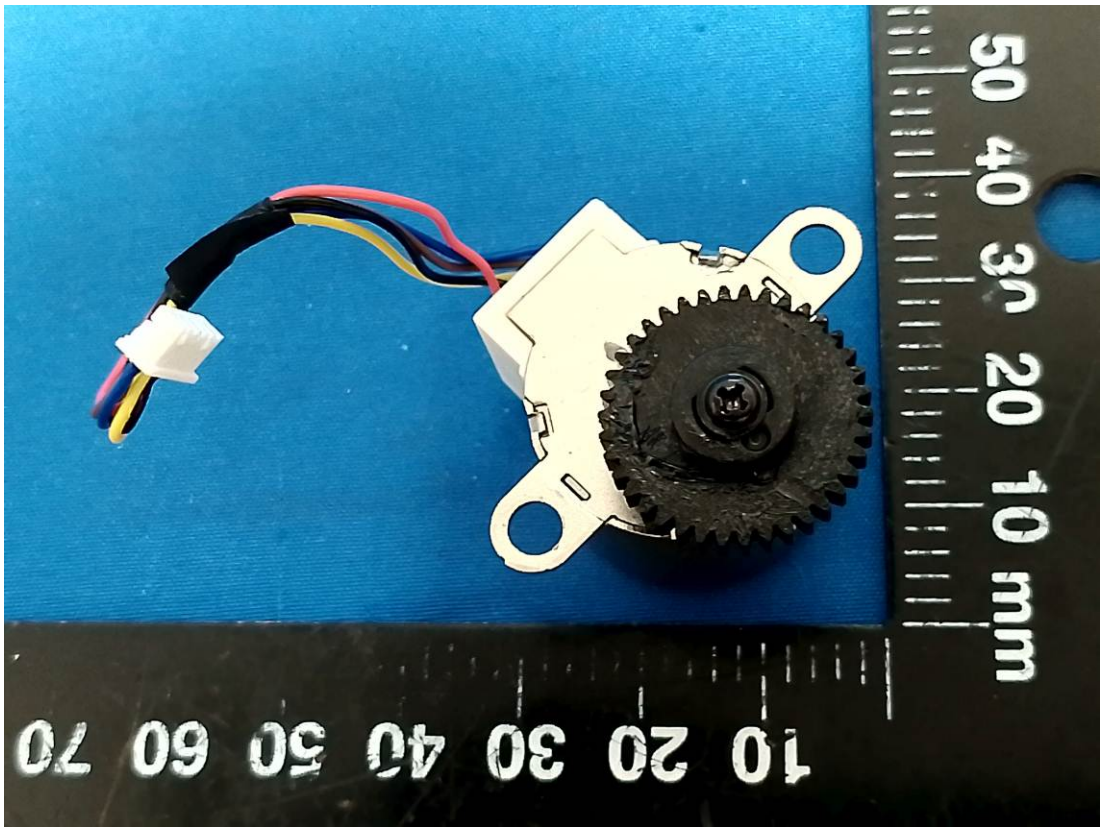
50 40 30 20 10 mm
10 20 30 40 50 60 70

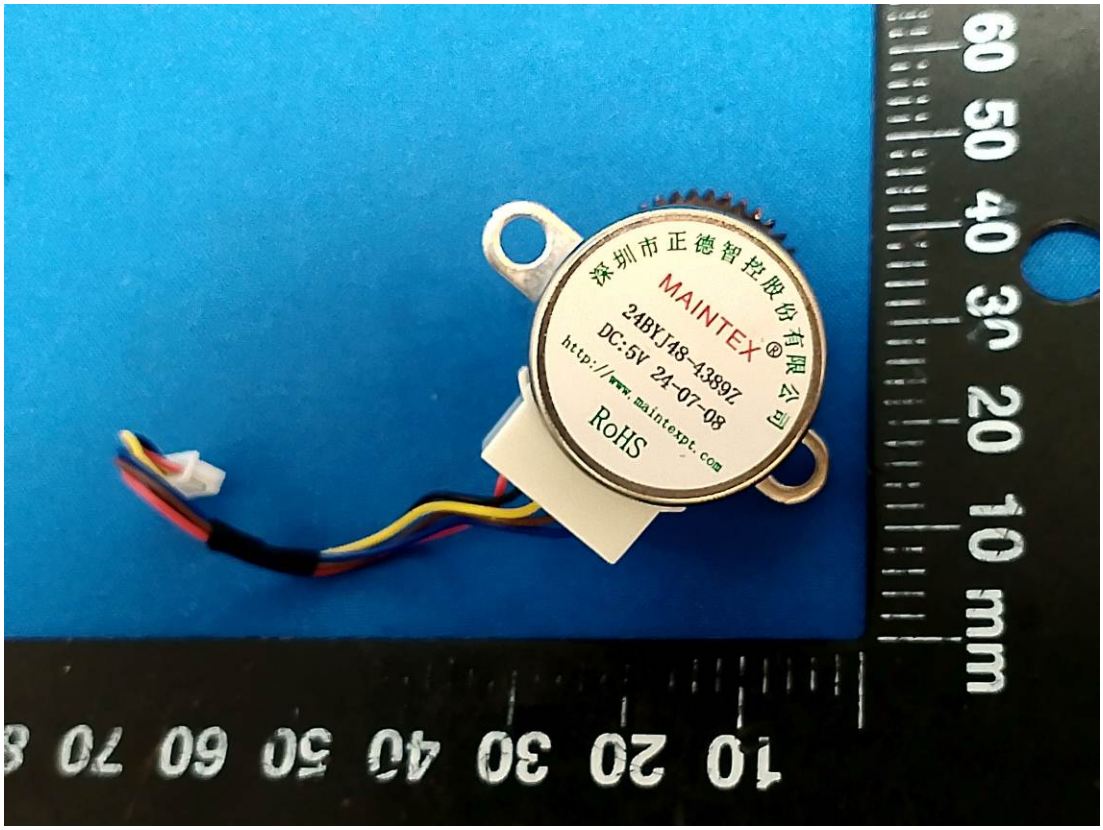
60 50 40 30 20 10 mm
10 20 30 40 50 60 70
深圳市正德智控股份有限公司
MAINTEX ®
24BYJ48-4389Z
DC:5V 24-07-08
http://www.maintexpt.com
RoHS

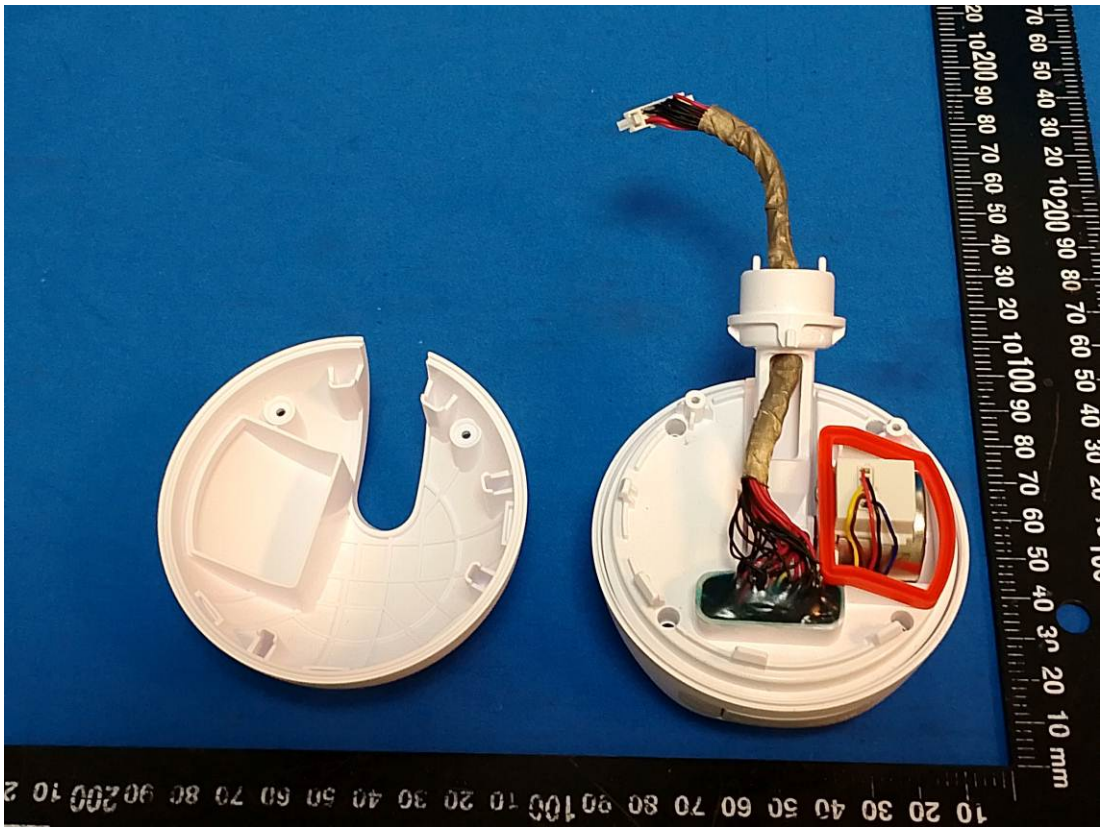

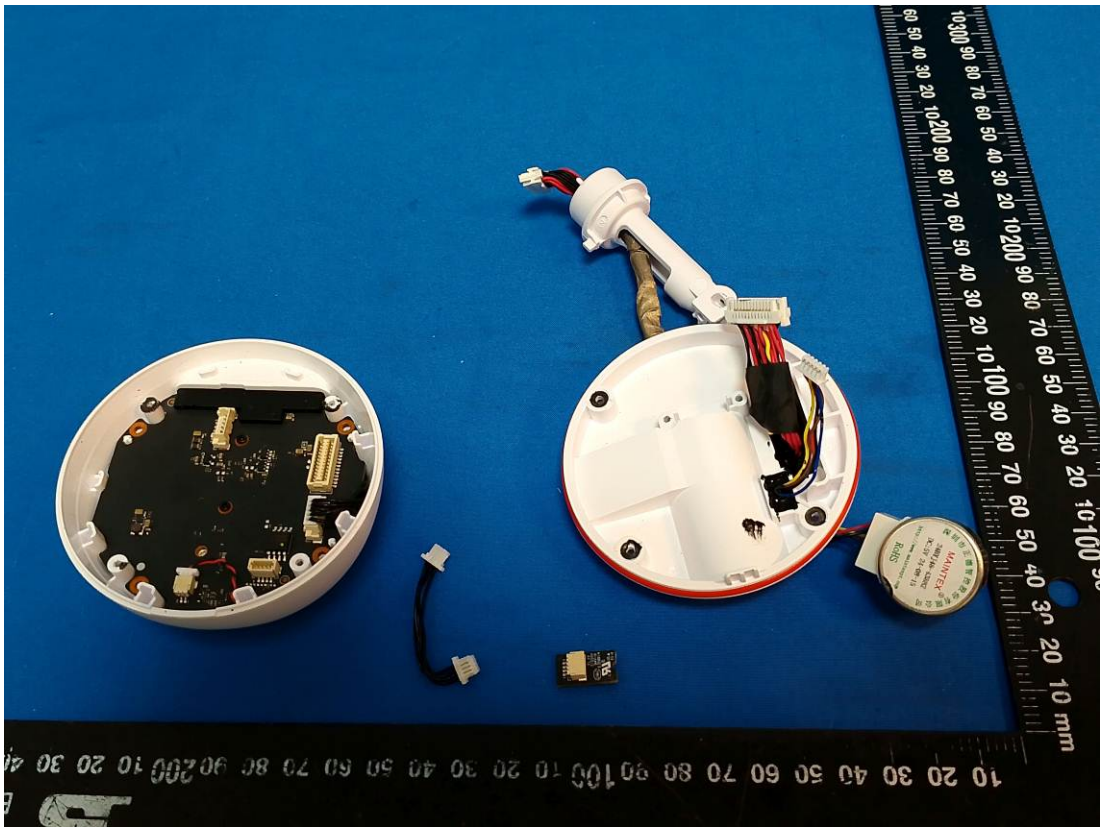

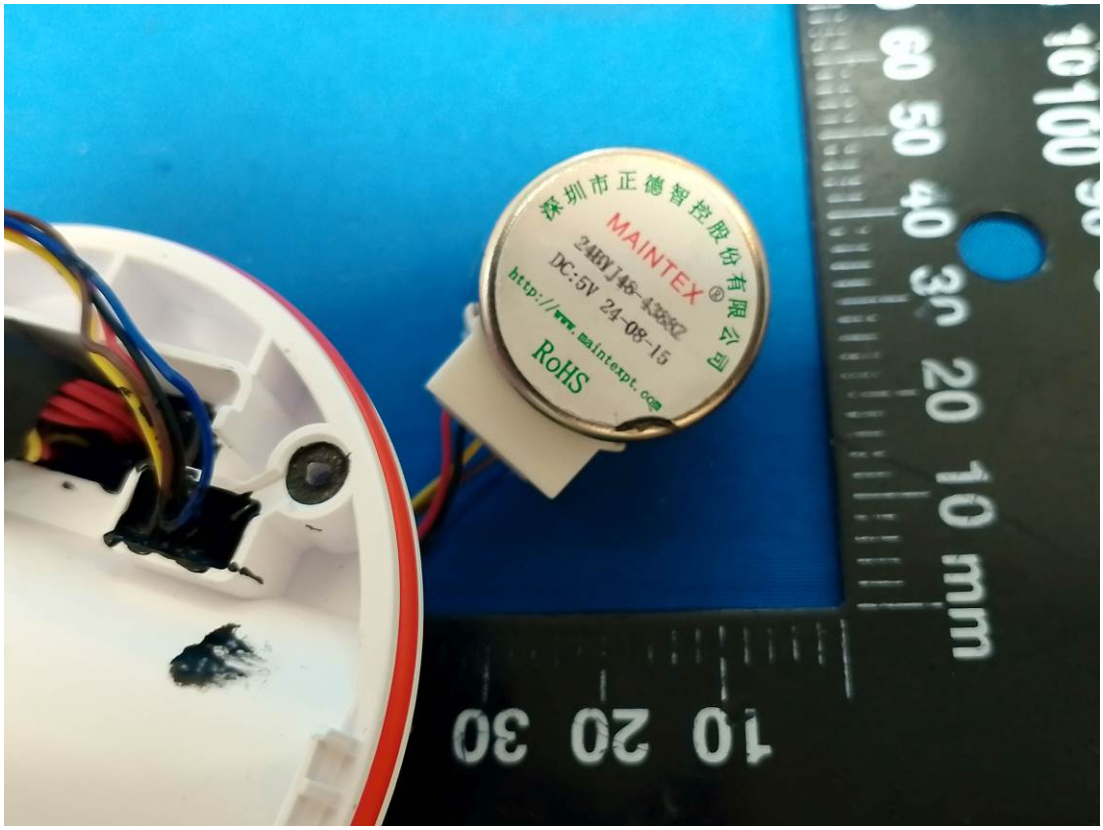
深圳市正德智控股份有限公司
MAINTEX
DC:5V 24-08-15
http://www.maintexpt.com
RoHS

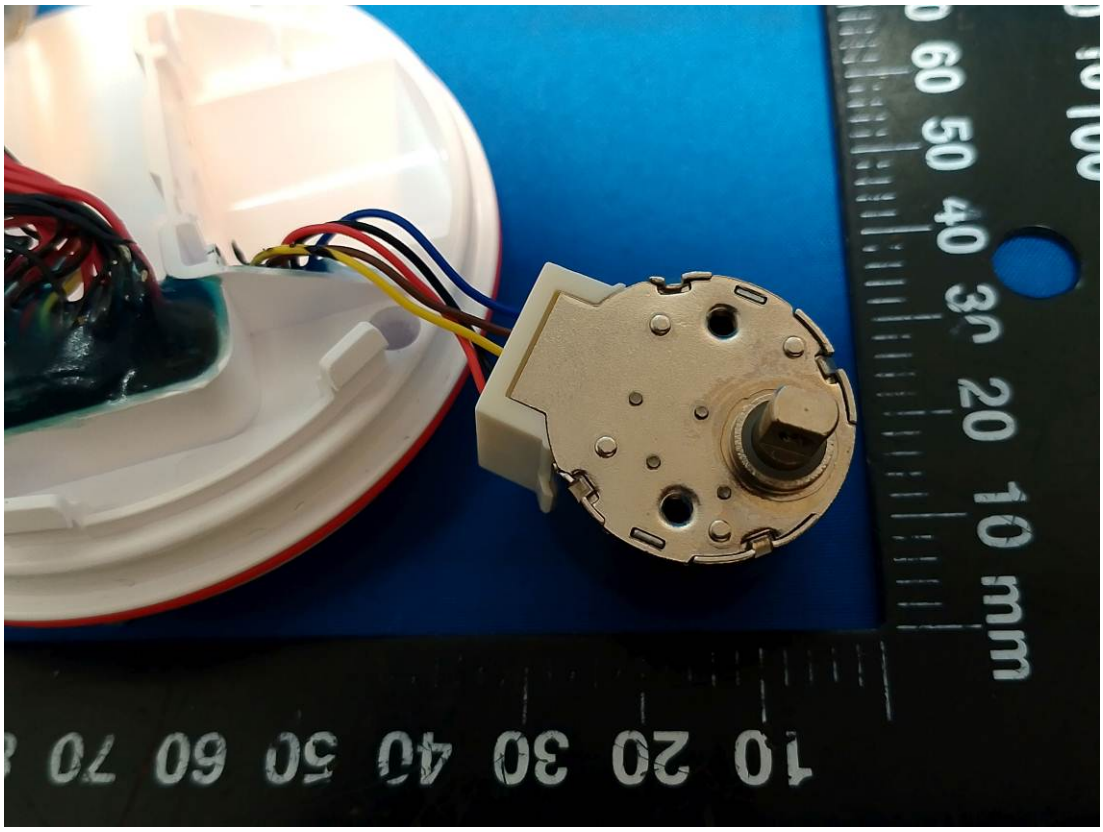
10 20 30 40 50 60 70
60 50 40 30 20 10 mm

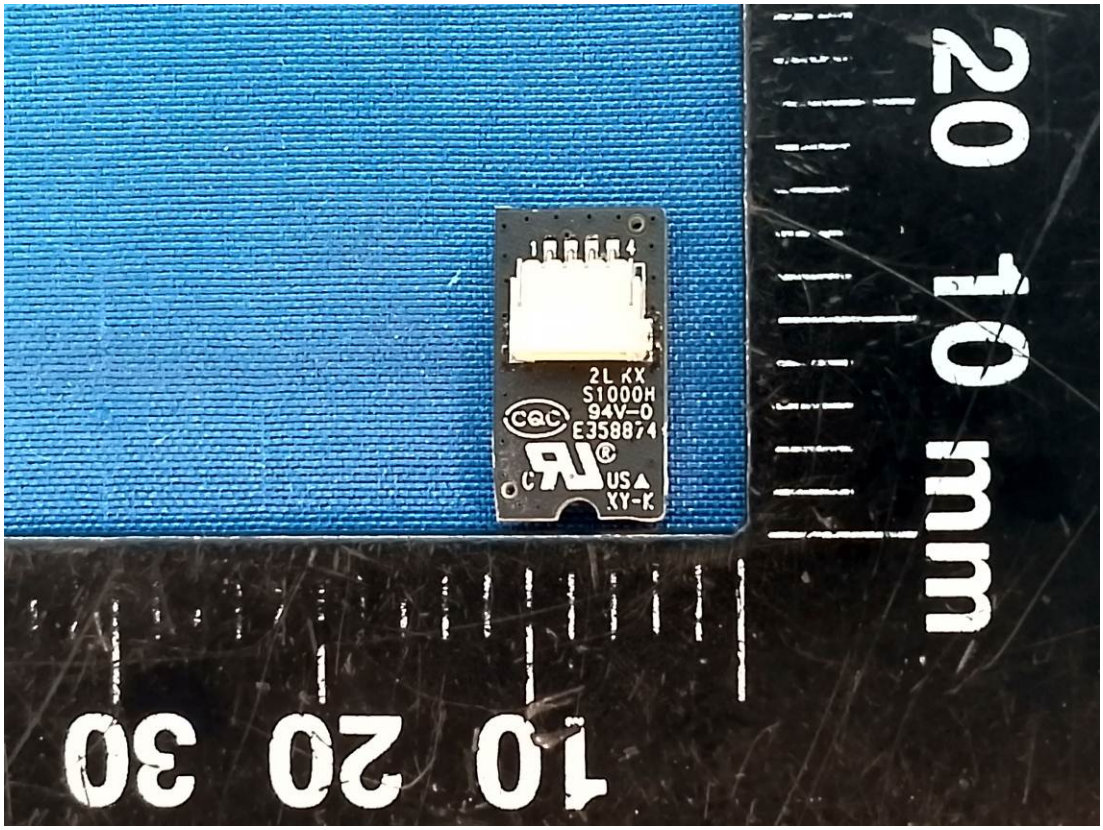
2L XX
S1000H
94V-0
E358874
US
XY-K
10 20 30
20 10 mm

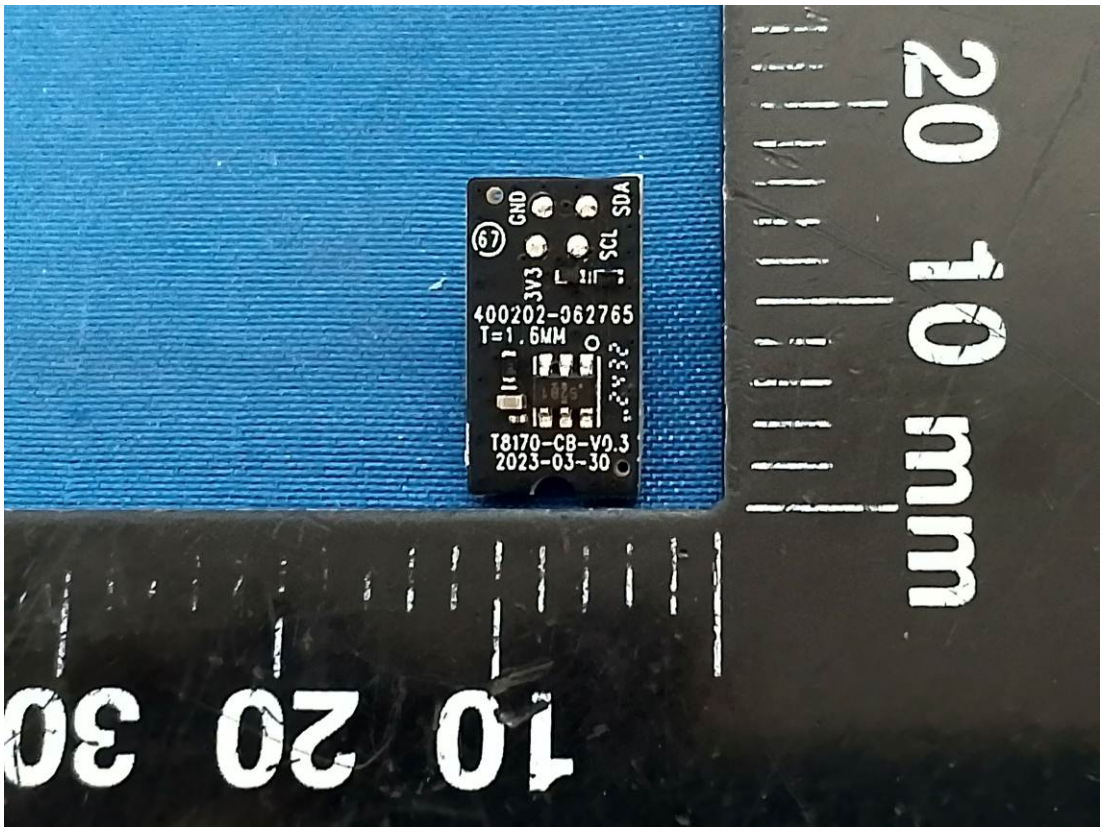
GND
SCL
SDA
3V3
400202-062765
T=1.6MM
T8170-CB-V0.3
2023-03-30
10 20 30
20 10 mm

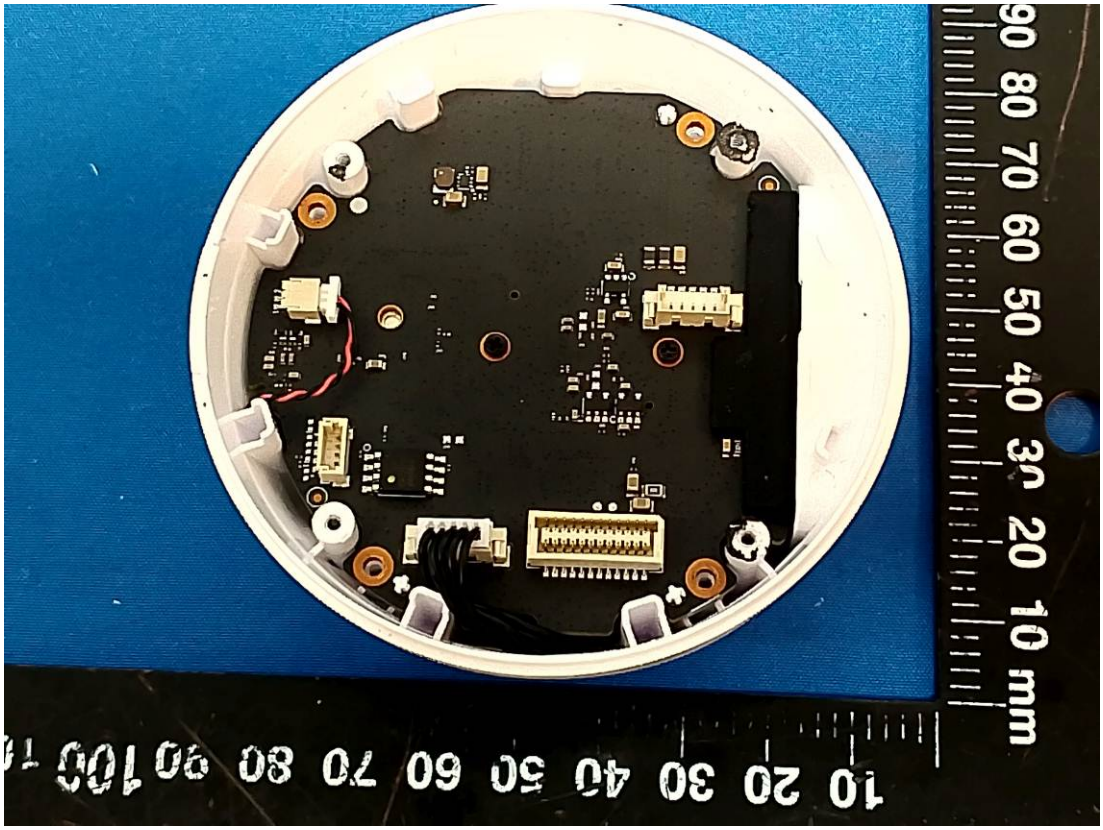
10 20 30 40 50 60 70 80 90 100
90 80 70 60 50 40 30 20 10 mm

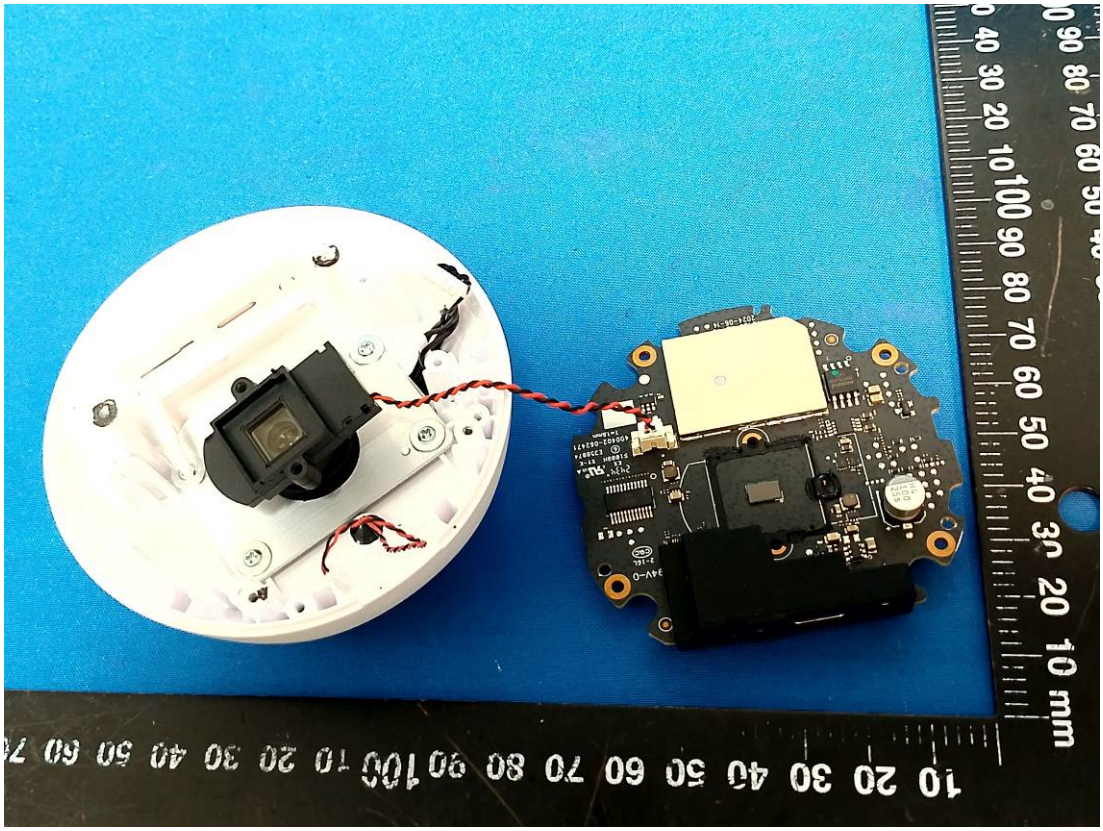

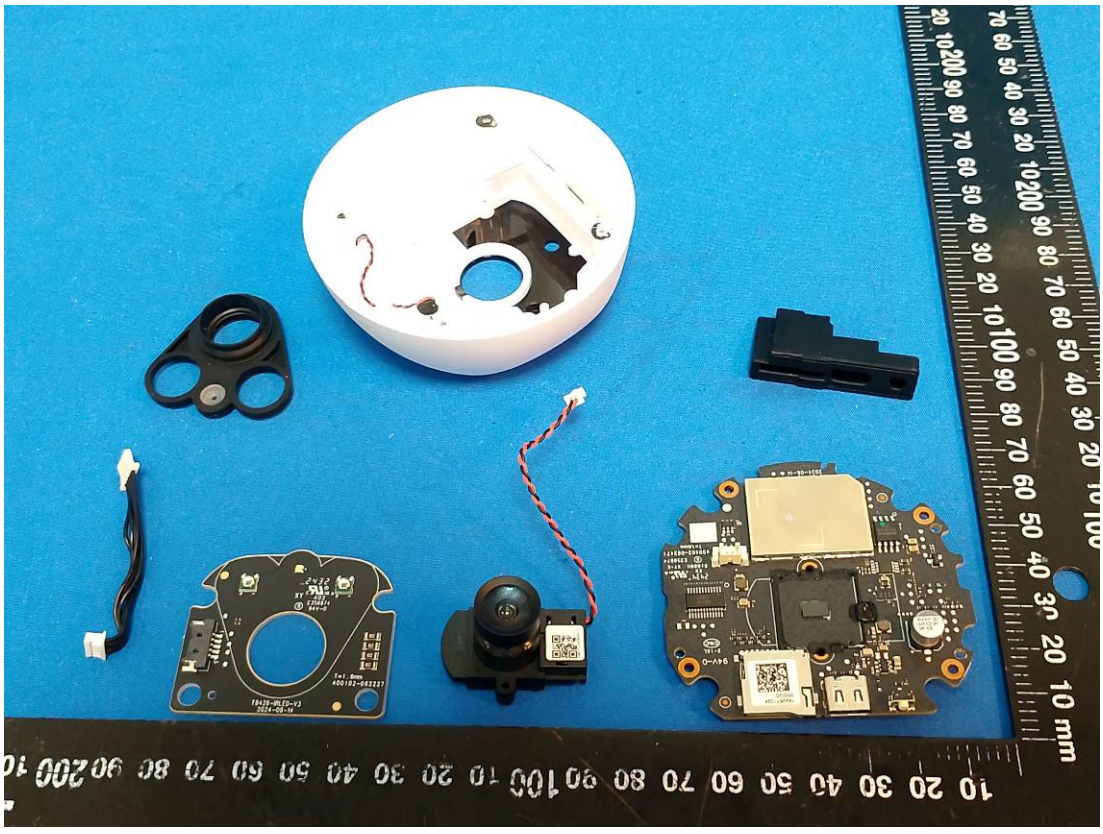

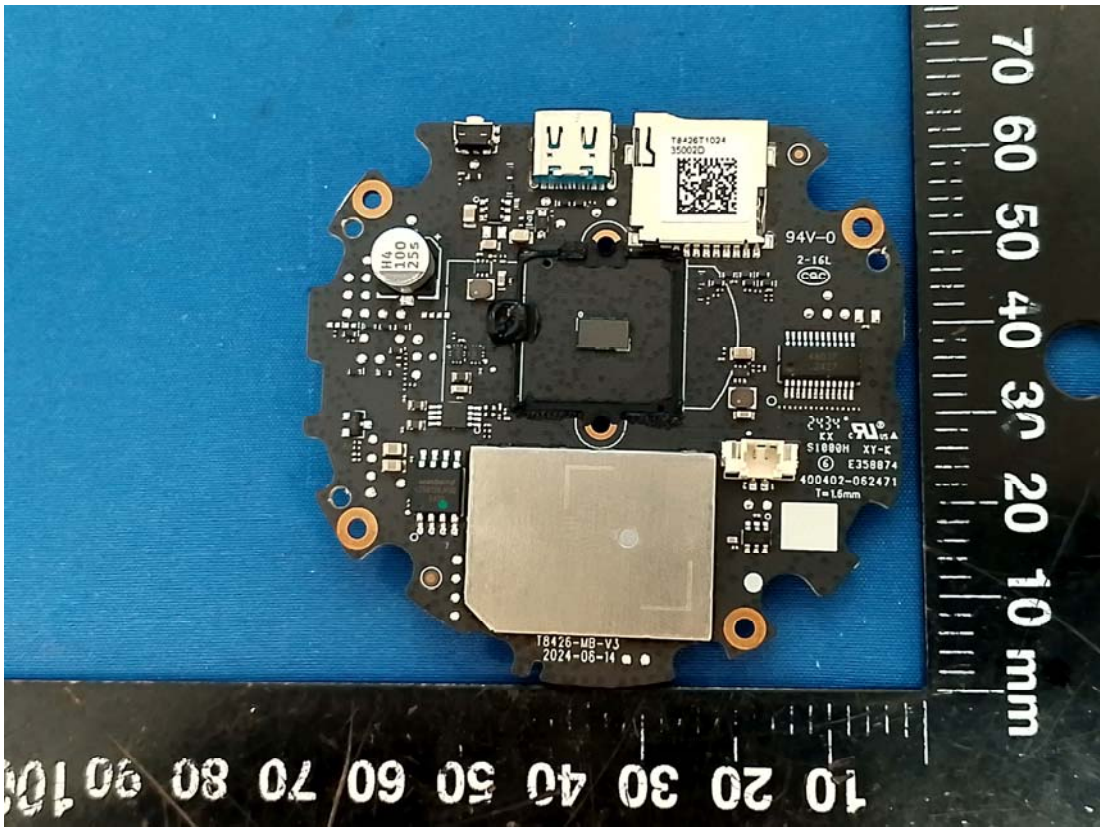
94V-0
2-16L
T8426-MB-V3
2024-06-14

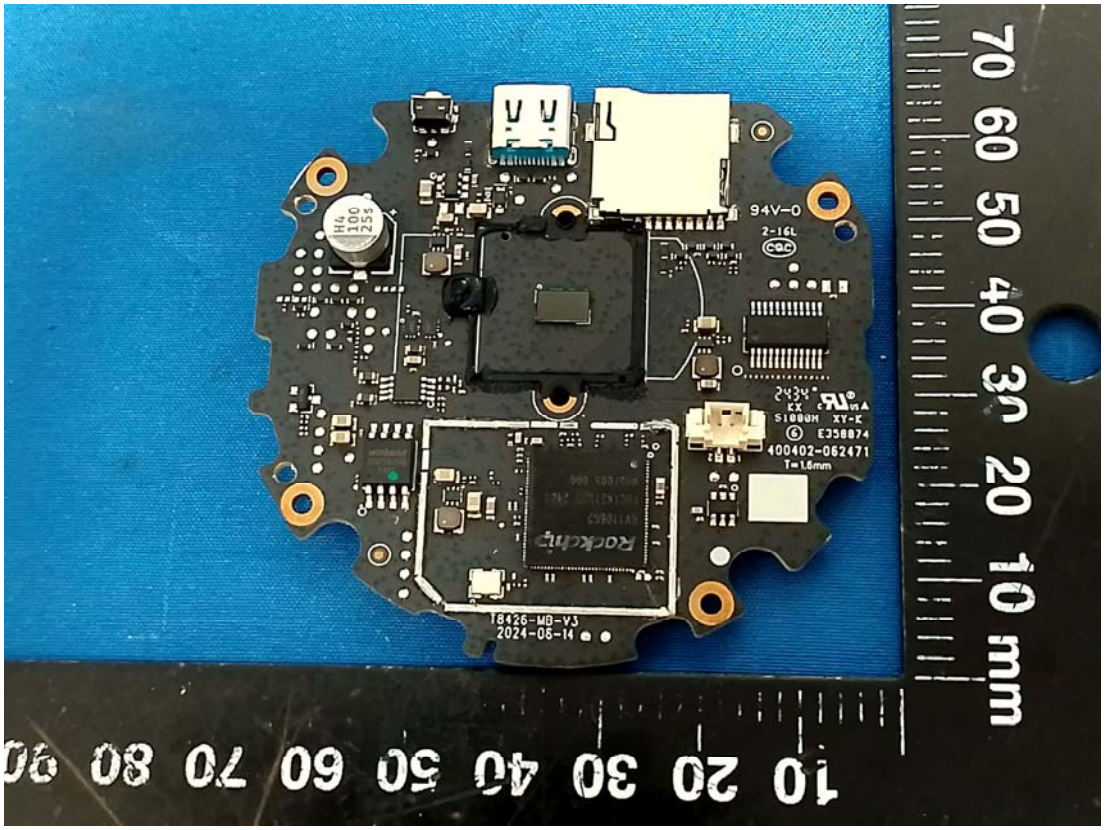
94V-0
2-16L
T8426-MB-V3
2024-06-14

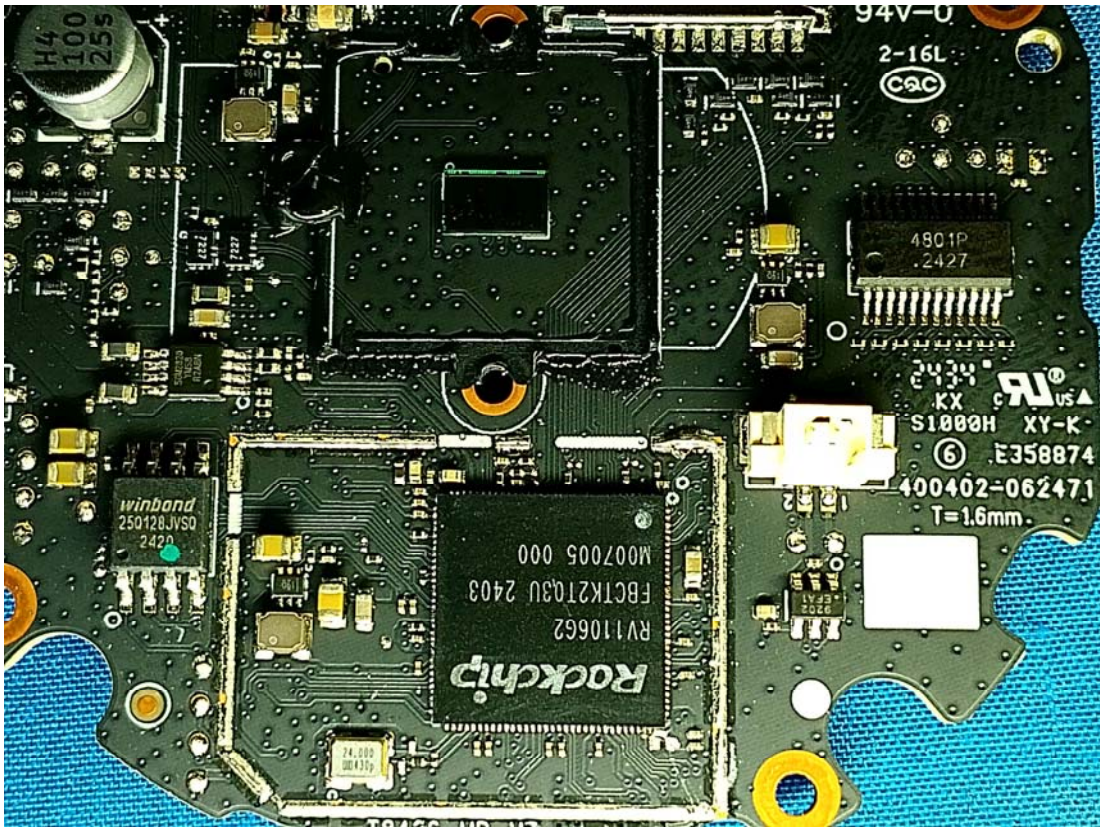
94V-0
2-16L
4801P
.2427
KX
S1000H XY-K
E358874
400402-062471
T=1.6mm
winbond
Rockchip

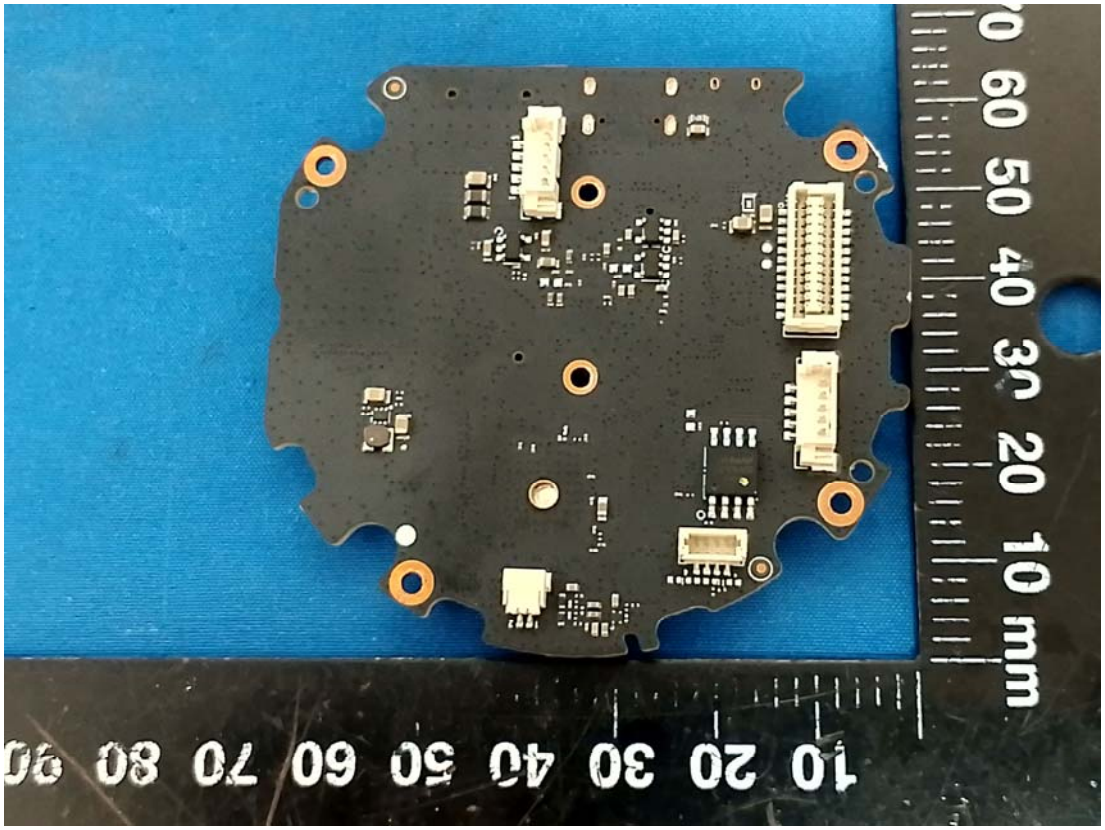
10 20 30 40 50 60 70 80 90
0 60 50 40 30 20 10 mm

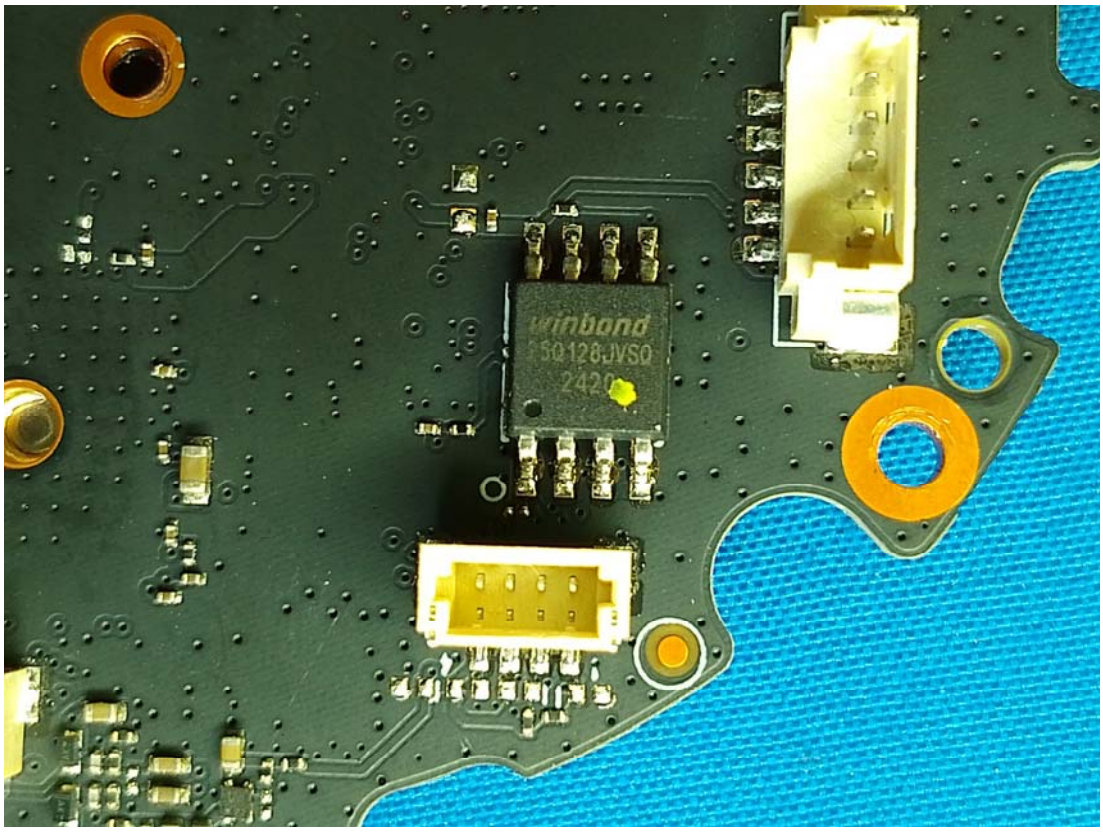
winbond
SQ128JVSQ

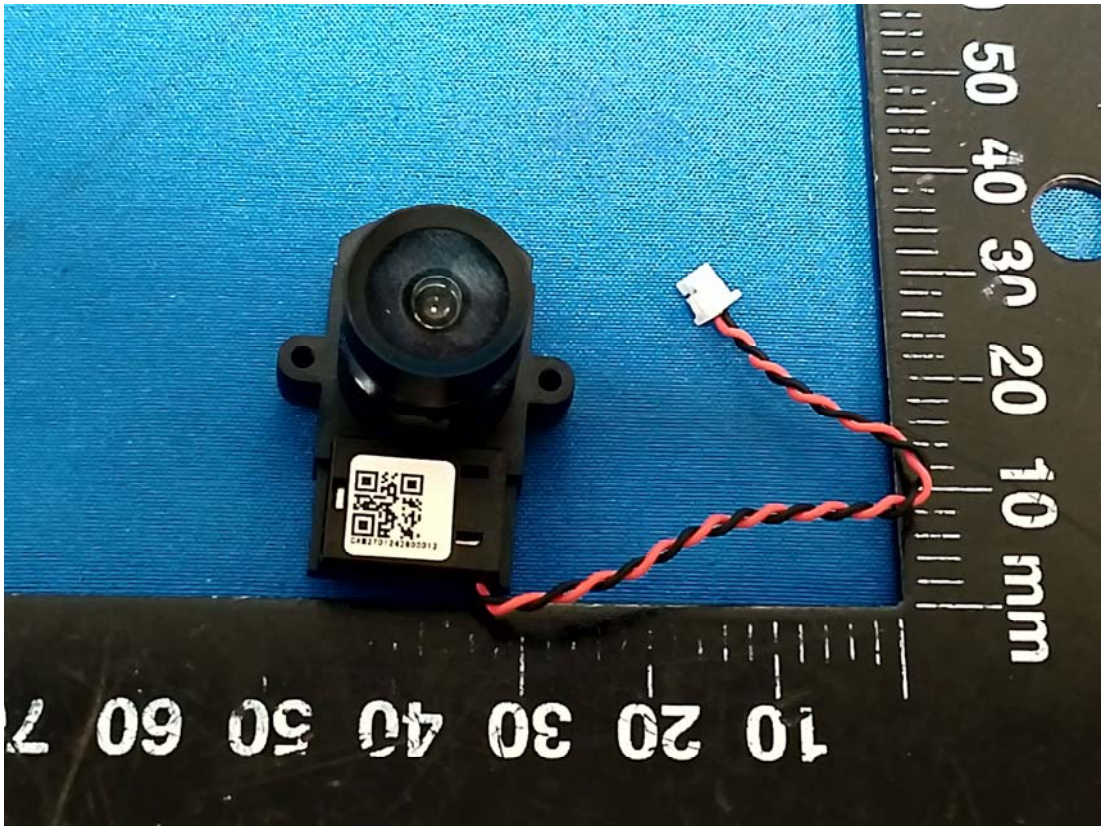
50 40 30 20 10 mm
10 20 30 40 50 60

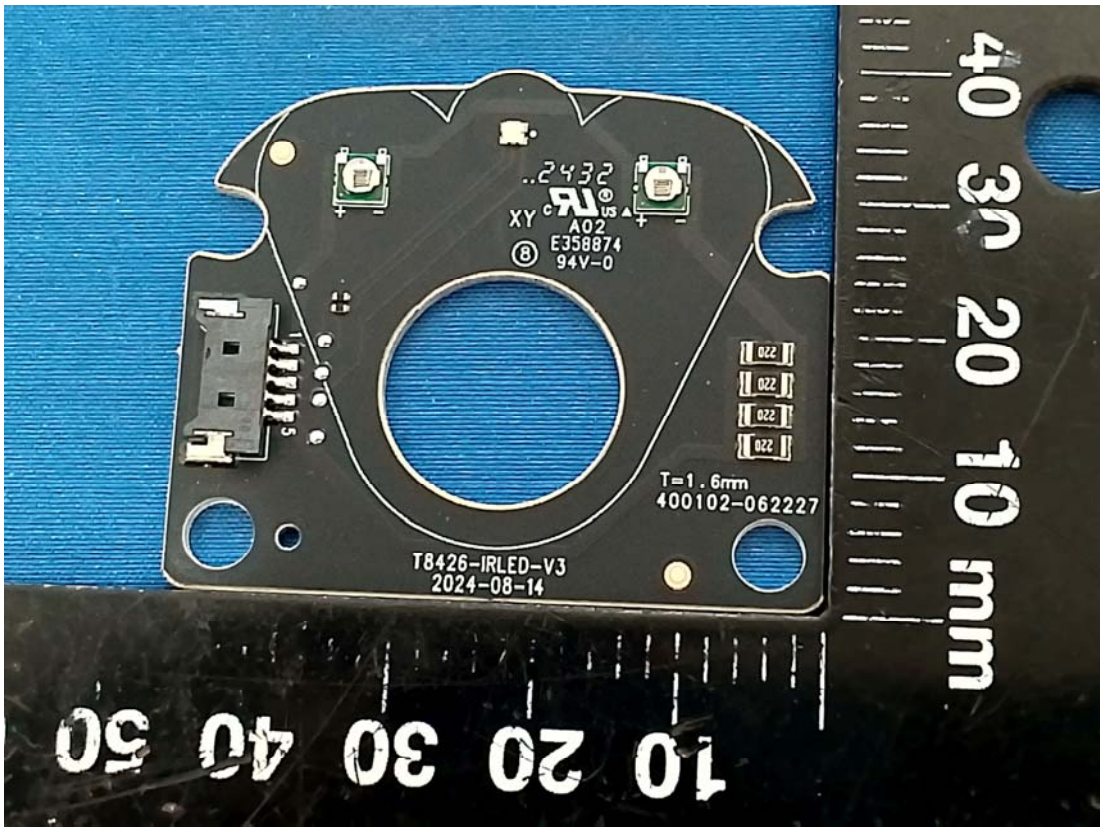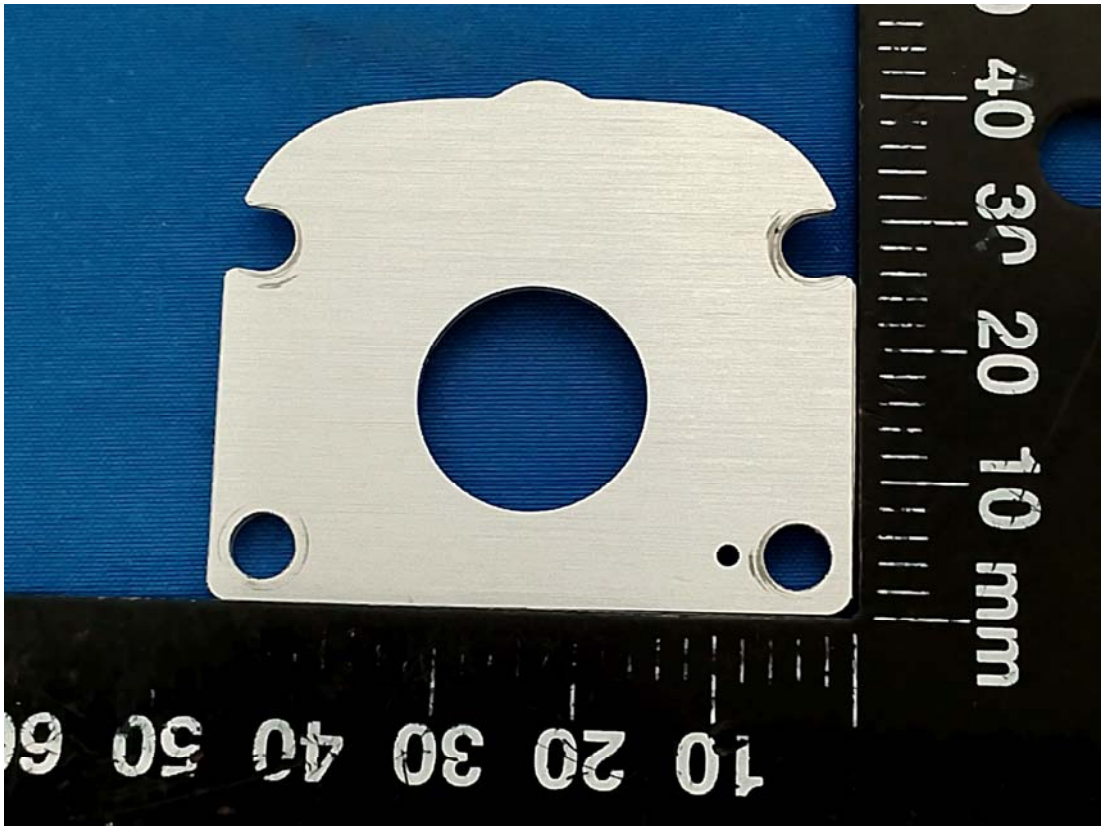
..2432
XY
A02
E358874
94V-0
T=1.6mm
400102-062227
T8426-IRLED-V3
2024-08-14