

RS6130 AIP ANTENNA SPECIFICATION

2026/09/14

V1.5.1

Company: Possumic Technology Co.,Ltd

Addr: Room 603, Building B, Creative Cloud, No. 1 Gangwan, Tangjiawan


Model Name: RS6130

Model Size: 8.8mm(Length)X5.8mm(Width)X0.68mm(Thickness)

Antenna Type: Antenna in Package(AiP)

RS6130 1T3R(Tx→Rx0, Tx→Rx1, Tx→Rx2) Gain and Radiation Pattern of three channels

RS6130

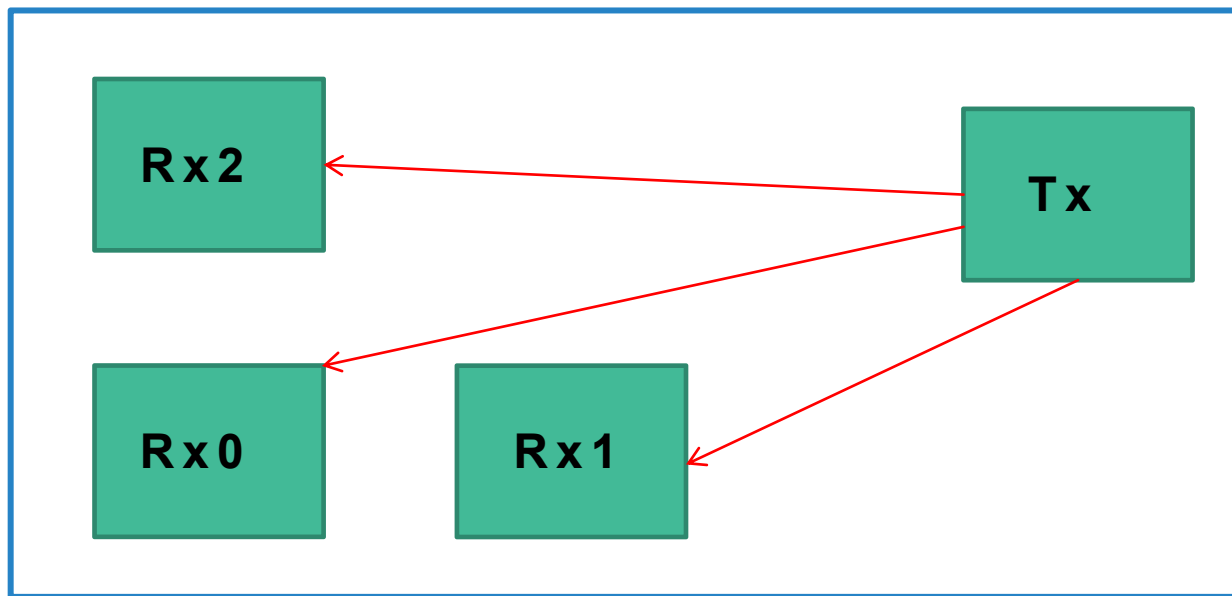




AIP ANTENNA TEST PRINCIPLE AND METHOD

Principle: Conservation, that is, the signal power received by Rx is equal to the power lost in the energy space when the Tx transmit power is lost.

Gain test method: Comparison method, using the equal power loss in space, replacing the Rx antenna with a horn antenna for reception to obtain the Rx antenna gain.

Directional pattern test method: Use angular reflection to collect level values in different directions, and then obtain a normalized pattern.


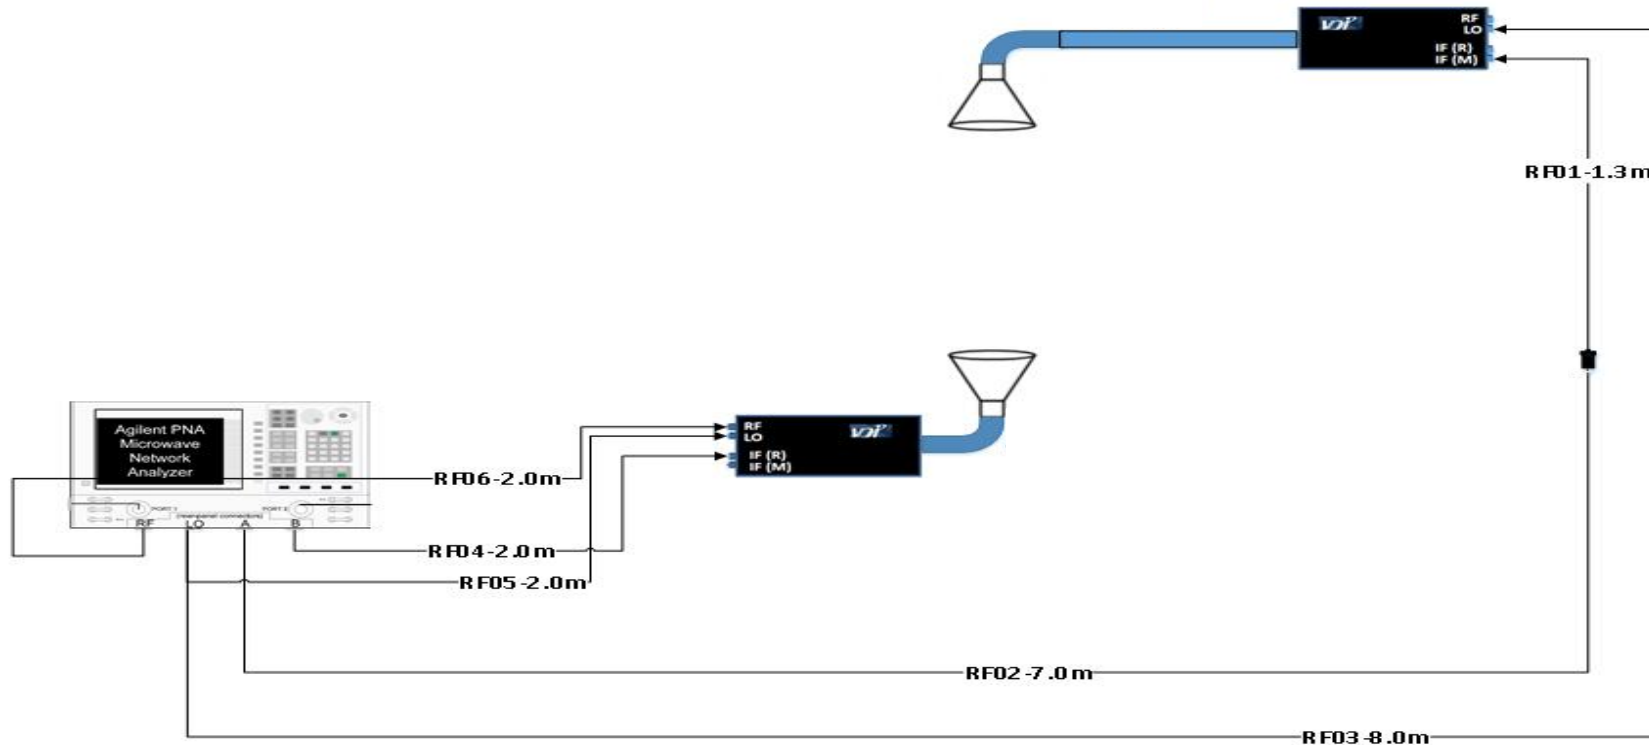


ANTENNA GAIN RESULTS


ANT Gain=EIRP-Tx Output Power
Average Gain of AiP antenna about **7dBi**

Frequency (GHz)	EIRP (dBm)	Chip Tx Output Power (dBm)	ANT Gain (dBi)
57	16.1	9.2	6.90
58	16.67	9.5	7.17
59	16.62	9.8	6.82
60	16.39	10.0	6.39
61	16.93	9.8	7.13
62	15.81	8.7	7.11
63	14.65	8.2	6.45
64	14.4	8.0	6.40

TX antenna radiation gain

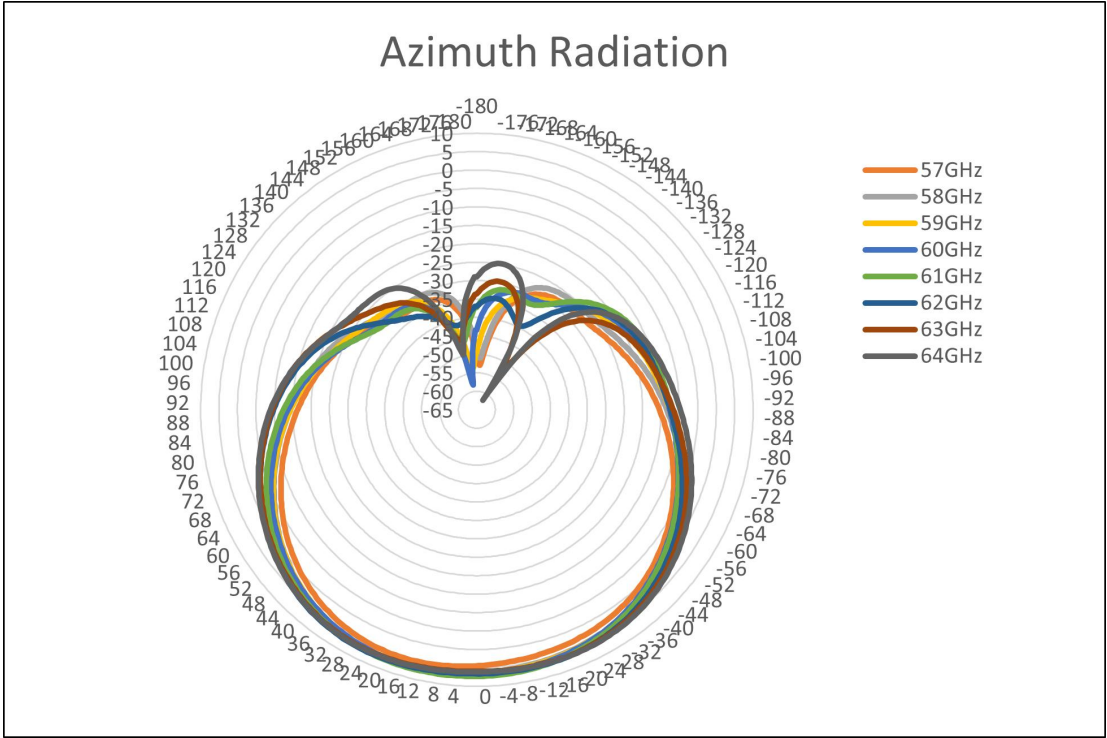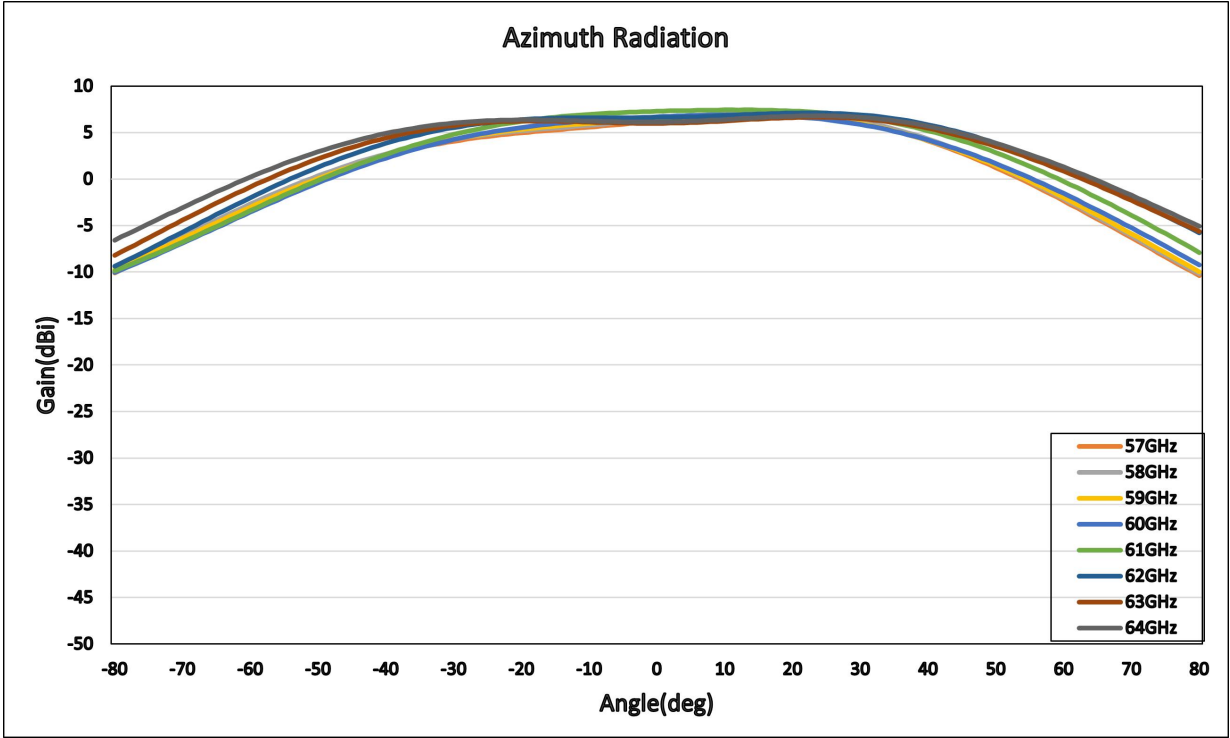

TX antenna radiation gain

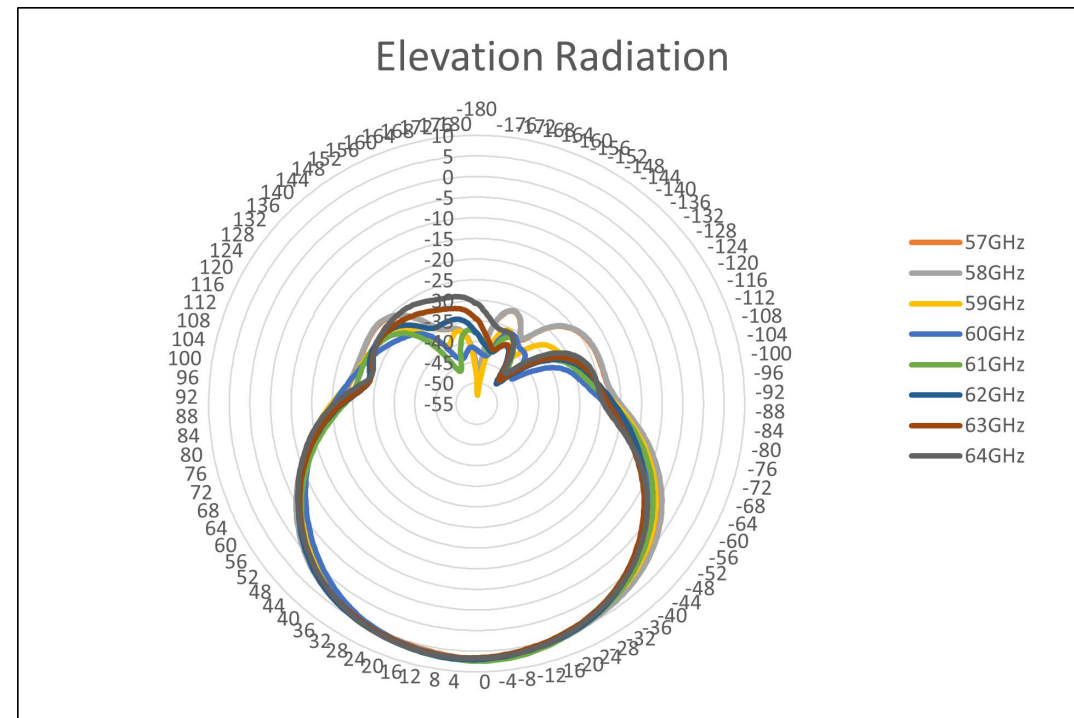



ANTENNA PORT

TX antenna port

