


Appendix A: Test Results of BR & EDR

APPENDIX A: TEST RESULTS OF BR & EDR	1
APPENDIX A.1: DUTY CYCLE	2
APPENDIX A.2: BANDWIDTH.....	6
APPENDIX A.3: MAXIMUM CONDUCTED OUTPUT POWER	13
APPENDIX A.4: CARRIER FREQUENCY SEPARATION.....	17
APPENDIX A.5: NUMBER OF HOPPING FREQUENCIES.....	19
APPENDIX A.6: TIME OF OCCUPANCY (Dwell Time).....	21
APPENDIX A.7: UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	24
APPENDIX A.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	37
30MHz - 1GHz.....	37
PCB ANT	37
FPC ANT.....	38
PIFA ANT.....	39
Above 1GHz.....	40
PCB ANT	40
FPC ANT.....	49
PIFA ANT.....	58
PCB ANT	67
FPC ANT.....	73
PIFA ANT.....	79


Appendix A.1: Duty Cycle

Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.896	3.751	77.21	1.12	0.03
		2441	DH5	2.896	3.751	77.21	1.12	0.03
		2480	DH5	2.896	3.751	77.21	1.12	0.03
Pi/4DQPSK	SISO	2402	2DH5	2.897	3.749	77.27	1.12	0.01
		2441	2DH5	2.897	3.750	77.25	1.12	0.03
		2480	2DH5	2.897	3.751	77.23	1.12	0.03
8DPSK	SISO	2402	3DH5	2.899	3.751	77.29	1.12	0.03
		2441	3DH5	2.900	3.751	77.31	1.12	0.03
		2480	3DH5	2.900	3.751	77.31	1.12	0.03


GFSK_DH5_LCH_2402MHz_NTNV

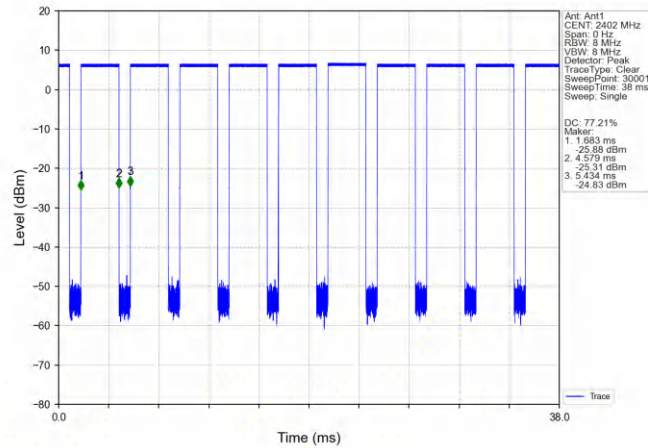


GFSK_DH5_MCH_2441MHz_NTNV

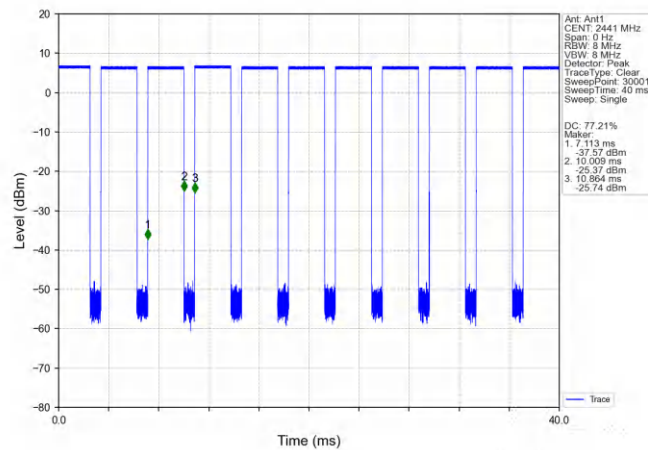


GFSK_DH5_HCH_2480MHz_NTNV

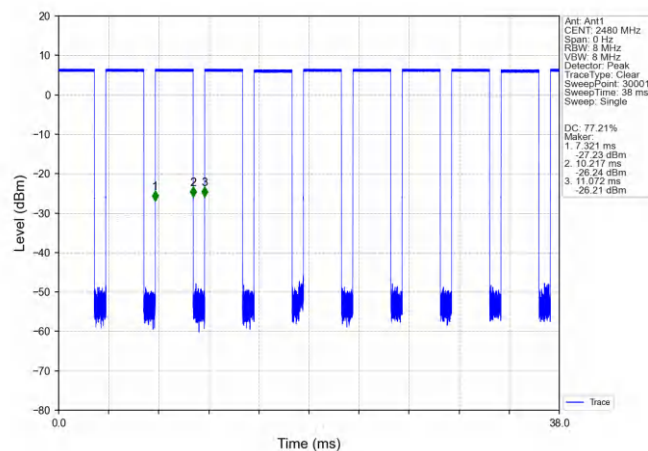


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

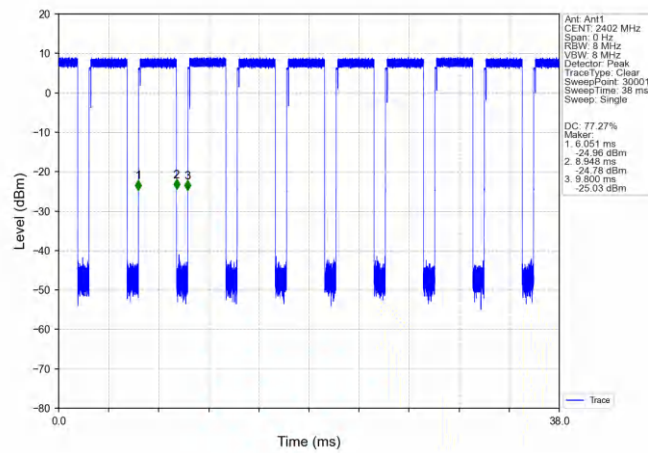


Pi/4DQPSK_2DH5_MCH_2441MHz_NTNV

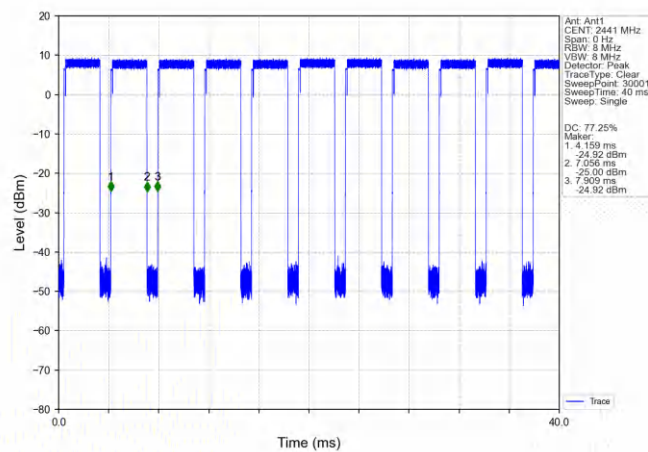


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

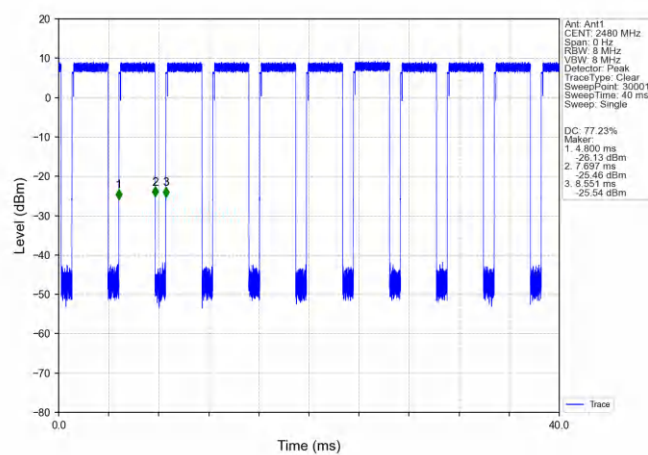


8DPSK 3DH5_LCH_2402MHz_NTNV

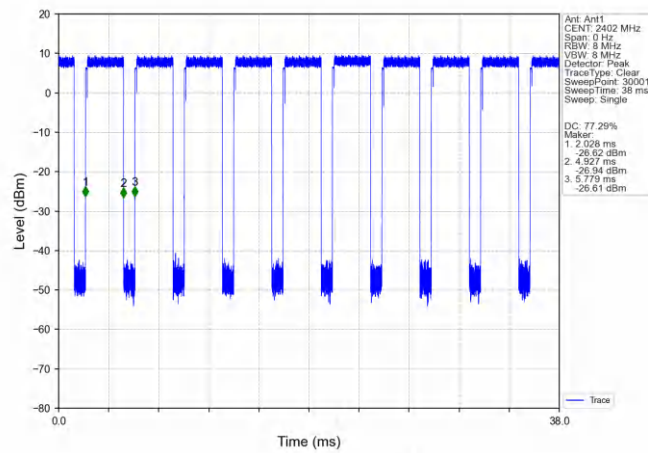

8DPSK 3DH5_MCH_2441MHz_NTNV

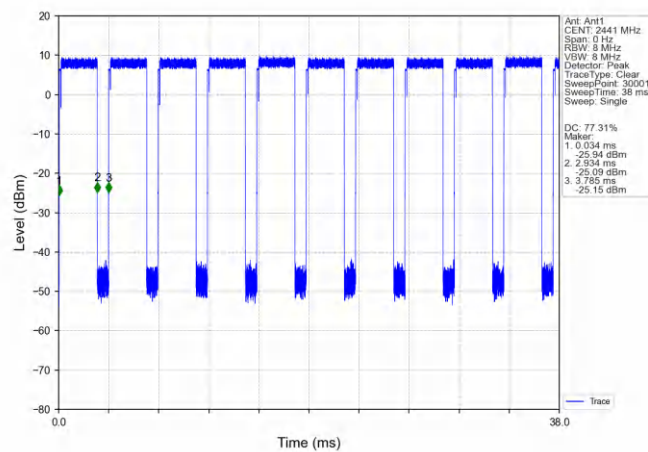

8DPSK 3DH5_HCH_2480MHz_NTNV

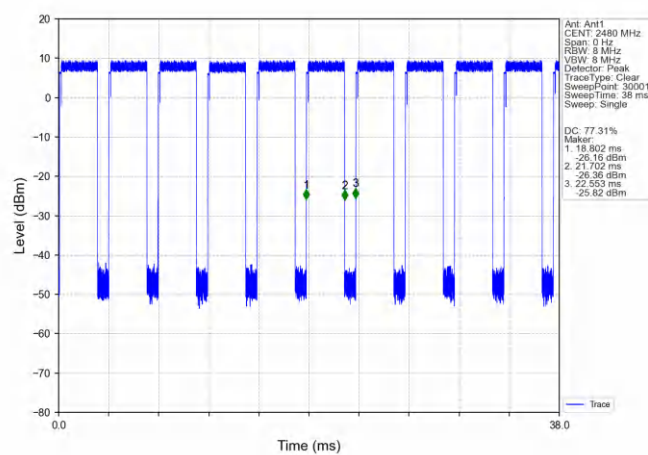

Appendix A.2: Bandwidth

OBW


Mode	TX Type	Frequency (MHz)	Packet Type	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
GFSK	SISO	2402	DH5	0.755	/	Pass
		2441	DH5	0.760	/	Pass
		2480	DH5	0.758	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1.174	/	Pass
		2441	2DH5	1.173	/	Pass
		2480	2DH5	1.175	/	Pass
8DPSK	SISO	2402	3DH5	1.184	/	Pass
		2441	3DH5	1.190	/	Pass
		2480	3DH5	1.186	/	Pass

20dB BW


Mode	TX Type	Frequency (MHz)	Packet Type	20dB Bandwidth (MHz)		Verdict
				Result	Limit	
GFSK	SISO	2402	DH5	0.792	/	Pass
		2441	DH5	0.792	/	Pass
		2480	DH5	0.791	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1.320	/	Pass
		2441	2DH5	1.306	/	Pass
		2480	2DH5	1.301	/	Pass
8DPSK	SISO	2402	3DH5	1.278	/	Pass
		2441	3DH5	1.280	/	Pass
		2480	3DH5	1.289	/	Pass

OBW


GFSK_DH5_LCH_2402MHz_NTNV

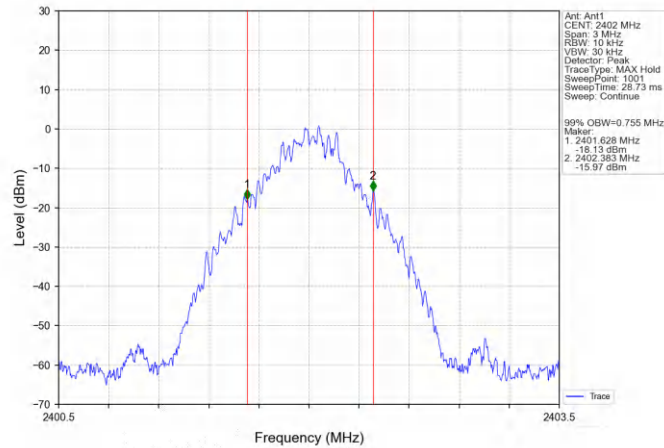


GFSK_DH5_MCH_2441MHz_NTNV

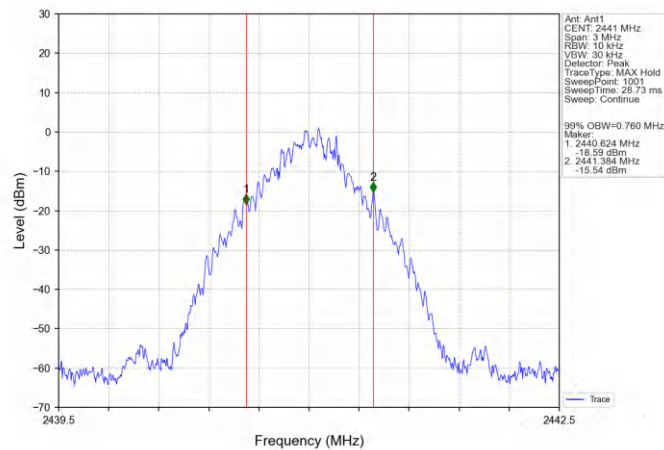


GFSK_DH5_HCH_2480MHz_NTNV

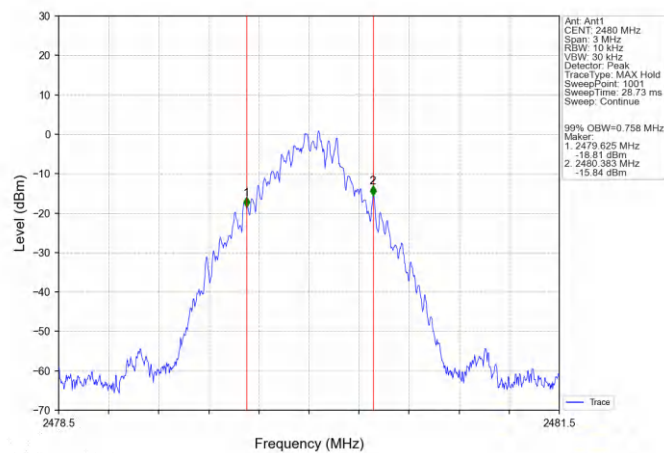


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

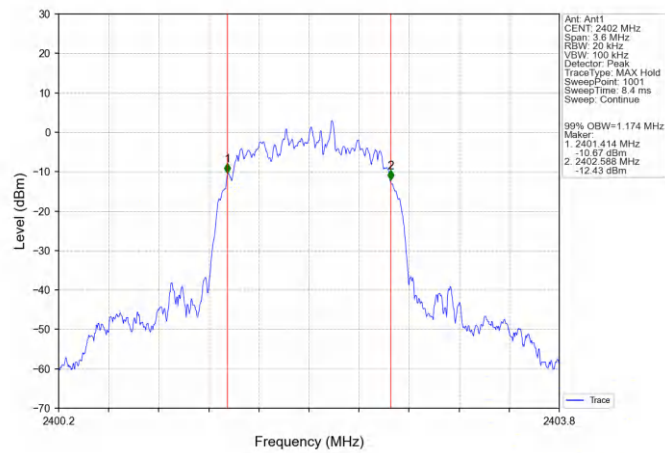


Pi/4DQPSK_2DH5_MCH_2441MHz_NTNV

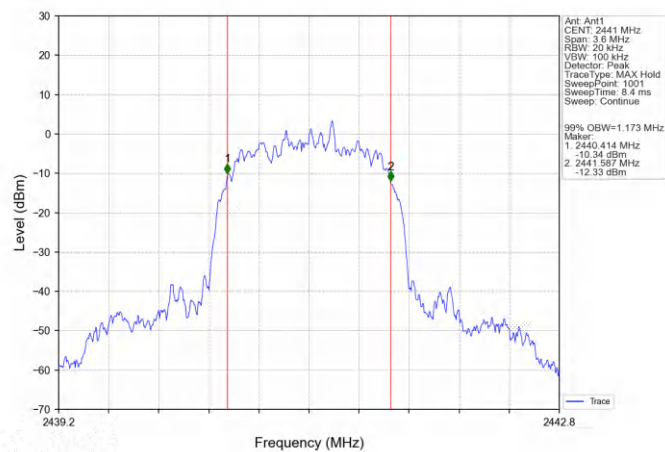


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

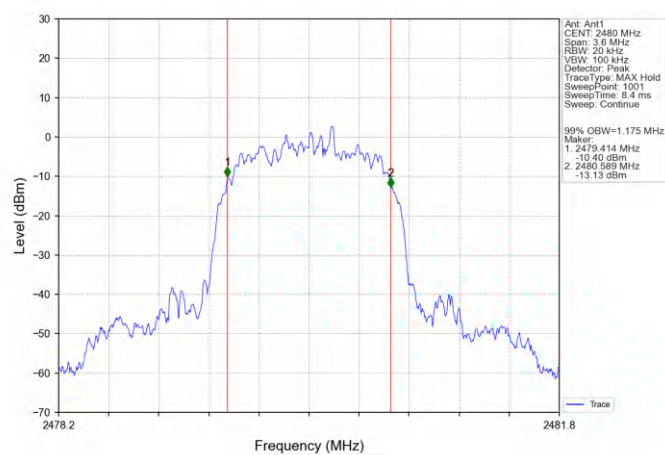


8DPSK_3DH5_LCH_2402MHz_NTNV

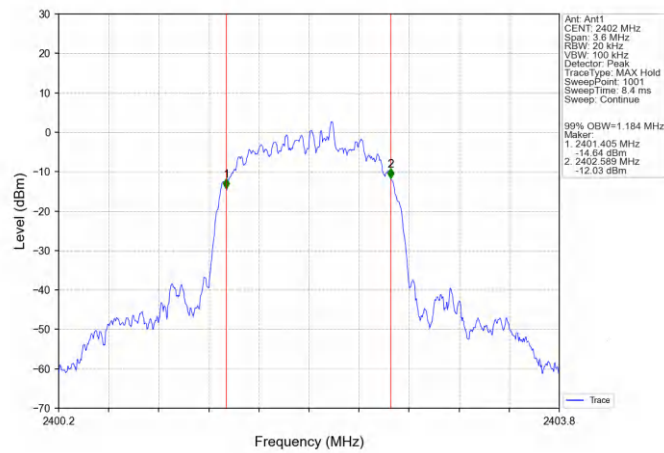

8DPSK_3DH5_MCH_2441MHz_NTNV

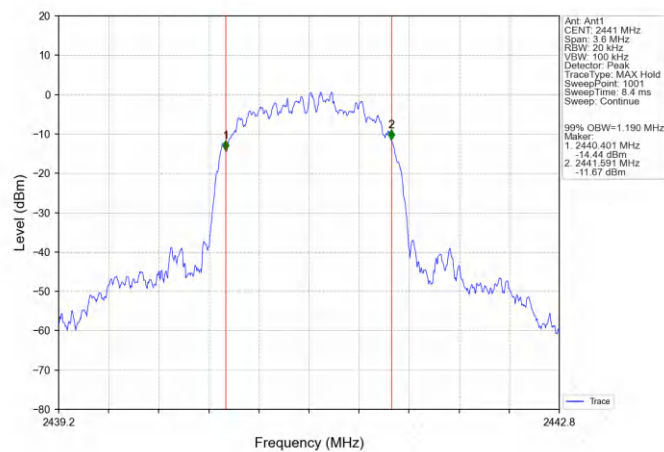


8DPSK_3DH5_HCH_2480MHz_NTNV

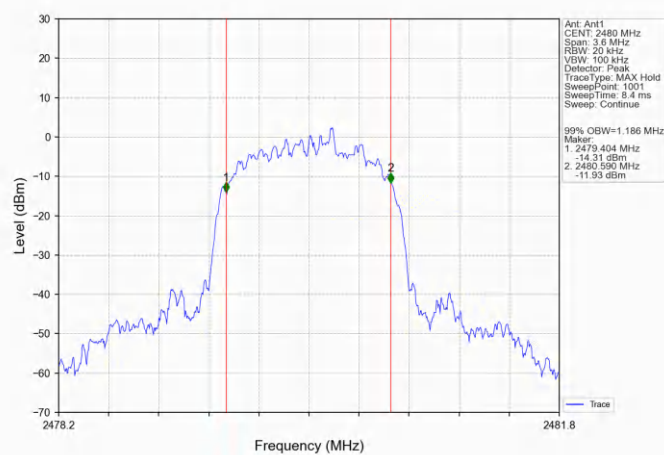


20dB BW


GFSK_DH5_LCH_2402MHz_NTNV

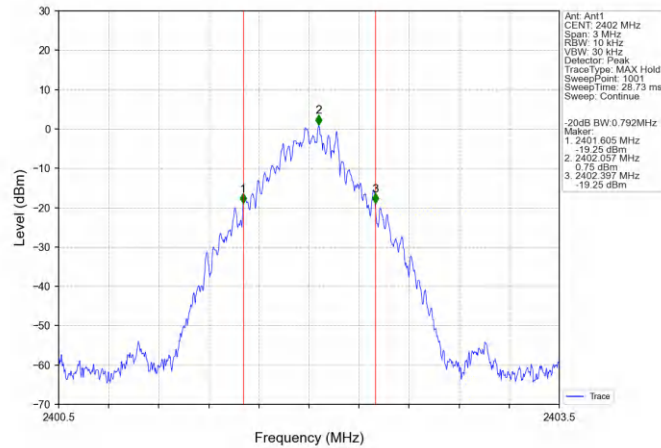


GFSK_DH5_MCH_2441MHz_NTNV

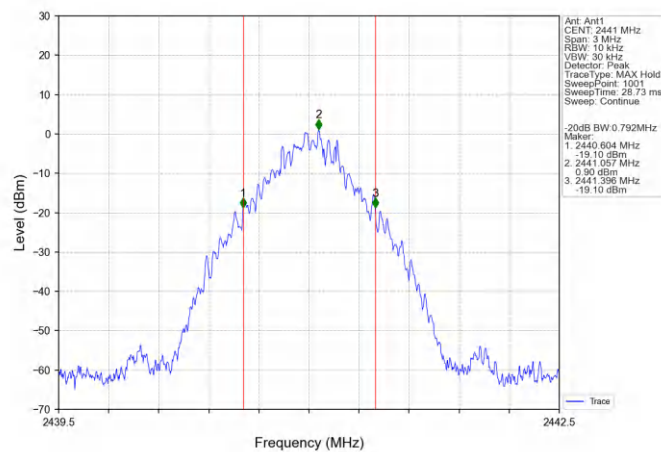


GFSK_DH5_HCH_2480MHz_NTNV

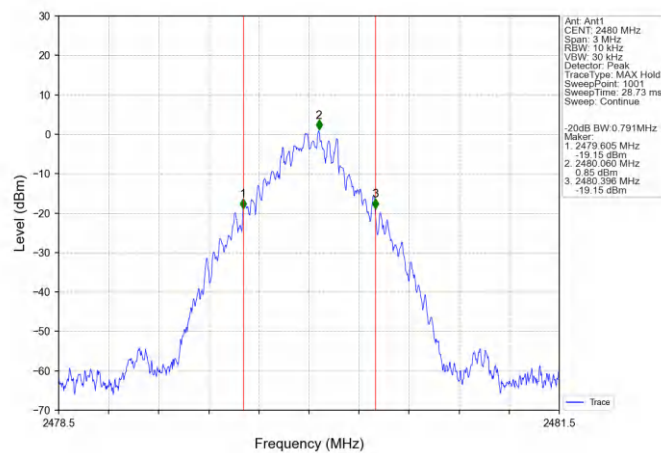


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

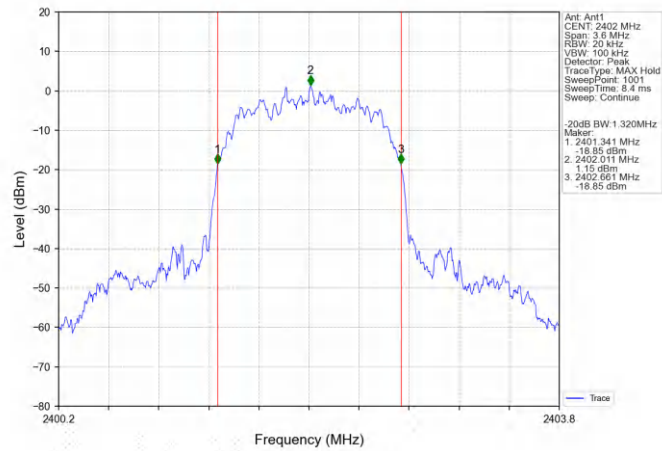


Pi/4DQPSK_2DH5_MCH_2441MHz_NTNV

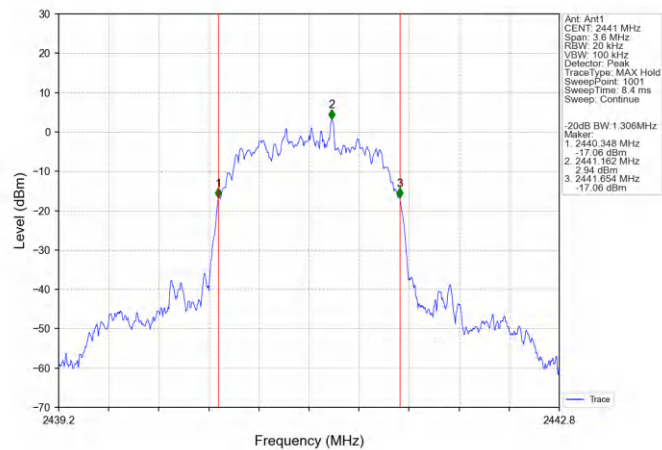


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

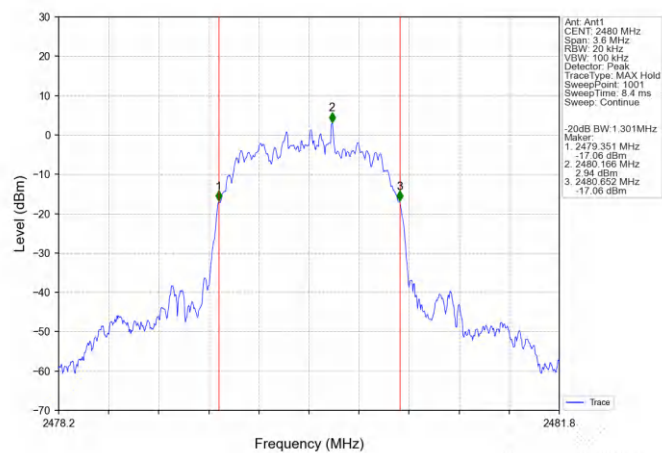


8DPSK 3DH5_LCH_2402MHz_NTNV

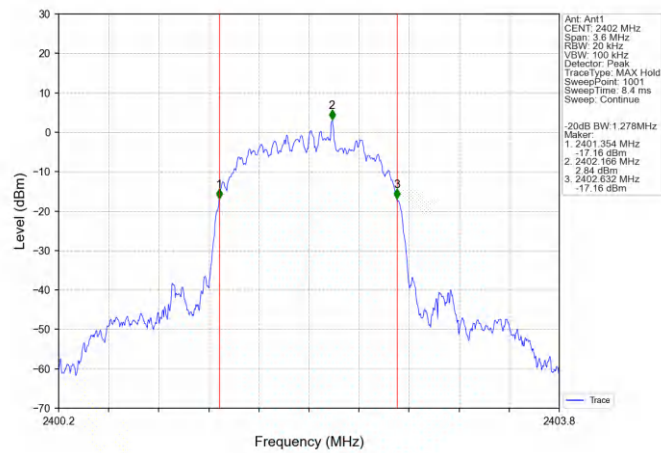

8DPSK 3DH5_MCH_2441MHz_NTNV

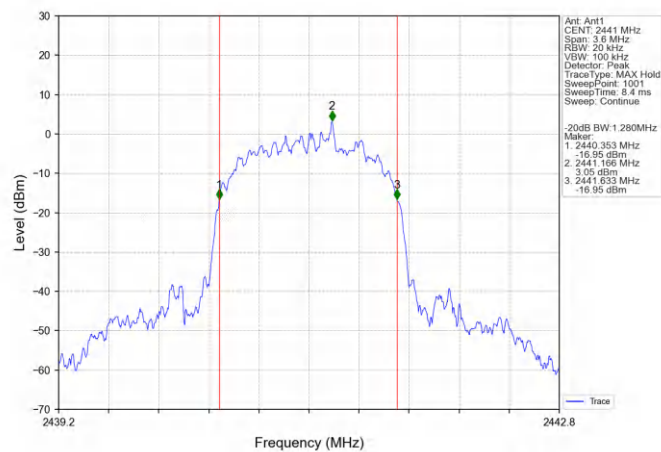

8DPSK 3DH5_HCH_2480MHz_NTNV

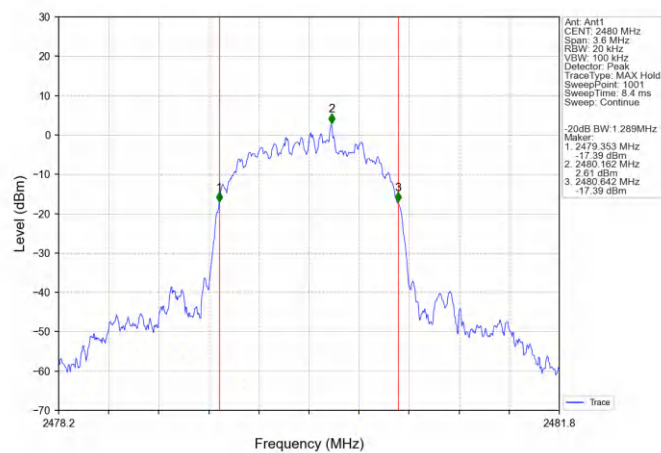

Appendix A.3: Maximum Conducted Output Power


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				Conducted Output Power	Limit	
GFSK	SISO	2402	DH5	6.58	<=30	Pass
		2441	DH5	6.72	<=30	Pass
		2480	DH5	6.62	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	8.96	<=20.97	Pass
		2441	2DH5	9.16	<=20.97	Pass
		2480	2DH5	9.06	<=20.97	Pass
8DPSK	SISO	2402	3DH5	9.43	<=20.97	Pass
		2441	3DH5	9.56	<=20.97	Pass
		2480	3DH5	9.47	<=20.97	Pass

Mode	TX Type	Frequency (MHz)	Packet Type	E.I.R.P (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	10.35	<=36.02	Pass
		2441	DH5	10.49	<=36.02	Pass
		2480	DH5	10.39	<=36.02	Pass
Pi/4DQPSK	SISO	2402	2DH5	12.73	<=36.02	Pass
		2441	2DH5	12.93	<=36.02	Pass
		2480	2DH5	12.83	<=36.02	Pass
8DPSK	SISO	2402	3DH5	13.20	<=36.02	Pass
		2441	3DH5	13.33	<=36.02	Pass
		2480	3DH5	13.24	<=36.02	Pass


Note1: Antenna Gain: Ant1: 3.77dBi;

Note2: E.I.R.P = Measured Power + Antenna Gain


GFSK_DH5_LCH_2402MHz_NTNV

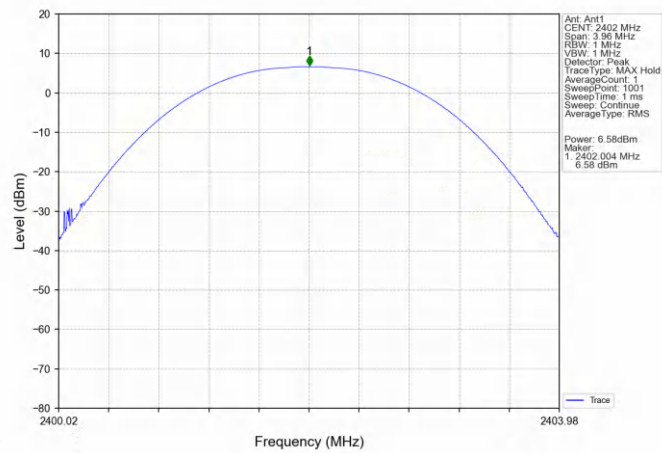


GFSK_DH5_MCH_2441MHz_NTNV

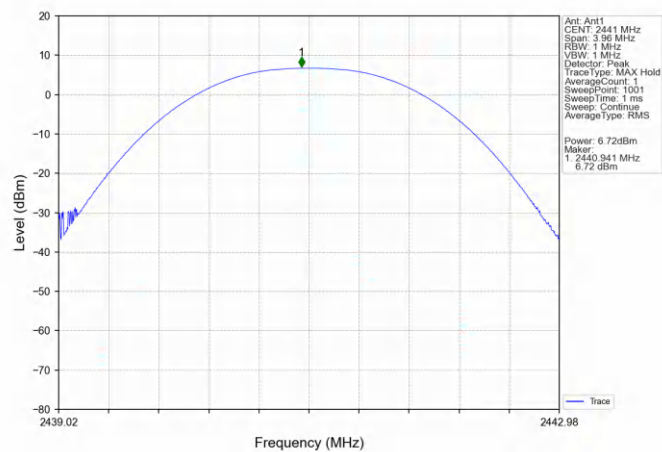


GFSK_DH5_HCH_2480MHz_NTNV

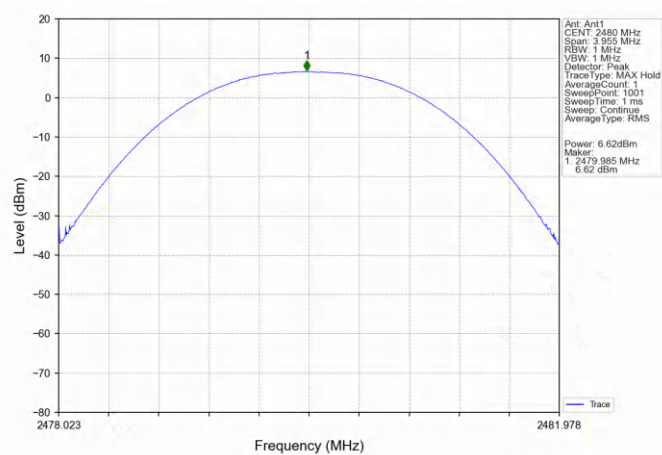


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

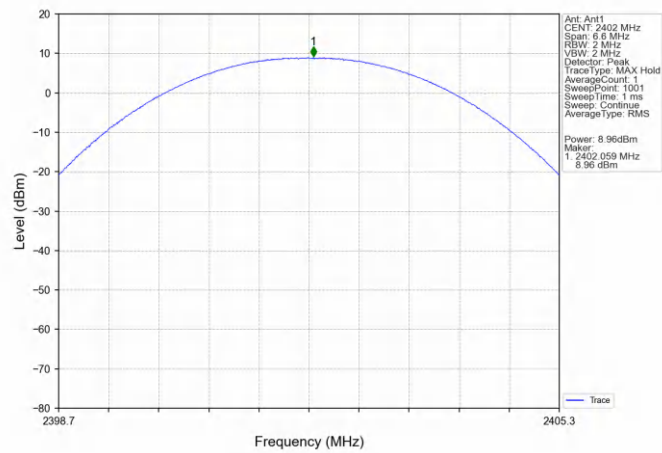


Pi/4DQPSK_2DH5_MCH_2441MHz_NTNV

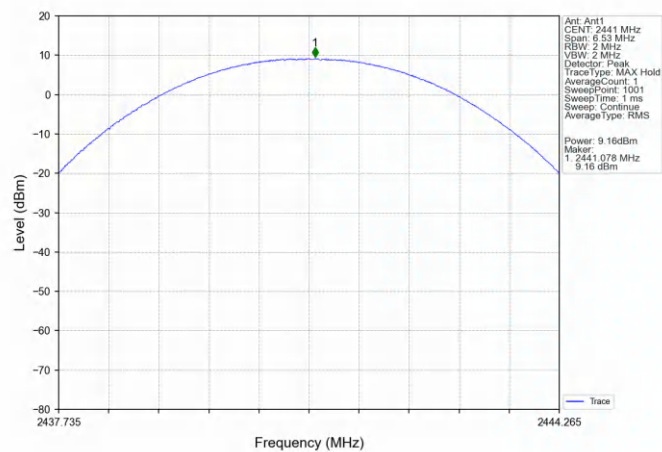


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

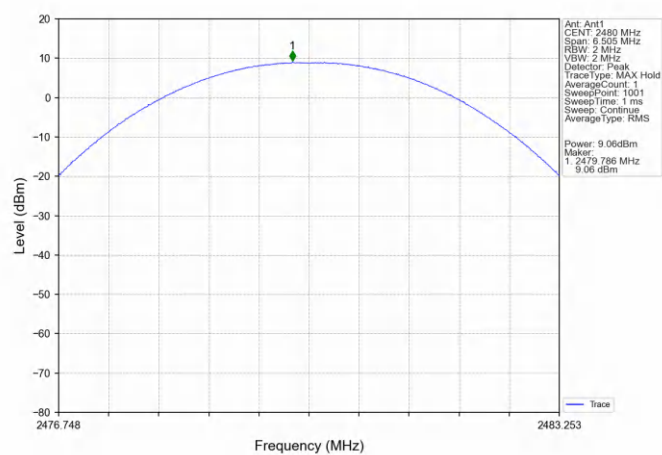


8DPSK_3DH5_LCH_2402MHz_NTNV

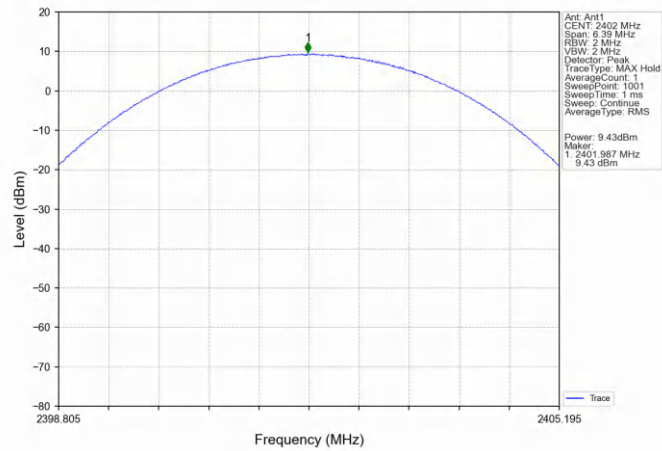

8DPSK_3DH5_MCH_2441MHz_NTNV

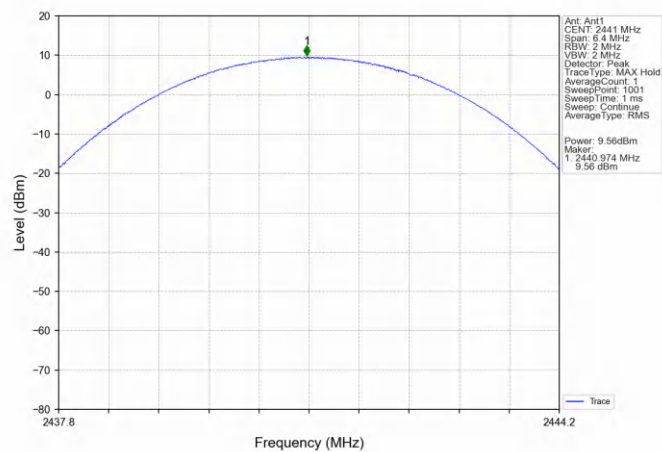


8DPSK_3DH5_HCH_2480MHz_NTNV

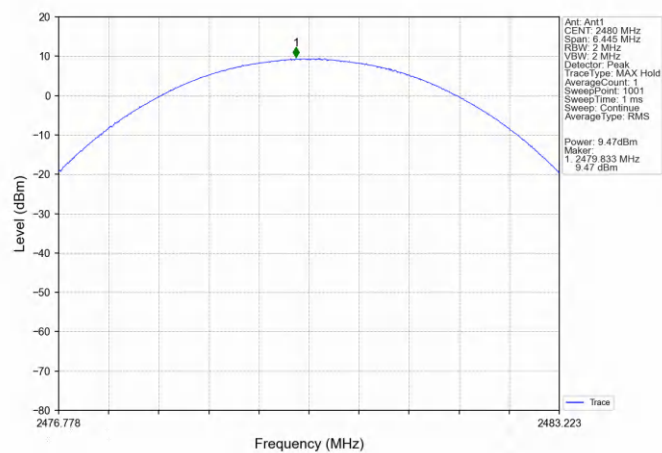


Appendix A.4: Carrier Frequency Separation

Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	0.792	≥ 0.792	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.022	1.320	≥ 0.88	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.289	≥ 0.859	Pass


GFSK_DH5_HOPP_NTNV

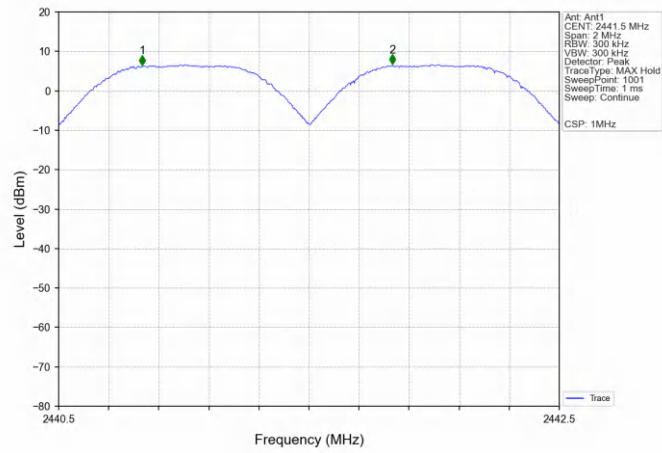

Pi/4DQPSK_2DH5_HOPP_NTNV

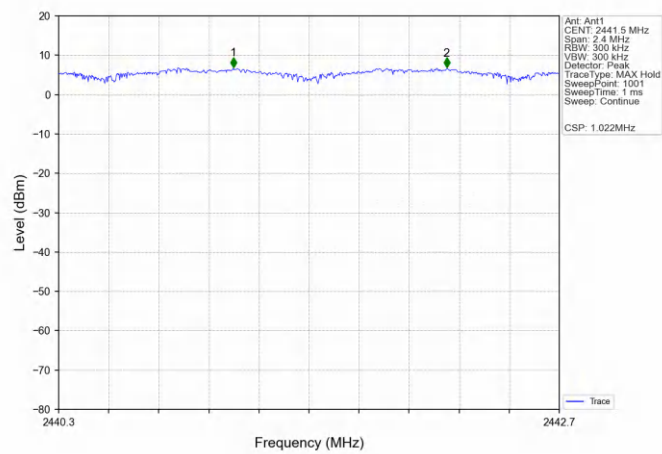


8DPSK_3DH5_HOPP_NTNV

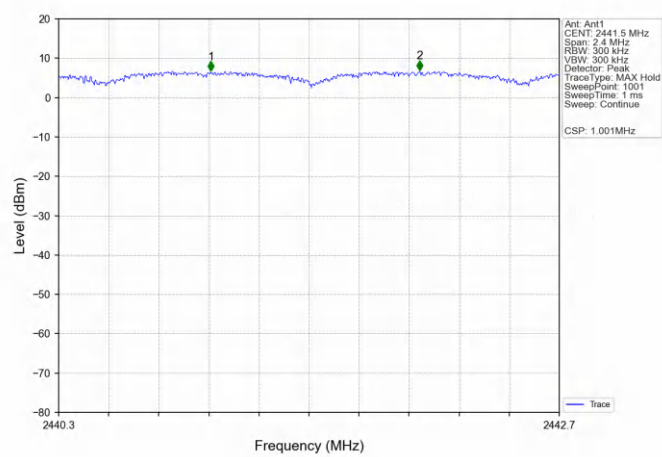


Appendix A.5: Number of Hopping Frequencies

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				Num	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass


GFSK_DH5_HOPP_NTNV

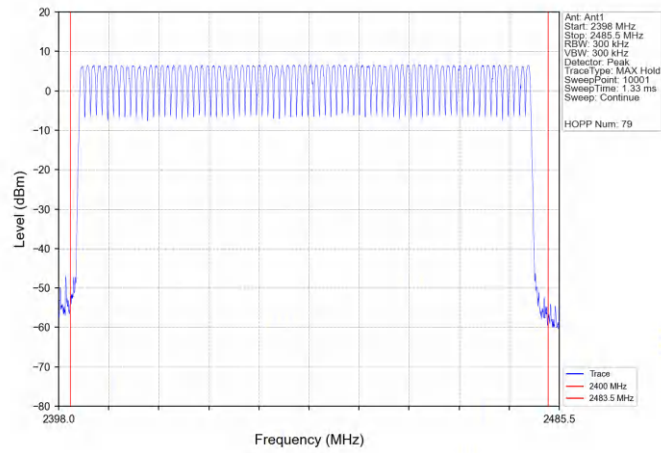

Pi/4DQPSK_2DH5_HOPP_NTNV

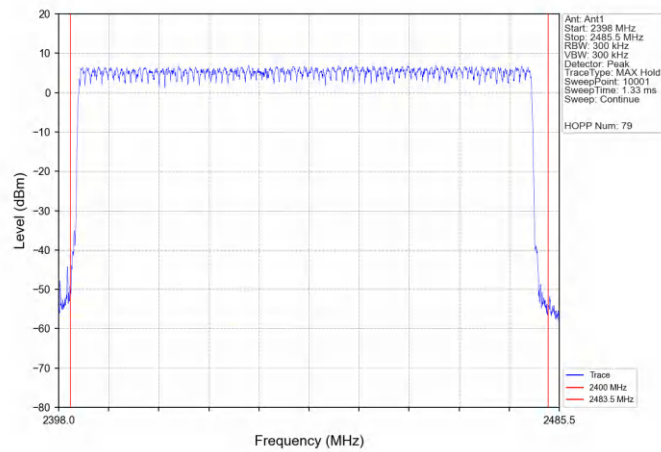


8DPSK_3DH5_HOPP_NTNV

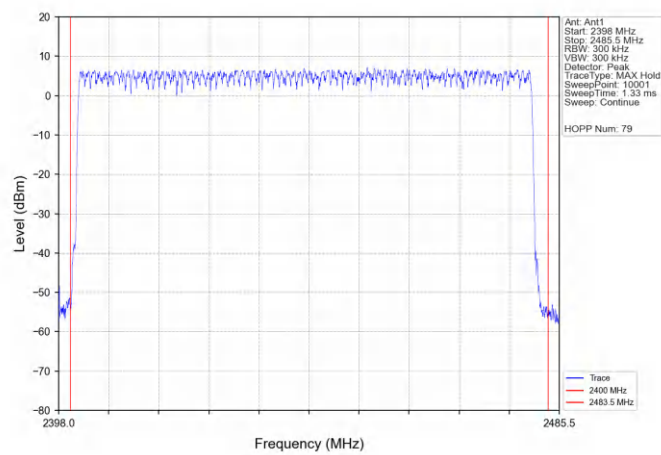


Appendix A.6: Time of Occupancy (Dwell Time)

Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH5	2.902	31.600	103	298.906	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	2.900	31.600	103	298.700	<=400	Pass
8DPSK	SISO	HOPP	3DH5	2.902	31.600	122	354.044	<=400	Pass


GFSK_DH5_HOPP_NTNV

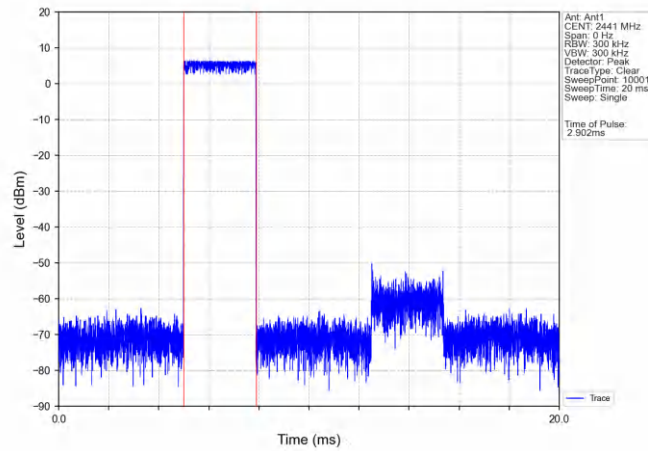


GFSK_DH5_HOPP_NTNV

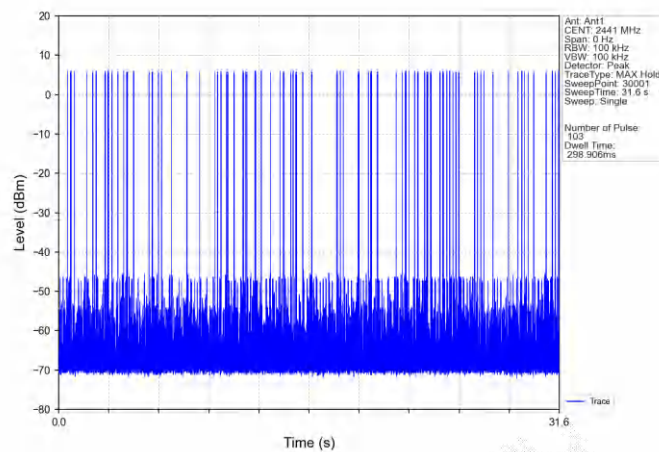


Pi/4DQPSK_2DH5_HOPP_NTNV

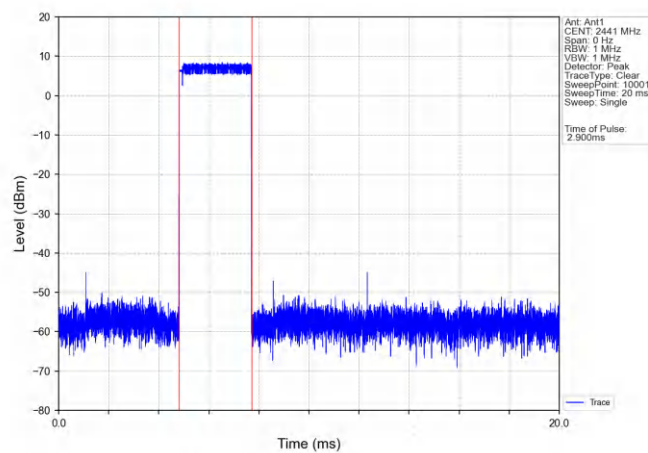


Pi/4DQPSK_2DH5_HOPP_NTNV

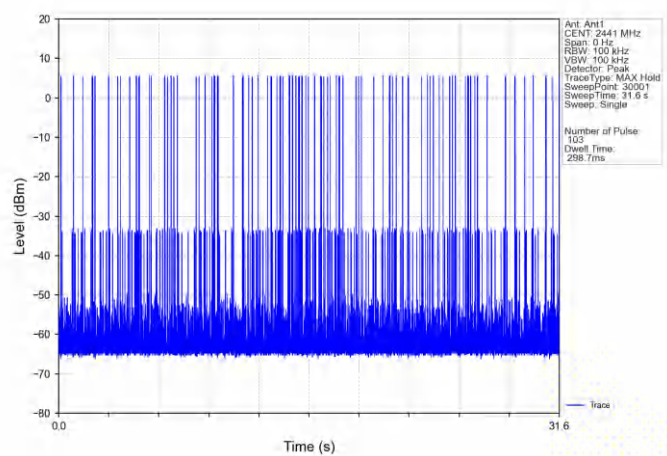

8DPSK_3DH5_HOPP_NTNV

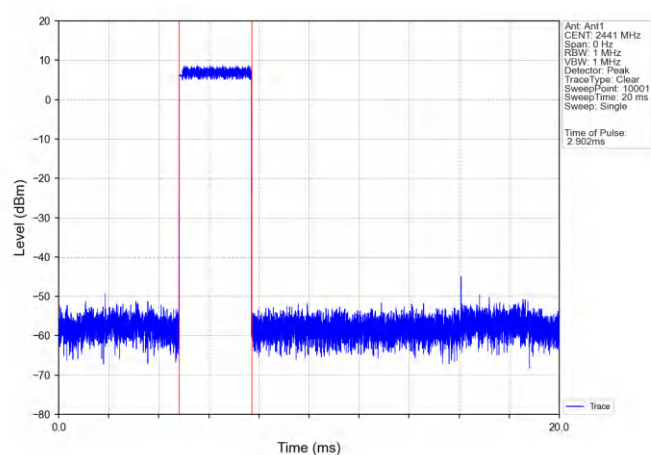

8DPSK_3DH5_HOPP_NTNV

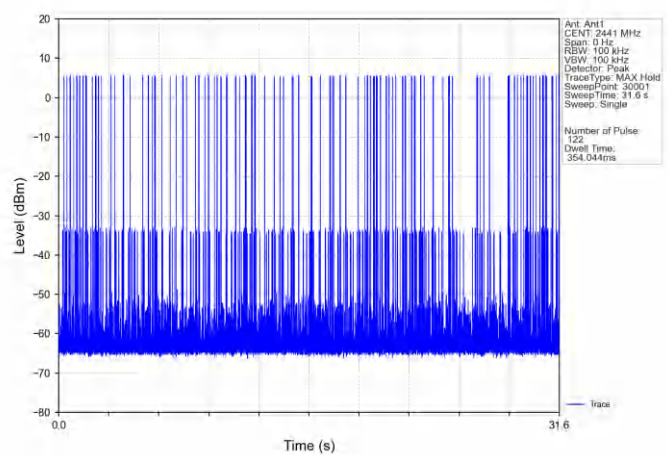

Appendix A.7: Unwanted Emissions In Non-restricted Frequency Bands

Ref


Mode	TX Type	Frequency (MHz)	Packet Type	Level of Reference (dBm)
GFSK	SISO	2402	DH5	6.04
		2441	DH5	6.15
		2480	DH5	6.00
		HOPP	DH5	6.54
				6.54
Pi/4DQPSK	SISO	2402	2DH5	5.84
		2441	2DH5	6.01
		2480	2DH5	5.98
		HOPP	2DH5	6.33
				6.33
8DPSK	SISO	2402	3DH5	6.01
		2441	3DH5	6.08
		2480	3DH5	6.15
		HOPP	3DH5	6.19
				6.19

CSE


Mode	TX Type	Frequency (MHz)	Packet Type	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	6.04	-13.96	Pass
		2441	DH5	6.15	-13.85	Pass
		2480	DH5	6.00	-14.00	Pass
		HOPP	DH5	6.54	-13.46	Pass
				6.54	-13.46	Pass
Pi/4DQPSK	SISO	2402	2DH5	5.84	-14.16	Pass
		2441	2DH5	6.01	-13.99	Pass
		2480	2DH5	5.98	-14.02	Pass
		HOPP	2DH5	6.33	-13.67	Pass
				6.33	-13.67	Pass
8DPSK	SISO	2402	3DH5	6.01	-13.99	Pass
		2441	3DH5	6.08	-13.92	Pass
		2480	3DH5	6.15	-13.85	Pass
		HOPP	3DH5	6.19	-13.81	Pass
				6.19	-13.81	Pass

Ref


GFSK_DH5_LCH_2402MHz_NTNV

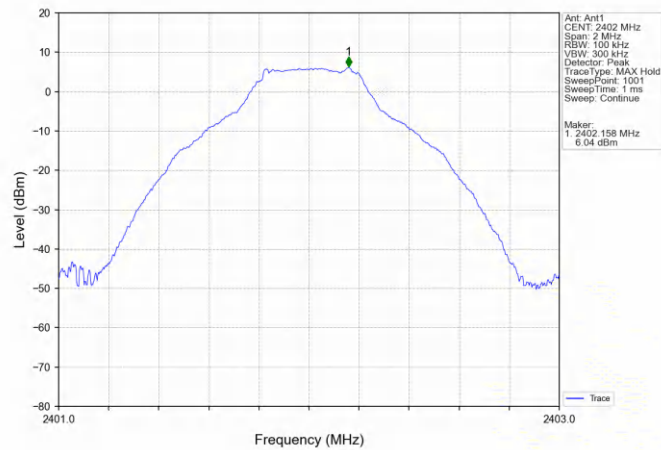


GFSK_DH5_MCH_2441MHz_NTNV

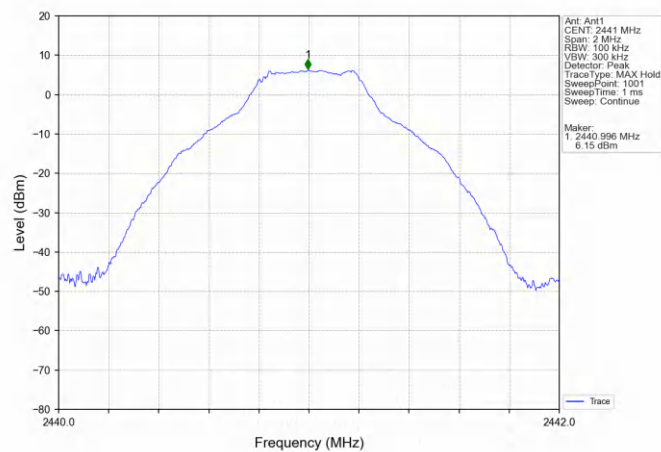


GFSK_DH5_HCH_2480MHz_NTNV

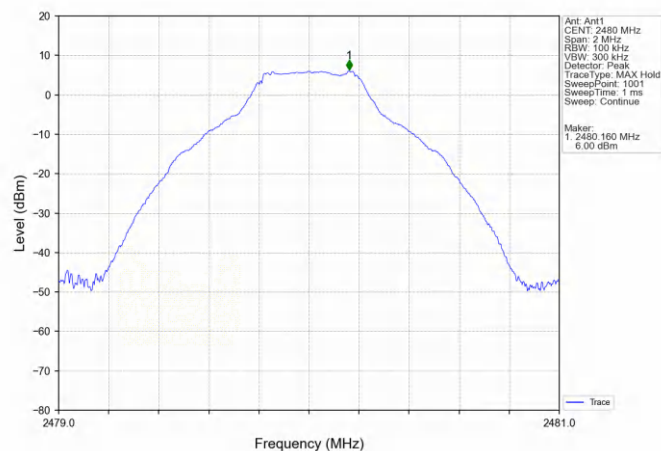


GFSK_DH5_HOPP_NTNV

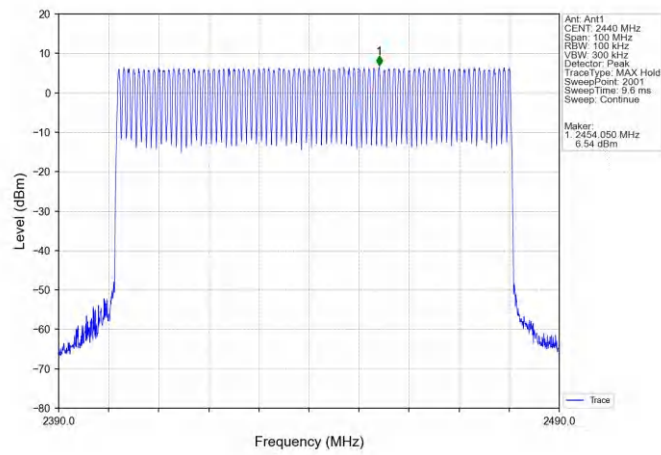


GFSK_DH5_HOPP_NTNV

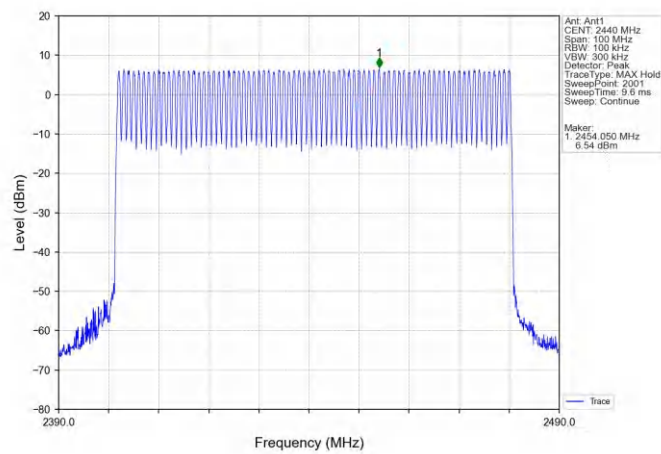


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

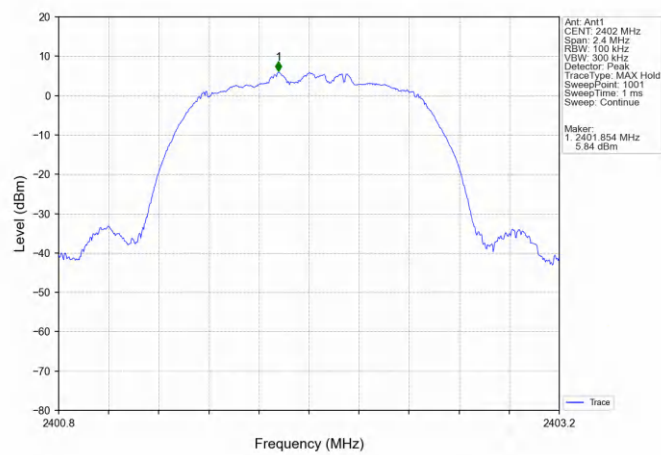


Pi/4DQPSK_2DH5_MCH_2441MHz_NTNV

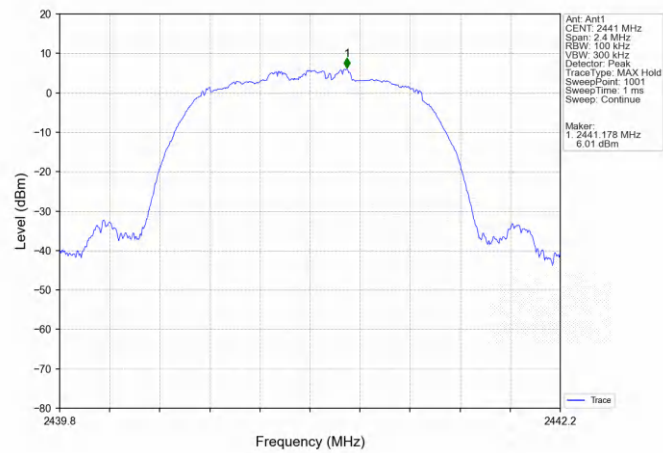


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

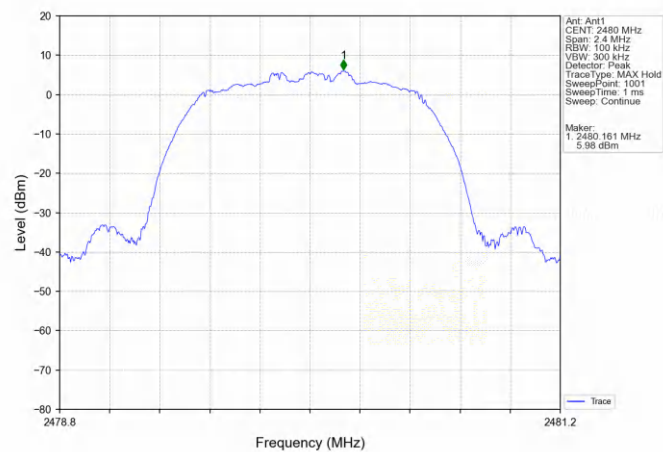


Pi/4DQPSK_2DH5_HOPP_NTNV

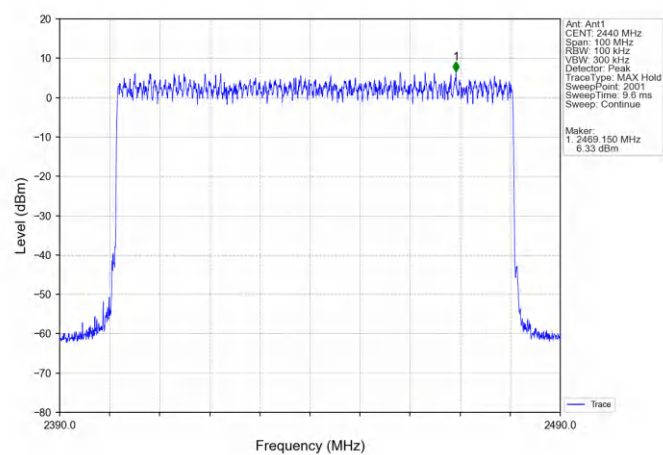


Pi/4DQPSK_2DH5_HOPP_NTNV

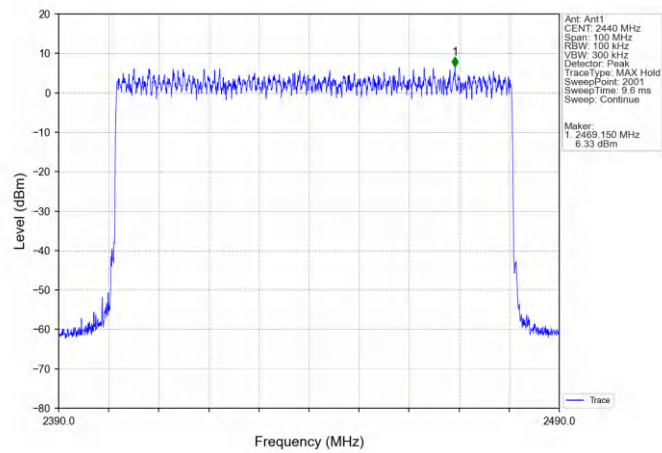


8DPSK_3DH5_LCH_2402MHz_NTNV

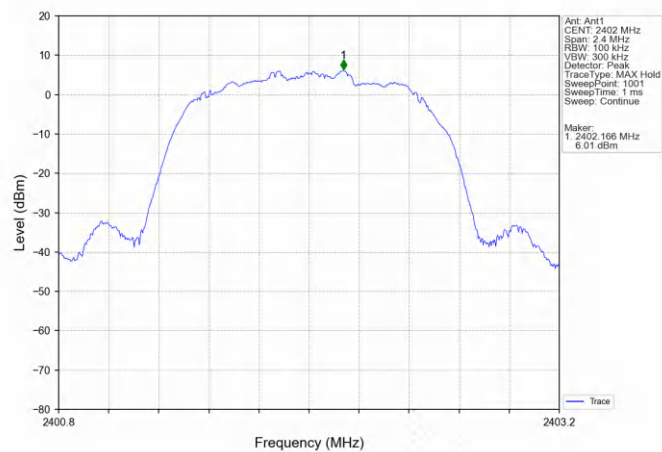


8DPSK_3DH5_MCH_2441MHz_NTNV

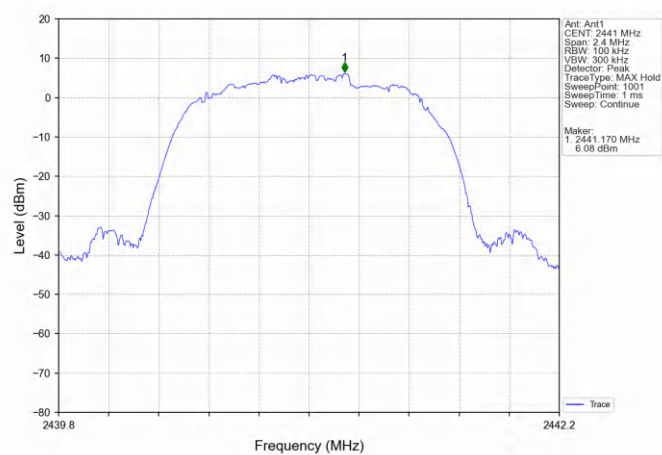


8DPSK 3DH5_HCH_2480MHz_NTNV

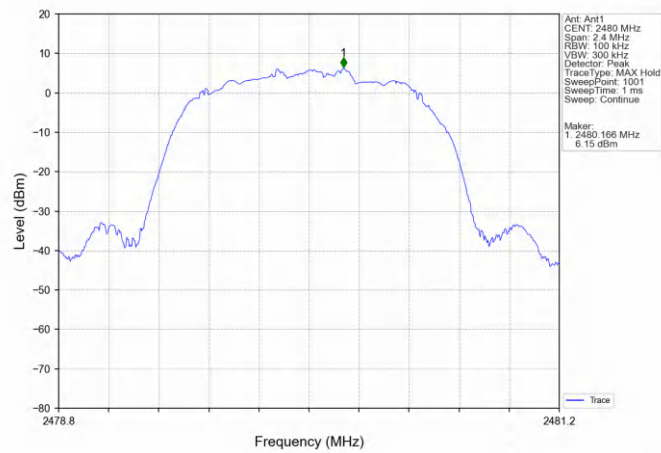

8DPSK_3DH5_HOPP_NTNV

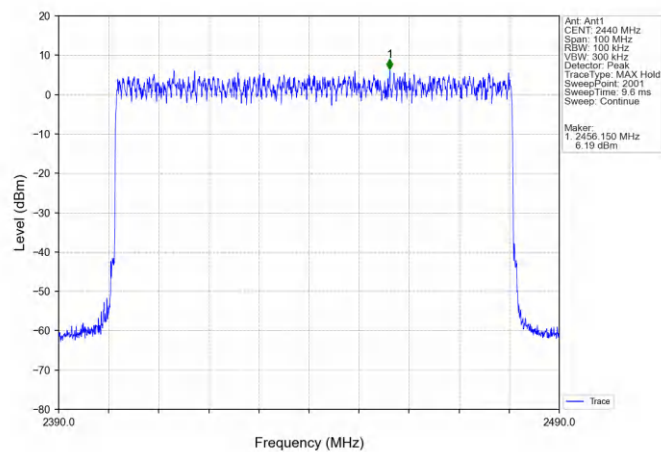


8DPSK_3DH5_HOPP_NTNV

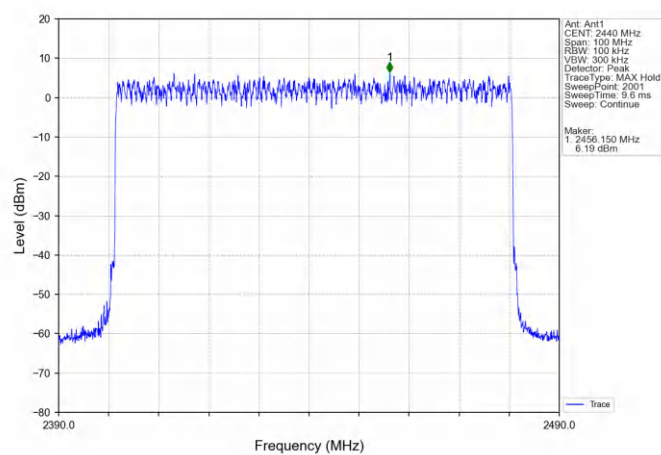


CSE


GFSK_DH5_LCH_2402MHz_NTNV

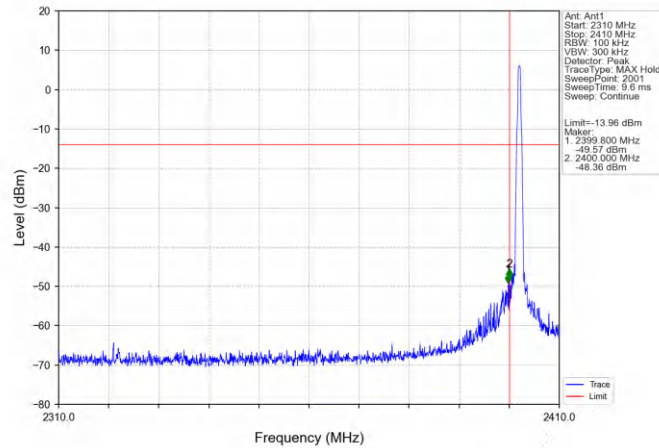


GFSK_DH5_LCH_2402MHz_NTNV

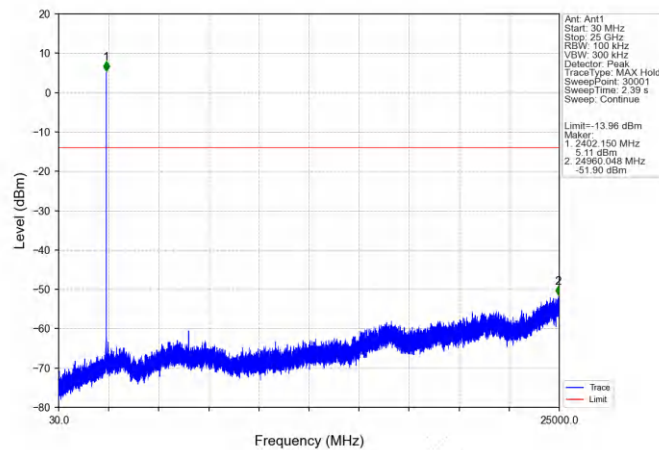


GFSK_DH5_MCH_2441MHz_NTNV

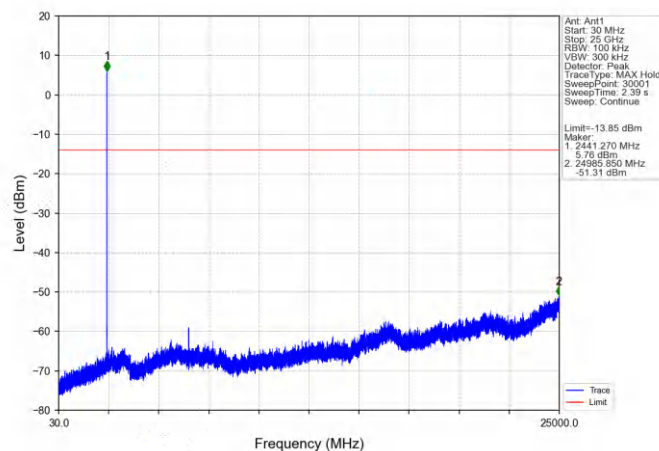


GFSK_DH5_HCH_2480MHz_NTNV

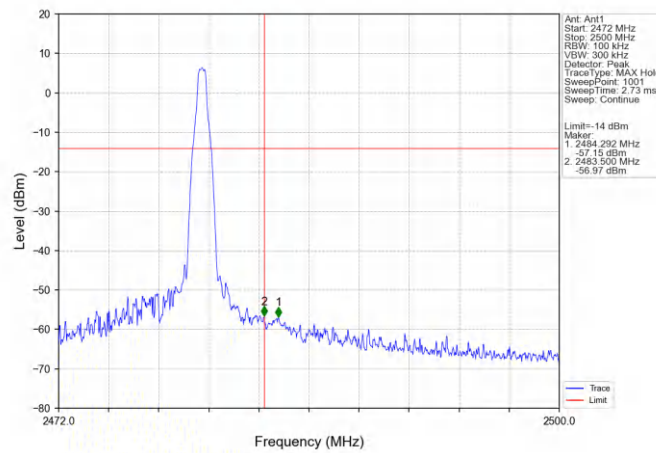


GFSK_DH5_HCH_2480MHz_NTNV

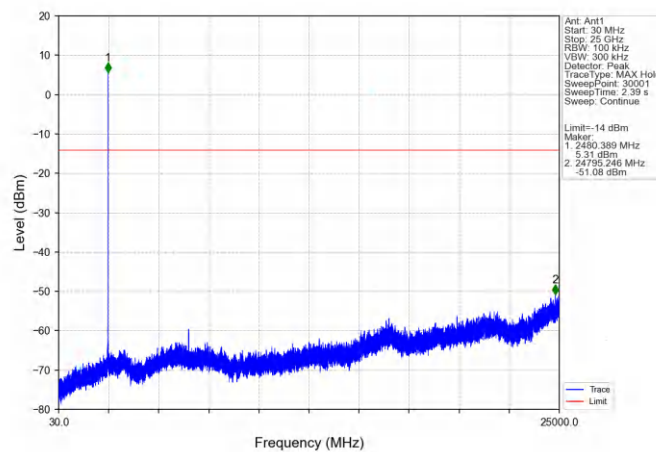


GFSK_DH5_HOPP_NTNV

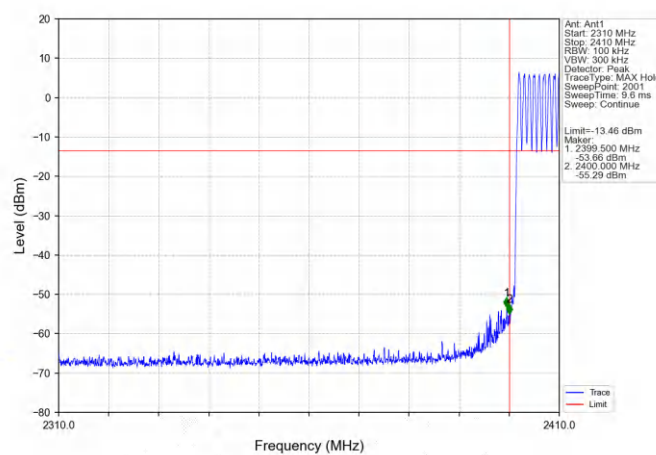


GFSK_DH5_HOPP_NTNV

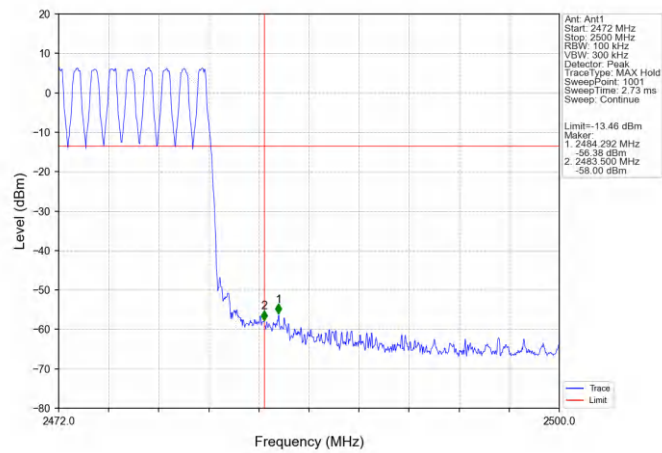


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

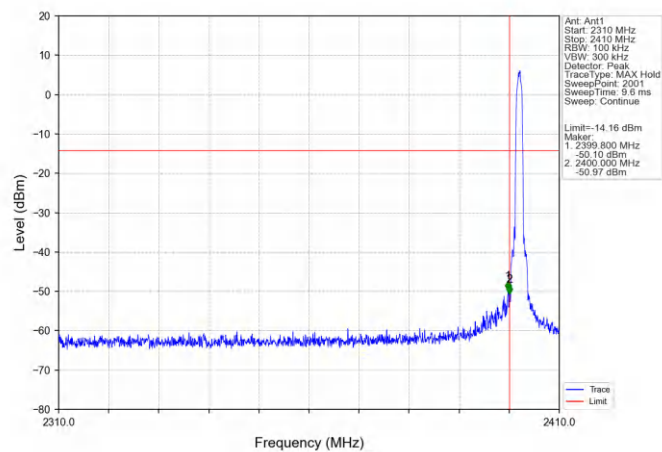


Pi/4DQPSK_2DH5_LCH_2402MHz_NTNV

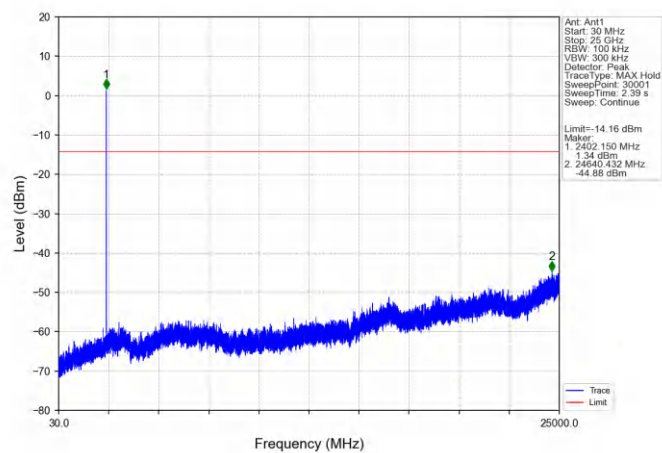


Pi/4DQPSK_2DH5_MCH_2441MHz_NTNV

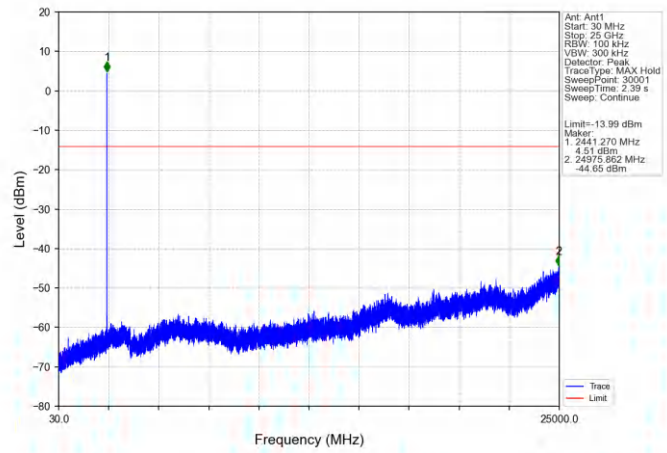


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

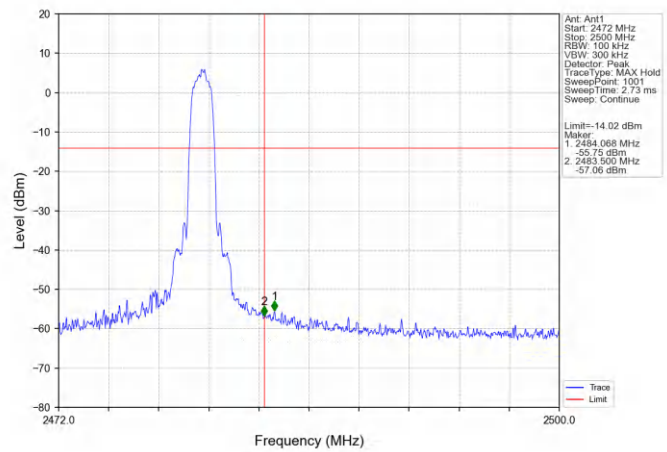


Pi/4DQPSK_2DH5_HCH_2480MHz_NTNV

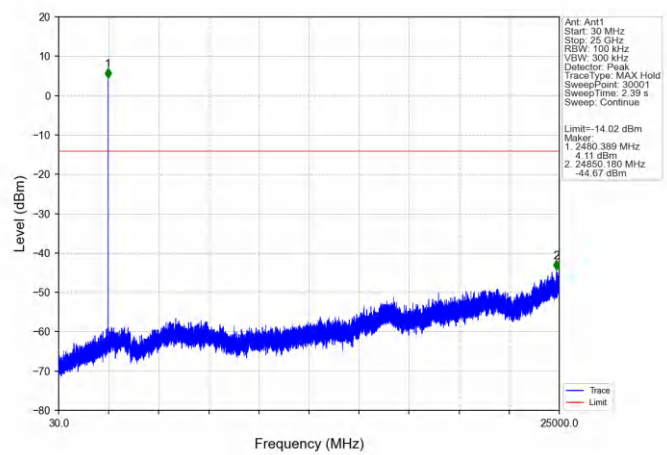


Pi/4DQPSK_2DH5_HOPP_NTNV

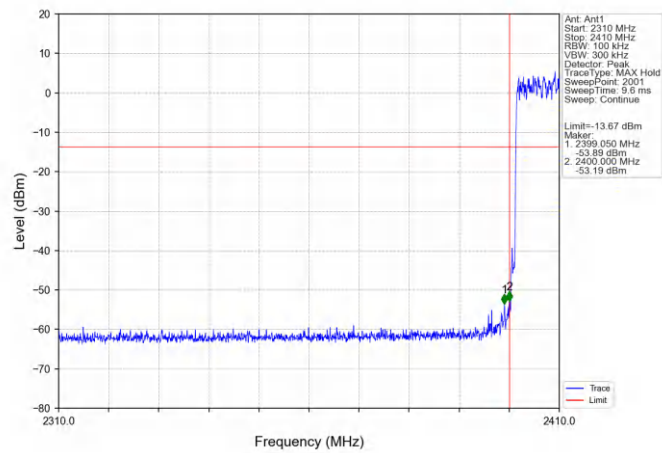


Pi/4DQPSK_2DH5_HOPP_NTNV

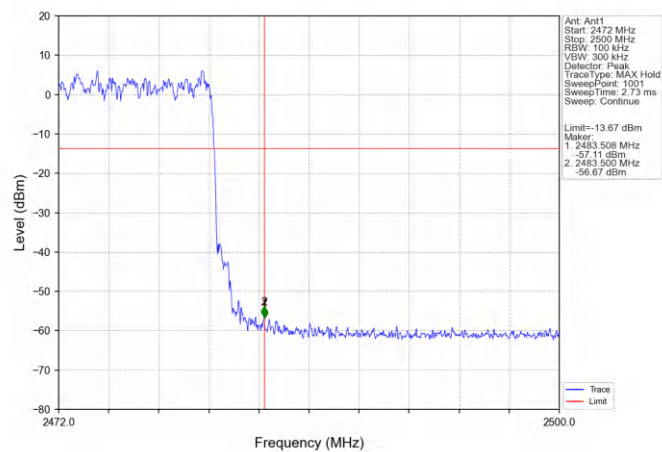


8DPSK_3DH5_LCH_2402MHz NTN

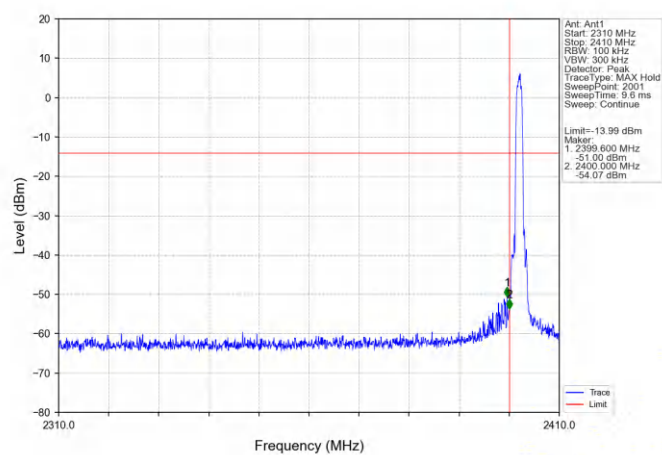


8DPSK 3DH5_LCH_2402MHz_NTNV

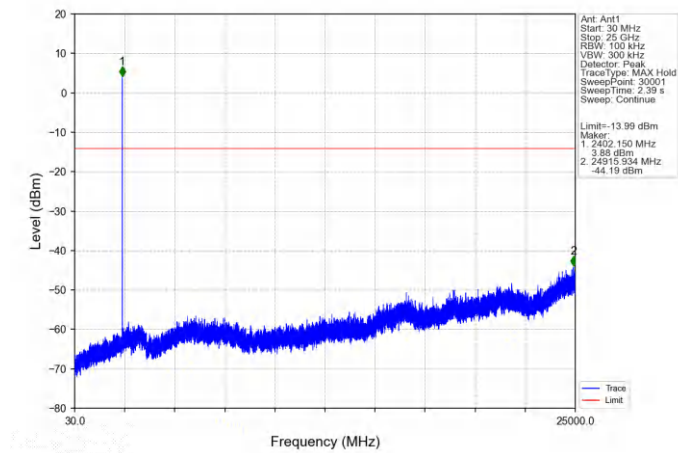


8DPSK 3DH5_MCH_2441MHz_NTNV

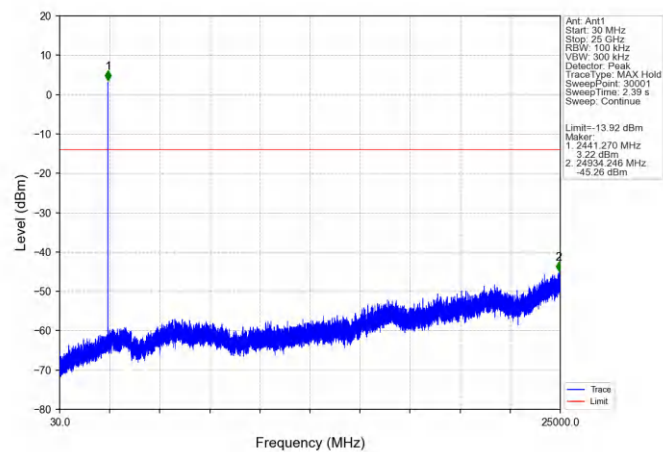


8DPSK 3DH5_HCH_2480MHz_NTNV

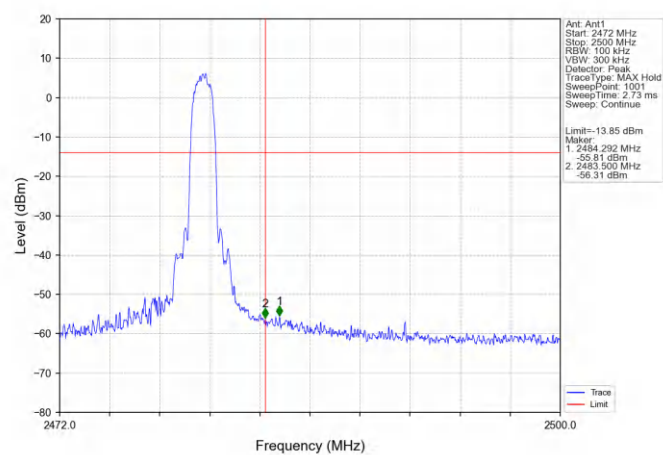


8DPSK 3DH5_HCH_2480MHz_NTNV

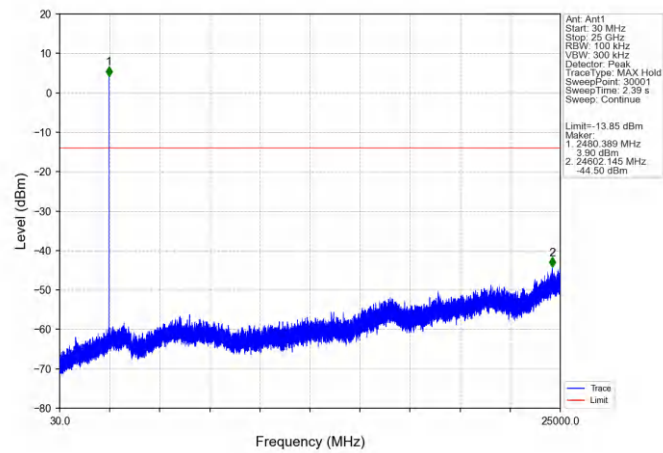

8DPSK_3DH5_HOPP_NTNV

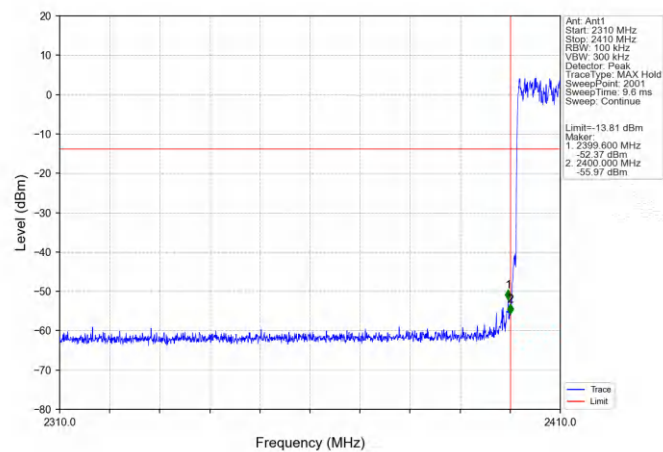

8DPSK_3DH5_HOPP_NTNV

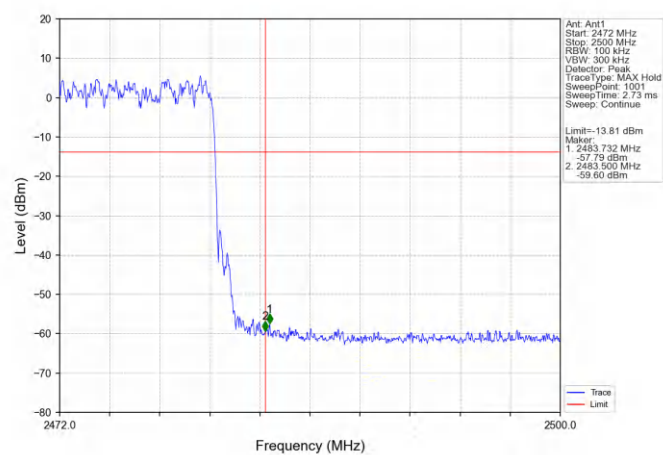

Appendix A.8: Test Results of Radiated Spurious Emissions

Note 1: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.


Note 2: The highest emissions are the fundamental waves.

Note 3: All modes and ports tested, only the worst-case reported.


30MHz - 1GHz

PCB ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.9°C
M/N: WF8255-U1	Humidity: 49%RH
Test Voltage: DC 5V	Test Date: 2026-06-09
Test Mode: BT TX	
Note: PCB ANT	

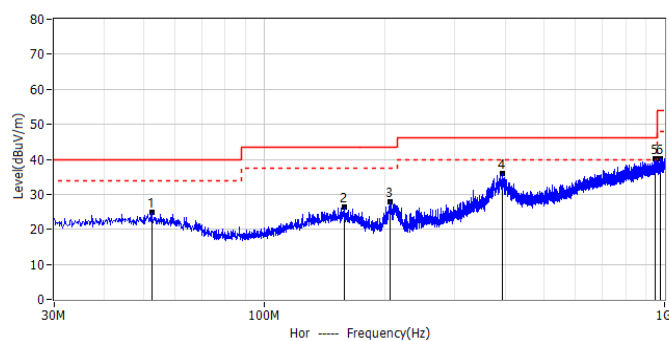


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	52.553	3.93	20.84	24.77	40.00	-15.23	QP	Hor
2*	159.010	4.03	22.19	26.22	43.50	-17.28	QP	Hor
3*	206.904	9.71	18.03	27.74	43.50	-15.76	QP	Hor
4*	394.720	10.76	25.17	35.93	46.00	-10.07	QP	Hor
5*	948.590	5.19	34.91	40.10	46.00	-5.90	QP	Hor
6*	976.478	5.19	35.02	40.21	54.00	-13.79	QP	Hor

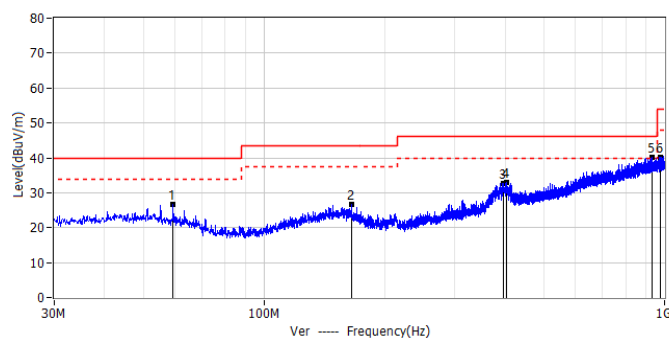


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	59.343	6.90	19.78	26.68	40.00	-13.32	QP	Ver
2*	165.800	5.09	21.44	26.53	43.50	-16.97	QP	Ver
3*	395.569	7.48	25.20	32.68	46.00	-13.32	QP	Ver
4*	402.723	7.81	25.14	32.95	46.00	-13.05	QP	Ver
5*	930.403	5.62	34.54	40.16	46.00	-5.84	QP	Ver
6*	975.871	5.16	35.01	40.17	54.00	-13.83	QP	Ver

FPC ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.9°C
M/N: WF8255-U1	Humidity: 49%RH
Test Voltage: DC 5V	Test Date: 2026-06-09
Test Mode: BT TX	
Note: FPC ANT	

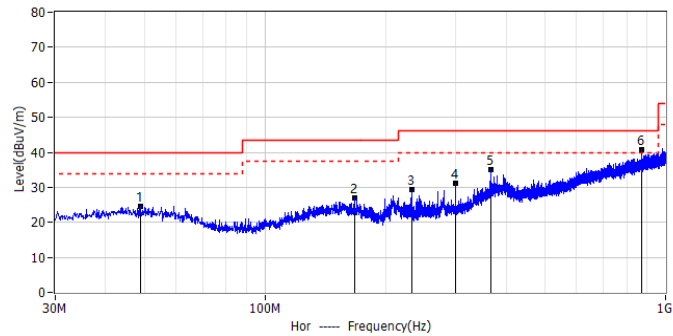


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	48.915	3.63	20.99	24.62	40.00	-15.38	QP	Hor
2*	167.983	5.69	21.16	26.85	43.50	-16.65	QP	Hor
3*	232.488	10.23	19.18	29.41	46.00	-16.59	QP	Hor
4*	298.690	9.23	21.99	31.22	46.00	-14.78	QP	Hor
5*	366.590	10.88	24.10	34.98	46.00	-11.02	QP	Hor
6*	870.505	6.65	34.15	40.80	46.00	-5.20	QP	Hor

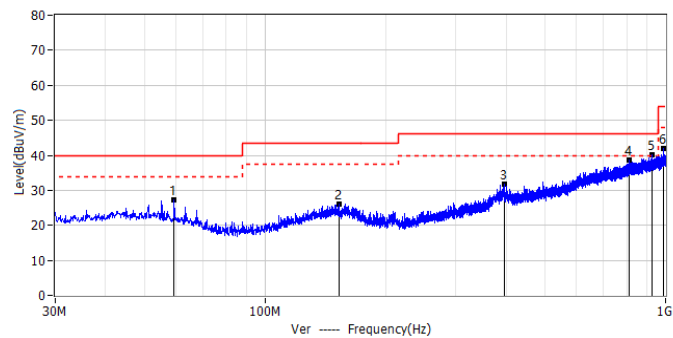


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	59.343	7.58	19.78	27.36	40.00	-12.64	QP	Ver
2*	153.554	3.97	22.10	26.07	43.50	-17.43	QP	Ver
3*	395.084	6.42	25.20	31.62	46.00	-14.38	QP	Ver
4*	810.244	5.31	33.20	38.51	46.00	-7.49	QP	Ver
5*	923.006	5.78	34.39	40.17	46.00	-5.83	QP	Ver
6*	985.814	6.53	35.44	41.97	54.00	-12.03	QP	Ver

PIFA ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.9°C
M/N: WF8255-U1	Humidity: 49%RH
Test Voltage: DC 5V	Test Date: 2026-06-09
Test Mode: BT TX	
Note: PIFA ANT	

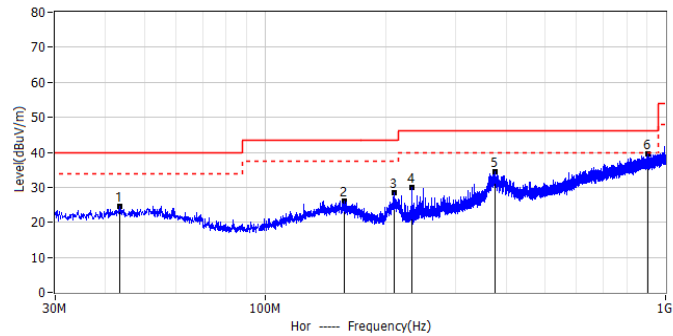

No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	43.459	3.62	21.03	24.65	40.00	-15.35	QP	Hor
2*	157.676	3.93	22.18	26.11	43.50	-17.39	QP	Hor
3*	209.814	10.68	17.92	28.60	43.50	-14.90	QP	Hor
4*	232.245	10.68	19.17	29.85	46.00	-16.15	QP	Hor
5*	375.199	9.90	24.50	34.40	46.00	-11.60	QP	Hor
6*	903.364	5.16	34.37	39.53	46.00	-6.47	QP	Hor

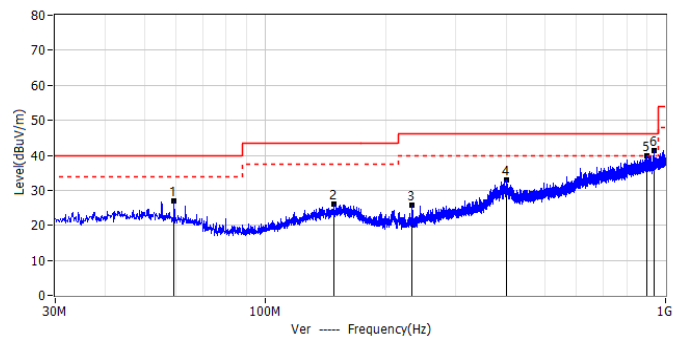


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	59.343	7.08	19.78	26.86	40.00	-13.14	QP	Ver
2*	148.946	4.08	22.02	26.10	43.50	-17.40	QP	Ver
3*	232.730	6.47	19.18	25.65	46.00	-20.35	QP	Ver
4*	401.753	7.76	25.13	32.89	46.00	-13.11	QP	Ver
5*	899.605	5.48	34.35	39.83	46.00	-6.17	QP	Ver
6*	935.131	7.01	34.37	41.38	46.00	-4.62	QP	Ver

Above 1GHz


Note: The highest waveform in the figure is Wi-Fi Fundamental.

PCB ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: DH5 2402	
Note: PCB	

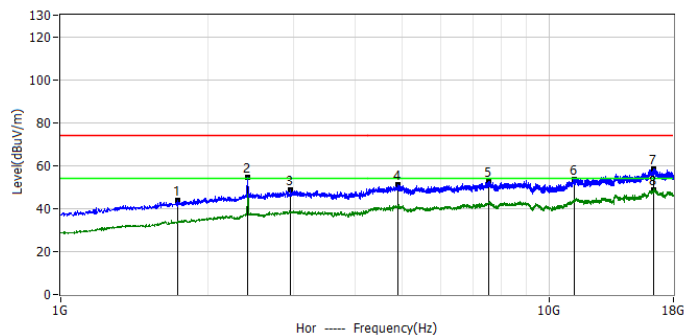


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7331GHz	61.58	-17.98	43.60	74.00	-30.40	PK	Hor
2*	2.4022GHz	65.36	-10.93	54.43	/	/	PK	Hor
3*	2.9529GHz	56.80	-8.31	48.49	74.00	-25.51	PK	Hor
4*	4.9142GHz	57.06	-5.94	51.12	74.00	-22.88	PK	Hor
5*	7.5322GHz	59.53	-7.05	52.48	74.00	-21.52	PK	Hor
6*	11.2744GHz	57.71	-4.03	53.68	74.00	-20.32	PK	Hor
7*	16.4211GHz	56.78	1.79	58.57	74.00	-15.43	PK	Hor
8*	16.4211GHz	46.91	1.79	48.70	54.00	-5.30	AV	Hor

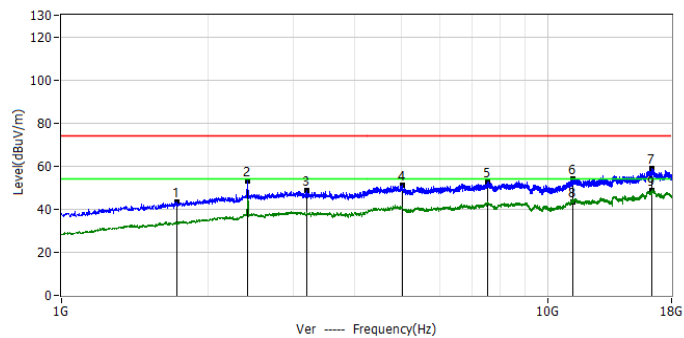


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7246GHz	61.43	-18.08	43.35	74.00	-30.65	PK	Ver
2*	2.4024GHz	63.83	-10.91	52.92	/	/	PK	Ver
3*	3.2015GHz	57.04	-8.19	48.85	74.00	-25.15	PK	Ver
4*	5.0332GHz	57.19	-6.14	51.05	74.00	-22.95	PK	Ver
5*	7.5280GHz	59.84	-7.05	52.79	74.00	-21.21	PK	Ver
6*	11.2999GHz	58.09	-4.01	54.08	74.00	-19.92	PK	Ver
7*	16.4105GHz	57.09	1.78	58.87	74.00	-15.13	PK	Ver
8*	11.2999GHz	47.51	-4.01	43.50	54.00	-10.50	AV	Ver
9*	16.4105GHz	47.12	1.78	48.90	54.00	-5.10	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: DH5 2441	
Note: PCB	

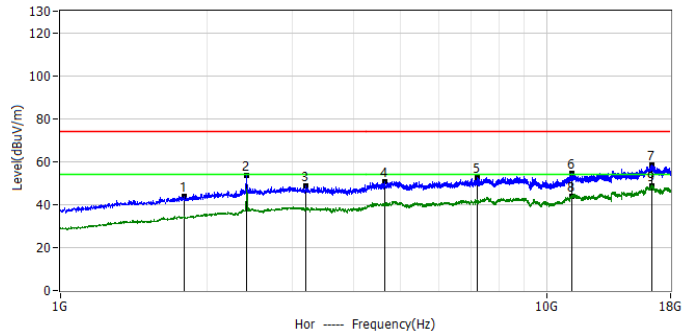


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7990GHz	61.01	-17.21	43.80	74.00	-30.20	PK	Hor
2*	2.4414GHz	64.51	-10.91	53.60	/	/	PK	Hor
3*	3.2015GHz	56.78	-8.19	48.59	74.00	-25.41	PK	Hor
4*	4.6444GHz	56.44	-5.72	50.72	74.00	-23.28	PK	Hor
5*	7.1901GHz	59.62	-7.06	52.56	74.00	-21.44	PK	Hor
6*	11.3020GHz	58.56	-4.01	54.55	74.00	-19.45	PK	Hor
7*	16.4912GHz	56.61	1.87	58.48	74.00	-15.52	PK	Hor
8*	11.3020GHz	48.01	-4.01	44.00	54.00	-10.00	AV	Hor
9*	16.4912GHz	46.63	1.87	48.50	54.00	-5.50	AV	Hor

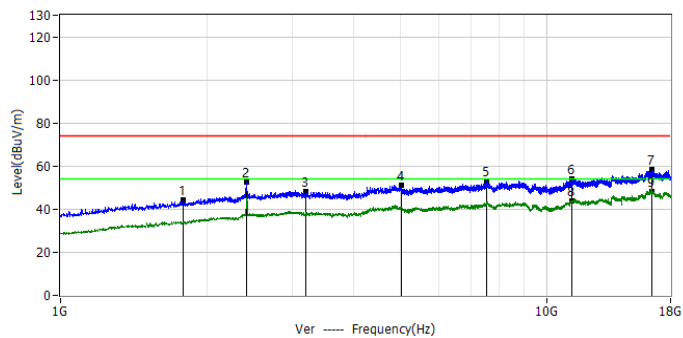


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7884GHz	61.79	-17.34	44.45	74.00	-29.55	PK	Ver
2*	2.4410GHz	63.78	-10.97	52.81	/	/	PK	Ver
3*	3.2015GHz	56.62	-8.19	48.43	74.00	-25.57	PK	Ver
4*	5.0290GHz	57.33	-6.12	51.21	74.00	-22.79	PK	Ver
5*	7.5429GHz	60.01	-7.07	52.94	74.00	-21.06	PK	Ver
6*	11.2935GHz	58.15	-4.02	54.13	74.00	-19.87	PK	Ver
7*	16.4424GHz	56.73	1.82	58.55	74.00	-15.45	PK	Ver
8*	11.2935GHz	47.62	-4.02	43.60	54.00	-10.40	AV	Ver
9*	16.4424GHz	46.58	1.82	48.40	54.00	-5.60	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: DH5 2480	
Note: PCB	

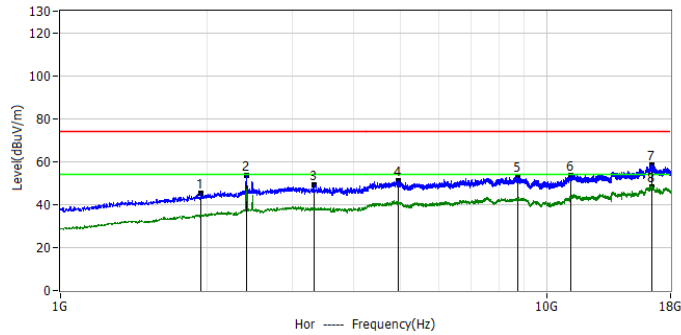


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9435GHz	60.96	-15.46	45.50	74.00	-28.50	PK	Hor
2*	2.4801GHz	64.52	-10.95	53.57	/	/	PK	Hor
3*	3.3184GHz	57.33	-8.24	49.09	74.00	-24.91	PK	Hor
4*	4.9482GHz	56.94	-5.97	50.97	74.00	-23.03	PK	Hor
5*	8.7074GHz	60.22	-7.29	52.93	74.00	-21.07	PK	Hor
6*	11.2191GHz	57.82	-4.09	53.73	74.00	-20.27	PK	Hor
7*	16.4934GHz	56.59	1.88	58.47	74.00	-15.53	PK	Hor
8*	16.4934GHz	46.42	1.88	48.30	54.00	-5.70	AV	Hor

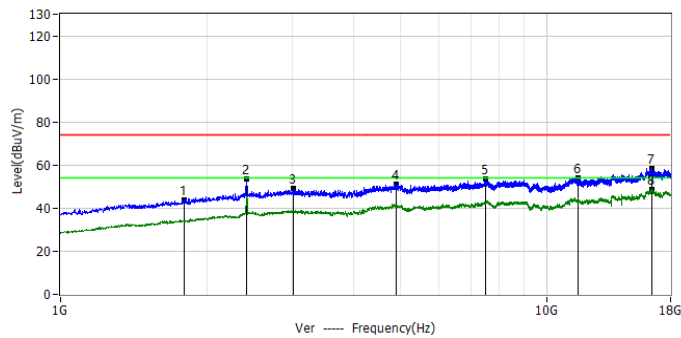


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7926GHz	61.28	-17.29	43.99	74.00	-30.01	PK	Ver
2*	2.4804GHz	64.26	-10.91	53.35	/	/	PK	Ver
3*	3.0060GHz	57.21	-8.12	49.09	74.00	-24.91	PK	Ver
4*	4.9036GHz	57.12	-5.93	51.19	74.00	-22.81	PK	Ver
5*	7.5067GHz	60.47	-7.00	53.47	74.00	-20.53	PK	Ver
6*	11.5974GHz	57.57	-3.72	53.85	74.00	-20.15	PK	Ver
7*	16.4339GHz	56.70	1.81	58.51	74.00	-15.49	PK	Ver
8*	16.4339GHz	46.89	1.81	48.70	54.00	-5.30	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: 2DH5 2402	
Note: PCB	

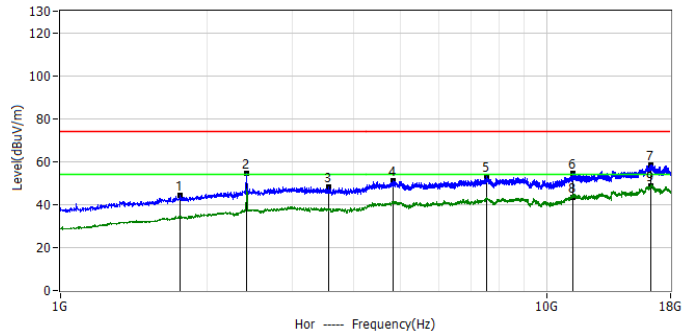


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7607GHz	62.15	-17.66	44.49	74.00	-29.51	PK	Hor
2*	2.4022GHz	65.30	-10.93	54.37	/	/	PK	Hor
3*	3.5670GHz	56.37	-8.22	48.15	74.00	-25.85	PK	Hor
4*	4.8314GHz	56.81	-5.87	50.94	74.00	-23.06	PK	Hor
5*	7.5216GHz	59.98	-7.03	52.95	74.00	-21.05	PK	Hor
6*	11.3339GHz	58.71	-3.98	54.73	74.00	-19.27	PK	Hor
7*	16.4211GHz	56.59	1.79	58.38	74.00	-15.62	PK	Hor
8*	11.3339GHz	47.38	-3.98	43.40	54.00	-10.60	AV	Hor
9*	16.4211GHz	46.91	1.79	48.70	54.00	-5.30	AV	Hor

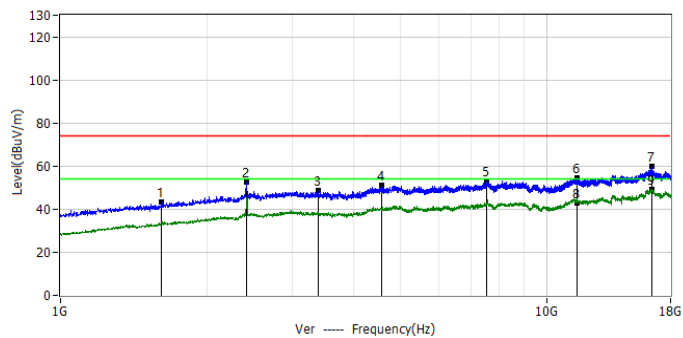


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6162GHz	62.57	-19.34	43.23	74.00	-30.77	PK	Ver
2*	2.4022GHz	63.58	-10.93	52.65	/	/	PK	Ver
3*	3.3906GHz	57.11	-8.26	48.85	74.00	-25.15	PK	Ver
4*	4.5742GHz	56.57	-5.66	50.91	74.00	-23.09	PK	Ver
5*	7.5195GHz	59.98	-7.03	52.95	74.00	-21.05	PK	Ver
6*	11.5485GHz	58.32	-3.77	54.55	74.00	-19.45	PK	Ver
7*	16.4785GHz	57.97	1.86	59.83	74.00	-14.17	PK	Ver
8*	11.5485GHz	46.57	-3.77	42.80	54.00	-11.20	AV	Ver
9*	16.4785GHz	47.24	1.86	49.10	54.00	-4.90	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: 2DH5 2441	
Note: PCB	

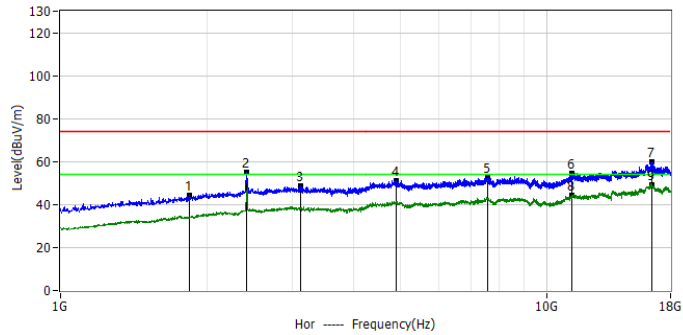


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8372GHz	61.09	-16.75	44.34	74.00	-29.66	PK	Hor
2*	2.4411GHz	65.89	-10.95	54.94	/	/	PK	Hor
3*	3.1186GHz	56.73	-8.16	48.57	74.00	-25.43	PK	Hor
4*	4.9142GHz	57.12	-5.94	51.18	74.00	-22.82	PK	Hor
5*	7.5684GHz	59.76	-7.13	52.63	74.00	-21.37	PK	Hor
6*	11.2914GHz	58.71	-4.02	54.69	74.00	-19.31	PK	Hor
7*	16.4849GHz	57.99	1.87	59.86	74.00	-14.14	PK	Hor
8*	11.2914GHz	48.22	-4.02	44.20	54.00	-9.80	AV	Hor
9*	16.4849GHz	47.43	1.87	49.30	54.00	-4.70	AV	Hor

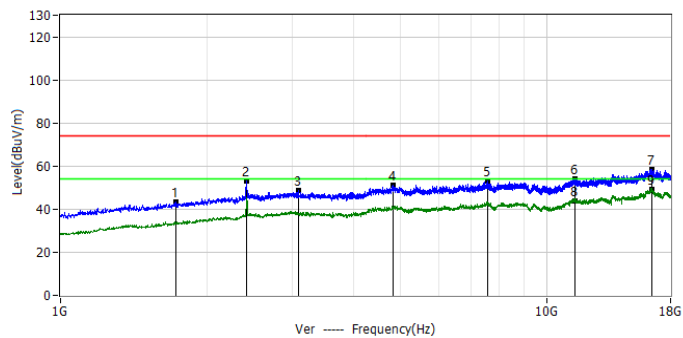


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7246GHz	61.41	-18.08	43.33	74.00	-30.67	PK	Ver
2*	2.4412GHz	64.21	-10.93	53.28	/	/	PK	Ver
3*	3.0825GHz	56.90	-8.15	48.75	74.00	-25.25	PK	Ver
4*	4.8271GHz	57.19	-5.87	51.32	74.00	-22.68	PK	Ver
5*	7.5662GHz	60.12	-7.12	53.00	74.00	-21.00	PK	Ver
6*	11.4337GHz	57.94	-3.88	54.06	74.00	-19.94	PK	Ver
7*	16.4870GHz	56.62	1.87	58.49	74.00	-15.51	PK	Ver
8*	11.4337GHz	47.68	-3.88	43.80	54.00	-10.20	AV	Ver
9*	16.4870GHz	47.13	1.87	49.00	54.00	-5.00	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: 2DH5 2480	
Note: PCB	

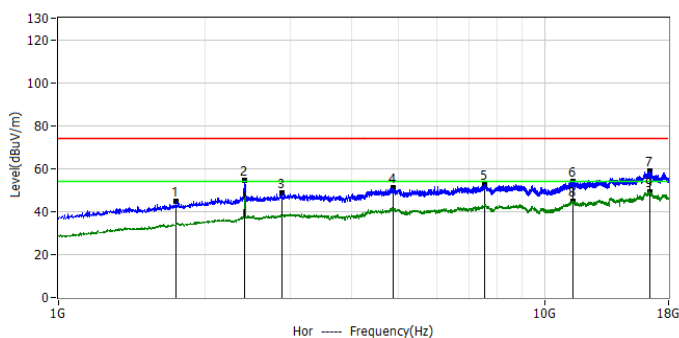


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7480GHz	62.46	-17.81	44.65	74.00	-29.35	PK	Hor
2*	2.4802GHz	65.40	-10.93	54.47	/	/	PK	Hor
3*	2.8764GHz	57.50	-8.62	48.88	74.00	-25.12	PK	Hor
4*	4.8760GHz	57.16	-5.91	51.25	74.00	-22.75	PK	Hor
5*	7.5195GHz	59.54	-7.03	52.51	74.00	-21.49	PK	Hor
6*	11.4444GHz	57.91	-3.87	54.04	74.00	-19.96	PK	Hor
7*	16.4849GHz	56.88	1.87	58.75	74.00	-15.25	PK	Hor
8*	11.4444GHz	48.57	-3.87	44.70	54.00	-9.30	AV	Hor
9*	16.4849GHz	47.53	1.87	49.40	54.00	-4.60	AV	Hor

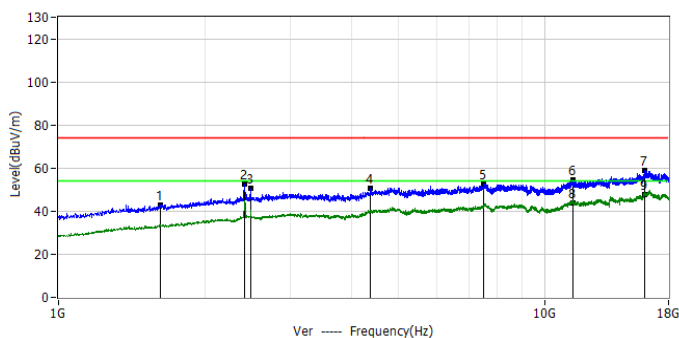


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6205GHz	62.29	-19.29	43.00	74.00	-31.00	PK	Ver
2*	2.4802GHz	63.48	-10.93	52.55	/	/	PK	Ver
3*	2.4811GHz	61.10	-10.32	50.78	74.00	-23.22	PK	Ver
4*	4.3872GHz	56.89	-6.07	50.82	74.00	-23.18	PK	Ver
5*	7.5004GHz	59.72	-6.99	52.73	74.00	-21.27	PK	Ver
6*	11.4167GHz	58.29	-3.90	54.39	74.00	-19.61	PK	Ver
7*	16.0726GHz	57.68	1.38	59.06	74.00	-14.94	PK	Ver
8*	11.4167GHz	47.60	-3.90	43.70	54.00	-10.30	AV	Ver
9*	16.0726GHz	46.52	1.38	47.90	54.00	-6.10	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: 3DH5 2402	
Note: PCB	

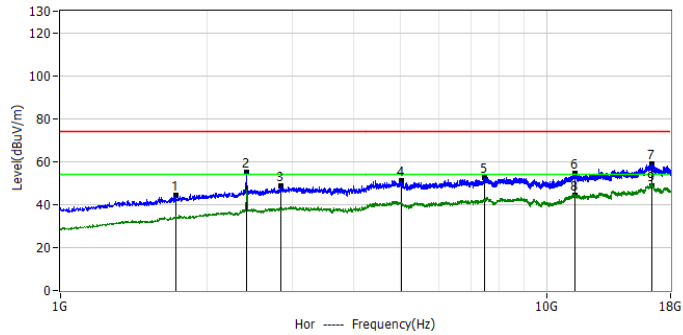


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7246GHz	62.45	-18.08	44.37	74.00	-29.63	PK	Hor
2*	2.4022GHz	65.97	-10.93	55.04	/	/	PK	Hor
3*	2.8339GHz	57.25	-8.79	48.46	74.00	-25.54	PK	Hor
4*	5.0332GHz	57.18	-6.14	51.04	74.00	-22.96	PK	Hor
5*	7.4706GHz	59.72	-7.00	52.72	74.00	-21.28	PK	Hor
6*	11.4592GHz	58.55	-3.85	54.70	74.00	-19.30	PK	Hor
7*	16.4997GHz	57.26	1.88	59.14	74.00	-14.86	PK	Hor
8*	11.4592GHz	48.15	-3.85	44.30	54.00	-9.70	AV	Hor
9*	16.4997GHz	46.92	1.88	48.80	54.00	-5.20	AV	Hor

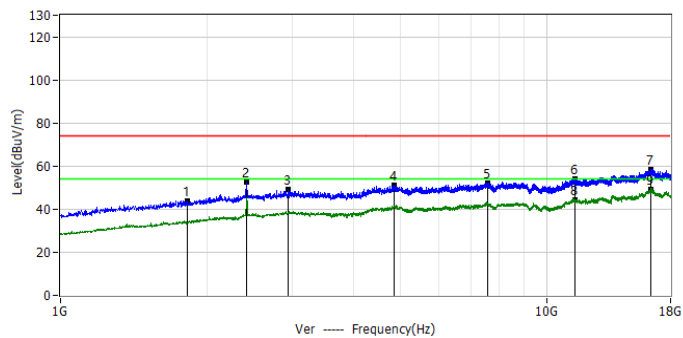


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8245GHz	60.85	-16.90	43.95	74.00	-30.05	PK	Ver
2*	2.4020GHz	63.76	-10.97	52.79	/	/	PK	Ver
3*	2.9444GHz	57.31	-8.35	48.96	74.00	-25.04	PK	Ver
4*	4.8632GHz	56.79	-5.90	50.89	74.00	-23.11	PK	Ver
5*	7.5492GHz	59.37	-7.09	52.28	74.00	-21.72	PK	Ver
6*	11.4316GHz	57.96	-3.88	54.08	74.00	-19.92	PK	Ver
7*	16.4275GHz	56.77	1.80	58.57	74.00	-15.43	PK	Ver
8*	11.4316GHz	48.38	-3.88	44.50	54.00	-9.50	AV	Ver
9*	16.4275GHz	47.30	1.80	49.10	54.00	-4.90	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: 3DH5 2441	
Note: PCB	

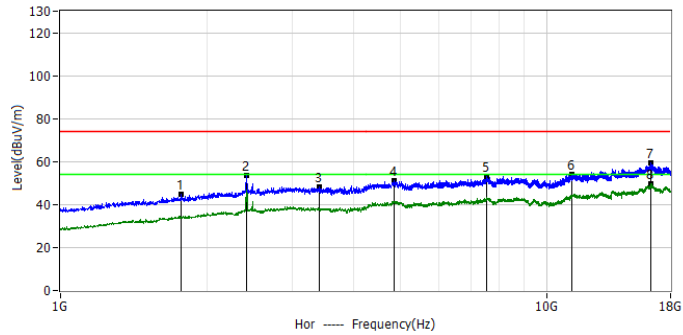


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7735GHz	62.40	-17.51	44.89	74.00	-29.11	PK	Hor
2*	2.4412GHz	64.51	-10.93	53.58	/	/	PK	Hor
3*	3.4097GHz	56.34	-8.27	48.07	74.00	-25.93	PK	Hor
4*	4.8611GHz	56.85	-5.90	50.95	74.00	-23.05	PK	Hor
5*	7.5259GHz	60.00	-7.04	52.96	74.00	-21.04	PK	Hor
6*	11.2722GHz	58.04	-4.04	54.00	74.00	-20.00	PK	Hor
7*	16.4317GHz	57.60	1.80	59.40	74.00	-14.60	PK	Hor
8*	16.4317GHz	47.80	1.80	49.60	54.00	-4.40	AV	Hor

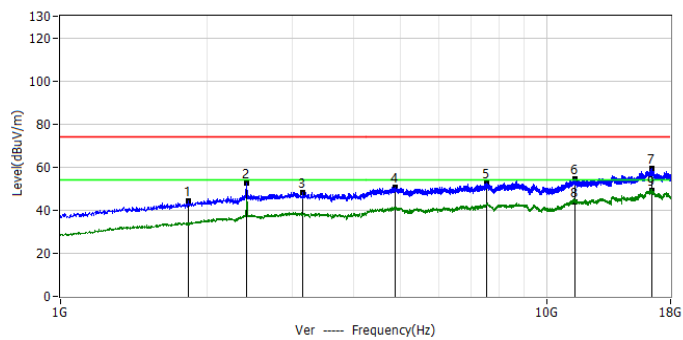


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8287GHz	61.16	-16.85	44.31	74.00	-29.69	PK	Ver
2*	2.4412GHz	63.47	-10.93	52.54	/	/	PK	Ver
3*	3.1547GHz	56.43	-8.18	48.25	74.00	-25.75	PK	Ver
4*	4.8887GHz	56.38	-5.92	50.46	74.00	-23.54	PK	Ver
5*	7.5174GHz	59.46	-7.02	52.44	74.00	-21.56	PK	Ver
6*	11.4529GHz	58.40	-3.86	54.54	74.00	-19.46	PK	Ver
7*	16.4912GHz	57.39	1.87	59.26	74.00	-14.74	PK	Ver
8*	11.4529GHz	47.76	-3.86	43.90	54.00	-10.10	AV	Ver
9*	16.4912GHz	47.23	1.87	49.10	54.00	-4.90	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-17
Test Mode: 3DH5 2480	
Note: PCB	

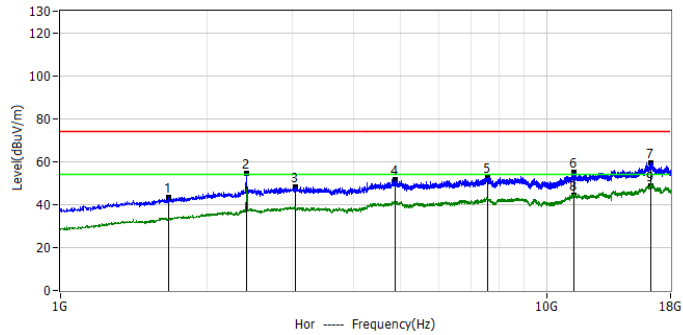


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6651GHz	62.24	-18.77	43.47	74.00	-30.53	PK	Hor
2*	2.4801GHz	65.72	-10.95	54.77	/	/	PK	Hor
3*	3.0400GHz	56.51	-8.13	48.38	74.00	-25.62	PK	Hor
4*	4.8739GHz	57.44	-5.91	51.53	74.00	-22.47	PK	Hor
5*	7.5832GHz	59.75	-7.15	52.60	74.00	-21.40	PK	Hor
6*	11.3679GHz	59.17	-3.94	55.23	74.00	-18.77	PK	Hor
7*	16.3977GHz	57.84	1.76	59.60	74.00	-14.40	PK	Hor
8*	11.3679GHz	48.44	-3.94	44.50	54.00	-9.50	AV	Hor
9*	16.3977GHz	47.14	1.76	48.90	54.00	-5.10	AV	Hor

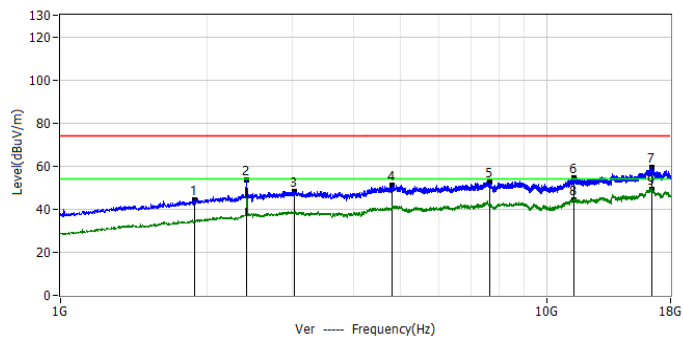


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8861GHz	60.40	-16.15	44.25	74.00	-29.75	PK	Ver
2*	2.4802GHz	64.59	-10.93	53.66	/	/	PK	Ver
3*	3.0230GHz	56.45	-8.13	48.32	74.00	-25.68	PK	Ver
4*	4.8080GHz	56.97	-5.85	51.12	74.00	-22.88	PK	Ver
5*	7.6364GHz	59.75	-7.26	52.49	74.00	-21.51	PK	Ver
6*	11.4040GHz	58.62	-3.91	54.71	74.00	-19.29	PK	Ver
7*	16.4934GHz	57.73	1.88	59.61	74.00	-14.39	PK	Ver
8*	11.4040GHz	48.11	-3.91	44.20	54.00	-9.80	AV	Ver
9*	16.4934GHz	47.42	1.88	49.30	54.00	-4.70	AV	Ver

FPC ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: DH5 2402	
Note: FPC	

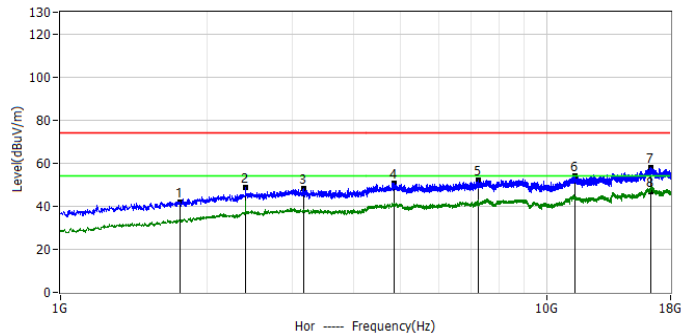


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7650GHz	59.71	-17.61	42.10	74.00	-31.90	PK	Hor
2*	2.4025GHz	59.57	-11.05	48.52	/	/	PK	Hor
3*	3.1590GHz	56.21	-8.18	48.03	74.00	-25.97	PK	Hor
4*	4.8632GHz	56.62	-5.90	50.72	74.00	-23.28	PK	Hor
5*	7.2454GHz	59.00	-7.05	51.95	74.00	-22.05	PK	Hor
6*	11.4401GHz	57.73	-3.87	53.86	74.00	-20.14	PK	Hor
7*	16.3701GHz	56.25	1.73	57.98	74.00	-16.02	PK	Hor
8*	16.3701GHz	45.07	1.73	46.80	54.00	-7.20	AV	Hor

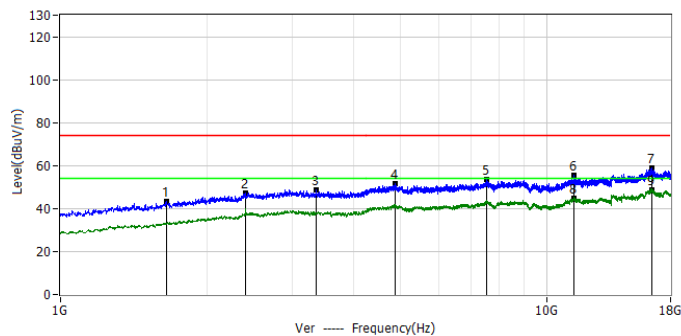


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6502GHz	62.08	-18.95	43.13	74.00	-30.87	PK	Ver
2*	2.4025GHz	58.39	-11.05	47.34	/	/	PK	Ver
3*	3.3566GHz	56.73	-8.25	48.48	74.00	-25.52	PK	Ver
4*	4.8866GHz	57.38	-5.92	51.46	74.00	-22.54	PK	Ver
5*	7.5301GHz	60.46	-7.05	53.41	74.00	-20.59	PK	Ver
6*	11.4040GHz	59.21	-3.91	55.30	74.00	-18.70	PK	Ver
7*	16.4806GHz	56.90	1.86	58.76	74.00	-15.24	PK	Ver
8*	11.4040GHz	48.51	-3.91	44.60	54.00	-9.40	AV	Ver
9*	16.4806GHz	47.04	1.86	48.90	54.00	-5.10	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: DH5 2441	
Note: FPC	

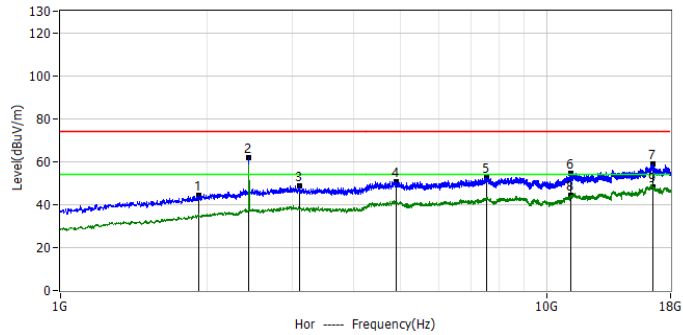


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9244GHz	59.78	-15.69	44.09	74.00	-29.91	PK	Hor
2*	2.4407GHz	72.61	-10.69	61.92	/	/	PK	Hor
3*	3.1059GHz	56.67	-8.16	48.51	74.00	-25.49	PK	Hor
4*	4.9164GHz	56.69	-5.94	50.75	74.00	-23.25	PK	Hor
5*	7.5131GHz	59.63	-7.02	52.61	74.00	-21.39	PK	Hor
6*	11.2021GHz	58.85	-4.10	54.75	74.00	-19.25	PK	Hor
7*	16.5359GHz	57.26	1.78	59.04	74.00	-14.96	PK	Hor
8*	11.2021GHz	48.20	-4.10	44.10	54.00	-9.90	AV	Hor
9*	16.5359GHz	46.22	1.78	48.00	54.00	-6.00	AV	Hor

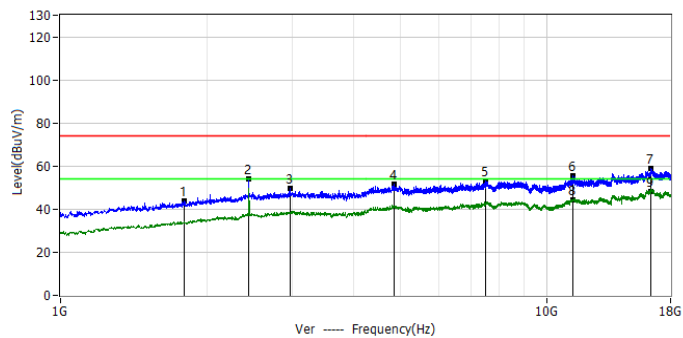


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7990GHz	60.87	-17.21	43.66	74.00	-30.34	PK	Ver
2*	2.4407GHz	64.96	-10.69	54.27	/	/	PK	Ver
3*	2.9635GHz	58.05	-8.27	49.78	74.00	-24.22	PK	Ver
4*	4.8654GHz	57.74	-5.90	51.84	74.00	-22.16	PK	Ver
5*	7.5089GHz	60.00	-7.01	52.99	74.00	-21.01	PK	Ver
6*	11.3105GHz	59.60	-4.00	55.60	74.00	-18.40	PK	Ver
7*	16.3935GHz	57.08	1.76	58.84	74.00	-15.16	PK	Ver
8*	11.3105GHz	48.20	-4.00	44.20	54.00	-9.80	AV	Ver
9*	16.3935GHz	46.44	1.76	48.20	54.00	-5.80	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: DH5 2480	
Note: FPC	

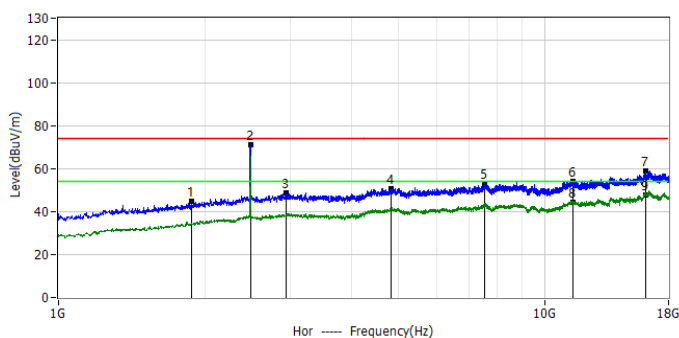


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8776GHz	60.92	-16.26	44.66	74.00	-29.34	PK	Hor
2*	2.4811GHz	81.22	-10.32	70.90	/	/	PK	Hor
3*	2.9465GHz	57.22	-8.34	48.88	74.00	-25.12	PK	Hor
4*	4.8356GHz	56.68	-5.88	50.80	74.00	-23.20	PK	Hor
5*	7.5259GHz	60.21	-7.04	53.17	74.00	-20.83	PK	Hor
6*	11.4486GHz	57.94	-3.86	54.08	74.00	-19.92	PK	Hor
7*	16.1789GHz	57.47	1.50	58.97	74.00	-15.03	PK	Hor
8*	11.4486GHz	48.06	-3.86	44.20	54.00	-9.80	AV	Hor
9*	16.1789GHz	46.30	1.50	47.80	54.00	-6.20	AV	Hor

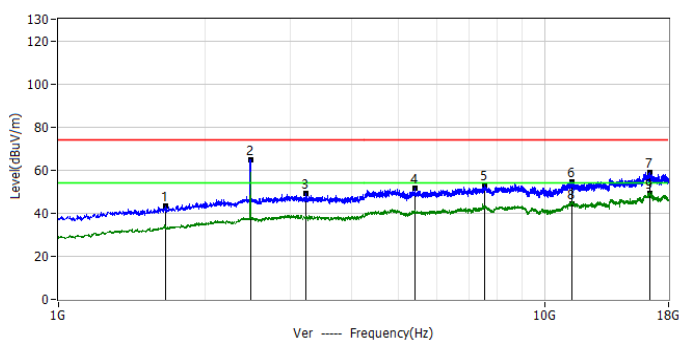


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6566GHz	61.96	-18.87	43.09	74.00	-30.91	PK	Ver
2*	2.4811GHz	75.21	-10.32	64.89	/	/	PK	Ver
3*	3.2312GHz	57.18	-8.21	48.97	74.00	-25.03	PK	Ver
4*	5.4115GHz	59.03	-7.56	51.47	74.00	-22.53	PK	Ver
5*	7.5174GHz	60.16	-7.02	53.14	74.00	-20.86	PK	Ver
6*	11.4082GHz	58.25	-3.90	54.35	74.00	-19.65	PK	Ver
7*	16.4742GHz	57.05	1.85	58.90	74.00	-15.10	PK	Ver
8*	11.4082GHz	48.30	-3.90	44.40	54.00	-9.60	AV	Ver
9*	16.4742GHz	47.15	1.85	49.00	54.00	-5.00	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 2DH5 2402	
Note: FPC	

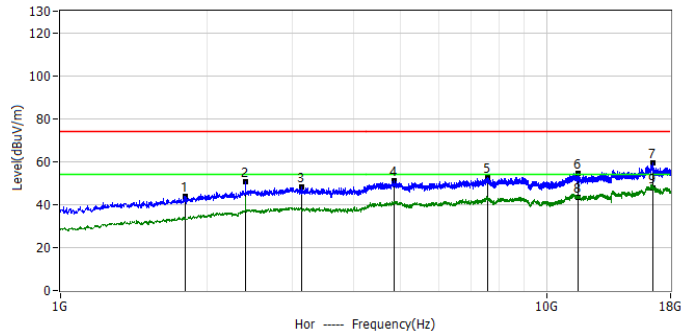


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8054GHz	60.95	-17.14	43.81	74.00	-30.19	PK	Hor
2*	2.4025GHz	61.69	-11.05	50.64	/	/	PK	Hor
3*	3.1399GHz	56.31	-8.17	48.14	74.00	-25.86	PK	Hor
4*	4.8696GHz	56.80	-5.90	50.90	74.00	-23.10	PK	Hor
5*	7.5641GHz	59.72	-7.12	52.60	74.00	-21.40	PK	Hor
6*	11.6101GHz	58.08	-3.71	54.37	74.00	-19.63	PK	Hor
7*	16.5274GHz	57.69	1.81	59.50	74.00	-14.50	PK	Hor
8*	11.6101GHz	46.91	-3.71	43.20	54.00	-10.80	AV	Hor
9*	16.5274GHz	46.09	1.81	47.90	54.00	-6.10	AV	Hor

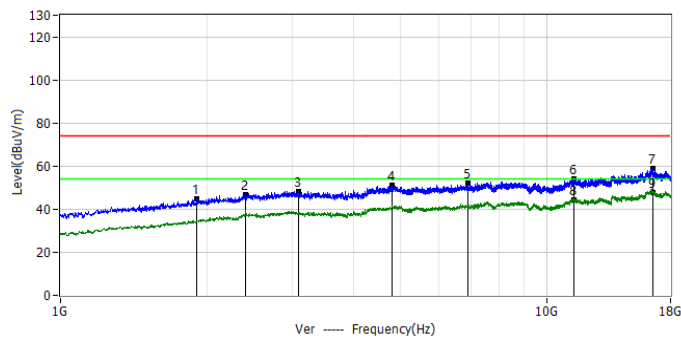


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9095GHz	60.71	-15.87	44.84	74.00	-29.16	PK	Ver
2*	2.4025GHz	57.77	-11.05	46.72	/	/	PK	Ver
3*	3.0931GHz	56.32	-8.15	48.17	74.00	-25.83	PK	Ver
4*	4.8080GHz	57.16	-5.85	51.31	74.00	-22.69	PK	Ver
5*	6.8820GHz	59.49	-7.19	52.30	74.00	-21.70	PK	Ver
6*	11.4104GHz	58.05	-3.90	54.15	74.00	-19.85	PK	Ver
7*	16.5869GHz	57.24	1.64	58.88	74.00	-15.12	PK	Ver
8*	11.4104GHz	48.20	-3.90	44.30	54.00	-9.70	AV	Ver
9*	16.5869GHz	45.86	1.64	47.50	54.00	-6.50	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 2DH5 2441	
Note: FPC	

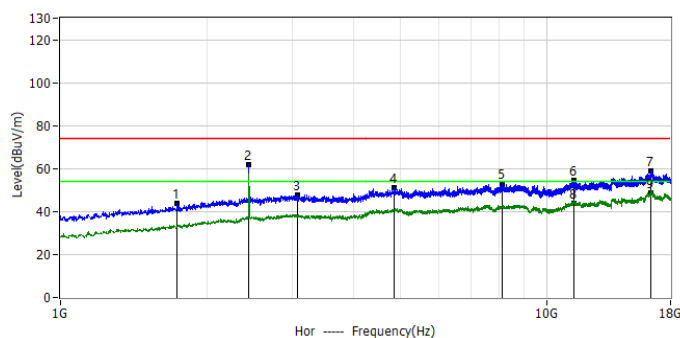


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7352GHz	61.64	-17.96	43.68	74.00	-30.32	PK	Hor
2*	2.4407GHz	72.49	-10.69	61.80	/	/	PK	Hor
3*	3.0719GHz	55.97	-8.15	47.82	74.00	-26.18	PK	Hor
4*	4.8654GHz	56.88	-5.90	50.98	74.00	-23.02	PK	Hor
5*	8.0911GHz	60.91	-7.89	53.02	74.00	-20.98	PK	Hor
6*	11.4104GHz	58.42	-3.90	54.52	74.00	-19.48	PK	Hor
7*	16.4190GHz	57.28	1.79	59.07	74.00	-14.93	PK	Hor
8*	11.4104GHz	47.70	-3.90	43.80	54.00	-10.20	AV	Hor
9*	16.4190GHz	46.81	1.79	48.60	54.00	-5.40	AV	Hor

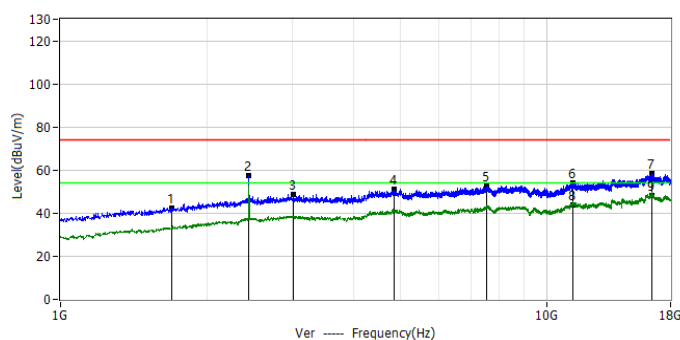


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6927GHz	60.94	-18.45	42.49	74.00	-31.51	PK	Ver
2*	2.4407GHz	68.37	-10.69	57.68	/	/	PK	Ver
3*	3.0187GHz	56.94	-8.13	48.81	74.00	-25.19	PK	Ver
4*	4.8505GHz	57.07	-5.89	51.18	74.00	-22.82	PK	Ver
5*	7.5216GHz	59.61	-7.03	52.58	74.00	-21.42	PK	Ver
6*	11.3232GHz	58.14	-3.99	54.15	74.00	-19.85	PK	Ver
7*	16.4742GHz	56.57	1.85	58.42	74.00	-15.58	PK	Ver
8*	11.3232GHz	47.69	-3.99	43.70	54.00	-10.30	AV	Ver
9*	16.4742GHz	46.55	1.85	48.40	54.00	-5.60	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 2DH5 2480	
Note: FPC	

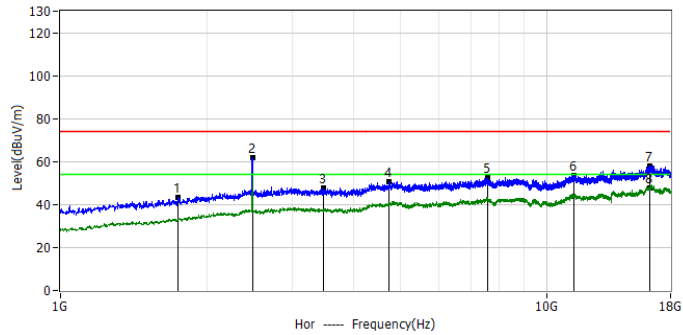


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7480GHz	61.12	-17.81	43.31	74.00	-30.69	PK	Hor
2*	2.4811GHz	72.37	-10.32	62.05	/	/	PK	Hor
3*	3.4756GHz	56.13	-8.30	47.83	74.00	-26.17	PK	Hor
4*	4.7485GHz	56.65	-5.80	50.85	74.00	-23.15	PK	Hor
5*	7.5769GHz	59.58	-7.14	52.44	74.00	-21.56	PK	Hor
6*	11.3891GHz	57.70	-3.92	53.78	74.00	-20.22	PK	Hor
7*	16.3340GHz	56.30	1.69	57.99	74.00	-16.01	PK	Hor
8*	16.3340GHz	45.91	1.69	47.60	54.00	-6.40	AV	Hor

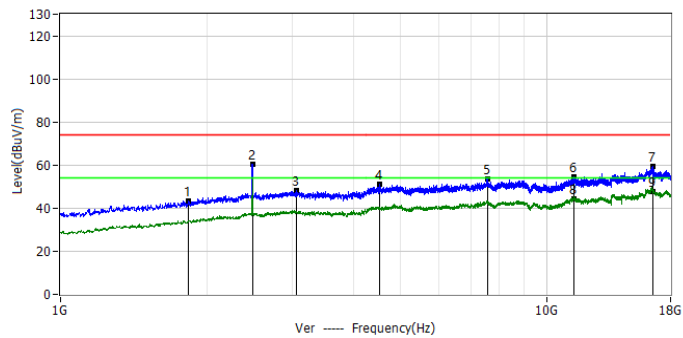


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8351GHz	60.15	-16.77	43.38	74.00	-30.62	PK	Ver
2*	2.4811GHz	70.86	-10.32	60.54	/	/	PK	Ver
3*	3.0549GHz	56.39	-8.14	48.25	74.00	-25.75	PK	Ver
4*	4.5445GHz	56.54	-5.64	50.90	74.00	-23.10	PK	Ver
5*	7.5641GHz	60.58	-7.12	53.46	74.00	-20.54	PK	Ver
6*	11.3976GHz	58.34	-3.91	54.43	74.00	-19.57	PK	Ver
7*	16.5316GHz	57.40	1.80	59.20	74.00	-14.80	PK	Ver
8*	11.3976GHz	48.31	-3.91	44.40	54.00	-9.60	AV	Ver
9*	16.5316GHz	46.10	1.80	47.90	54.00	-6.10	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 3DH5 2402	
Note: FPC	

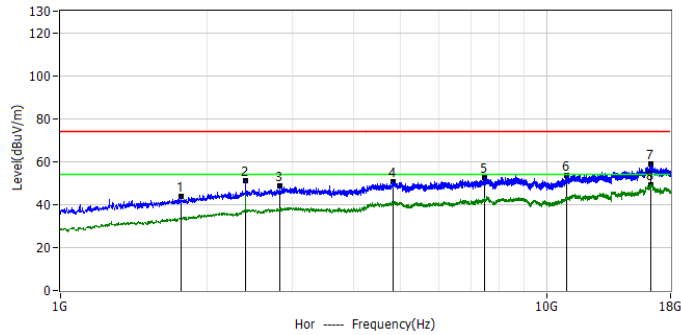


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7714GHz	61.22	-17.54	43.68	74.00	-30.32	PK	Hor
2*	2.4025GHz	62.15	-11.05	51.10	/	/	PK	Hor
3*	2.8232GHz	57.46	-8.84	48.62	74.00	-25.38	PK	Hor
4*	4.8250GHz	56.60	-5.87	50.73	74.00	-23.27	PK	Hor
5*	7.4685GHz	59.77	-7.00	52.77	74.00	-21.23	PK	Hor
6*	10.9939GHz	58.11	-4.32	53.79	74.00	-20.21	PK	Hor
7*	16.4084GHz	57.03	1.78	58.81	74.00	-15.19	PK	Hor
8*	16.4084GHz	47.32	1.78	49.10	54.00	-4.90	AV	Hor

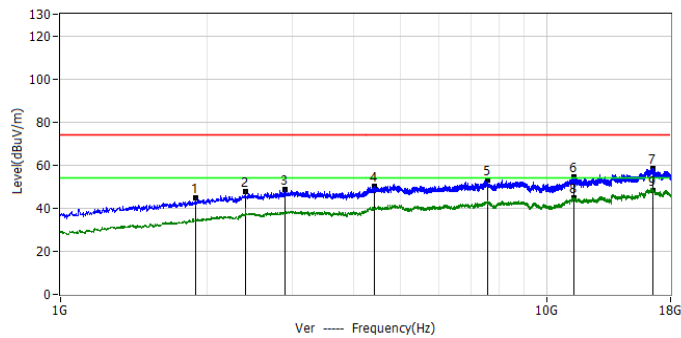


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8989GHz	60.61	-16.00	44.61	74.00	-29.39	PK	Ver
2*	2.4025GHz	58.62	-11.05	47.57	/	/	PK	Ver
3*	2.8997GHz	57.00	-8.53	48.47	74.00	-25.53	PK	Ver
4*	4.4340GHz	56.10	-5.88	50.22	74.00	-23.78	PK	Ver
5*	7.5790GHz	60.18	-7.15	53.03	74.00	-20.97	PK	Ver
6*	11.4125GHz	58.36	-3.90	54.46	74.00	-19.54	PK	Ver
7*	16.5529GHz	56.85	1.74	58.59	74.00	-15.41	PK	Ver
8*	11.4125GHz	48.60	-3.90	44.70	54.00	-9.30	AV	Ver
9*	16.5529GHz	46.26	1.74	48.00	54.00	-6.00	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 3DH5 2441	
Note: FPC	

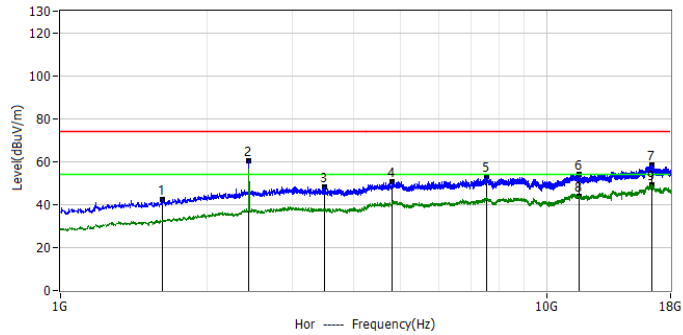


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6184GHz	61.60	-19.32	42.28	74.00	-31.72	PK	Hor
2*	2.4407GHz	71.28	-10.69	60.59	/	/	PK	Hor
3*	3.4905GHz	56.65	-8.30	48.35	74.00	-25.65	PK	Hor
4*	4.8165GHz	56.53	-5.86	50.67	74.00	-23.33	PK	Hor
5*	7.5301GHz	60.13	-7.05	53.08	74.00	-20.92	PK	Hor
6*	11.6845GHz	57.78	-3.64	54.14	74.00	-19.86	PK	Hor
7*	16.4785GHz	56.66	1.86	58.52	74.00	-15.48	PK	Hor
8*	11.6845GHz	47.24	-3.64	43.60	54.00	-10.40	AV	Hor
9*	16.4785GHz	47.34	1.86	49.20	54.00	-4.80	AV	Hor

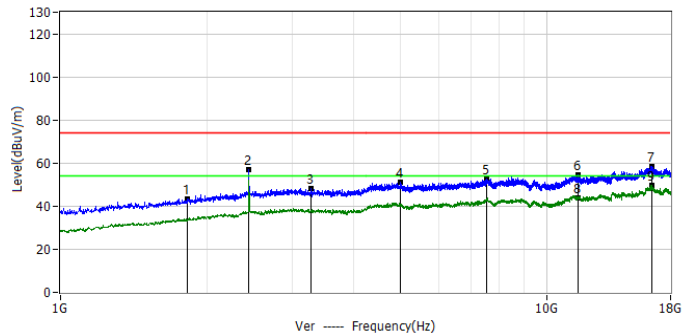


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8266GHz	60.36	-16.88	43.48	74.00	-30.52	PK	Ver
2*	2.4407GHz	67.74	-10.69	57.05	/	/	PK	Ver
3*	3.2759GHz	56.50	-8.22	48.28	74.00	-25.72	PK	Ver
4*	4.9950GHz	57.05	-6.01	51.04	74.00	-22.96	PK	Ver
5*	7.5301GHz	59.70	-7.05	52.65	74.00	-21.35	PK	Ver
6*	11.6207GHz	58.00	-3.70	54.30	74.00	-19.70	PK	Ver
7*	16.4806GHz	56.57	1.86	58.43	74.00	-15.57	PK	Ver
8*	11.6207GHz	47.30	-3.70	43.60	54.00	-10.40	AV	Ver
9*	16.4806GHz	47.74	1.86	49.60	54.00	-4.40	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 3DH5 2480	
Note: FPC	

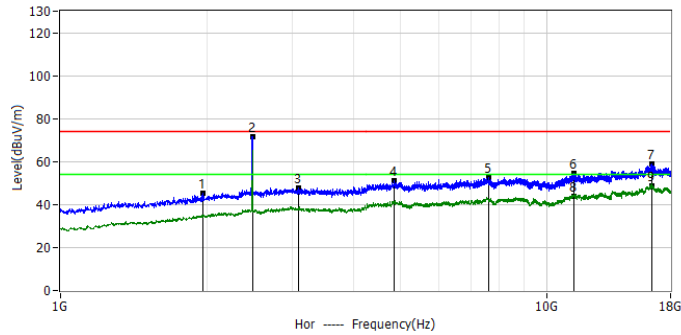


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9669GHz	60.35	-15.17	45.18	74.00	-28.82	PK	Hor
2*	2.4811GHz	82.13	-10.32	71.81	/	/	PK	Hor
3*	3.0867GHz	55.92	-8.15	47.77	74.00	-26.23	PK	Hor
4*	4.8632GHz	57.17	-5.90	51.27	74.00	-22.73	PK	Hor
5*	7.6024GHz	59.66	-7.19	52.47	74.00	-21.53	PK	Hor
6*	11.3912GHz	58.36	-3.92	54.44	74.00	-19.56	PK	Hor
7*	16.4339GHz	57.26	1.81	59.07	74.00	-14.93	PK	Hor
8*	11.3912GHz	47.82	-3.92	43.90	54.00	-10.10	AV	Hor
9*	16.4339GHz	46.89	1.81	48.70	54.00	-5.30	AV	Hor

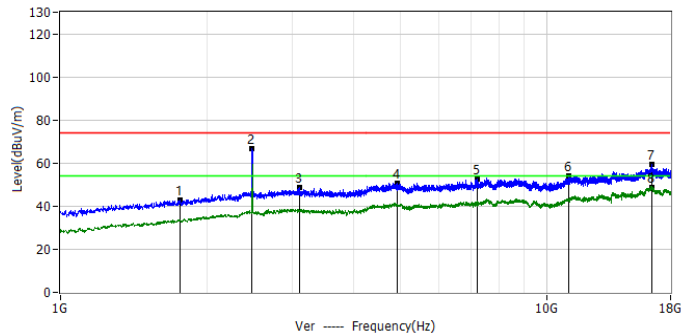


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7586GHz	60.42	-17.68	42.74	74.00	-31.26	PK	Ver
2*	2.4790GHz	77.05	-10.34	66.71	/	/	PK	Ver
3*	3.1101GHz	56.98	-8.16	48.82	74.00	-25.18	PK	Ver
4*	4.9185GHz	56.49	-5.94	50.55	74.00	-23.45	PK	Ver
5*	7.1944GHz	59.46	-7.06	52.40	74.00	-21.60	PK	Ver
6*	11.0831GHz	58.18	-4.22	53.96	74.00	-20.04	PK	Ver
7*	16.4827GHz	57.77	1.86	59.63	74.00	-14.37	PK	Ver
8*	16.4827GHz	46.74	1.86	48.60	54.00	-5.40	AV	Ver

PIFA ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: DH5 2402	
Note: PIFA	

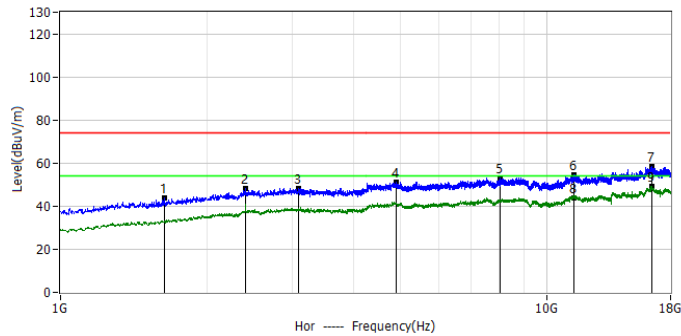


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6332GHz	62.88	-19.15	43.73	74.00	-30.27	PK	Hor
2*	2.4025GHz	59.09	-11.05	48.04	/	/	PK	Hor
3*	3.0910GHz	56.58	-8.15	48.43	74.00	-25.57	PK	Hor
4*	4.9079GHz	57.01	-5.93	51.08	74.00	-22.92	PK	Hor
5*	8.0125GHz	61.06	-7.97	53.09	74.00	-20.91	PK	Hor
6*	11.3700GHz	58.60	-3.94	54.66	74.00	-19.34	PK	Hor
7*	16.4870GHz	56.33	1.87	58.20	74.00	-15.80	PK	Hor
8*	11.3700GHz	47.94	-3.94	44.00	54.00	-10.00	AV	Hor
9*	16.4870GHz	47.23	1.87	49.10	54.00	-4.90	AV	Hor

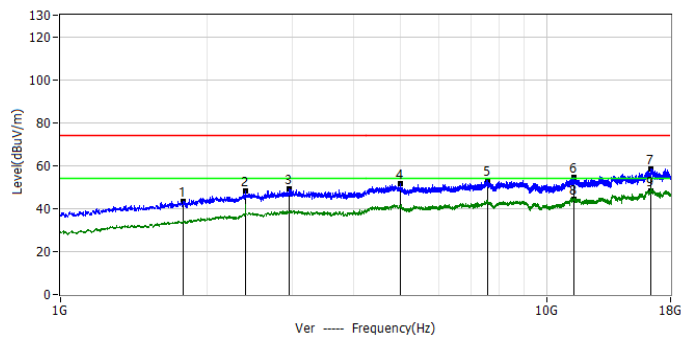


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7884GHz	60.90	-17.34	43.56	74.00	-30.44	PK	Ver
2*	2.4025GHz	59.03	-11.05	47.98	/	/	PK	Ver
3*	2.9614GHz	57.47	-8.28	49.19	74.00	-24.81	PK	Ver
4*	4.9929GHz	57.52	-6.00	51.52	74.00	-22.48	PK	Ver
5*	7.5556GHz	60.29	-7.10	53.19	74.00	-20.81	PK	Ver
6*	11.3594GHz	58.62	-3.95	54.67	74.00	-19.33	PK	Ver
7*	16.4190GHz	56.84	1.79	58.63	74.00	-15.37	PK	Ver
8*	11.3594GHz	48.25	-3.95	44.30	54.00	-9.70	AV	Ver
9*	16.4190GHz	46.61	1.79	48.40	54.00	-5.60	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: DH5 2441	
Note: PIFA	

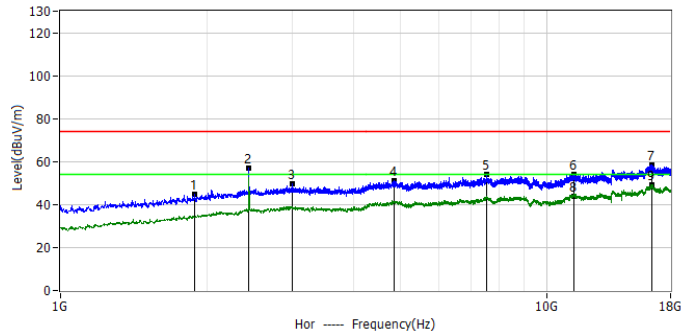


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8882GHz	60.69	-16.13	44.56	74.00	-29.44	PK	Hor
2*	2.4407GHz	67.78	-10.69	57.09	/	/	PK	Hor
3*	3.0039GHz	57.84	-8.12	49.72	74.00	-24.28	PK	Hor
4*	4.8484GHz	57.02	-5.89	51.13	74.00	-22.87	PK	Hor
5*	7.5280GHz	60.92	-7.05	53.87	74.00	-20.13	PK	Hor
6*	11.3976GHz	57.92	-3.91	54.01	74.00	-19.99	PK	Hor
7*	16.4849GHz	56.68	1.87	58.55	74.00	-15.45	PK	Hor
8*	11.3976GHz	47.71	-3.91	43.80	54.00	-10.20	AV	Hor
9*	16.4849GHz	47.23	1.87	49.10	54.00	-4.90	AV	Hor

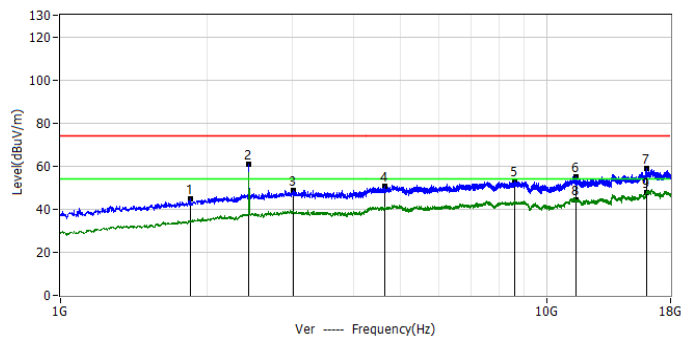


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8500GHz	61.60	-16.59	45.01	74.00	-28.99	PK	Ver
2*	2.4407GHz	71.59	-10.69	60.90	/	/	PK	Ver
3*	3.0124GHz	56.79	-8.12	48.67	74.00	-25.33	PK	Ver
4*	4.6507GHz	56.52	-5.72	50.80	74.00	-23.20	PK	Ver
5*	8.5862GHz	60.39	-7.41	52.98	74.00	-21.02	PK	Ver
6*	11.5102GHz	58.76	-3.81	54.95	74.00	-19.05	PK	Ver
7*	16.0514GHz	57.41	1.35	58.76	74.00	-15.24	PK	Ver
8*	11.5102GHz	48.21	-3.81	44.40	54.00	-9.60	AV	Ver
9*	16.0514GHz	46.15	1.35	47.50	54.00	-6.50	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: DH5 2480	
Note: PIFA	

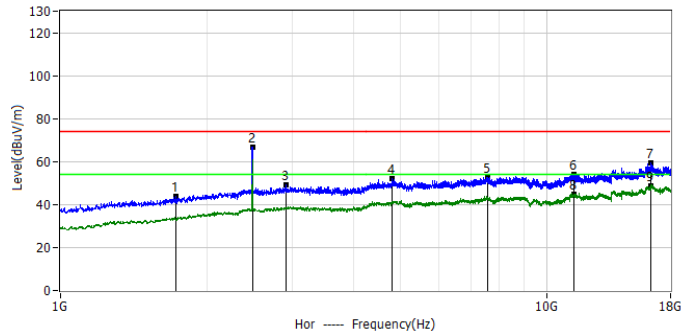


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7310GHz	61.67	-18.01	43.66	74.00	-30.34	PK	Hor
2*	2.4811GHz	77.19	-10.32	66.87	/	/	PK	Hor
3*	2.9061GHz	57.44	-8.50	48.94	74.00	-25.06	PK	Hor
4*	4.8016GHz	57.75	-5.85	51.90	74.00	-22.10	PK	Hor
5*	7.5684GHz	59.95	-7.13	52.82	74.00	-21.18	PK	Hor
6*	11.3997GHz	58.14	-3.91	54.23	74.00	-19.77	PK	Hor
7*	16.4084GHz	57.61	1.78	59.39	74.00	-14.61	PK	Hor
8*	11.3997GHz	48.91	-3.91	45.00	54.00	-9.00	AV	Hor
9*	16.4084GHz	46.82	1.78	48.60	54.00	-5.40	AV	Hor

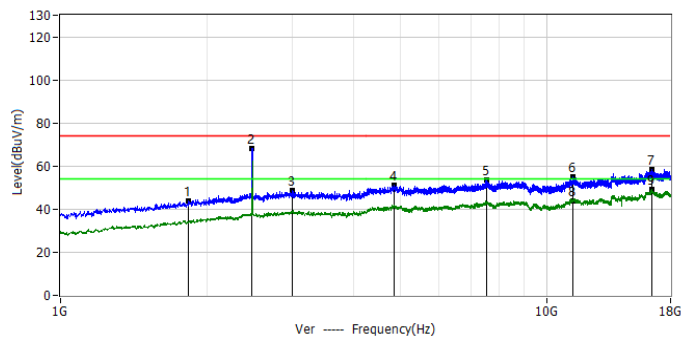


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8309GHz	60.57	-16.83	43.74	74.00	-30.26	PK	Ver
2*	2.4790GHz	78.62	-10.34	68.28	/	/	PK	Ver
3*	3.0017GHz	56.60	-8.12	48.48	74.00	-25.52	PK	Ver
4*	4.8675GHz	56.82	-5.90	50.92	74.00	-23.08	PK	Ver
5*	7.5301GHz	60.55	-7.05	53.50	74.00	-20.50	PK	Ver
6*	11.3126GHz	58.83	-4.00	54.83	74.00	-19.17	PK	Ver
7*	16.4870GHz	56.63	1.87	58.50	74.00	-15.50	PK	Ver
8*	11.3126GHz	47.60	-4.00	43.60	54.00	-10.40	AV	Ver
9*	16.4870GHz	47.33	1.87	49.20	54.00	-4.80	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 2DH5 2402	
Note: PIFA	

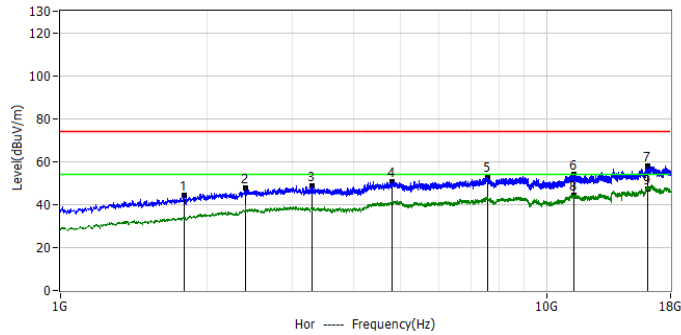


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7969GHz	61.38	-17.24	44.14	74.00	-29.86	PK	Hor
2*	2.4025GHz	58.90	-11.05	47.85	/	/	PK	Hor
3*	3.2971GHz	56.69	-8.23	48.46	74.00	-25.54	PK	Hor
4*	4.8122GHz	56.58	-5.86	50.72	74.00	-23.28	PK	Hor
5*	7.5556GHz	60.09	-7.10	52.99	74.00	-21.01	PK	Hor
6*	11.3700GHz	58.20	-3.94	54.26	74.00	-19.74	PK	Hor
7*	16.1576GHz	56.60	1.48	58.08	74.00	-15.92	PK	Hor
8*	11.3700GHz	48.14	-3.94	44.20	54.00	-9.80	AV	Hor
9*	16.1576GHz	45.82	1.48	47.30	54.00	-6.70	AV	Hor

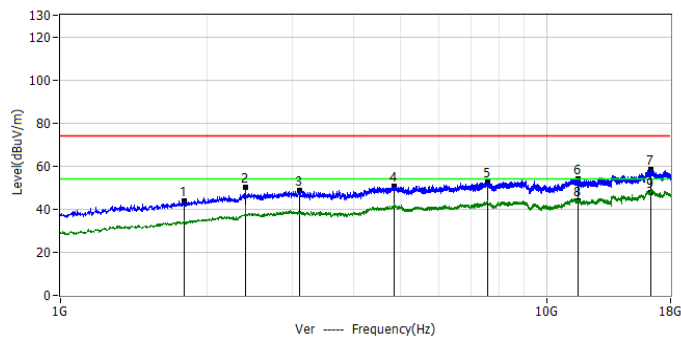


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7947GHz	61.29	-17.26	44.03	74.00	-29.97	PK	Ver
2*	2.4025GHz	61.15	-11.05	50.10	/	/	PK	Ver
3*	3.1101GHz	57.06	-8.16	48.90	74.00	-25.10	PK	Ver
4*	4.8654GHz	56.50	-5.90	50.60	74.00	-23.40	PK	Ver
5*	7.5726GHz	59.51	-7.13	52.38	74.00	-21.62	PK	Ver
6*	11.6314GHz	57.87	-3.69	54.18	74.00	-19.82	PK	Ver
7*	16.3850GHz	56.80	1.75	58.55	74.00	-15.45	PK	Ver
8*	11.6314GHz	47.39	-3.69	43.70	54.00	-10.30	AV	Ver
9*	16.3850GHz	46.05	1.75	47.80	54.00	-6.20	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 2DH5 2441	
Note: PIFA	

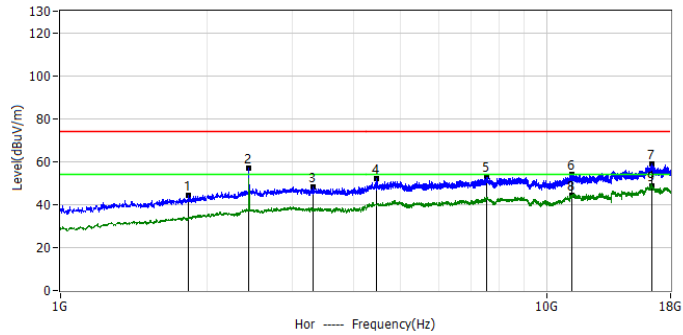


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8309GHz	61.11	-16.83	44.28	74.00	-29.72	PK	Hor
2*	2.4407GHz	67.50	-10.69	56.81	/	/	PK	Hor
3*	3.3141GHz	56.54	-8.24	48.30	74.00	-25.70	PK	Hor
4*	4.4786GHz	57.69	-5.69	52.00	74.00	-22.00	PK	Hor
5*	7.5365GHz	59.89	-7.06	52.83	74.00	-21.17	PK	Hor
6*	11.2892GHz	58.11	-4.02	54.09	74.00	-19.91	PK	Hor
7*	16.4509GHz	57.13	1.83	58.96	74.00	-15.04	PK	Hor
8*	11.2892GHz	48.22	-4.02	44.20	54.00	-9.80	AV	Hor
9*	16.4509GHz	46.77	1.83	48.60	54.00	-5.40	AV	Hor

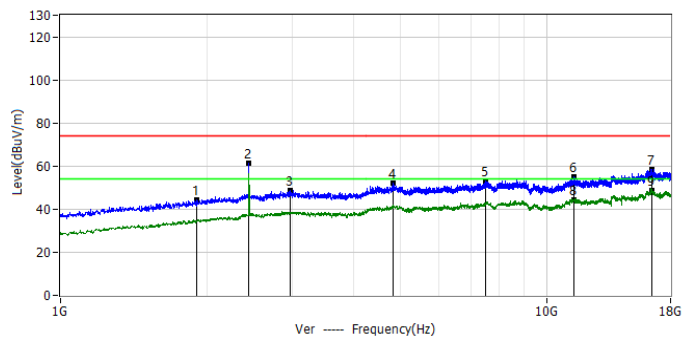


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9031GHz	60.40	-15.95	44.45	74.00	-29.55	PK	Ver
2*	2.4407GHz	71.91	-10.69	61.22	/	/	PK	Ver
3*	2.9720GHz	57.11	-8.23	48.88	74.00	-25.12	PK	Ver
4*	4.8229GHz	57.76	-5.86	51.90	74.00	-22.10	PK	Ver
5*	7.4919GHz	59.88	-6.99	52.89	74.00	-21.11	PK	Ver
6*	11.4019GHz	59.06	-3.91	55.15	74.00	-18.85	PK	Ver
7*	16.4870GHz	56.45	1.87	58.32	74.00	-15.68	PK	Ver
8*	11.4019GHz	48.11	-3.91	44.20	54.00	-9.80	AV	Ver
9*	16.4870GHz	46.83	1.87	48.70	54.00	-5.30	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 2DH5 2480	
Note: PIFA	

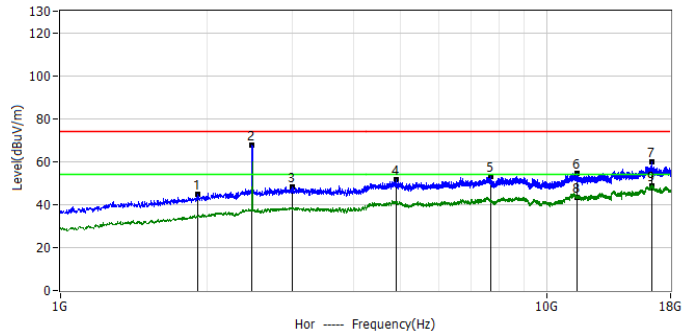


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9137GHz	60.62	-15.82	44.80	74.00	-29.20	PK	Hor
2*	2.4790GHz	78.24	-10.34	67.90	/	/	PK	Hor
3*	3.0017GHz	56.34	-8.12	48.22	74.00	-25.78	PK	Hor
4*	4.9036GHz	57.37	-5.93	51.44	74.00	-22.56	PK	Hor
5*	7.6746GHz	60.25	-7.34	52.91	74.00	-21.09	PK	Hor
6*	11.5719GHz	58.45	-3.75	54.70	74.00	-19.30	PK	Hor
7*	16.4445GHz	58.16	1.82	59.98	74.00	-14.02	PK	Hor
8*	11.5719GHz	47.05	-3.75	43.30	54.00	-10.70	AV	Hor
9*	16.4445GHz	47.08	1.82	48.90	54.00	-5.10	AV	Hor

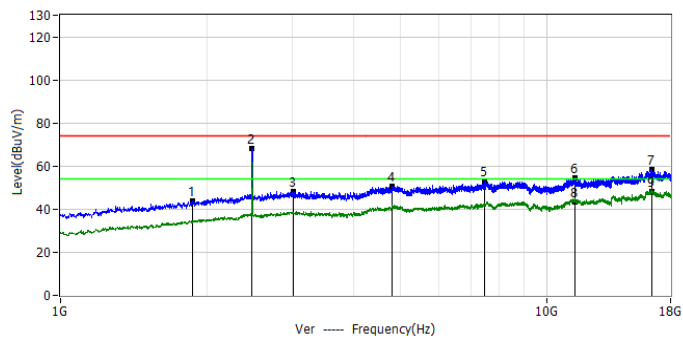


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8734GHz	60.15	-16.31	43.84	74.00	-30.16	PK	Ver
2*	2.4790GHz	78.54	-10.34	68.20	/	/	PK	Ver
3*	3.0102GHz	56.15	-8.12	48.03	74.00	-25.97	PK	Ver
4*	4.8186GHz	56.55	-5.86	50.69	74.00	-23.31	PK	Ver
5*	7.4706GHz	59.99	-7.00	52.99	74.00	-21.01	PK	Ver
6*	11.4592GHz	58.23	-3.85	54.38	74.00	-19.62	PK	Ver
7*	16.4594GHz	56.47	1.84	58.31	74.00	-15.69	PK	Ver
8*	11.4592GHz	47.35	-3.85	43.50	54.00	-10.50	AV	Ver
9*	16.4594GHz	46.46	1.84	48.30	54.00	-5.70	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 3DH5 2402	
Note: PIFA	

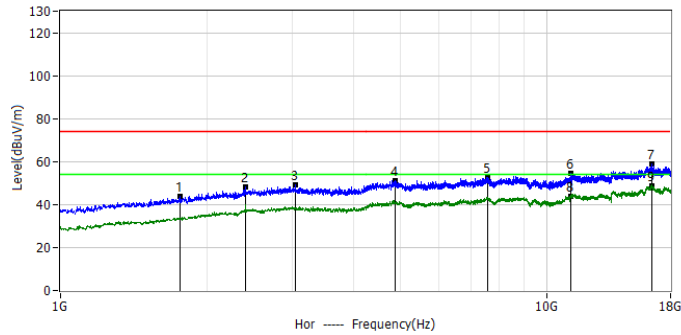


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7586GHz	61.53	-17.68	43.85	74.00	-30.15	PK	Hor
2*	2.4025GHz	59.48	-11.05	48.43	/	/	PK	Hor
3*	3.0442GHz	57.09	-8.14	48.95	74.00	-25.05	PK	Hor
4*	4.8760GHz	57.17	-5.91	51.26	74.00	-22.74	PK	Hor
5*	7.5535GHz	59.90	-7.10	52.80	74.00	-21.20	PK	Hor
6*	11.2425GHz	58.35	-4.06	54.29	74.00	-19.71	PK	Hor
7*	16.4806GHz	57.12	1.86	58.98	74.00	-15.02	PK	Hor
8*	11.2425GHz	47.96	-4.06	43.90	54.00	-10.10	AV	Hor
9*	16.4806GHz	46.74	1.86	48.60	54.00	-5.40	AV	Hor

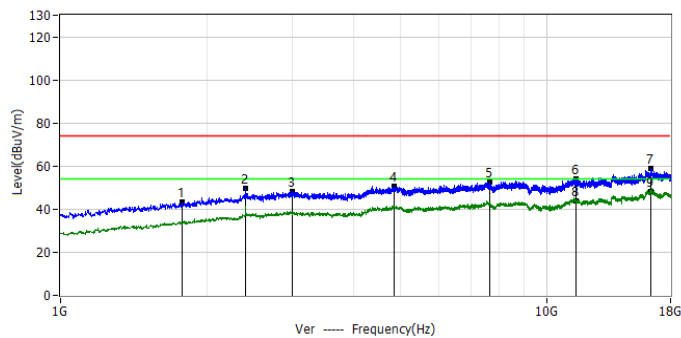


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7756GHz	60.73	-17.49	43.24	74.00	-30.76	PK	Ver
2*	2.4025GHz	60.75	-11.05	49.70	/	/	PK	Ver
3*	2.9932GHz	56.28	-8.15	48.13	74.00	-25.87	PK	Ver
4*	4.8526GHz	56.59	-5.89	50.70	74.00	-23.30	PK	Ver
5*	7.6257GHz	59.72	-7.24	52.48	74.00	-21.52	PK	Ver
6*	11.5124GHz	57.83	-3.80	54.03	74.00	-19.97	PK	Ver
7*	16.4254GHz	56.98	1.80	58.78	74.00	-15.22	PK	Ver
8*	11.5124GHz	47.40	-3.80	43.60	54.00	-10.40	AV	Ver
9*	16.4254GHz	46.50	1.80	48.30	54.00	-5.70	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 3DH5 2441	
Note: PIFA	

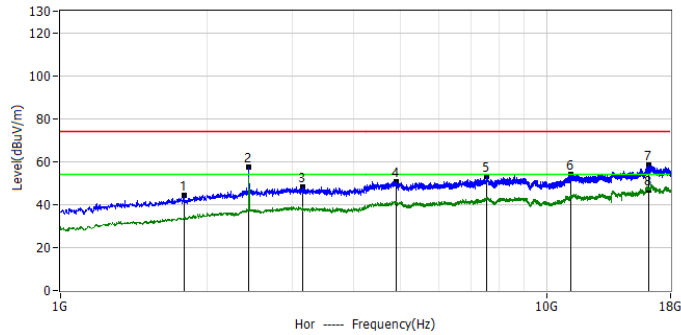


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7926GHz	61.45	-17.29	44.16	74.00	-29.84	PK	Hor
2*	2.4407GHz	67.97	-10.69	57.28	/	/	PK	Hor
3*	3.1505GHz	56.31	-8.18	48.13	74.00	-25.87	PK	Hor
4*	4.9142GHz	56.59	-5.94	50.65	74.00	-23.35	PK	Hor
5*	7.5131GHz	59.87	-7.02	52.85	74.00	-21.15	PK	Hor
6*	11.2021GHz	58.00	-4.10	53.90	74.00	-20.10	PK	Hor
7*	16.1980GHz	56.76	1.53	58.29	74.00	-15.71	PK	Hor
8*	16.1980GHz	45.37	1.53	46.90	54.00	-7.10	AV	Hor

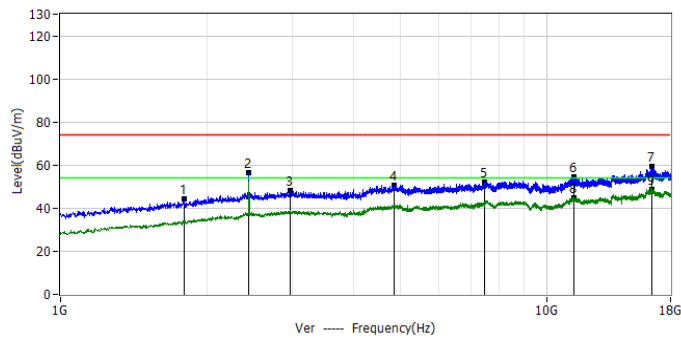


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7947GHz	61.58	-17.26	44.32	74.00	-29.68	PK	Ver
2*	2.4407GHz	67.20	-10.69	56.51	/	/	PK	Ver
3*	2.9677GHz	56.38	-8.25	48.13	74.00	-25.87	PK	Ver
4*	4.8526GHz	56.73	-5.89	50.84	74.00	-23.16	PK	Ver
5*	7.4664GHz	59.28	-7.00	52.28	74.00	-21.72	PK	Ver
6*	11.3997GHz	58.57	-3.91	54.66	74.00	-19.34	PK	Ver
7*	16.4912GHz	57.34	1.87	59.21	74.00	-14.79	PK	Ver
8*	11.3997GHz	48.81	-3.91	44.90	54.00	-9.10	AV	Ver
9*	16.4912GHz	46.83	1.87	48.70	54.00	-5.30	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-19
Test Mode: 3DH5 2480	
Note: PIFA	

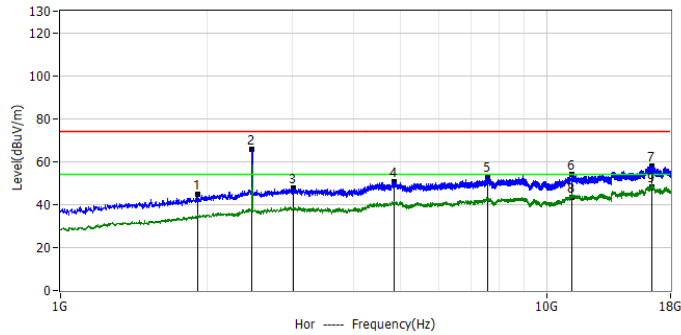


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9159GHz	60.48	-15.79	44.69	74.00	-29.31	PK	Hor
2*	2.4790GHz	76.05	-10.34	65.71	/	/	PK	Hor
3*	3.0081GHz	55.99	-8.12	47.87	74.00	-26.13	PK	Hor
4*	4.8547GHz	56.63	-5.89	50.74	74.00	-23.26	PK	Hor
5*	7.5620GHz	60.14	-7.11	53.03	74.00	-20.97	PK	Hor
6*	11.2892GHz	58.05	-4.02	54.03	74.00	-19.97	PK	Hor
7*	16.4636GHz	55.99	1.84	57.83	74.00	-16.17	PK	Hor
8*	11.2892GHz	47.52	-4.02	43.50	54.00	-10.50	AV	Hor
9*	16.4636GHz	46.36	1.84	48.20	54.00	-5.80	AV	Hor

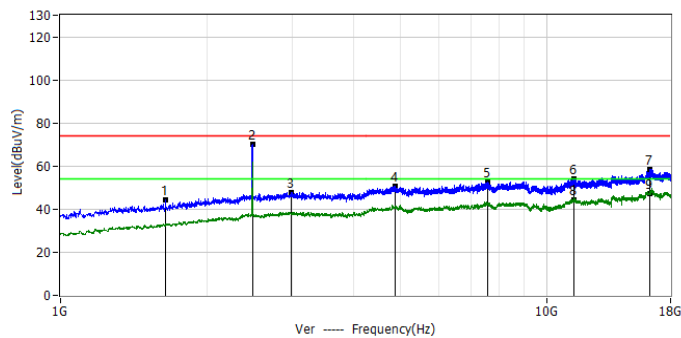


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6439GHz	63.55	-19.02	44.53	74.00	-29.47	PK	Ver
2*	2.4811GHz	80.26	-10.32	69.94	/	/	PK	Ver
3*	2.9890GHz	55.91	-8.16	47.75	74.00	-26.25	PK	Ver
4*	4.8781GHz	56.61	-5.91	50.70	74.00	-23.30	PK	Ver
5*	7.5684GHz	59.53	-7.13	52.40	74.00	-21.60	PK	Ver
6*	11.4040GHz	58.08	-3.91	54.17	74.00	-19.83	PK	Ver
7*	16.2936GHz	56.90	1.64	58.54	74.00	-15.46	PK	Ver
8*	11.4040GHz	48.11	-3.91	44.20	54.00	-9.80	AV	Ver
9*	16.2936GHz	45.66	1.64	47.30	54.00	-6.70	AV	Ver

PCB ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: DH5 2402	
Note: PCB	

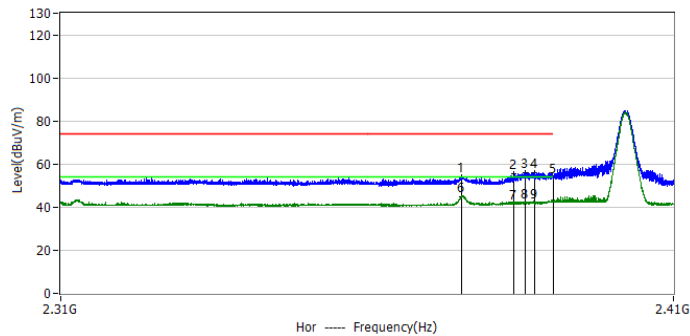


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2374.9000	18.54	35.52	54.06	74.00	-19.94	PK	Hor
2*	2383.6000	19.82	35.56	55.38	74.00	-18.62	PK	Hor
3*	2385.5000	20.48	35.57	56.05	74.00	-17.95	PK	Hor
4*	2387.0000	20.48	35.57	56.05	74.00	-17.95	PK	Hor
5*	2390.0000	17.81	35.59	53.40	74.00	-20.60	PK	Hor
6*	2374.9000	9.28	35.52	44.80	54.00	-9.20	AV	Hor
7*	2383.6000	5.94	35.56	41.50	54.00	-12.50	AV	Hor
8*	2385.5000	6.23	35.57	41.80	54.00	-12.20	AV	Hor
9*	2387.0000	6.53	35.57	42.10	54.00	-11.90	AV	Hor

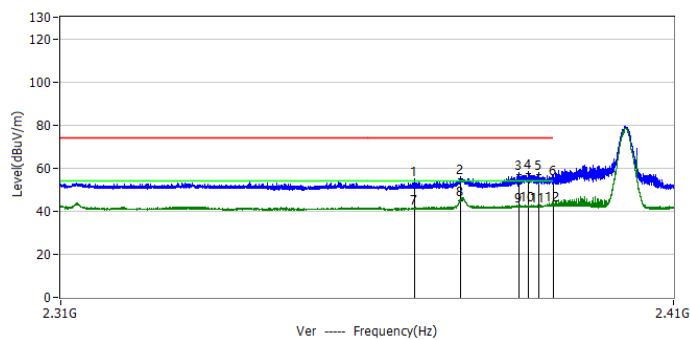


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2367.2000	18.57	35.49	54.06	74.00	-19.94	PK	Ver
2*	2374.7000	19.53	35.52	55.05	74.00	-18.95	PK	Ver
3*	2384.4000	21.48	35.56	57.04	74.00	-16.96	PK	Ver
4*	2386.0000	21.80	35.57	57.37	74.00	-16.63	PK	Ver
5*	2387.7000	21.46	35.58	57.04	74.00	-16.96	PK	Ver
6*	2390.0000	18.81	35.59	54.40	74.00	-19.60	PK	Ver
7*	2367.2000	5.31	35.49	40.80	54.00	-13.20	AV	Ver
8*	2374.7000	9.28	35.52	44.80	54.00	-9.20	AV	Ver
9*	2384.4000	6.24	35.56	41.80	54.00	-12.20	AV	Ver
10*	2386.0000	6.83	35.57	42.40	54.00	-11.60	AV	Ver
11*	2387.7000	6.22	35.58	41.80	54.00	-12.20	AV	Ver
12*	2390.0000	6.81	35.59	42.40	54.00	-11.60	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: DH5 2480	
Note: PCB	

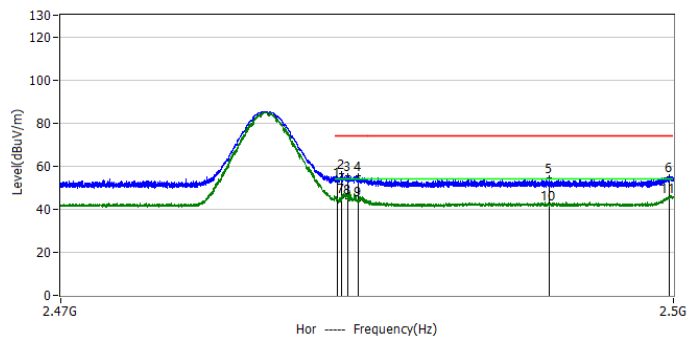


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.82	35.98	52.80	74.00	-21.20	PK	Hor
2*	2483.7000	20.35	35.99	56.34	74.00	-17.66	PK	Hor
3*	2484.0000	19.69	35.99	55.68	74.00	-18.32	PK	Hor
4*	2484.5000	19.60	35.99	55.59	74.00	-18.41	PK	Hor
5*	2493.9000	18.44	36.03	54.47	74.00	-19.53	PK	Hor
6*	2499.8000	18.97	36.05	55.02	74.00	-18.98	PK	Hor
7*	2483.7000	9.31	35.99	45.30	54.00	-8.70	AV	Hor
8*	2484.0000	9.01	35.99	45.00	54.00	-9.00	AV	Hor
9*	2484.5000	7.61	35.99	43.60	54.00	-10.40	AV	Hor
10*	2493.9000	6.07	36.03	42.10	54.00	-11.90	AV	Hor
11*	2499.8000	9.05	36.05	45.10	54.00	-8.90	AV	Hor

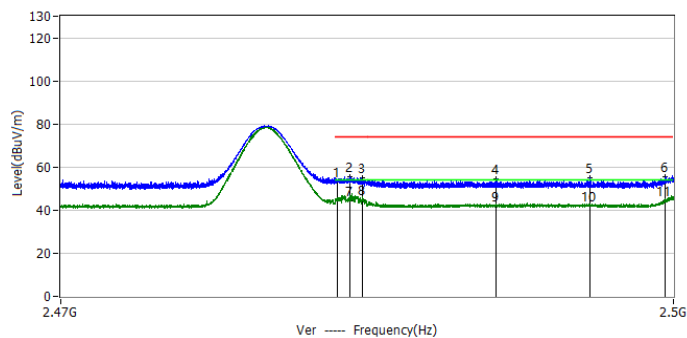


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.22	35.98	53.20	74.00	-20.80	PK	Ver
2*	2484.1000	19.42	35.99	55.41	74.00	-18.59	PK	Ver
3*	2484.7000	19.17	35.99	55.16	74.00	-18.84	PK	Ver
4*	2491.3000	18.60	36.02	54.62	74.00	-19.38	PK	Ver
5*	2495.9000	18.76	36.04	54.80	74.00	-19.20	PK	Ver
6*	2499.6000	19.58	36.05	55.63	74.00	-18.37	PK	Ver
7*	2484.1000	8.41	35.99	44.40	54.00	-9.60	AV	Ver
8*	2484.7000	9.01	35.99	45.00	54.00	-9.00	AV	Ver
9*	2491.3000	5.98	36.02	42.00	54.00	-12.00	AV	Ver
10*	2495.9000	5.86	36.04	41.90	54.00	-12.10	AV	Ver
11*	2499.6000	8.15	36.05	44.20	54.00	-9.80	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 2DH5 2402	
Note: PCB	

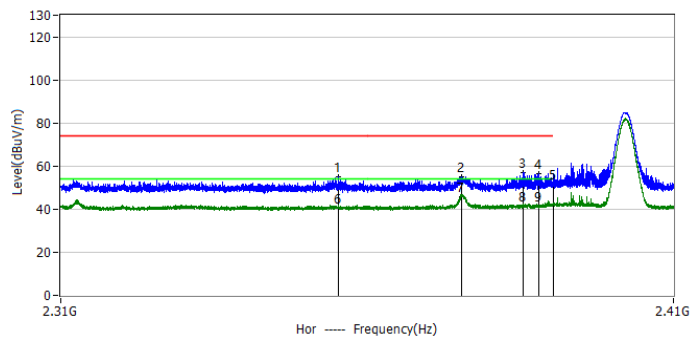


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2354.8000	19.70	35.44	55.14	74.00	-18.86	PK	Hor
2*	2375.0000	19.36	35.52	54.88	74.00	-19.12	PK	Hor
3*	2385.1000	21.61	35.57	57.18	74.00	-16.82	PK	Hor
4*	2387.7000	20.97	35.58	56.55	74.00	-17.45	PK	Hor
5*	2390.0000	15.81	35.59	51.40	74.00	-22.60	PK	Hor
6*	2354.8000	4.86	35.44	40.30	54.00	-13.70	AV	Hor
7*	2375.0000	10.48	35.52	46.00	54.00	-8.00	AV	Hor
8*	2385.1000	5.83	35.57	41.40	54.00	-12.60	AV	Hor
9*	2387.7000	5.82	35.58	41.40	54.00	-12.60	AV	Hor

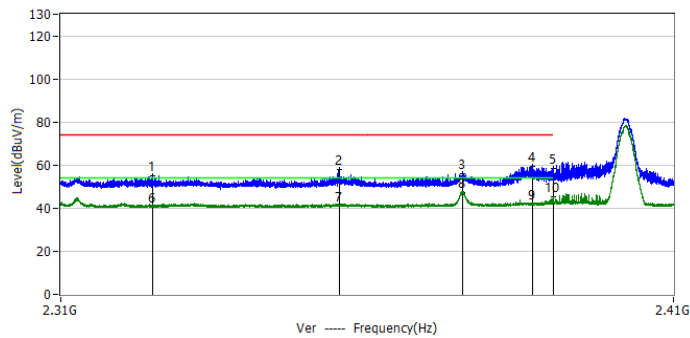


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2324.8000	19.57	35.31	54.88	74.00	-19.12	PK	Ver
2*	2354.9000	22.52	35.44	57.96	74.00	-16.04	PK	Ver
3*	2375.1000	20.39	35.52	55.91	74.00	-18.09	PK	Ver
4*	2386.6000	24.03	35.57	59.60	74.00	-14.40	PK	Ver
5*	2390.0000	22.81	35.59	58.40	74.00	-15.60	PK	Ver
6*	2324.8000	5.29	35.31	40.60	54.00	-13.40	AV	Ver
7*	2354.9000	5.46	35.44	40.90	54.00	-13.10	AV	Ver
8*	2375.1000	11.58	35.52	47.10	54.00	-6.90	AV	Ver
9*	2386.6000	6.13	35.57	41.70	54.00	-12.30	AV	Ver
10*	2390.0000	9.61	35.59	45.20	54.00	-8.80	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 2DH5 2480	
Note: PCB	

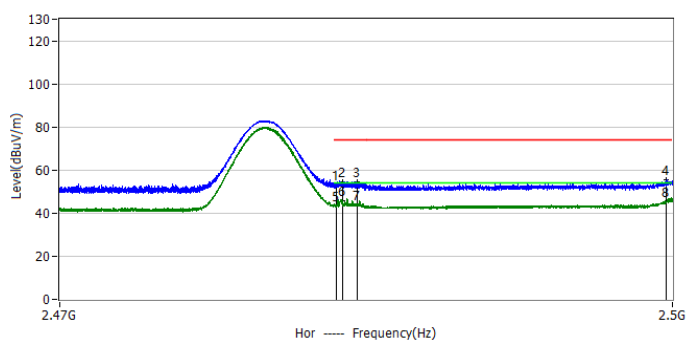


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.02	35.98	53.00	74.00	-21.00	PK	Hor
2*	2483.8000	18.73	35.99	54.72	74.00	-19.28	PK	Hor
3*	2484.5000	18.40	35.99	54.39	74.00	-19.61	PK	Hor
4*	2499.7000	19.33	36.05	55.38	74.00	-18.62	PK	Hor
5*	2483.5000	7.32	35.98	43.30	54.00	-10.70	AV	Hor
6*	2483.8000	9.81	35.99	45.80	54.00	-8.20	AV	Hor
7*	2484.5000	7.61	35.99	43.60	54.00	-10.40	AV	Hor
8*	2499.7000	9.35	36.05	45.40	54.00	-8.60	AV	Hor

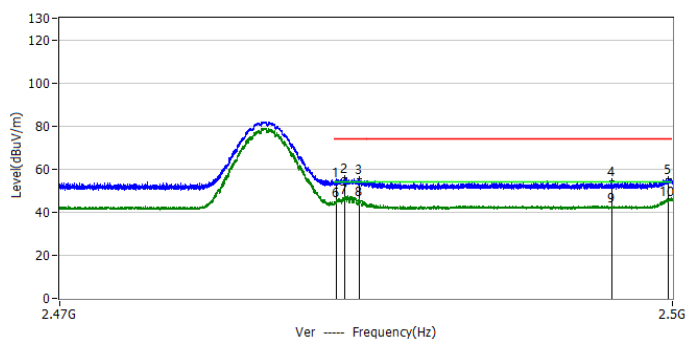


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	18.22	35.98	54.20	74.00	-19.80	PK	Ver
2*	2483.9000	19.77	35.99	55.76	74.00	-18.20	PK	Ver
3*	2484.6000	19.38	35.99	55.37	74.00	-18.63	PK	Ver
4*	2497.0000	18.42	36.04	54.46	74.00	-19.54	PK	Ver
5*	2499.8000	19.24	36.05	55.29	74.00	-18.71	PK	Ver
6*	2483.5000	8.72	35.98	44.70	54.00	-9.30	AV	Ver
7*	2483.9000	10.21	35.99	46.20	54.00	-7.80	AV	Ver
8*	2484.6000	9.31	35.99	45.30	54.00	-8.70	AV	Ver
9*	2497.0000	6.16	36.04	42.20	54.00	-11.80	AV	Ver
10*	2499.8000	9.05	36.05	45.10	54.00	-8.90	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 3DH5 2402	
Note: PCB	

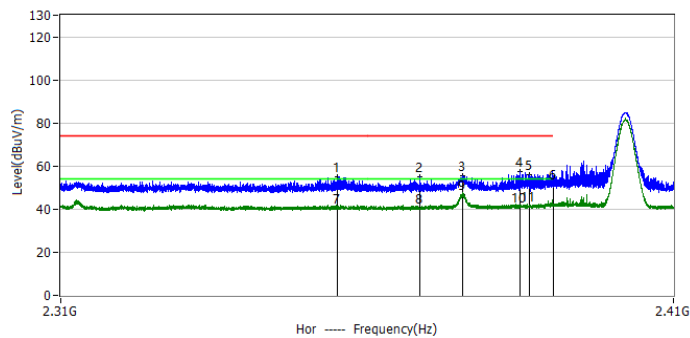


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2354.7000	19.64	35.44	55.08	74.00	-18.92	PK	Hor
2*	2368.1000	19.61	35.49	55.10	74.00	-18.90	PK	Hor
3*	2375.1000	19.96	35.52	55.48	74.00	-18.52	PK	Hor
4*	2384.6000	21.66	35.56	57.22	74.00	-16.78	PK	Hor
5*	2386.1000	20.47	35.57	56.04	74.00	-17.96	PK	Hor
6*	2390.0000	16.11	35.59	51.70	74.00	-22.30	PK	Hor
7*	2354.7000	5.16	35.44	40.60	54.00	-13.40	AV	Hor
8*	2368.1000	4.91	35.49	40.40	54.00	-13.60	AV	Hor
9*	2375.1000	10.98	35.52	46.50	54.00	-7.50	AV	Hor
10*	2384.6000	5.24	35.56	40.80	54.00	-13.20	AV	Hor
11*	2386.1000	5.93	35.57	41.50	54.00	-12.50	AV	Hor

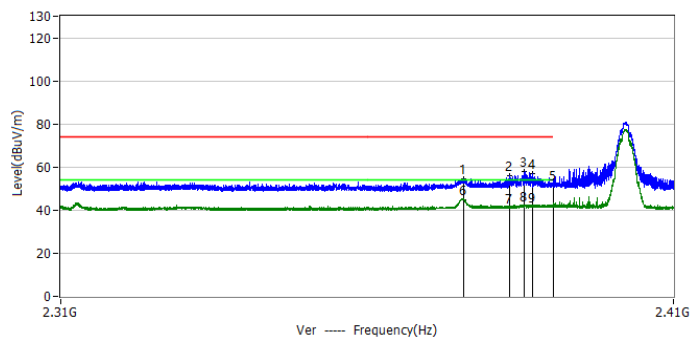


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2375.3000	19.19	35.53	54.72	74.00	-19.28	PK	Ver
2*	2382.9000	20.49	35.56	56.05	74.00	-17.95	PK	Ver
3*	2385.3000	22.13	35.57	57.70	74.00	-16.30	PK	Ver
4*	2386.6000	21.47	35.57	57.04	74.00	-16.96	PK	Ver
5*	2390.0000	16.11	35.59	51.70	74.00	-22.30	PK	Ver
6*	2375.3000	9.27	35.53	44.80	54.00	-9.20	AV	Ver
7*	2382.9000	5.54	35.56	41.10	54.00	-12.90	AV	Ver
8*	2385.3000	6.23	35.57	41.80	54.00	-12.20	AV	Ver
9*	2386.6000	5.93	35.57	41.50	54.00	-12.50	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 3DH5 2480	
Note: PCB	

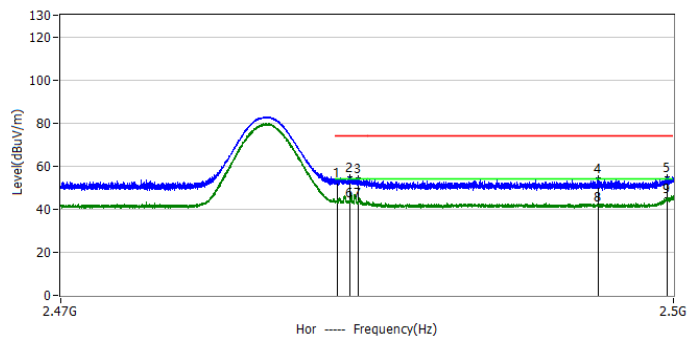


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.42	35.98	52.40	74.00	-21.60	PK	Hor
2*	2484.1000	19.04	35.99	55.03	74.00	-19.00	PK	Hor
3*	2484.5000	18.50	35.99	54.49	74.00	-19.51	PK	Hor
4*	2496.3000	18.61	36.04	54.65	74.00	-19.35	PK	Hor
5*	2499.7000	18.89	36.05	54.94	74.00	-19.06	PK	Hor
6*	2484.1000	7.41	35.99	43.40	54.00	-10.60	AV	Hor
7*	2484.5000	7.21	35.99	43.20	54.00	-10.80	AV	Hor
8*	2496.3000	5.56	36.04	41.60	54.00	-12.40	AV	Hor
9*	2499.7000	9.05	36.05	45.10	54.00	-8.90	AV	Hor

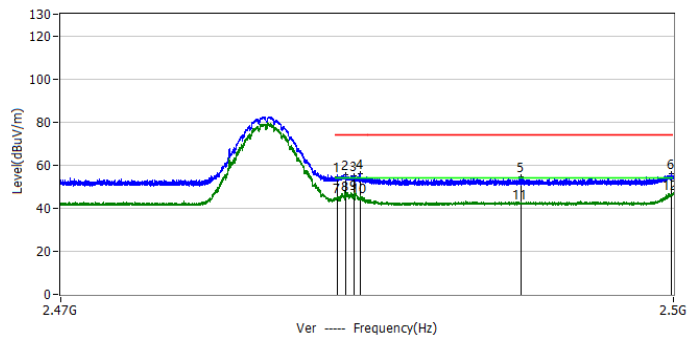


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	18.62	35.98	54.60	74.00	-19.40	PK	Ver
2*	2483.9000	19.43	35.99	55.42	74.00	-18.58	PK	Ver
3*	2484.3000	19.17	35.99	55.16	74.00	-18.84	PK	Ver
4*	2484.6000	20.09	35.99	56.08	74.00	-17.90	PK	Ver
5*	2492.5000	18.49	36.02	54.51	74.00	-19.49	PK	Ver
6*	2499.9000	19.80	36.05	55.85	74.00	-18.15	PK	Ver
7*	2483.5000	9.02	35.98	45.00	54.00	-9.00	AV	Ver
8*	2483.9000	10.01	35.99	46.00	54.00	-8.00	AV	Ver
9*	2484.3000	10.11	35.99	46.10	54.00	-7.90	AV	Ver
10*	2484.6000	8.91	35.99	44.90	54.00	-9.10	AV	Ver
11*	2492.5000	6.08	36.02	42.10	54.00	-11.90	AV	Ver
12*	2499.9000	10.25	36.05	46.30	54.00	-7.70	AV	Ver

FPC ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: DH5 2402	
Note: FPC	

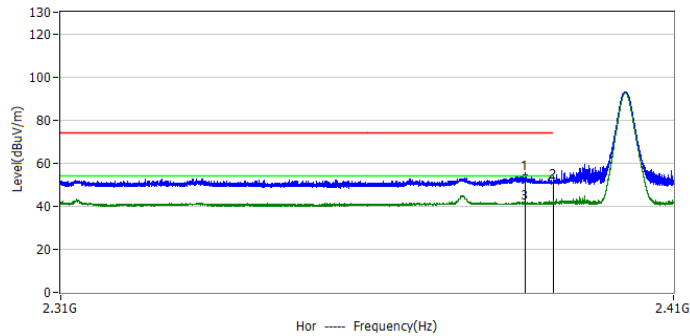


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2385.5000	18.82	35.57	54.39	74.00	-19.61	PK	Hor
2*	2390.0000	15.11	35.59	50.70	74.00	-23.30	PK	Hor
3*	2385.5000	5.53	35.57	41.10	54.00	-12.90	AV	Hor

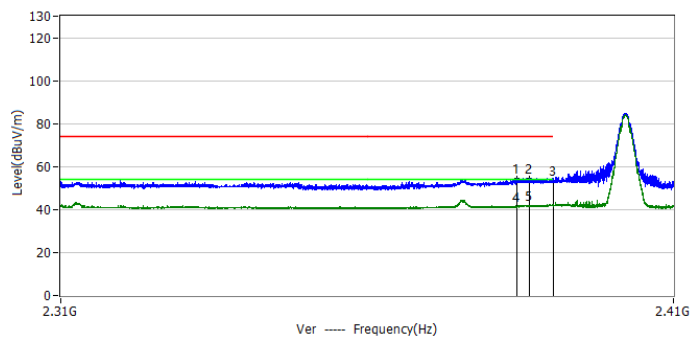


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2384.0000	18.83	35.56	54.39	74.00	-19.61	PK	Ver
2*	2386.1000	18.82	35.57	54.39	74.00	-19.61	PK	Ver
3*	2390.0000	18.11	35.59	53.70	74.00	-20.30	PK	Ver
4*	2384.0000	5.94	35.56	41.50	54.00	-12.50	AV	Ver
5*	2386.1000	6.23	35.57	41.80	54.00	-12.20	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: DH5 2480	
Note: FPC	

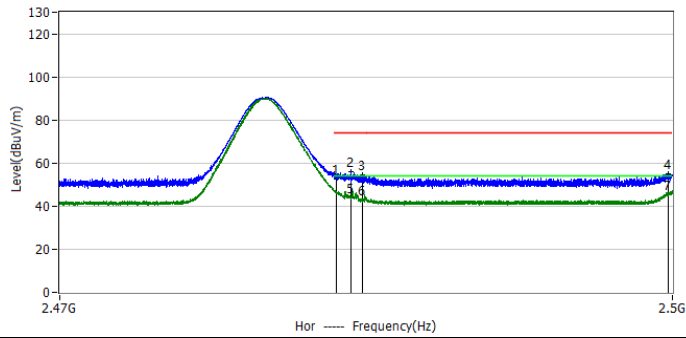


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.52	35.98	52.50	74.00	-21.50	PK	Hor
2*	2484.2000	20.03	35.99	56.02	74.00	-17.98	PK	Hor
3*	2484.8000	18.36	35.99	54.35	74.00	-19.65	PK	Hor
4*	2499.8000	18.95	36.05	55.00	74.00	-19.00	PK	Hor
5*	2484.2000	7.71	35.99	43.70	54.00	-10.30	AV	Hor
6*	2484.8000	6.71	35.99	42.70	54.00	-11.30	AV	Hor
7*	2499.8000	9.15	36.05	45.20	54.00	-8.80	AV	Hor

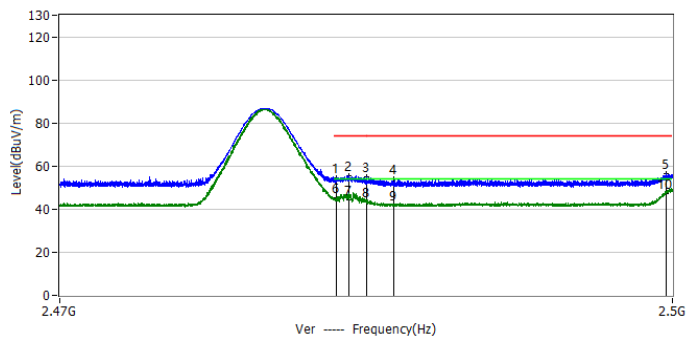


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	18.42	35.98	54.40	74.00	-19.60	PK	Ver
2*	2484.1000	19.75	35.99	55.74	74.00	-18.26	PK	Ver
3*	2485.0000	18.98	35.99	54.97	74.00	-19.03	PK	Ver
4*	2486.3000	18.22	36.00	54.22	74.00	-19.78	PK	Ver
5*	2499.7000	20.48	36.05	56.53	74.00	-17.47	PK	Ver
6*	2483.5000	9.32	35.98	45.30	54.00	-8.70	AV	Ver
7*	2484.1000	8.31	35.99	44.30	54.00	-9.70	AV	Ver
8*	2485.0000	7.51	35.99	43.50	54.00	-10.50	AV	Ver
9*	2486.3000	5.70	36.00	41.70	54.00	-12.30	AV	Ver
10*	2499.7000	11.25	36.05	47.30	54.00	-6.70	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 2DH5 2402	
Note: FPC	

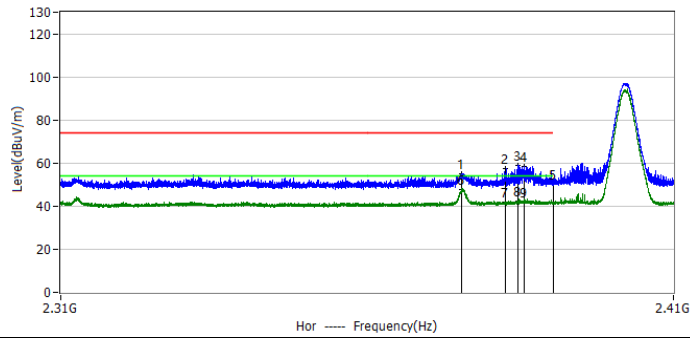


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2375.0000	19.46	35.52	54.98	74.00	-19.02	PK	Hor
2*	2382.2000	21.96	35.55	57.51	74.00	-16.49	PK	Hor
3*	2384.2000	23.19	35.56	58.75	74.00	-15.20	PK	Hor
4*	2385.2000	22.73	35.57	58.30	74.00	-15.70	PK	Hor
5*	2390.0000	14.61	35.59	50.20	74.00	-23.80	PK	Hor
6*	2375.0000	12.38	35.52	47.90	54.00	-6.10	AV	Hor
7*	2382.2000	6.25	35.55	41.80	54.00	-12.20	AV	Hor
8*	2384.2000	6.84	35.56	42.40	54.00	-11.60	AV	Hor
9*	2385.2000	6.23	35.57	41.80	54.00	-12.20	AV	Hor

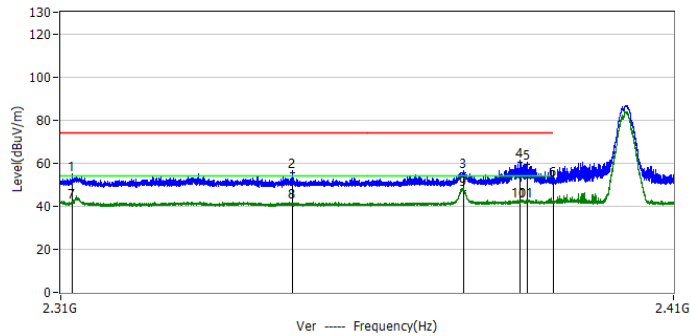


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2311.8000	18.77	35.26	54.03	74.00	-19.97	PK	Ver
2*	2347.3000	20.29	35.41	55.70	74.00	-18.30	PK	Ver
3*	2375.3000	20.06	35.52	55.58	74.00	-18.42	PK	Ver
4*	2384.6000	24.83	35.56	60.39	74.00	-13.61	PK	Ver
5*	2385.8000	23.60	35.57	59.17	74.00	-14.83	PK	Ver
6*	2390.0000	15.81	35.59	51.40	74.00	-22.60	PK	Ver
7*	2311.8000	6.34	35.26	41.60	54.00	-12.40	AV	Ver
8*	2347.3000	5.79	35.41	41.20	54.00	-12.80	AV	Ver
9*	2375.3000	11.67	35.53	47.20	54.00	-6.80	AV	Ver
10*	2384.6000	6.34	35.56	41.90	54.00	-12.10	AV	Ver
11*	2385.8000	6.53	35.57	42.10	54.00	-11.90	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 2DH5 2480	
Note: FPC	

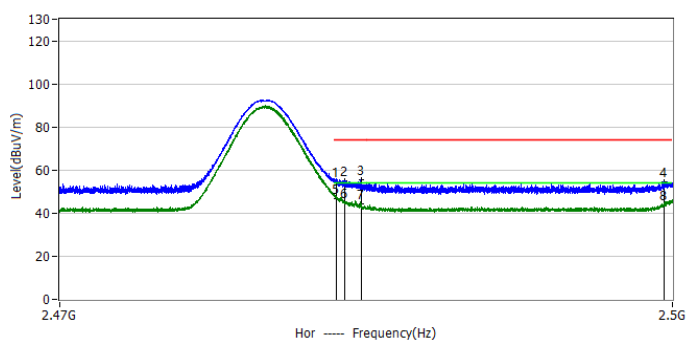


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	18.62	35.98	54.60	74.00	-19.40	PK	Hor
2*	2483.9000	19.23	35.99	55.22	74.00	-18.78	PK	Hor
3*	2484.7000	19.46	35.99	55.45	74.00	-18.50	PK	Hor
4*	2499.6000	18.39	36.05	54.44	74.00	-19.56	PK	Hor
5*	2483.5000	10.82	35.98	46.80	54.00	-7.20	AV	Hor
6*	2483.9000	9.01	35.99	45.00	54.00	-9.00	AV	Hor
7*	2484.7000	8.21	35.99	44.20	54.00	-9.80	AV	Hor
8*	2499.6000	7.75	36.05	43.80	54.00	-10.20	AV	Hor

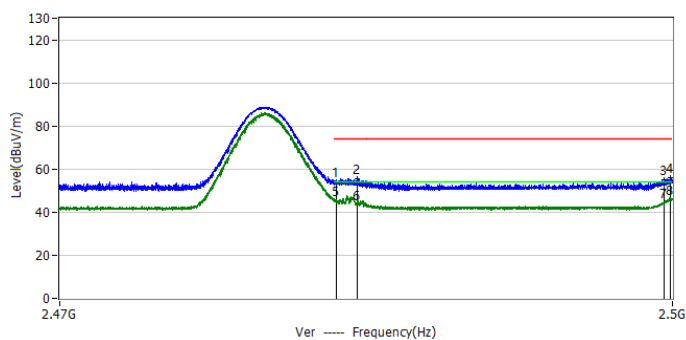


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	18.12	35.98	54.10	74.00	-19.90	PK	Ver
2*	2484.5000	19.71	35.99	55.70	74.00	-18.30	PK	Ver
3*	2499.6000	19.01	36.05	55.06	74.00	-18.94	PK	Ver
4*	2499.9000	19.84	36.05	55.89	74.00	-18.11	PK	Ver
5*	2483.5000	9.22	35.98	45.20	54.00	-8.80	AV	Ver
6*	2484.5000	7.41	35.99	43.40	54.00	-10.60	AV	Ver
7*	2499.6000	8.05	36.05	44.10	54.00	-9.90	AV	Ver
8*	2499.9000	9.65	36.05	45.70	54.00	-8.30	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 3DH5 2402	
Note: FPC	

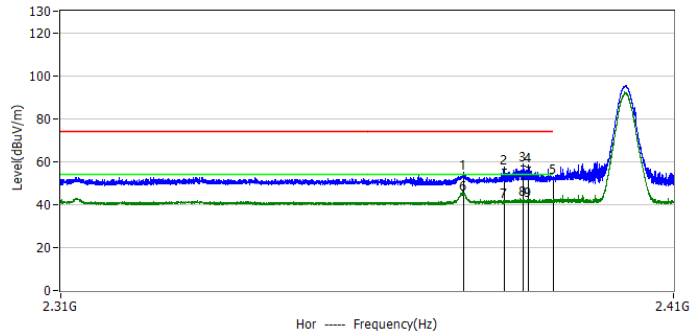

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2375.3000	18.53	35.53	54.06	74.00	-19.94	PK	Hor
2*	2381.9000	20.83	35.55	56.38	74.00	-17.62	PK	Hor
3*	2385.1000	22.13	35.57	57.70	74.00	-16.30	PK	Hor
4*	2386.0000	21.80	35.57	57.37	74.00	-16.63	PK	Hor
5*	2390.0000	16.51	35.59	52.10	74.00	-21.90	PK	Hor
6*	2375.3000	8.87	35.53	44.40	54.00	-9.60	AV	Hor
7*	2381.9000	5.25	35.55	40.80	54.00	-13.20	AV	Hor
8*	2385.1000	6.23	35.57	41.80	54.00	-12.20	AV	Hor
9*	2386.0000	5.93	35.57	41.50	54.00	-12.50	AV	Hor

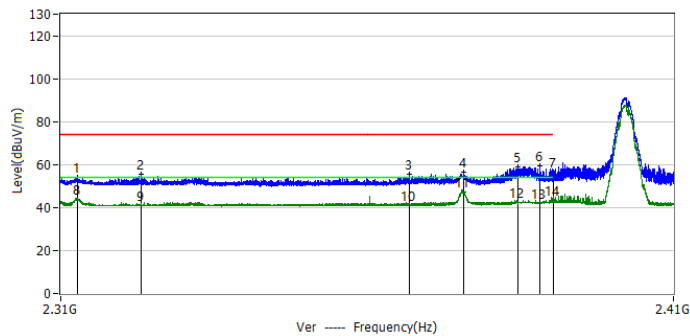


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2312.7000	18.80	35.26	54.06	74.00	-19.94	PK	Ver
2*	2322.9000	20.08	35.30	55.38	74.00	-18.62	PK	Ver
3*	2366.3000	19.89	35.49	55.38	74.00	-18.62	PK	Ver
4*	2375.2000	20.86	35.52	56.38	74.00	-17.62	PK	Ver
5*	2384.3000	23.47	35.56	59.03	74.00	-14.97	PK	Ver
6*	2387.9000	23.78	35.58	59.36	74.00	-14.64	PK	Ver
7*	2390.0000	20.81	35.59	56.40	74.00	-17.60	PK	Ver
8*	2312.7000	8.54	35.26	43.80	54.00	-10.20	AV	Ver
9*	2322.9000	5.80	35.30	41.10	54.00	-12.90	AV	Ver
10*	2366.3000	5.61	35.49	41.10	54.00	-12.90	AV	Ver
11*	2375.2000	11.88	35.52	47.40	54.00	-6.60	AV	Ver
12*	2384.3000	6.84	35.56	42.40	54.00	-11.60	AV	Ver
13*	2387.9000	6.52	35.58	42.10	54.00	-11.90	AV	Ver
14*	2390.0000	7.81	35.59	43.40	54.00	-10.60	AV	Ver


Prüfbericht - Produkte

Test Report - Products

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 3DH5 2480	
Note: FPC	

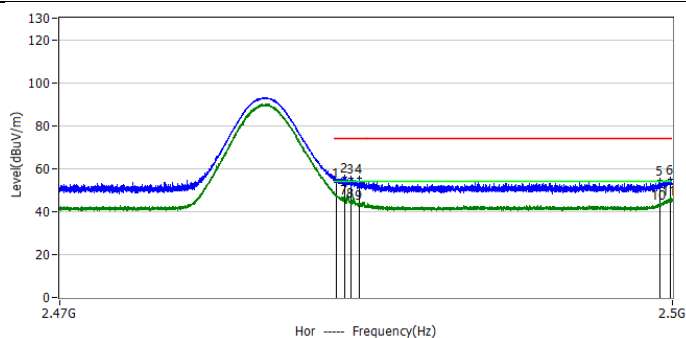


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.72	35.98	53.70	74.00	-20.30	PK	Hor
2*	2483.9000	19.80	35.99	55.79	74.00	-18.20	PK	Hor
3*	2484.2000	19.48	35.99	55.47	74.00	-18.53	PK	Hor
4*	2484.6000	19.63	35.99	55.62	74.00	-18.38	PK	Hor
5*	2499.4000	18.32	36.05	54.37	74.00	-19.63	PK	Hor
6*	2499.9000	18.80	36.05	54.85	74.00	-19.15	PK	Hor
7*	2483.9000	9.91	35.99	45.90	54.00	-8.10	AV	Hor
8*	2484.2000	8.31	35.99	44.30	54.00	-9.70	AV	Hor
9*	2484.6000	7.21	35.99	43.20	54.00	-10.80	AV	Hor
10*	2499.4000	7.45	36.05	43.50	54.00	-10.50	AV	Hor
11*	2499.9000	9.05	36.05	45.10	54.00	-8.90	AV	Hor

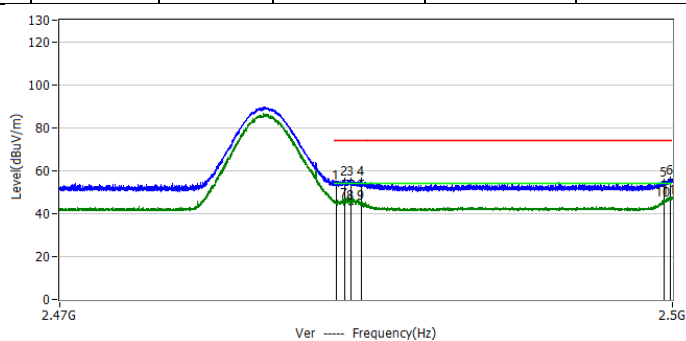


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.62	35.98	53.60	74.00	-20.40	PK	Ver
2*	2483.9000	19.73	35.99	55.72	74.00	-18.28	PK	Ver
3*	2484.2000	19.63	35.99	55.62	74.00	-18.38	PK	Ver
4*	2484.7000	19.65	35.99	55.64	74.00	-18.40	PK	Ver
5*	2499.6000	18.88	36.05	54.93	74.00	-19.07	PK	Ver
6*	2499.9000	20.08	36.05	56.13	74.00	-17.87	PK	Ver
7*	2483.9000	9.21	35.99	45.20	54.00	-8.80	AV	Ver
8*	2484.2000	8.51	35.99	44.50	54.00	-9.50	AV	Ver
9*	2484.7000	8.51	35.99	44.50	54.00	-9.50	AV	Ver
10*	2499.6000	9.85	36.05	45.90	54.00	-8.10	AV	Ver
11*	2499.9000	10.65	36.05	46.70	54.00	-7.30	AV	Ver

PIFA ANT

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: DH5 2402	
Note: PIFA	

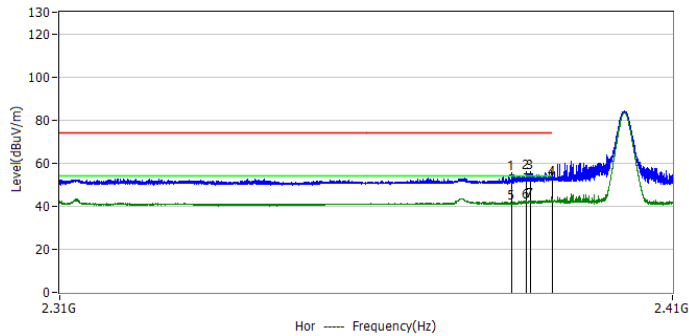


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2383.4000	19.16	35.56	54.72	74.00	-19.28	PK	Hor
2*	2385.7000	19.48	35.57	55.05	74.00	-18.95	PK	Hor
3*	2386.4000	19.48	35.57	55.05	74.00	-18.95	PK	Hor
4*	2390.0000	16.51	35.59	52.10	74.00	-21.90	PK	Hor
5*	2383.4000	5.54	35.56	41.10	54.00	-12.90	AV	Hor
6*	2385.7000	5.93	35.57	41.50	54.00	-12.50	AV	Hor
7*	2386.4000	6.53	35.57	42.10	54.00	-11.90	AV	Hor

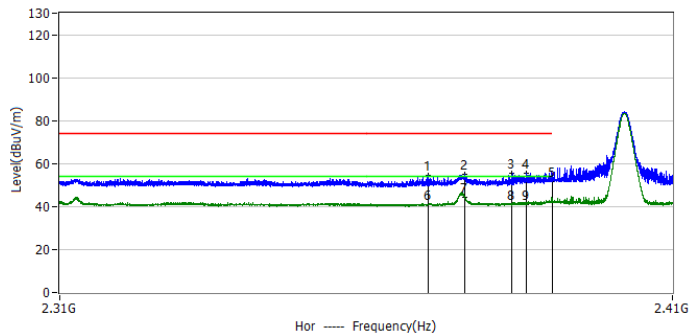


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2369.7000	18.89	35.50	54.39	74.00	-19.61	PK	Hor
2*	2375.6000	19.52	35.53	55.05	74.00	-18.95	PK	Hor
3*	2383.4000	20.15	35.56	55.71	74.00	-18.29	PK	Hor
4*	2385.7000	19.81	35.57	55.38	74.00	-18.62	PK	Hor
5*	2390.0000	16.11	35.59	51.70	74.00	-22.30	PK	Hor
6*	2369.7000	5.60	35.50	41.10	54.00	-12.90	AV	Hor
7*	2375.6000	8.57	35.53	44.10	54.00	-9.90	AV	Hor
8*	2383.4000	5.24	35.56	40.80	54.00	-13.20	AV	Hor
9*	2385.7000	5.53	35.57	41.10	54.00	-12.90	AV	Hor

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: DH5 2480	
Note: PIFA	

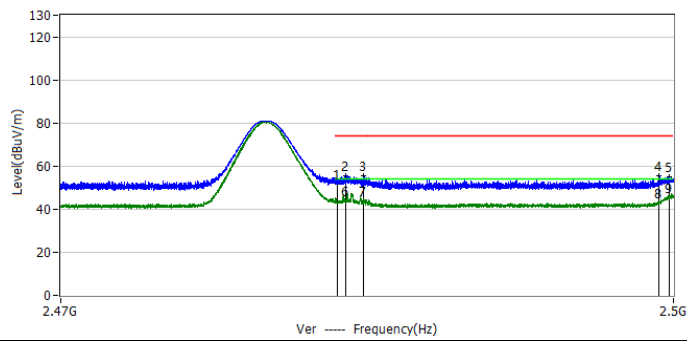


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	15.82	35.98	51.80	74.00	-22.20	PK	Ver
2*	2483.9000	19.74	35.99	55.73	74.00	-18.27	PK	Ver
3*	2484.8000	19.30	35.99	55.29	74.00	-18.71	PK	Ver
4*	2499.3000	19.64	36.05	55.69	74.00	-18.31	PK	Ver
5*	2499.8000	18.82	36.05	54.87	74.00	-19.13	PK	Ver
6*	2483.9000	8.01	35.99	44.00	54.00	-10.00	AV	Ver
7*	2484.8000	7.91	35.99	43.90	54.00	-10.10	AV	Ver
8*	2499.3000	6.85	36.05	42.90	54.00	-11.10	AV	Ver
9*	2499.8000	9.45	36.05	45.50	54.00	-8.50	AV	Ver

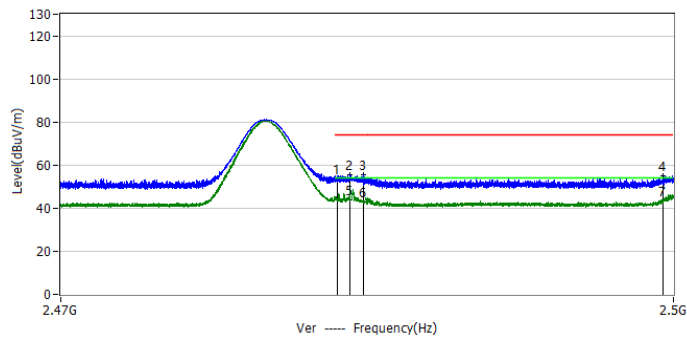


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.72	35.98	53.70	74.00	-20.30	PK	Ver
2*	2484.1000	19.30	35.99	55.29	74.00	-18.71	PK	Ver
3*	2484.8000	19.30	35.99	55.29	74.00	-18.71	PK	Ver
4*	2499.5000	18.84	36.05	54.89	74.00	-19.11	PK	Ver
5*	2484.1000	8.01	35.99	44.00	54.00	-10.00	AV	Ver
6*	2484.8000	7.01	35.99	43.00	54.00	-11.00	AV	Ver
7*	2499.5000	7.25	36.05	43.30	54.00	-10.70	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 2DH5 2402	
Note: PIFA	

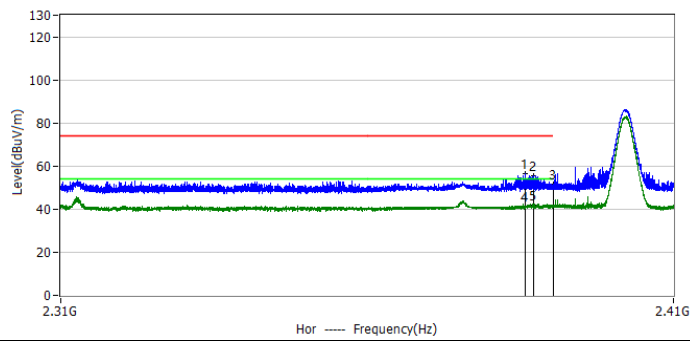


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2385.4000	20.81	35.57	56.38	74.00	-17.62	PK	Hor
2*	2386.8000	19.81	35.57	55.38	74.00	-18.62	PK	Hor
3*	2390.0000	16.11	35.59	51.70	74.00	-22.30	PK	Hor
4*	2385.4000	5.93	35.57	41.50	54.00	-12.50	AV	Hor
5*	2386.8000	6.53	35.57	42.10	54.00	-11.90	AV	Hor

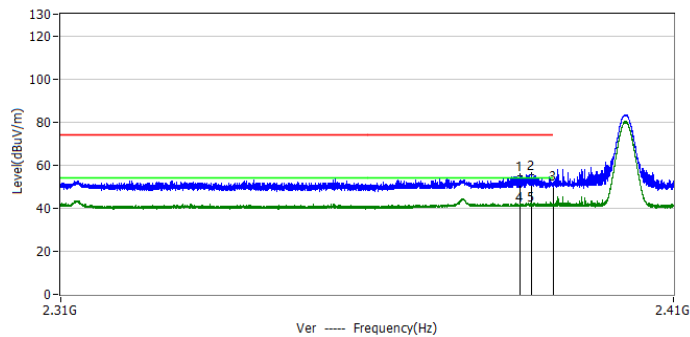


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2384.6000	19.49	35.56	55.05	74.00	-18.95	PK	Ver
2*	2386.4000	20.14	35.57	55.71	74.00	-18.29	PK	Ver
3*	2390.0000	15.11	35.59	50.70	74.00	-23.30	PK	Ver
4*	2384.6000	5.54	35.56	41.10	54.00	-12.90	AV	Ver
5*	2386.4000	5.53	35.57	41.10	54.00	-12.90	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 2DH5 2480	
Note: PIFA	

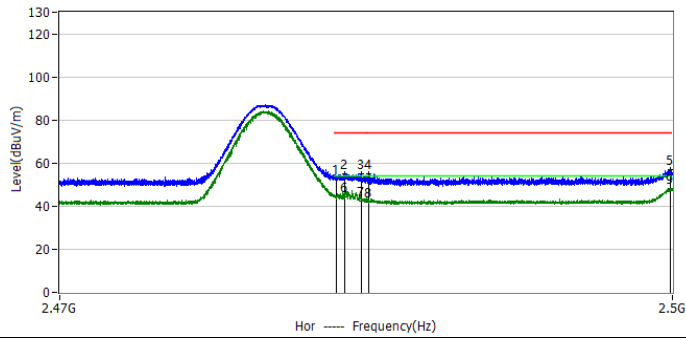


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.72	35.98	52.70	74.00	-21.30	PK	Hor
2*	2483.9000	19.07	35.99	55.06	74.00	-18.94	PK	Hor
3*	2484.7000	19.03	35.99	55.02	74.00	-18.98	PK	Hor
4*	2485.1000	19.10	35.99	55.09	74.00	-18.90	PK	Hor
5*	2499.9000	20.83	36.05	56.88	74.00	-17.12	PK	Hor
6*	2483.9000	8.21	35.99	44.20	54.00	-9.80	AV	Hor
7*	2484.7000	6.51	35.99	42.50	54.00	-11.50	AV	Hor
8*	2485.1000	6.11	35.99	42.10	54.00	-11.90	AV	Hor
9*	2499.9000	12.05	36.05	48.10	54.00	-5.90	AV	Hor

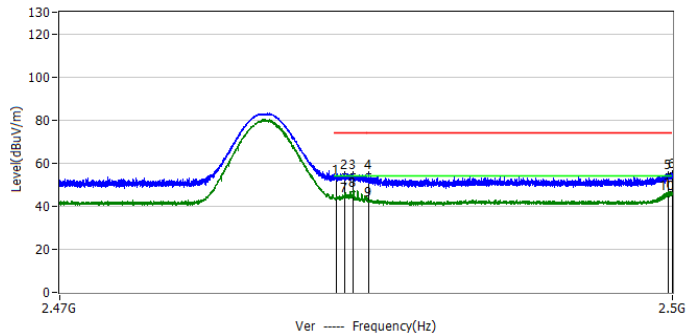


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.82	35.98	52.80	74.00	-21.20	PK	Ver
2*	2483.9000	19.12	35.99	55.11	74.00	-18.89	PK	Ver
3*	2484.3000	18.89	35.99	54.88	74.00	-19.12	PK	Ver
4*	2485.1000	18.94	35.99	54.93	74.00	-19.10	PK	Ver
5*	2499.8000	18.81	36.05	54.86	74.00	-19.14	PK	Ver
6*	2500.0000	19.22	36.05	55.27	74.00	-18.73	PK	Ver
7*	2483.9000	8.31	35.99	44.30	54.00	-9.70	AV	Ver
8*	2484.3000	10.61	35.99	46.60	54.00	-7.40	AV	Ver
9*	2485.1000	6.31	35.99	42.30	54.00	-11.70	AV	Ver
10*	2499.8000	9.35	36.05	45.40	54.00	-8.60	AV	Ver
11*	2500.0000	10.45	36.05	46.50	54.00	-7.50	AV	Ver

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 3DH5 2402	
Note: PIFA	

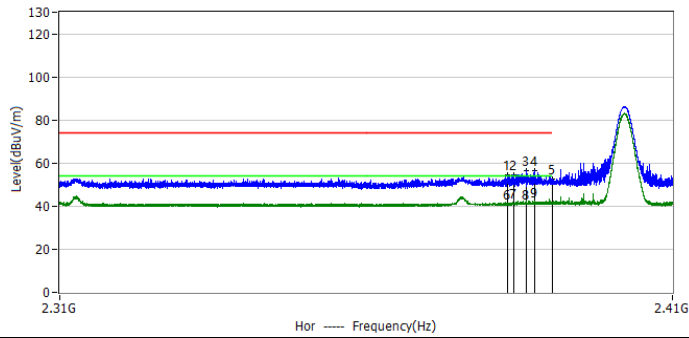

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2382.7000	18.83	35.56	54.39	74.00	-19.61	PK	Hor
2*	2383.7000	19.16	35.56	54.72	74.00	-19.28	PK	Hor
3*	2385.8000	21.14	35.57	56.71	74.00	-17.29	PK	Hor
4*	2387.1000	20.80	35.58	56.38	74.00	-17.62	PK	Hor
5*	2390.0000	16.81	35.59	52.40	74.00	-21.60	PK	Hor
6*	2382.7000	5.54	35.56	41.10	54.00	-12.90	AV	Hor
7*	2383.7000	5.94	35.56	41.50	54.00	-12.50	AV	Hor
8*	2385.8000	5.53	35.57	41.10	54.00	-12.90	AV	Hor
9*	2387.1000	6.52	35.58	42.10	54.00	-11.90	AV	Hor

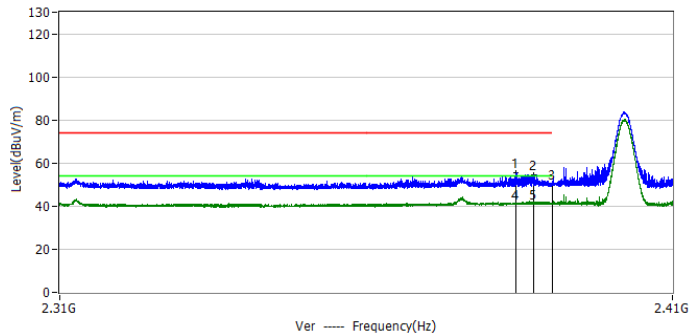


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2384.1000	19.82	35.56	55.38	74.00	-18.62	PK	Ver
2*	2387.0000	19.15	35.57	54.72	74.00	-19.28	PK	Ver
3*	2390.0000	14.51	35.59	50.10	74.00	-23.90	PK	Ver
4*	2384.1000	5.24	35.56	40.80	54.00	-13.20	AV	Ver
5*	2387.0000	5.53	35.57	41.10	54.00	-12.90	AV	Ver


Prüfbericht - Produkte

Test Report - Products

EUT: Wi-Fi/Bluetooth Module	Temperature: 24.2°C
M/N: WF8255-U1	Humidity: 68%RH
Test Voltage: DC 5V	Test Date: 2026-06-26
Test Mode: 3DH5 2480	
Note: PIFA	

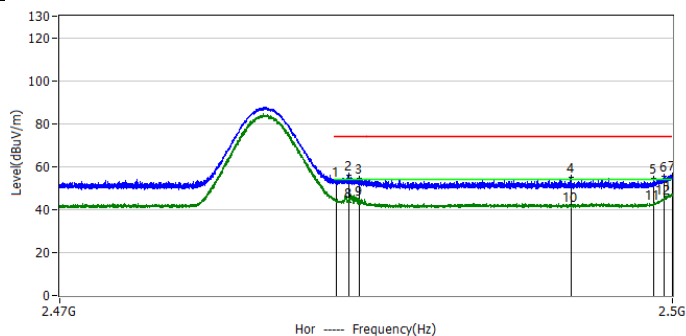

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.32	35.98	53.30	74.00	-20.70	PK	Hor
2*	2484.1000	19.85	35.99	55.84	74.00	-18.20	PK	Hor
3*	2484.6000	18.61	35.99	54.60	74.00	-19.40	PK	Hor
4*	2495.0000	19.00	36.03	55.03	74.00	-18.97	PK	Hor
5*	2499.1000	18.26	36.05	54.31	74.00	-19.69	PK	Hor
6*	2499.6000	19.57	36.05	55.62	74.00	-18.38	PK	Hor
7*	2500.0000	20.10	36.05	56.15	74.00	-17.85	PK	Hor
8*	2484.1000	7.41	35.99	43.40	54.00	-10.60	AV	Hor
9*	2484.6000	8.21	35.99	44.20	54.00	-9.80	AV	Hor
10*	2495.0000	5.47	36.03	41.50	54.00	-12.50	AV	Hor
11*	2499.1000	6.35	36.05	42.40	54.00	-11.60	AV	Hor
12*	2499.6000	8.95	36.05	45.00	54.00	-9.00	AV	Hor
13*	2500.0000	10.55	36.05	46.60	54.00	-7.40	AV	Hor

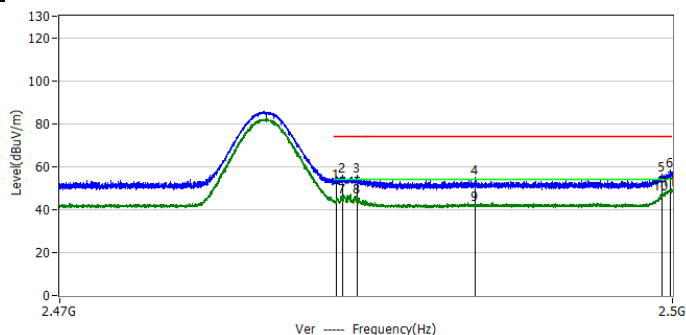

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.32	35.98	52.30	74.00	-21.70	PK	Ver
2*	2483.8000	19.00	35.99	54.99	74.00	-19.01	PK	Ver
3*	2484.5000	19.21	35.99	55.20	74.00	-18.80	PK	Ver
4*	2490.3000	18.06	36.01	54.07	74.00	-19.93	PK	Ver
5*	2499.5000	19.56	36.05	55.61	74.00	-18.39	PK	Ver
6*	2499.9000	21.50	36.05	57.55	74.00	-16.45	PK	Ver
7*	2483.8000	9.31	35.99	45.30	54.00	-8.70	AV	Ver
8*	2484.5000	9.21	35.99	45.20	54.00	-8.80	AV	Ver
9*	2490.3000	5.89	36.01	41.90	54.00	-12.10	AV	Ver
10*	2499.5000	10.45	36.05	46.50	54.00	-7.50	AV	Ver
11*	2499.9000	12.75	36.05	48.80	54.00	-5.20	AV	Ver