

WF-M603-UWC1

IEEE 802.11b/g/n 2T2R USB WiFi Module

Features:

➤ **Supported WLAN Standard**

IEEE Std. 802.11b

IEEE Std. 802.11g

IEEE Std. 802.11n

➤ **Chip Solution**

Mediatek MT7603U

➤ **Size**

40mm*21mm*5.5mm



Type	Standard	Rate	Band	Power
WF-M603-UWC1	IEEE 802.11b/g/n	300Mbps	2.4G	5V

Sichuan AI-Link Technology Co.,Ltd.

Add: Anzhou,Industrial park,Mianyang,Sichuan

Tell : +86-13881190925

Web: <http://www.changhong.com>

1. Introduction

1.1 Specification reference

This specification is based on additional references listed below.

- _ IEEE Std. 802.11b
- _ IEEE Std. 802.11g
- _ IEEE Std. 802.11n

1.2 System Functions

Table1: General Specification as below:


Main Chipset	Mediatek MT7603U
Operating Frequency	2.4G
WiFi Standard	802.11 b/g/n
Modulation	WIFI:11b: DBPSK, DQPSK and CCK and DSSS 11g: BPSK, QPSK, 16QAM, 64QAM and OFDM 11n: BPSK, QPSK, 16QAM, 64QAM and OFDM
Data rates	11b: 1, 2, 5.5 and 11Mbps 11g: 6, 9, 12, 18, 24, 36, 48 and 54 Mbps 11n: MCS0~15, up to 300Mbps
Form factor	7pins
Host Interface	USB 2.0
PCB Stack	2-layers design
Dimension	Typical, 40mm x 21mm x 5.5mm
Antenna	Internal Antennas Design
Operation Temperature	-10℃ to +70℃
Storage Temperature	-25℃ to +125℃
Operation Voltage	5V +/-5%
Current Consumption	500mA

2. Mechanical Specification

2.1 Mechanical Outline Drawing

Typical Dimension (W x L): 40.0mmx 21.0mm x 5.5mm

General tolerance: ±0.3mm

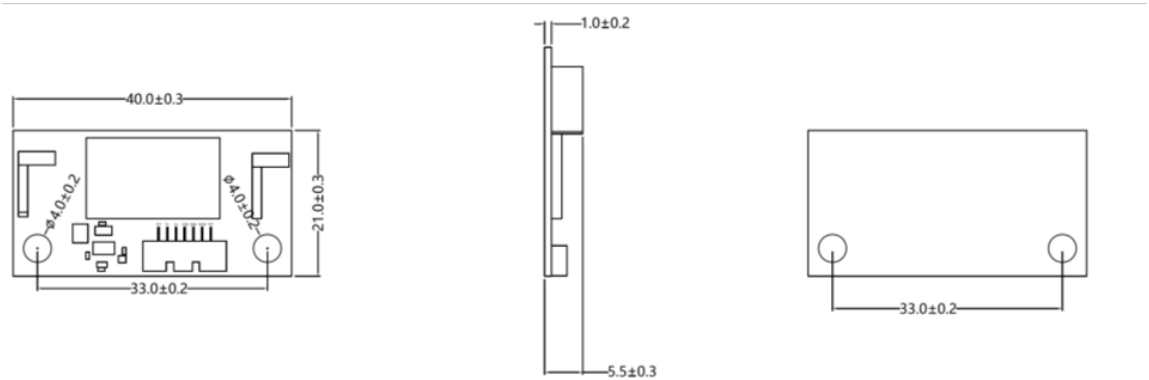

2.2 Product Picture




Top view



BOT view

2.3 Pin define

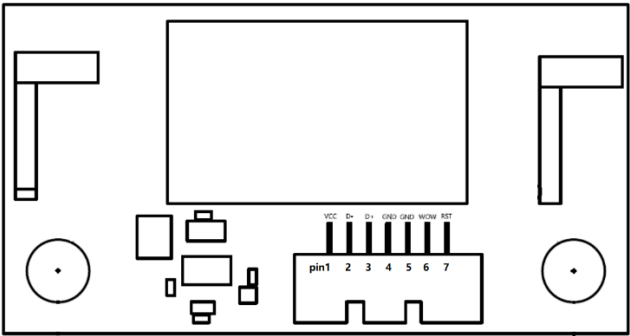

Pin	Define	Describe
1	5V	Power input
2	DN	USB D-
3	DP	USB D+
4	GND	GND
5	GND	GND
6	WOW	WIFI_WAKE
7	RESET	Reset

3. Electrical Specification

This Specification is based-on conductive DVT testing result. The extreme condition include overall temperature (0°C,+25°C,+40°C) and overall voltage (4.75V,5V,5.25V).

3. 1 IEEE 802.11g/a Section:

Items	Contents				
Specification	IEEE802.11g				
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM				
Channel	CH1 to CH13 @ 11g				
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels					
15dBm Target (For Each antenna port) @ 11g/6Mbps~54Mbps	13	15	17	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-11MHz	-	-	-20	dBr	
2) at fc +/-20MHz	-	-	-28	dBr	
3) at fc > +/-30MHz	-	-	-40	dBr	
3. Constellation Error(EVM) @ Target Power					
1) 6Mbps	-	-	-5	dB	
2) 9Mbps	-	-	-8	dB	
3) 12Mbps	-	-	-10	dB	
4) 18Mbps	-	-	-13	dB	
5) 24Mbps	-	-	-16	dB	
6) 36Mbps	-	-	-19	dB	
7) 48Mbps	-	-	-22	dB	
8) 54Mbps	-	-	-25	dB	
4. Frequency Error					
1) IEEE802.11g	-15	-	15	ppm	
2) IEEE802.11a	-15		15	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) 6Mbps (PER ≤10%)	-	-	-82	dBm	
2) 9Mbps (PER ≤10%)	-	-	-81	dBm	
3) 12Mbps (PER ≤10%)	-	-	-79	dBm	
4) 18Mbps (PER ≤10%)	-	-	-77	dBm	
5) 24Mbps (PER ≤10%)	-	-	-74	dBm	
6) 36Mbps (PER ≤10%)	-	-	-70	dBm	
7) 48Mbps (PER ≤10%)	-	-	-66	dBm	
8) 54Mbps (PER ≤10%)	-	-	-65	dBm	
6. Maximum Input Level (PER ≤10%)					
1) IEEE802.11g	-20	-	-	dBm	
2) IEEE802.11a	-30			dBm	

3.2 IEEE 802.11b Section:

Items	Contents				
Specification	IEEE802.11b				
Mode	DBPSK, DQPSK and CCK and DSSS				
Channel	CH1 to CH13				
Data rate	1, 2, 5.5, 11Mbps				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels(Calibrated)					
1) 17dBm Target (For Each antenna port) @1Mbps~11Mbps	15	17	19	dBm	
2. Spectrum Mask @ Target Power					
1) fc +/-11MHz to +/-22MHz	-	-	-30	dBr	
2) fc > +/-22MHz	-	-	-50	dBr	
3. Constellation Error(EVM) @ Target Power					
1) 1Mbps	-	-	-10	dB	
2) 2Mbps	-	-	-10	dB	
3) 5.5Mbps	-	-	-10	dB	
4) 11Mbps	-	-20	-10	dB	
4. Frequency Error	-15	-	15	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) 1Mbps (FER $\leq$ 8%)	-	-83	-76	dBm	
2) 2Mbps (FER $\leq$ 8%)	-	-80	-76	dBm	
3) 5.5Mbps (FER $\leq$ 8%)	-	-79	-76	dBm	
4) 11Mbps (FER $\leq$ 8%)	-	-76	-76	dBm	
6. Maximum Input Level (FER $\leq$ 8%)	-10	-	-	dBm	

3.3 IEEE 802.11n HT20 Section:

Items	Contents				
Specification	IEEE802.11n HT20 @ 2.4G				
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM				
Channel	CH1 to CH13 @ 2.4G				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9/10/11/12/13/14/15				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels					
1) 15dBm Target (For Each antenna port) @ 2.4G/MCS0~MCS7	12	14	16	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-11MHz	-	-	-20	dB	
2) at fc +/-20MHz	-	-	-28	dB	
3) at fc > +/-30MHz	-	-	-45	dB	
3. Constellation Error(EVM) @ Target Power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-28	dB	
4. Frequency Error					
1) IEEE802.11n HT20 @ 2.4G	-15	-	15	ppm	
2) IEEE802.11n HT20 @ 5G	-15	-	15	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) MCS0 (PER ≤10%)	-	-	-82	dBm	
2) MCS1 (PER ≤10%)	-	-	-79	dBm	
3) MCS2 (PER ≤10%)	-	-	-77	dBm	
4) MCS3 (PER ≤10%)	-	-	-74	dBm	
5) MCS4 (PER ≤10%)	-	-	-70	dBm	
6) MCS5 (PER ≤10%)	-	-	-66	dBm	
7) MCS6 (PER ≤10%)	-	-	-65	dBm	
8) MCS7 (PER ≤10%)	-	-	-64	dBm	
6. Maximum Input Level (PER ≤10%)					
1) IEEE802.11n HT20 @ 2.4G	-20	-	-	dBm	
2) IEEE802.11n HT20 @ 5G	-30	-	-	dBm	

3.4 IEEE 802.11n HT40 Section:

Items	Contents				
Specification	IEEE802.11n HT20 @ 2.4G				
Mode	BPSK, QPSK, 16QAM, 64QAM and OFDM				
Channel	CH3 to CH11 @ 2.4G				
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9/10/11/12/13/14/15				
TX Characteristics	Min.	Typ.	Max.	Unit	Remark
1. Power Levels (Calibrated)					
1) 14dBm Target (For Each antenna port) @ 2.4G/MCS0~MCS7	12	14	16	dBm	
2. Spectrum Mask @ Target Power					
1) at fc +/-21MHz	-	-	-20	dBr	
2) at fc +/-40MHz	-	-	-28	dBr	
3) at fc > +/-60MHz	-	-	-45	dBr	
3. Constellation Error(EVM) @ Target Power					
1) MCS0	-	-	-5	dB	
2) MCS1	-	-	-10	dB	
3) MCS2	-	-	-13	dB	
4) MCS3	-	-	-16	dB	
5) MCS4	-	-	-19	dB	
6) MCS5	-	-	-22	dB	
7) MCS6	-	-	-25	dB	
8) MCS7	-	-	-28	dB	
4. Frequency Error					
1) IEEE802.11n HT20 @ 2.4G	-15	-	15	ppm	
2) IEEE802.11n HT20 @ 5G	-15	-	15	ppm	
RX Characteristics	Min.	Typ.	Max.	Unit	
5. Minimum Input Level Sensitivity(each chain)					
1) MCS0 (PER $\leq$ 10%)	-	-	-79	dBm	
2) MCS1 (PER $\leq$ 10%)	-	-	-76	dBm	
3) MCS2 (PER $\leq$ 10%)	-	-	-74	dBm	
4) MCS3 (PER $\leq$ 10%)	-	-	-71	dBm	
5) MCS4 (PER $\leq$ 10%)	-	-	-67	dBm	
6) MCS5 (PER $\leq$ 10%)	-	-	-63	dBm	
7) MCS6 (PER $\leq$ 10%)	-	-	-62	dBm	
8) MCS7 (PER $\leq$ 10%)	-	-	-61	dBm	
6. Maximum Input Level(PER $\leq$ 10%)					
1) IEEE802.11n HT20 @ 2.4G	-20	-	-	dBm	
2) IEEE802.11n HT20 @ 5G	-30	-	-	dBm	

4. Software Requirements

The driver supports the following operating systems: Linux, Microsoft Windows XP, Vista and Win7.
Mfg. software tool is MT7603U_QA_Tool.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.