




Plot 2:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	836.6
SAR 10g (W/Kg)	0.161
SAR 1g (W/Kg)	0.228
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=-17.00, Y=-16.00 ; SAR Peak: 0.31 W/kg

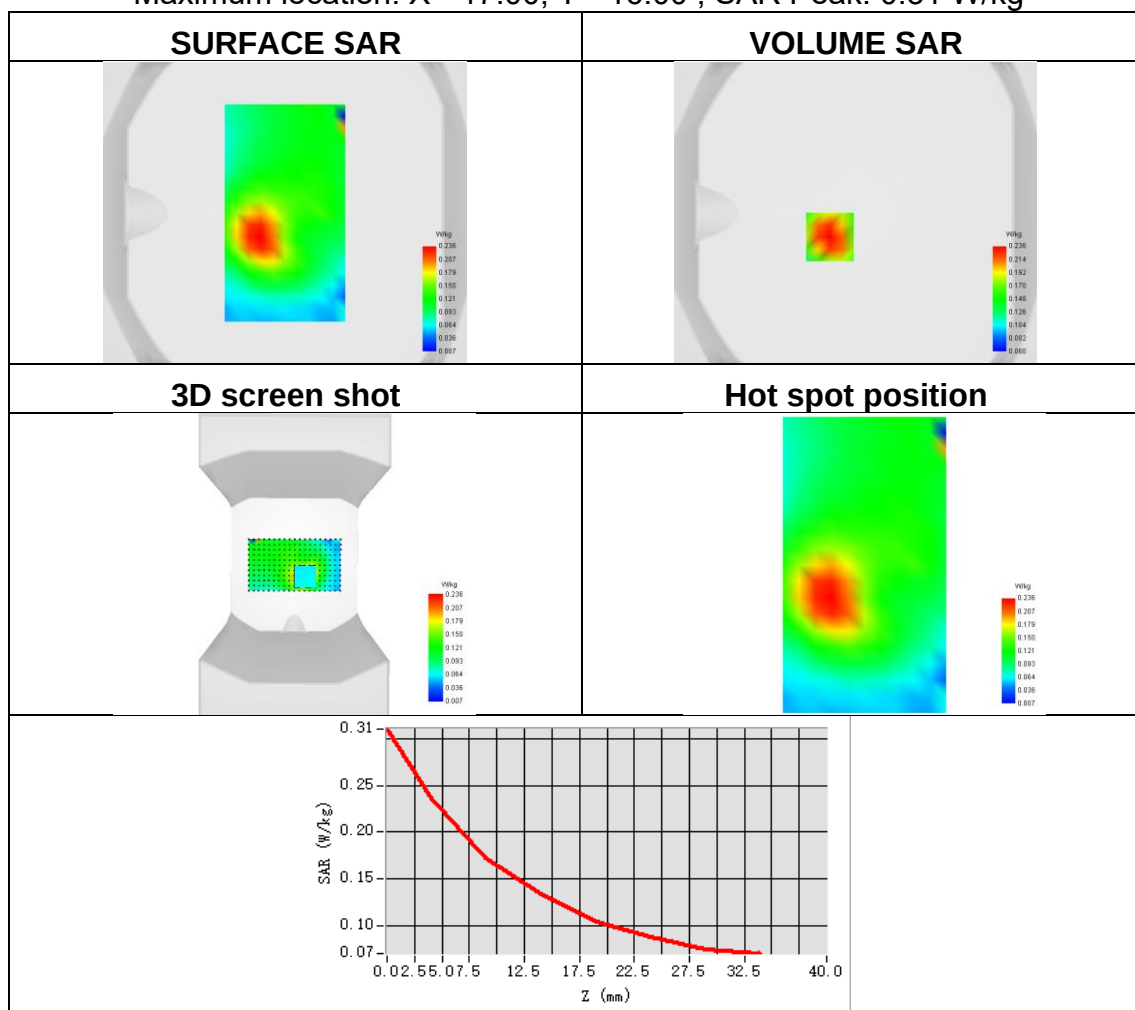




Plot 3:

Test Date	2025-09-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	0.059
SAR 1g (W/Kg)	0.120
ConvF	1.34
Relative permittivity	40.76
Conductivity (S/m)	1.42

Maximum location: X=-48.00, Y=-40.00 ; SAR Peak: 0.32 W/kg

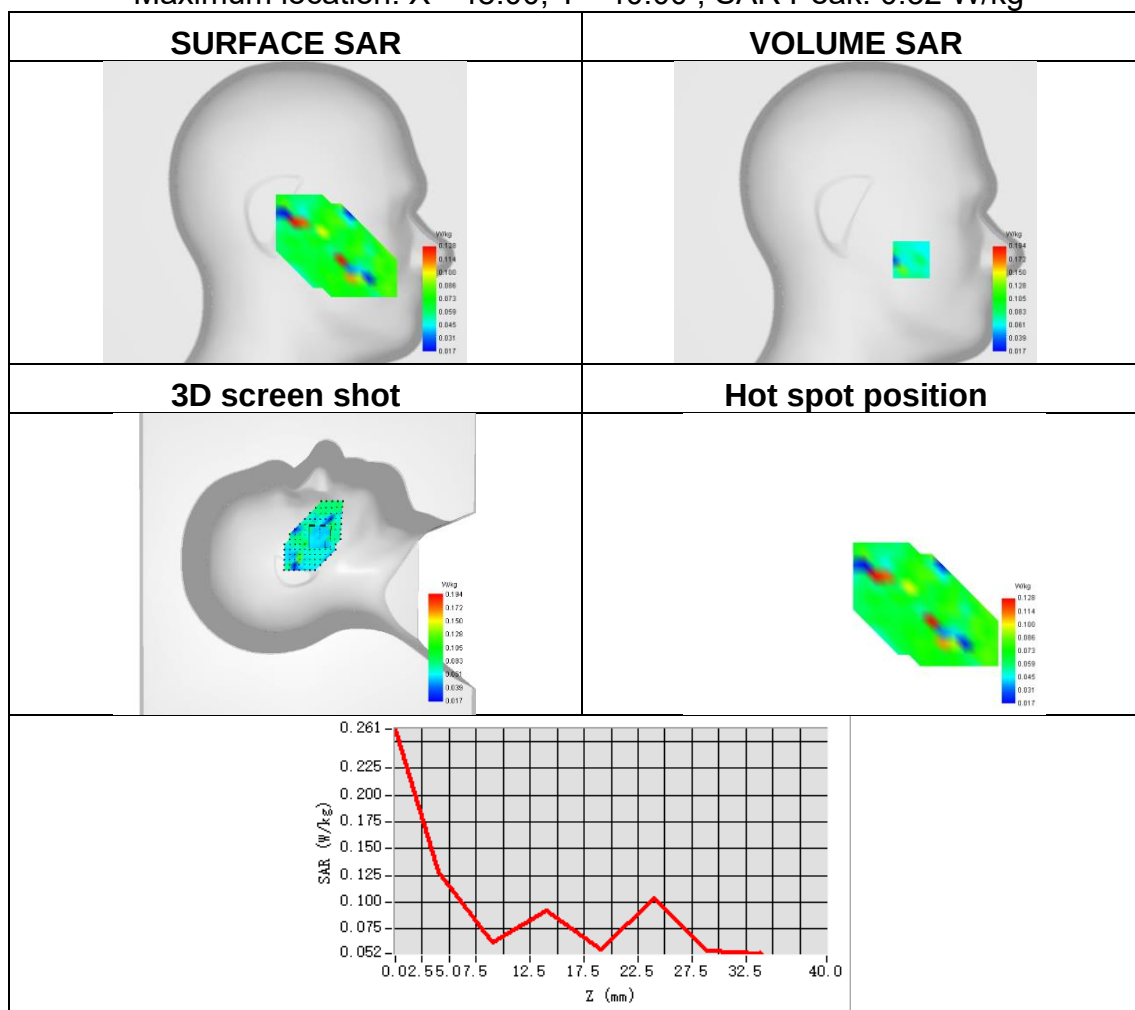




Plot 4:

Test Date	2025-09-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	0.128
SAR 1g (W/Kg)	0.168
ConvF	1.34
Relative permittivity	40.76
Conductivity (S/m)	1.42

Maximum location: X=-15.00, Y=0.00 ; SAR Peak: 0.22 W/kg

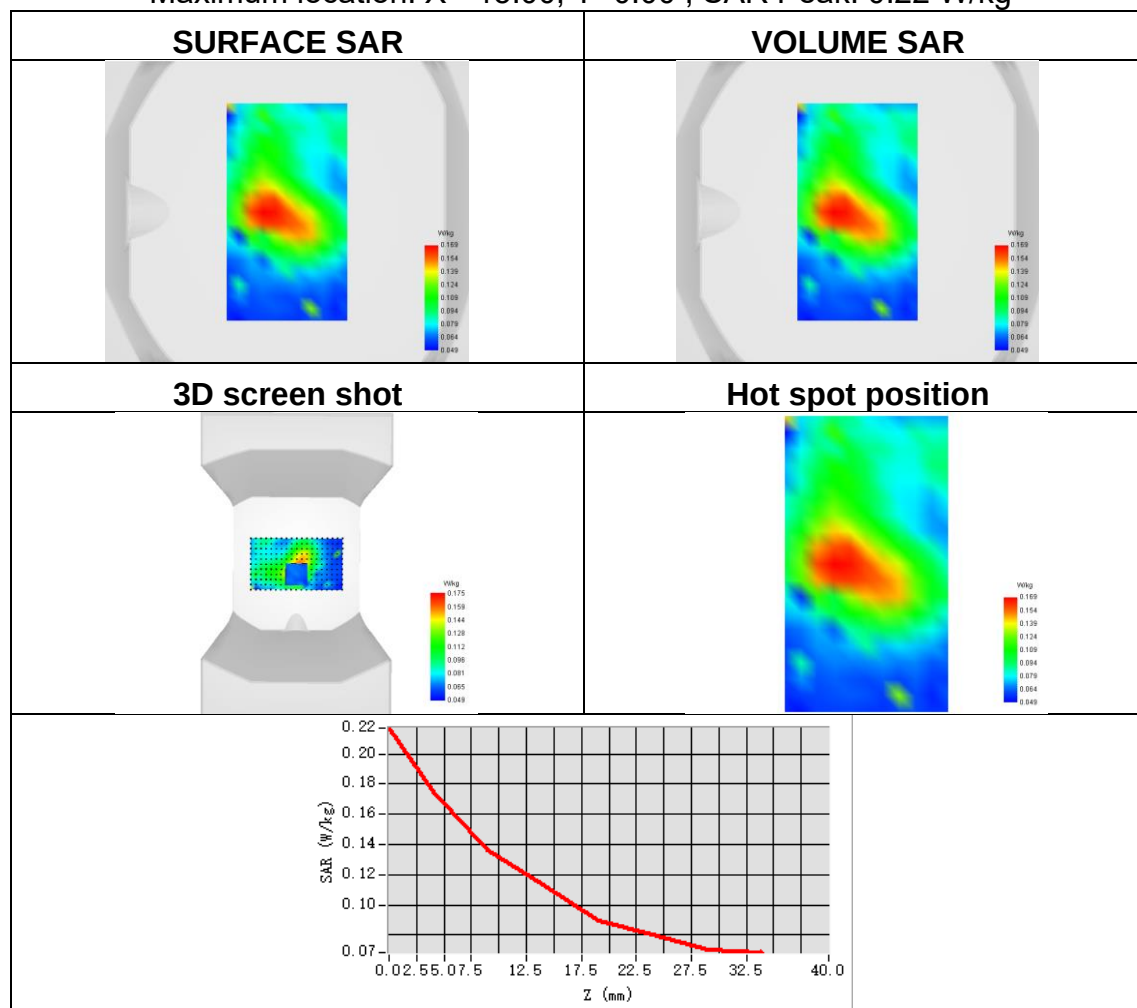




Plot 5:

Test Date	2025-09-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.200
SAR 1g (W/Kg)	0.433
ConvF	1.34
Relative permittivity	40.76
Conductivity (S/m)	1.42

Maximum location: X=-42.00, Y=-47.00 ; SAR Peak: 0.85 W/kg

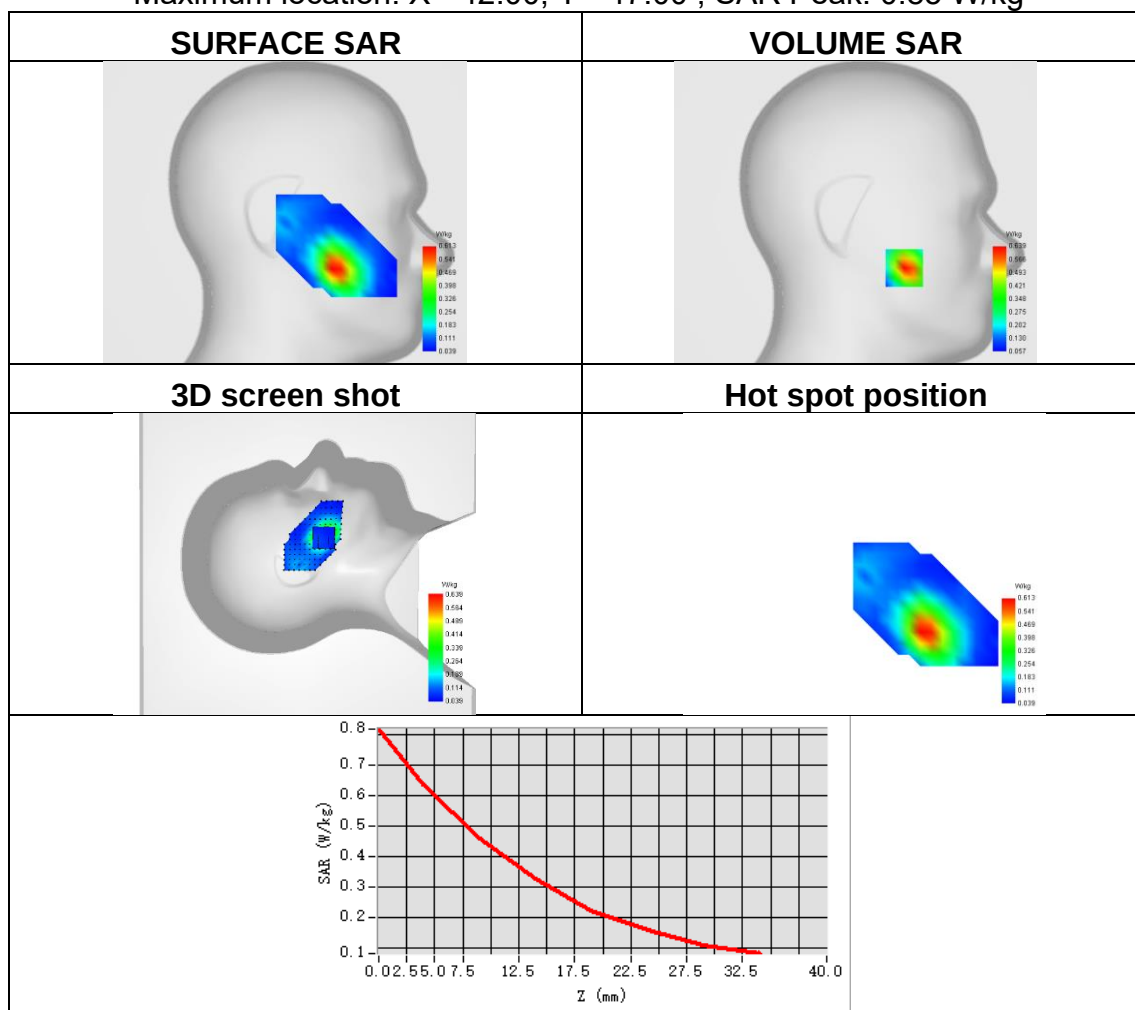




Plot 6:

Test Date	2025-09-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.208
SAR 1g (W/Kg)	0.306
ConvF	1.34
Relative permittivity	40.76
Conductivity (S/m)	1.42

Maximum location: X=-5.00, Y=-29.00 ; SAR Peak: 0.43 W/kg

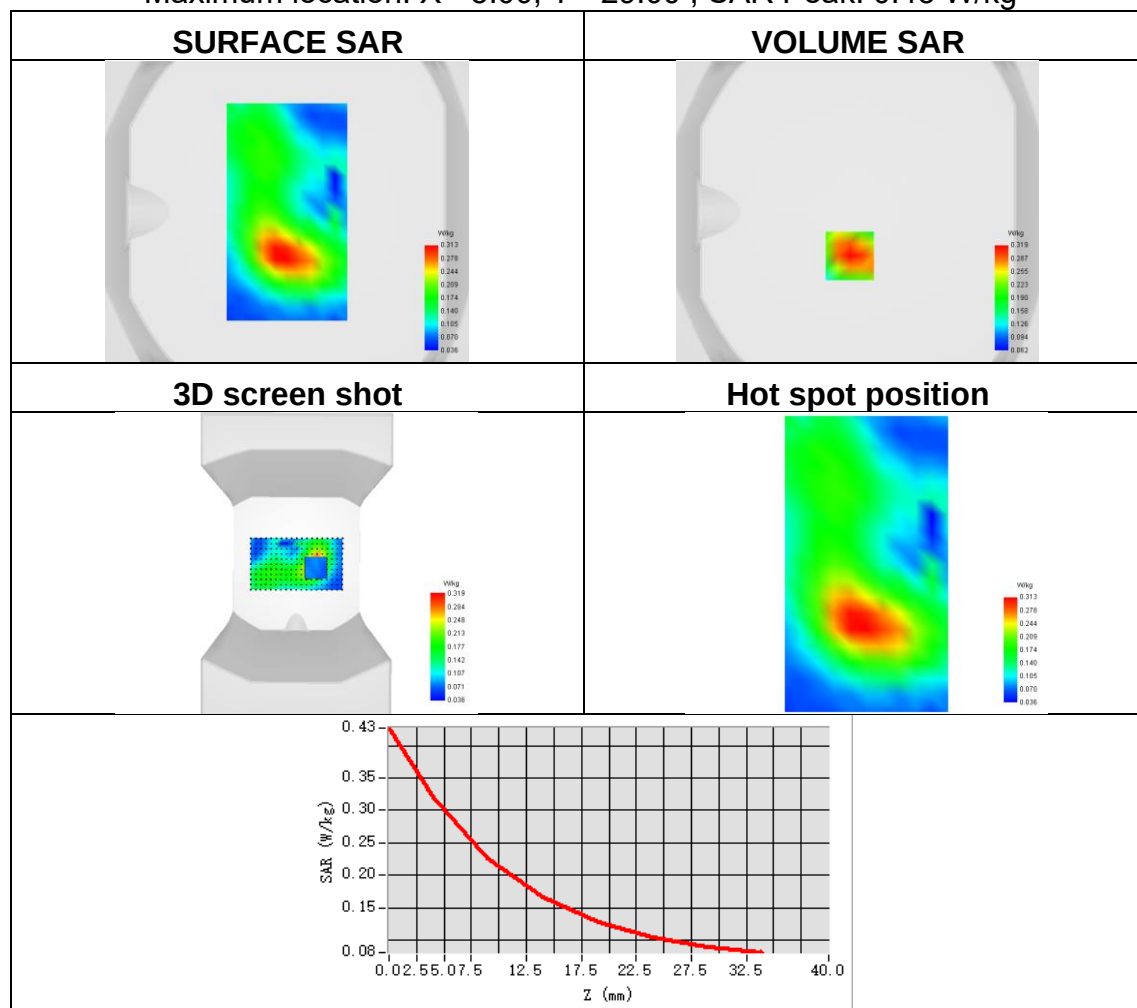




Plot 7:

Test Date	2025-09-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	0.440
SAR 1g (W/Kg)	0.753
ConvF	1.21
Relative permittivity	40.88
Conductivity (S/m)	1.35

Maximum location: X=-47.00, Y=-29.00 ; SAR Peak: 1.09 W/kg

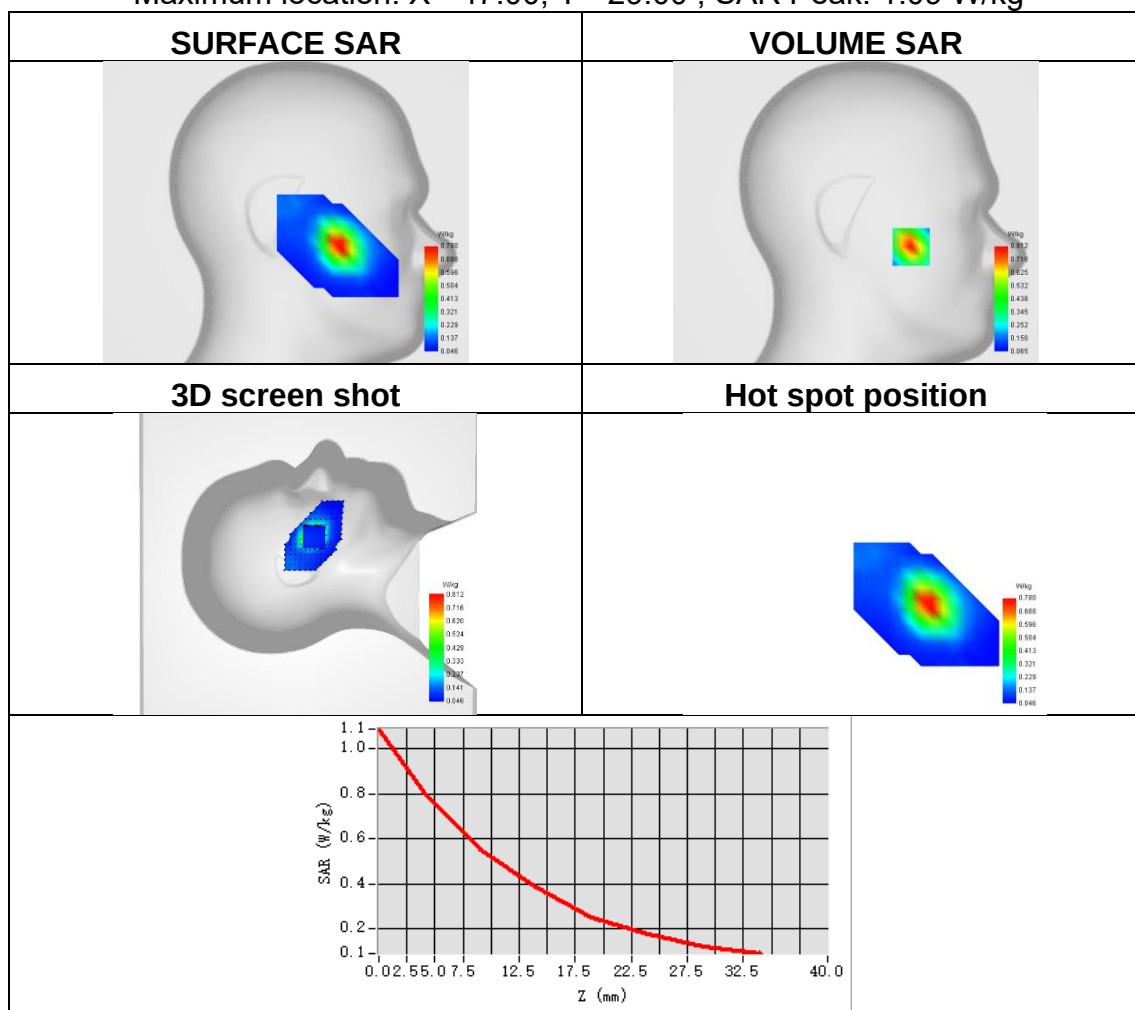




Plot 8:

Test Date	2025-09-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	0.197
SAR 1g (W/Kg)	0.289
ConvF	1.21
Relative permittivity	40.88
Conductivity (S/m)	1.35

Maximum location: X=-14.00, Y=-30.00 ; SAR Peak: 0.42 W/kg

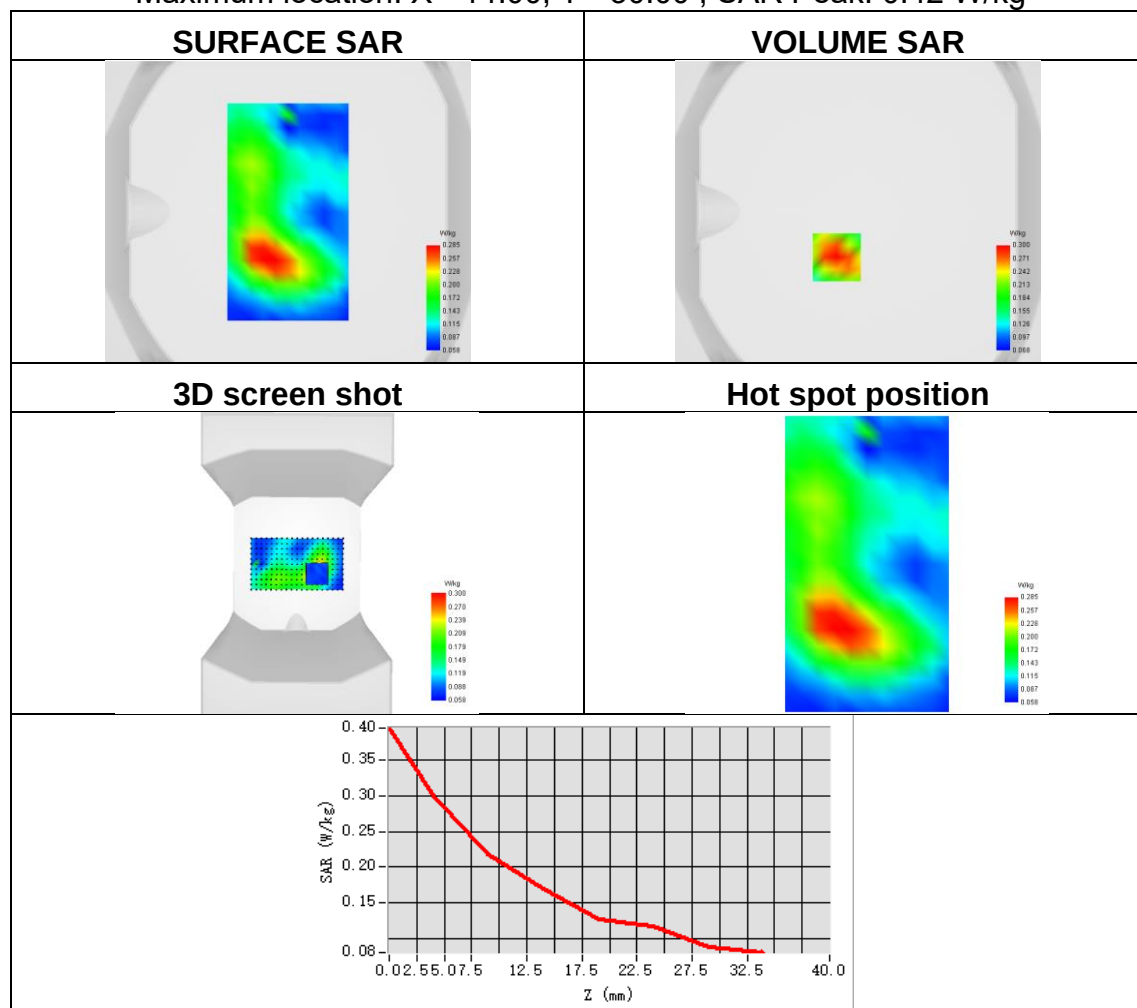




Plot 9:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.224
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=-65.00, Y=-46.00 ; SAR Peak: 0.34 W/kg

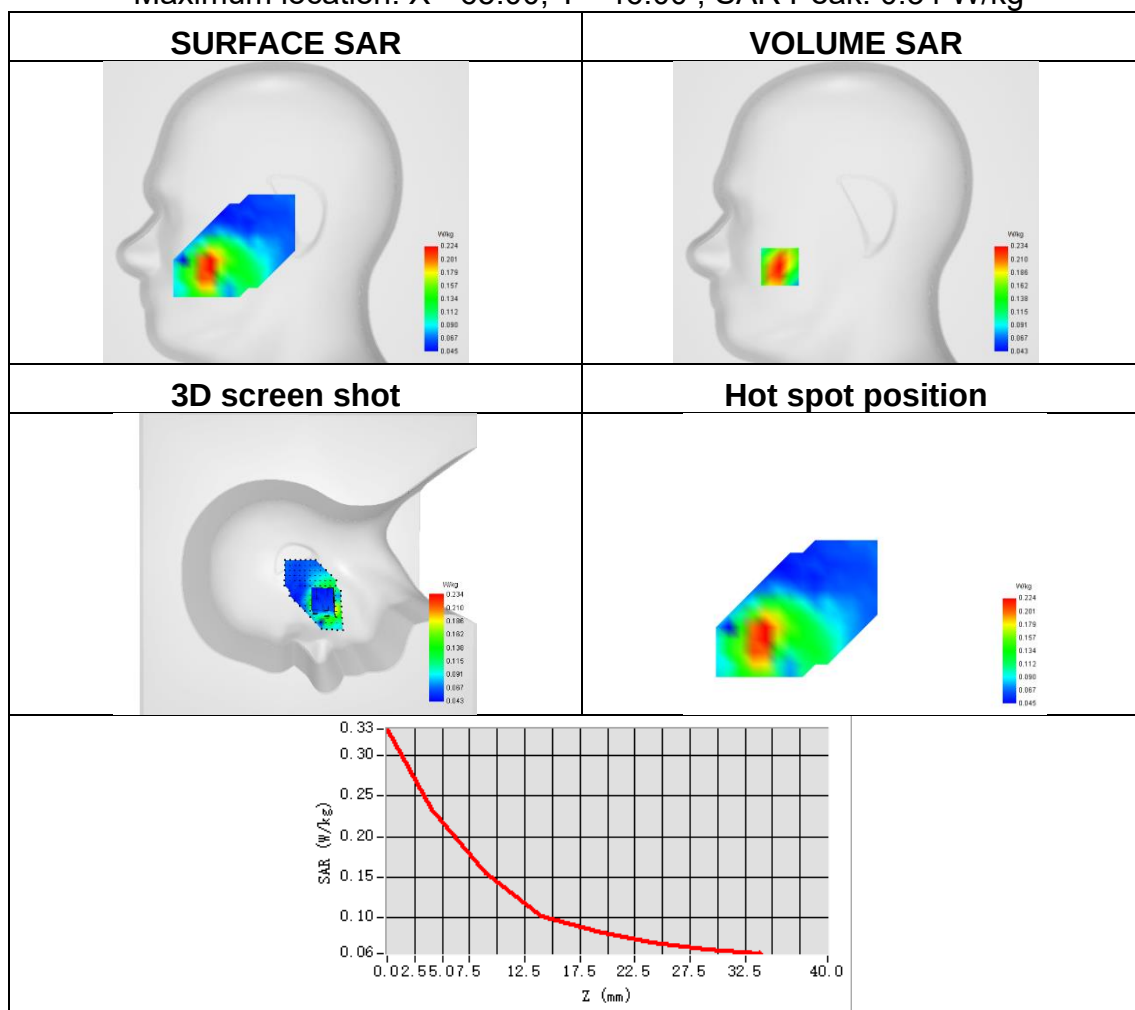




Plot 10:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.108
SAR 1g (W/Kg)	0.186
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=-2.00, Y=-40.00 ; SAR Peak: 0.40 W/kg

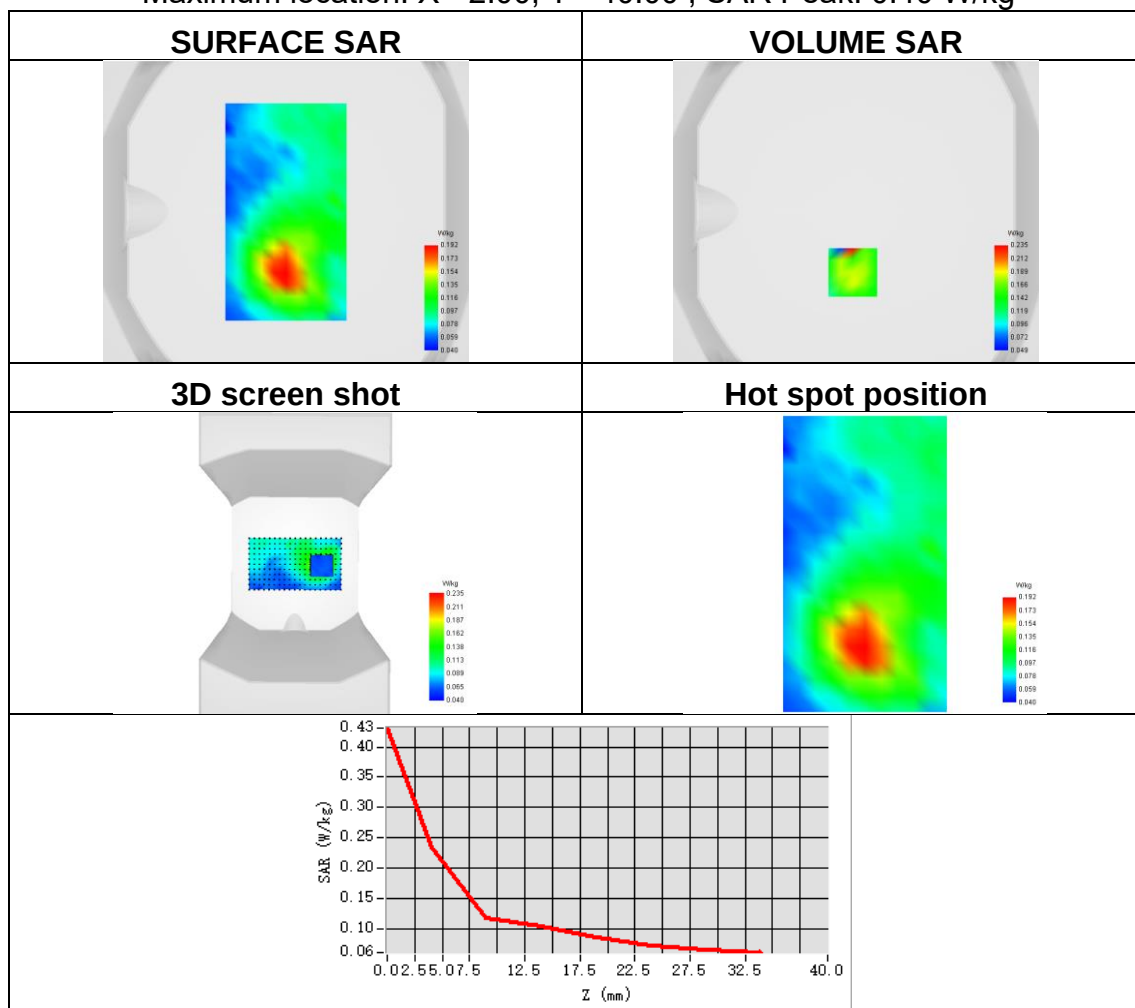




Plot 11:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	ISM
Signal	IEEE 802.11b
Frequency	2412
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.426
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.96 W/kg

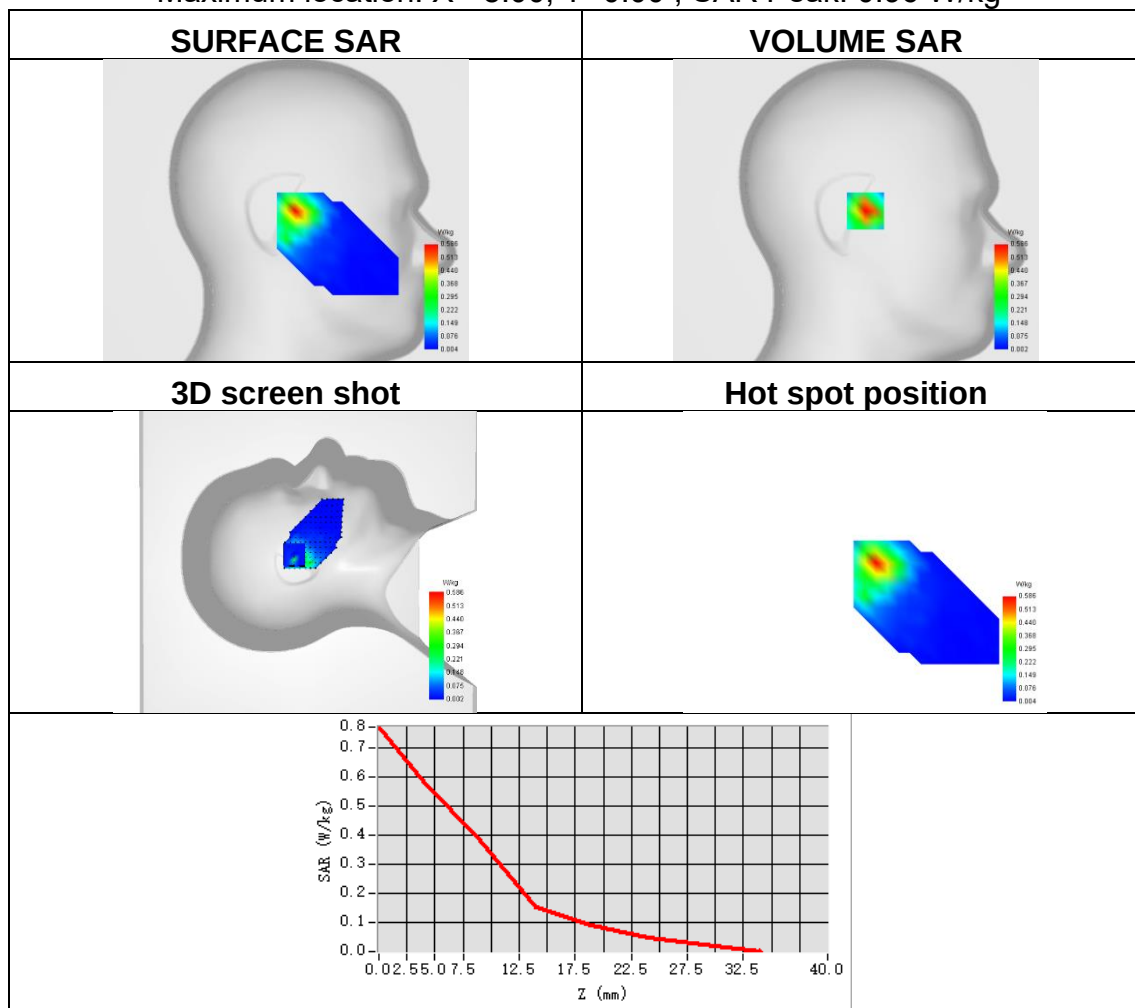




Plot 12:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	ISM
Signal	IEEE 802.11b
Frequency	2412
SAR 10g (W/Kg)	0.068
SAR 1g (W/Kg)	0.139
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-8.00, Y=-1.00 ; SAR Peak: 0.32 W/kg

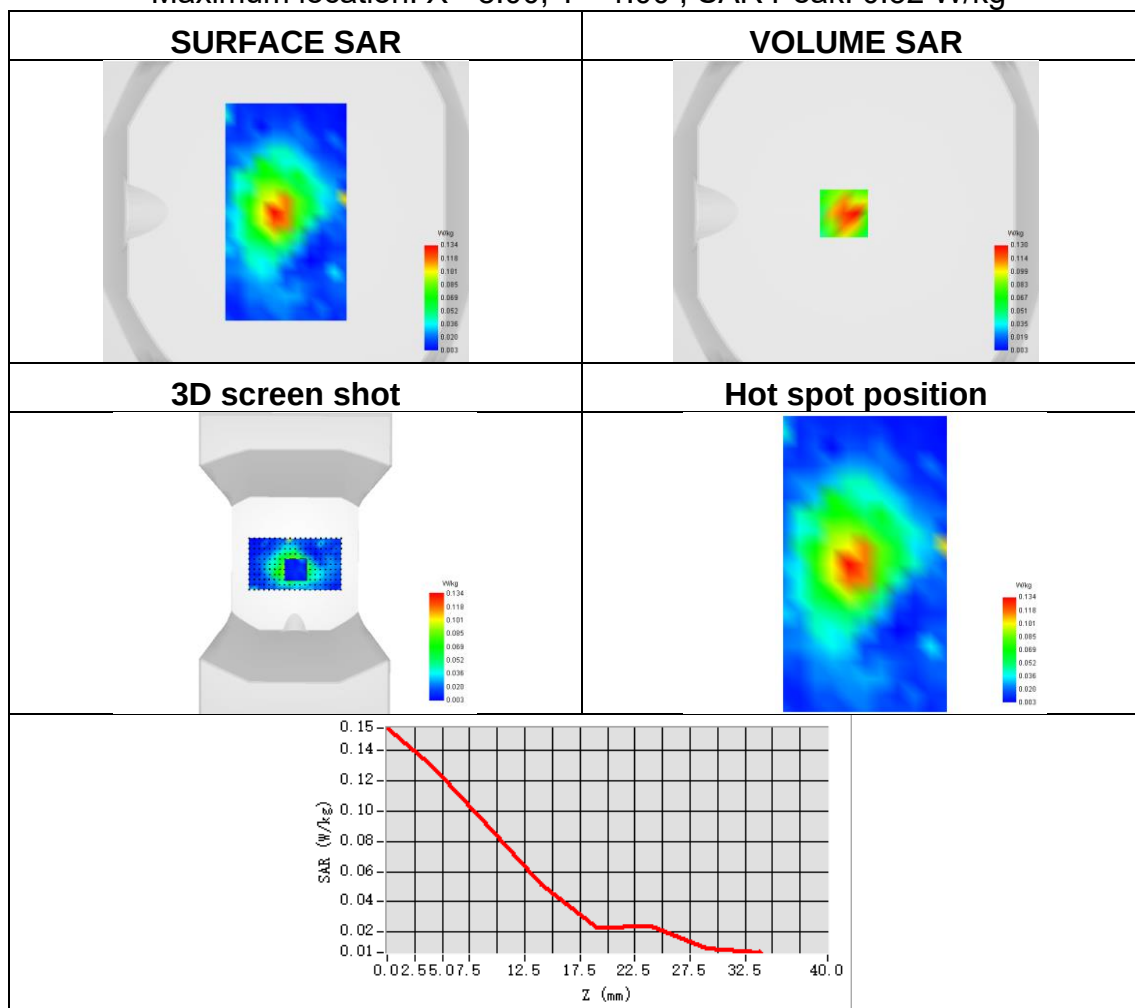




Plot 13:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	ISM
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.498
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-25.00, Y=3.00 ; SAR Peak: 1.26 W/kg

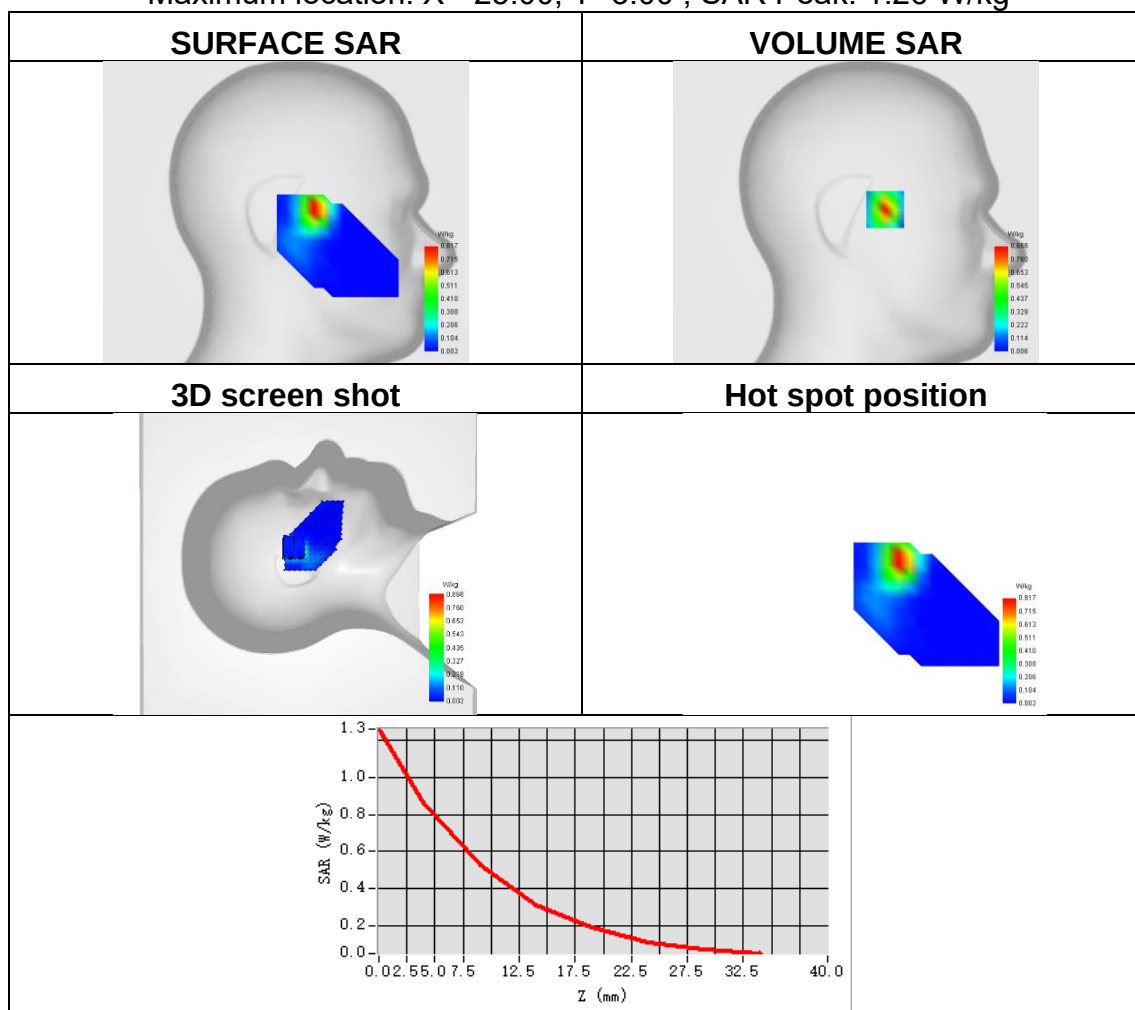




Plot 14:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	ISM
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.043
SAR 1g (W/Kg)	0.094
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-24.00, Y=48.00 ; SAR Peak: 0.18 W/kg

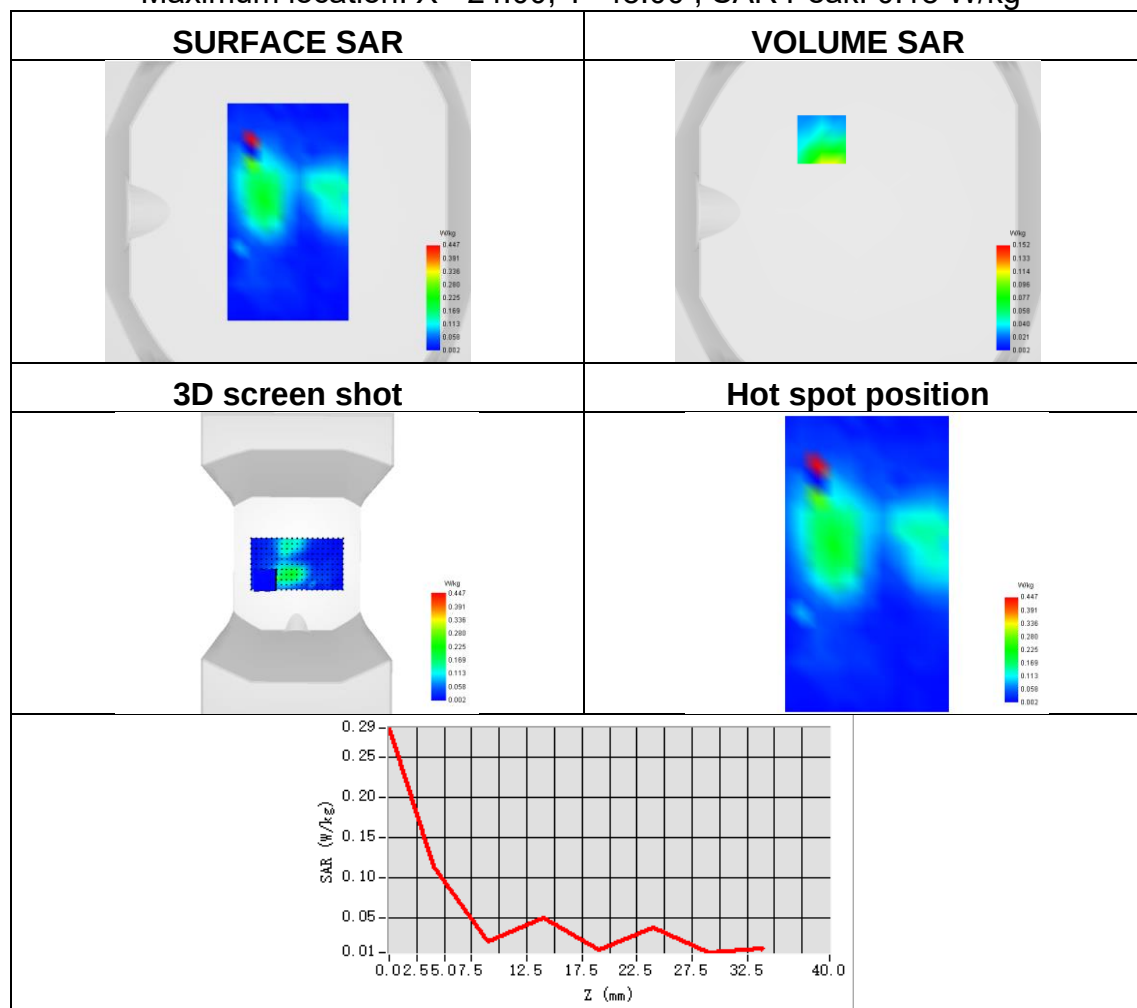




Plot 15:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	ISM
Signal	IEEE 802.11n
Frequency	2422
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.218
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-22.00, Y=-2.00 ; SAR Peak: 0.33 W/kg

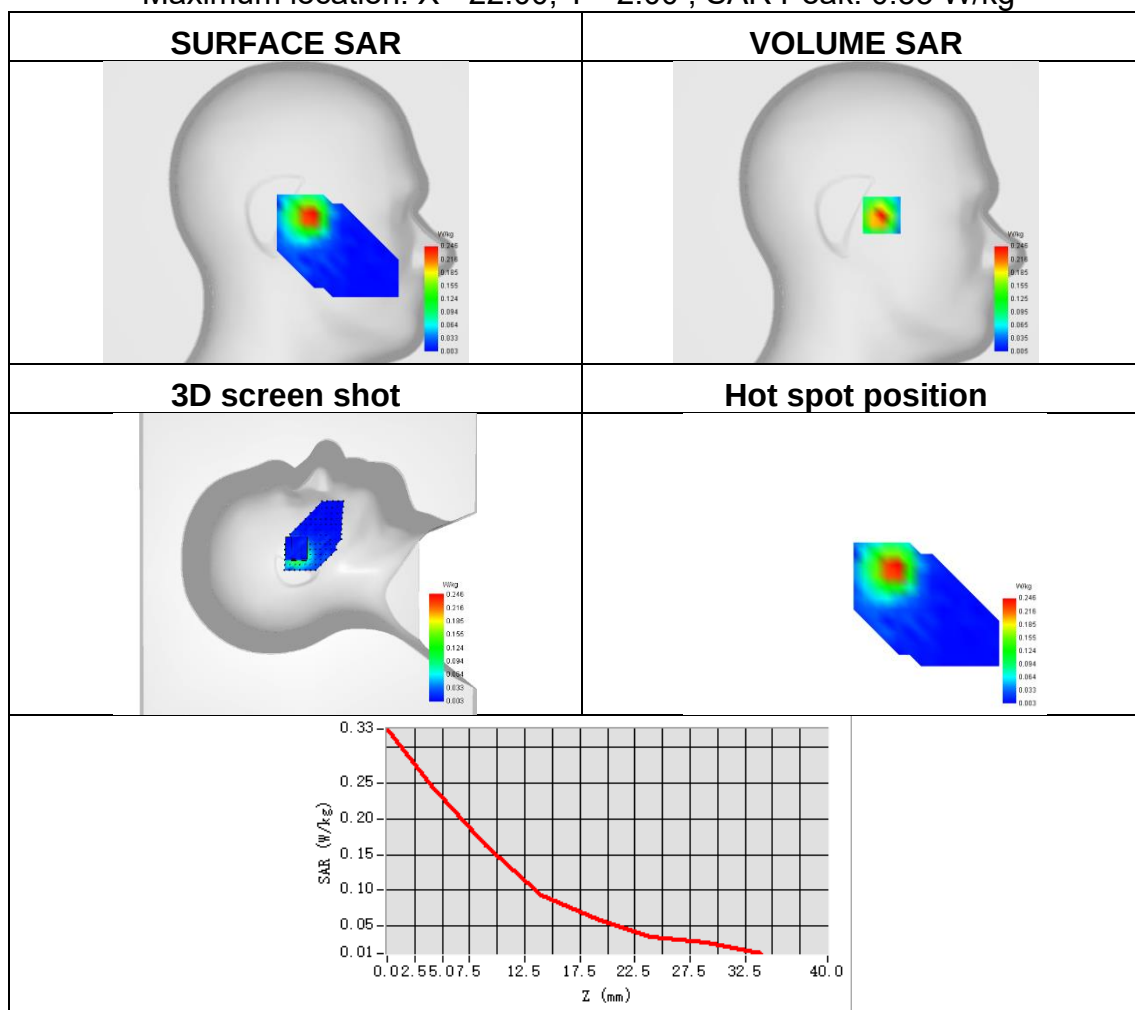




Plot 16:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM
Signal	IEEE 802.11n
Frequency	2422
SAR 10g (W/Kg)	0.034
SAR 1g (W/Kg)	0.064
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-3.00, Y=7.00 ; SAR Peak: 0.12 W/kg

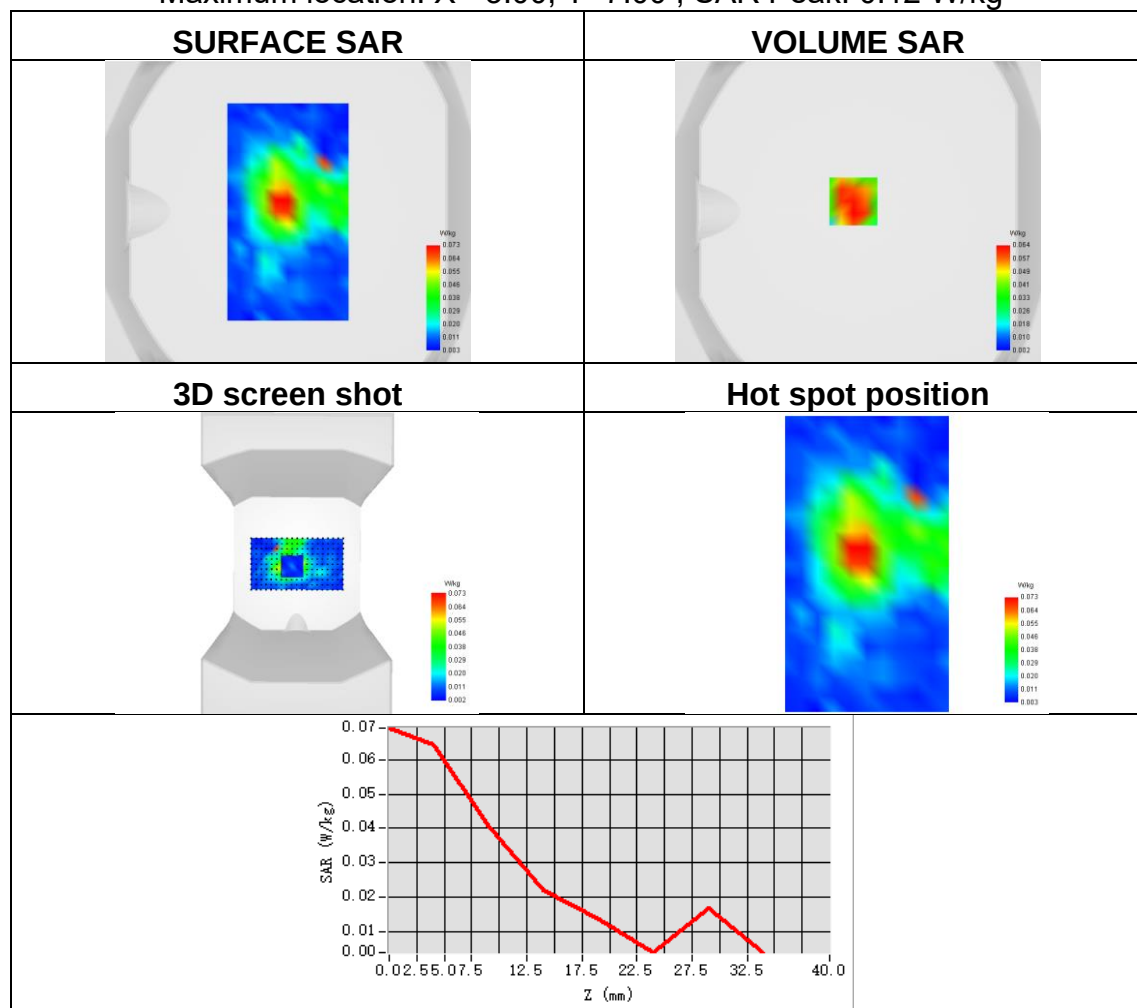




Plot 17:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	ISM
Signal	IEEE 802.11n
Frequency	2422
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.238
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-22.00, Y=-2.00 ; SAR Peak: 0.39 W/kg

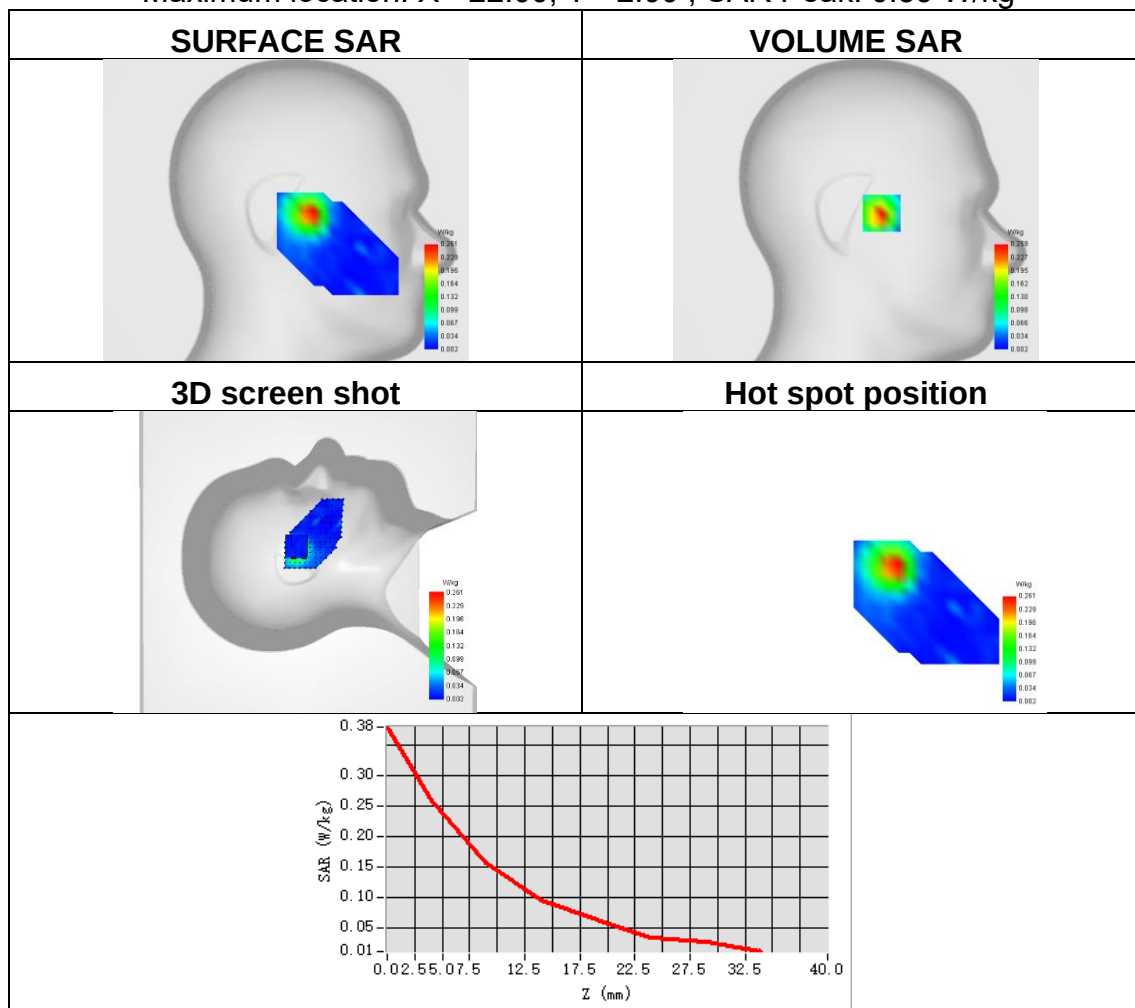




Plot 18:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM
Signal	IEEE 802.11n
Frequency	2422
SAR 10g (W/Kg)	0.055
SAR 1g (W/Kg)	0.293
ConvF	1.51
Relative permittivity	40.65
Conductivity (S/m)	1.82

Maximum location: X=-23.00, Y=33.00 ; SAR Peak: 1.15 W/kg

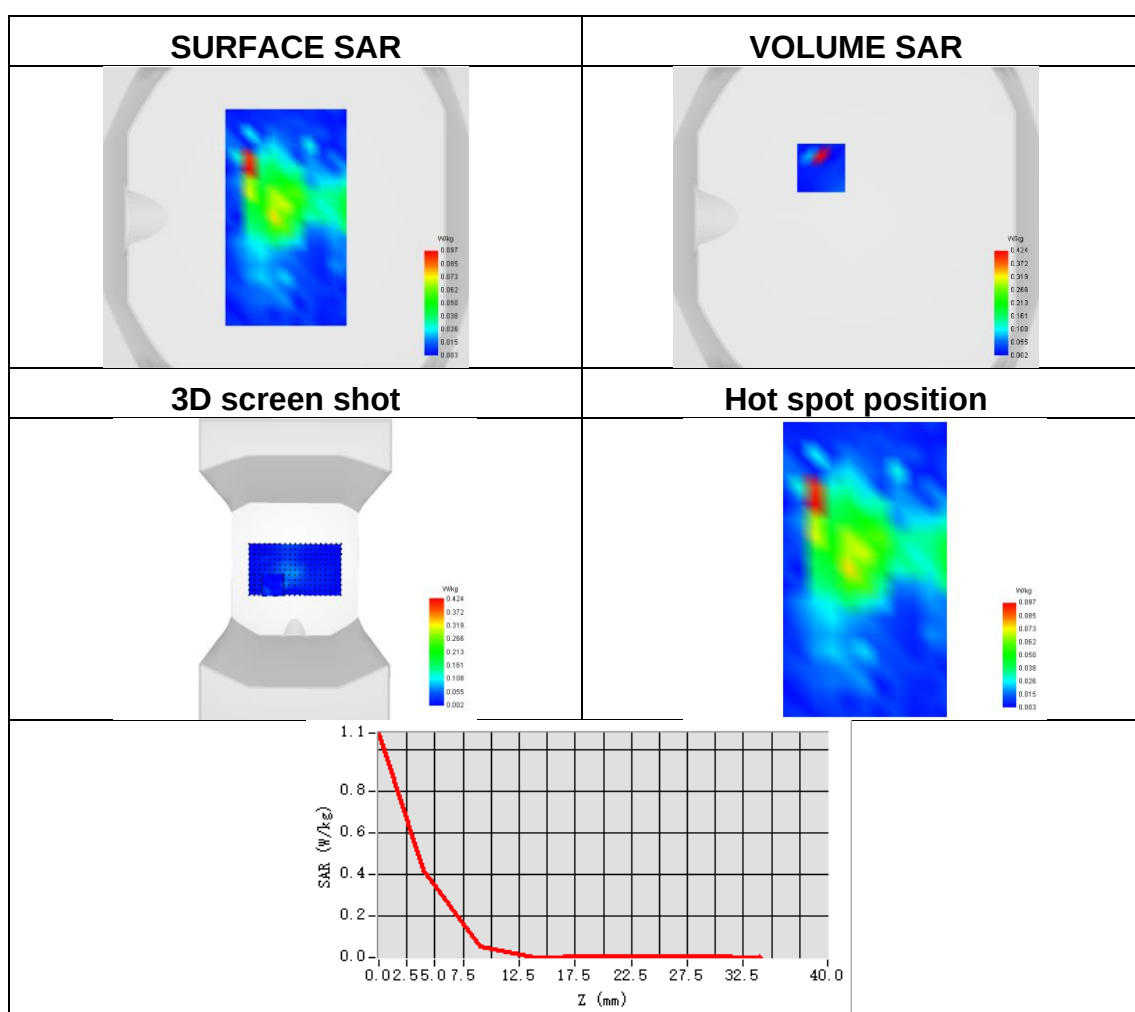




Plot 19:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5240
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.169
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-1.00, Y=1.00 ; SAR Peak: 1.07 W/kg

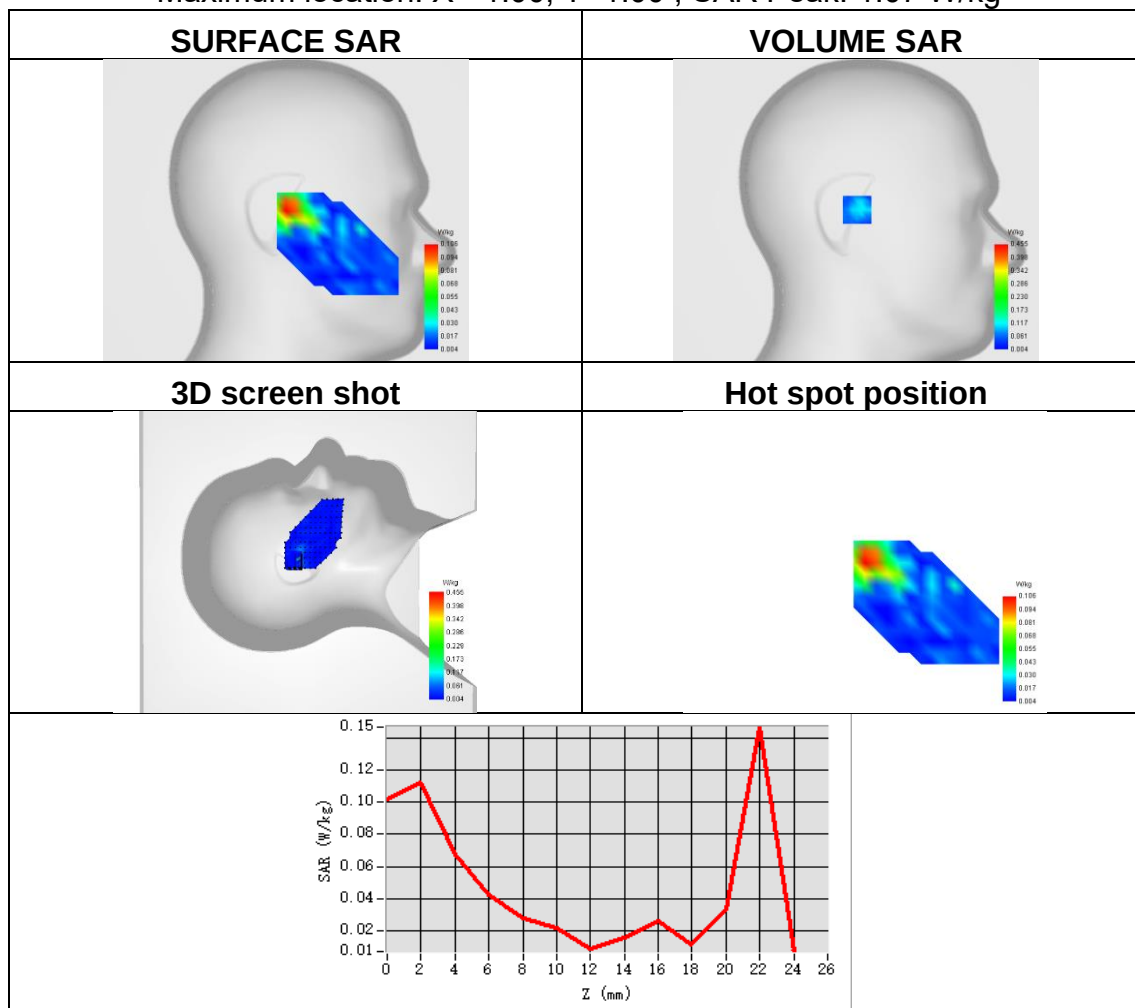




Plot 20:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5240
SAR 10g (W/Kg)	0.024
SAR 1g (W/Kg)	0.051
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=6.00, Y=32.00 ; SAR Peak: 0.22 W/kg

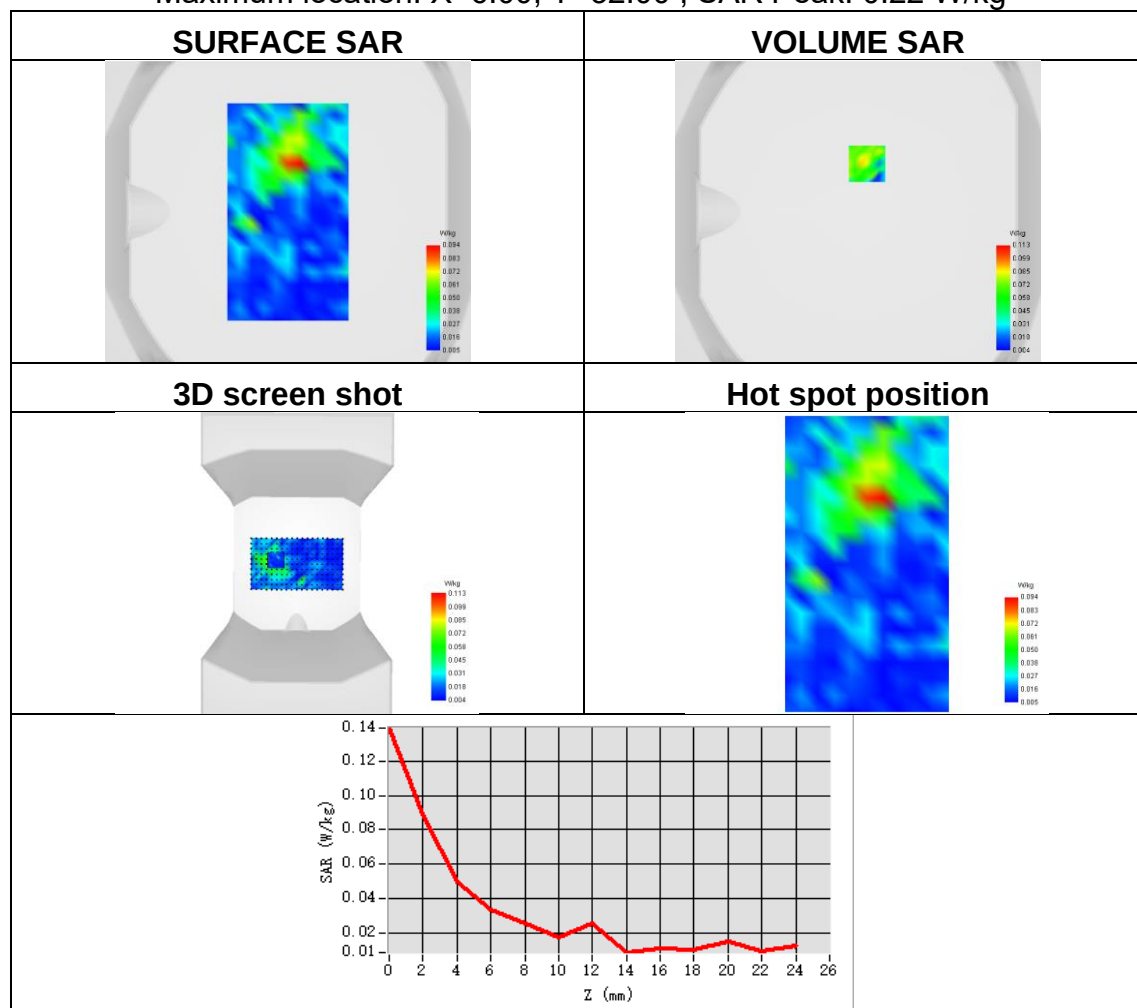




Plot 21:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5240
SAR 10g (W/Kg)	0.223
SAR 1g (W/Kg)	0.498
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-12.00, Y=0.00 ; SAR Peak: 3.33 W/kg

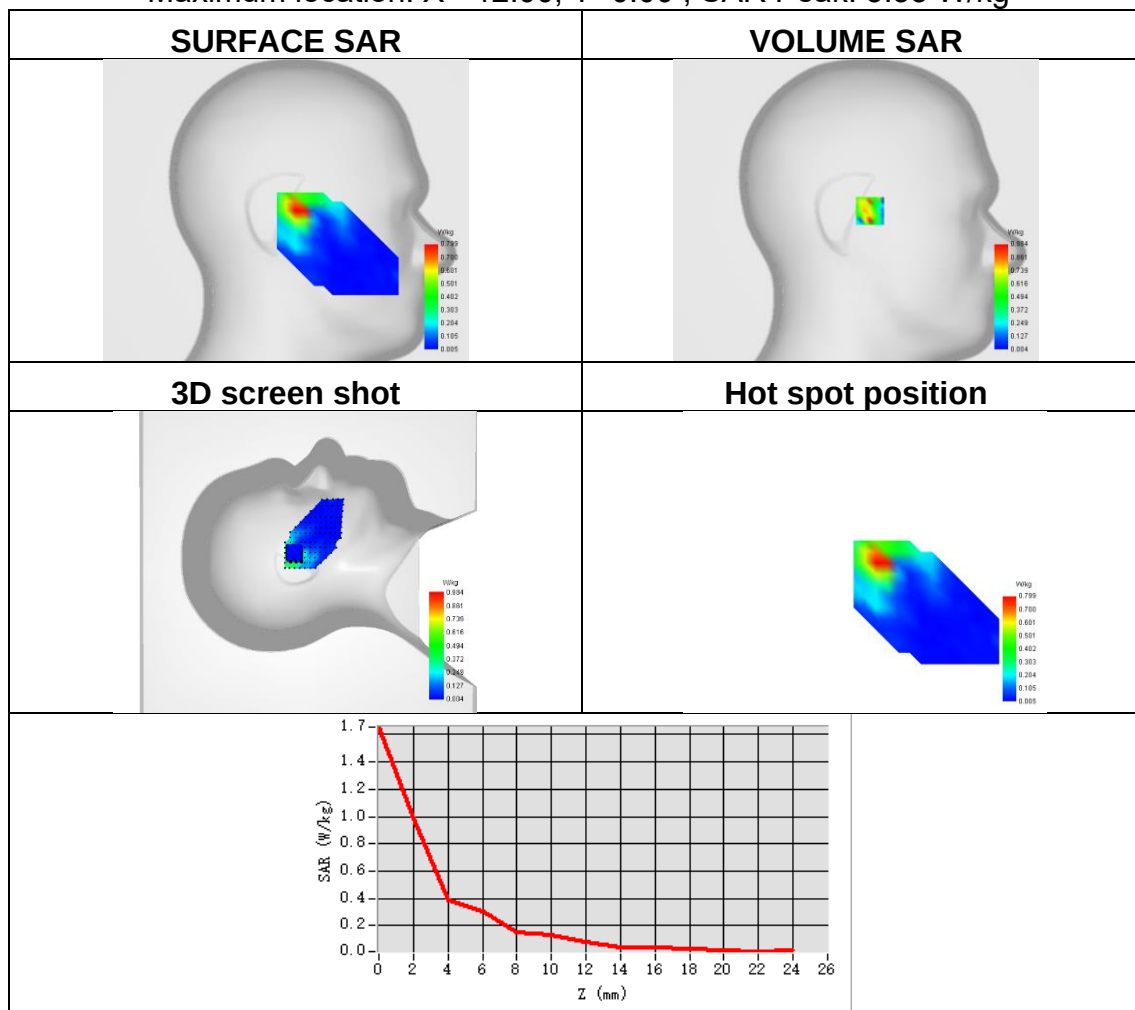




Plot 22:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5240
SAR 10g (W/Kg)	0.094
SAR 1g (W/Kg)	0.229
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-22.00, Y=2.00 ; SAR Peak: 0.65 W/kg

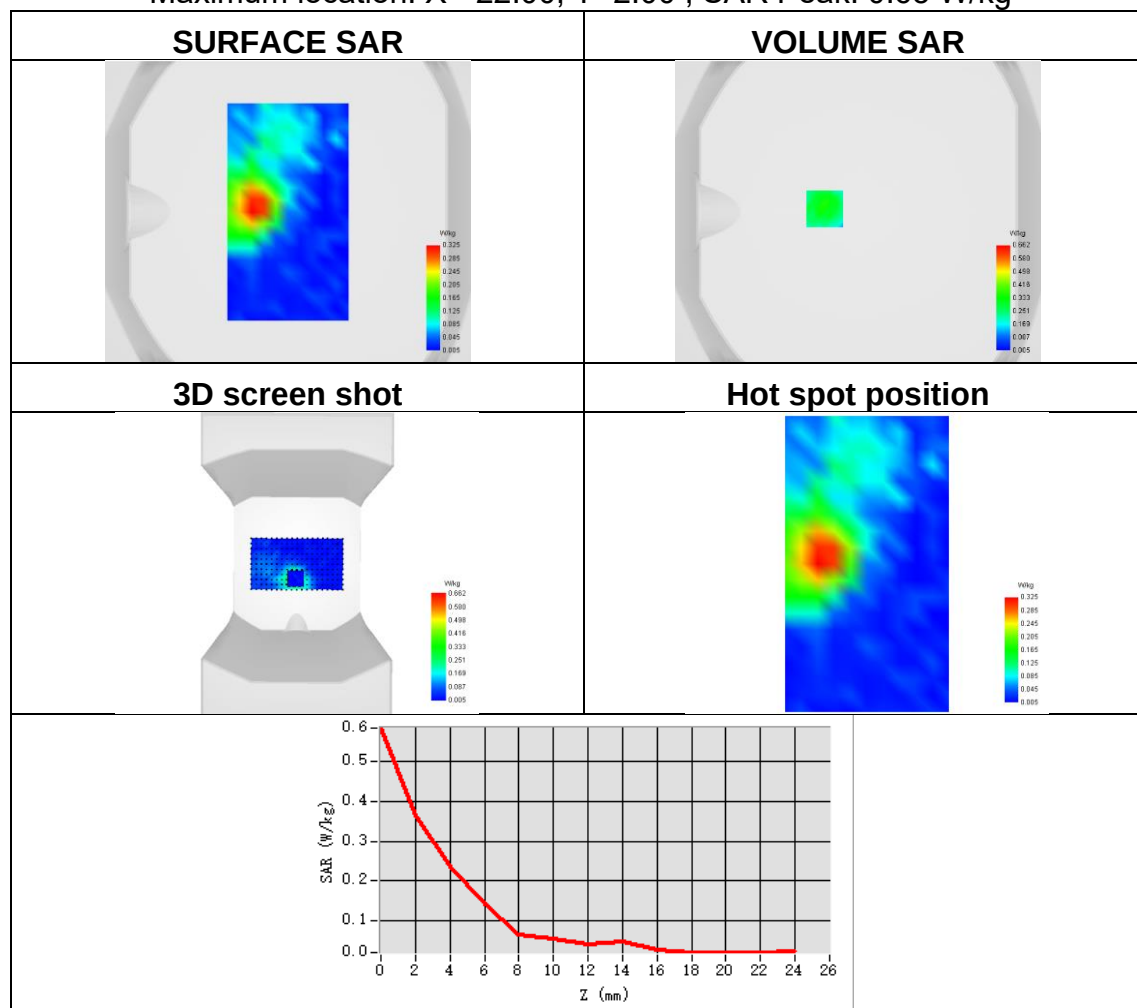




Plot 23:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5230
SAR 10g (W/Kg)	0.126
SAR 1g (W/Kg)	0.283
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-23.00, Y=-8.00 ; SAR Peak: 1.27 W/kg

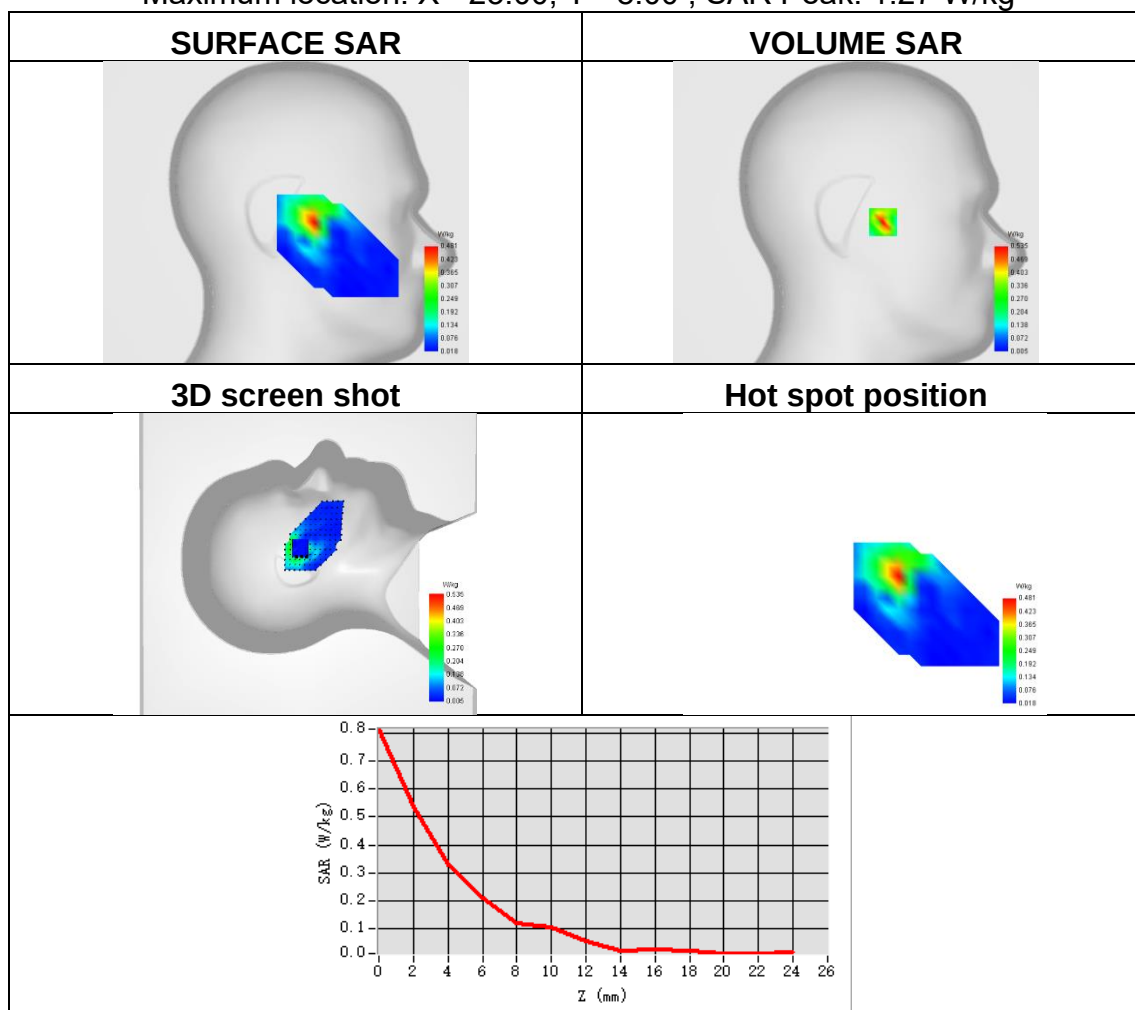




Plot 24:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5230
SAR 10g (W/Kg)	0.059
SAR 1g (W/Kg)	0.149
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-8.00, Y=15.00 ; SAR Peak: 0.61 W/kg

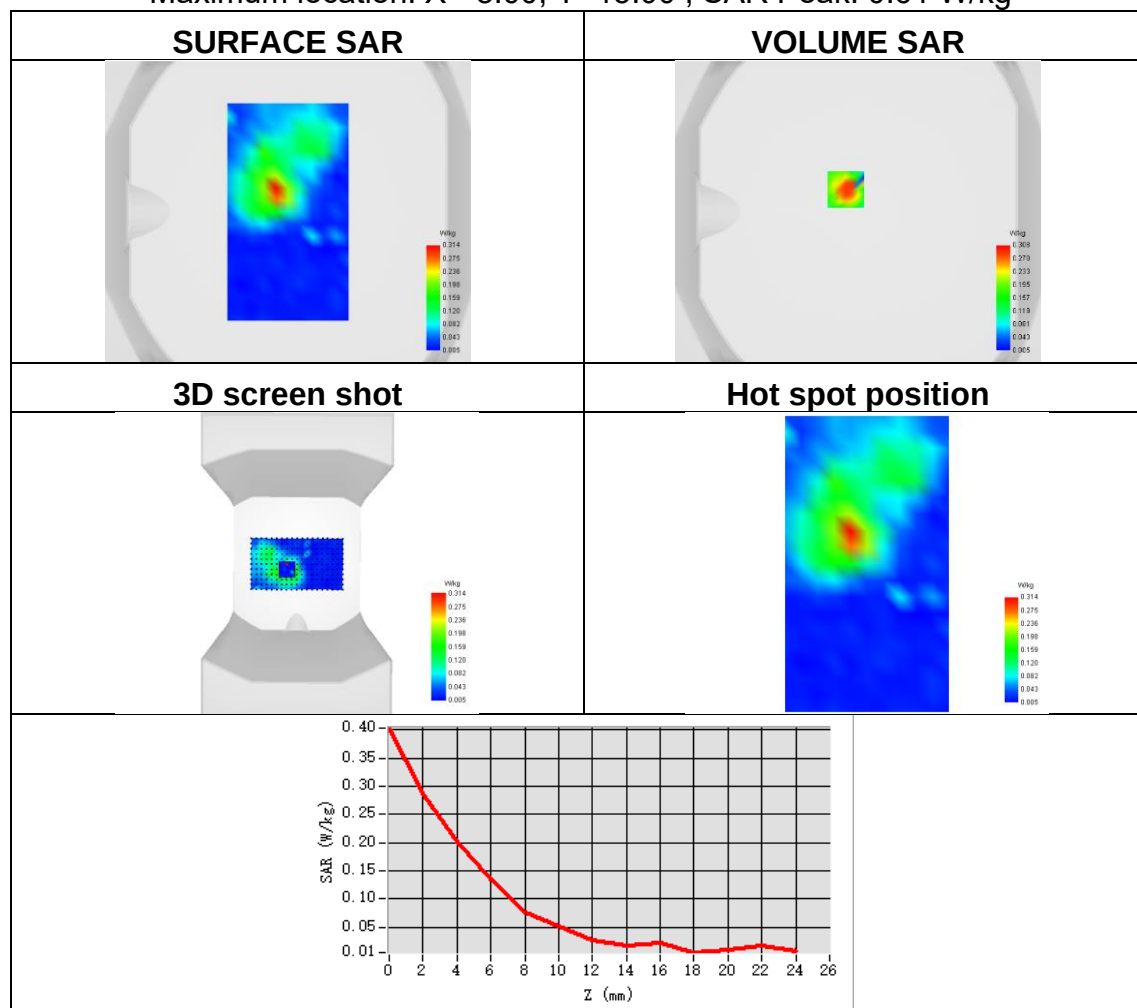




Plot 25:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5230
SAR 10g (W/Kg)	0.143
SAR 1g (W/Kg)	0.292
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-23.00, Y=-8.00 ; SAR Peak: 1.28 W/kg

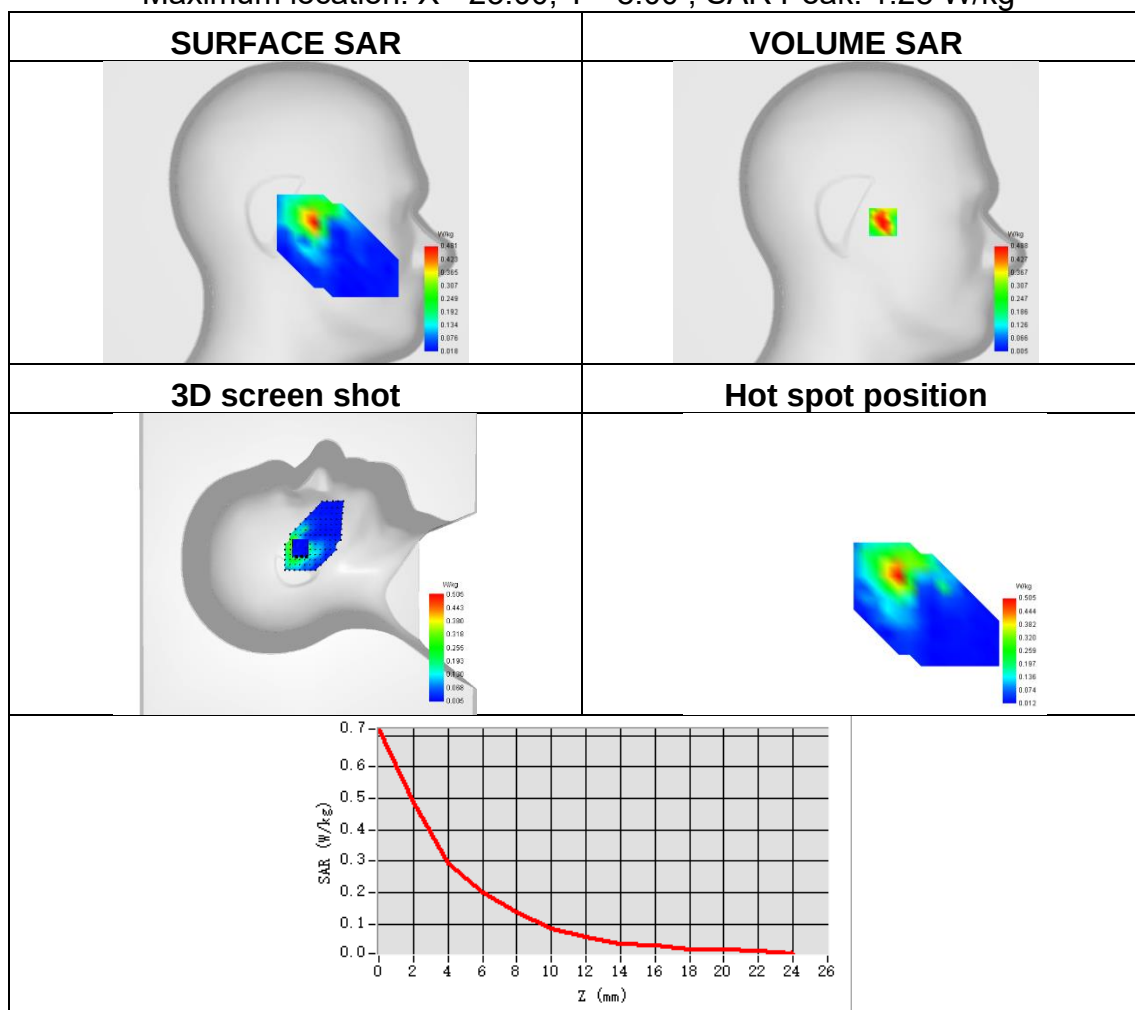




Plot 26:

Test Date	2025-09-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5230
SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.220
ConvF	1.58
Relative permittivity	36.22
Conductivity (S/m)	4.64

Maximum location: X=-7.00, Y=15.00 ; SAR Peak: 0.77 W/kg

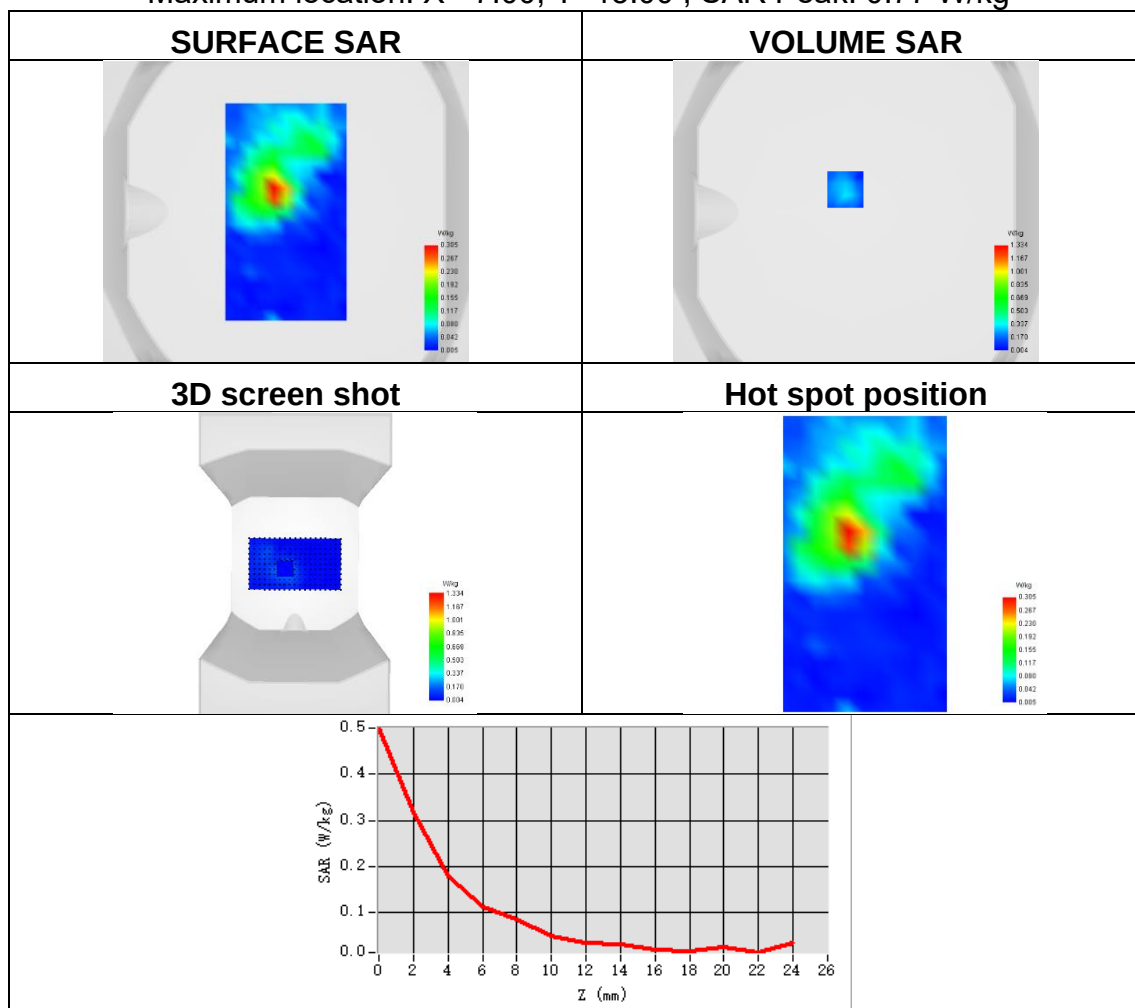




Plot 27:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5320
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.176
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=-17.00, Y=0.00 ; SAR Peak: 1.12 W/kg

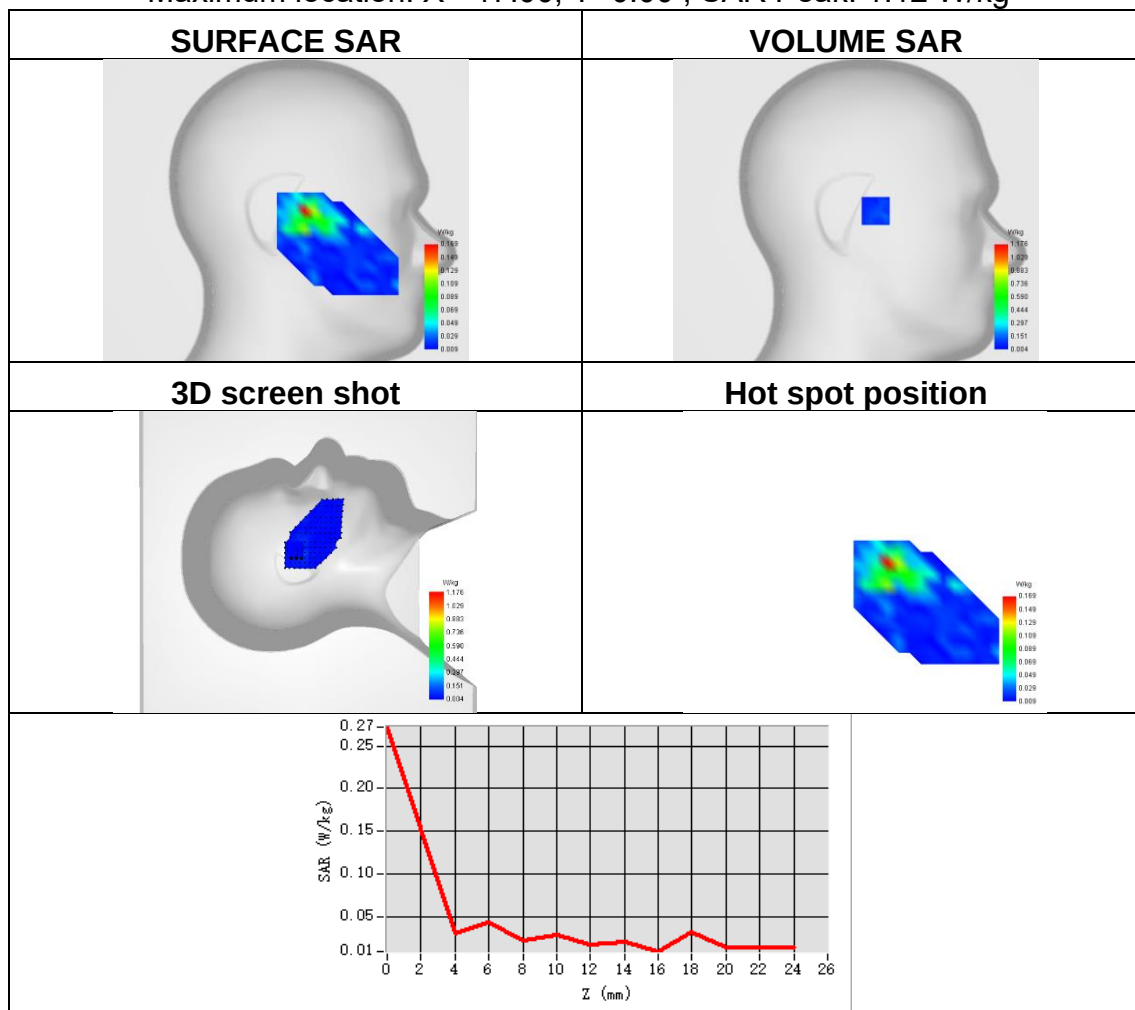




Plot 28:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5320
SAR 10g (W/Kg)	0.030
SAR 1g (W/Kg)	0.098
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=9.00, Y=31.00 ; SAR Peak: 1.58 W/kg

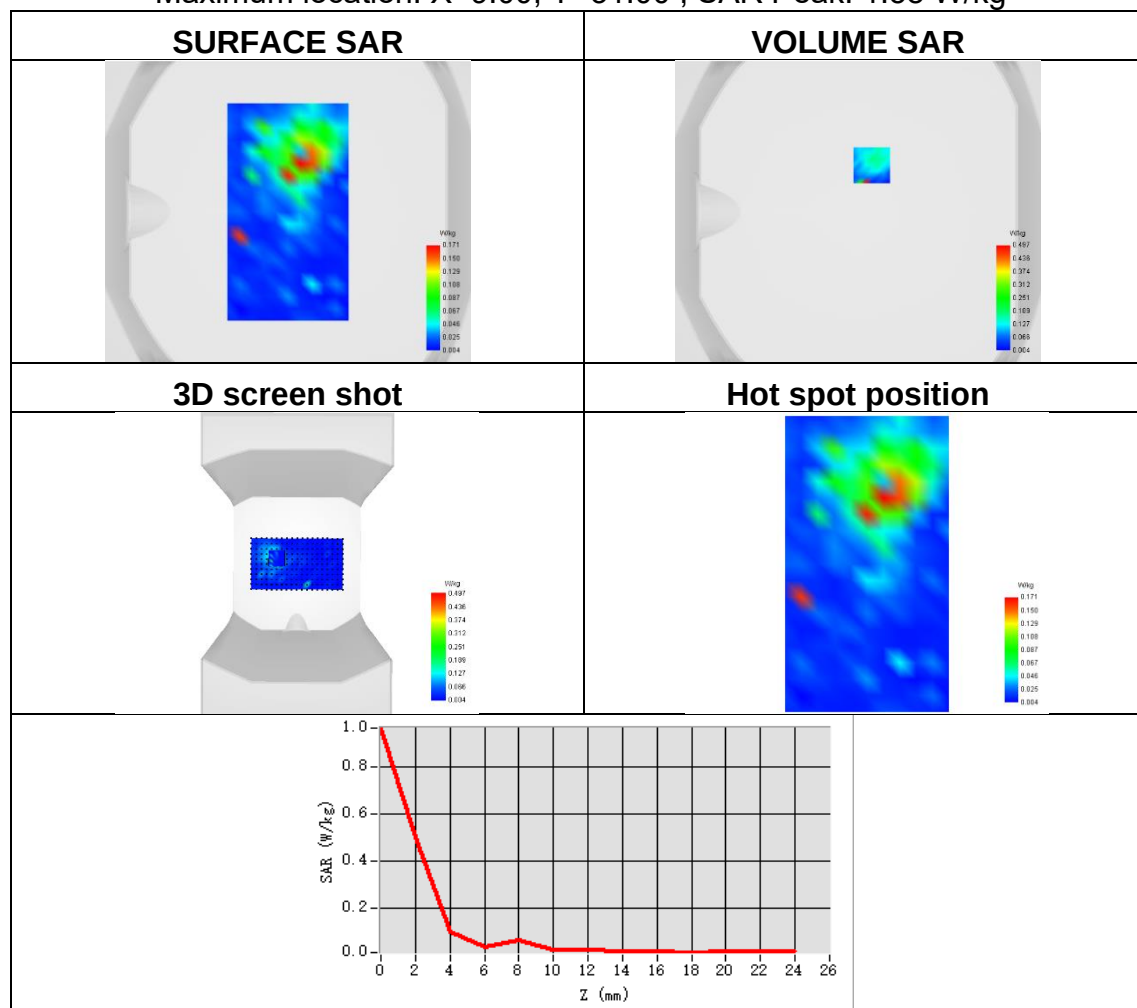




Plot 29:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5320
SAR 10g (W/Kg)	0.207
SAR 1g (W/Kg)	0.473
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=-8.00, Y=1.00 ; SAR Peak: 2.68 W/kg

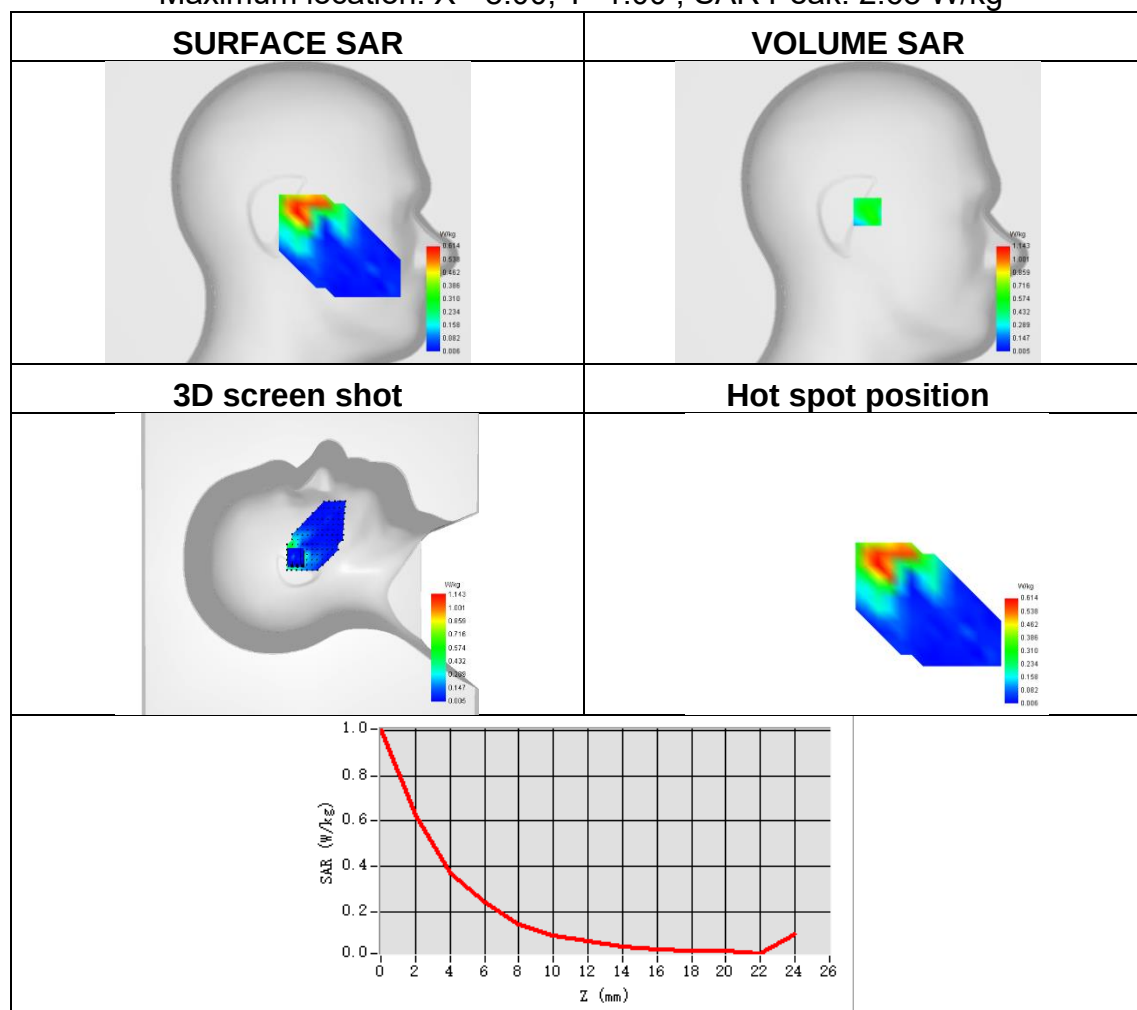




Plot 30:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5320
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.123
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=-16.00, Y=3.00 ; SAR Peak: 0.43 W/kg

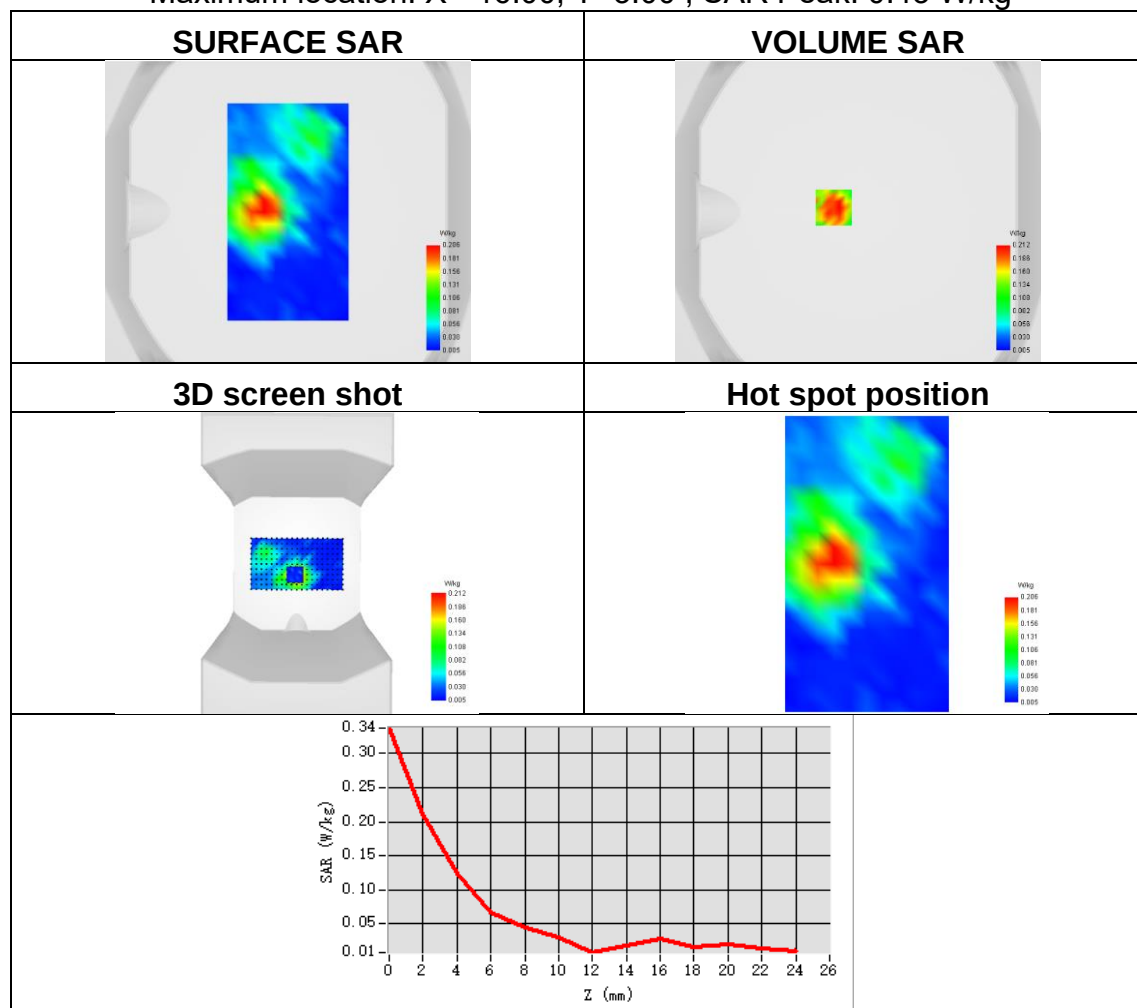




Plot 31:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5310
SAR 10g (W/Kg)	0.145
SAR 1g (W/Kg)	0.211
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=-16.00, Y=-1.00 ; SAR Peak: 2.28 W/kg

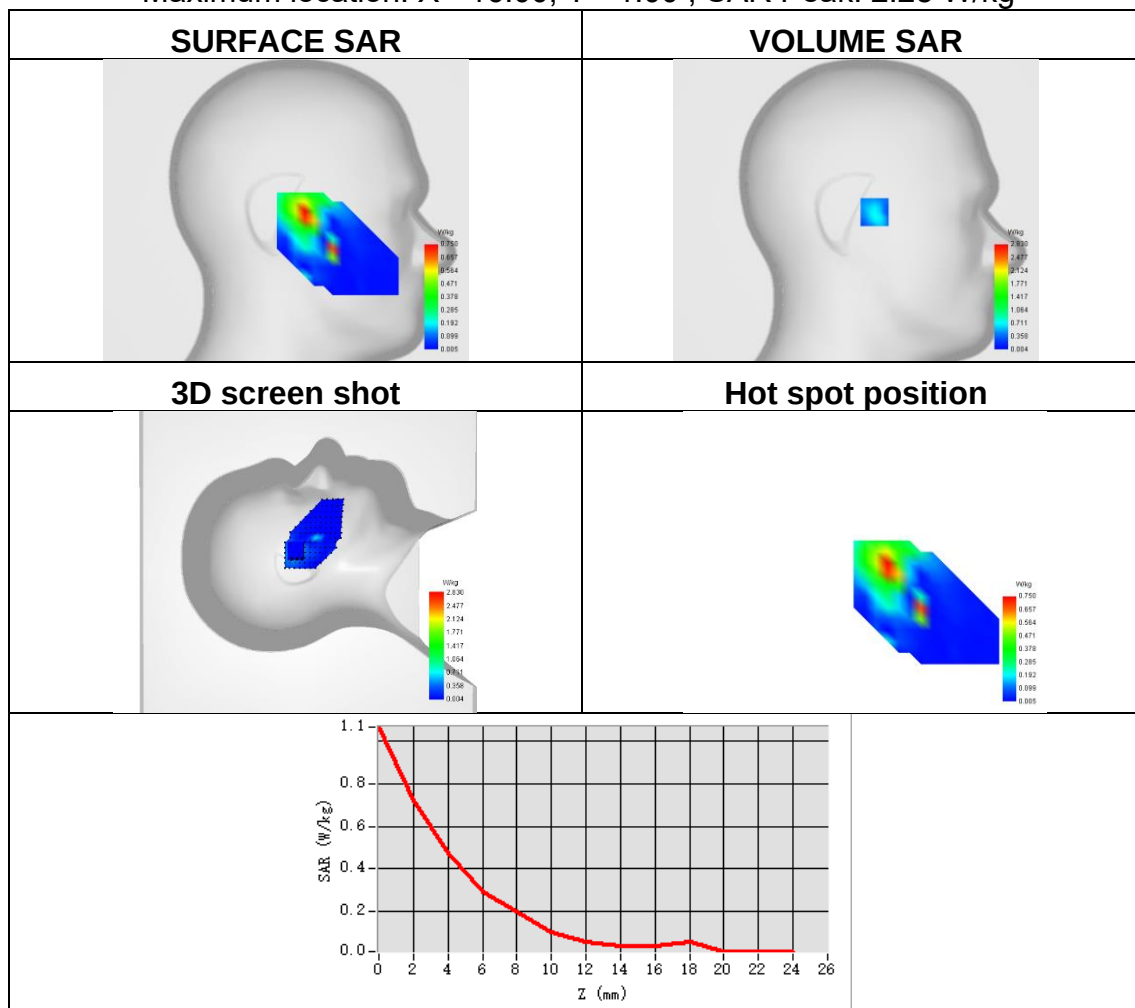




Plot 32:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5310
SAR 10g (W/Kg)	0.071
SAR 1g (W/Kg)	0.167
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=-30.00, Y=15.00 ; SAR Peak: 0.55 W/kg

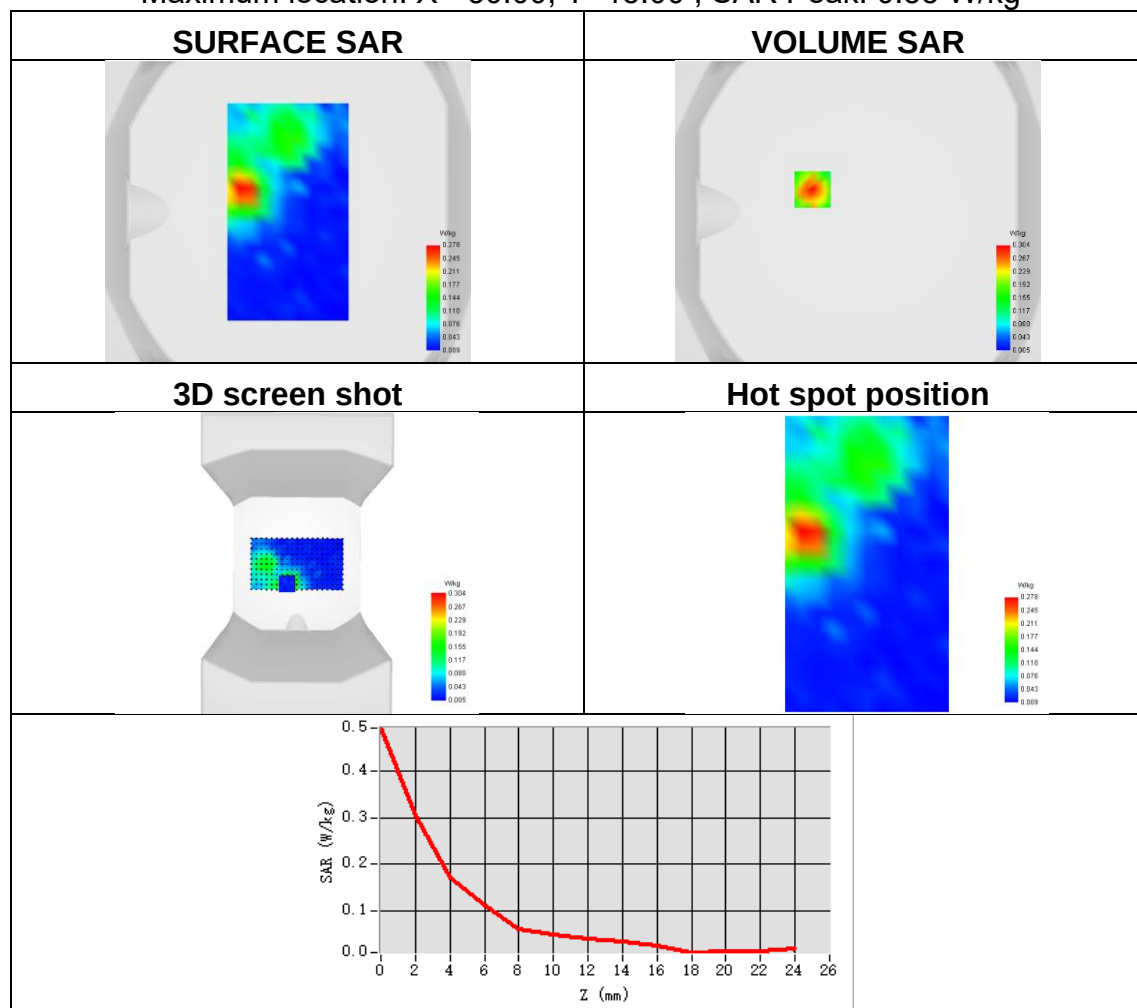




Plot 33:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2a
Signal	IEEE 802.11n
Frequency	5310
SAR 10g (W/Kg)	0.208
SAR 1g (W/Kg)	0.390
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=-15.00, Y=-1.00 ; SAR Peak: 3.00 W/kg

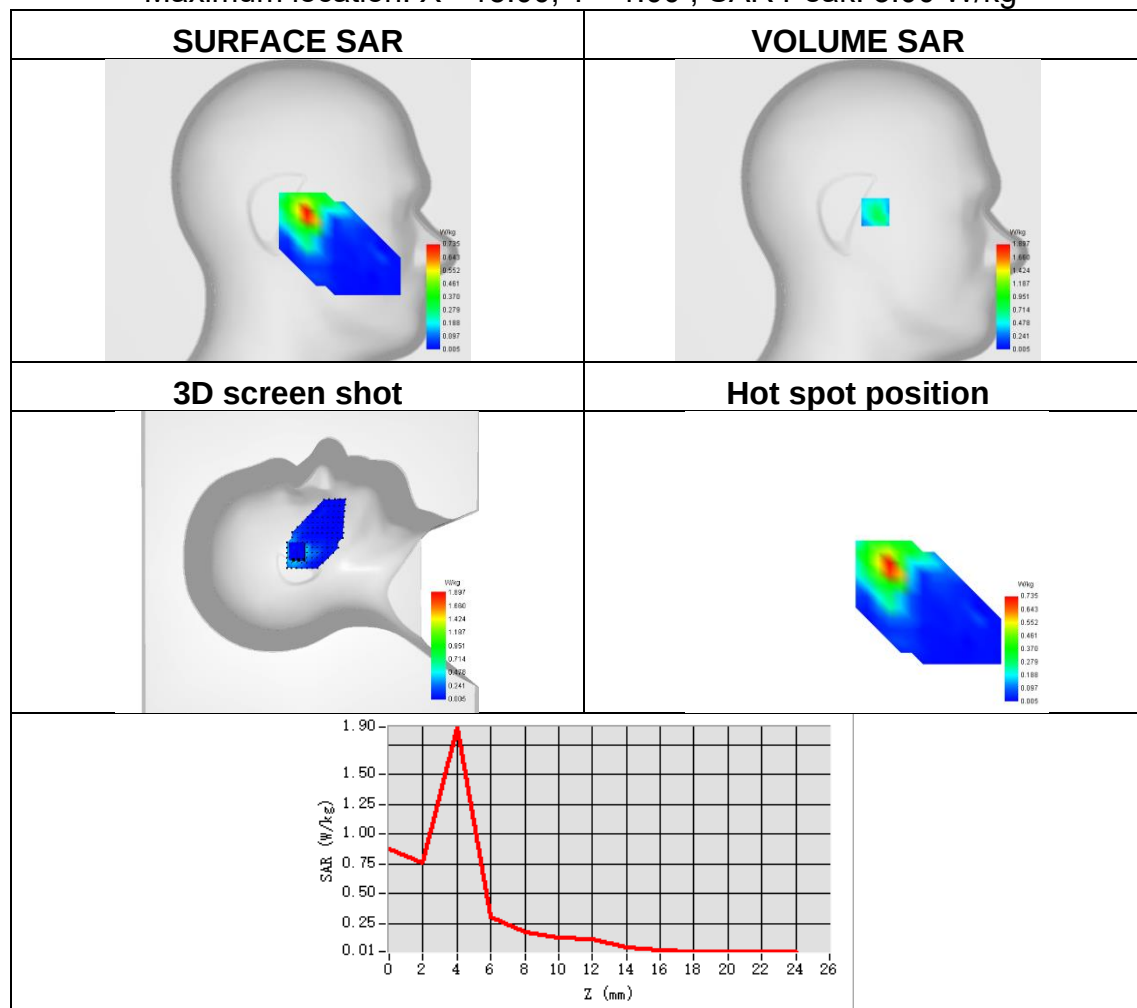




Plot 34:

Test Date	2025-09-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a
Signal	IEEE 802.11n
Frequency	5310
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.099
ConvF	1.60
Relative permittivity	35.88
Conductivity (S/m)	4.81

Maximum location: X=0.00, Y=32.00 ; SAR Peak: 0.33 W/kg

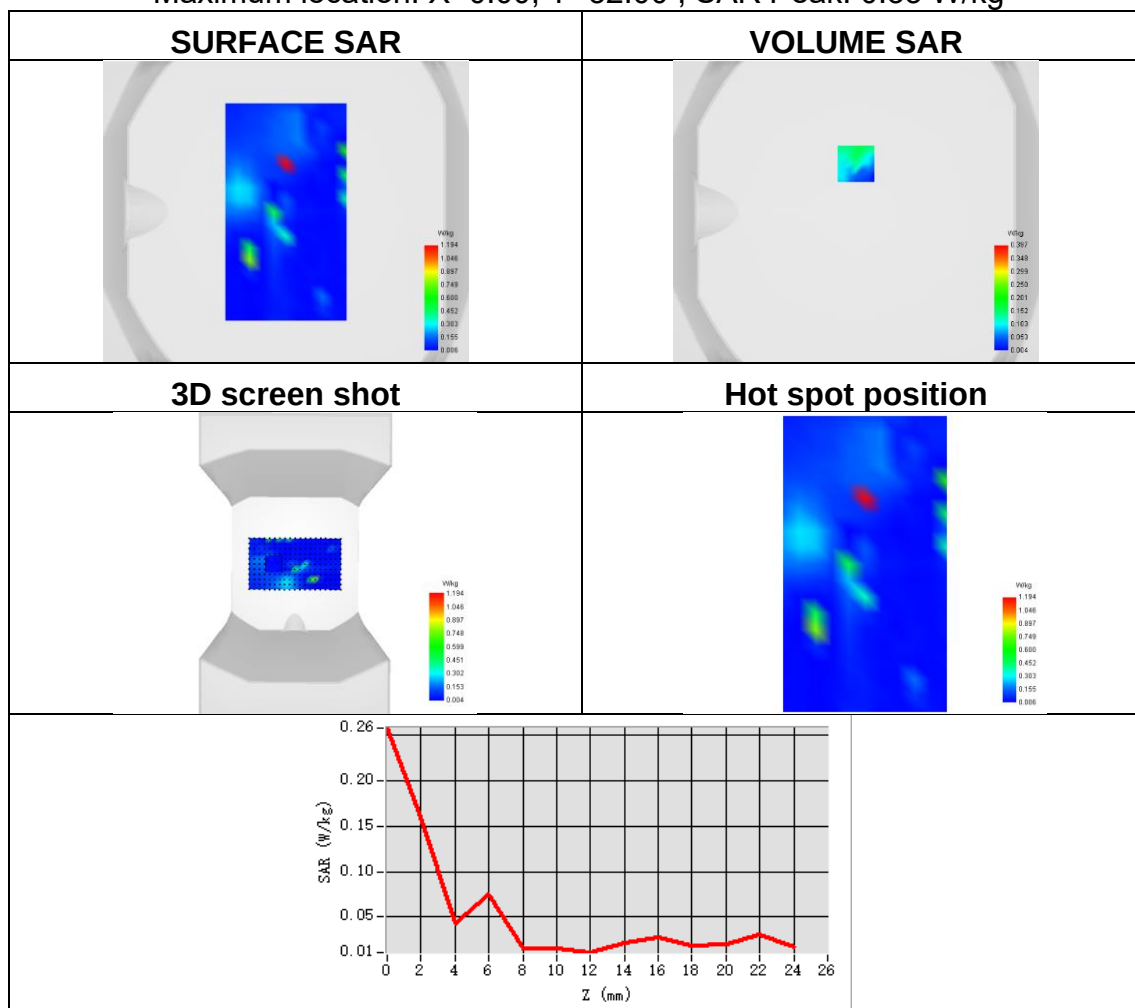




Plot 35:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.032
SAR 1g (W/Kg)	0.058
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.62 W/kg

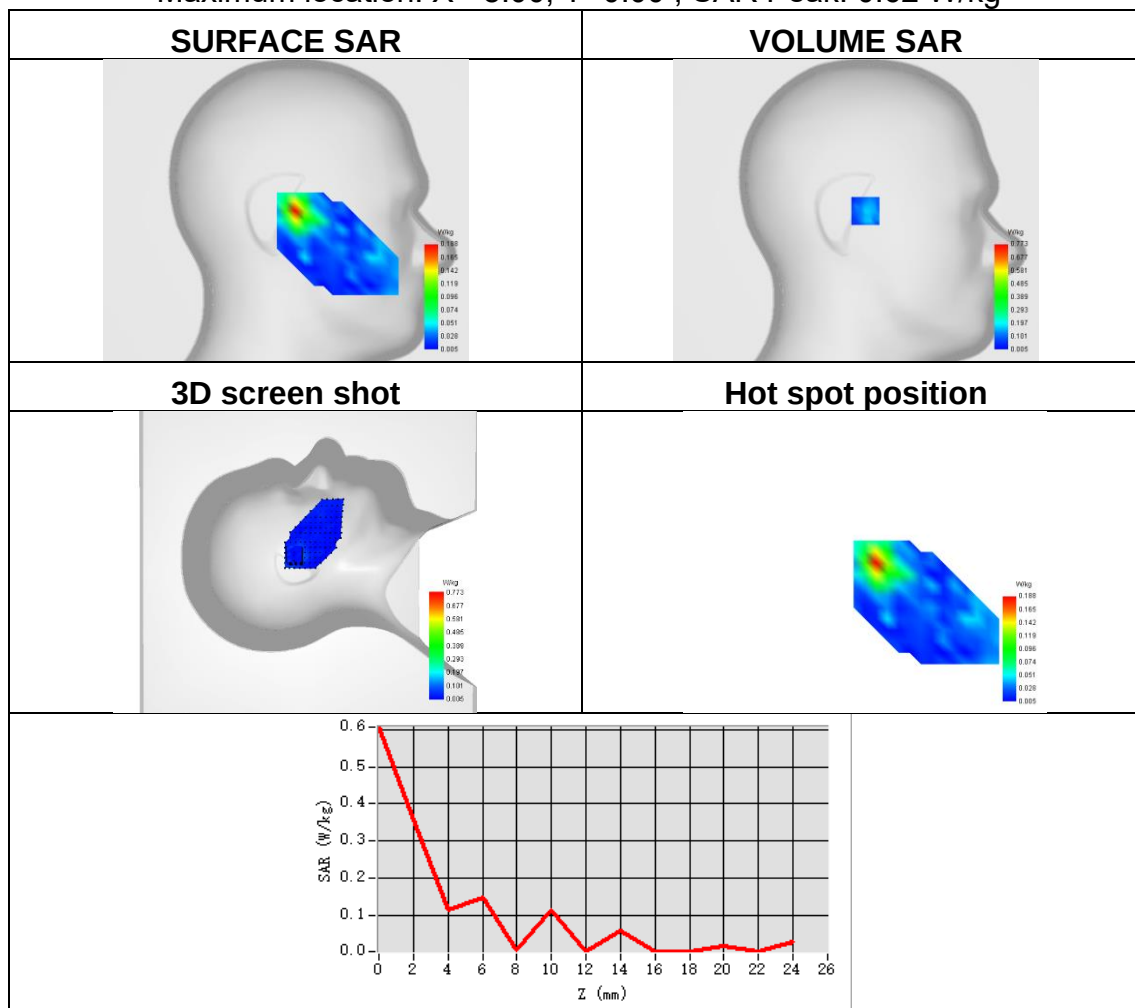




Plot 36:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.043
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=0.00, Y=-56.00 ; SAR Peak: 0.29 W/kg

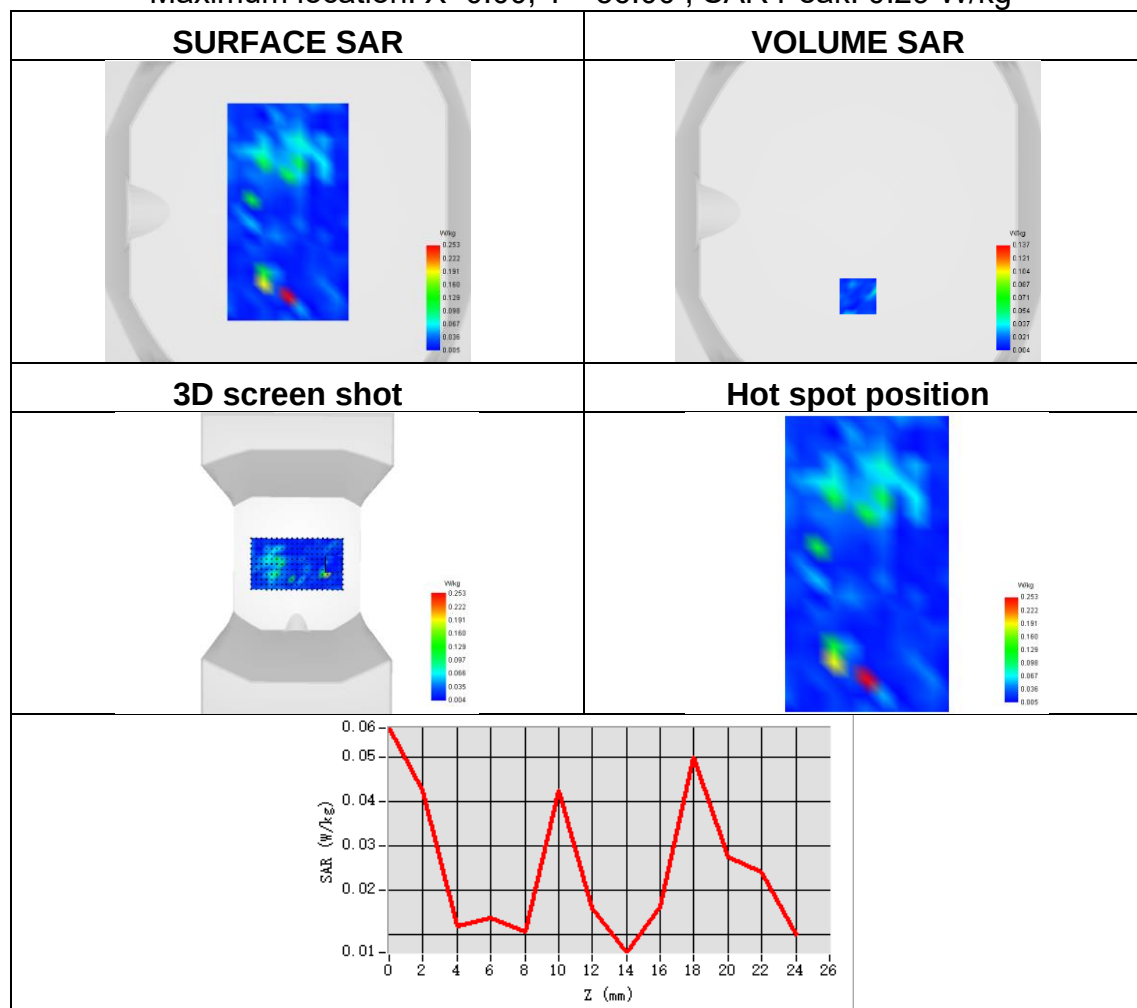




Plot 37:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.142
SAR 1g (W/Kg)	0.336
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-31.00, Y=-7.00 ; SAR Peak: 1.29 W/kg

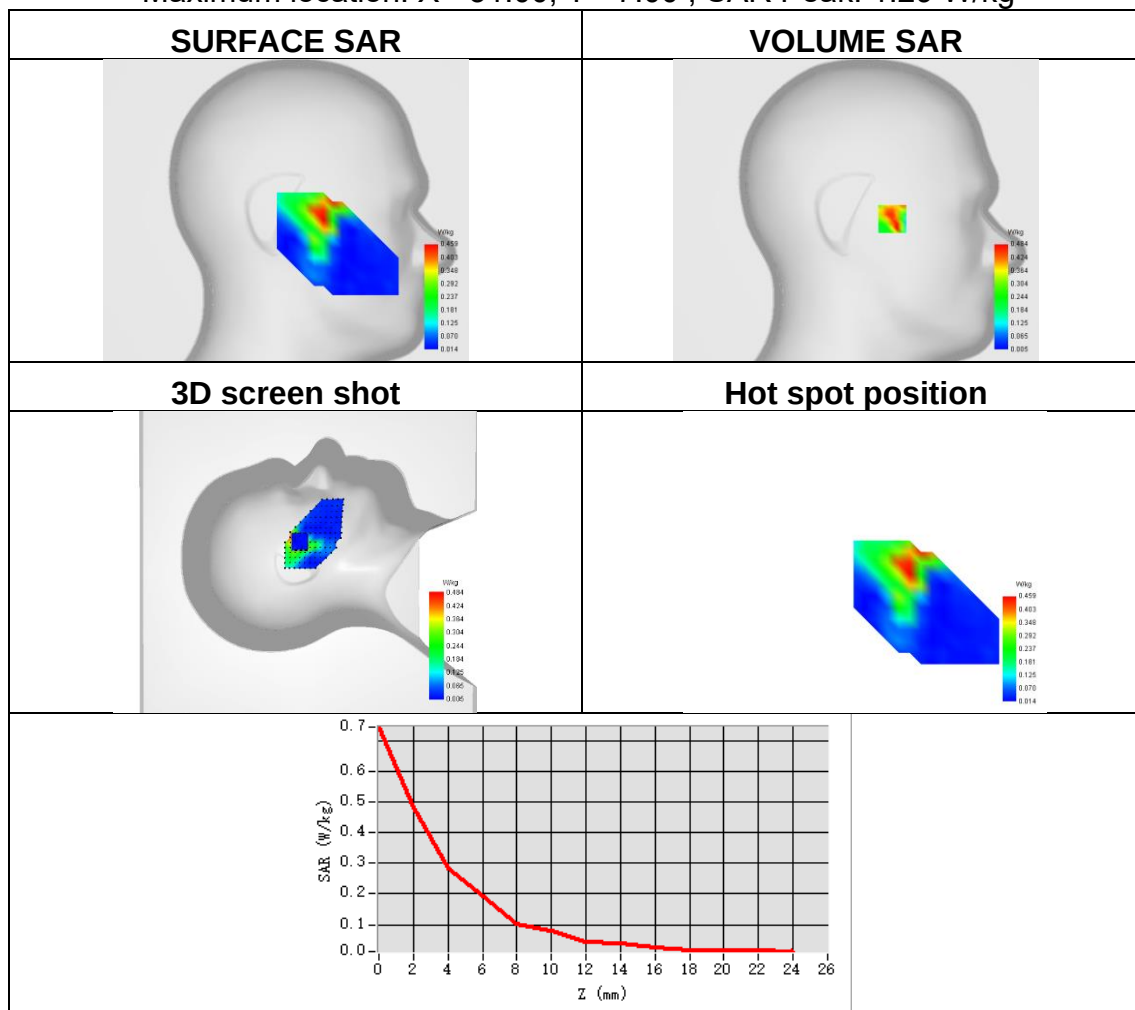




Plot 38:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.066
SAR 1g (W/Kg)	0.162
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-26.00, Y=6.00 ; SAR Peak: 0.47 W/kg

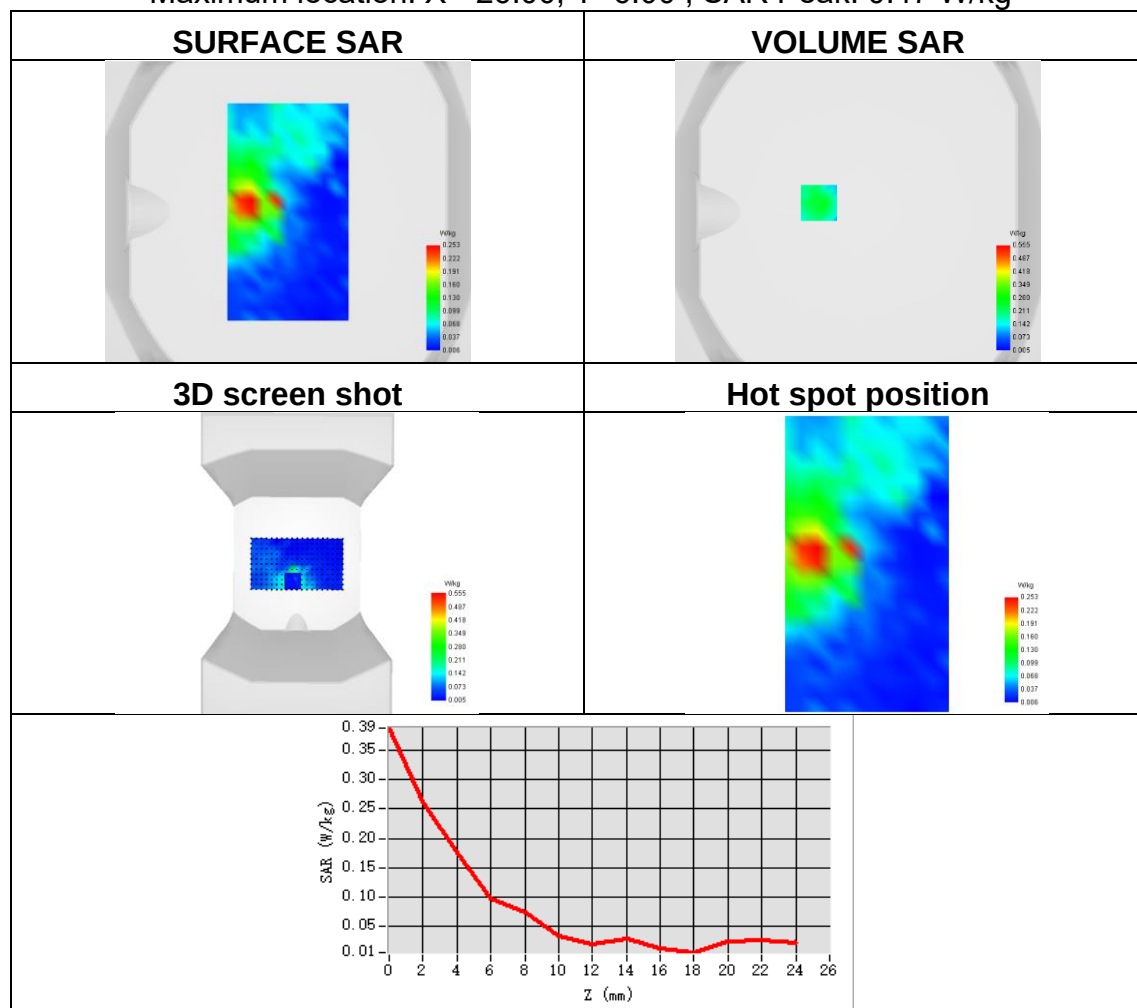




Plot 39:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5510
SAR 10g (W/Kg)	0.078
SAR 1g (W/Kg)	0.259
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-16.00, Y=-16.00 ; SAR Peak: 2.77 W/kg

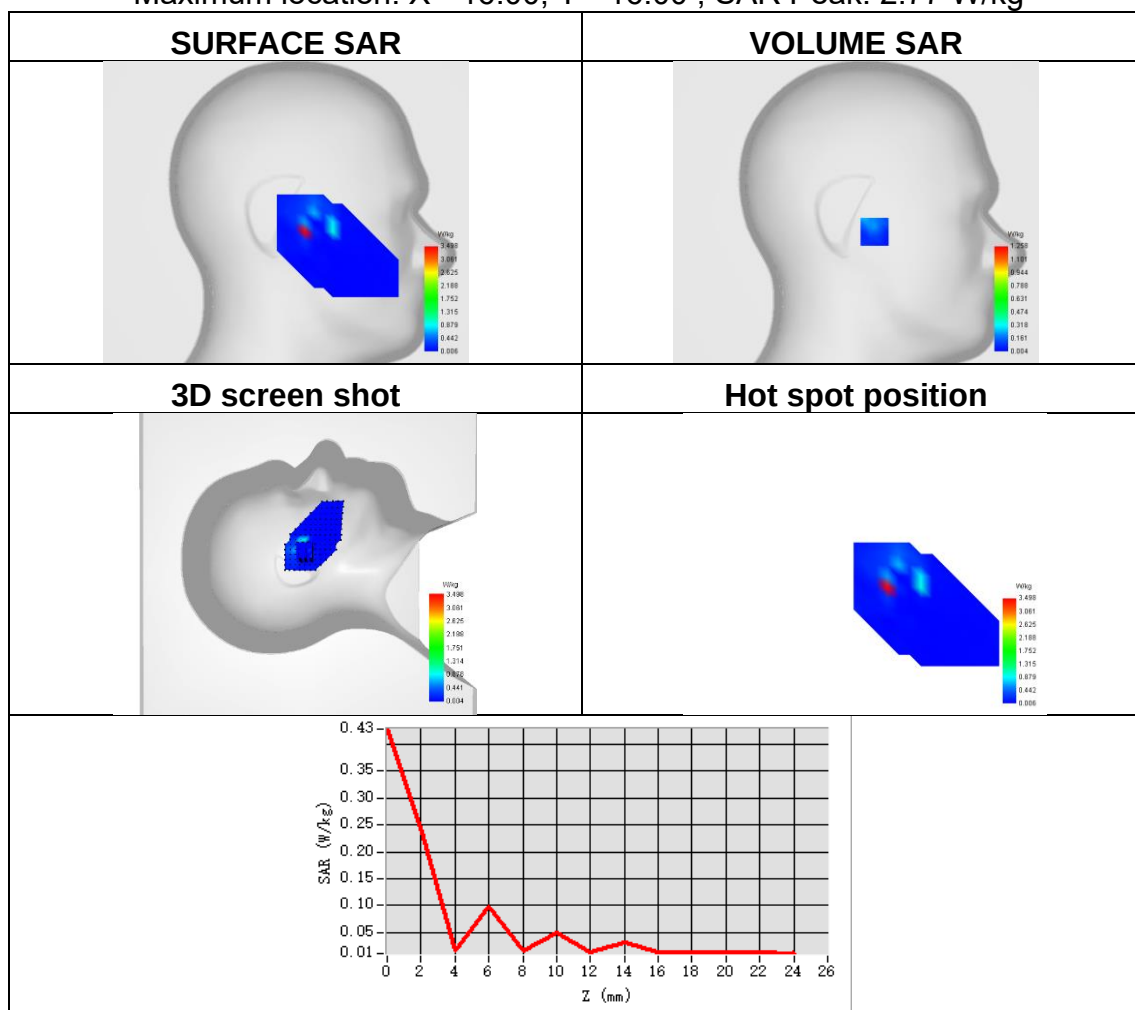




Plot 40:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5510
SAR 10g (W/Kg)	0.046
SAR 1g (W/Kg)	0.122
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 0.73 W/kg

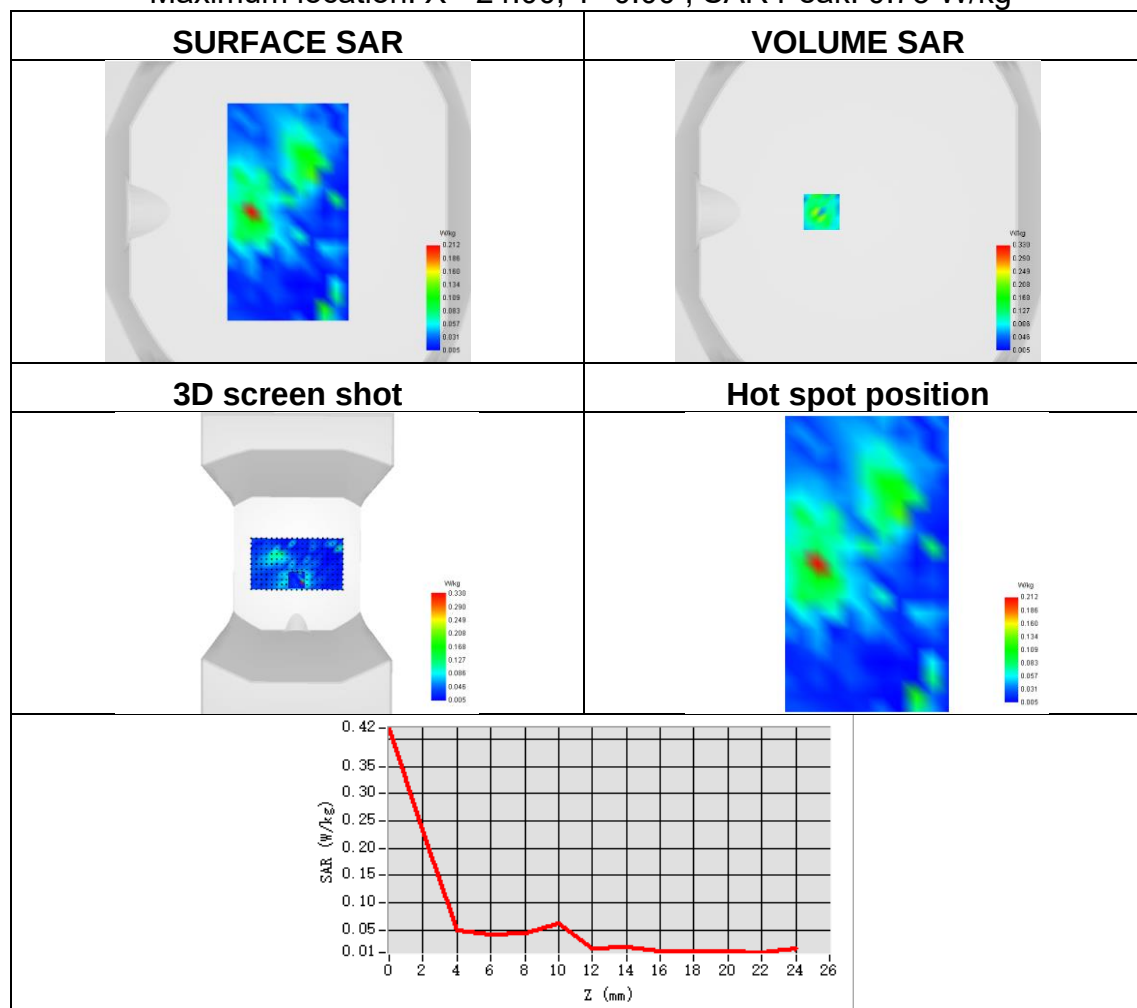




Plot 41:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5510
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.227
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-39.00, Y=-1.00 ; SAR Peak: 1.78 W/kg

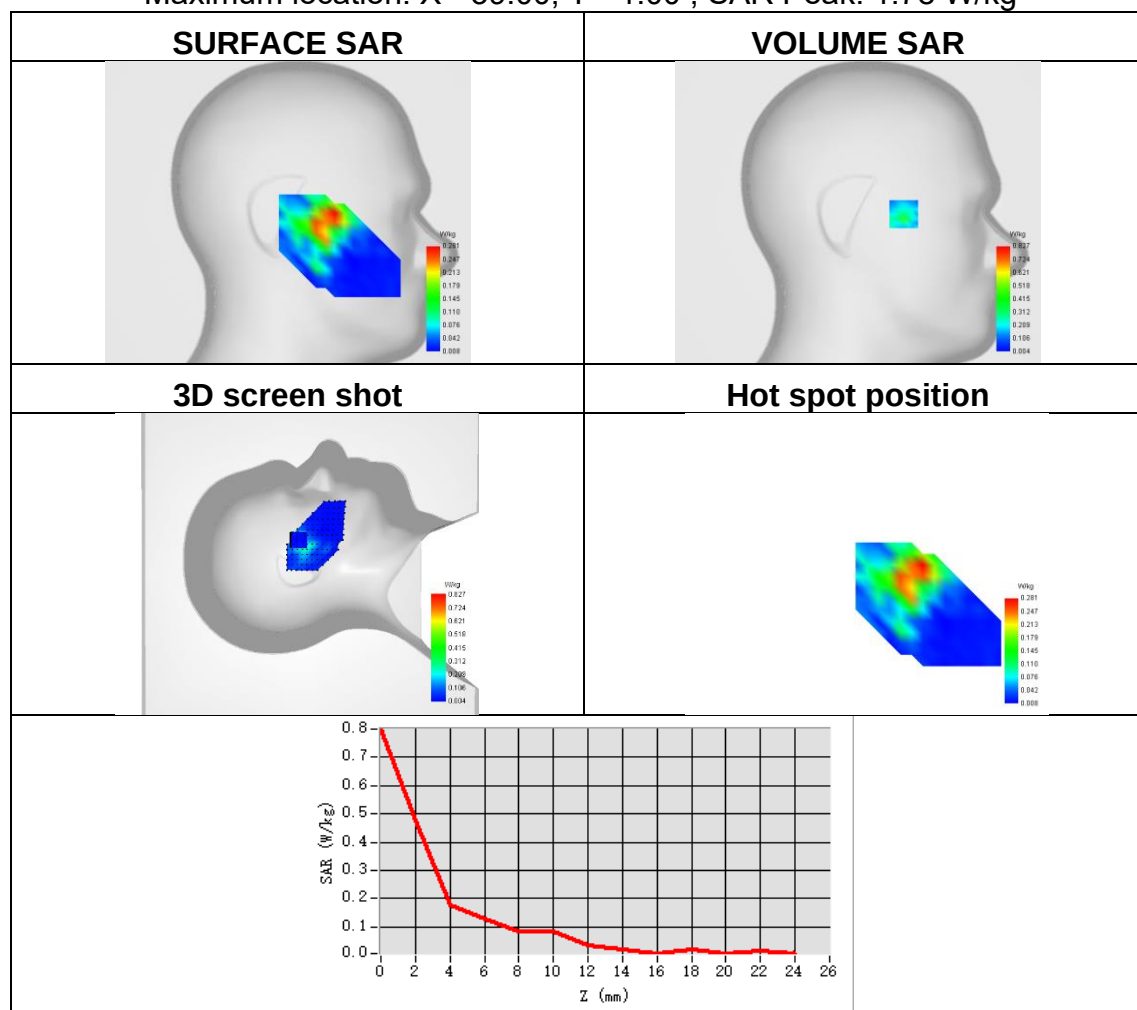




Plot 42:

Test Date	2025-09-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5510
SAR 10g (W/Kg)	0.036
SAR 1g (W/Kg)	0.158
ConvF	1.63
Relative permittivity	36.09
Conductivity (S/m)	5.07

Maximum location: X=-24.00, Y=-24.00 ; SAR Peak: 2.03 W/kg

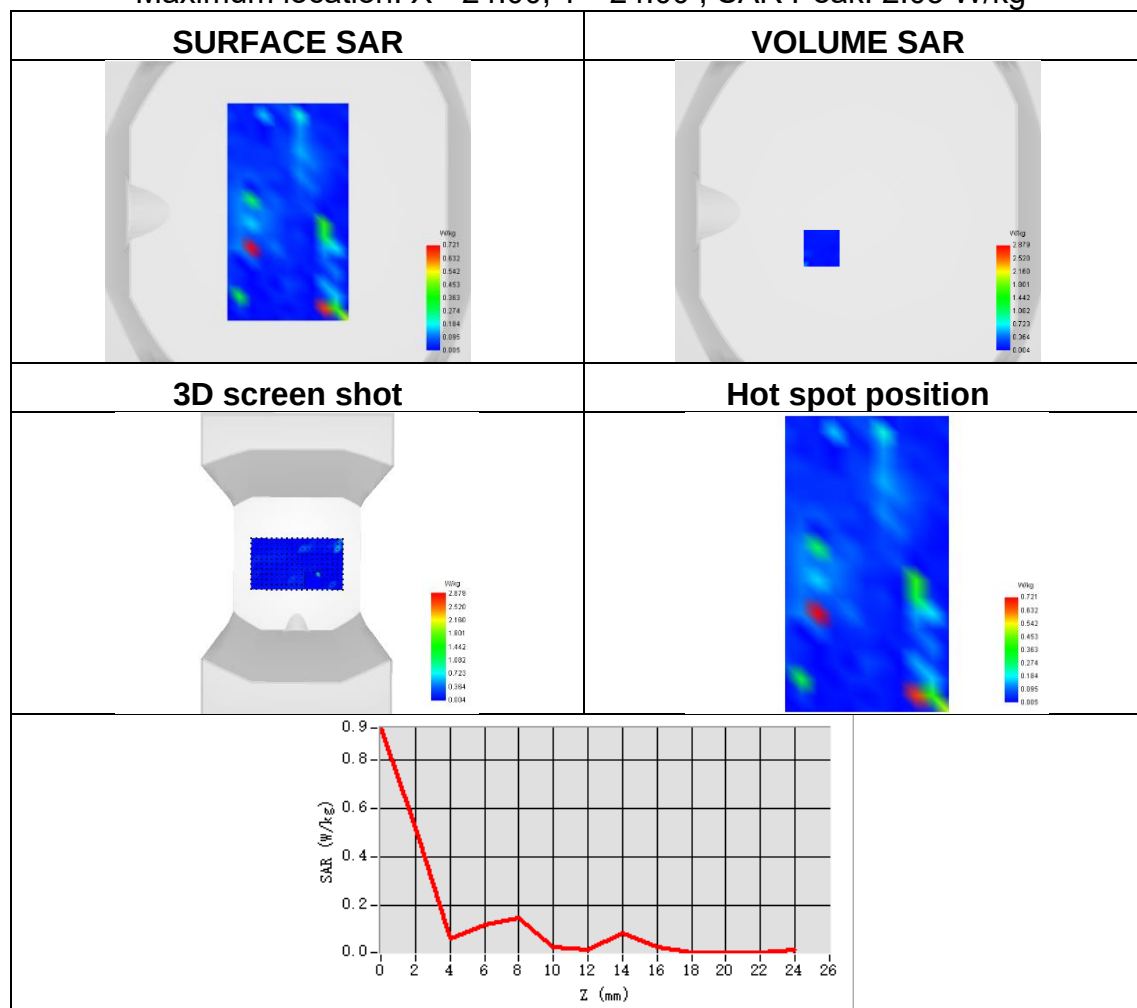




Plot 43:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.111
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-9.00, Y=8.00 ; SAR Peak: 0.56 W/kg

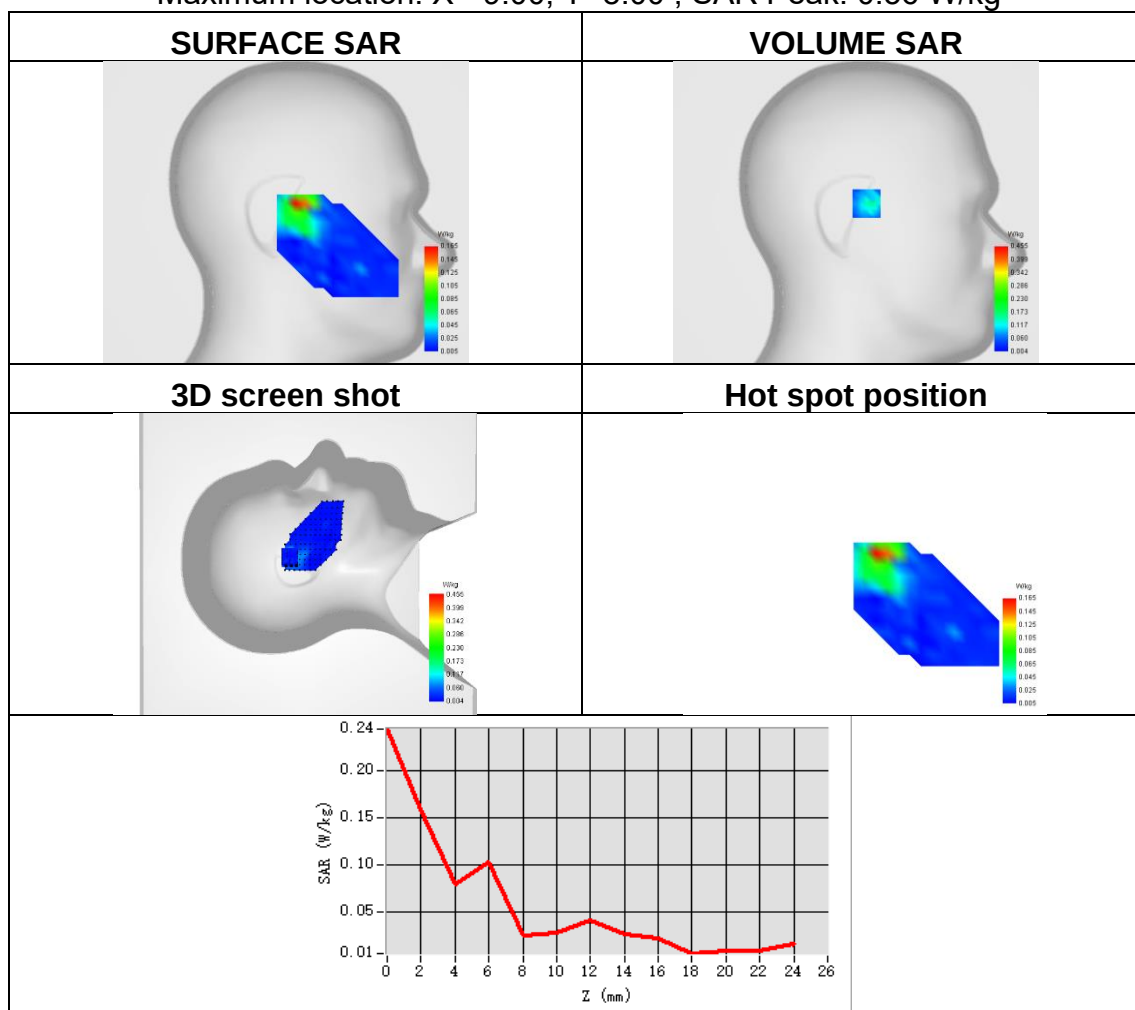




Plot 44:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.021
SAR 1g (W/Kg)	0.038
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-9.00, Y=40.00 ; SAR Peak: 0.22 W/kg

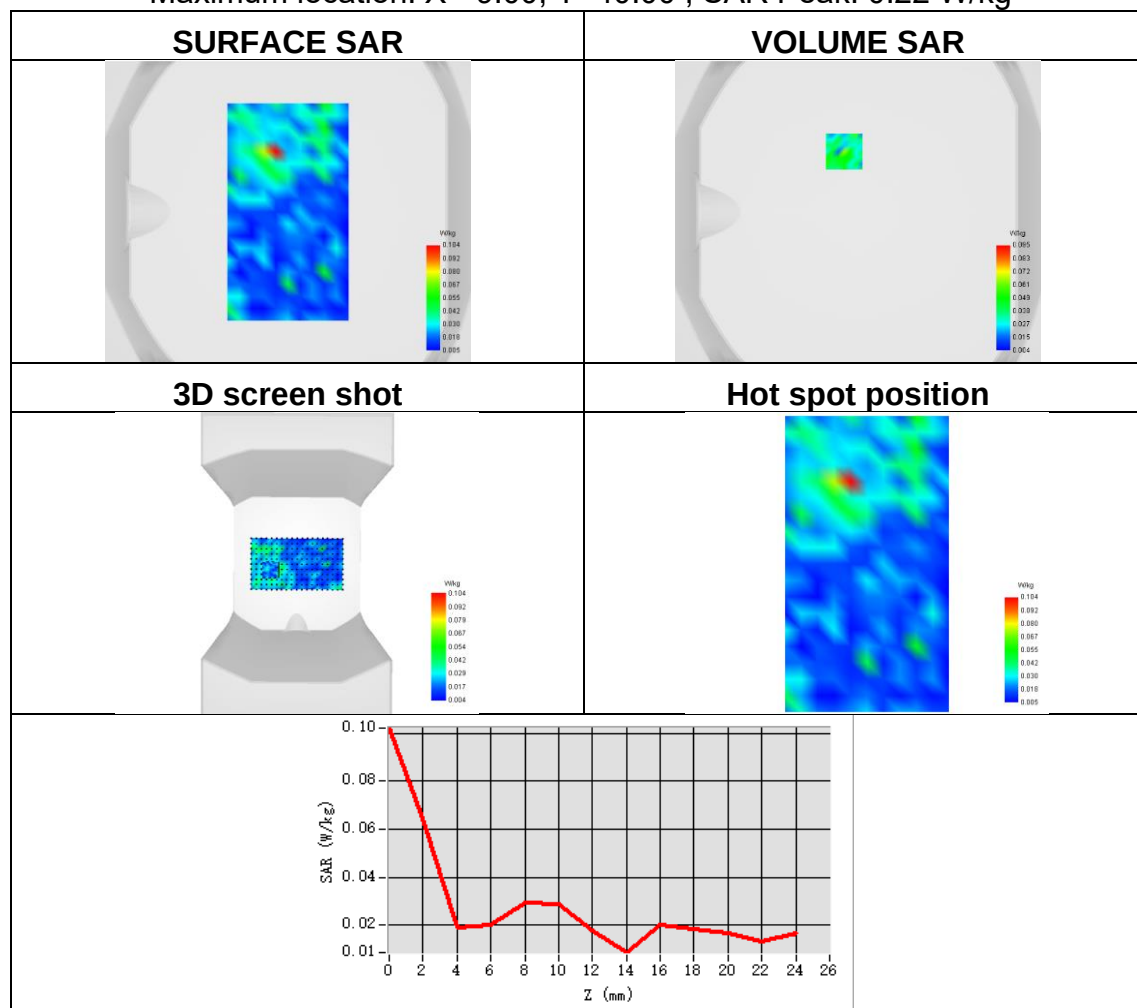




Plot 45:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.306
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-32.00, Y=0.00 ; SAR Peak: 1.90 W/kg

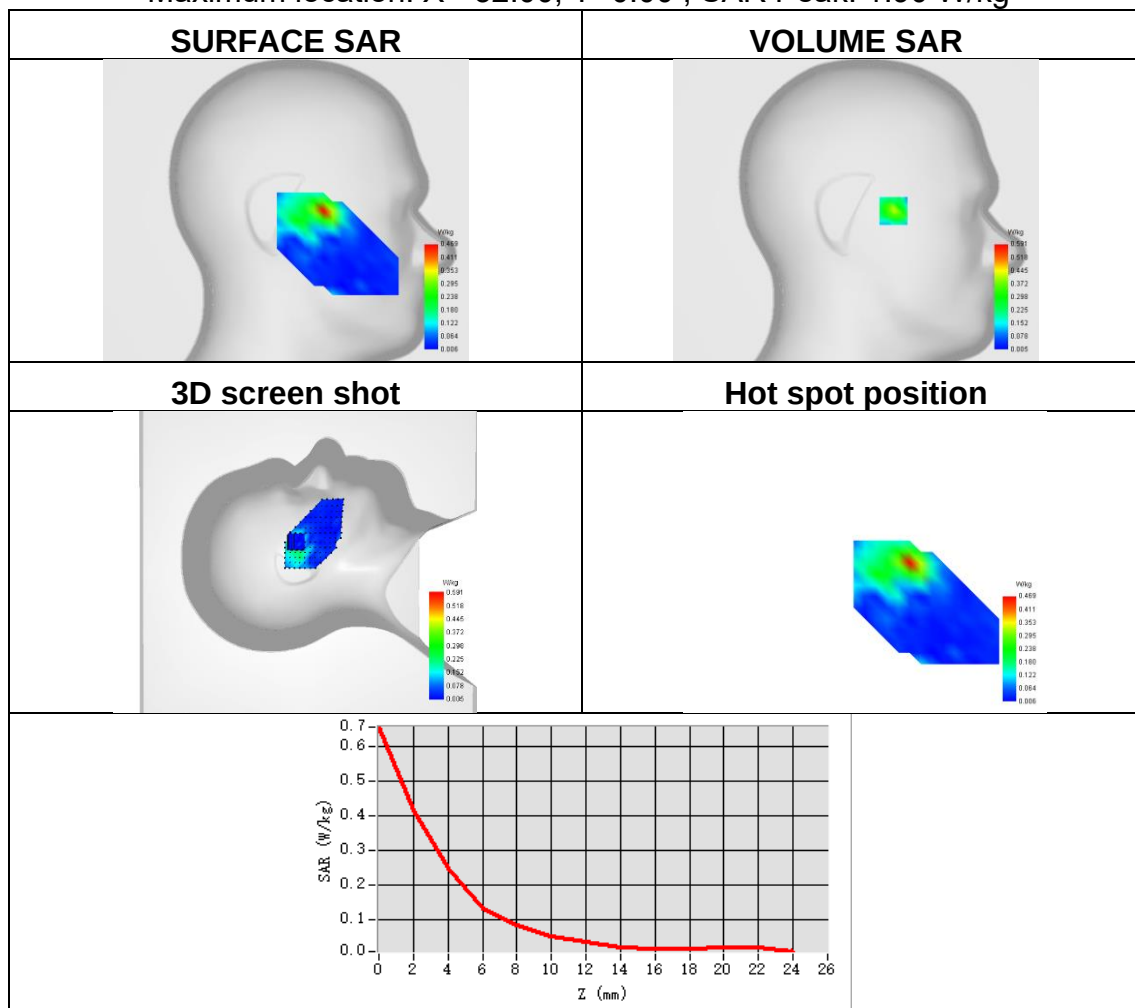




Plot 46:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.139
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 1.40 W/kg

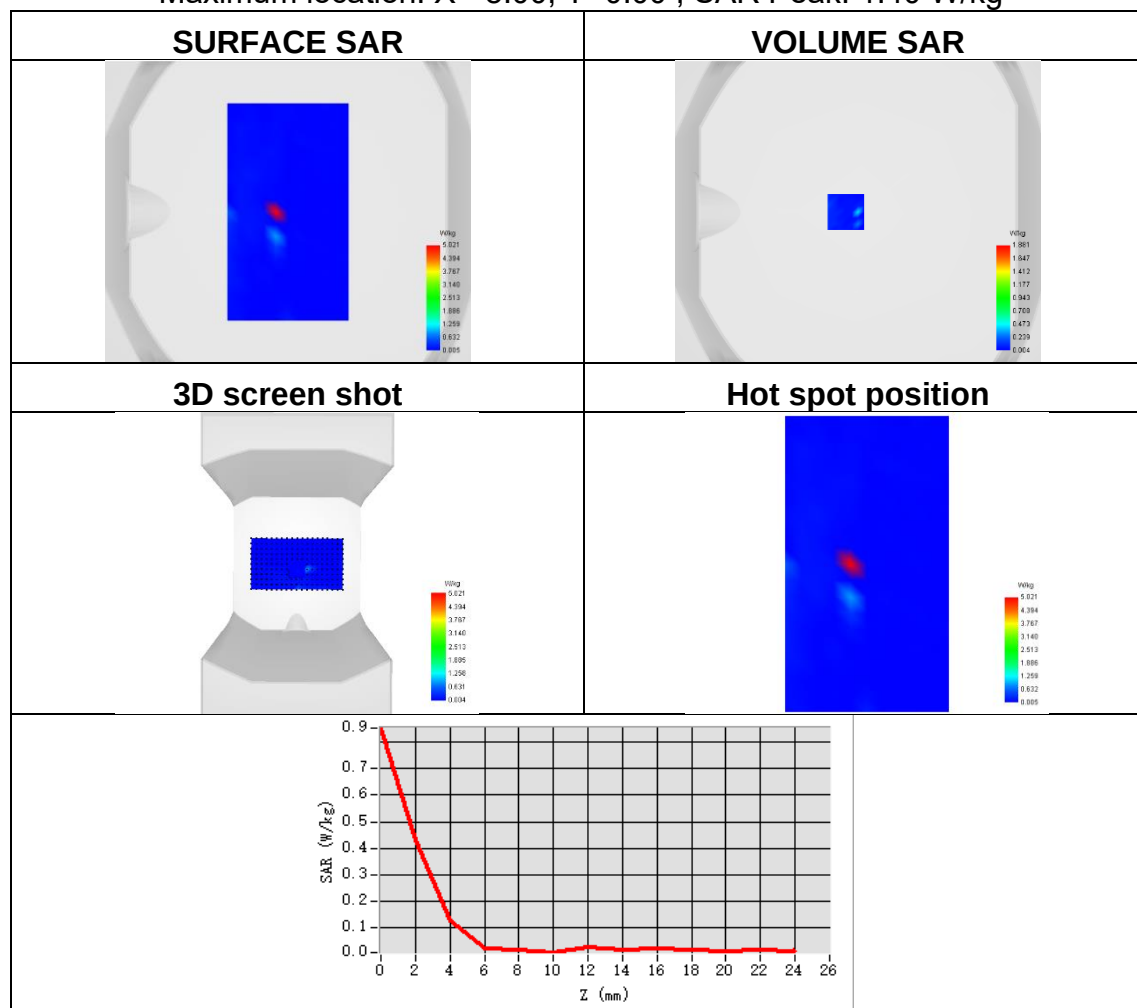




Plot 47:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5755
SAR 10g (W/Kg)	0.091
SAR 1g (W/Kg)	0.348
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-32.00, Y=1.00 ; SAR Peak: 7.44 W/kg

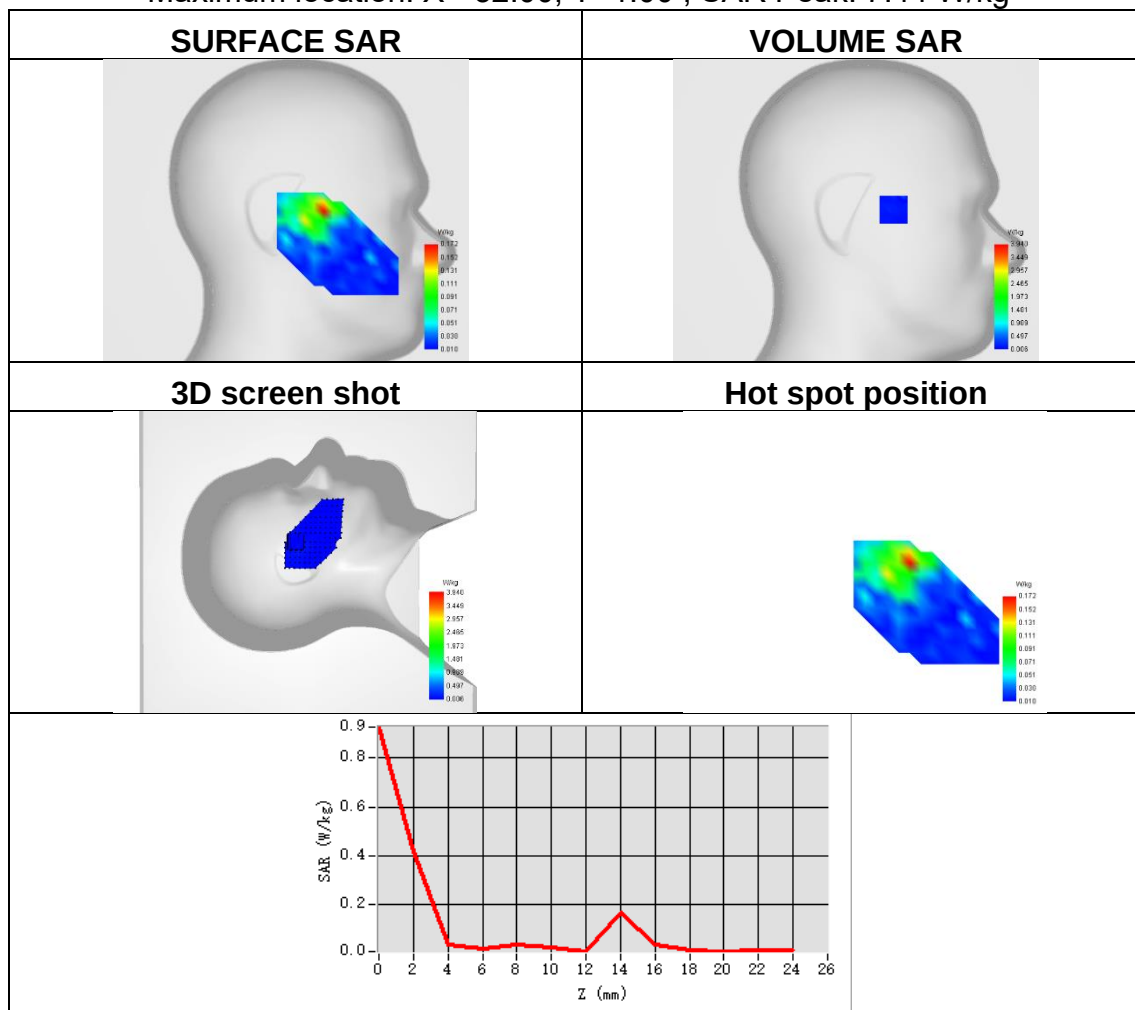




Plot 48:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1
Signal	IEEE 802.11n
Frequency	5755
SAR 10g (W/Kg)	0.022
SAR 1g (W/Kg)	0.039
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-8.00, Y=-40.00 ; SAR Peak: 0.17 W/kg

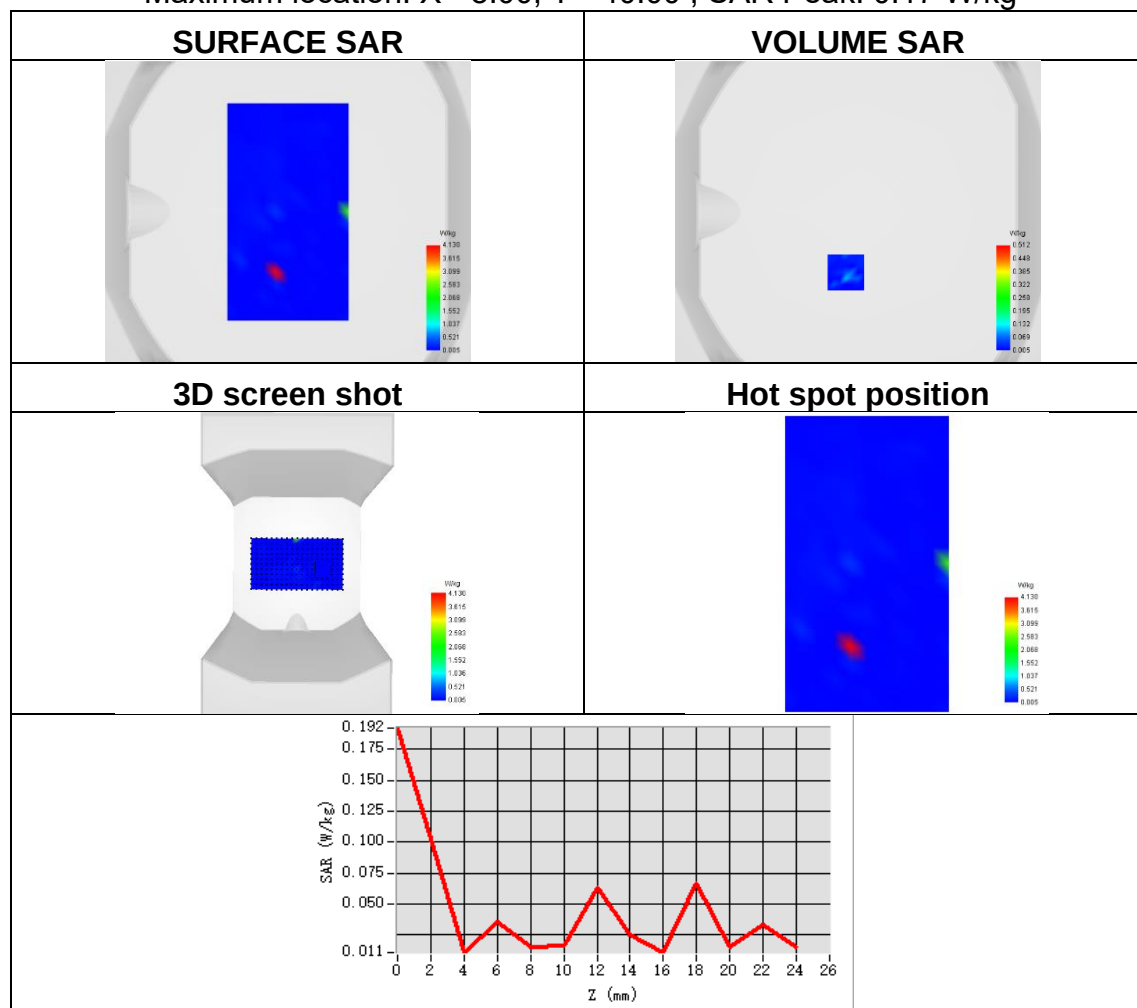




Plot 49:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11n
Frequency	5755
SAR 10g (W/Kg)	0.052
SAR 1g (W/Kg)	0.142
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-38.00, Y=-1.00 ; SAR Peak: 3.50 W/kg

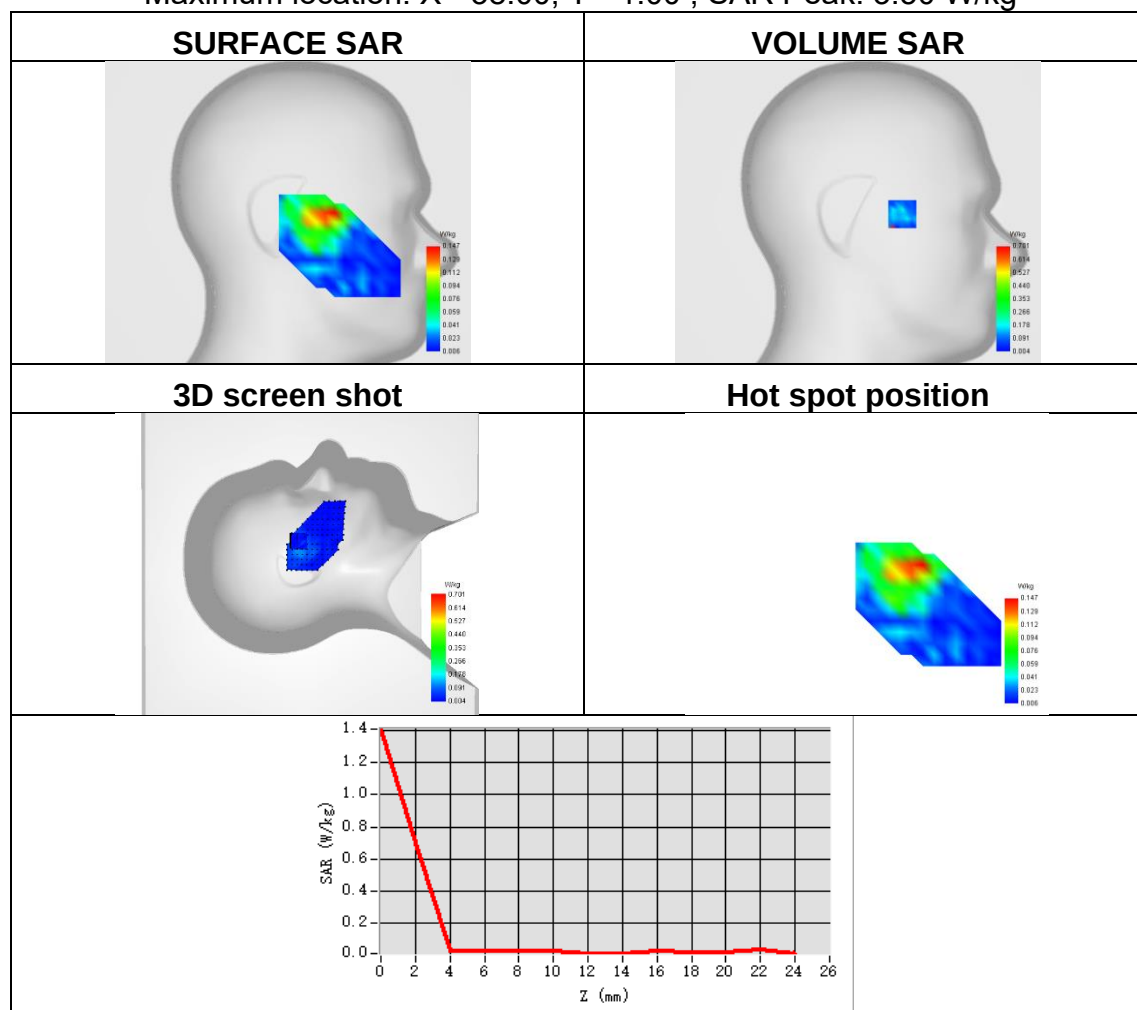




Plot 50:

Test Date	2025-09-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11n
Frequency	5755
SAR 10g (W/Kg)	0.025
SAR 1g (W/Kg)	0.069
ConvF	1.62
Relative permittivity	36.32
Conductivity (S/m)	5.25

Maximum location: X=-10.00, Y=-16.00 ; SAR Peak: 0.41 W/kg

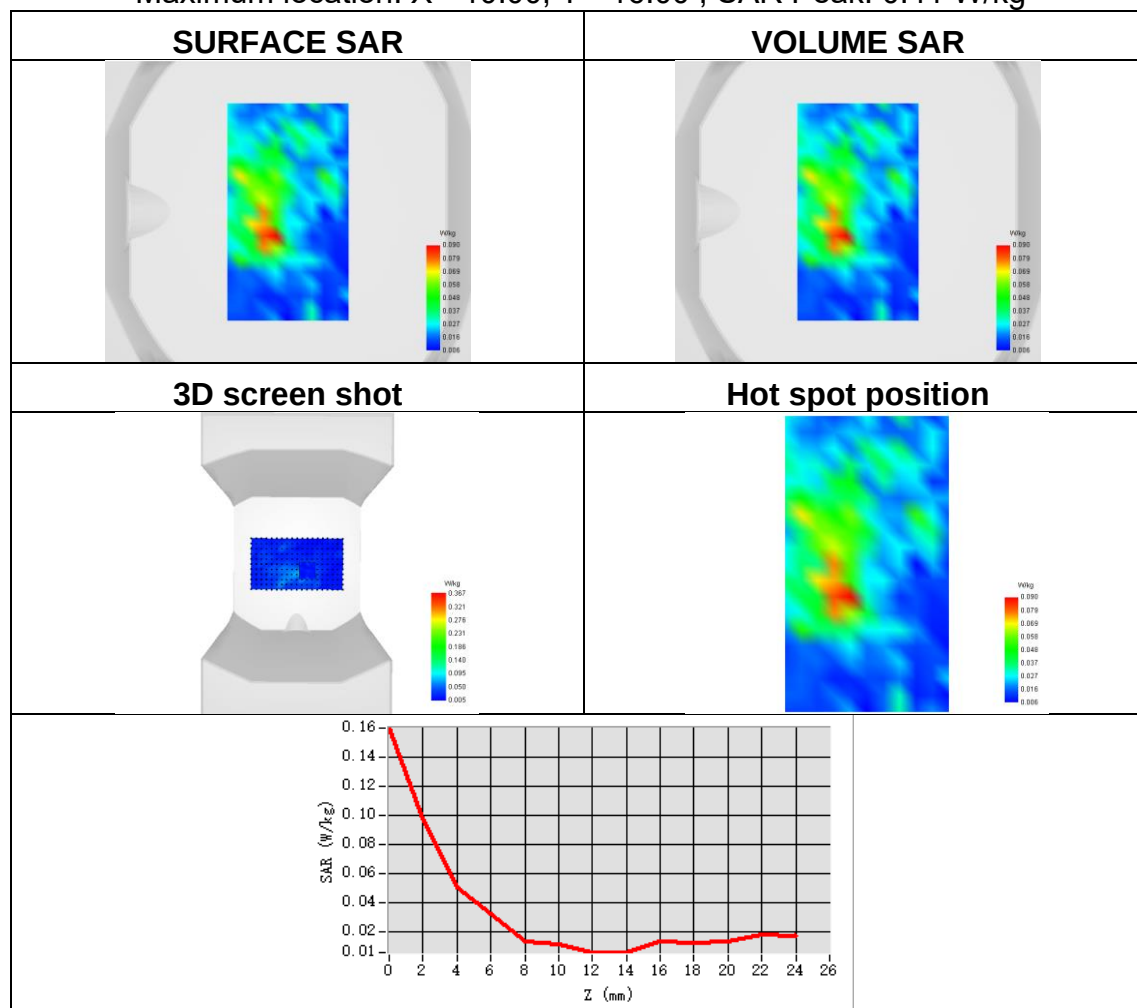




Plot 51:

Test Date	2025-09-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.332
SAR 1g (W/Kg)	0.540
ConvF	1.34
Relative permittivity	40.76
Conductivity (S/m)	1.42

Maximum location: X=-45.00, Y=-39.00 ; SAR Peak: 0.76 W/kg

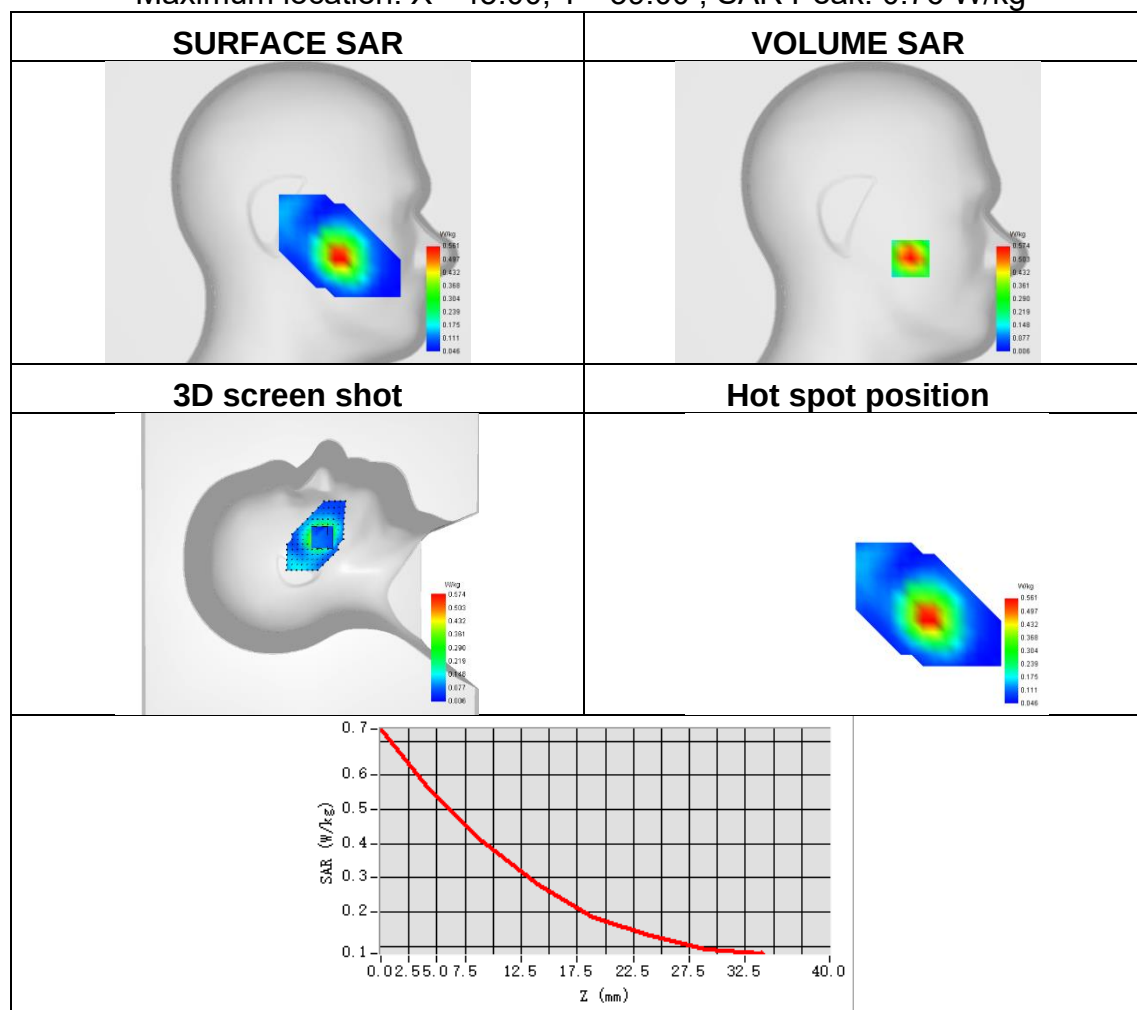




Plot 52:

Test Date	2025-09-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.228
SAR 1g (W/Kg)	0.330
ConvF	1.34
Relative permittivity	40.76
Conductivity (S/m)	1.42

Maximum location: X=-16.00, Y=-40.00 ; SAR Peak: 0.46 W/kg

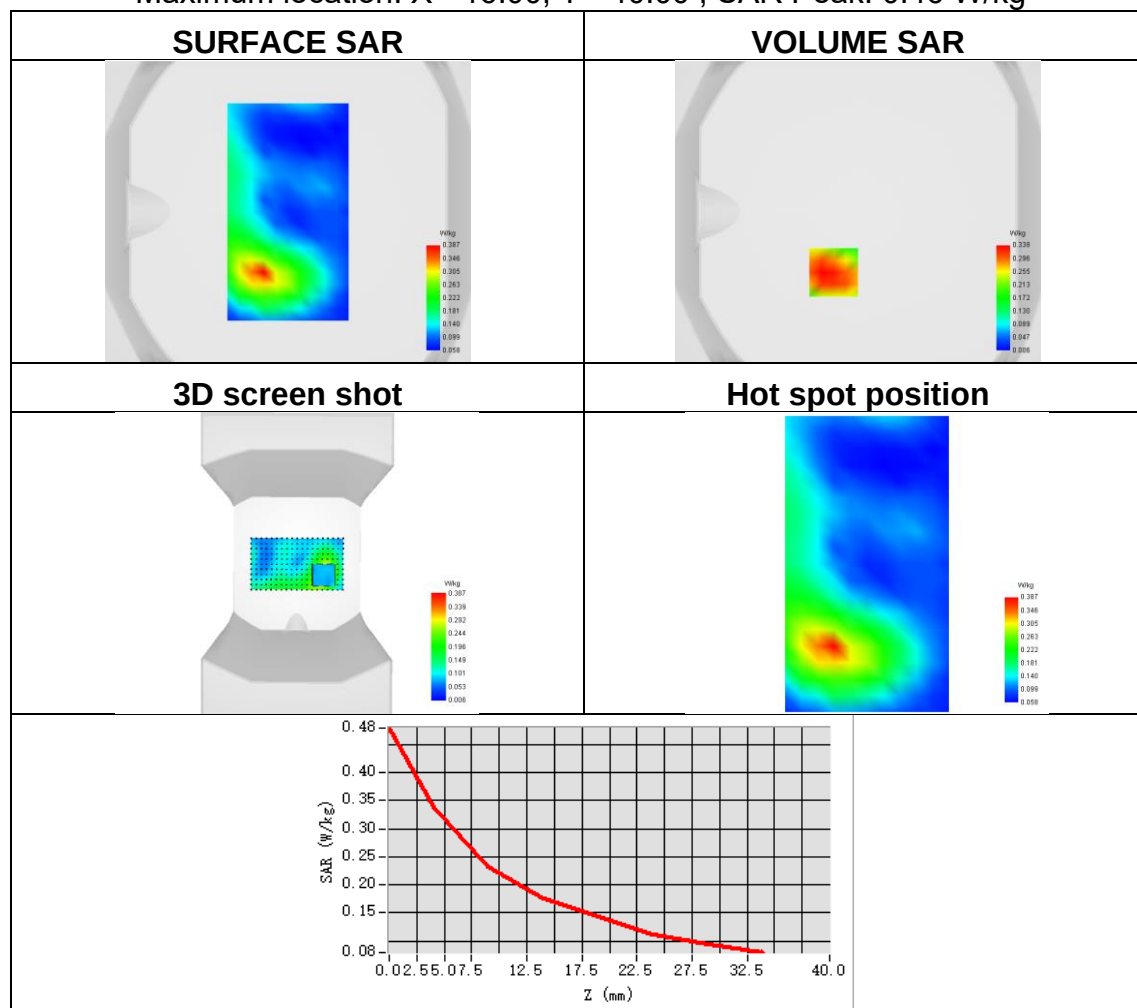




Plot 53:

Test Date	2025-09-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.402
SAR 1g (W/Kg)	0.684
ConvF	1.21
Relative permittivity	40.58
Conductivity (S/m)	1.41

Maximum location: X=-40.00, Y=-34.00 ; SAR Peak: 1.03 W/kg

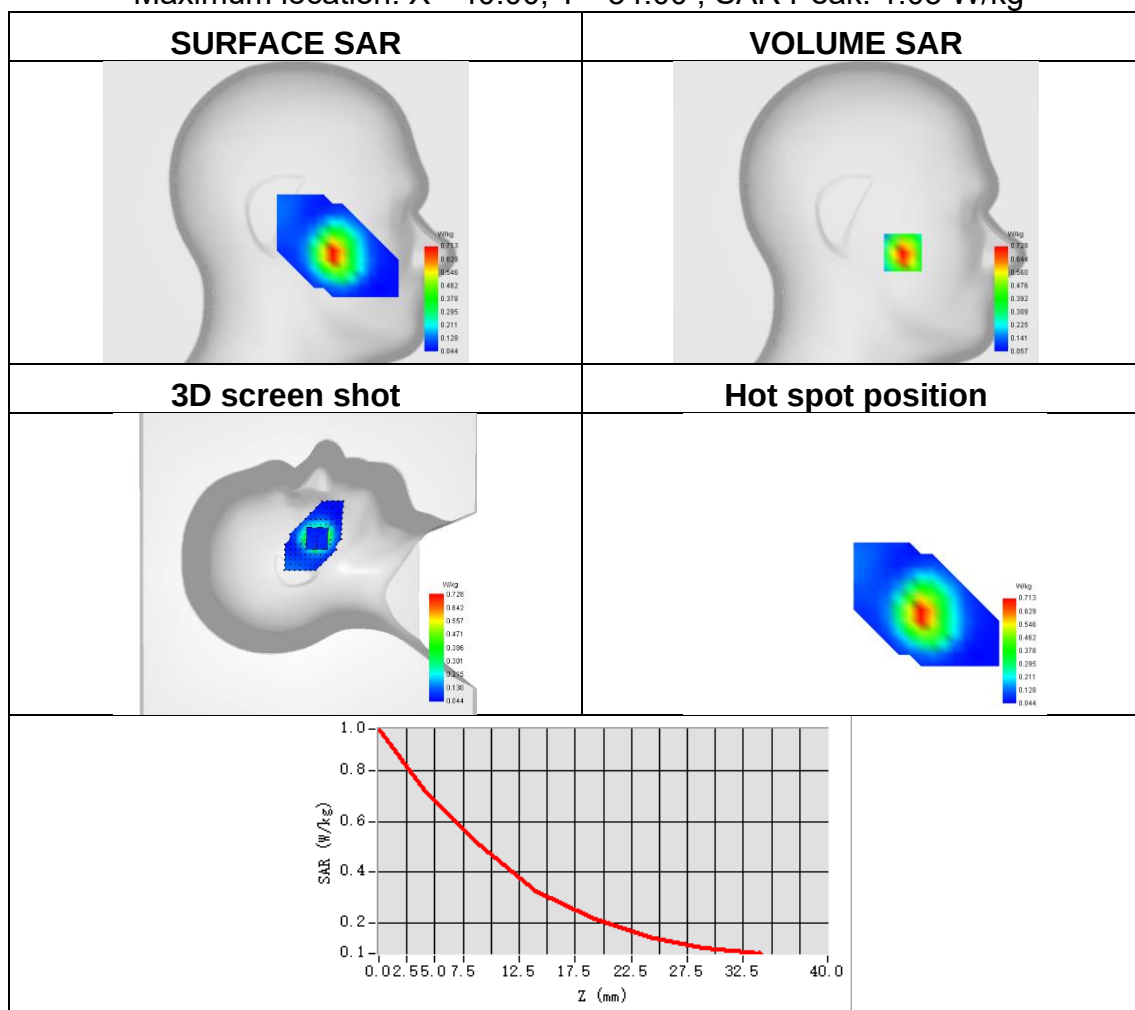




Plot 54:

Test Date	2025-09-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.287
ConvF	1.21
Relative permittivity	40.88
Conductivity (S/m)	1.35

Maximum location: X=-25.00, Y=-42.00 ; SAR Peak: 0.41 W/kg

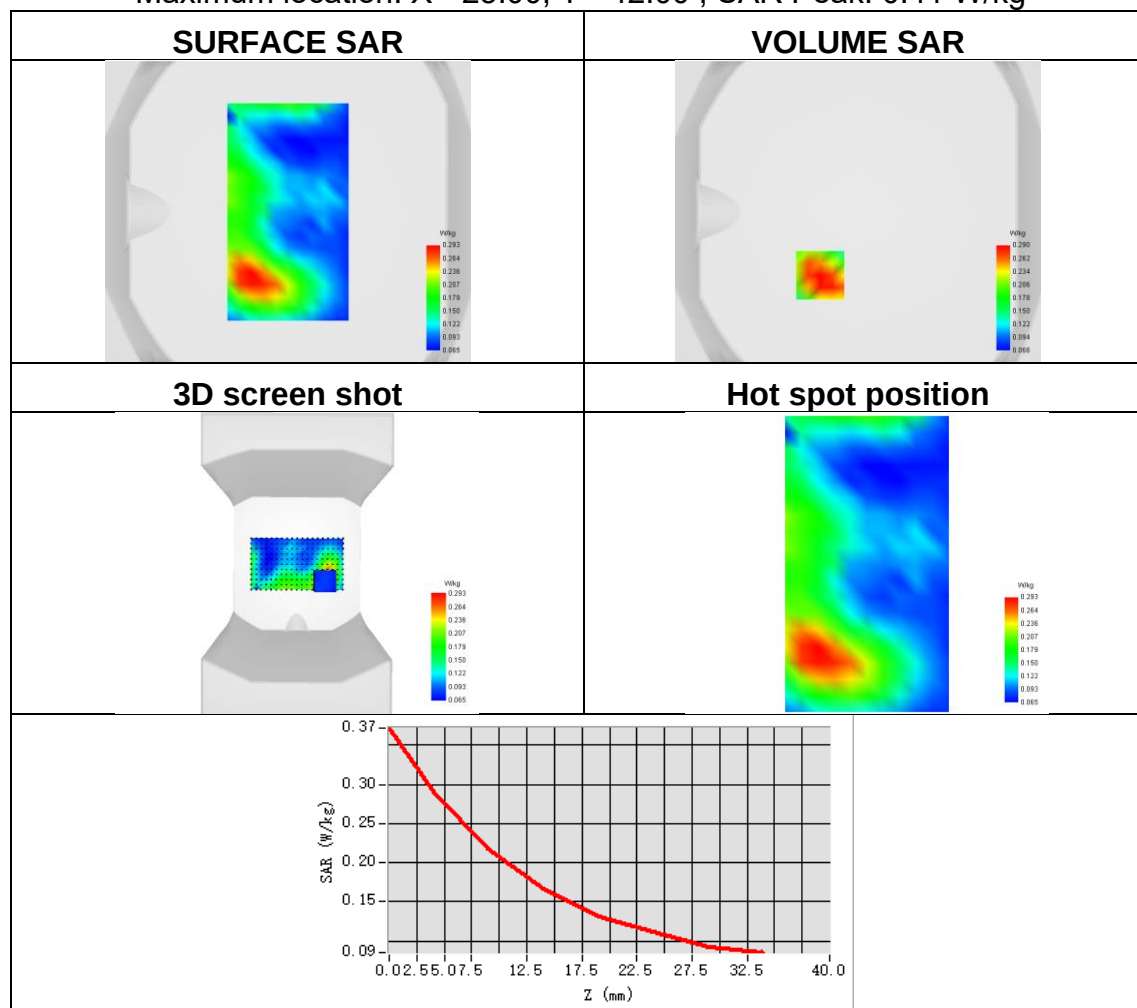




Plot 55:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.257
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=-64.00, Y=-33.00 ; SAR Peak: 0.52 W/kg

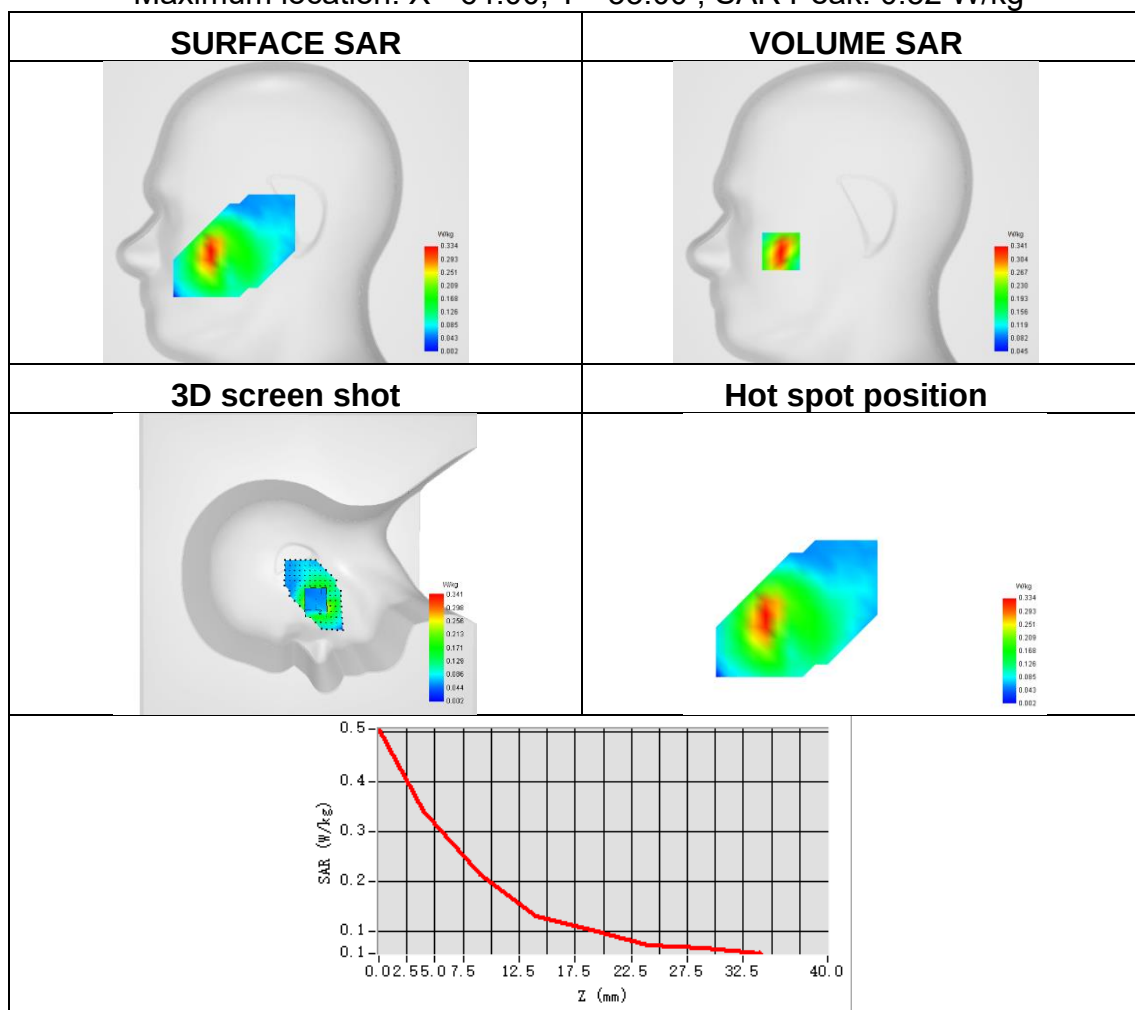




Plot 56:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.125
SAR 1g (W/Kg)	0.181
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=-16.00, Y=-16.00 ; SAR Peak: 0.26 W/kg

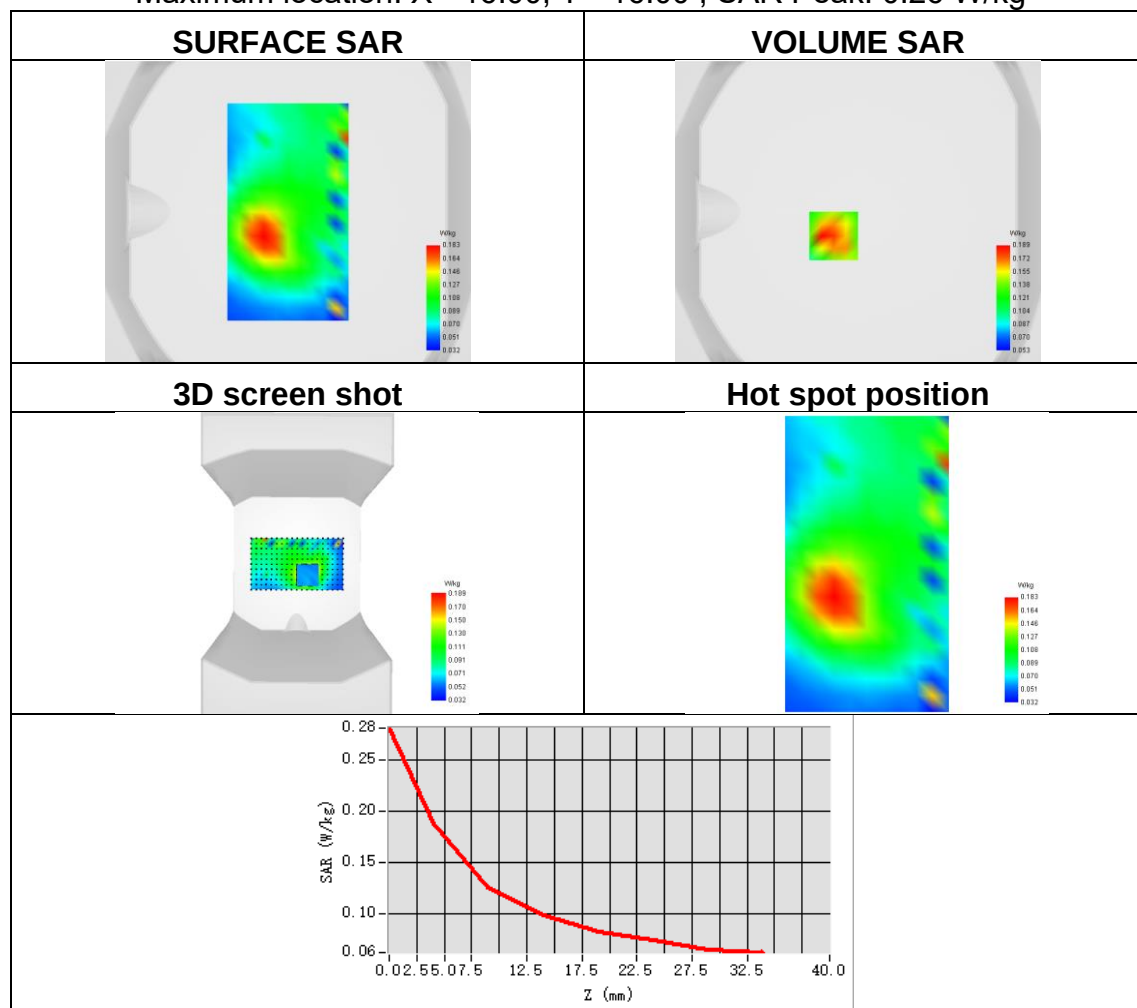




Plot 57:

Test Date	2025-09-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.218
SAR 1g (W/Kg)	0.391
ConvF	1.44
Relative permittivity	39.78
Conductivity (S/m)	1.95

Maximum location: X=-55.00, Y=-56.00 ; SAR Peak: 0.62 W/kg

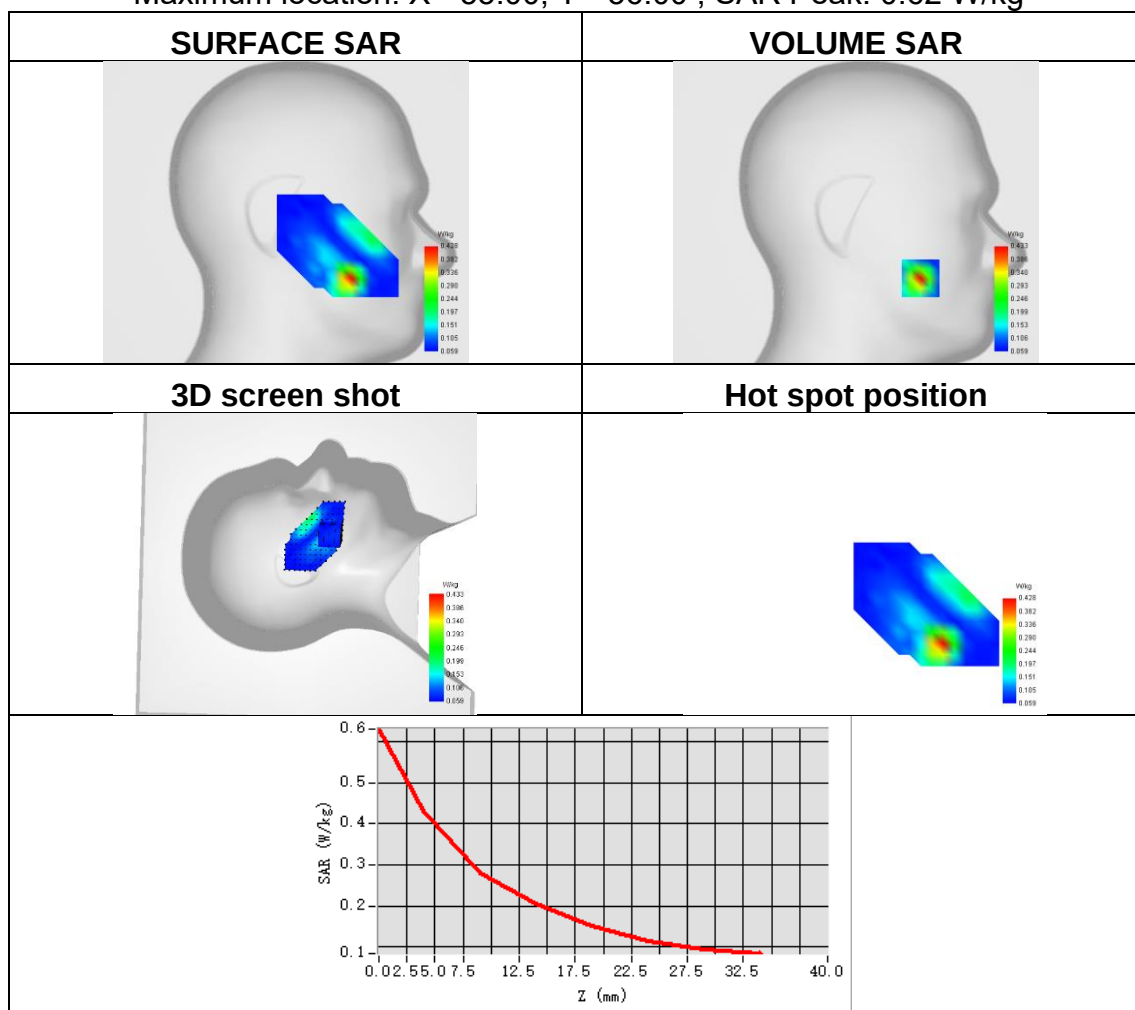




Plot 58:

Test Date	2025-09-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.275
ConvF	1.44
Relative permittivity	39.78
Conductivity (S/m)	1.95

Maximum location: X=1.00, Y=-54.00 ; SAR Peak: 0.63 W/kg

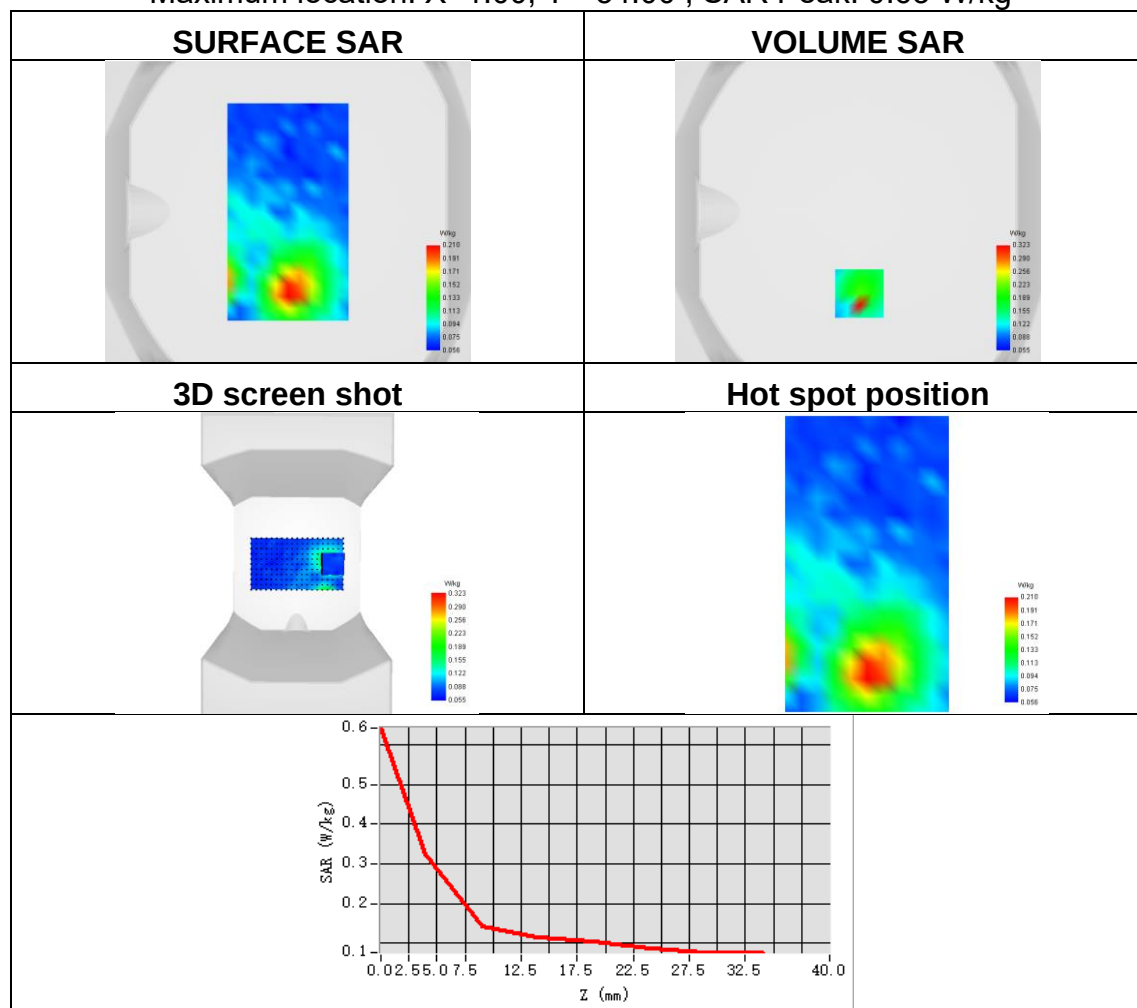




Plot 59:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.123
SAR 1g (W/Kg)	0.215
ConvF	1.08
Relative permittivity	41.71
Conductivity (S/m)	0.87

Maximum location: X=-64.00, Y=-33.00 ; SAR Peak: 0.36 W/kg

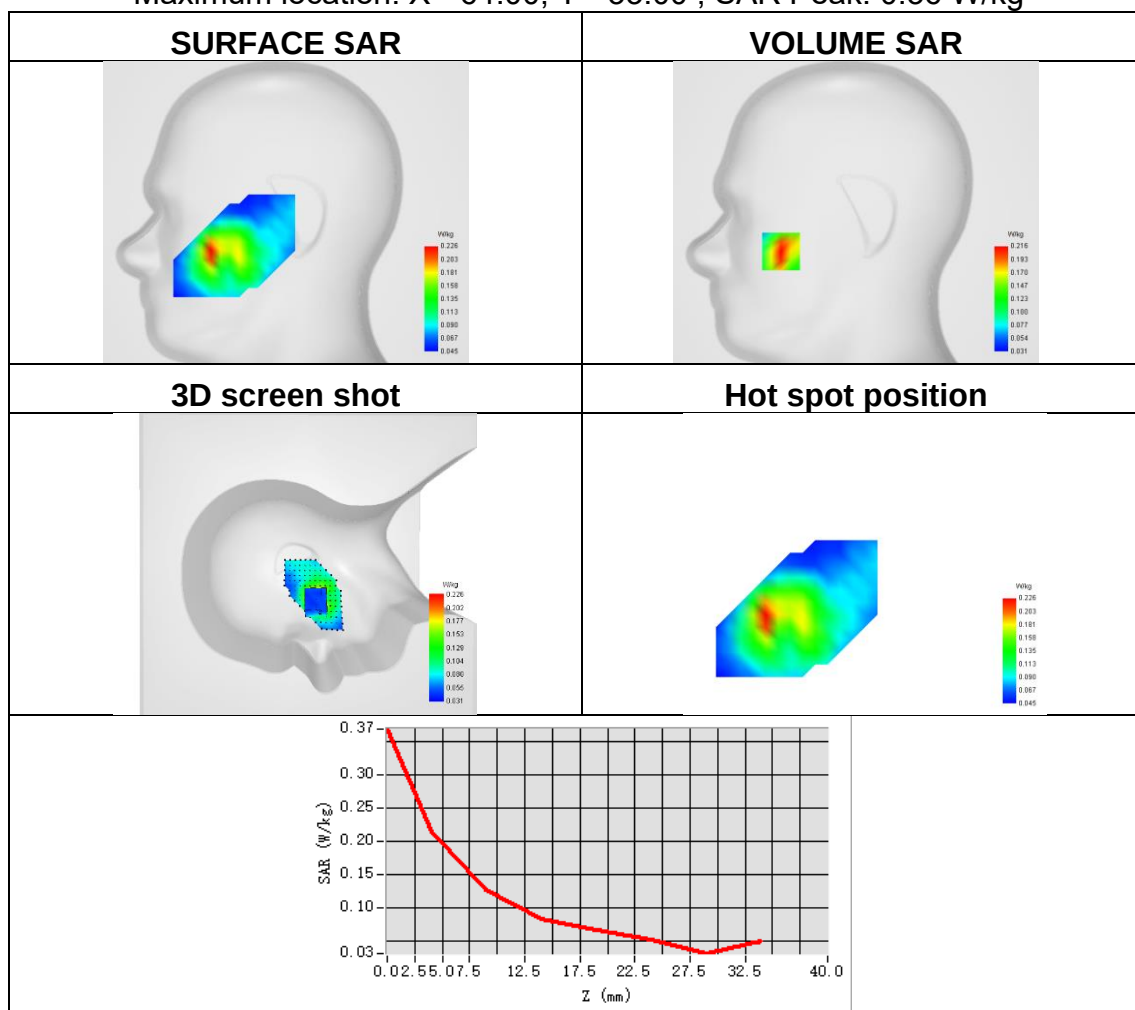




Plot 60:

Test Date	2025-09-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.115
SAR 1g (W/Kg)	0.162
ConvF	1.08
Relative permittivity	41.71
Conductivity (S/m)	0.87

Maximum location: X=-23.00, Y=-24.00 ; SAR Peak: 0.20 W/kg

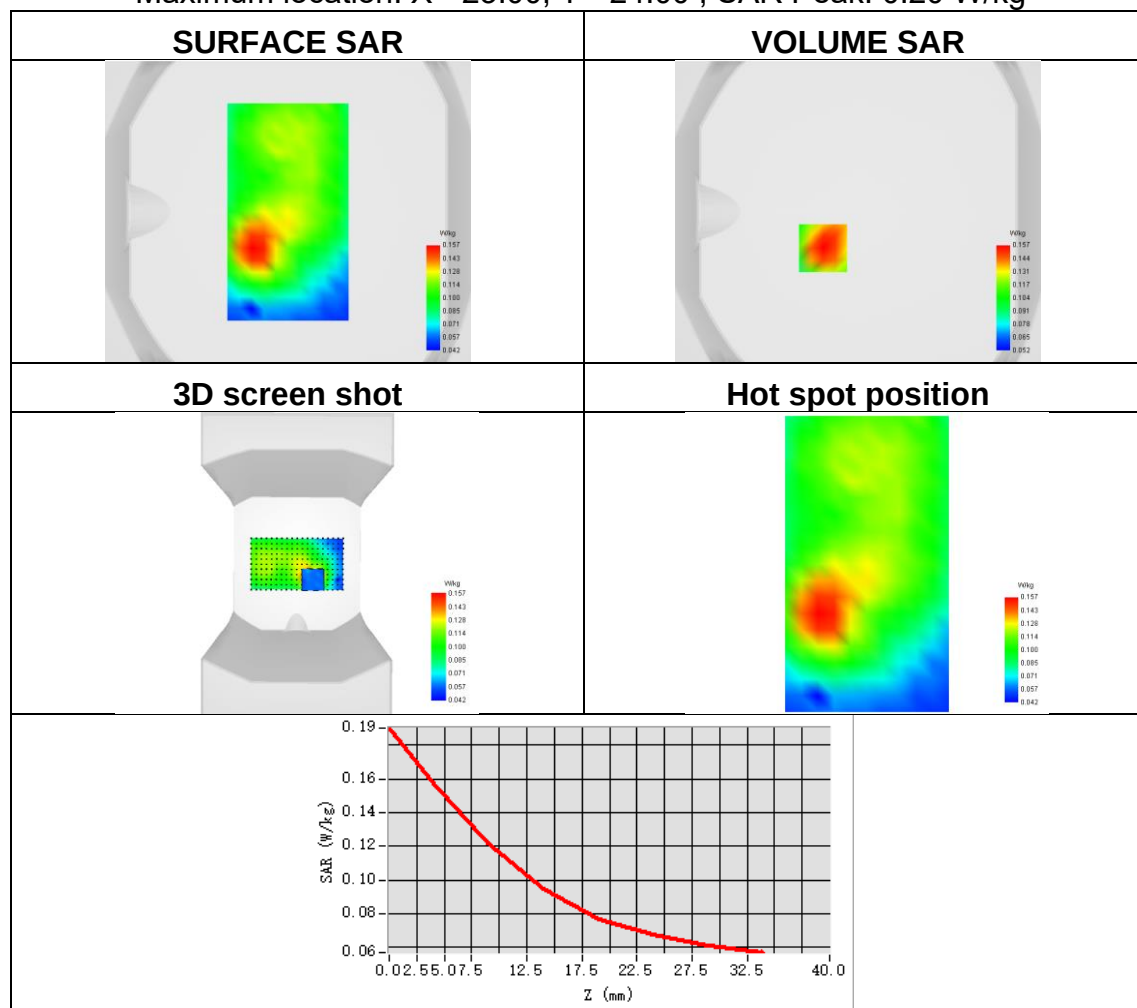




Plot 61:

Test Date	2025-09-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.428
SAR 1g (W/Kg)	0.736
ConvF	1.21
Relative permittivity	40.88
Conductivity (S/m)	1.35

Maximum location: X=-49.00, Y=-32.00 ; SAR Peak: 1.11 W/kg

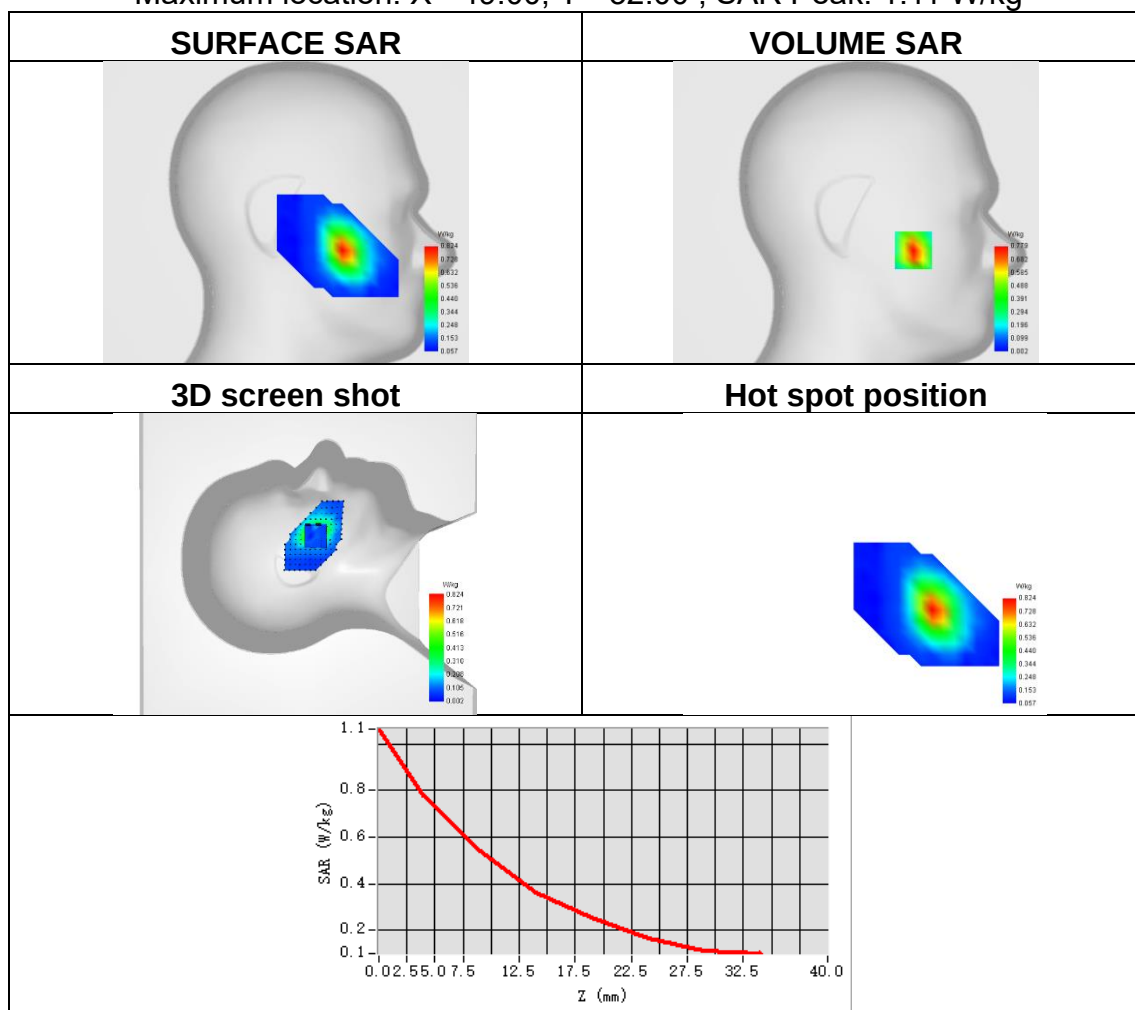




Plot 62:

Test Date	2025-09-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.249
SAR 1g (W/Kg)	0.365
ConvF	1.21
Relative permittivity	40.88
Conductivity (S/m)	1.35

Maximum location: X=-8.00, Y=7.00 ; SAR Peak: 0.51 W/kg

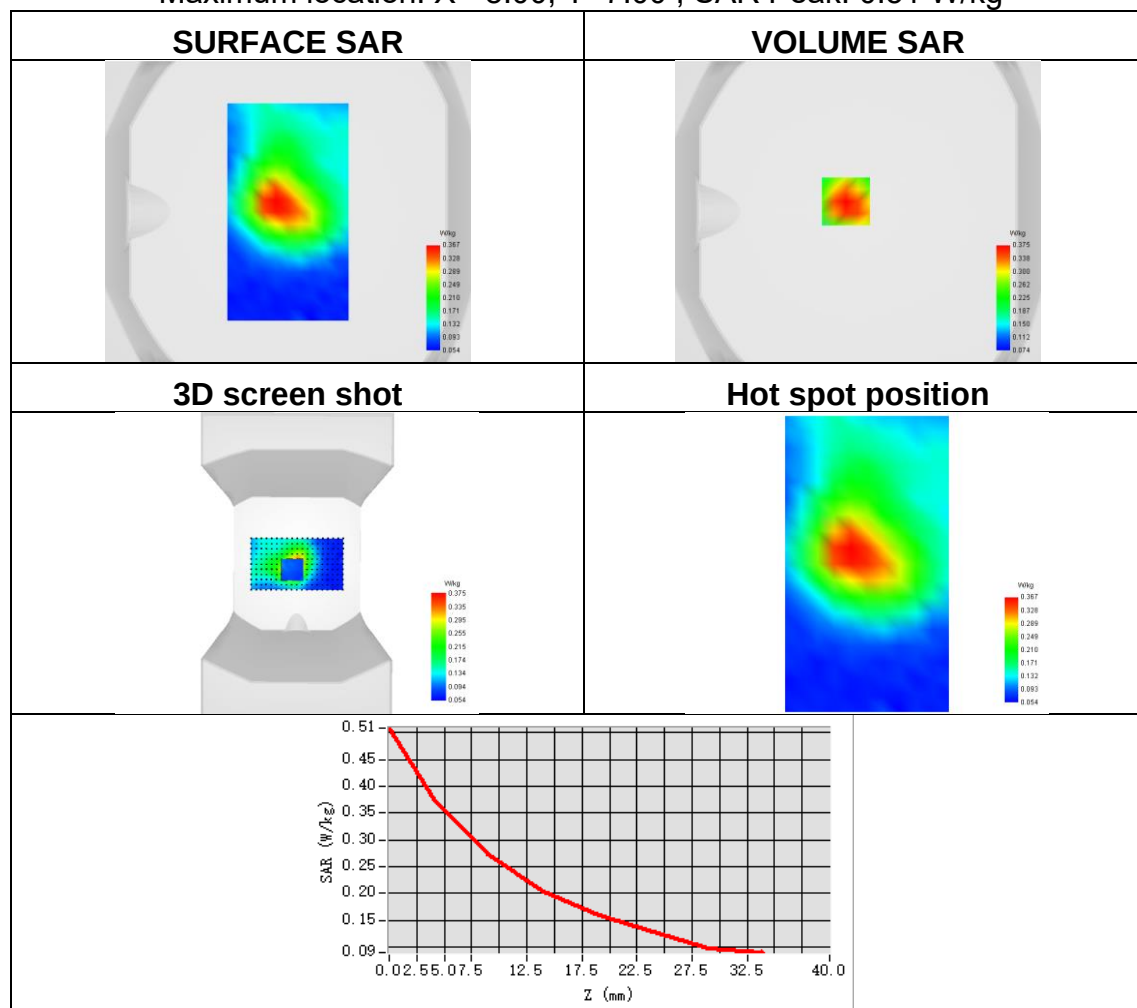




Plot 63:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.094
SAR 1g (W/Kg)	0.126
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=-64.00, Y=-48.00 ; SAR Peak: 0.43 W/kg

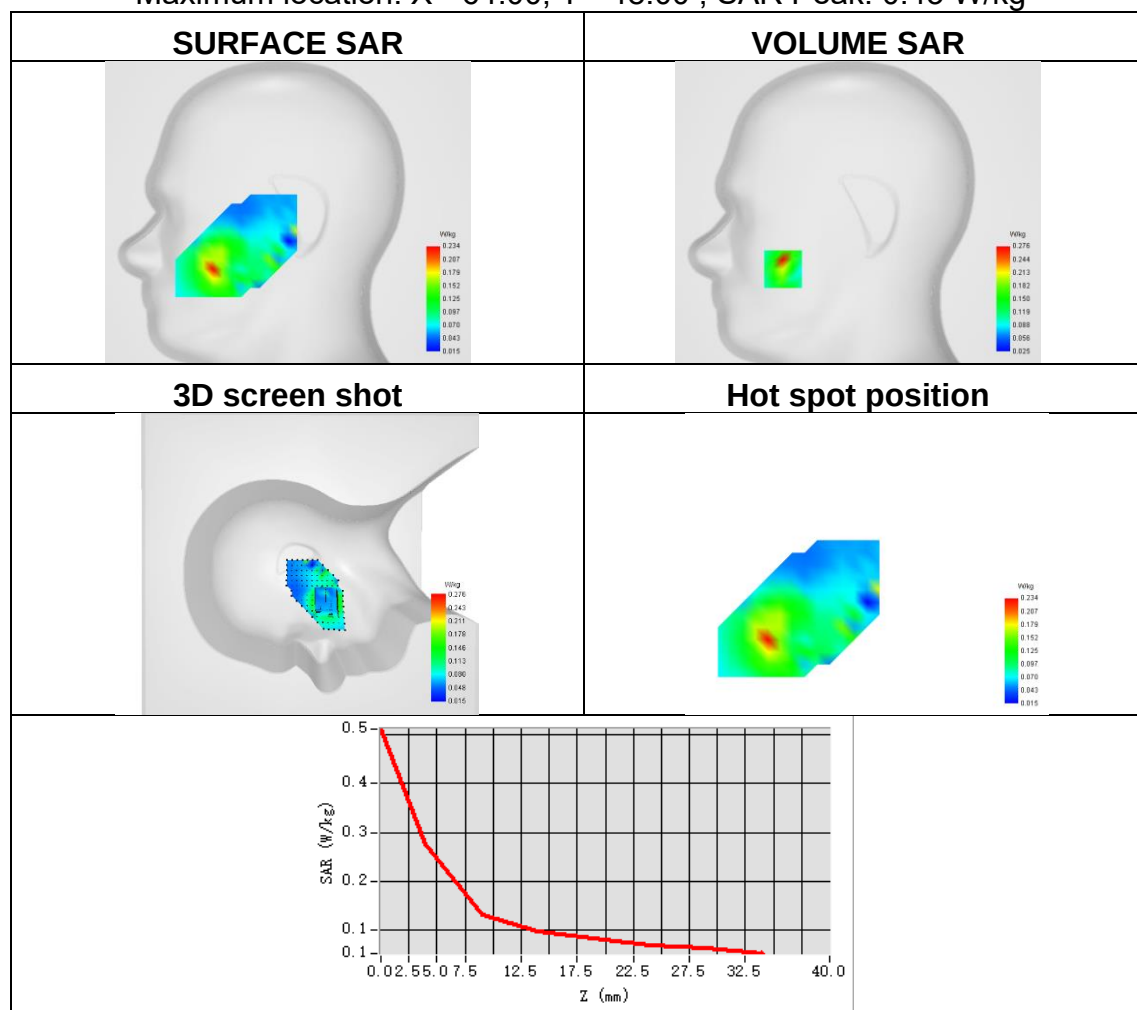




Plot 64:

Test Date	2025-09-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.096
SAR 1g (W/Kg)	0.142
ConvF	1.02
Relative permittivity	42.14
Conductivity (S/m)	0.88

Maximum location: X=3.00, Y=-33.00 ; SAR Peak: 0.20 W/kg

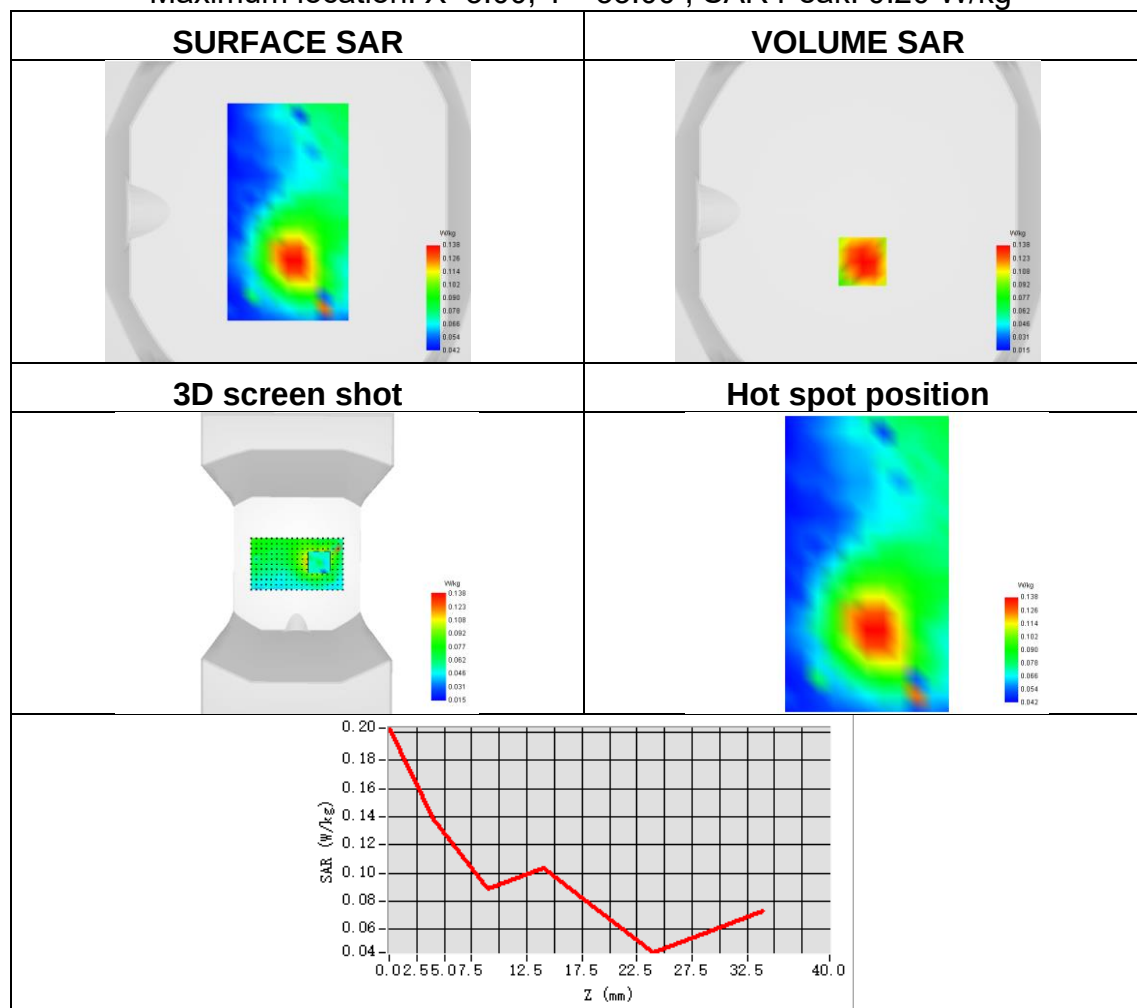




Plot 65:

Test Date	2025-09-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.268
ConvF	1.44
Relative permittivity	39.78
Conductivity (S/m)	1.95

Maximum location: X=-56.00, Y=-49.00 ; SAR Peak: 0.42 W/kg

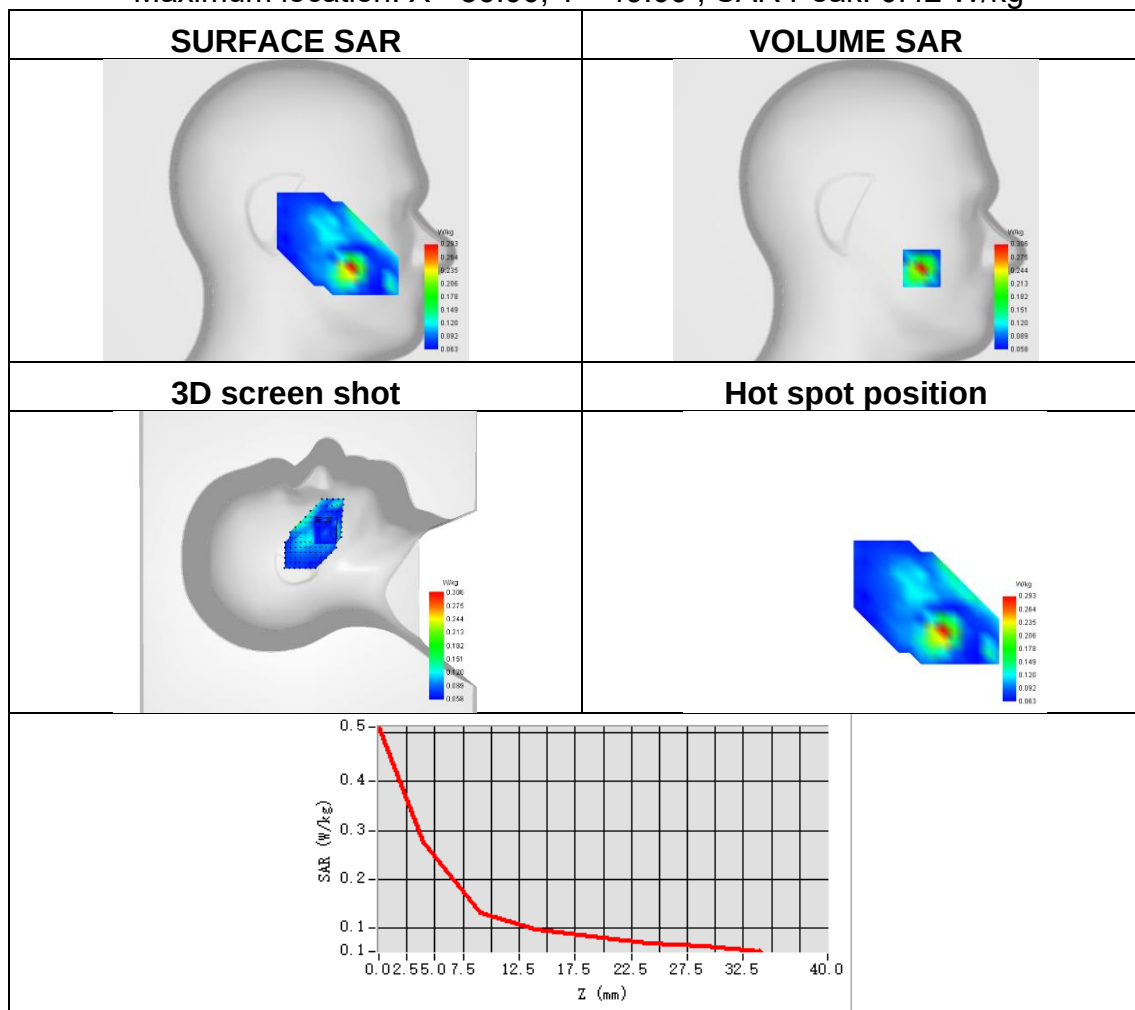




Plot 66:

Test Date	2025-09-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.153
ConvF	1.44
Relative permittivity	39.78
Conductivity (S/m)	1.95

Maximum location: X=-25.00, Y=9.00 ; SAR Peak: 0.59 W/kg

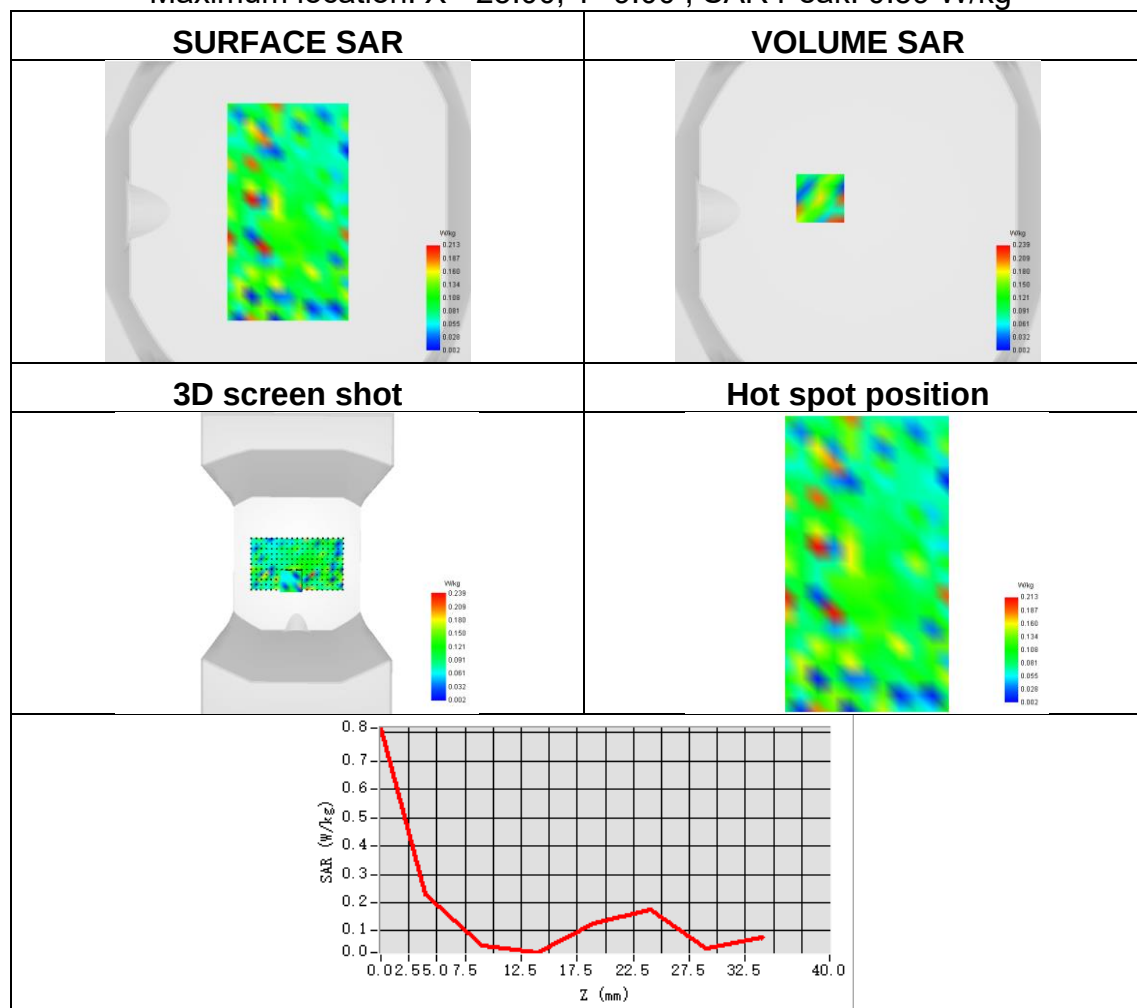




Plot 67:

Test Date	2025-09-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.146
ConvF	1.44
Relative permittivity	39.80
Conductivity (S/m)	2.03

Maximum location: X=-41.00, Y=-46.00 ; SAR Peak: 0.18 W/kg

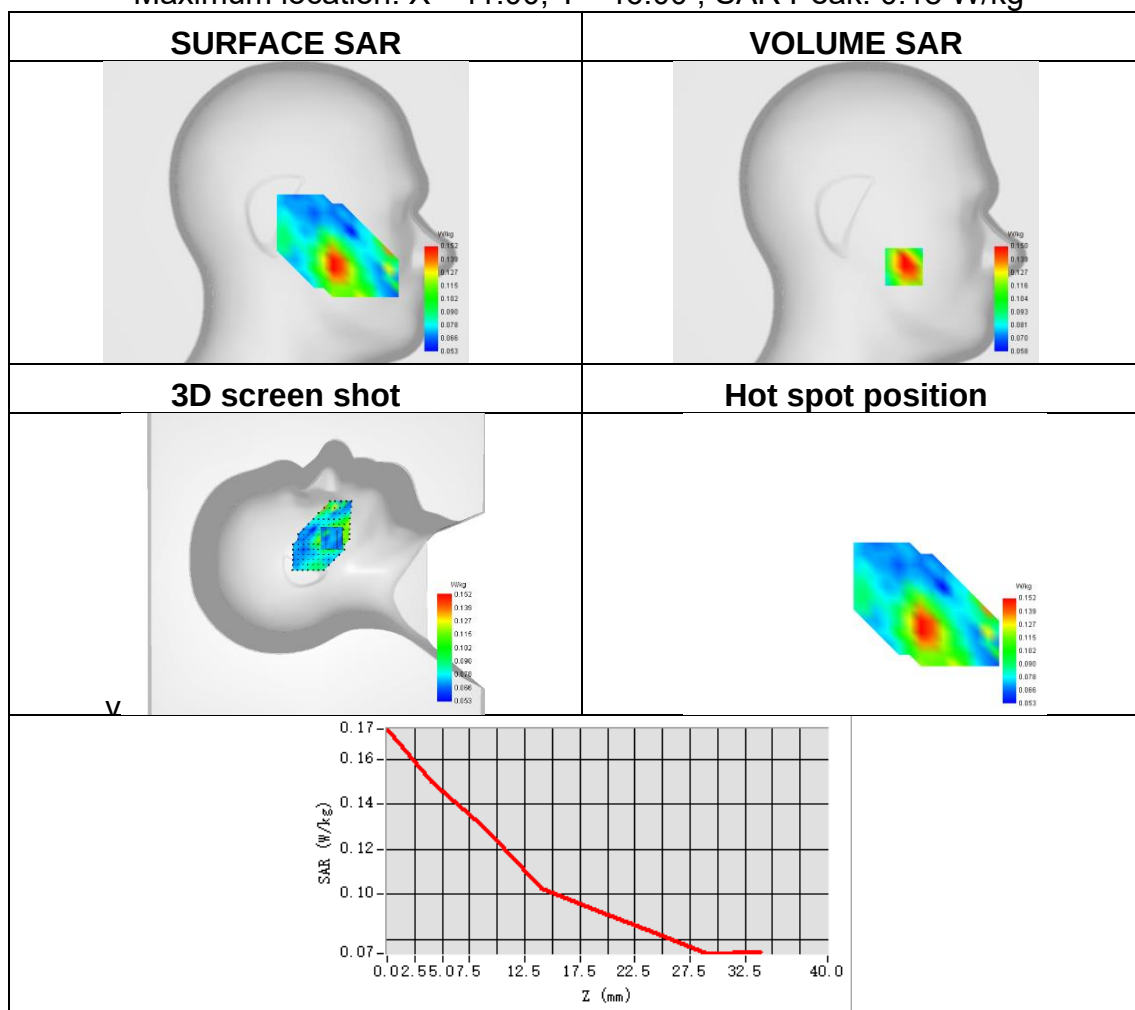




Plot 68:

Test Date	2025-09-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.134
SAR 1g (W/Kg)	0.191
ConvF	1.44
Relative permittivity	39.80
Conductivity (S/m)	2.03

Maximum location: X=-9.00, Y=-11.00 ; SAR Peak: 0.26 W/kg

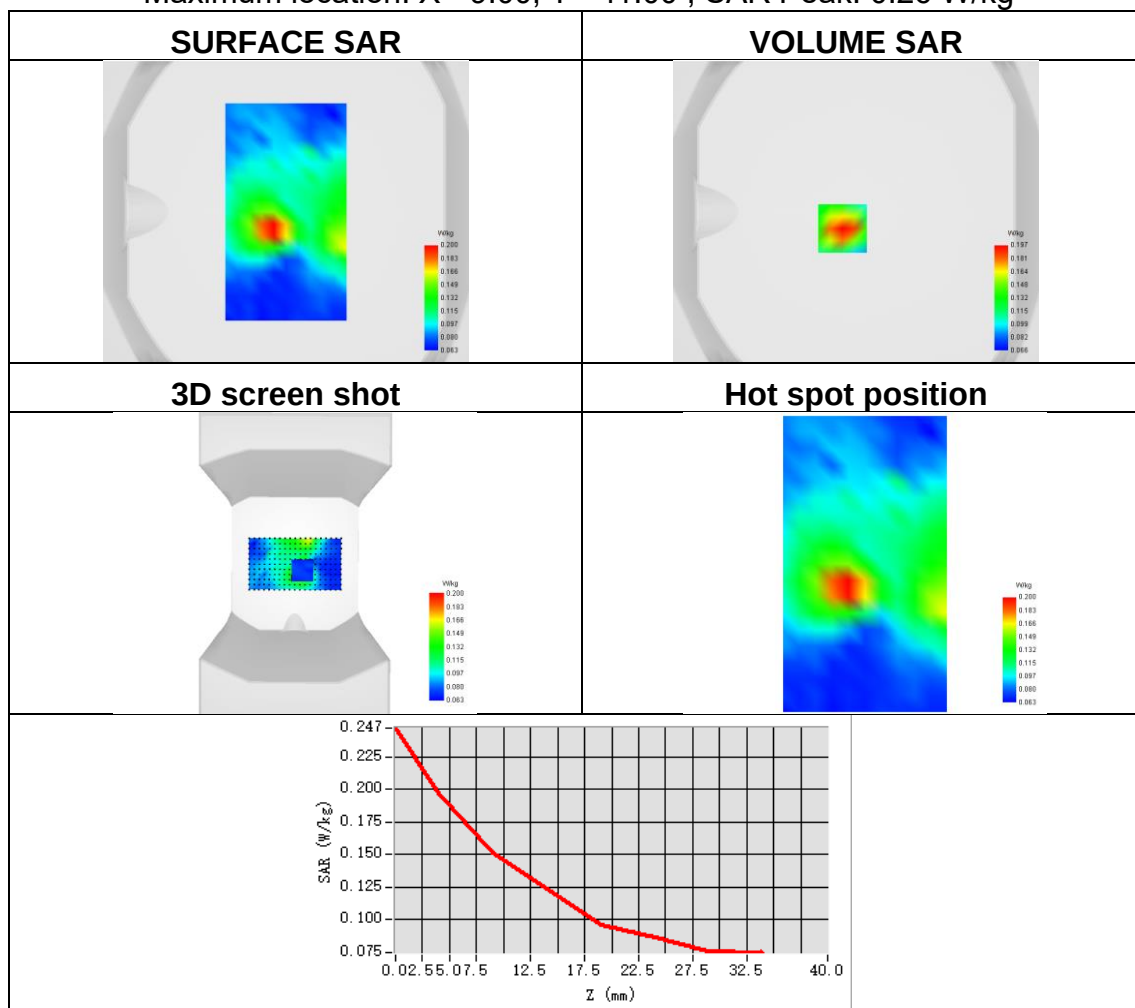




Plot 69:

Test Date	2025-09-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.131
ConvF	1.44
Relative permittivity	39.80
Conductivity (S/m)	2.03

Maximum location: X=-48.00, Y=-55.00 ; SAR Peak: 0.31 W/kg

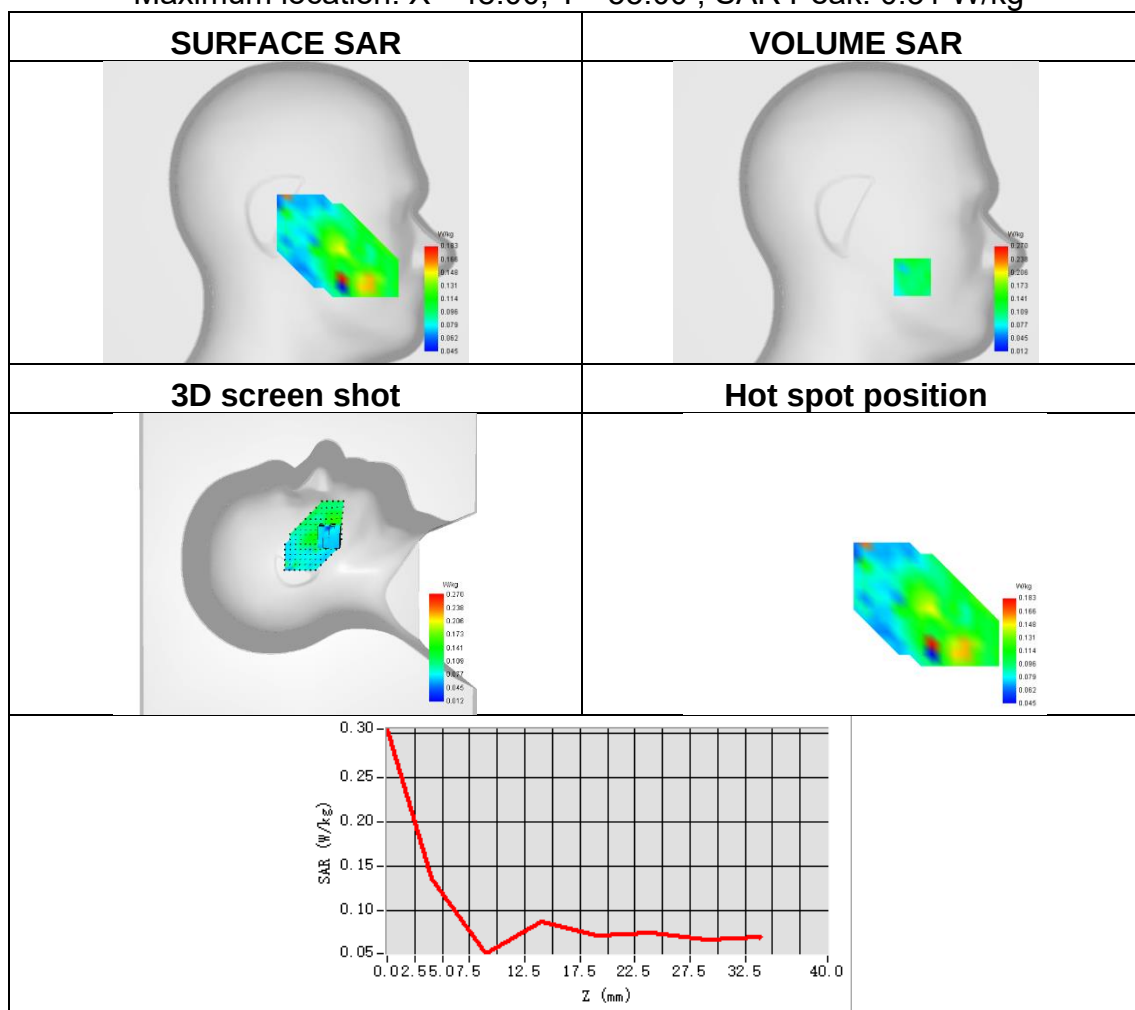




Plot 70:

Test Date	2025-09-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.213
ConvF	1.44
Relative permittivity	39.80
Conductivity (S/m)	2.03

Maximum location: X=-21.00, Y=-17.00 ; SAR Peak: 0.39 W/kg

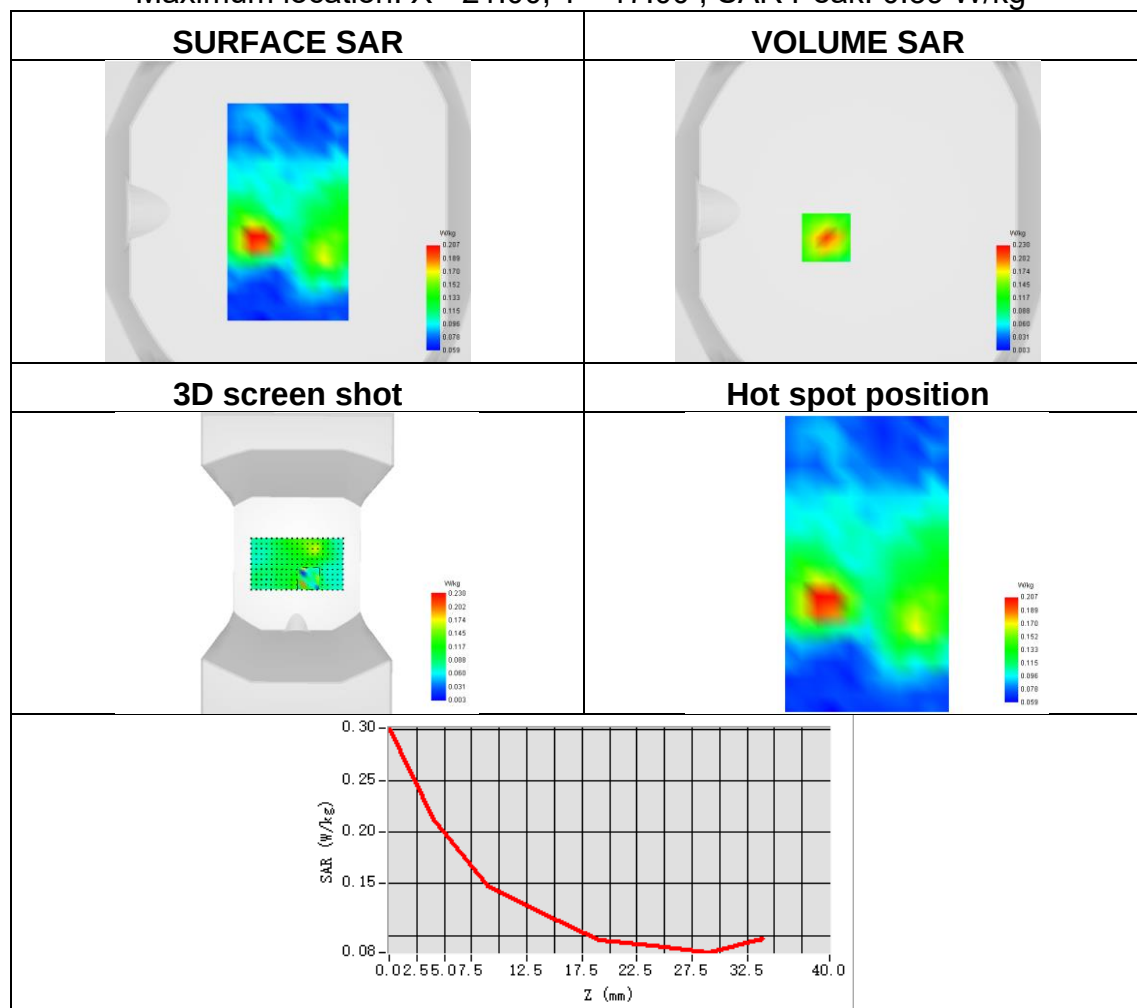




Plot 71:

Test Date	2025-09-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 77
Signal	NR FDD
Frequency	3930
SAR 10g (W/Kg)	0.403
SAR 1g (W/Kg)	0.812
ConvF	1.50
Relative permittivity	37.44
Conductivity (S/m)	3.27

Maximum location: X=-21.00, Y=6.00 ; SAR Peak: 1.52 W/kg

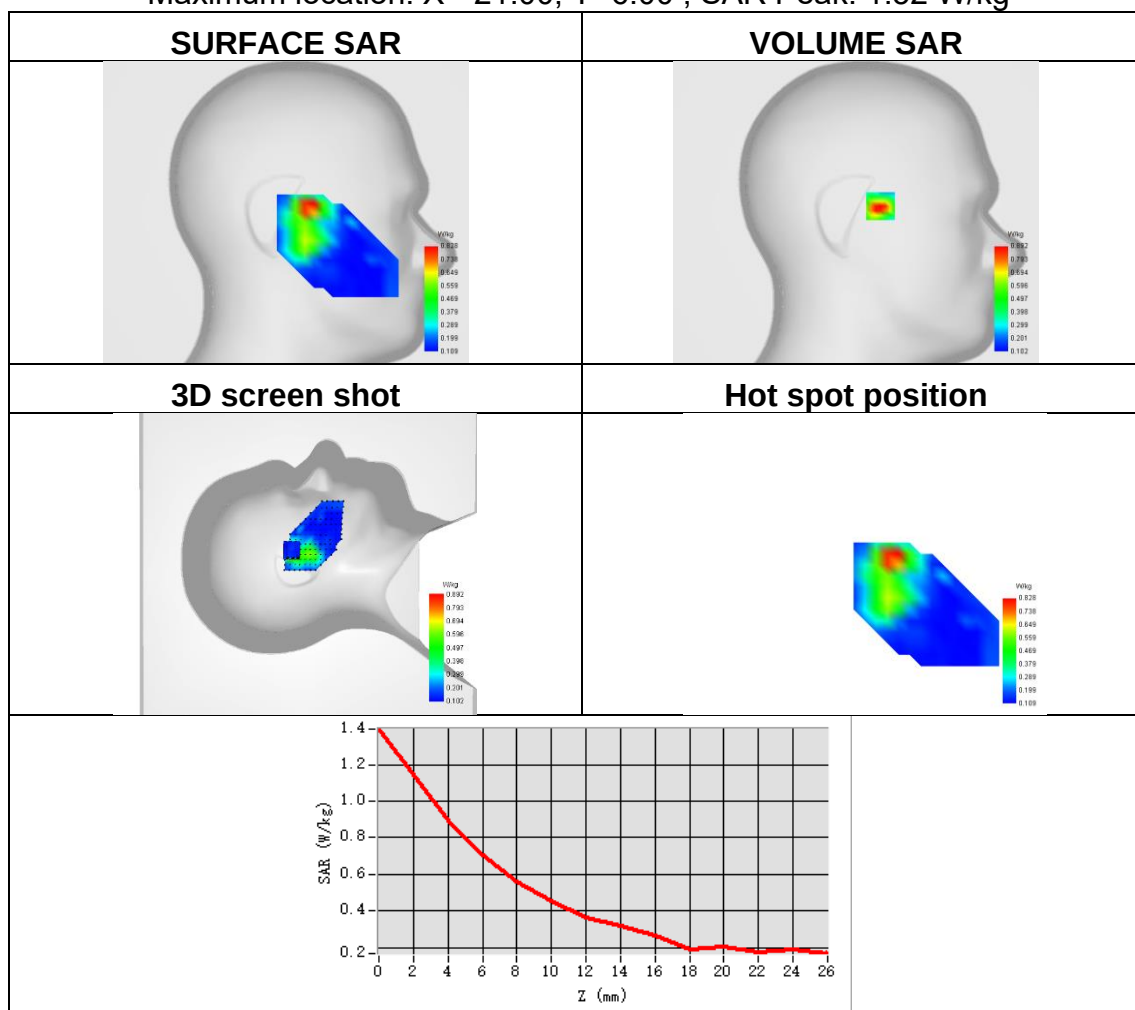




Plot 72:

Test Date	2025-09-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 77
Signal	NR FDD
Frequency	3930
SAR 10g (W/Kg)	0.203
SAR 1g (W/Kg)	0.355
ConvF	1.50
Relative permittivity	37.44
Conductivity (S/m)	3.27

Maximum location: X=9.00, Y=48.00 ; SAR Peak: 0.62 W/kg

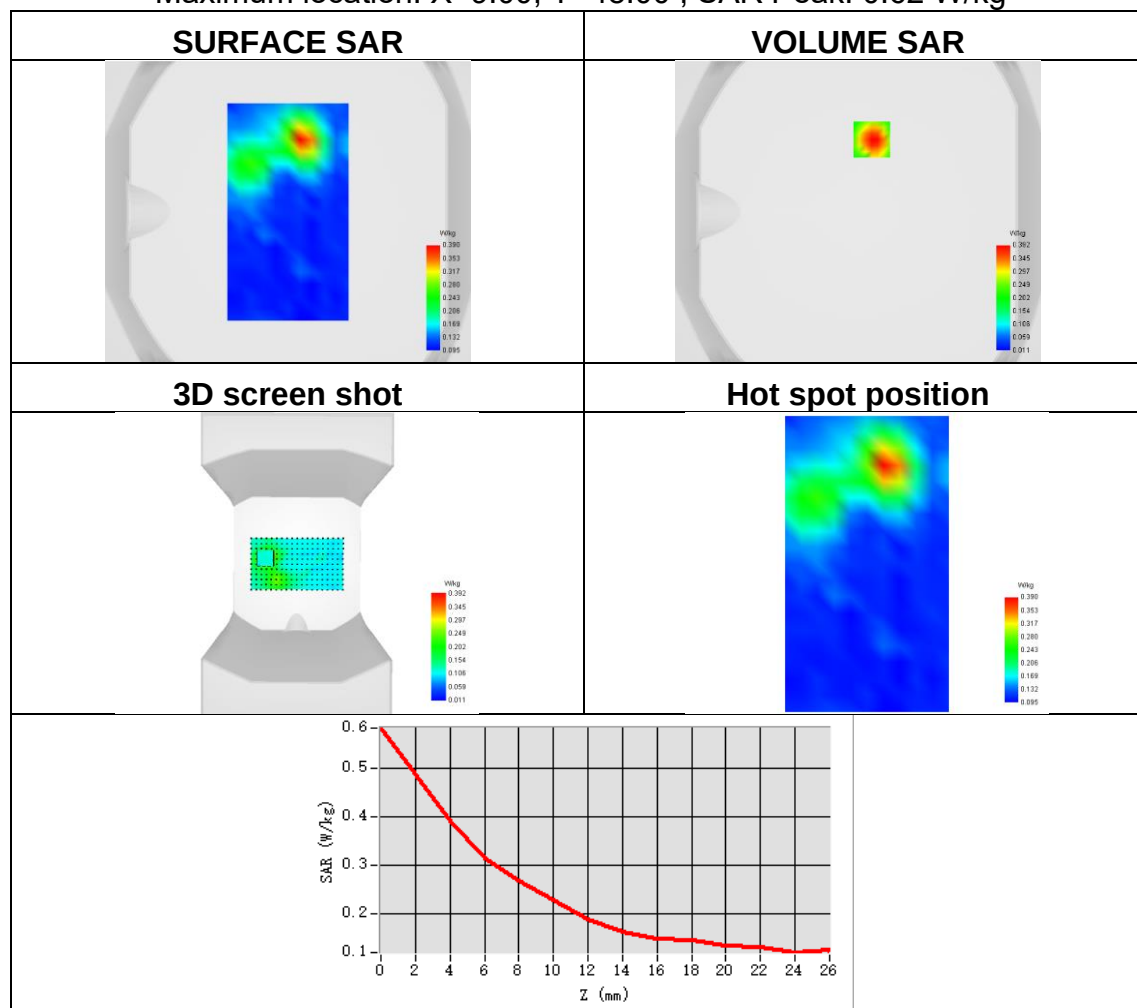




Plot 73:

Test Date	2025-09-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.373
SAR 1g (W/Kg)	0.604
ConvF	1.35
Relative permittivity	38.77
Conductivity (S/m)	3.03

Maximum location: X=-9.00, Y=-32.00 ; SAR Peak: 1.61 W/kg

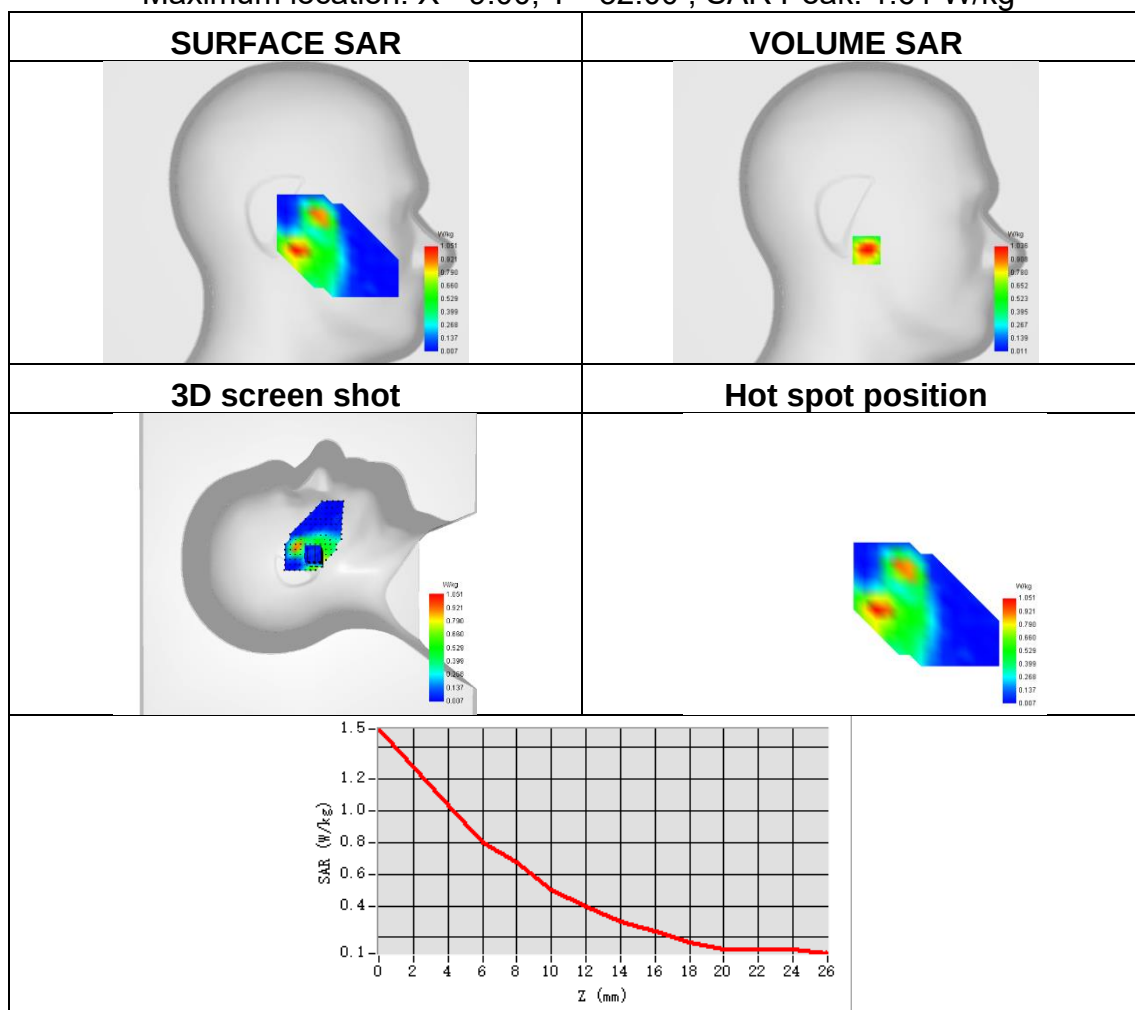




Plot 74:

Test Date	2025-09-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.288
ConvF	1.35
Relative permittivity	38.77
Conductivity (S/m)	3.03

Maximum location: X=15.00, Y=-9.00 ; SAR Peak: 1.15 W/kg

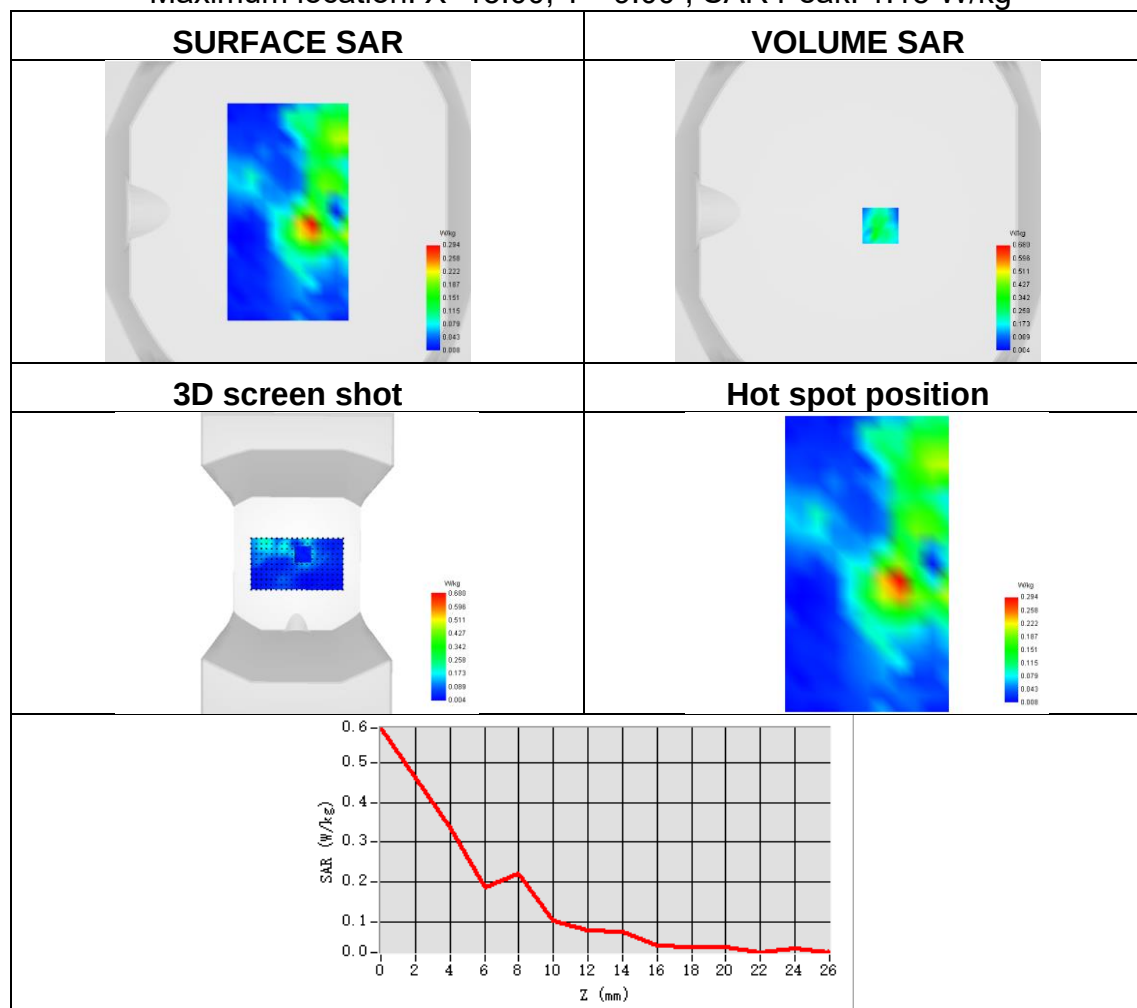



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※