




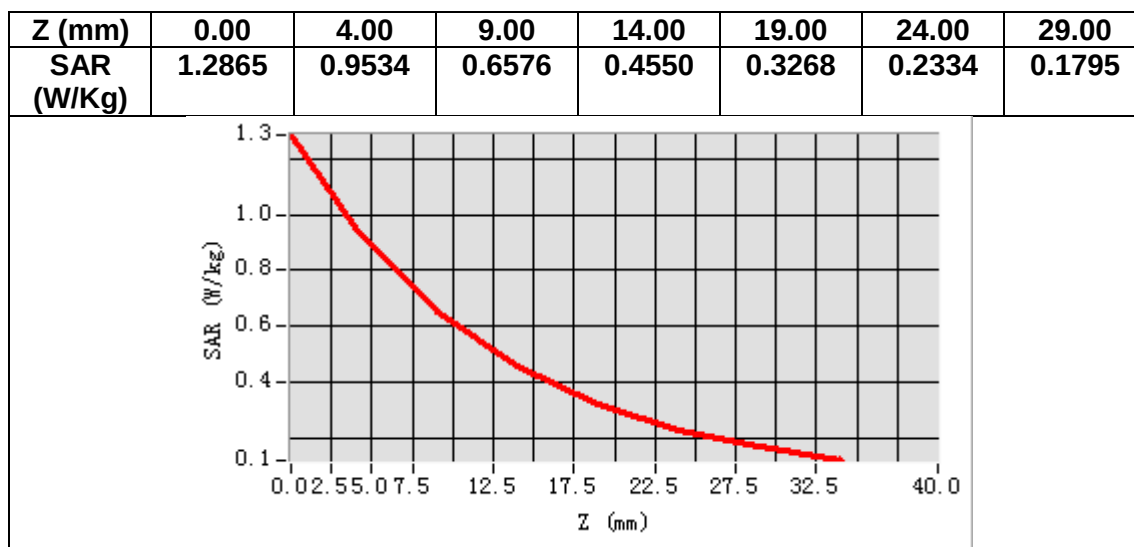

3D screen shot

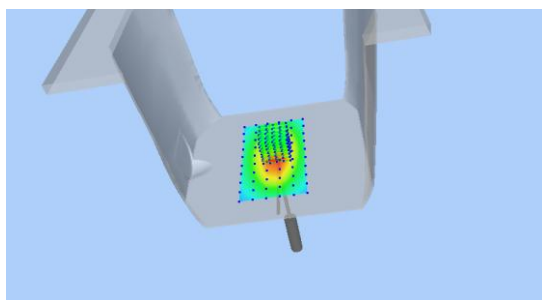

Hot spot position

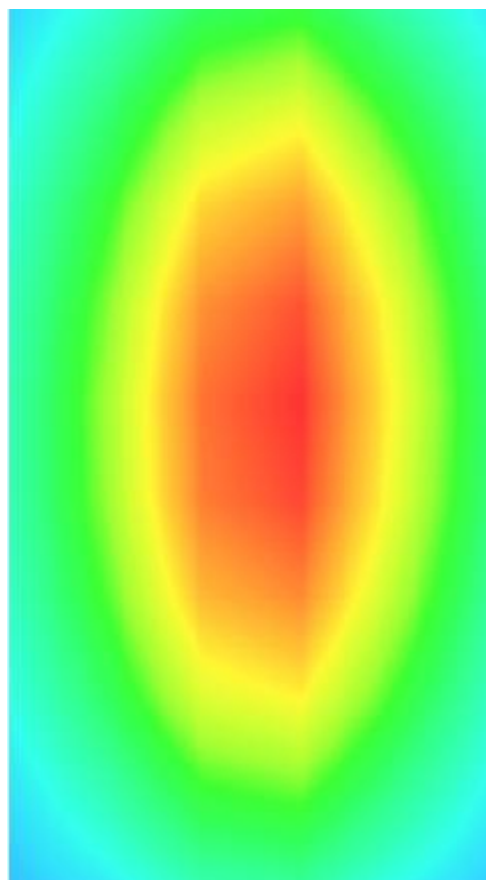

MEASUREMENT 3


Date of measurement: 6/12/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results


Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.639629
Relative permittivity (imaginary part)	13.926271
Conductivity (S/m)	1.392627
Variation (%)	-3.570000

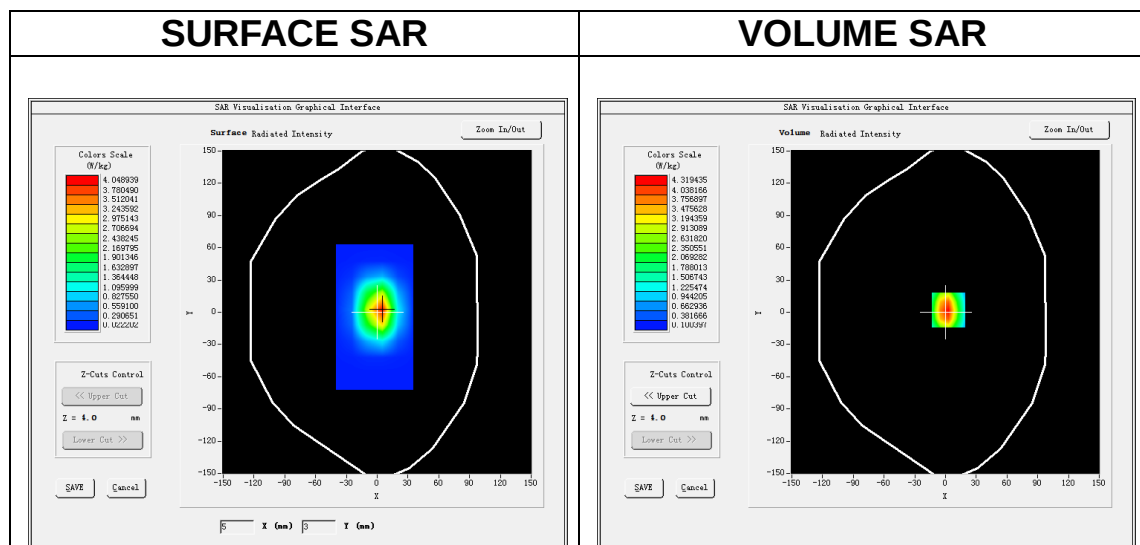


Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg


SAR 10g (W/Kg)	2.110138
SAR 1g (W/Kg)	3.689120

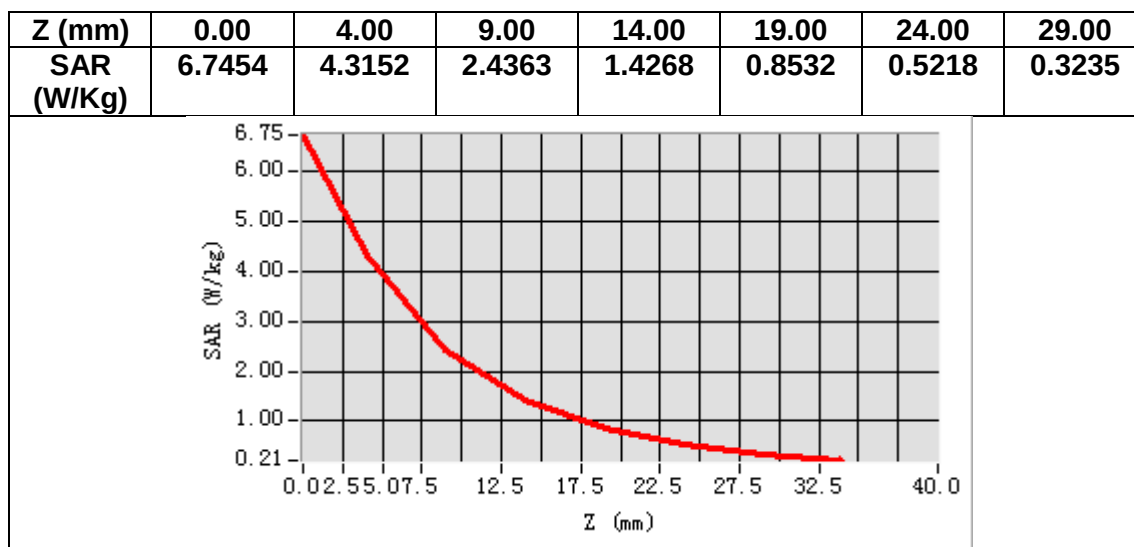

3D screen shot

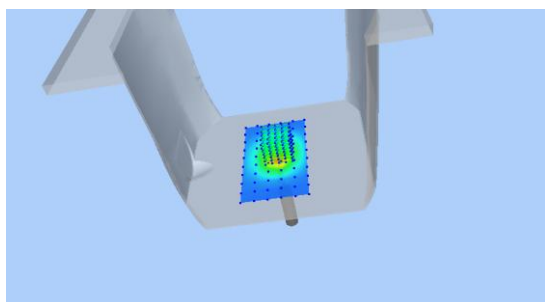

Hot spot position

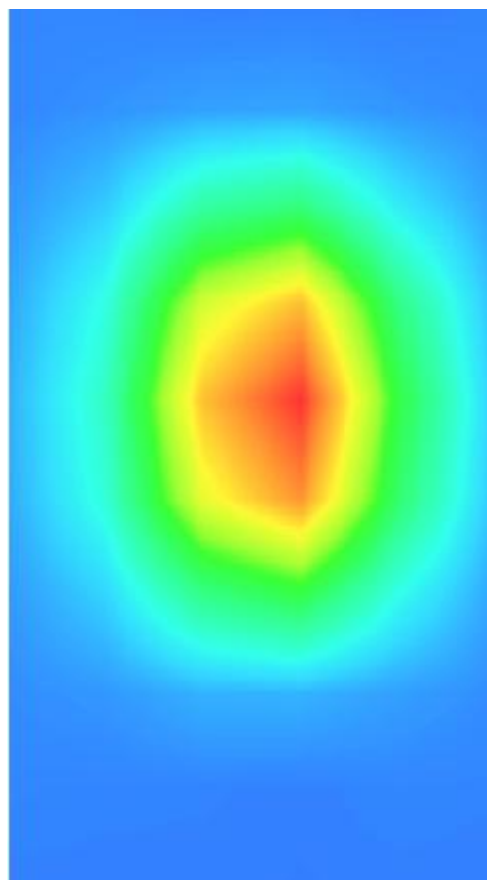

MEASUREMENT 4


Date of measurement: 15/12/2023

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>2.63</u>

B. SAR Measurement Results


Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.977879
Relative permittivity (imaginary part)	13.674442
Conductivity (S/m)	1.443413
Variation (%)	-1.560000

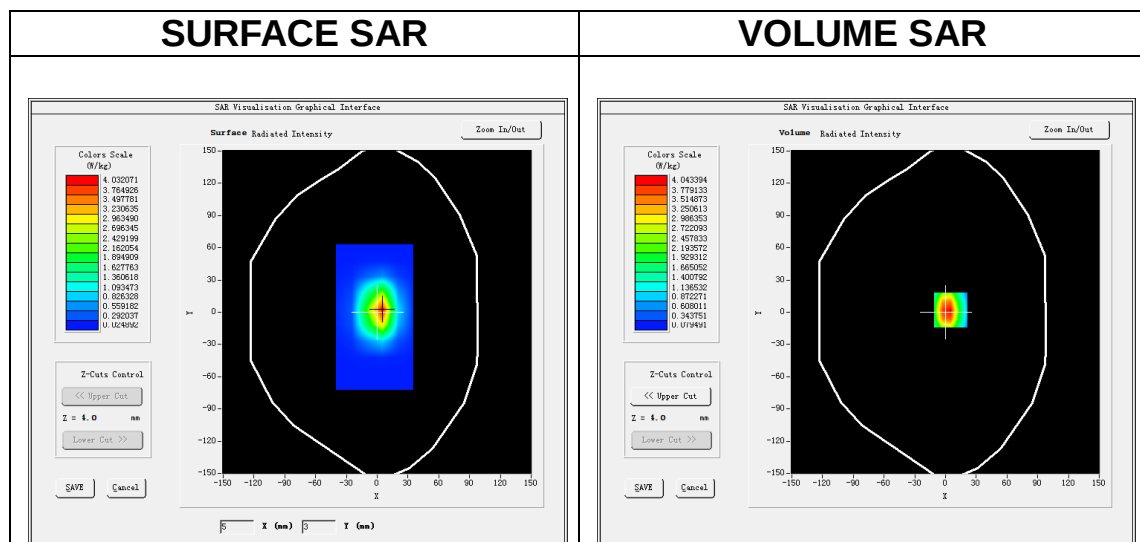


Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg


SAR 10g (W/Kg)	2.102012
SAR 1g (W/Kg)	4.023167

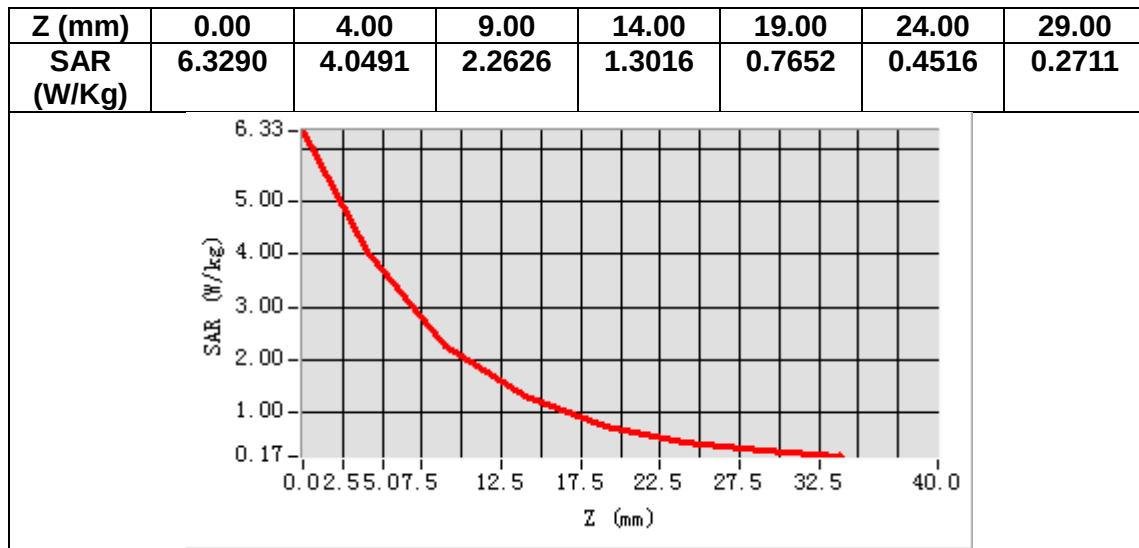

3D screen shot

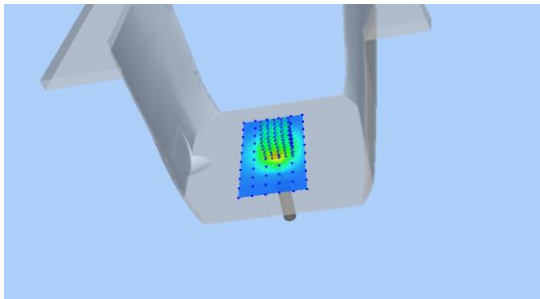

Hot spot position

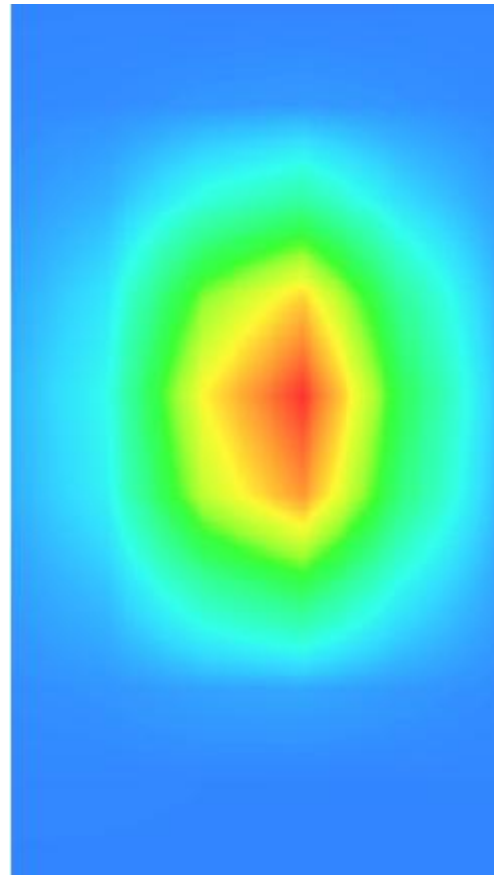

MEASUREMENT 5

Date of measurement: 18/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2300</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.81</u>


B. SAR Measurement Results

Frequency (MHz)	2300.000000
Relative permittivity (real part)	39.923615
Relative permittivity (imaginary part)	12.885335
Conductivity (S/m)	1.646459
Variation (%)	-0.280000

SURFACE SAR

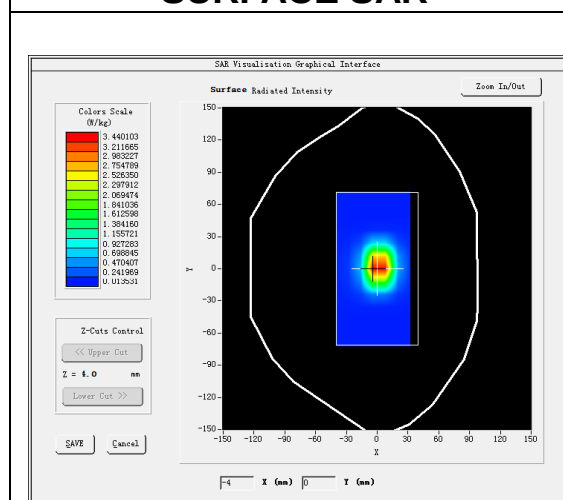


VOLUME SAR

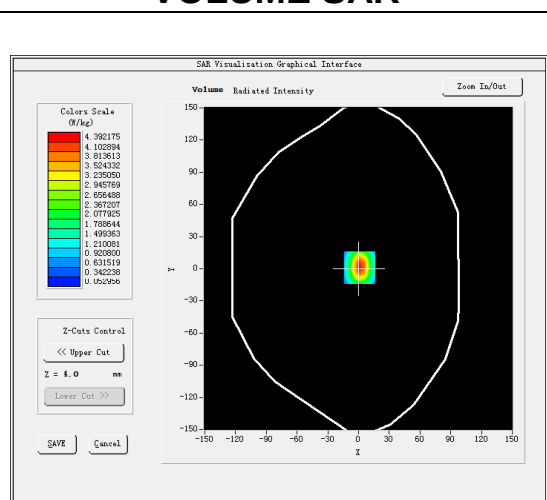


Maximum location: X=1.00, Y=1.00

SAR Peak: 7.04 W/kg


SAR 10g (W/Kg)	2.419331
SAR 1g (W/Kg)	4.640268

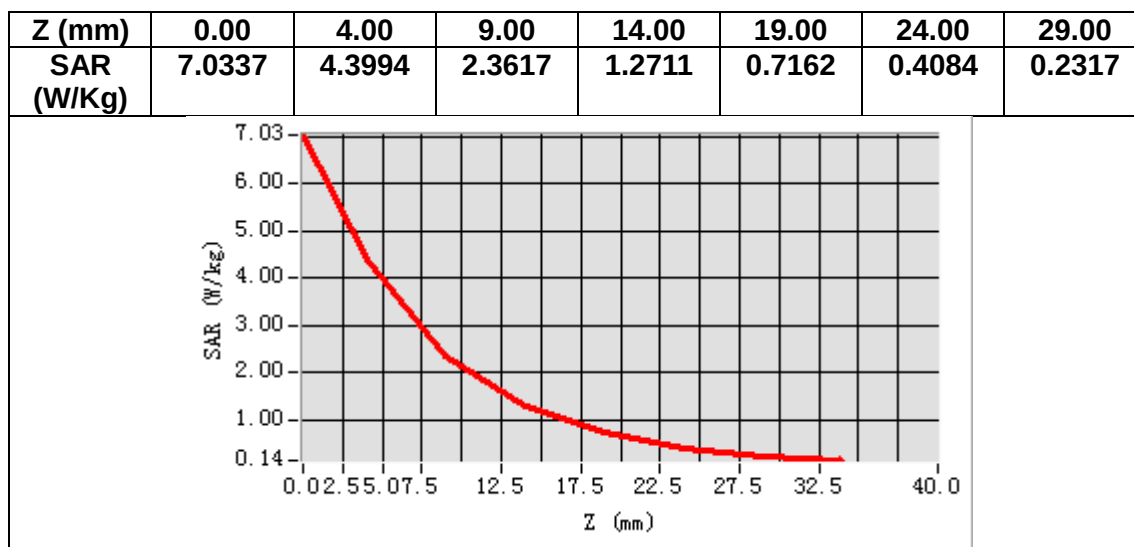

3D screen shot

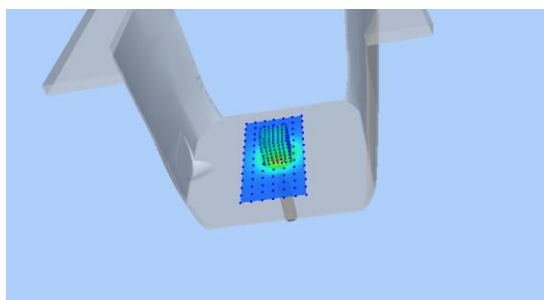

Hot spot position

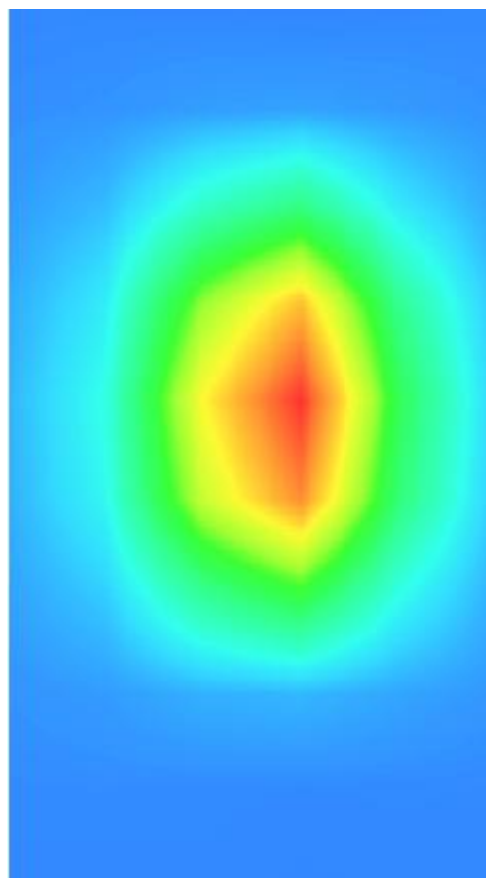

MEASUREMENT 6

Date of measurement: 7/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.459761
Relative permittivity (imaginary part)	12.980694
Conductivity (S/m)	1.766817
Variation (%)	2.500000

SURFACE SAR

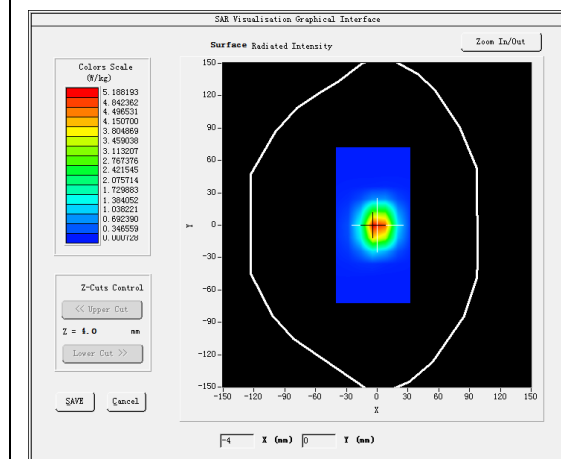


VOLUME SAR

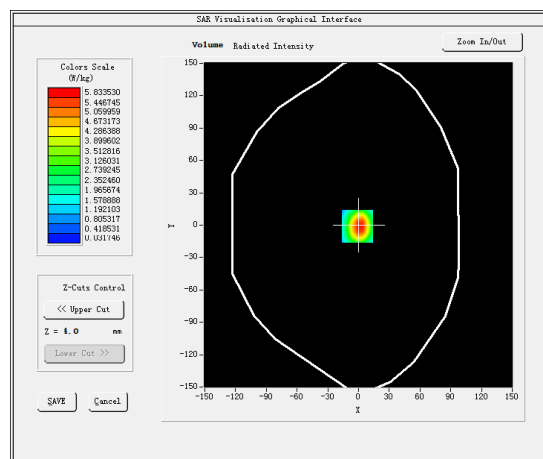


Maximum location: X=-1.00, Y=-1.00

SAR Peak: 9.83 W/kg


SAR 10g (W/Kg)	2.243105
SAR 1g (W/Kg)	5.481294

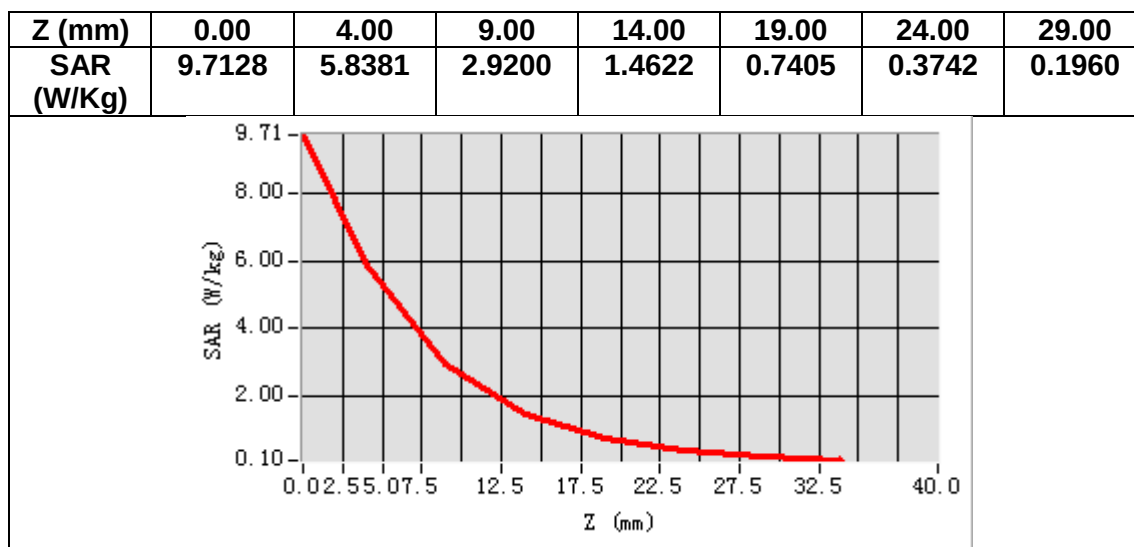

3D screen shot

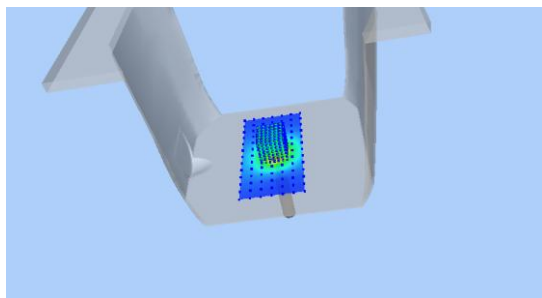

Hot spot position

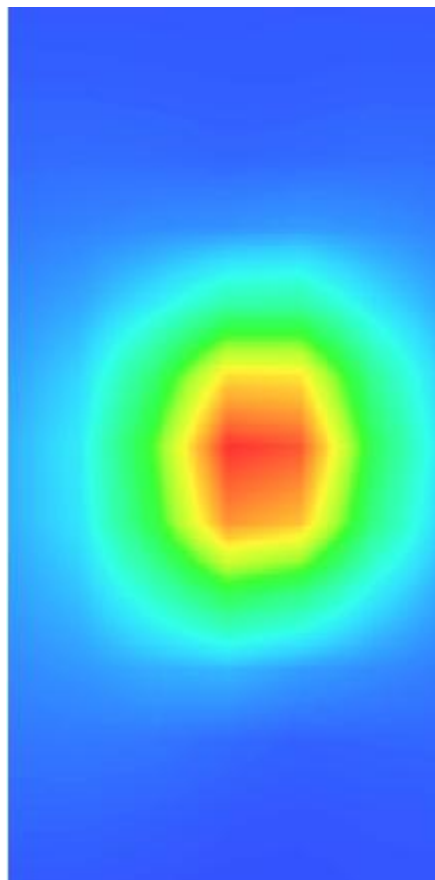

MEASUREMENT 7

Date of measurement: 11/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.680421
Relative permittivity (imaginary part)	13.400164
Conductivity (S/m)	1.935579
Variation (%)	-2.070000

SURFACE SAR

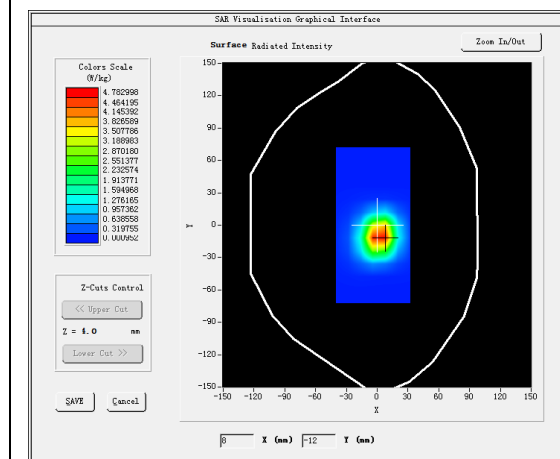


VOLUME SAR

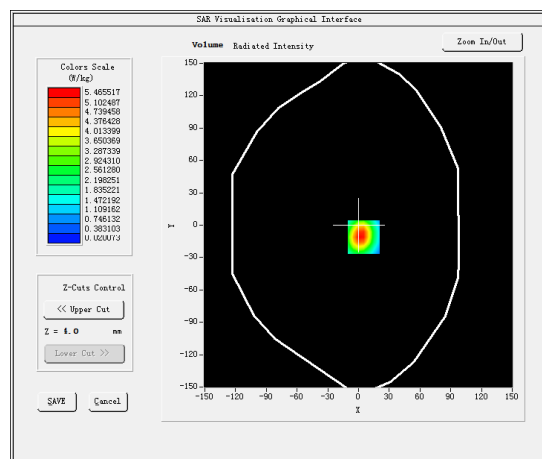


Maximum location: X=5.00, Y=-11.00

SAR Peak: 9.43 W/kg


SAR 10g (W/Kg)	2.458258
SAR 1g (W/Kg)	5.237367

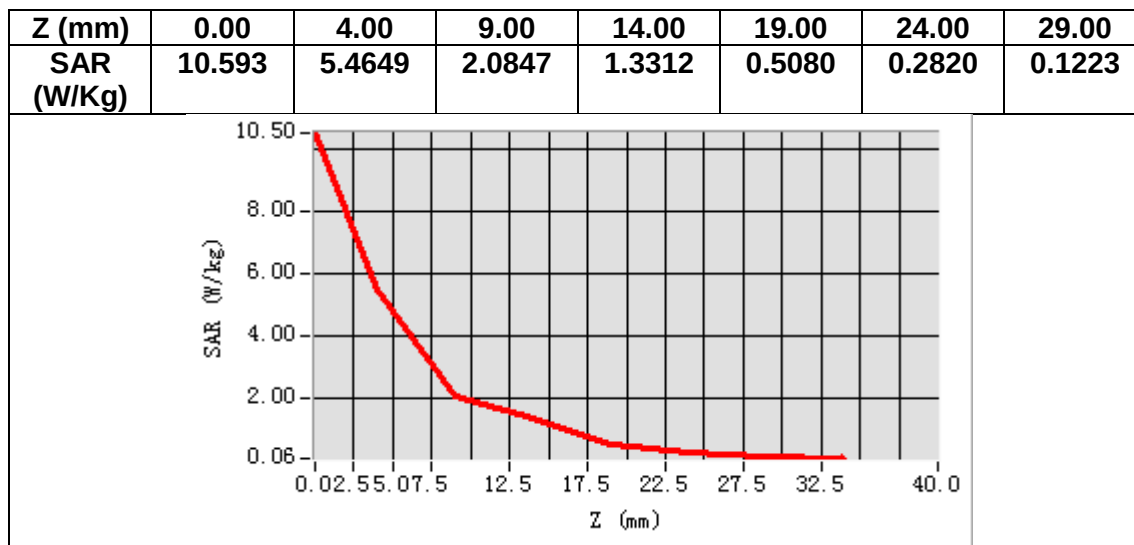

3D screen shot

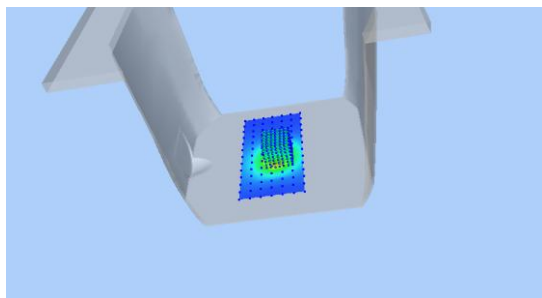

Hot spot position

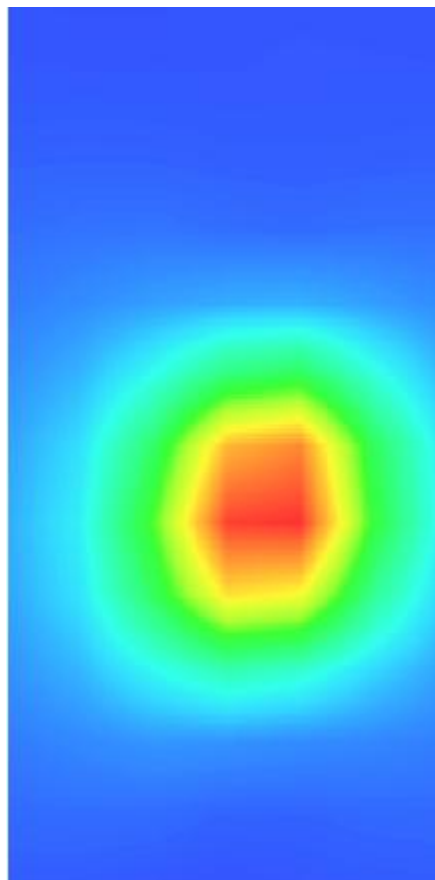

MEASUREMENT 8


Date of measurement: 16/12/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.363511
Relative permittivity (imaginary part)	15.461054
Conductivity (S/m)	4.466527
Variation (%)	3.790000

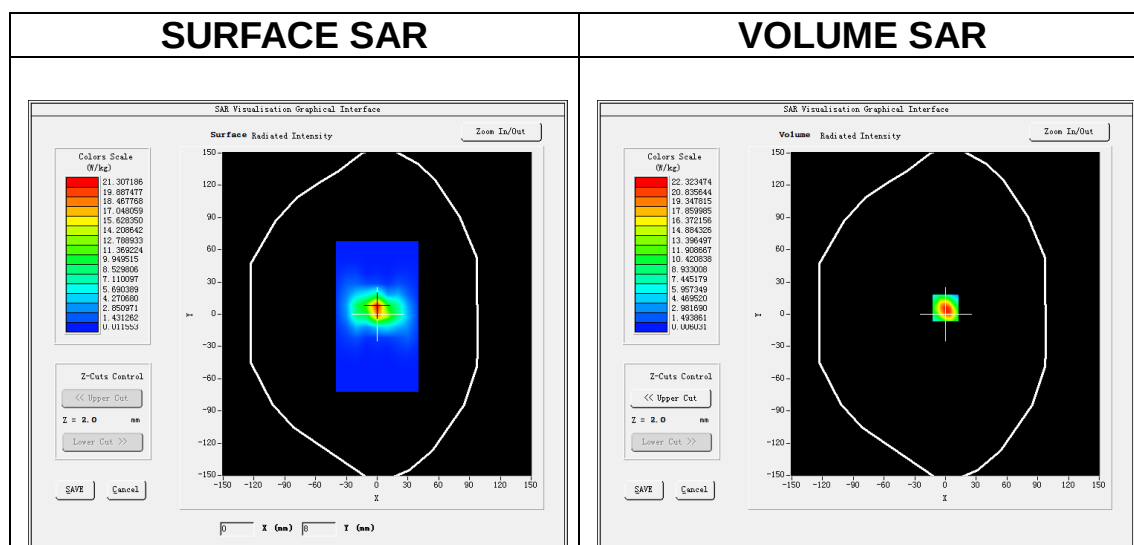


Maximum location: X=0.00, Y=6.00


SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.015217
SAR 1g (W/Kg)	16.500024


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	37.8 23	22.3 59	11.3 97	5.66 31	2.82 50	1.40 23	0.71 98	0.36 20	0.18 37	0.10 96	0.05 42	0.03 27

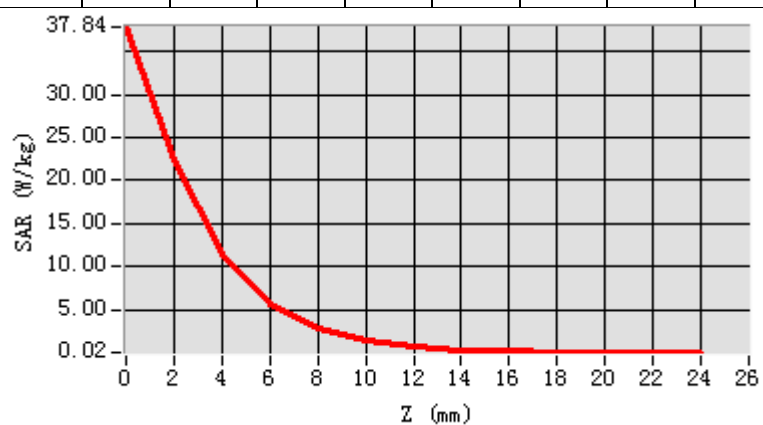

3D screen shot

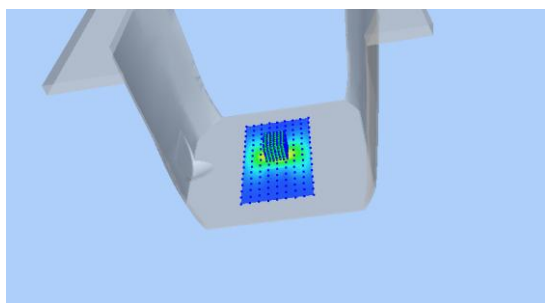

Hot spot position

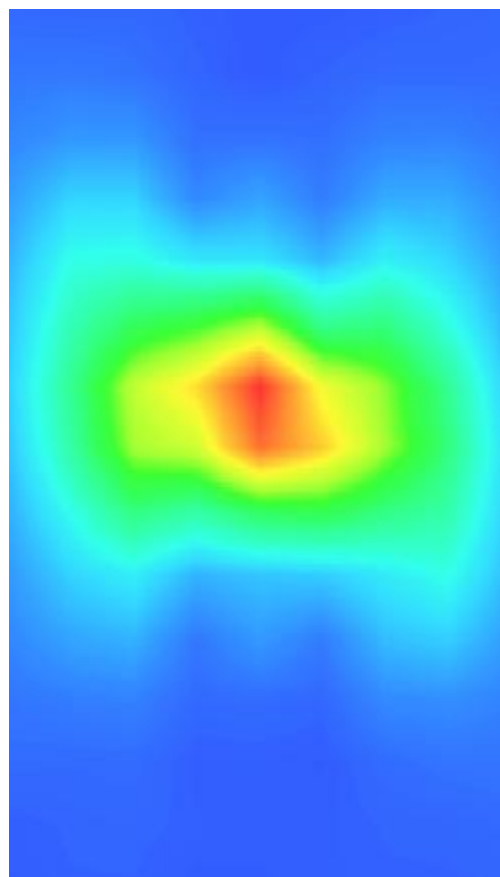

MEASUREMENT 9


Date of measurement: 8/12/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.927182
Relative permittivity (imaginary part)	16.408457
Conductivity (S/m)	5.287169
Variation (%)	-1.540000

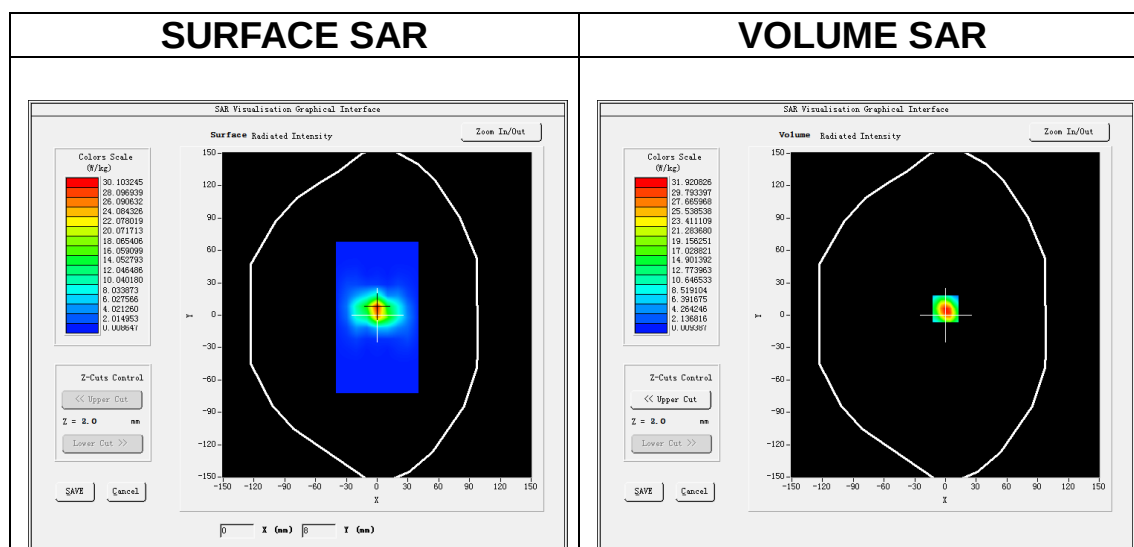

Maximum location: X=0.00, Y=6.00

SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	5.975177
SAR 1g (W/Kg)	17.110230

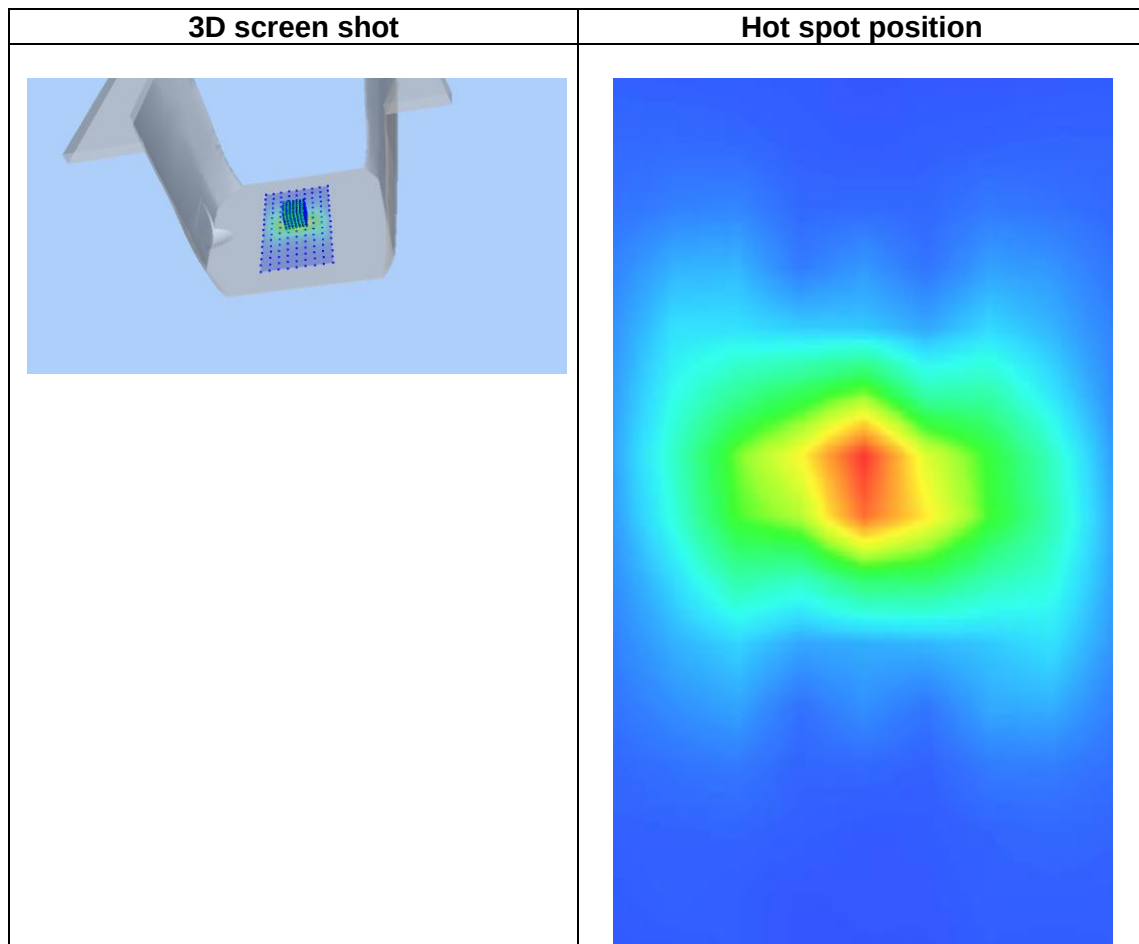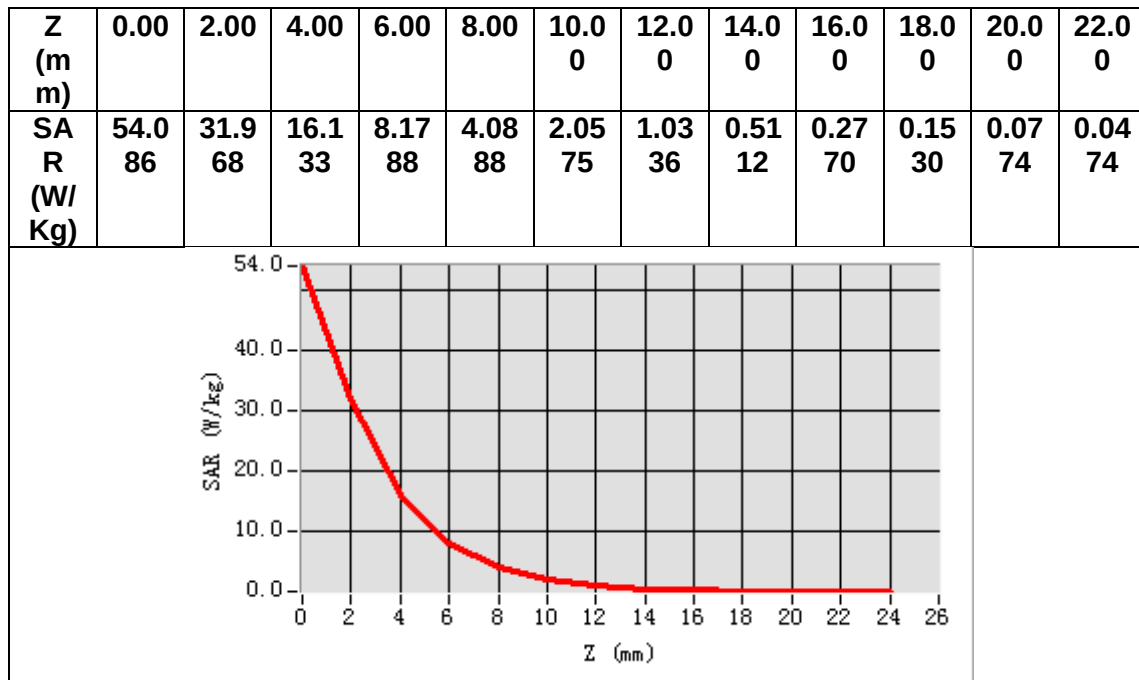

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Body
MEASUREMENT 2 GSM 1900 Body
MEASUREMENT 3 WCDMA Band 2 Body
MEASUREMENT 4 WCDMA Band 4 Body
MEASUREMENT 5 WCDMA Band 5 Body
MEASUREMENT 6 WLAN 5.8G Body
MEASUREMENT 7 WLAN 5.2G Body
MEASUREMENT 8 WLAN 2.4G Body
MEASUREMENT 9 LTE Band 2 Body
MEASUREMENT 10 LTE Band 4 Body
MEASUREMENT 11 LTE Band 5 Body
MEASUREMENT 12 LTE Band 7 Body
MEASUREMENT 13 LTE Band 12 Body
MEASUREMENT 14 LTE Band 17 Body
MEASUREMENT 15 LTE Band 25 Body
MEASUREMENT 16 LTE Band 38 Body
MEASUREMENT 17 LTE Band 40A Body
MEASUREMENT 18 LTE Band 40B Body
MEASUREMENT 19 LTE Band 41 Body
MEASUREMENT 20 LTE Band 26A Body
MEASUREMENT 21 LTE Band 26B Body
MEASUREMENT 22 LTE Band 66 Body

MEASUREMENT 1

Date of measurement: 14/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	848.800000
Relative permittivity (real part)	41.216061
Relative permittivity (imaginary part)	19.318298
Conductivity (S/m)	0.910965
Variation (%)	2.490000

SURFACE SAR

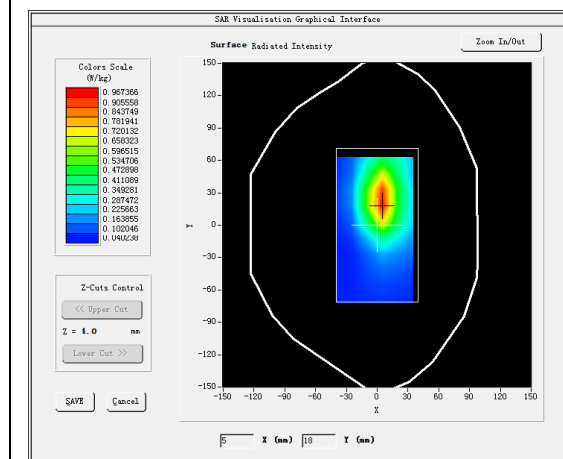


VOLUME SAR

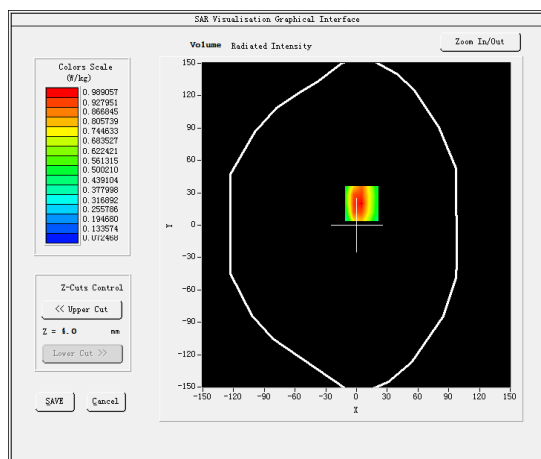


Maximum location: X=5.00, Y=20.00

SAR Peak: 1.61 W/kg


SAR 10g (W/Kg)	0.546905
SAR 1g (W/Kg)	0.974519

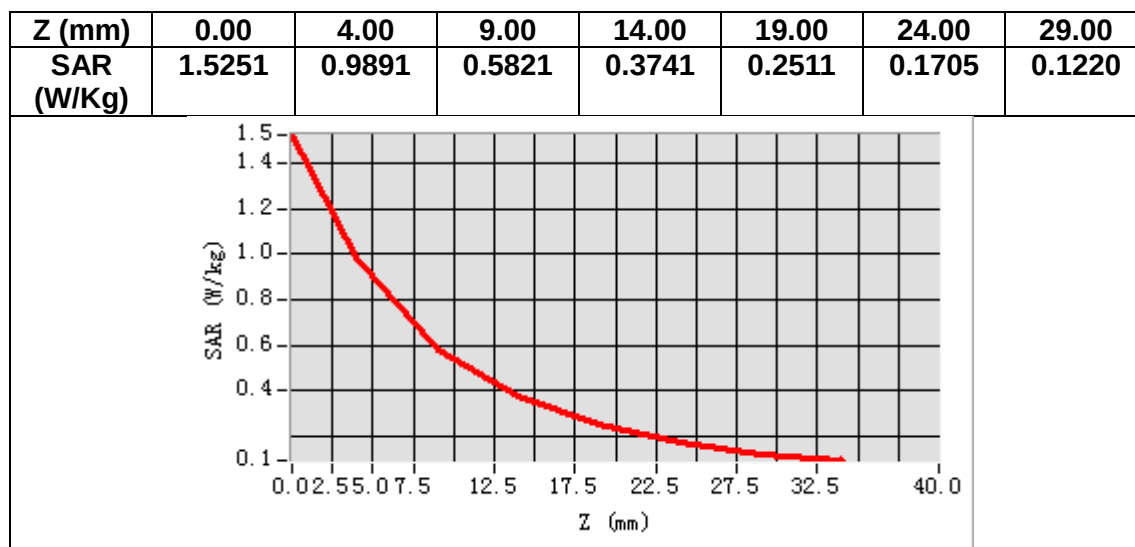

3D screen shot

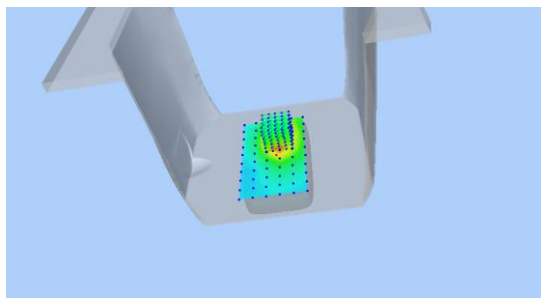

Hot spot position

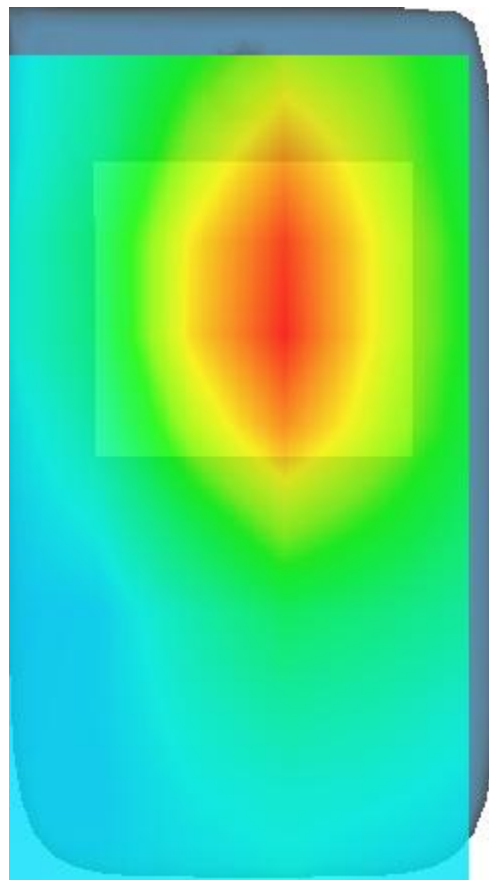

MEASUREMENT 2

Date of measurement: 15/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.053181
Relative permittivity (imaginary part)	13.722342
Conductivity (S/m)	1.433222
Variation (%)	-4.720000

SURFACE SAR

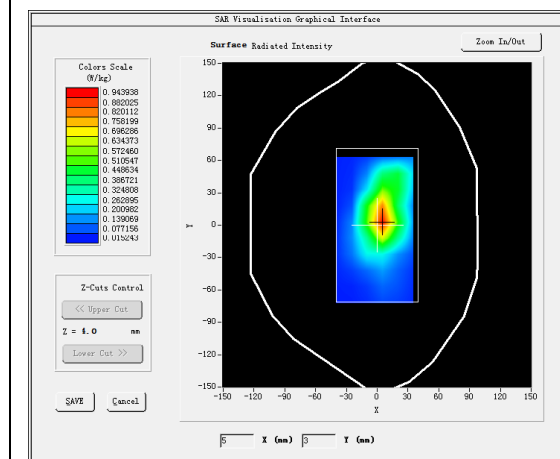


VOLUME SAR

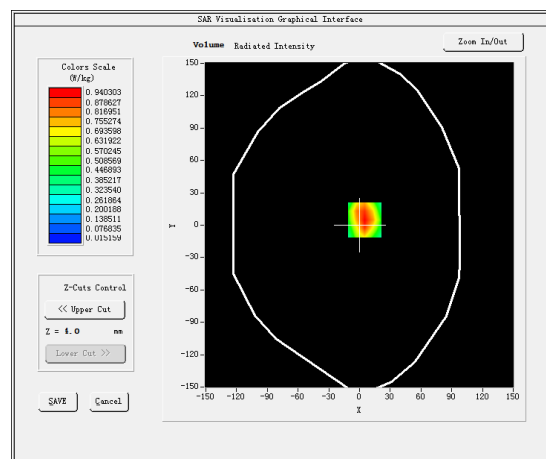


Maximum location: X=5.00, Y=5.00

SAR Peak: 1.58 W/kg


SAR 10g (W/Kg)	0.470130
SAR 1g (W/Kg)	0.908531

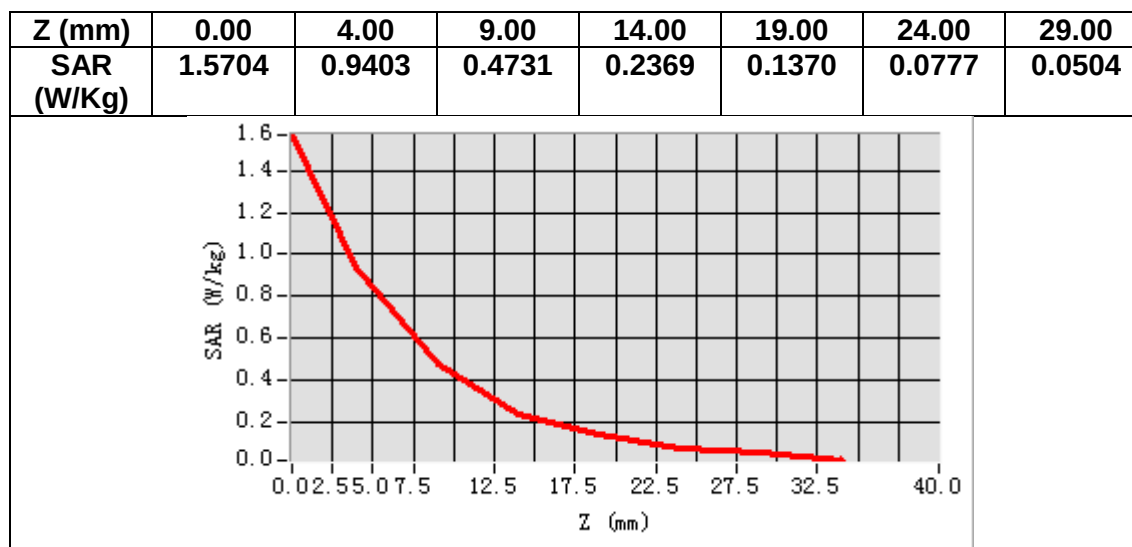

3D screen shot

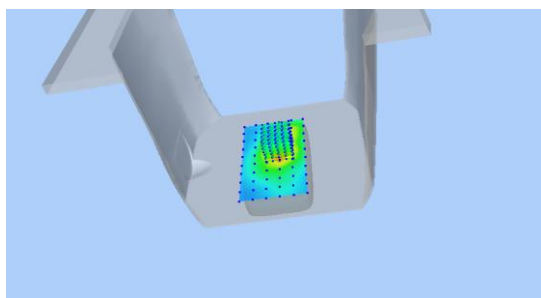

Hot spot position

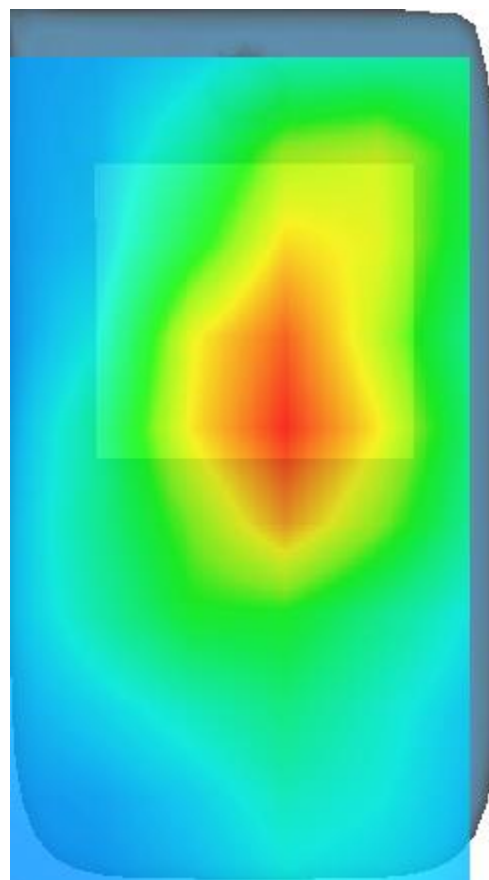

MEASUREMENT 3

Date of measurement: 15/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.053181
Relative permittivity (imaginary part)	13.722342
Conductivity (S/m)	1.433222
Variation (%)	1.720000

SURFACE SAR

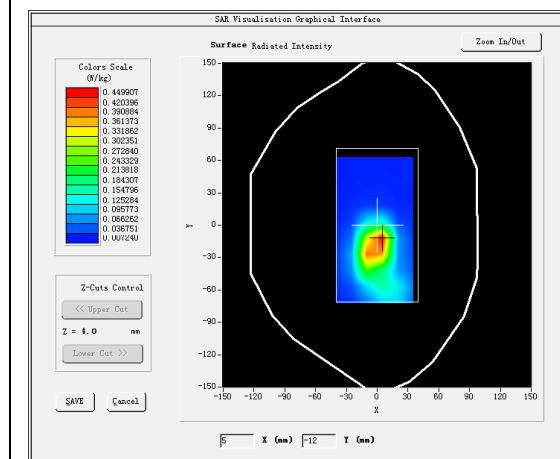


VOLUME SAR

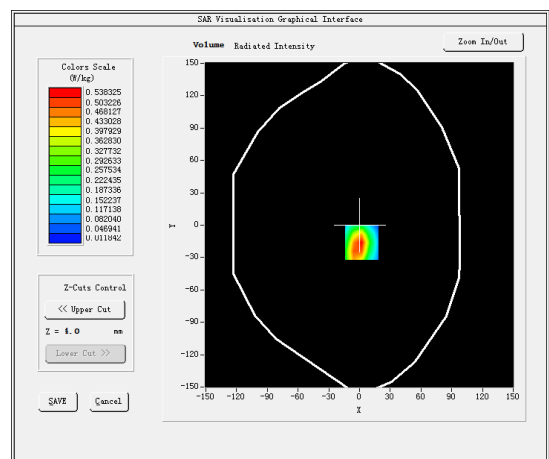


Maximum location: X=2.00, Y=-16.00

SAR Peak: 1.01 W/kg


SAR 10g (W/Kg)	0.233104
SAR 1g (W/Kg)	0.534013

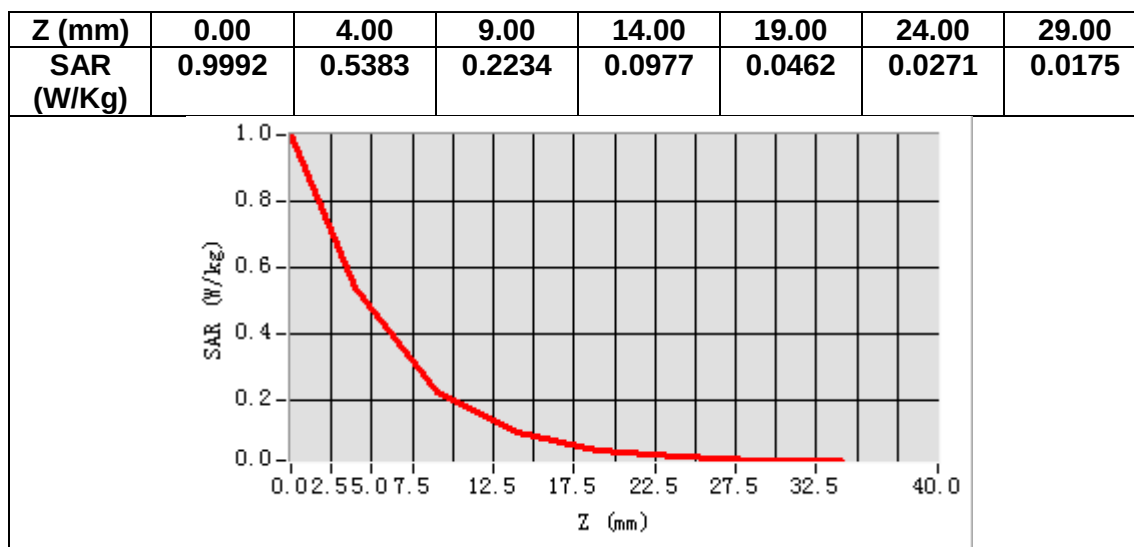

3D screen shot

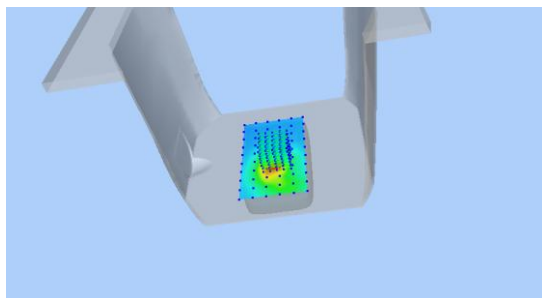

Hot spot position

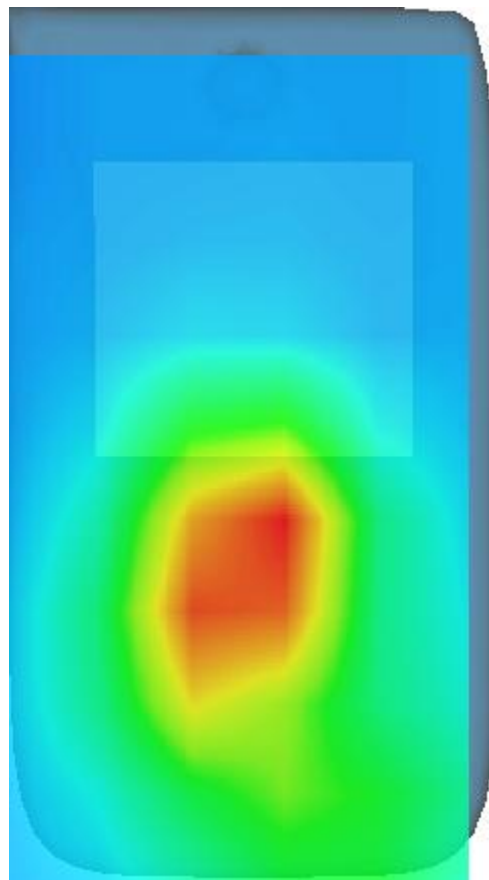

MEASUREMENT 4

Date of measurement: 6/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.099331
Relative permittivity (imaginary part)	13.878571
Conductivity (S/m)	1.335427
Variation (%)	0.380000

SURFACE SAR

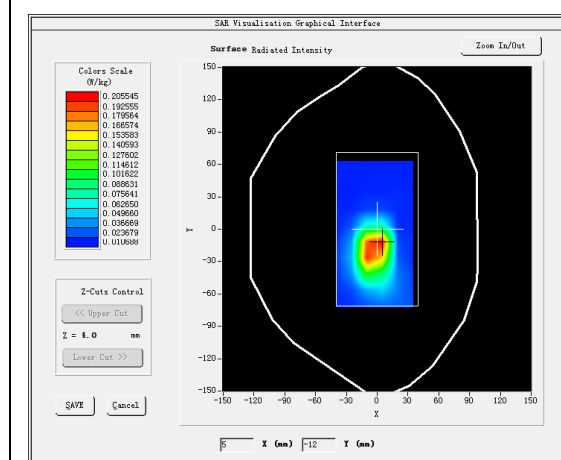


VOLUME SAR

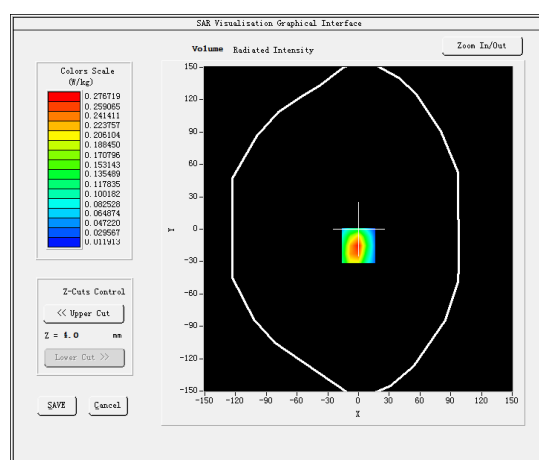


Maximum location: X=0.00, Y=-15.00

SAR Peak: 0.50 W/kg


SAR 10g (W/Kg)	0.121097
SAR 1g (W/Kg)	0.266374

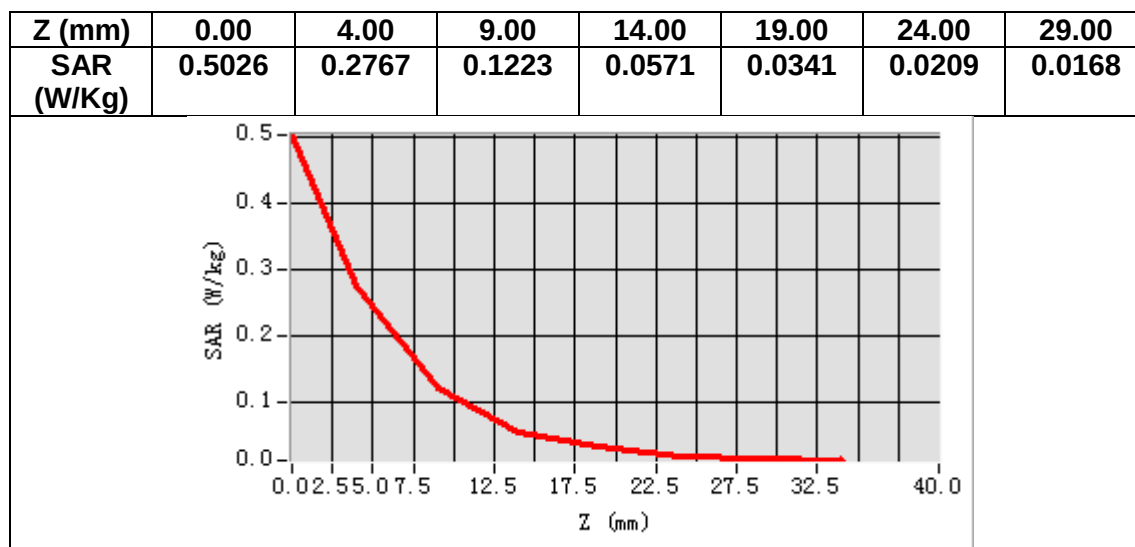

3D screen shot

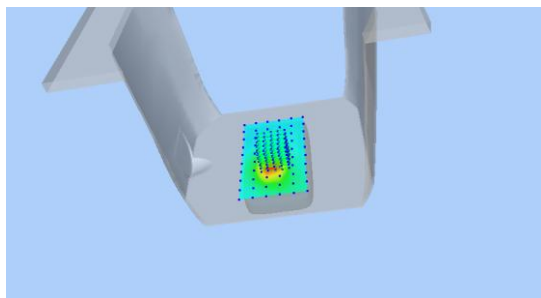

Hot spot position

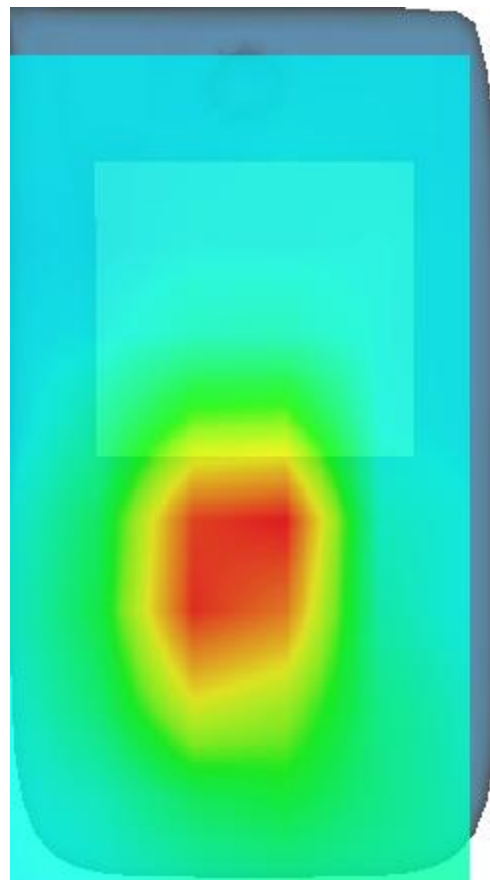

MEASUREMENT 5

Date of measurement: 14/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative permittivity (real part)	41.564461
Relative permittivity (imaginary part)	19.277178
Conductivity (S/m)	0.885037
Variation (%)	-0.560000

SURFACE SAR

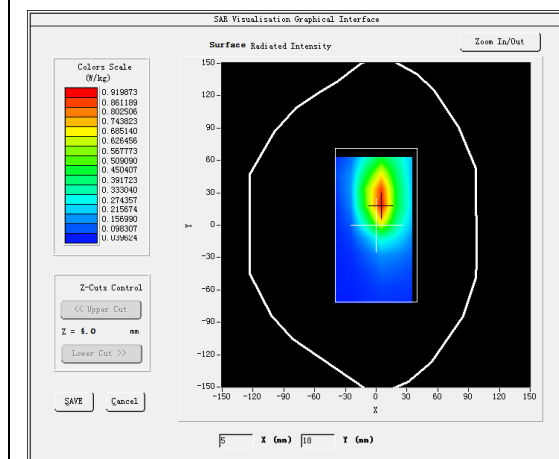


VOLUME SAR

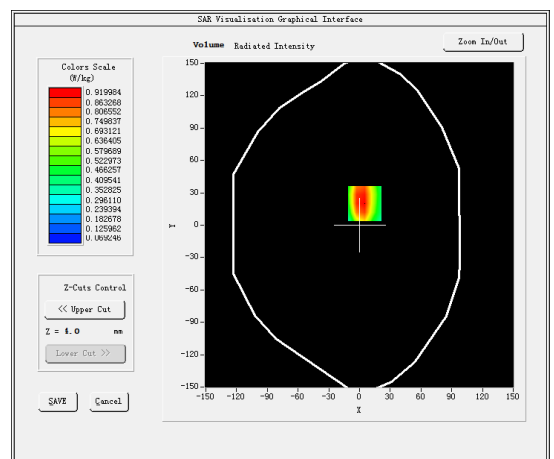


Maximum location: X=5.00, Y=20.00

SAR Peak: 1.47 W/kg


SAR 10g (W/Kg)	0.524799
SAR 1g (W/Kg)	0.914866

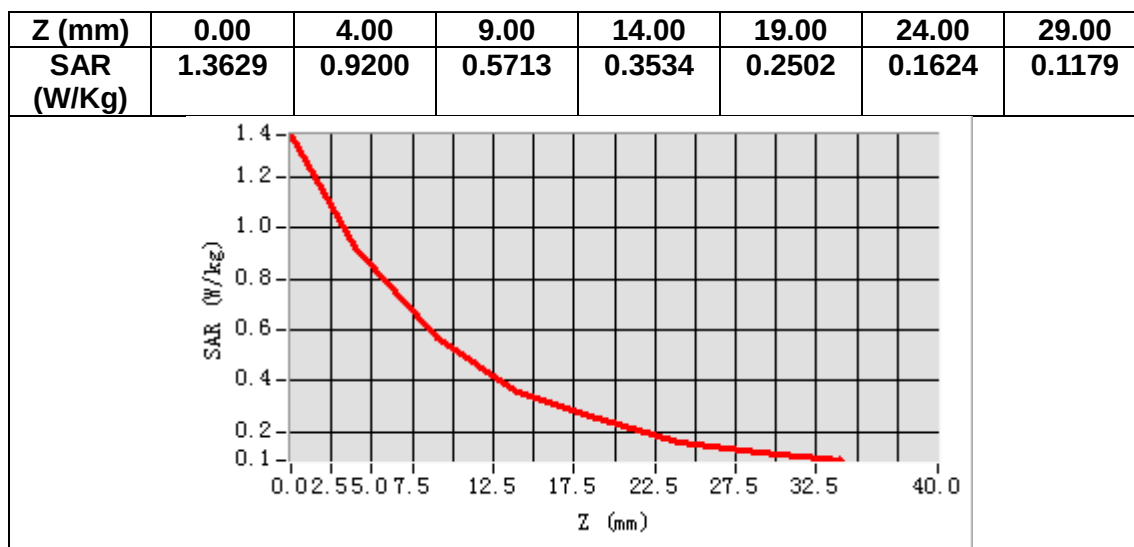

3D screen shot

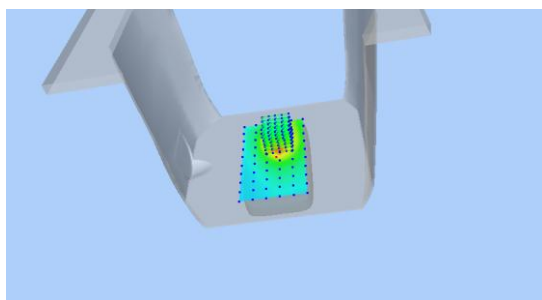

Hot spot position

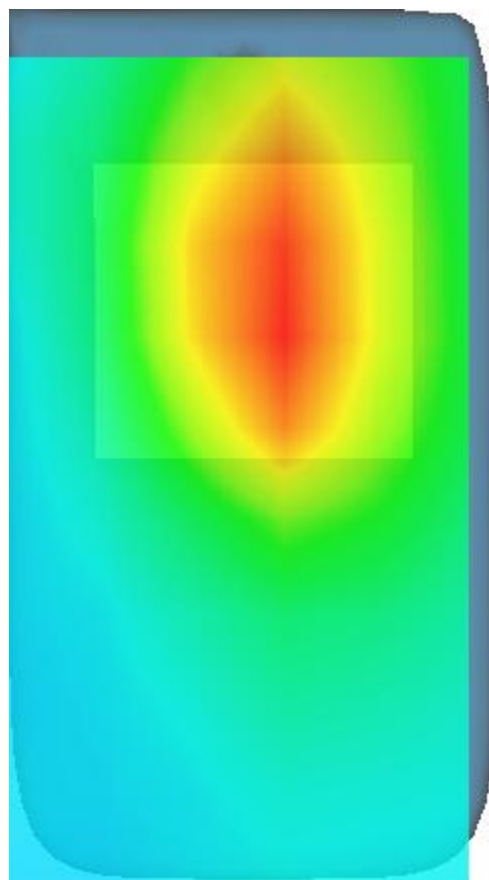

MEASUREMENT 6

Date of measurement: 8/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	35.003132
Relative permittivity (imaginary part)	16.284014
Conductivity (S/m)	5.233501
Variation (%)	2.550000

SURFACE SAR

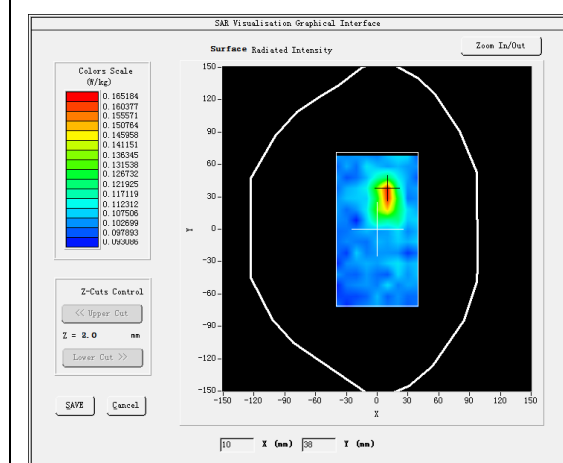



VOLUME SAR

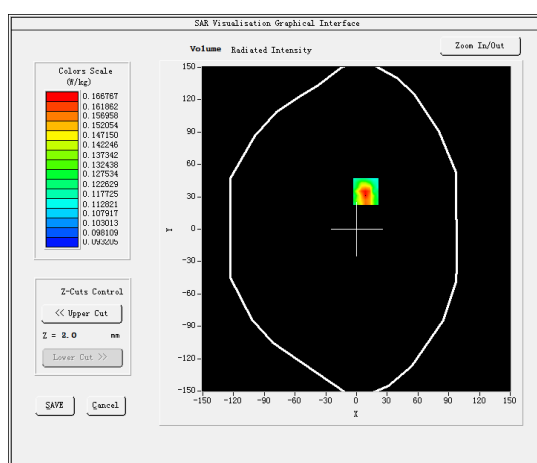

Maximum location: X=9.00, Y=35.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.114850
SAR 1g (W/Kg)	0.137368

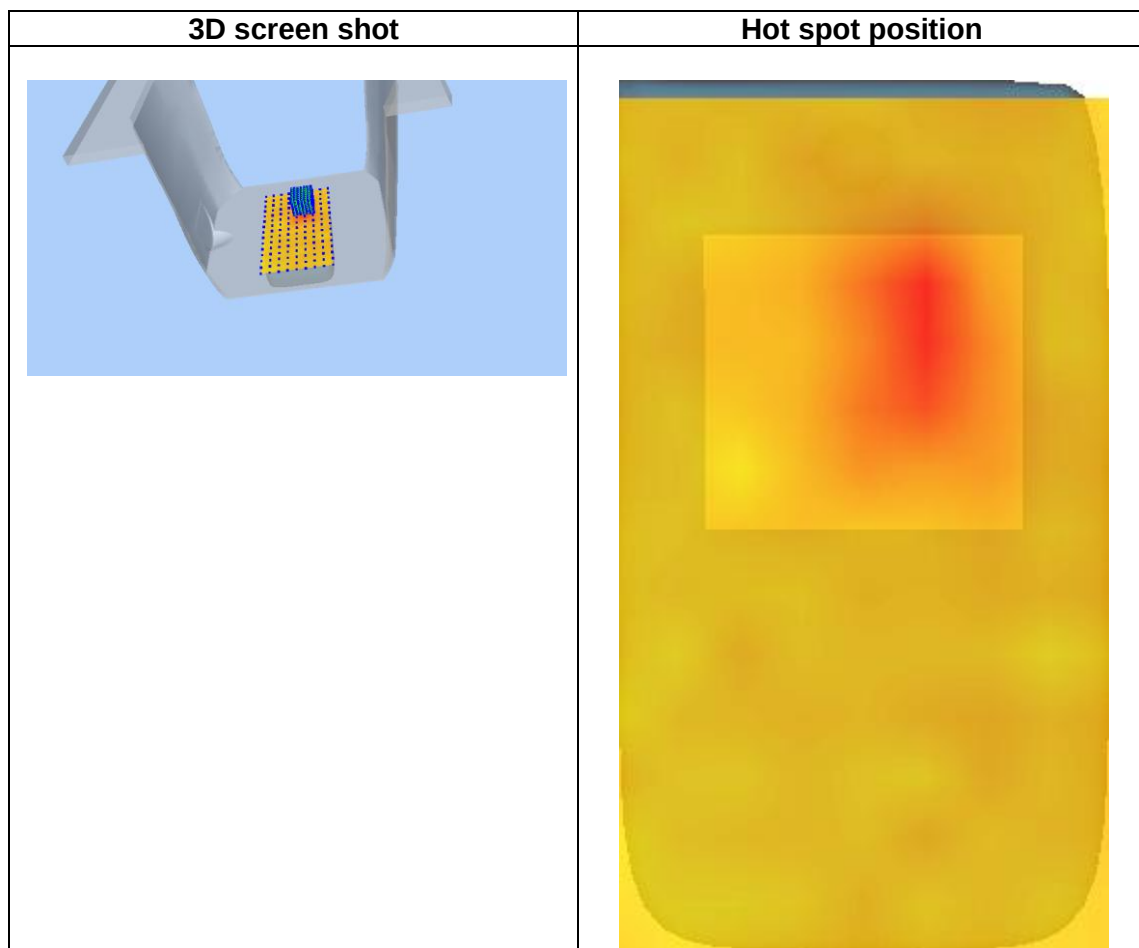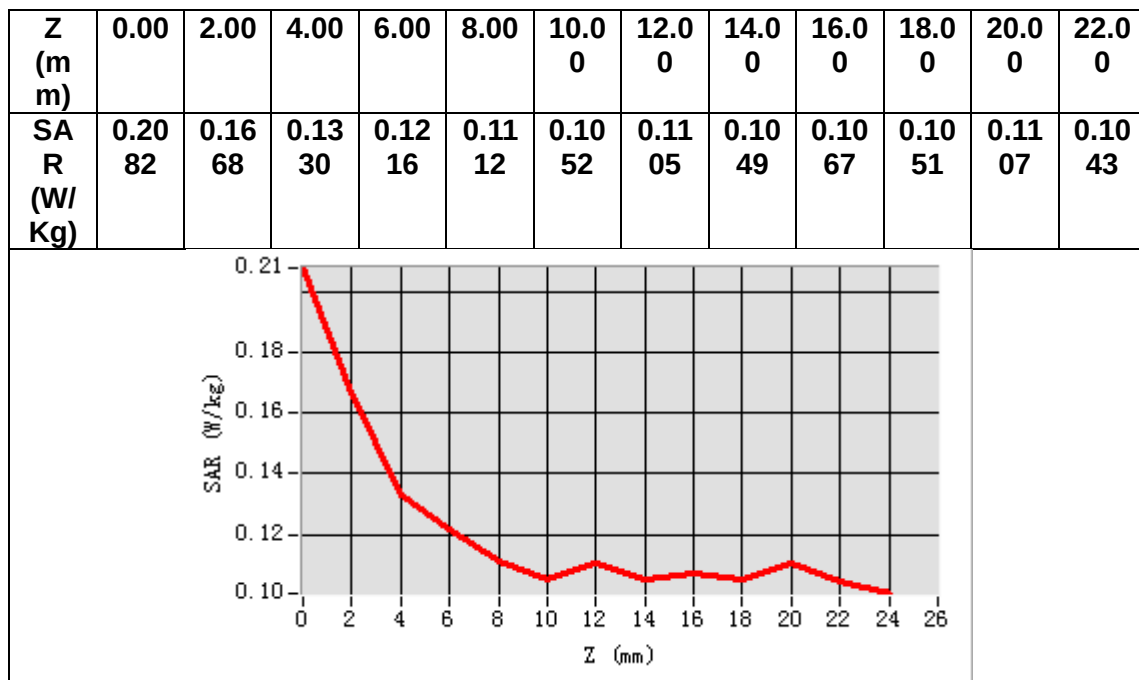

MEASUREMENT 7

Date of measurement: 16/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>


B. SAR Measurement Results

Frequency (MHz)	5180.000000
Relative permittivity (real part)	35.429664
Relative permittivity (imaginary part)	15.473104
Conductivity (S/m)	4.452815
Variation (%)	3.790000

SURFACE SAR

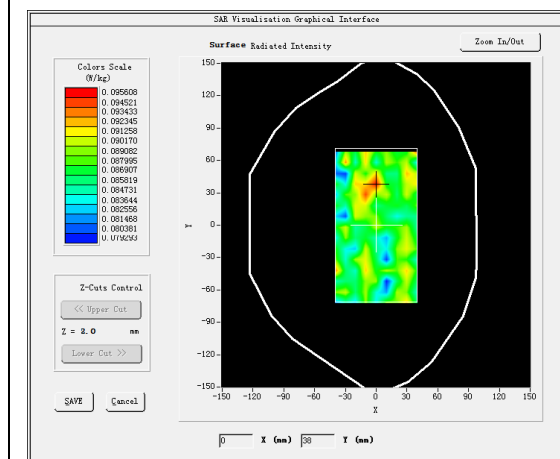



VOLUME SAR

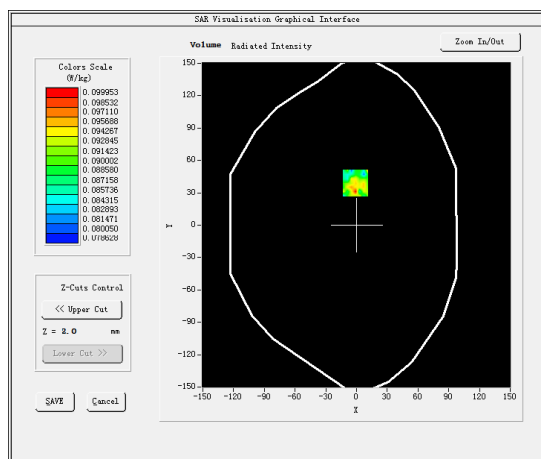

Maximum location: X=-1.00, Y=39.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.090331
SAR 1g (W/Kg)	0.092512

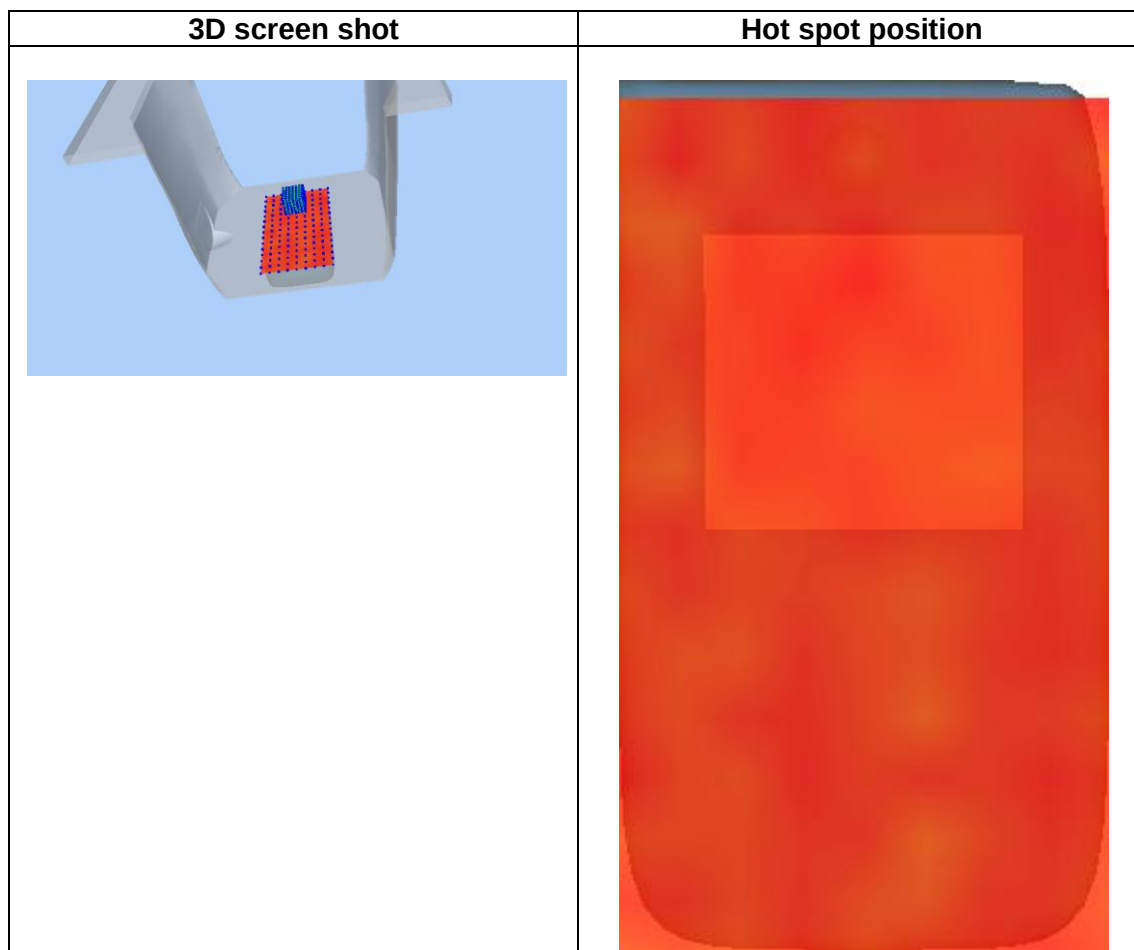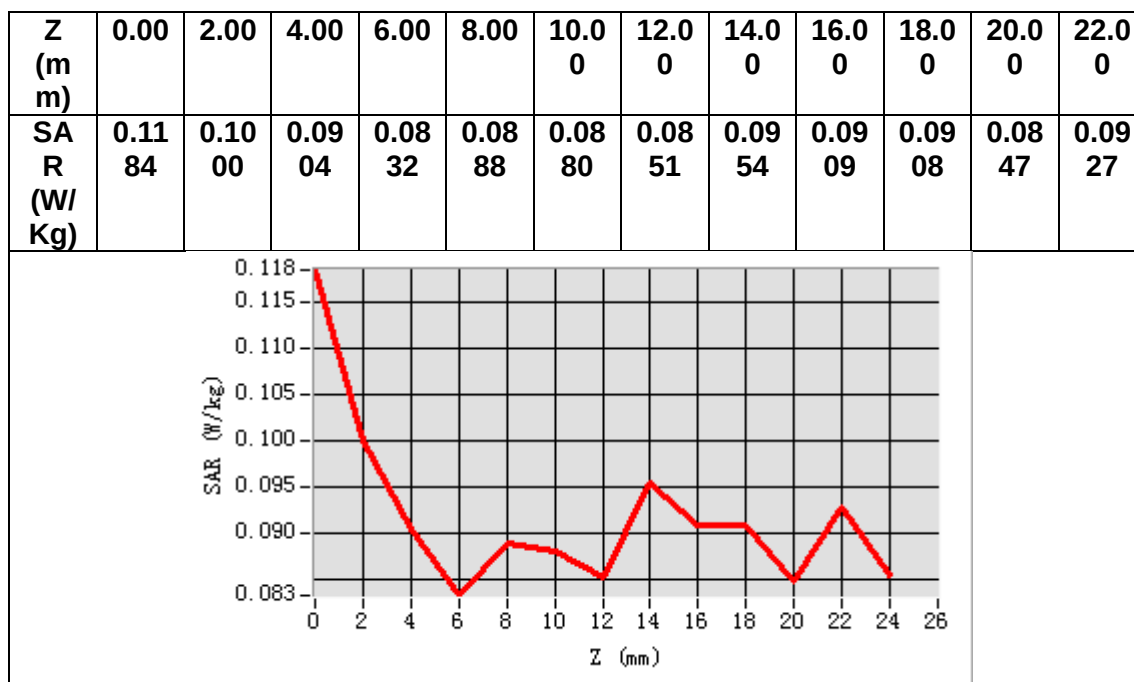

MEASUREMENT 8

Date of measurement: 7/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.511860
Relative permittivity (imaginary part)	12.899194
Conductivity (S/m)	1.746408
Variation (%)	-0.030000

SURFACE SAR

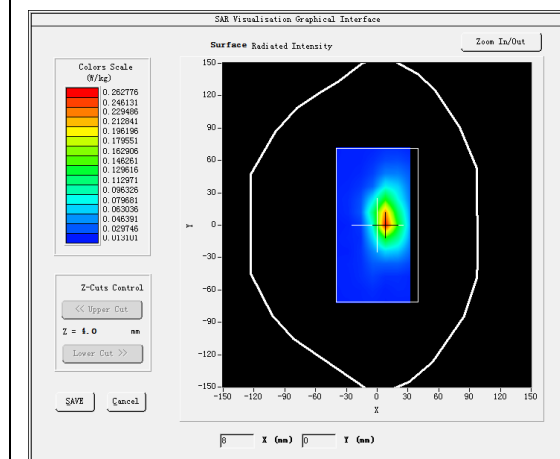


VOLUME SAR

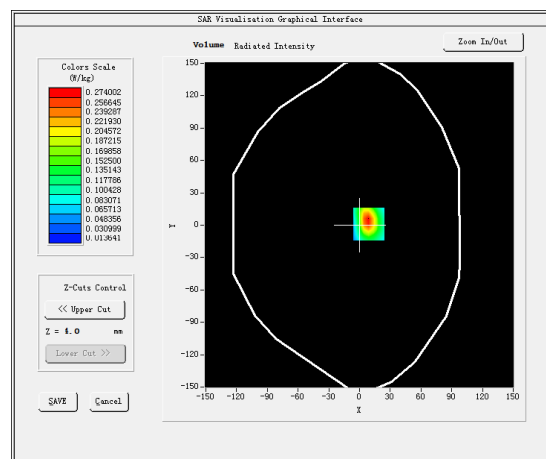


Maximum location: X=9.00, Y=1.00

SAR Peak: 0.52 W/kg


SAR 10g (W/Kg)	0.113099
SAR 1g (W/Kg)	0.255601

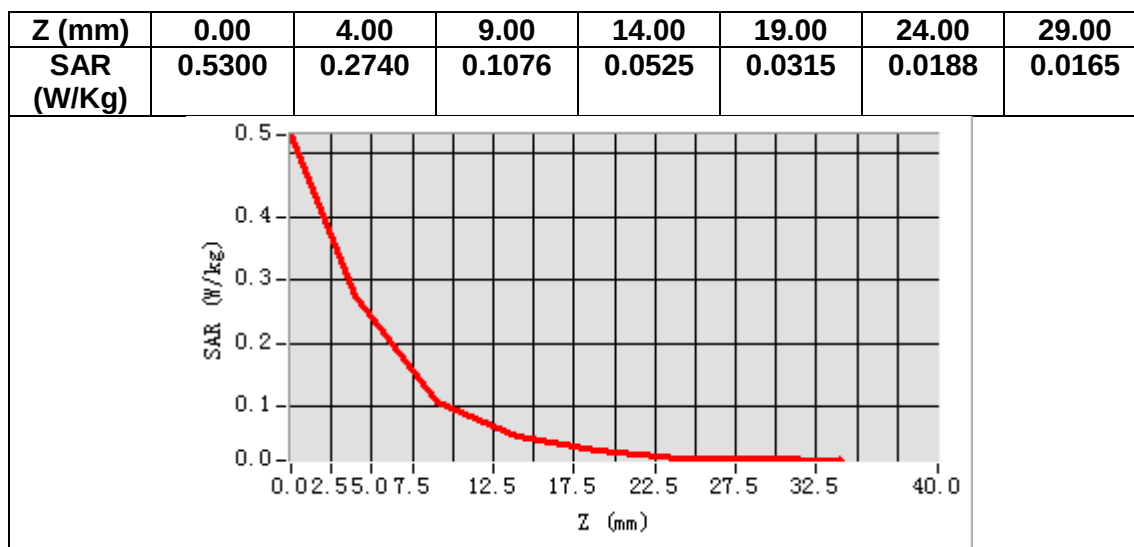

3D screen shot

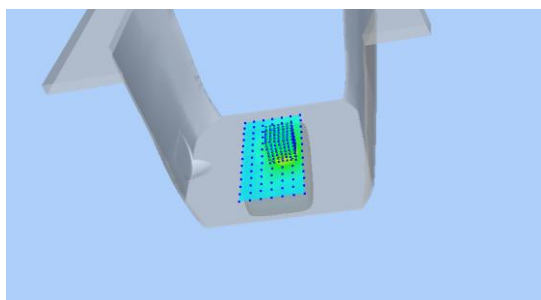

Hot spot position

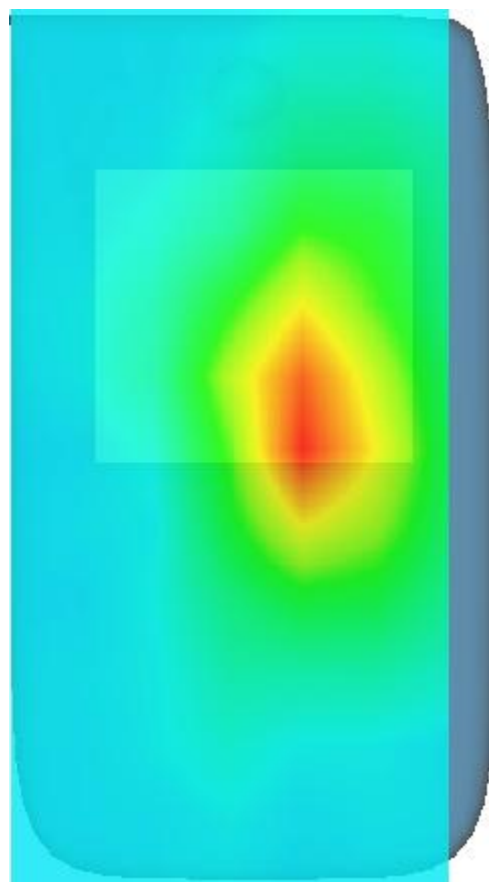

MEASUREMENT 9

Date of measurement: 15/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.053181
Relative permittivity (imaginary part)	13.722342
Conductivity (S/m)	1.433222
Variation (%)	2.790000

SURFACE SAR

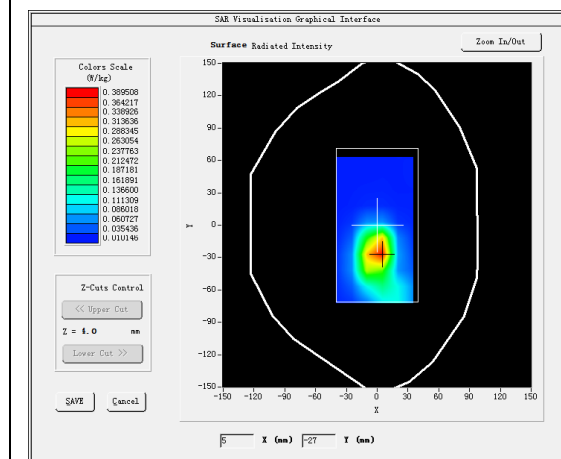


VOLUME SAR

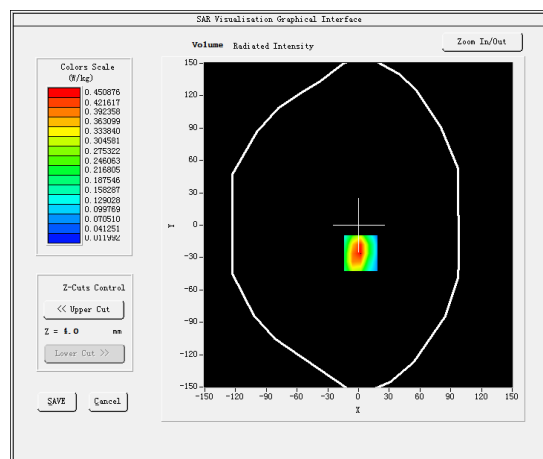


Maximum location: X=2.00, Y=-26.00

SAR Peak: 0.86 W/kg


SAR 10g (W/Kg)	0.196324
SAR 1g (W/Kg)	0.449919

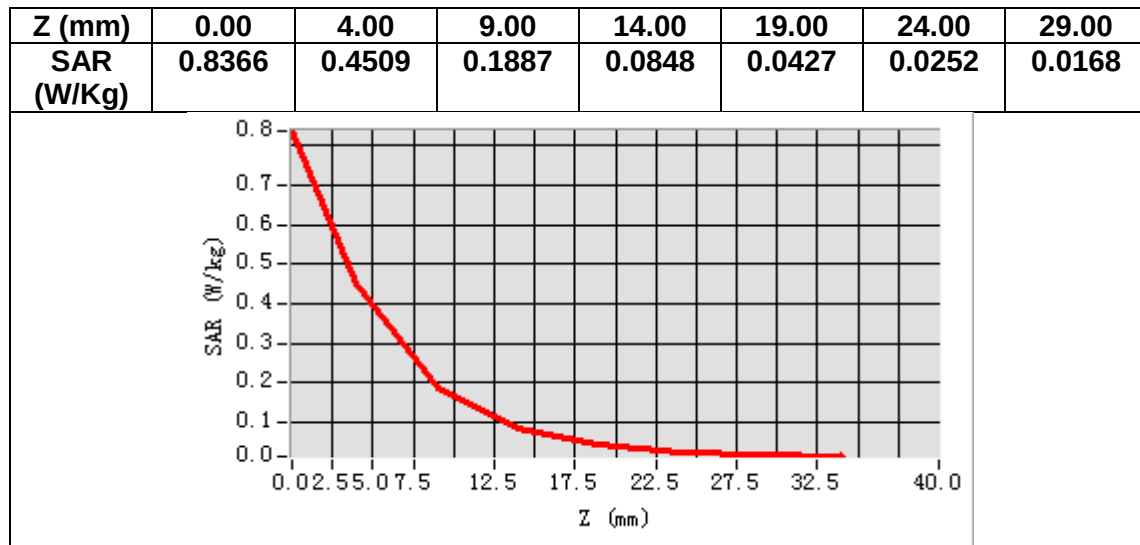

3D screen shot

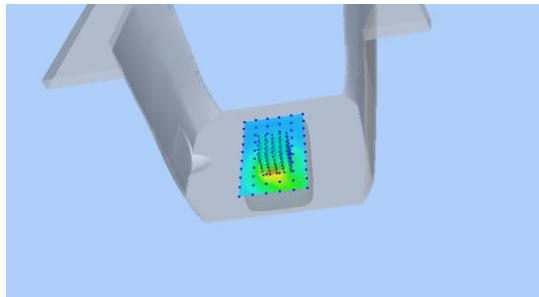

Hot spot position

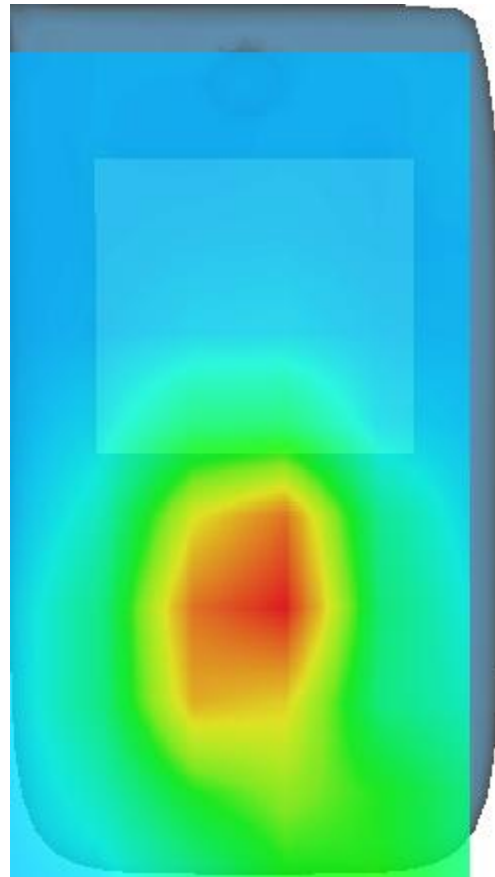

MEASUREMENT 10


Date of measurement: 6/12/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results


Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.107227
Relative permittivity (imaginary part)	13.863421
Conductivity (S/m)	1.334354
Variation (%)	-0.870000

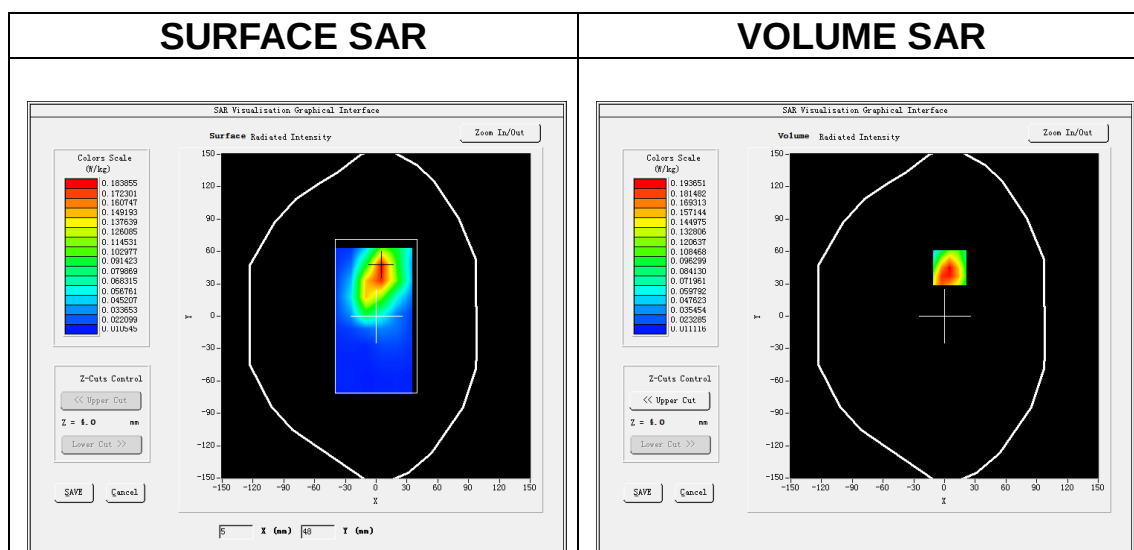


Maximum location: X=5.00, Y=45.00

SAR Peak: 0.38 W/kg


SAR 10g (W/Kg)	0.094950
SAR 1g (W/Kg)	0.195583

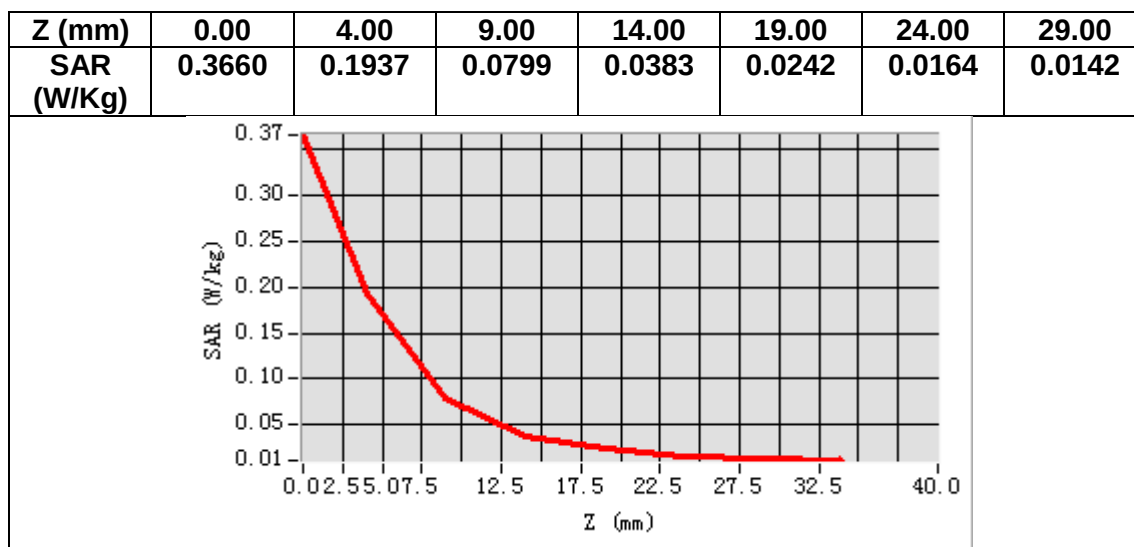

3D screen shot

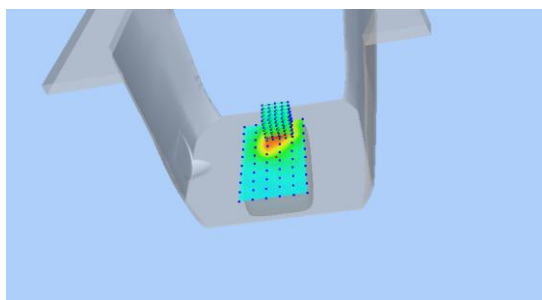

Hot spot position

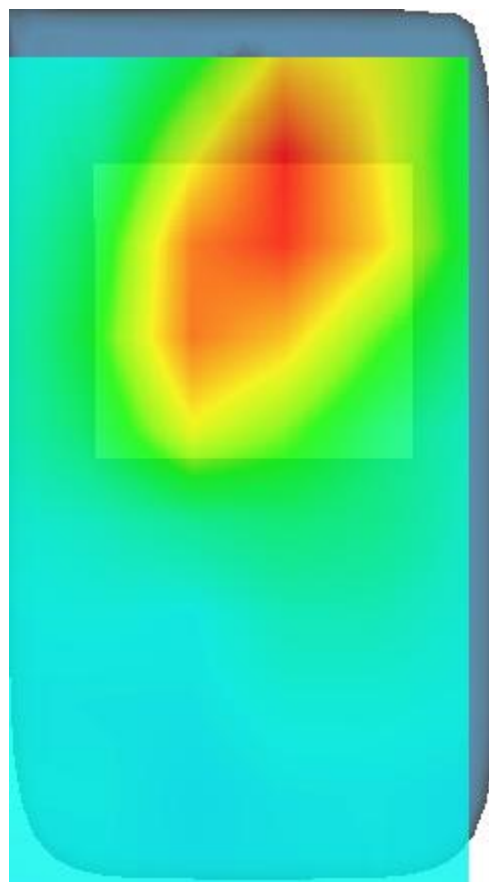

MEASUREMENT 11

Date of measurement: 14/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	829.000000
Relative permittivity (real part)	41.498960
Relative permittivity (imaginary part)	19.279938
Conductivity (S/m)	0.887948
Variation (%)	0.380000

SURFACE SAR

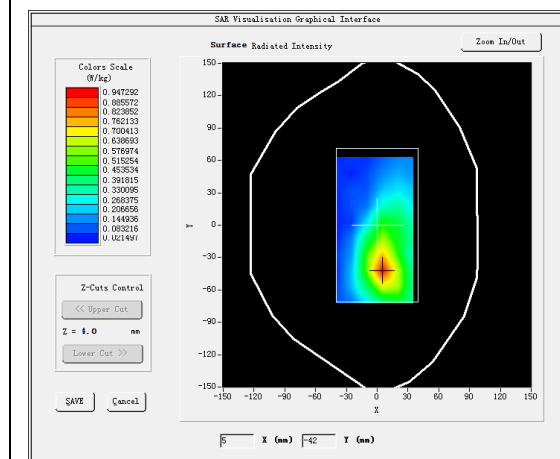


VOLUME SAR

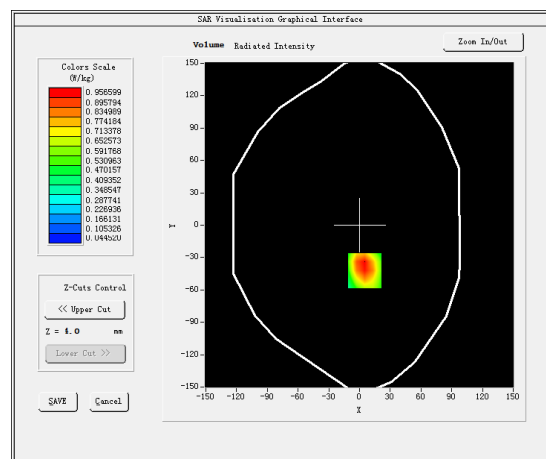


Maximum location: X=5.00, Y=-42.00

SAR Peak: 1.48 W/kg


SAR 10g (W/Kg)	0.556885
SAR 1g (W/Kg)	0.929019

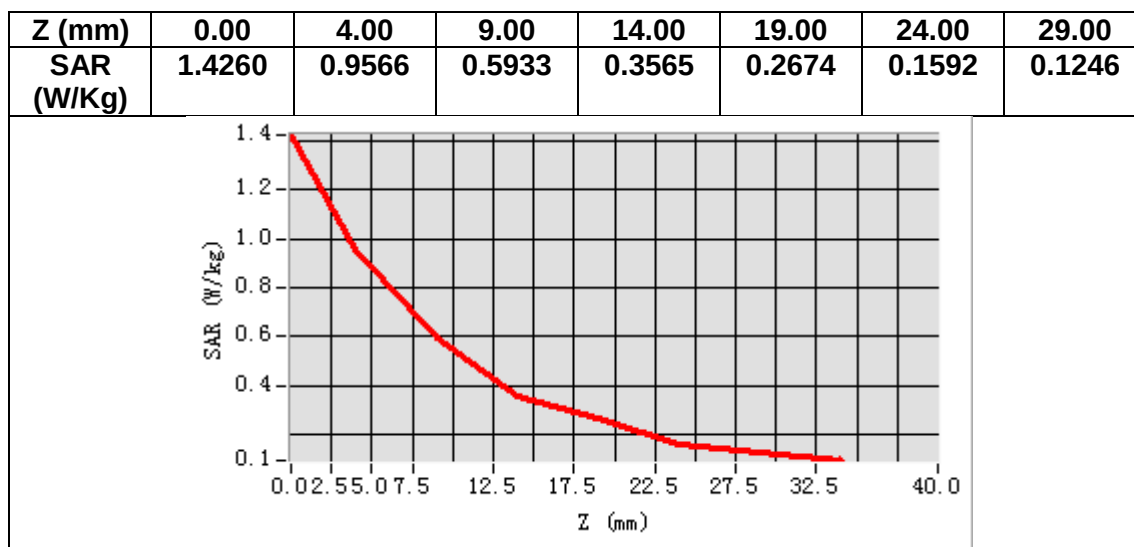

3D screen shot

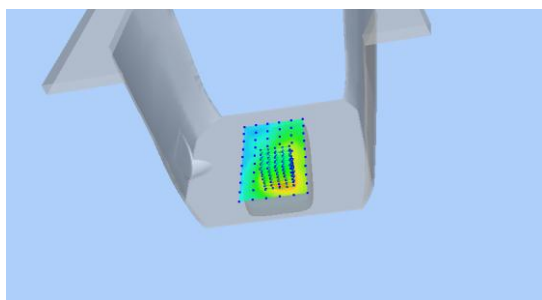

Hot spot position

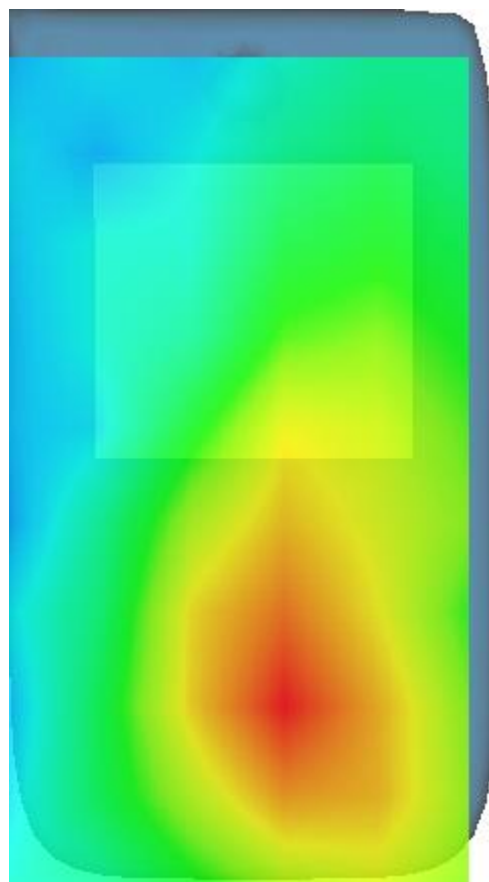

MEASUREMENT 12

Date of measurement: 11/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2510.000000
Relative permittivity (real part)	39.130821
Relative permittivity (imaginary part)	13.210764
Conductivity (S/m)	1.842168
Variation (%)	0.190000

SURFACE SAR

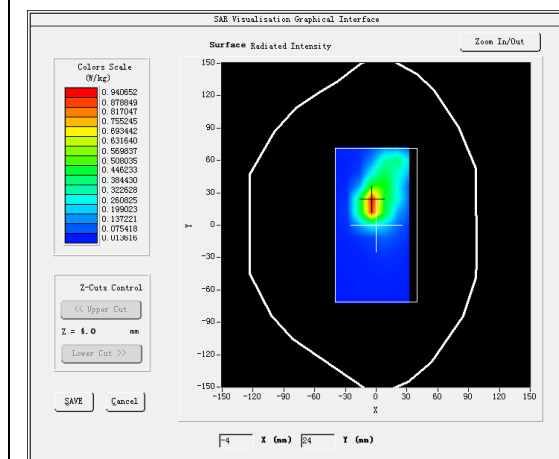


VOLUME SAR

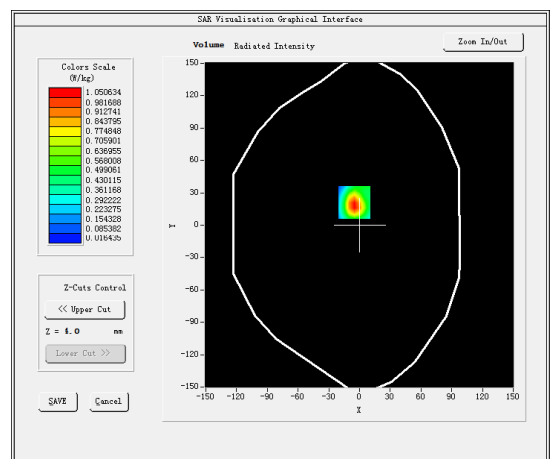


Maximum location: X=-5.00, Y=21.00

SAR Peak: 1.94 W/kg


SAR 10g (W/Kg)	0.410200
SAR 1g (W/Kg)	0.977835

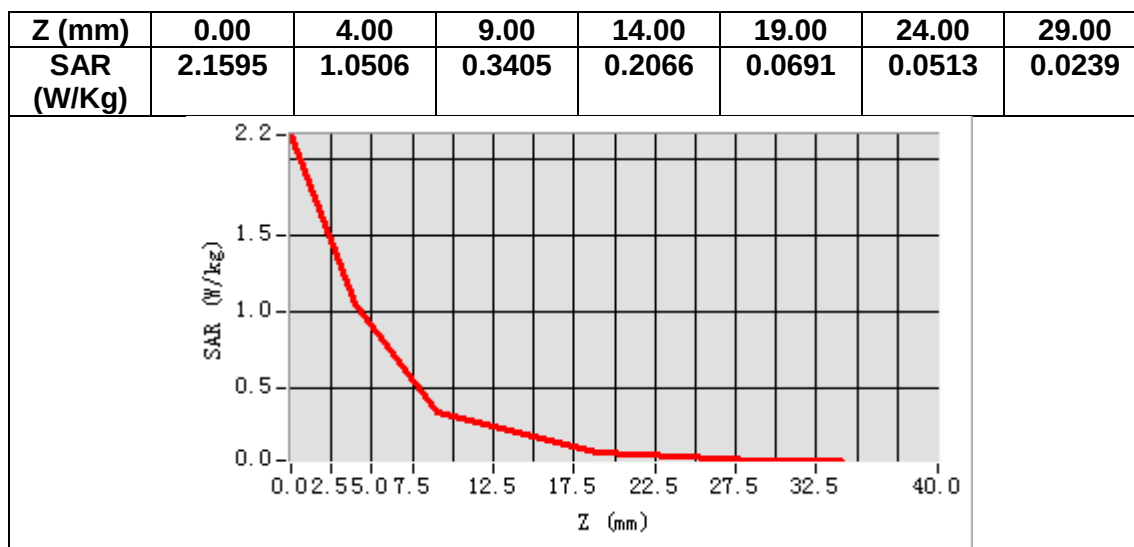

3D screen shot

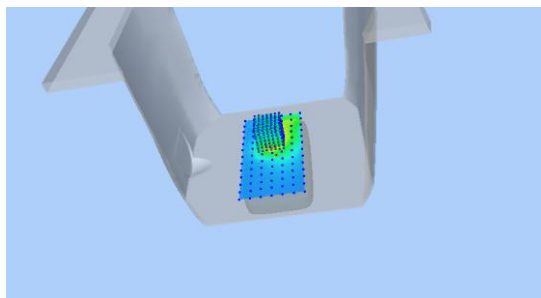

Hot spot position

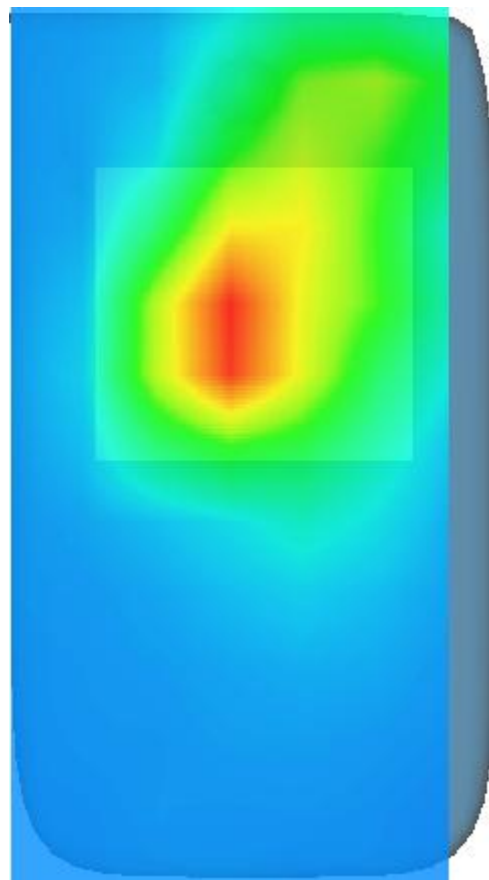

MEASUREMENT 13

Date of measurement: 5/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	42.544853
Relative permittivity (imaginary part)	21.803511
Conductivity (S/m)	0.856999
Variation (%)	-1.990000

SURFACE SAR

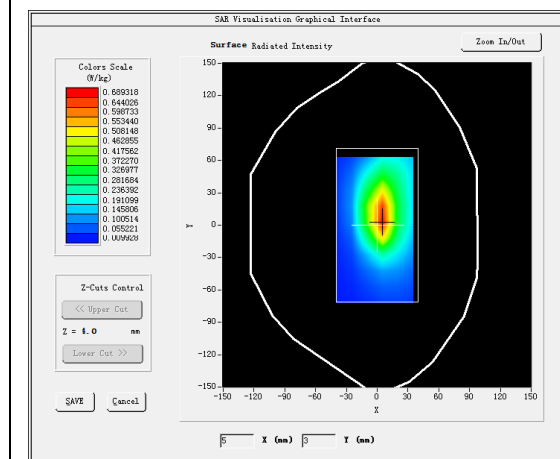


VOLUME SAR

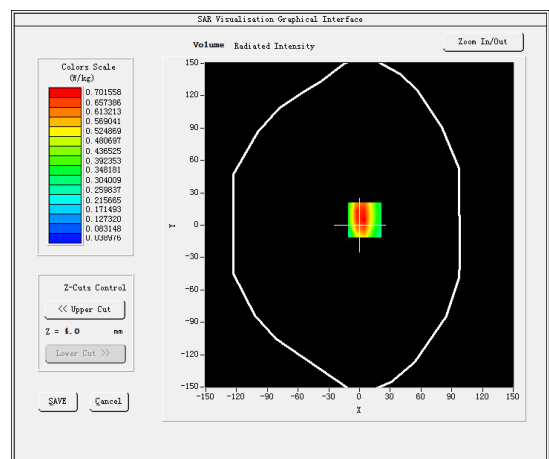


Maximum location: X=5.00, Y=5.00

SAR Peak: 1.12 W/kg


SAR 10g (W/Kg)	0.395954
SAR 1g (W/Kg)	0.695713

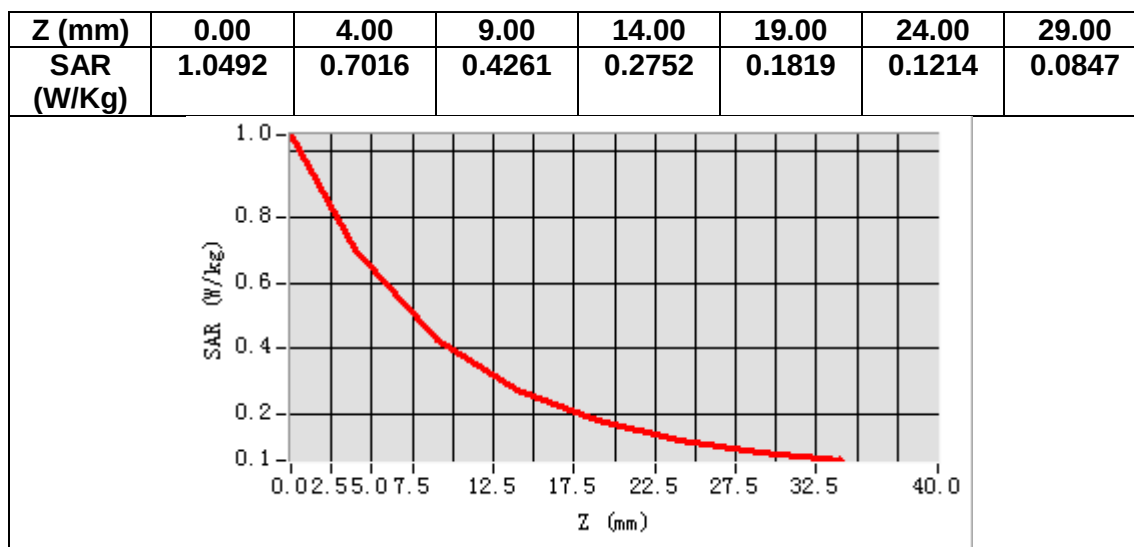

3D screen shot

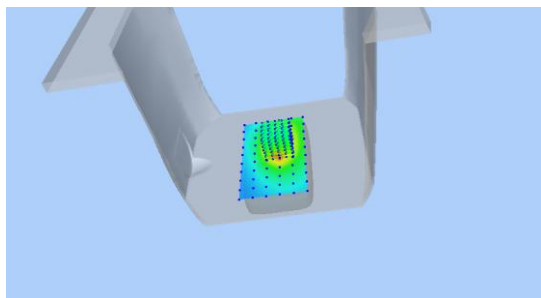

Hot spot position

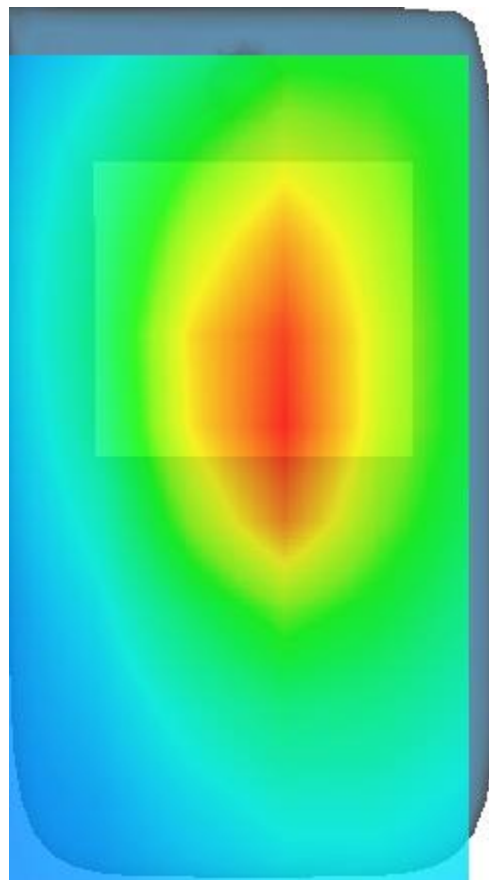

MEASUREMENT 14

Date of measurement: 5/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	42.523605
Relative permittivity (imaginary part)	21.831911
Conductivity (S/m)	0.861148
Variation (%)	0.710000

SURFACE SAR

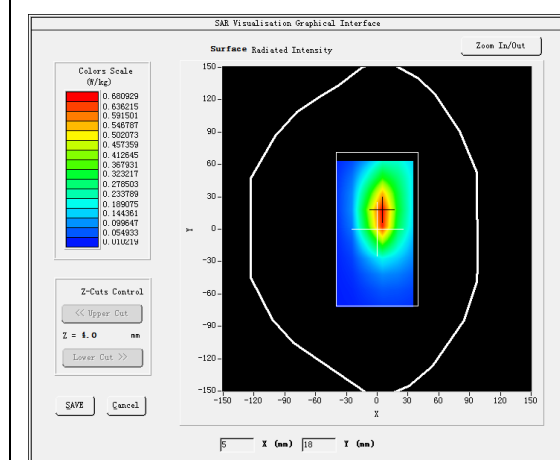


VOLUME SAR

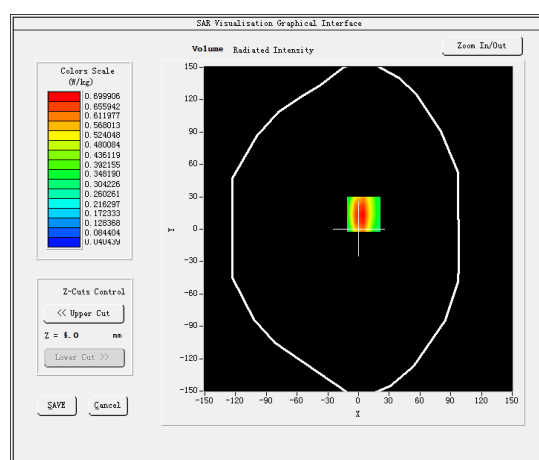


Maximum location: X=5.00, Y=14.00

SAR Peak: 1.11 W/kg


SAR 10g (W/Kg)	0.390141
SAR 1g (W/Kg)	0.689532

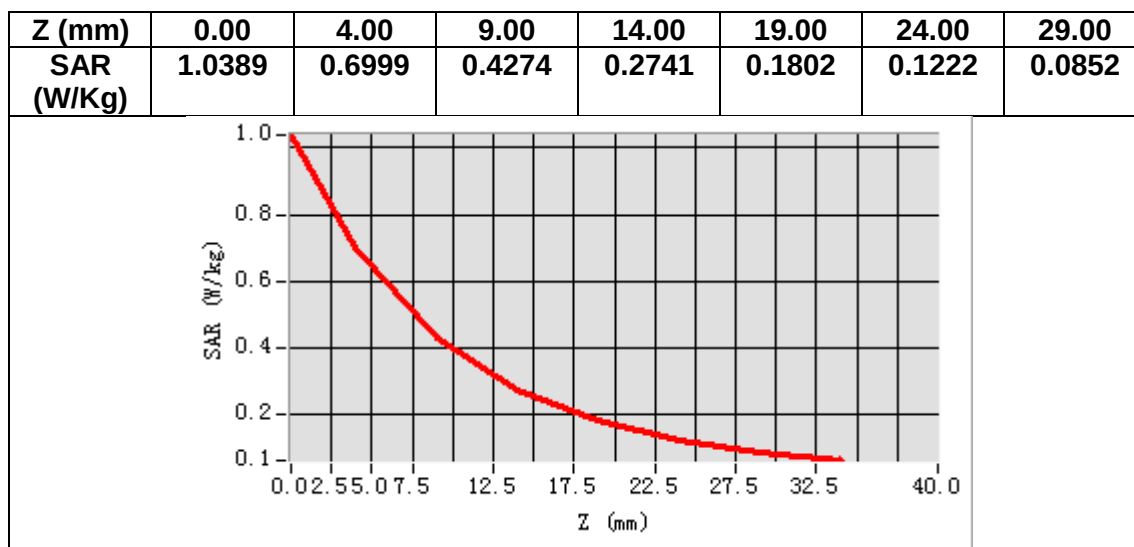

3D screen shot

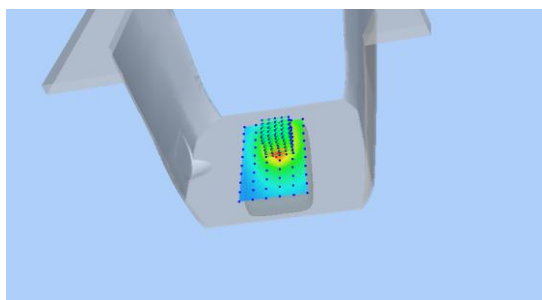

Hot spot position

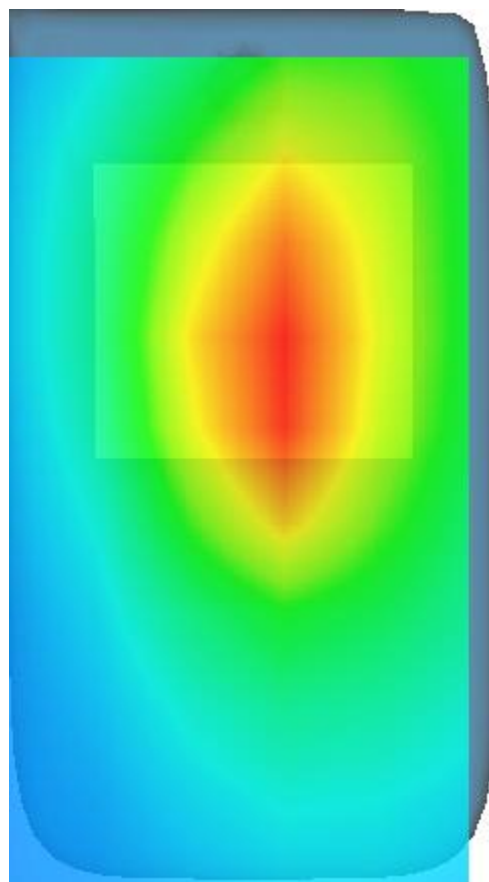

MEASUREMENT 15

Date of measurement: 15/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 25</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>


B. SAR Measurement Results

Frequency (MHz)	1882.500000
Relative permittivity (real part)	39.061180
Relative permittivity (imaginary part)	13.713142
Conductivity (S/m)	1.433785
Variation (%)	4.460000

SURFACE SAR

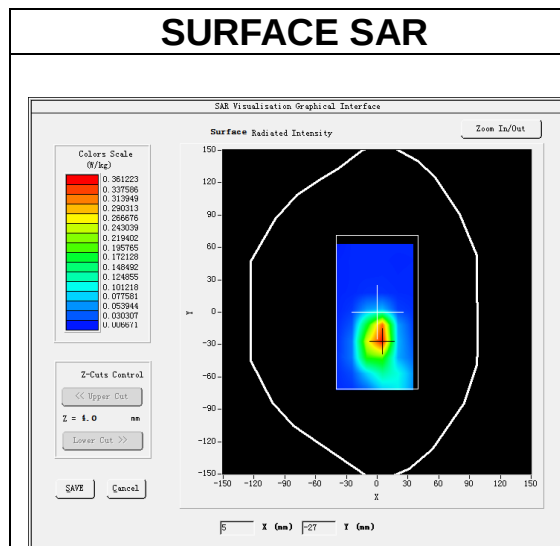


VOLUME SAR

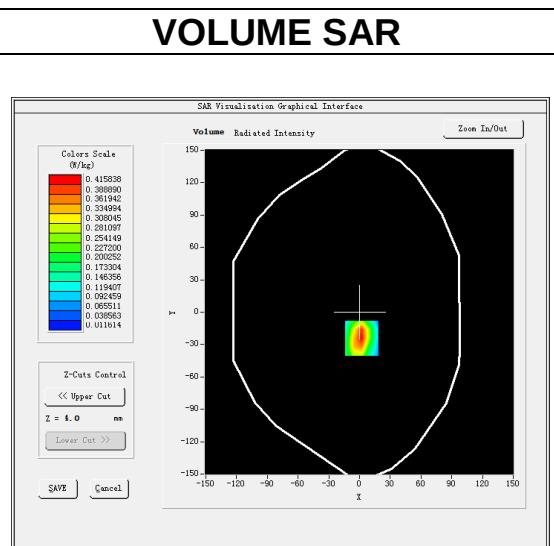


Maximum location: X=2.00, Y=-24.00

SAR Peak: 0.77 W/kg


SAR 10g (W/Kg)	0.176871
SAR 1g (W/Kg)	0.403563

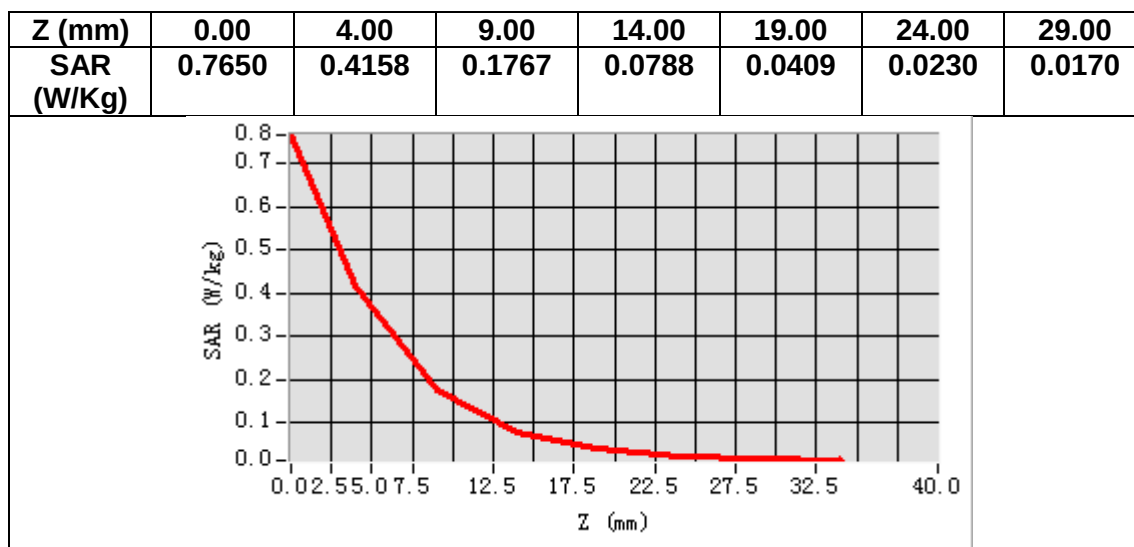

3D screen shot

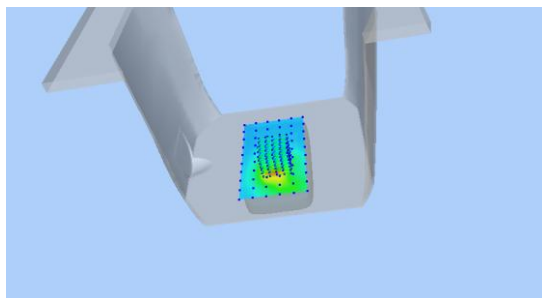

Hot spot position

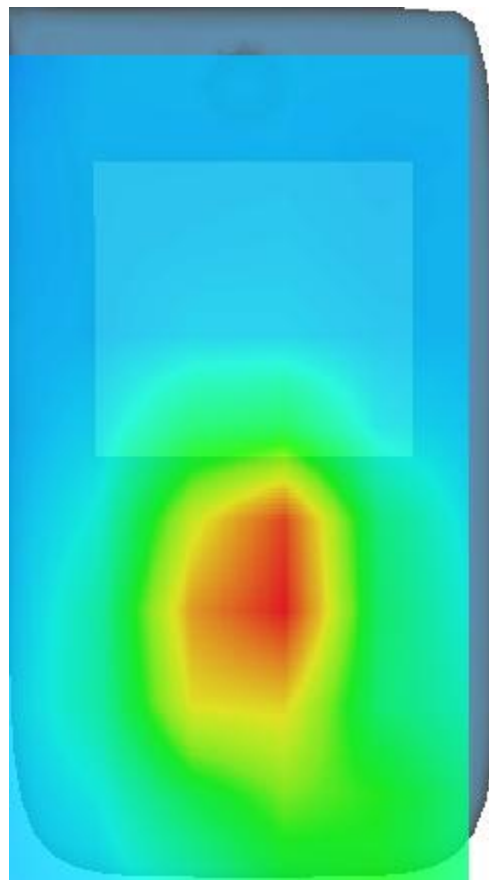

MEASUREMENT 16

Date of measurement: 11/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 38</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.647820
Relative permittivity (imaginary part)	13.481864
Conductivity (S/m)	1.943635
Variation (%)	-0.190000

SURFACE SAR

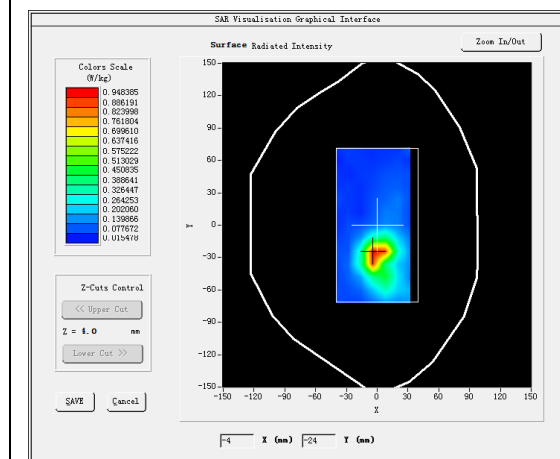


VOLUME SAR

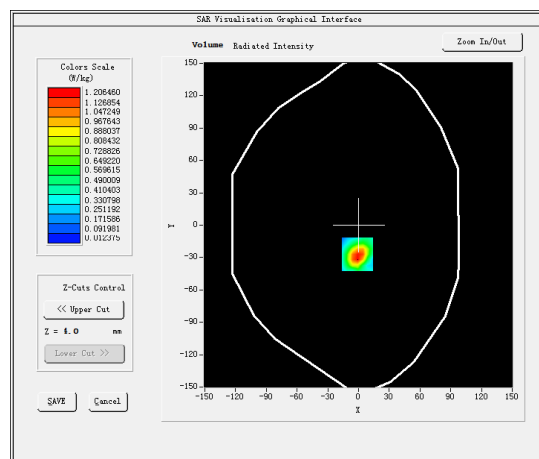


Maximum location: X=-1.00, Y=-27.00

SAR Peak: 2.12 W/kg


SAR 10g (W/Kg)	0.479484
SAR 1g (W/Kg)	1.108296

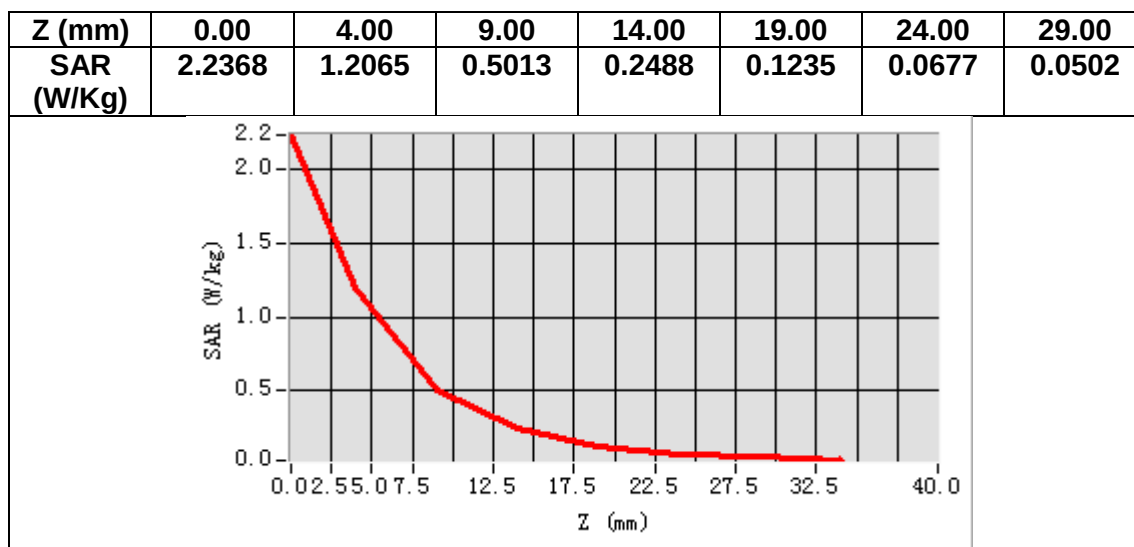

3D screen shot

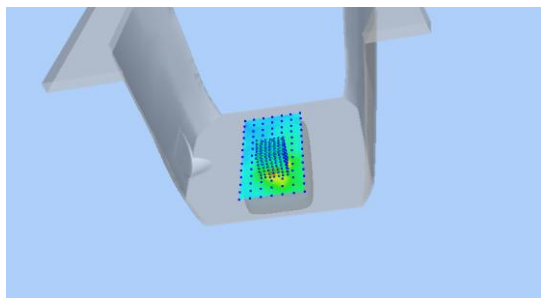

Hot spot position

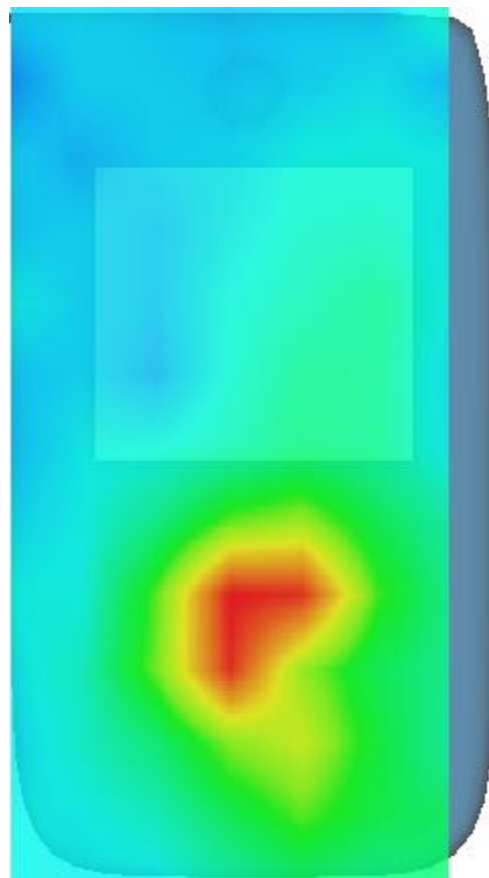

MEASUREMENT 17

Date of measurement: 18/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 40A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.81</u>


B. SAR Measurement Results

Frequency (MHz)	2310.000000
Relative permittivity (real part)	39.865715
Relative permittivity (imaginary part)	13.059635
Conductivity (S/m)	1.675986
Variation (%)	1.240000

SURFACE SAR

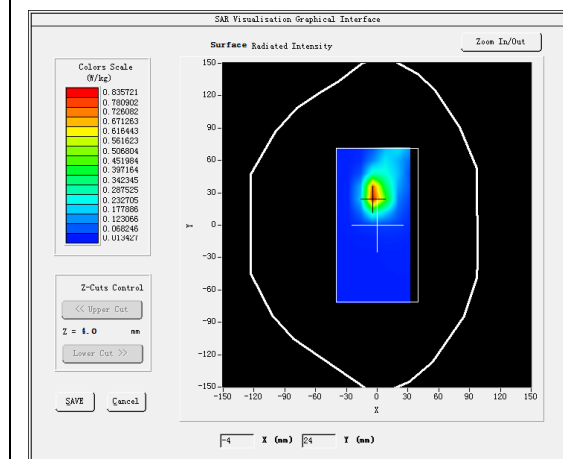


VOLUME SAR

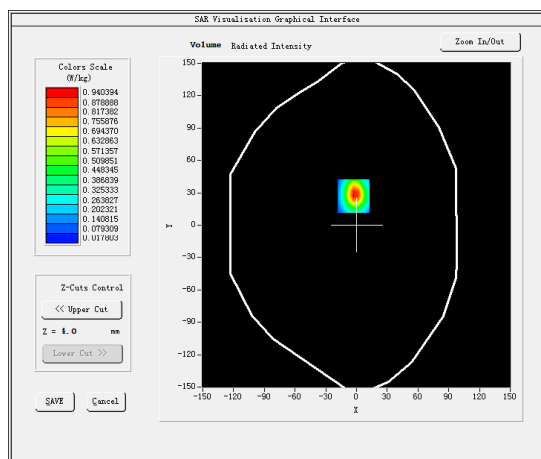


Maximum location: X=-3.00, Y=27.00

SAR Peak: 1.67 W/kg


SAR 10g (W/Kg)	0.367265
SAR 1g (W/Kg)	0.867960

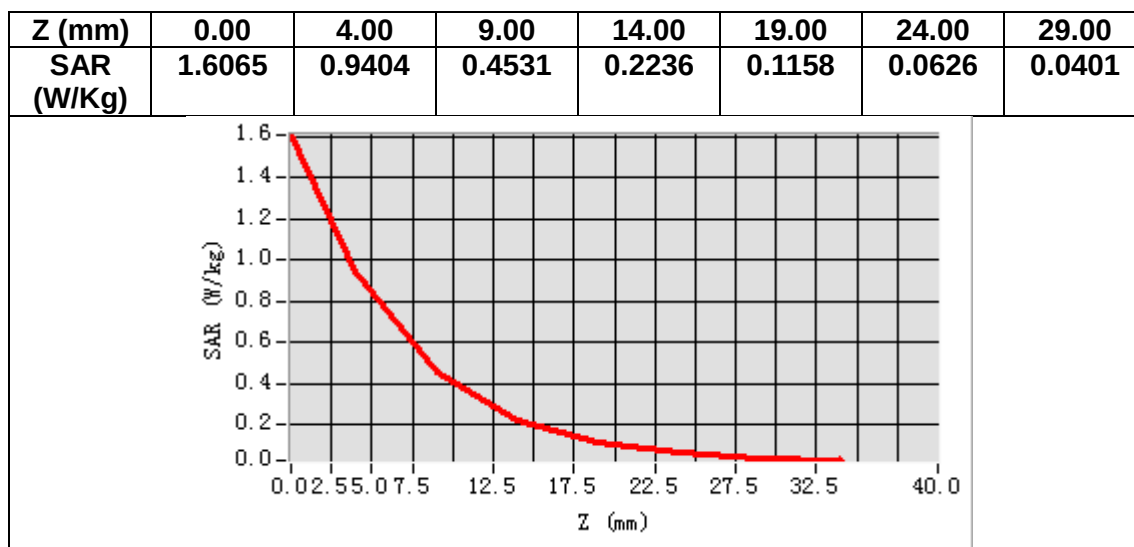

3D screen shot

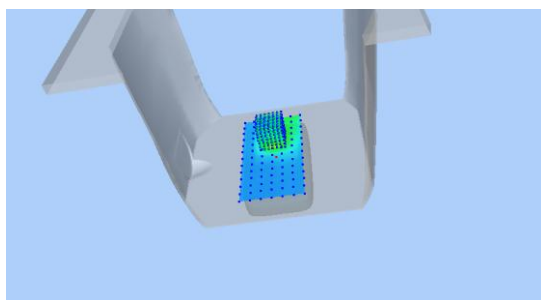

Hot spot position

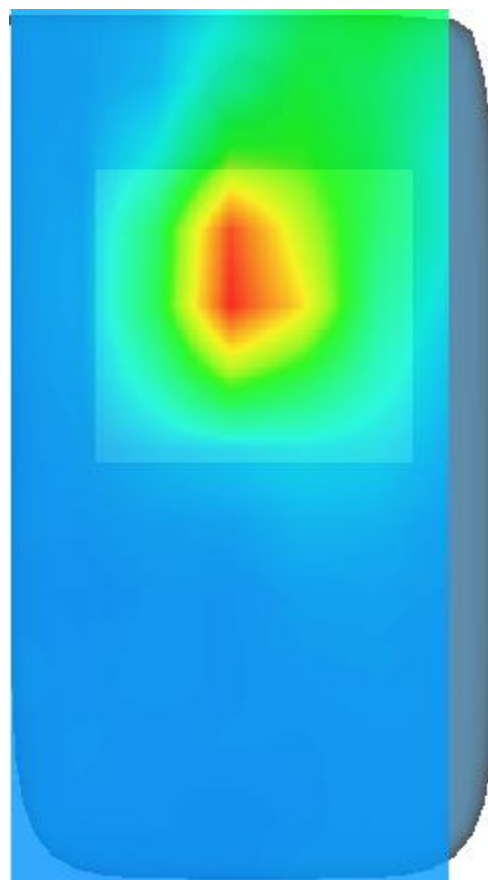

MEASUREMENT 18

Date of measurement: 18/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 40B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.81</u>


B. SAR Measurement Results

Frequency (MHz)	2355.000000
Relative permittivity (real part)	39.748515
Relative permittivity (imaginary part)	13.198835
Conductivity (S/m)	1.726848
Variation (%)	-0.400000

SURFACE SAR

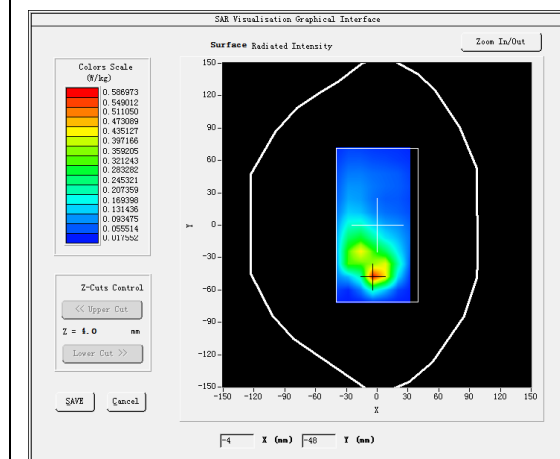


VOLUME SAR

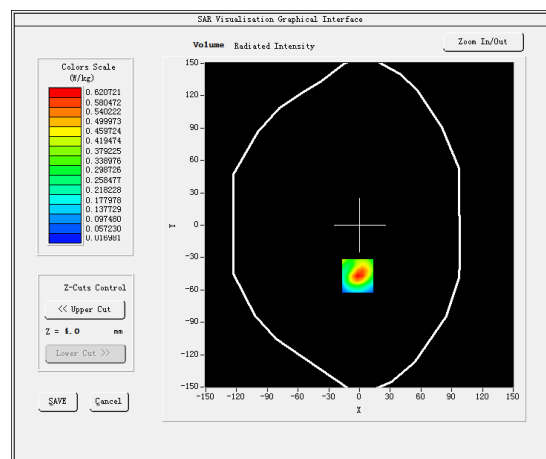


Maximum location: X=-2.00, Y=-47.00

SAR Peak: 1.04 W/kg


SAR 10g (W/Kg)	0.257199
SAR 1g (W/Kg)	0.564432

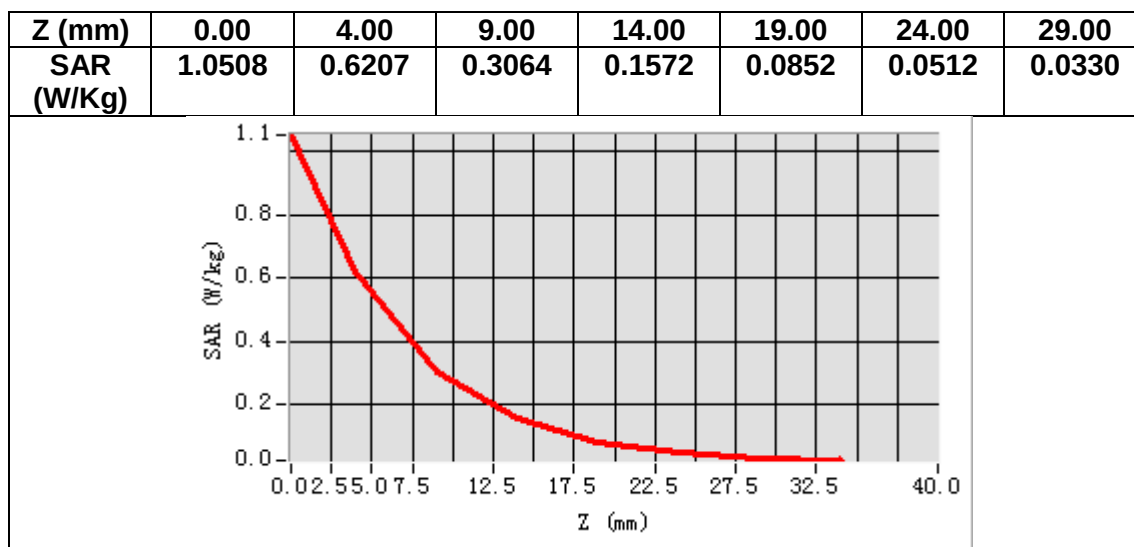

3D screen shot

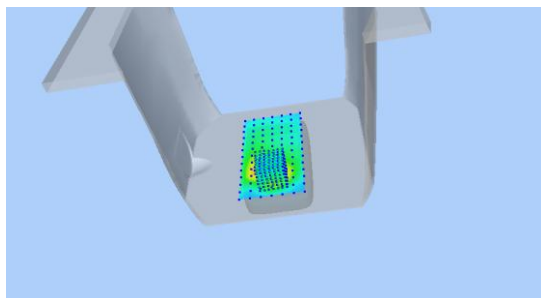

Hot spot position

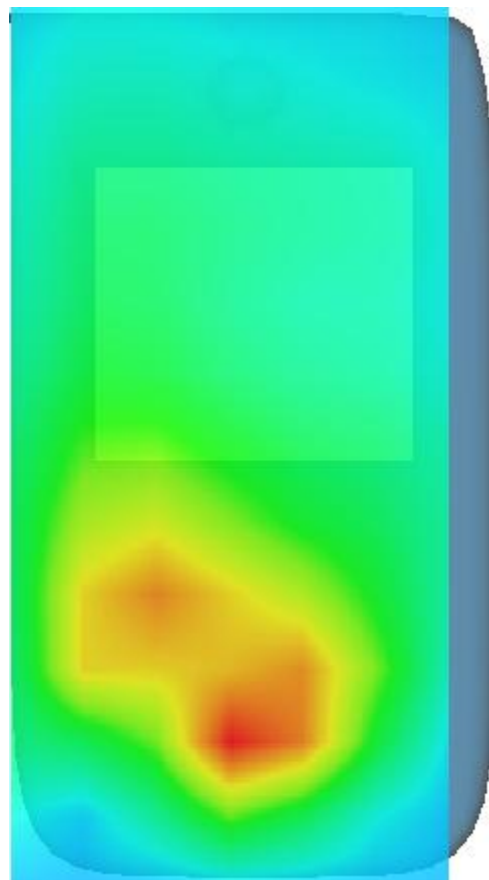

MEASUREMENT 19

Date of measurement: 11/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2597.500000
Relative permittivity (real part)	38.650321
Relative permittivity (imaginary part)	13.434364
Conductivity (S/m)	1.938653
Variation (%)	-0.740000

SURFACE SAR

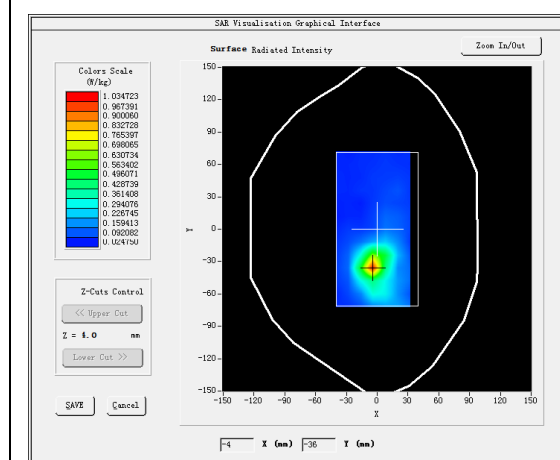


VOLUME SAR

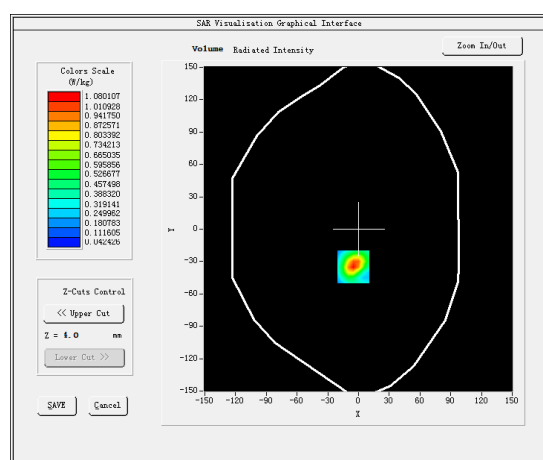


Maximum location: X=-5.00, Y=-35.00

SAR Peak: 1.89 W/kg


SAR 10g (W/Kg)	0.413261
SAR 1g (W/Kg)	0.972115

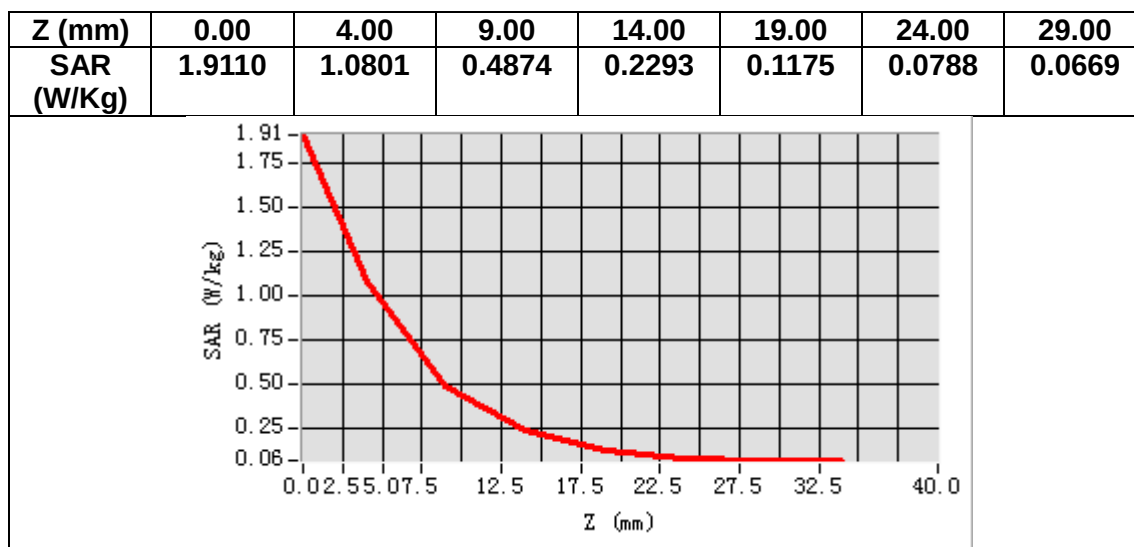

3D screen shot

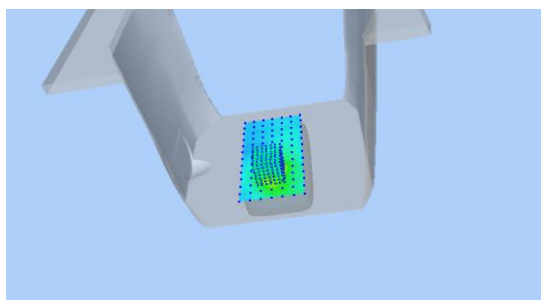

Hot spot position

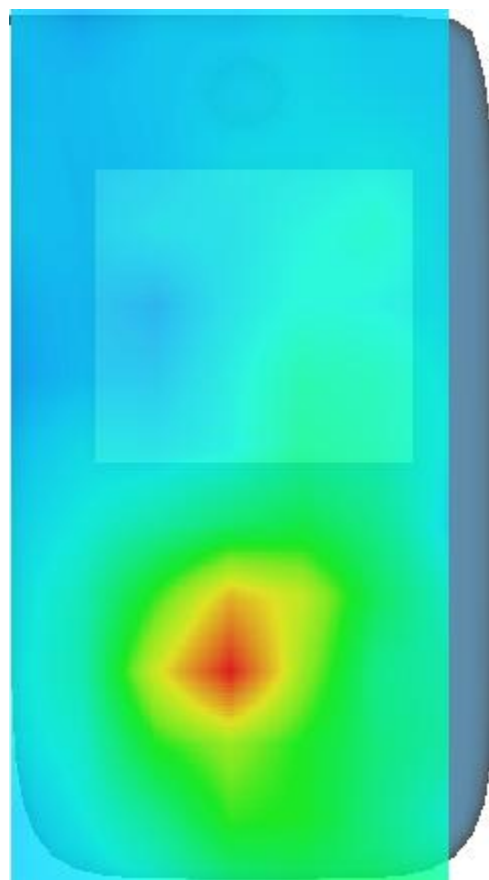

MEASUREMENT 20

Date of measurement: 14/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand26A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	819.000000
Relative permittivity (real part)	41.673260
Relative permittivity (imaginary part)	19.249538
Conductivity (S/m)	0.875854
Variation (%)	-0.370000

SURFACE SAR

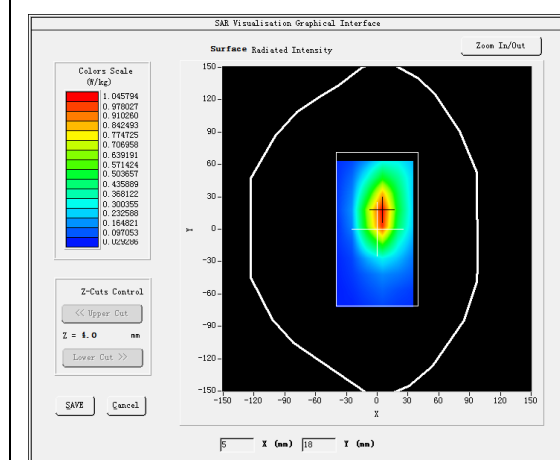


VOLUME SAR

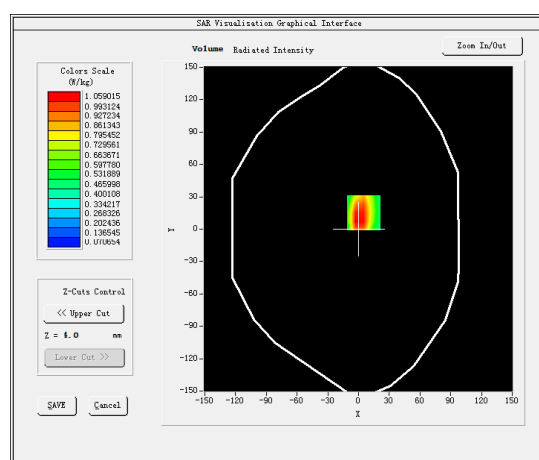


Maximum location: X=5.00, Y=15.00

SAR Peak: 1.78 W/kg


SAR 10g (W/Kg)	0.593077
SAR 1g (W/Kg)	1.071039

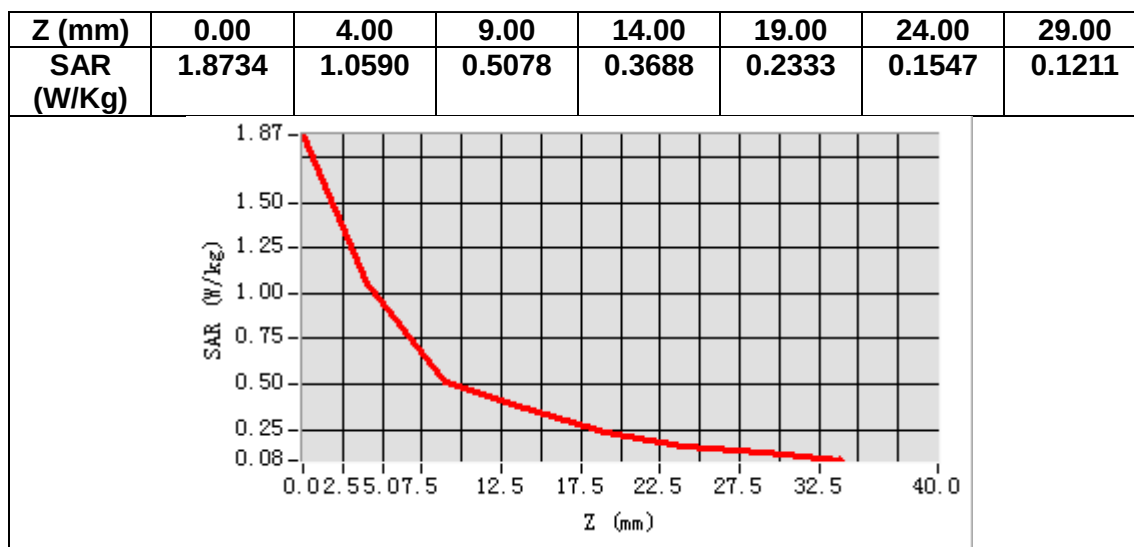

3D screen shot

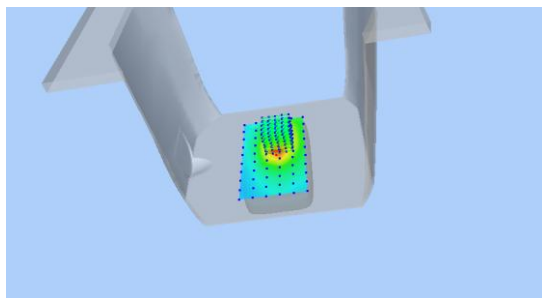

Hot spot position

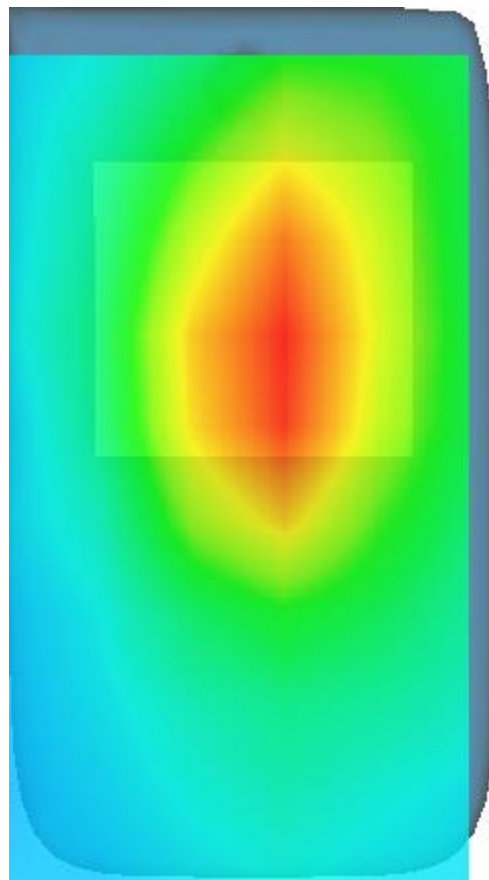

MEASUREMENT 21

Date of measurement: 14/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand26B</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>


B. SAR Measurement Results

Frequency (MHz)	822.500000
Relative permittivity (real part)	41.699982
Relative permittivity (imaginary part)	19.390196
Conductivity (S/m)	0.886024
Variation (%)	-0.780000

SURFACE SAR

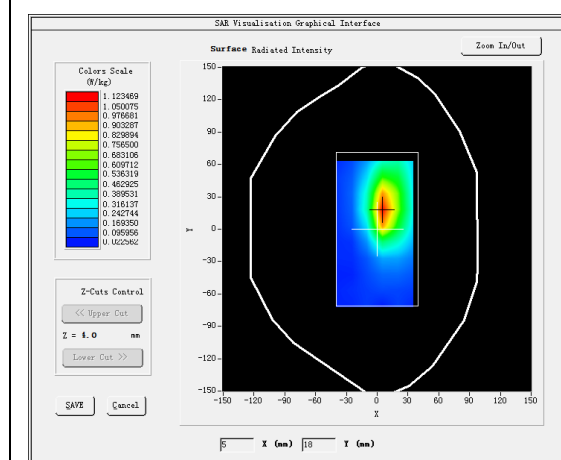


VOLUME SAR

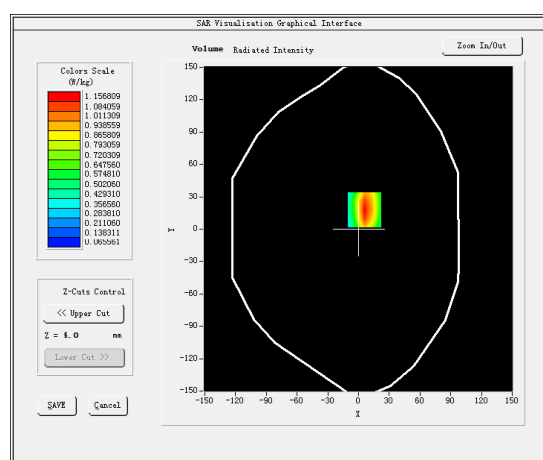


Maximum location: X=6.00, Y=18.00

SAR Peak: 1.81 W/kg


SAR 10g (W/Kg)	0.602173
SAR 1g (W/Kg)	1.091604

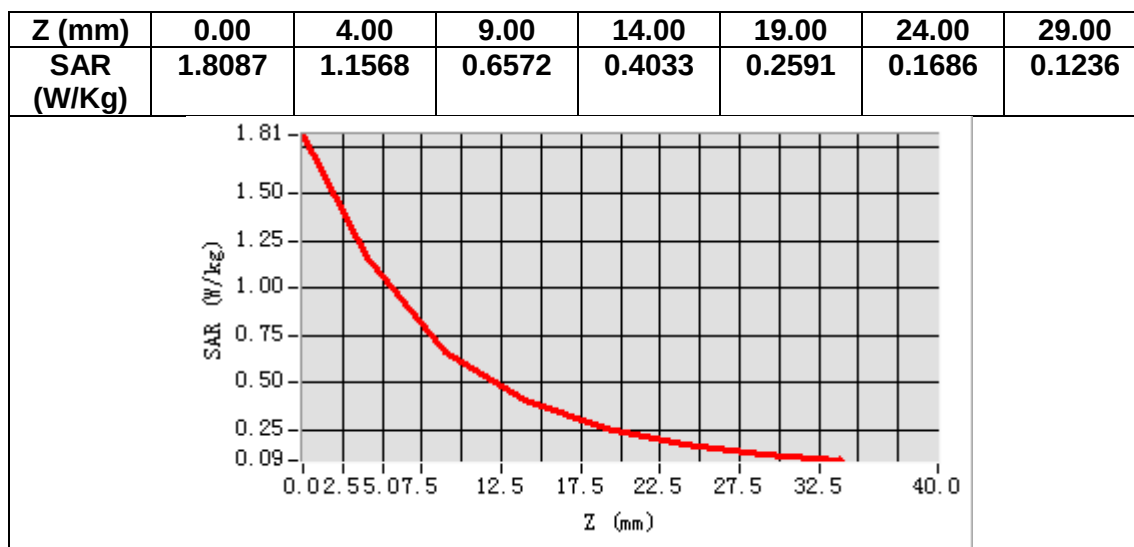

3D screen shot

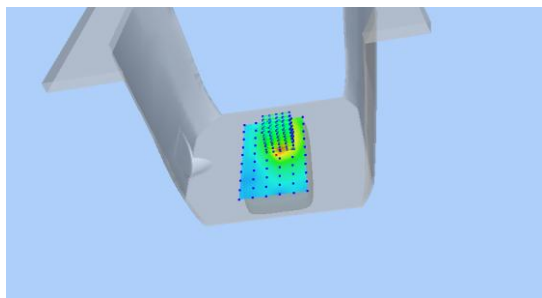

Hot spot position

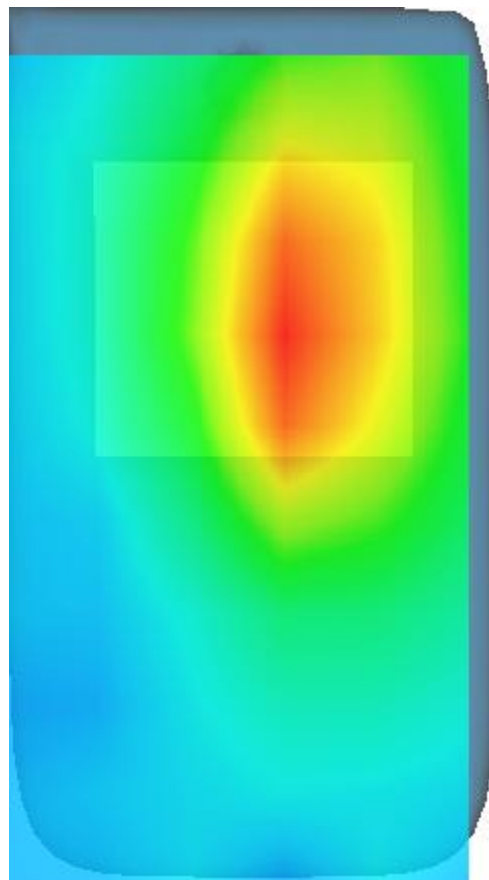

MEASUREMENT 22

Date of measurement: 6/12/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative permittivity (real part)	40.035427
Relative permittivity (imaginary part)	13.860971
Conductivity (S/m)	1.343744
Variation (%)	-0.820000

SURFACE SAR

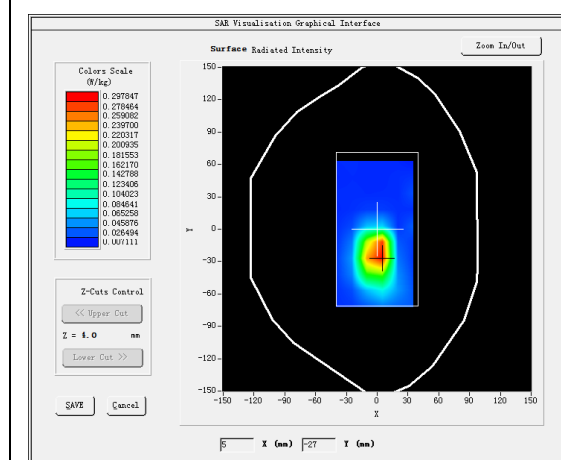


VOLUME SAR

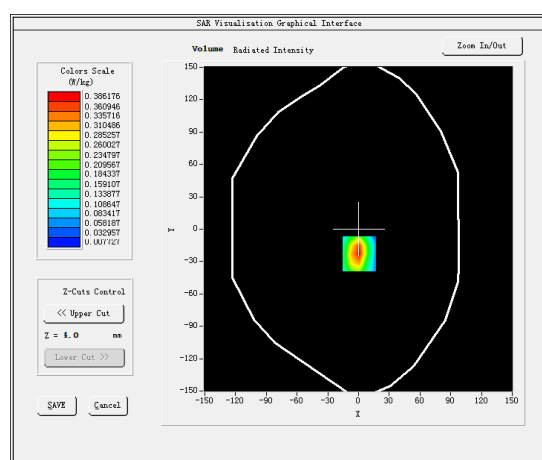


Maximum location: X=1.00, Y=-23.00

SAR Peak: 0.72 W/kg


SAR 10g (W/Kg)	0.162797
SAR 1g (W/Kg)	0.371092

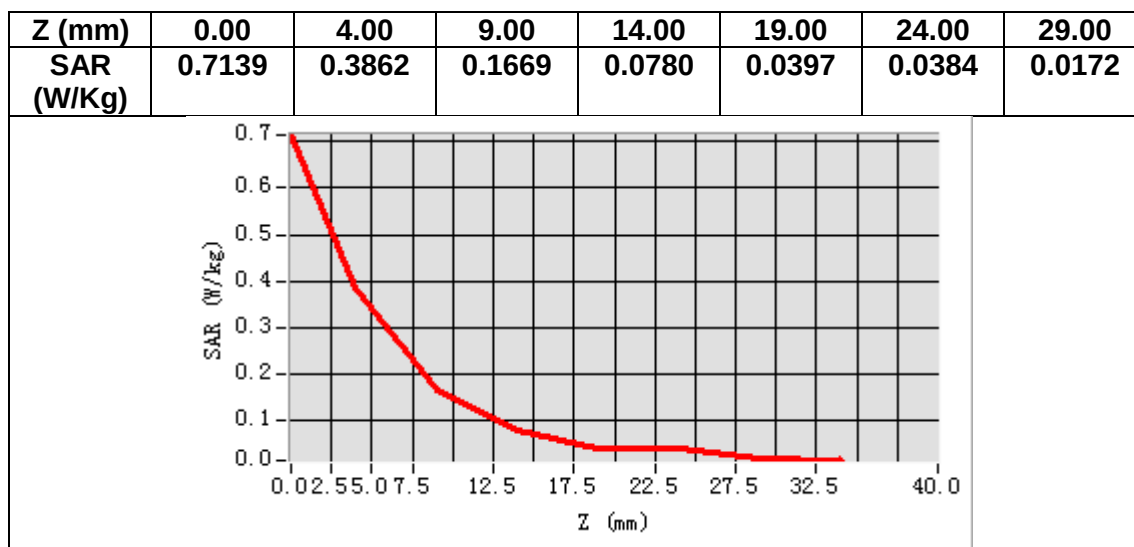

3D screen shot

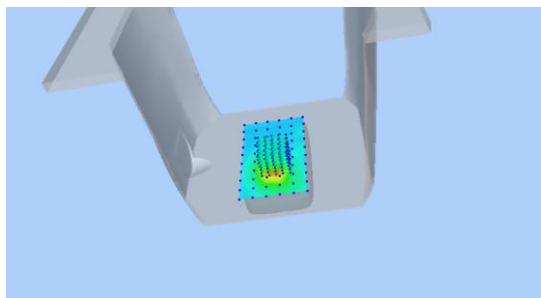

Hot spot position

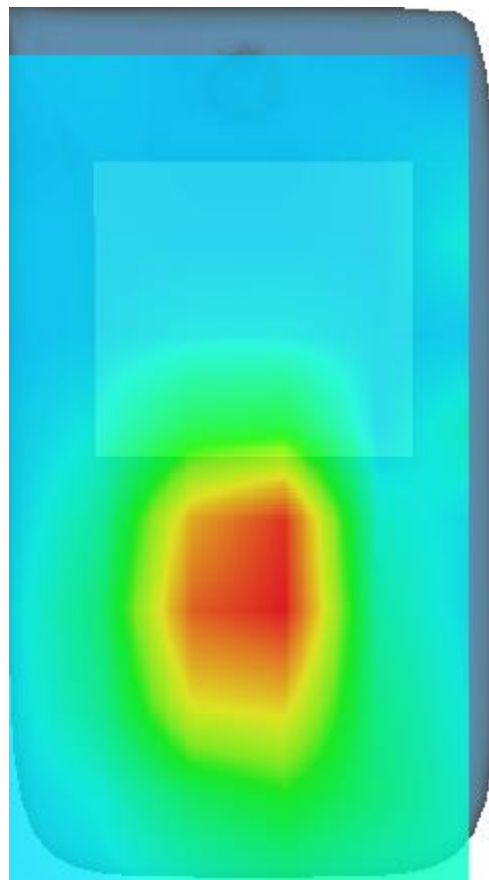

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - 3423-EPGO-426
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2300 MHz Dipole - SN 03/16 DIP 2G300-358
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14 WGA 33
Extended Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref : ACR.261.11.23.BES.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 3423-EPGO-426

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 09/18/2023



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

	Name	Function	Date	Signature
Prepared by :	Cyrille ONNEE	Measurement Responsible	9/18/2023	
Checked & approved by:	Jérôme Luc	Technical Manager	9/18/2023	
Authorized by:	Yann Toutain	Laboratory Director	9/19/2023	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date: 2023.09.19
09:08:14 +02'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Cyrille ONNEE	9/18/2023	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Sensitivity	4
3.2	Linearity	5
3.3	Isotropy	5
3.4	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Results	6
5.1	Calibration in air	6
5.2	Calibration in liquid	7
6	Verification Results	8
7	List of Equipment	9



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	3423-EPGO-426
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.261 MΩ Dipole 2: R2=0.213 MΩ Dipole 3: R3=0.233 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01 W/kg to 100 W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/(\delta/2)})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14 \text{ mm}$ at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

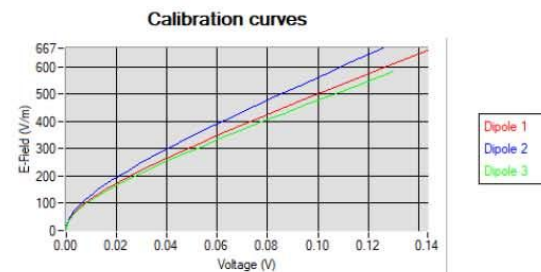

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

V_i =voltage readings on the 3 channels of the probe

DCP_i =diode compression point given below for the 3 channels of the probe

$Norm_i$ =dipole sensitivity given below for the 3 channels of the probe



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.78	0.62	0.85

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
105	108	107

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$\text{ConvF} = \frac{E_{\text{liquid}}^2}{E_{\text{air}}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{\text{liquid}}^2 = \frac{\rho \text{ SAR}}{\sigma}$$

where

σ =the conductivity of the liquid

ρ =the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$\text{SAR} = c \frac{dT}{dt}$$

where

c =the specific heat for the liquid

dT/dt =the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$\text{SAR} = \frac{4P_W}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

a =the larger cross-sectional of the waveguide

b =the smaller cross-sectional of the waveguide

δ =the skin depth for the liquid in the waveguide

P_W =the power delivered to the liquid





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR 261.11.23.BES.A

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.


Liquid	Frequency (MHz*)	ConvF
HL750	750	2.37
HL850	835	2.32
HL900	900	2.23
HL1800	1800	2.45
HL1900	1900	2.63
HL2000	2000	2.83
HL2300	2300	2.81
HL2450	2450	2.85
HL2600	2600	2.65
HL3300	3300	2.21
HL3500	3500	2.20
HL3700	3700	2.11
HL3900	3900	2.40
HL4200	4200	2.40
HL4600	4600	2.33
HL4900	4900	2.37
HL5200	5200	2.07
HL5400	5400	2.11
HL5600	5600	2.20
HL5800	5800	2.04

(*) Frequency validity is ± 50 MHz below 600 MHz, ± 100 MHz from 600 MHz to 6 GHz and ± 700 MHz above 6 GHz

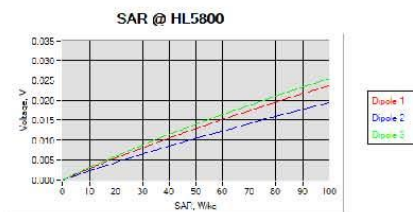


6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is ± 0.2 dB for linearity and ± 0.15 dB for axial isotropy.

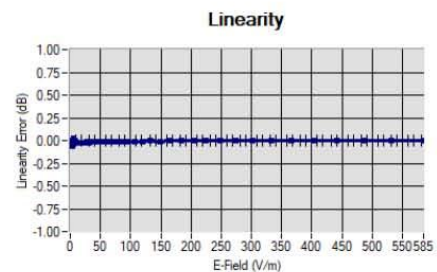

Linearity: $\pm 1.42\%$ (± 0.06 dB)



Isotropy: $\pm 0.21\%$ (± 0.01 dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
CALIPROBE Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer	Agilent 8753ES	MY40003210	10/2019	10/2023
Network Analyzer – Calibration kit	HP 85033D	3423A08186	06/2021	06/2027
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Fluoroptic Thermometer	LumaSense Luxtron 812	94264	09/2022	09/2025
Coaxial cell	MVG	SN 32/16 COAXCELL_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG2_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G600_1	Validated. No cal required.	Validated. No cal required.

Page: 9/10

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Waveguide	MVG	SN 32/16 WG4_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G900_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG6_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG8_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800B_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800H_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG10_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_3G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG12_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_5G000_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG14_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_7G000_1	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024