



FCC Radio Test Report

FCC ID: 2A006-WLT7150

This report concerns: Original Grant

Project No. : 2404H025
Equipment : NFC Moudle
Brand Name : N/A
Test Model : WLT7150
Series Model : N/A
Applicant : Wi-linktech Communication Technologies(Shanghai) Co.,Ltd.
Address : Room 602, Building 3, Lane 88, Shengrong Road, Pudong New Area, Shanghai
Manufacturer : Wi-linktech Communication Technologies(Shanghai) Co.,Ltd.
Address : Room 602, Building 3, Lane 88, Shengrong Road, Pudong New Area, Shanghai
Factory : Nanjing Xuancai smart Manufacturing Co., Ltd.
Address : Room 108, A1, Qingyun Building, No.266 Puyun Road, Yan Chuangyuan, Jiangbei Xinqu, Nanjing City, Jiangsu Province, China
Date of Receipt : May 06, 2024
Date of Test : May 11, 2024~ May 24, 2024
Issued Date : Jun. 26, 2024
Report Version : R01
Test Sample : Engineering Sample No.: SH202405062 for radiated and conducted.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Shanghai)

Louis Li

Prepared by : Louis Li

Riley Wei

Approved by : Riley Wei

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China.

Tel: +86-021-61765666

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 SUPPORT UNITS	10
3 . RADIATED EMISSION	11
3.1 LIMIT	11
3.2 TEST PROCEDURE	12
3.3 DEVIATION FROM TEST STANDARD	12
3.4 TEST SETUP	13
3.5 EUT OPERATING CONDITIONS	14
3.6 TEST RESULTS - 9 KHZ TO 30 MHZ	14
3.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	14
4 . FREQUENCY TOLERANCE	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM STANDARD	15
4.4 TEST SETUP	15
4.5 EUT OPERATION CONDITIONS	15
4.6 TEST RESULTS	15
5. BANDWIDTH	16
5.1 LIMIT	16
5.4 TEST SETUP	16
5.6 TEST RESULTS	16
5 . MEASUREMENT INSTRUMENTS LIST	17
6 . EUT TEST PHOTO	19
APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ	21
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	28

Table of Contents**Page****APPENDIX C - FREQUENCY TOLERANCE****31****APPENDIX D - BANDWIDTH****33**

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2404H025	R00	Original Report.	Jun. 20, 2024	Invalid
BTL-FCCP-1-2404H025	R01	Revised report to address TCB's comments.	Jun. 26, 2024	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	N/A	-----
15.225(a)-(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C	PASS	-----
15.225(e)	Frequency Tolerance	APPENDIX D	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China
 BTL's Test Firm Registration Number for FCC: 964234
 BTL's Designation Number for FCC: CN1374

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))
 The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB02	CISPR	9 KHz~30 MHz	-	2.72
		30 MHz~200 MHz	V	4.4
		30 MHz~200 MHz	H	3.16
		200 MHz~1,000 MHz	V	4.6
		200 MHz~1,000 MHz	H	4.2

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Radiated Emissions-9kHz to 30MHz	22.9°C	56%	AC 120V/60Hz	Nicole Yan
Radiated Emissions-30MHz to 1000MHz	22.9°C	56%	AC 120V/60Hz	Nicole Yan
Frequency Tolerance	Normal & Extreme	39%	Normal & Extreme	Nicole Yan

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	NFC Moudle
Brand Name	N/A
Test Model	WLT7150
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1.0
Hardware Version	V1.3
Power Source	DC power supply.
Power Rating	DC 3.3V
Operation Frequency	13.56 MHz
Antenna Type	Loop antenna
Field Strength	63.82dBuV/m
Max. E.I.R.P	-31.38 dBm

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Test Channel	Test Frequency (MHz)
01	13.56

3. For d=3m

$$\text{EIRP(dBm)} = \text{E(dB}\mu\text{V / m)} - 95.2$$

$$\text{EIRP} = 63.82 - 95.2 = -31.38$$

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.


Pretest Mode	Description
Mode 1	TX Mode_ 13.56MHz

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_ 13.56MHz

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_ 13.56MHz

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

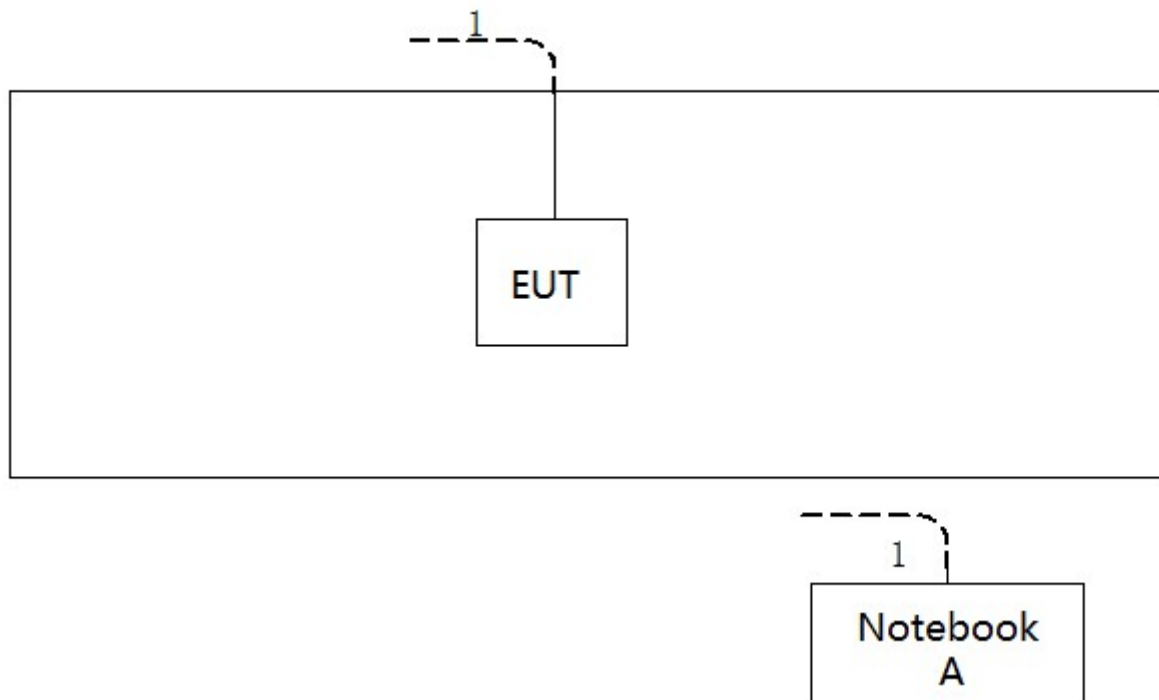

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	10m

3. RADIATED EMISSION

3.1 LIMIT

§15.225 (a)

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

§15.225 (b)

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

§15.225 (c)

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

§15.225 (d)

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

§15.209 (a)

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).

3.2 TEST PROCEDURE

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

3.3 DEVIATION FROM TEST STANDARD


No deviation.

3.4 TEST SETUP

9 kHz to 30 MHz

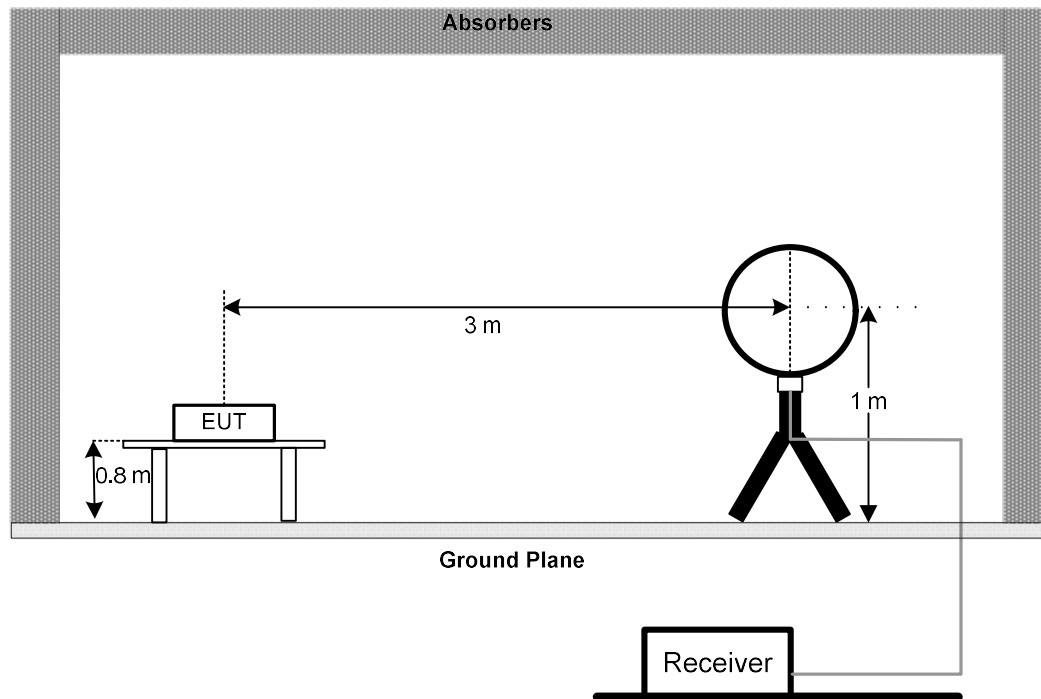

30 MHz to 1000 MHz

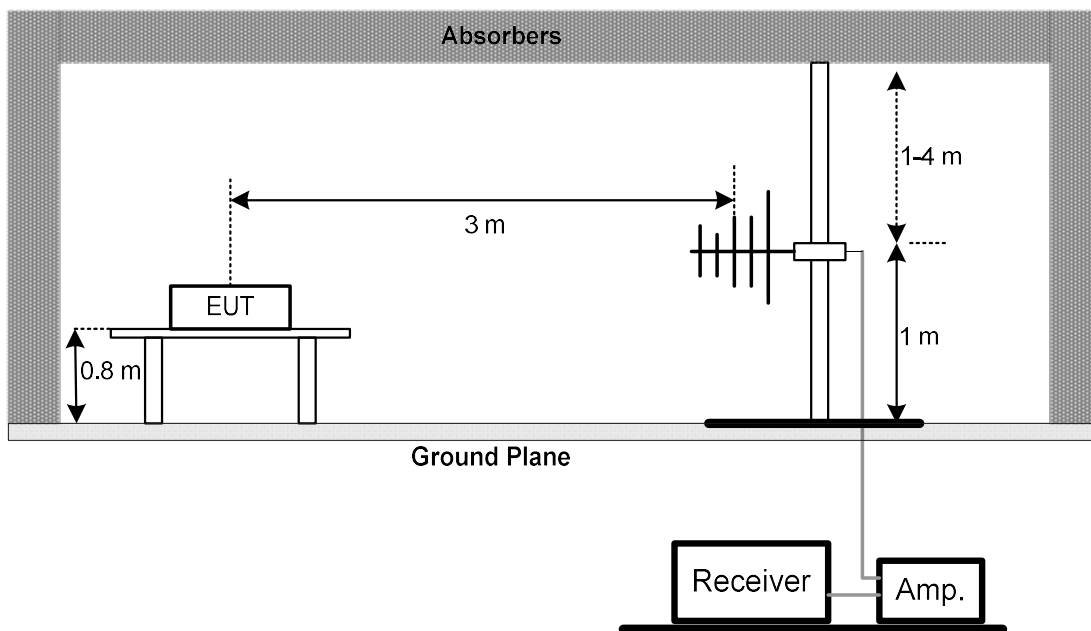

3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX A.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

3.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

4. FREQUENCY TOLERANCE

4.1 LIMIT

Section	Test Item	Limit
FCC 15.225(e)	Frequency Tolerance	± 1.356 kHz

4.2 TEST PROCEDURE

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Please refer to the APPENDIX C.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item
FCC Rule s2.1049	Bandwidth

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

5. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 12, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400088	Feb. 2, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
4	Pre-Amplifier	emci	EMC9135	980401	Feb. 2, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	emci	VULB 9168	1467	Mar. 12, 2025
2	Pre-Amplifier	emci	EMC9135	980401	Feb. 2, 2025
3	MXE EMI Receiver	Keysight	N9038A	MY56400088	Feb. 2, 2025
4	Test Cable	emci	EMC104-SM-SM-7 000	181020	May 21, 2024
5	Test Cable	emci	EMC104-SM-SM-2 500	170618	May 21, 2024
6	Test Cable	emci	RWP50-4.6A-SMS M-1M	20200928 002	May 21, 2024
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
8	Wideband Radio Communication Test	R&S	CMW500	129246	Jul. 21, 2024

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	emci	VULB 9168	1467	Mar. 12, 2025
2	Pre-Amplifier	emci	EMC9135	980401	Feb. 2, 2025
3	MXE EMI Receiver	Keysight	N9038A	MY56400088	Feb. 2, 2025
4	Test Cable	emci	EMC104-SM-NM-7 000	170330	May 31, 2025
5	Test Cable	emci	EMC104-SM-SM-2 500	170618	May 31, 2025
6	Test Cable	emci	RWP50-4.6A-SMS M-1M	20200928 002	May 31, 2025
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	Mar. 12, 2025
8	Wideband Radio Communication Test	R&S	CMW500	129246	Jul. 21, 2024

Frequency Tolerance					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Jul. 23, 2024
2	Temperature And Humidity Box	Blue pand	BPHS-120B	170616454	Jul. 23, 2024

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Jul. 21, 2024



Remark "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of equipment list is one year.

6. EUT TEST PHOTO

Radiated Emissions Test Photos


9 kHz to 30 MHz

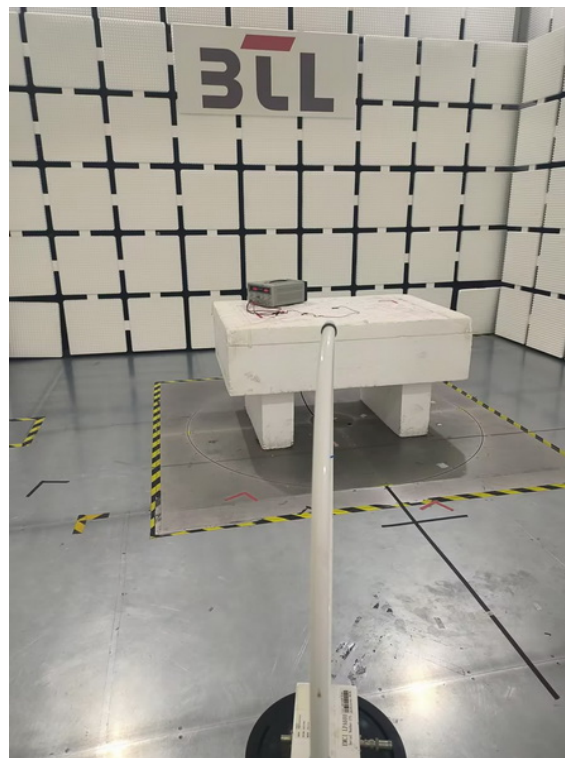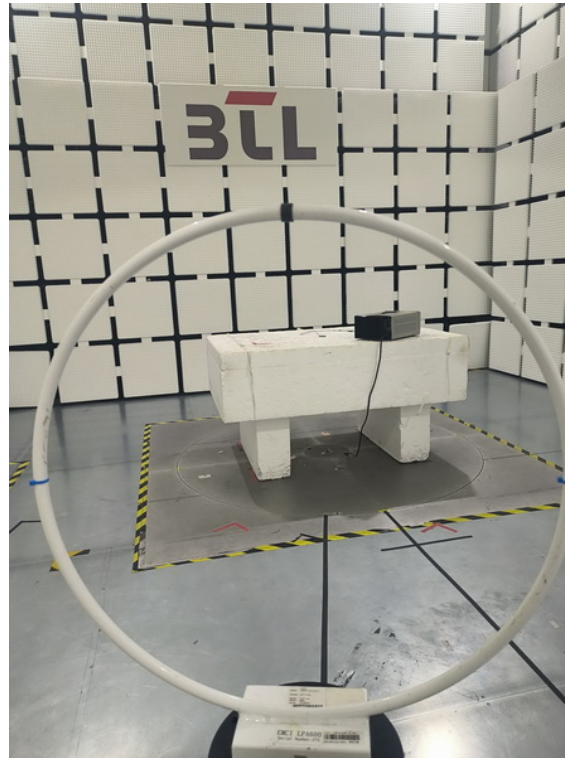

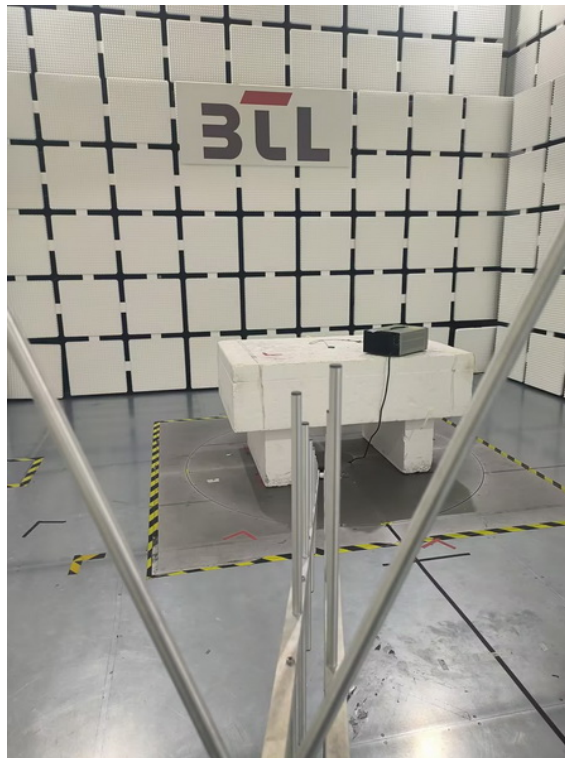Radiated Emissions Test Photos**30 MHz to 1000 MHz**


APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_ 13.56MHz	Polarization	Vertical
-----------	-------------------	--------------	----------

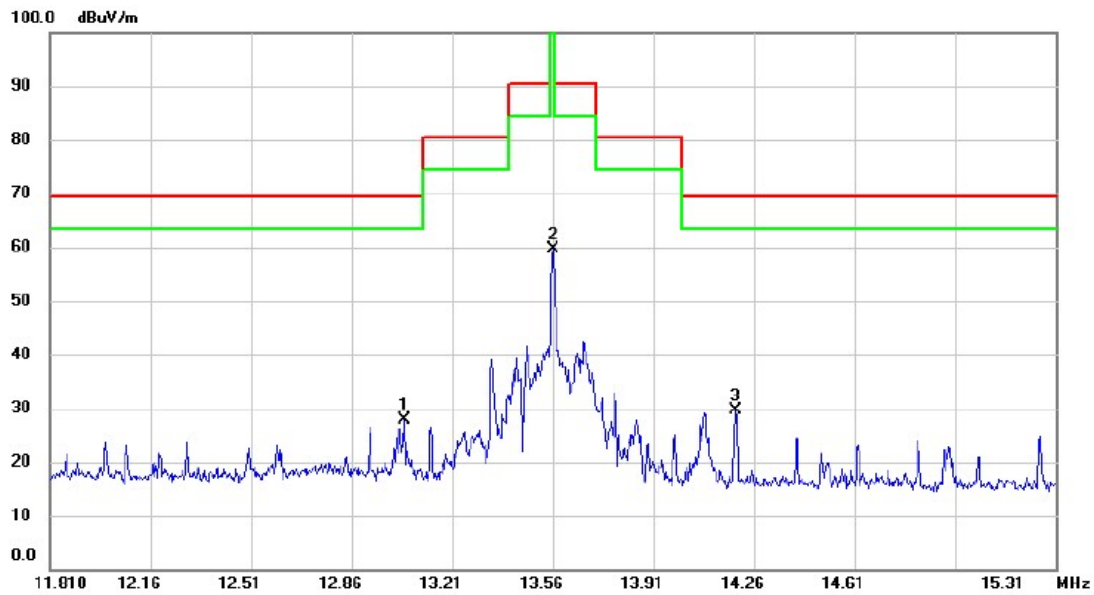


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13.0455	27.20	0.74	27.94	69.50	-41.56	peak		
2		13.5618	59.21	0.54	59.75	124.00	-64.25	peak		
3	*	14.1970	29.38	0.26	29.64	69.50	-39.86	peak		

Test Mode	TX Mode_13.56MHz	Polarization	Horizontal
-----------	------------------	--------------	------------

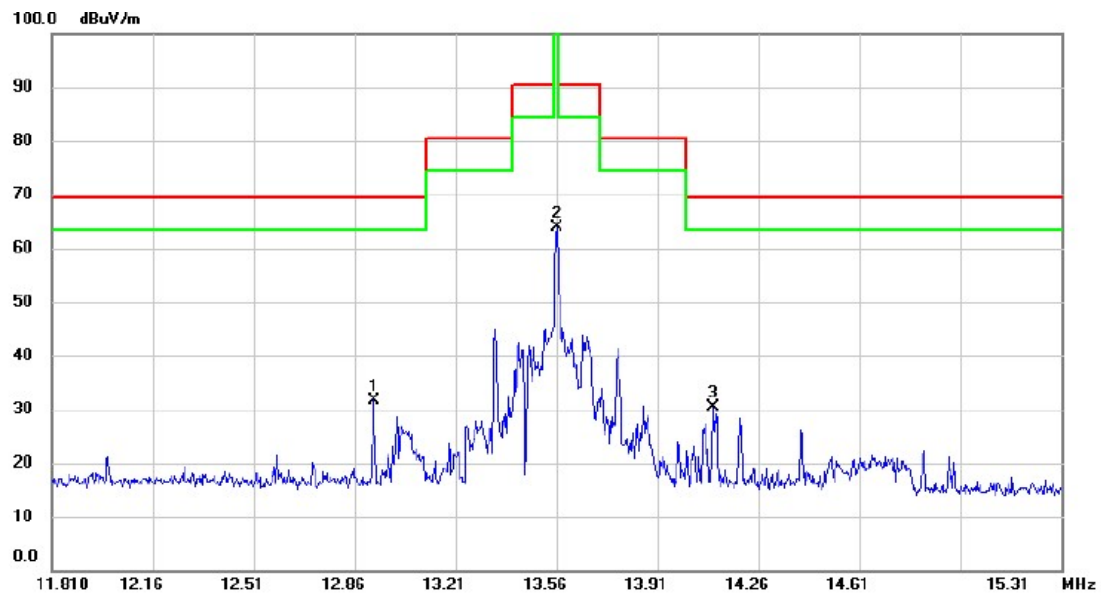

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	12.9265	30.81	0.79	31.60	69.50	-37.90			peak
2		13.5618	63.28	0.54	63.82	124.00	-60.18			peak
3		14.1060	30.03	0.31	30.34	69.50	-39.16			peak

Test Mode	TX Mode_13.56MHz	Polarization	Vertical
-----------	------------------	--------------	----------

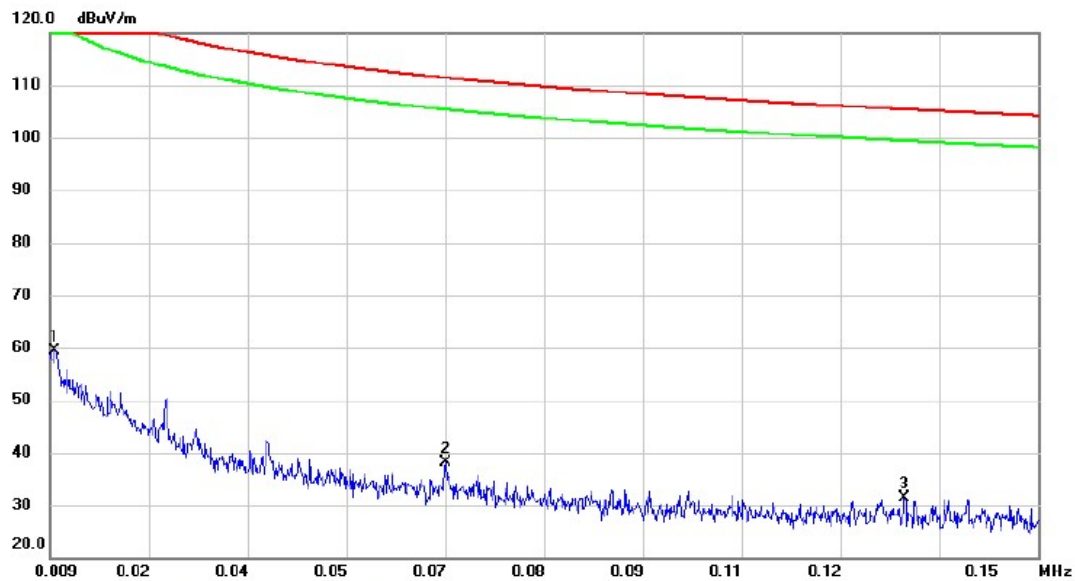


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	0.0097	10.98	48.49	59.47	127.85	-68.38			peak
2		0.0655	7.38	30.63	38.01	111.37	-73.36			peak
3		0.1310	5.98	25.41	31.39	105.39	-74.00			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The measurement points between 9-90 kHz, 110-490 KHz satisfy the peak limit and can also satisfy the AVG limit.

Test Mode	TX Mode_13.56MHz	Polarization	Vertical
-----------	------------------	--------------	----------

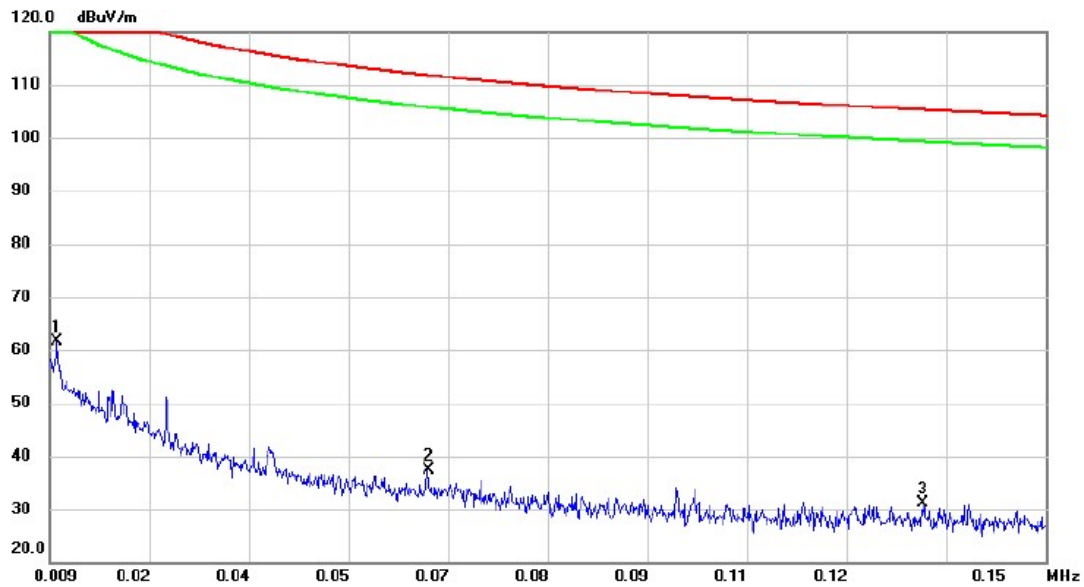

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	0.0101	13.39	48.27	61.66	127.50	-65.84	peak			
2		0.0626	6.30	31.01	37.31	111.76	-74.45	peak			
3		0.1327	5.88	25.33	31.21	105.27	-74.06	peak			


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

(3) The measurement points between 9-90 kHz, 110-490 KHz satisfy the peak limit and can also satisfy the AVG limit.

Test Mode	TX Mode_ 13.56MHz	Polarization	Horizontal
-----------	-------------------	--------------	------------

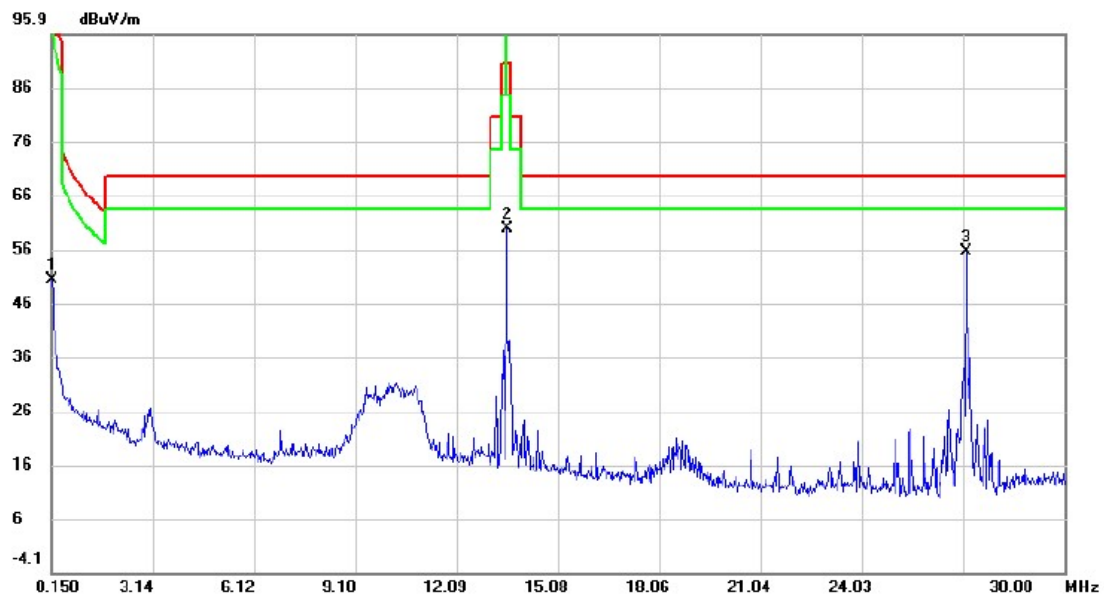

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.1500	25.65	24.54	50.19	104.22	-54.03			peak
2		13.5676	59.16	0.54	59.70	90.50	-30.80			peak
3	*	27.1195	61.73	-6.16	55.57	69.50	-13.93			peak


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

(3) The measurement points between 9-90 kHz, 110-490 KHz satisfy the peak limit and can also satisfy the AVG limit

Test Mode	TX Mode_13.56MHz	Polarization	Horizontal
-----------	------------------	--------------	------------

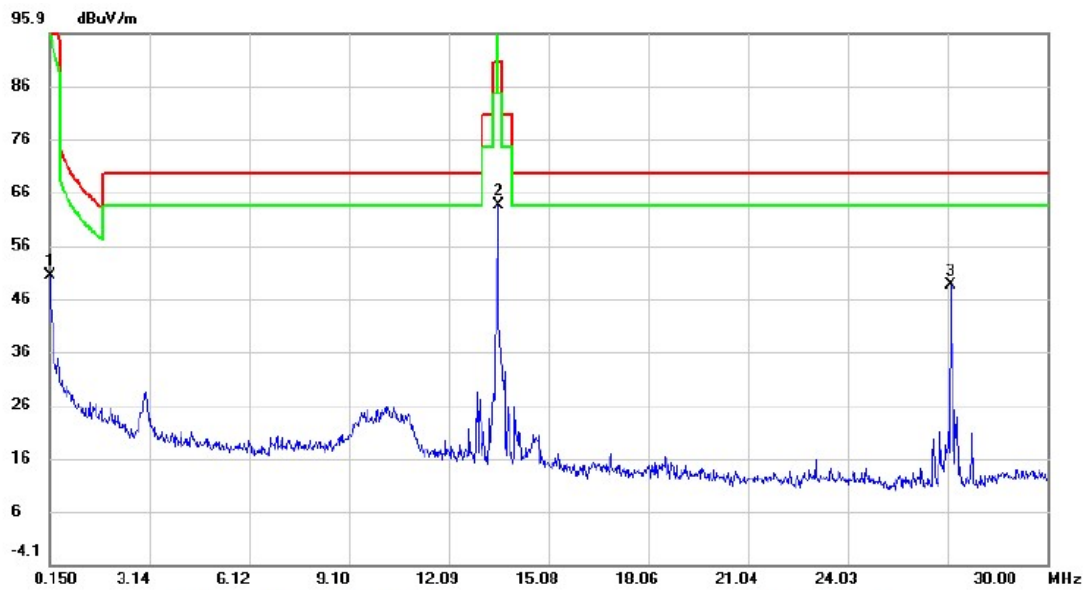


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		0.1500	25.84	24.54	50.38	104.22	-53.84	peak		Comment
2		13.5675	62.94	0.54	63.48	90.50	-27.02	peak		
3	*	27.1194	54.61	-6.16	48.45	69.50	-21.05	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The measurement points between 9-90 kHz, 110-490 KHz satisfy the peak limit and can also satisfy the AVG limit.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_13.56MHz	Polarization	Vertical
-----------	------------------	--------------	----------

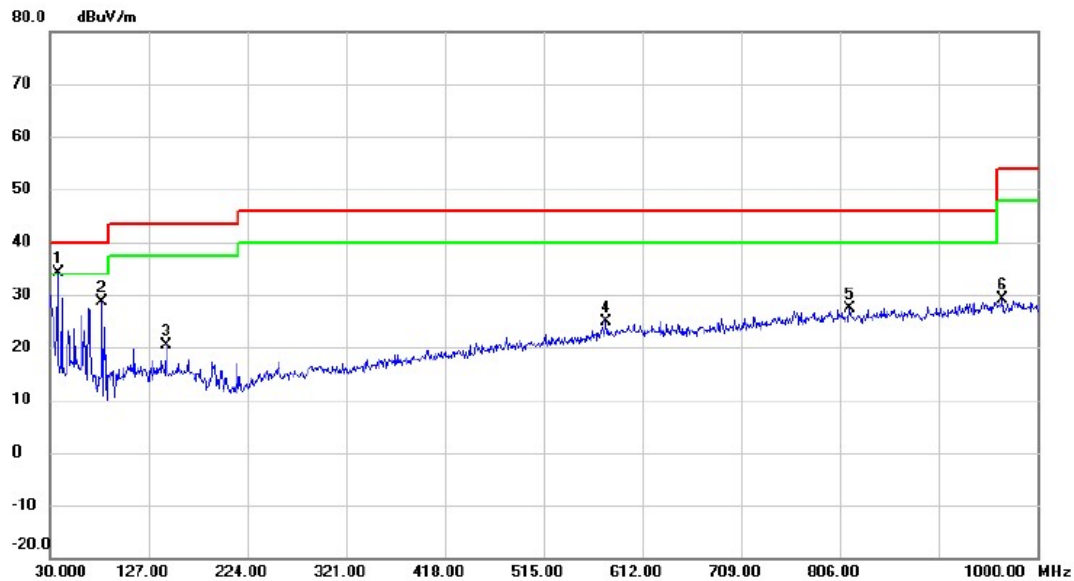


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.2450	50.47	-16.42	34.05	40.00	-5.95	peak	
2		81.4100	49.62	-20.88	28.74	40.00	-11.26	peak	
3		143.9750	36.20	-15.75	20.45	43.50	-23.05	peak	
4		576.1100	33.20	-8.33	24.87	46.00	-21.13	peak	
5		816.1850	32.68	-5.20	27.48	46.00	-18.52	peak	
6		966.0500	32.67	-3.56	29.11	54.00	-24.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_13.56MHz	Polarization	Horizontal
-----------	------------------	--------------	------------

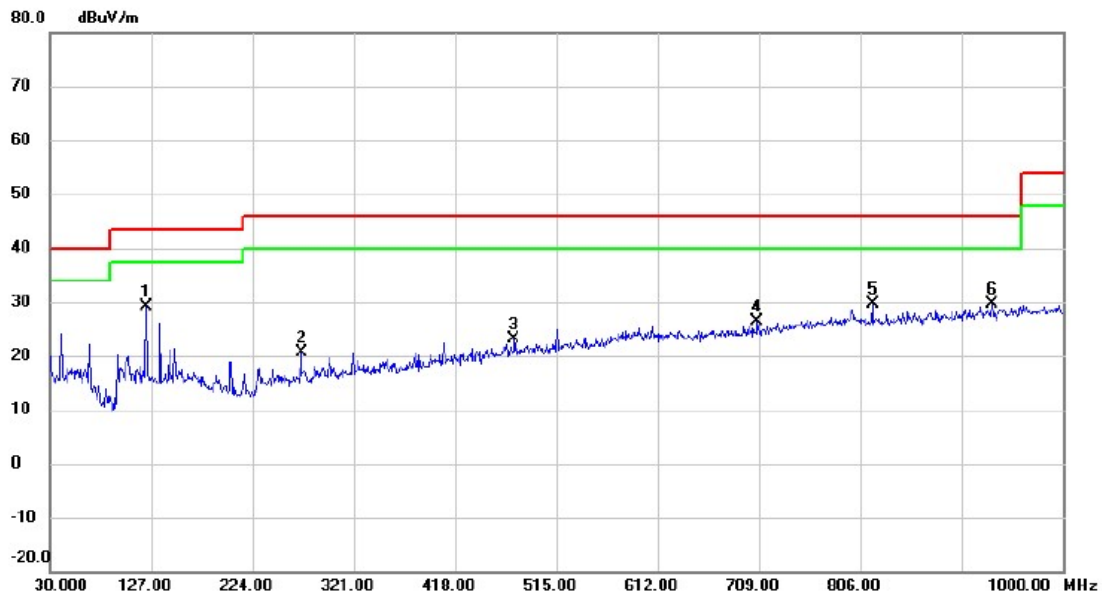

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	122.1500	46.86	-17.72	29.14	43.50	-14.36	peak	
2		271.0450	36.15	-15.47	20.68	46.00	-25.32	peak	
3		474.7450	33.86	-10.61	23.25	46.00	-22.75	peak	
4		707.5450	33.03	-6.74	26.29	46.00	-19.71	peak	
5		818.1250	34.76	-5.19	29.57	46.00	-16.43	peak	
6		931.6150	33.70	-4.02	29.68	46.00	-16.32	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - FREQUENCY TOLERANCE


Test Mode	TX Mode_13.56MHz
-----------	------------------

Frequency Tolerance Versus Environmental Temperature						
	Temperature (°C)	Voltage (V)	Frequency (MHz)	Frequency Error (kHz)	Limit (kHz)	Result
	20	3.3	13.561282	1.282	+/- 1.356	PASS
0 min	85	3.3	13.561282	1.282	+/- 1.356	PASS
	-30	3.3	13.561121	1.121	+/- 1.356	PASS
2 min	85	3.3	13.561282	1.282	+/- 1.356	PASS
	-30	3.3	13.561121	1.121	+/- 1.356	PASS
5 min	85	3.3	13.561282	1.282	+/- 1.356	PASS
	-30	3.3	13.561121	1.121	+/- 1.356	PASS
10 min	85	3.3	13.561282	1.282	+/- 1.356	PASS
	-30	3.3	13.561121	1.121	+/- 1.356	PASS
Frequency Tolerance Versus Input Voltage						
Temperature (°C)	Voltage (V)		Frequency (MHz)	Frequency Error (kHz)	Limit (kHz)	Result
20	V _{nom}	3.3	13.561282	1.282	+/- 1.356	PASS
20	V _{min}	1.7	13.561282	1.282	+/- 1.356	PASS
20	V _{max}	3.6	13.561282	1.282	+/- 1.356	PASS

APPENDIX D - BANDWIDTH

Test Mode	TX Mode
-----------	---------

Frequency (MHz)	99% Bandwidth (MHz)
13.56	0.021

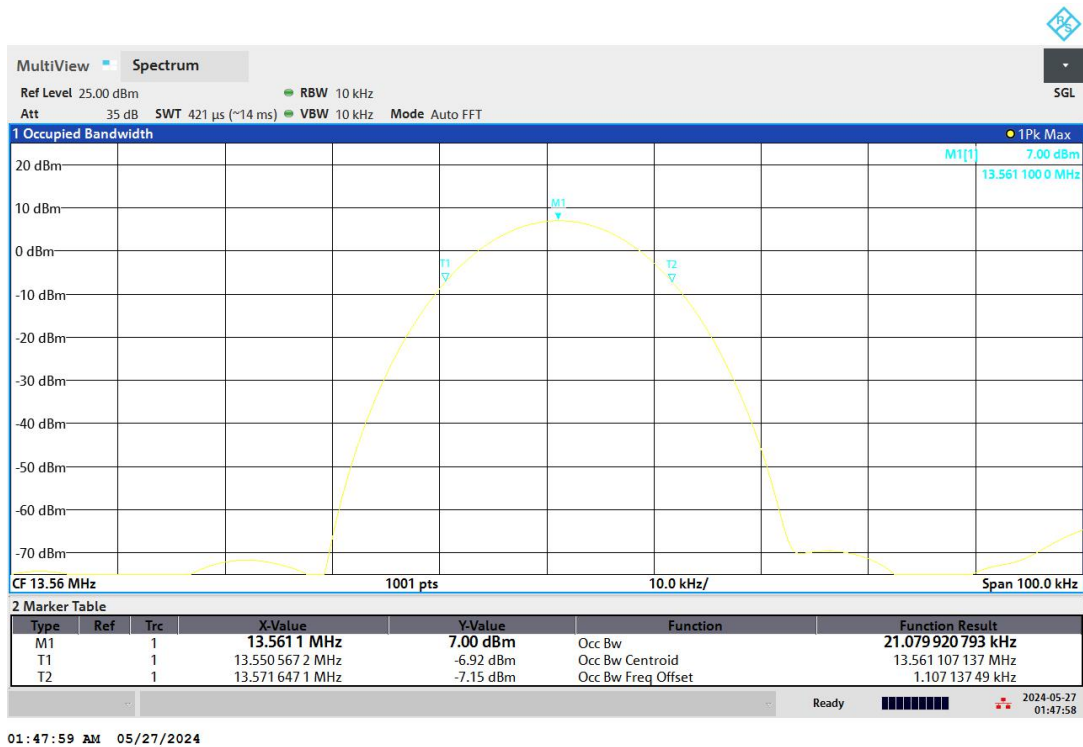

End of Test Report