

承 认 书

APPROVAL SHEET

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: 2.4/5.8G WIFI-2 钢片内置天线

客 户 料 号

CUSTOMER P/N:

优比电子料号

Youbi P/N: UB01NJ1D1409A REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:	Eddy 	
APPROVED BY:	工程专用章 Changxing.Liu	
DATE:	2023/10/11	

Modification History

Version	Content Revision	Issued by	Date
A	Original version	Eddy	2023-10-11

Content




<i>Item</i>	<i>Description</i>
1.-----	Electrical Specification
2.-----	Test Items and Equipment
3.-----	S Parameter
4.-----	Efficiency and Gain
5.-----	Radiation Pattern
6.-----	Active test data
7.-----	Mechanical Specification

1. Electrical Specification

Characteristics	Specifications	Unit
Outline Dimensions	16.1x14.2x6.3,T0.4	mm
Frequency	2400-2500 / 5150-5850	MHz
Impedance	50	Ω
VSWR	≤ 2	
Polarization	Linear Polarization	
Gain	1.5 REF	dBi
Efficiency	> 40	%
Connector Type	DIP	
Operating temperature	-20℃~+85℃	
Storage Temp	-20℃~+50℃	


2. Test Items and Equipment

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)
The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)

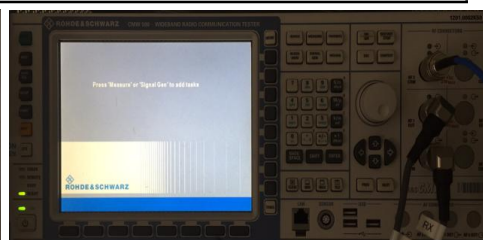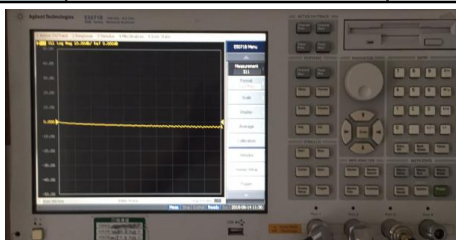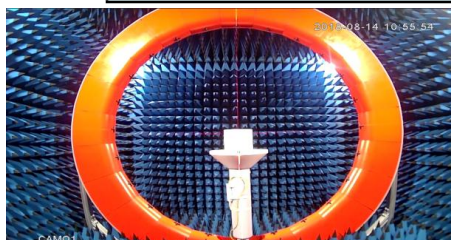

3. S Parameter

Frequency (MHz)	Return Loss (dB)	VSWR
2400	-21.84	1.19
2450	-27.99	1.09
2500	-26.81	1.10
5150	-14.37	1.48
5500	-12.53	1.65
5850	-14.08	1.48

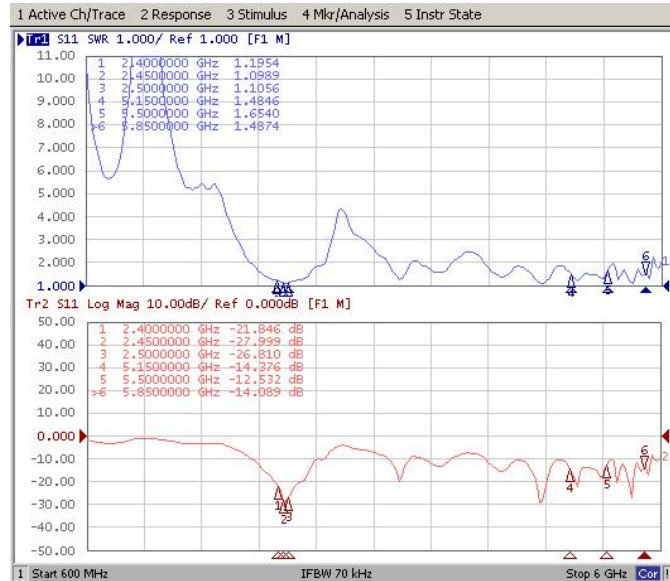



* Voltage Standing Wave Ratio(VSWR)

Return Loss(RL)

$$RL = 20 \cdot \log_{10}[(VSWR + 1)/(VSWR - 1)]$$


4. Efficiency and Gain

Frequency (MHz)	2400	2450	2500	5150	5500	5850
Efficiency (%)	54.44	53.60	53.02	40.88	42.00	43.85
Gain (dBi)	2.04	1.06	1.18	2.03	1.91	2.18

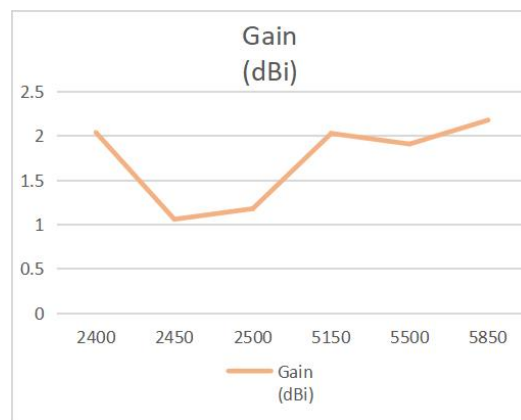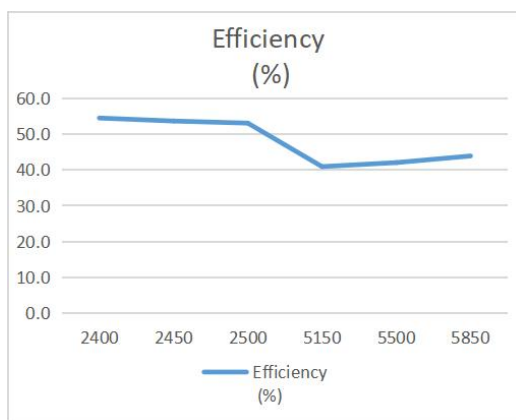


5. Radiation Pattern

5-1 Antenna 3D Radiation Pattern

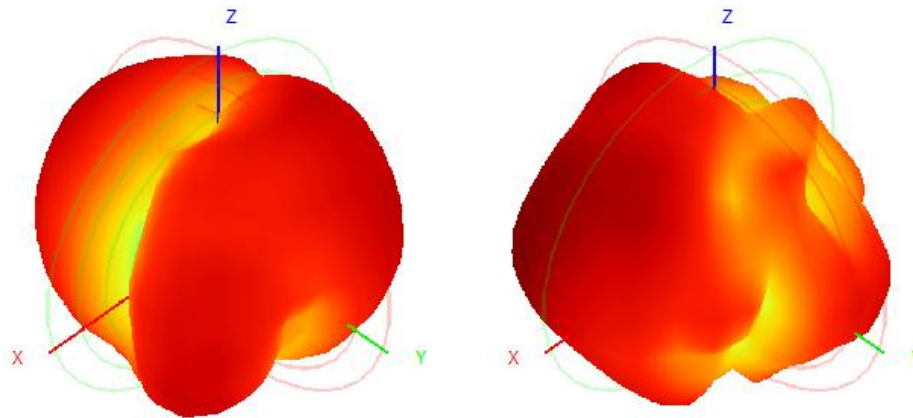


2400MHz

5150MHz

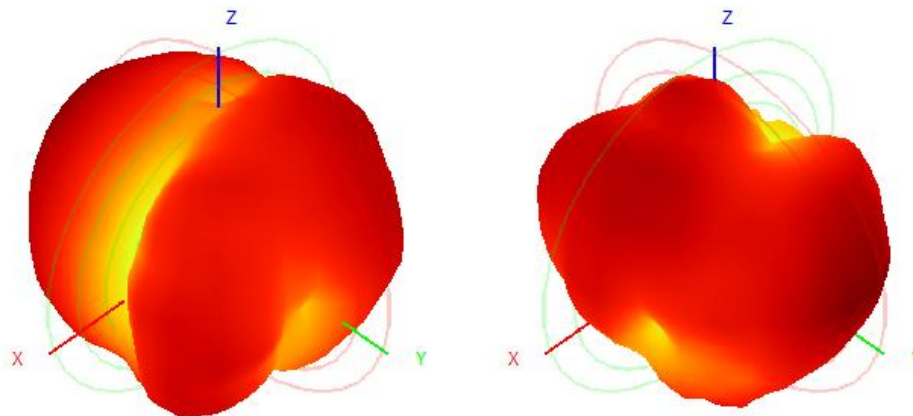

2450MHz


5500MHz

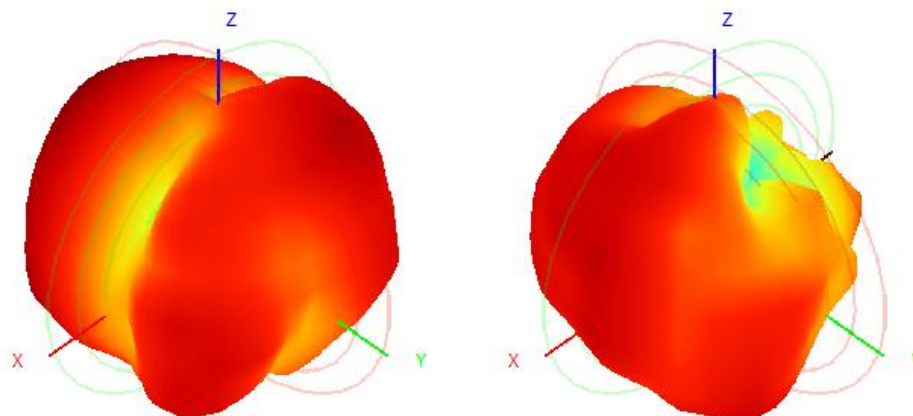


2500MHz

5850MHz


5-2 Antenna 2D Radiation Pattern

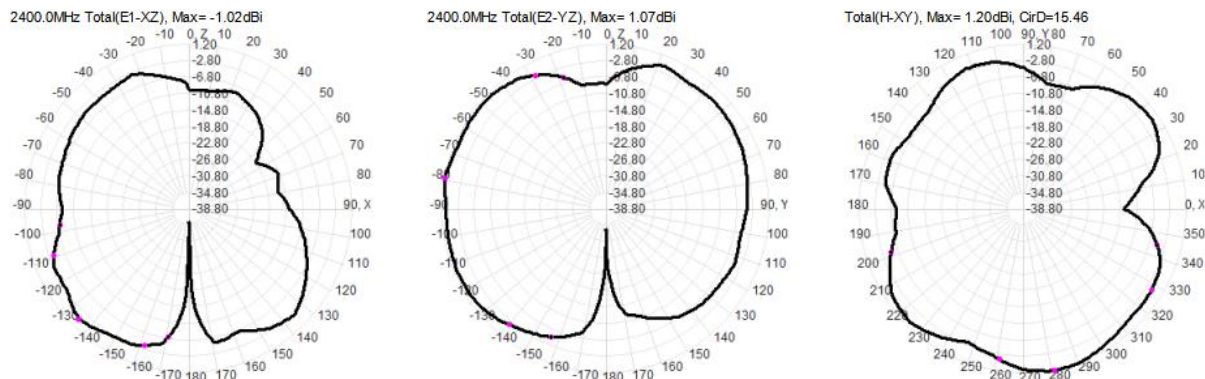

2400MHz

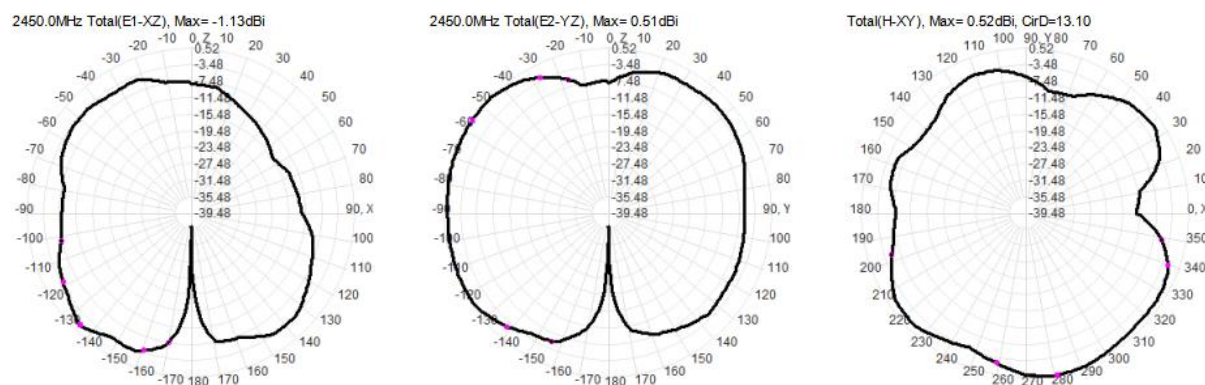


2450MHz

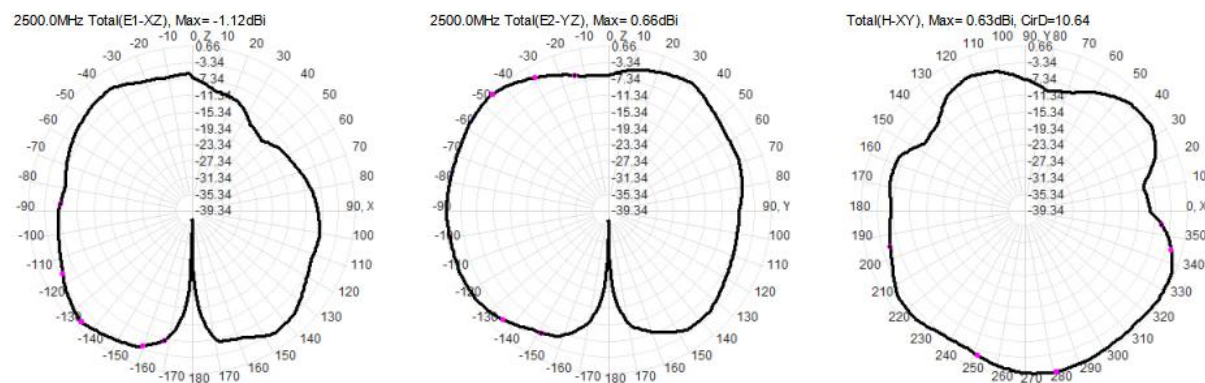


2500MHz


5150.0MHz Total(E1-XZ), Max=-0.34dBi

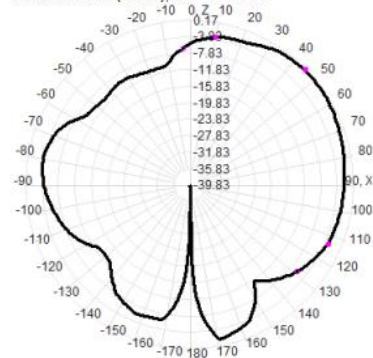

5150.0MHz Total(E2-YZ), Max=-2.75dBi

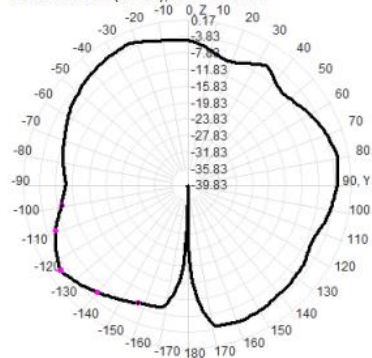


Total(H-XY), Max=0.17dBi, CirD=15.32

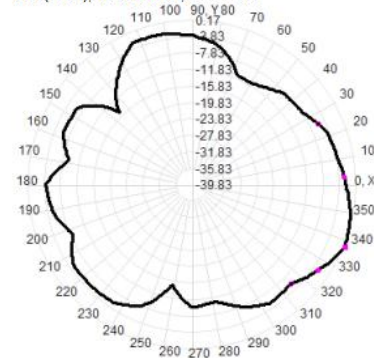


5150MHz


5500.0MHz Total(E1-XZ), Max=0.07dBi

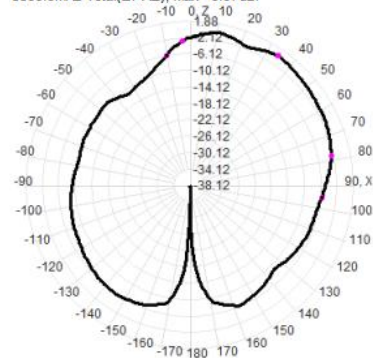

5500.0MHz Total(E2-YZ), Max=1.88dBi

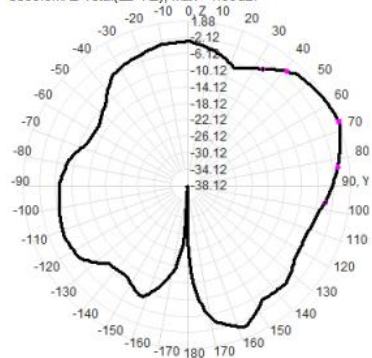


Total(H-XY), Max=-1.69dBi, CirD=14.35

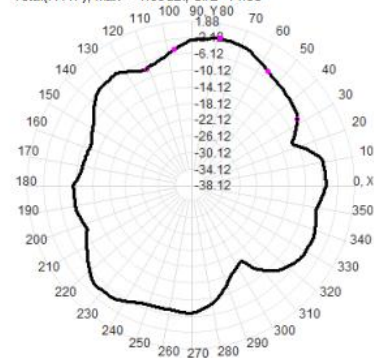


5500MHz


5850.0MHz Total(E1-XZ), Max=-0.52dBi

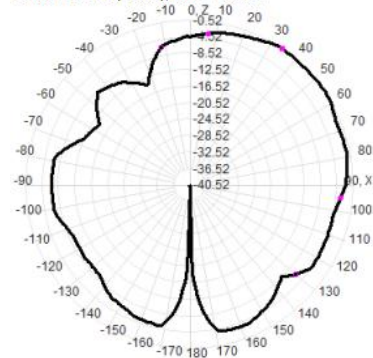

5850.0MHz Total(E2-YZ), Max=-0.89dBi

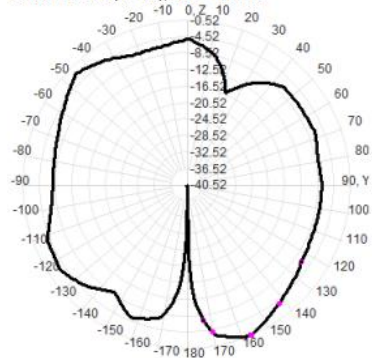

Total(H-XY), Max=-1.15dBi, CirD=18.29

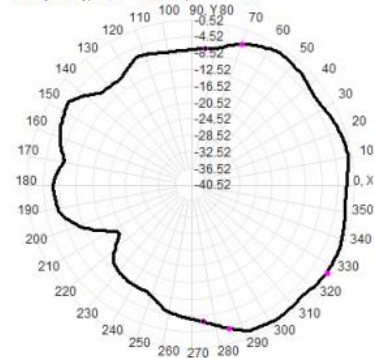

5850MHz

6. Active test data

802.11b:11MBps		
channel	Measurement	Total
1	TRP	18.08
6	TRP	17.34
11	TRP	18.2
1	TIS(EIRP)	-80.09
6	TIS(EIRP)	-78.7
11	TIS(EIRP)	-78.94

802.11a:54MBps		
channel	Measurement	Total
36	TRP	15.44
149	TRP	20.11
165	TRP	20.23
36	TIS(EIRP)	-75.32
149	TIS(EIRP)	-75.02
165	TIS(EIRP)	-71.31

7. Mechanical Specification

The technical drawing shows a 2.4/5.8G WiFi-2 antenna with the following dimensions:

- Top view: 14.2 ± 0.3 (width), 16.1 ± 0.3 (length)
- Side view: 6.3 ± 0.2 (height), 0.4 ± 0.1 (base thickness), 2.5 ± 0.1 (internal width), 13.6 ± 0.2 (internal length), 6.5 ± 0.2 (flange width), 5.58 ± 0.2 (total height)
- 3D model: Shows the antenna's profile and mounting tabs.

Specification :

Frequency Rang:2400-2500 / 5150-5850 MHz

RoHS COMPLIANT		A		B		C		D		E		F		G	
REV.		DESCRIPTION		ECN NO.		DATE		DRAFTER							
A		First Sample		/		2023.10.11		Yongxin							
B															