

FCC TEST REPORT

FCC ID:2A0VG-E5

Report No..... : ZHT-251114132W02

Product..... : Card Reader/Encoder (E5)

Trademark..... : /

Model(s)..... : E5

Model Difference..... : /

Applicant..... : Hangzhou Sciener Smart Technology Co., Ltd.

Address..... : Room 1101,Building A2 2-150#,Yunlian Road,Yuhang District
Hangzhou,Zhejiang Province,PRC 311121

Manufacturer..... : Hangzhou Sciener Smart Technology Co., Ltd.

Address..... : Room 1101,Building A2 2-150#,Yunlian Road,Yuhang District
Hangzhou,Zhejiang Province,PRC 311121

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai
Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : Nov. 14, 2025

Date of Test(s)..... : Nov. 14, 2025 to Dec. 5, 2025

Date of Issue..... : Dec. 5, 2025

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure..... : KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2020

In the configuration tested, the EUT complied with the standards specified above.

Prepared by

Leon Li

Leon Li/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.



Table of Contents

Page

1. SUMMARY OF TEST RESULTS	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF TEST MODES	5
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	5
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	5
3. EQUIPMENTS LIST FOR ALL TEST ITEMS	6
3.1 TEST FACILITY	6
3.2 INSTRUMENT LIST FOR ALL TEST ITEMS	6
3.3 TESTING SOFTWARE	8
4. EMC EMISSION TEST	9
4.1 CONDUCTED EMISSION MEASUREMENT	9
4.2 RADIATED EMISSION MEASUREMENT	13
5. FREQUENCY TOLERANCE	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM TEST STANDARD	20
5.4 TEST SETUP	20
6.5 TEST RESULT	20
6. CHANNEL BANDWIDTH	21
6.1 APPLIED PROCEDURES / LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULT	22
7.ANTENNA REQUIREMENT	23
8. TEST SETUP PHOTO	24
9. EUT CONSTRUCTIONAL DETAILS	24



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.225) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.203	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.225(a)(b)(c)(d)	Fundamental & Radiated Spurious Emission Measurement	PASS	
FCC part 15.215	Channel Bandwidth	PASS	
FCC part 15.225(e)	Frequency Tolerance	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Card Reader/Encoder (E5)
Test Model No.:	E5
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Operation Frequency:	13.56MHz
Channel Numbers:	1
Channel Separation:	N/A
Modulation Type:	ASK
Antenna Type:	PCB antenna
Antenna gain:	0dBi
Power supply:	Input: 5 V  500 mA
Sample Number:	251114132YP001
Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	




2.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting NFC mode
Remark: EUT use new battery during the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



RF Conducted Emission



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AC Adapter	Huizhou Jinhu Industrial Development Co., Ltd.	VCBAJACH	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**3. EQUIPMENTS LIST FOR ALL TEST ITEMS****3.1 TEST FACILITY**

Guangdong Zhonghan Testing Technology Co., Ltd.

Add.: Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941

Designation Number: CN0325

IC Registered No.: 29832

CAB identifier: CN0143

3.2 INSTRUMENT LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop Antenna	TESEQ	HLA6121	58357	Oct. 11, 2024	Oct. 10, 2025
					Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 21, 2024	Oct. 20, 2025
					Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 21, 2024	Oct. 20, 2025
					Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
					Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Nov. 25, 2021	Nov. 24, 2026
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026



Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNCM-2000MM	/	May 7, 2025	May 6, 2026

Conducted Test Instrument

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
					Oct. 20, 2025	Oct. 19, 2026
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
3	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026



3.3 TESTING SOFTWARE

Project	Software name	Edition
RF Conducted	MTS 8310	2.0.0.0
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$U=0.92\text{dB}$
2	RF conducted power	$U=0.16\text{dB}$
3	Spurious emissions conducted	$U=0.21\text{dB}$
4	All radiated emissions (9k-30MHz)	$U=1.6\text{dB}$
5	All radiated emissions (<1G)	$U=5.1\text{dB}$
6	All radiated emissions (>1G)	$U=4.65\text{dB}$
7	Temperature	$U=0.5^{\circ}\text{C}$
8	Humidity	$U=2\%$
9	Occupied Bandwidth	$U=4.96\%$
10	Power Spectral Density	$U=0.71\text{dB}$

Decision Rule

- ☒ Uncertainty is not included
- ☐ Uncertainty is included



4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:


(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

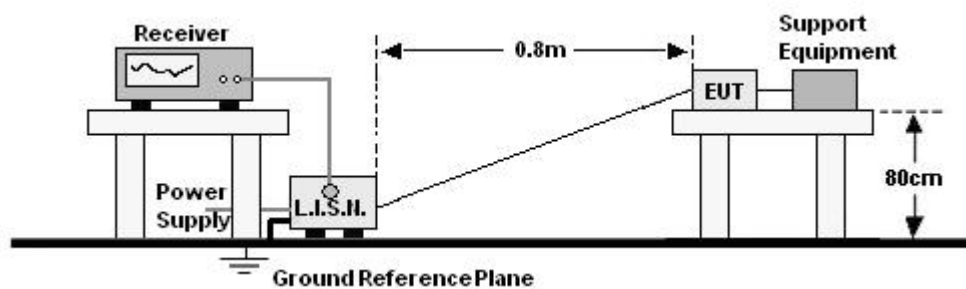


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULTS

Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

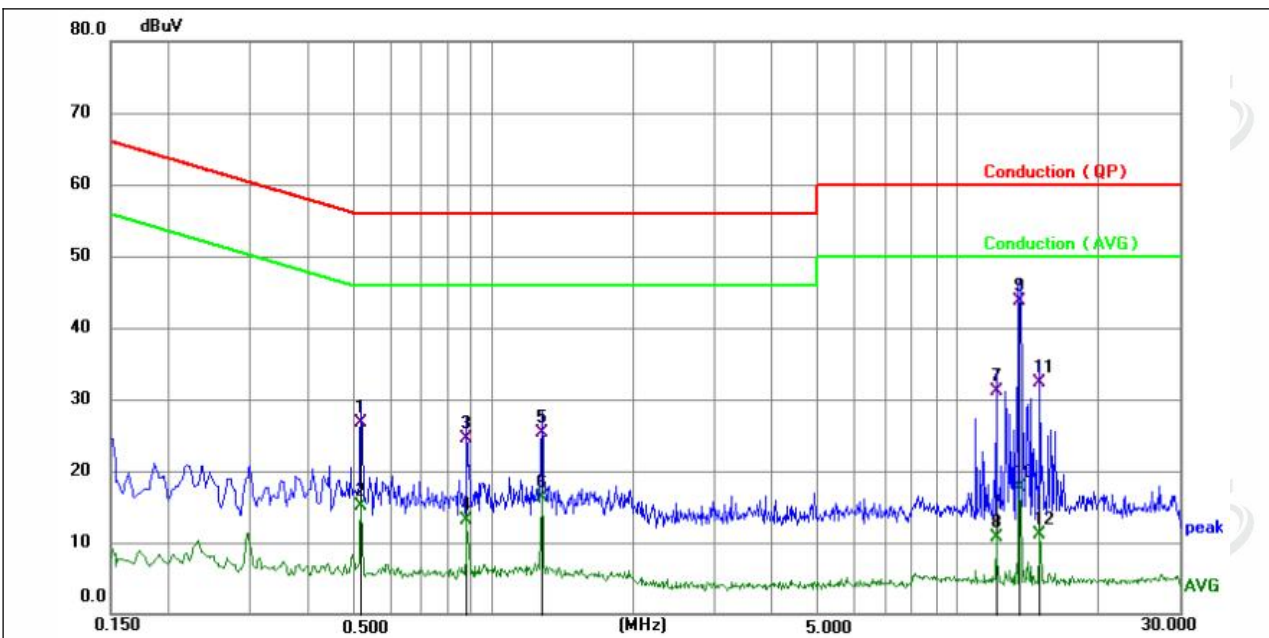


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5190	16.78	10.02	26.80	56.00	-29.20	QP
2	0.5190	5.12	10.02	15.14	46.00	-30.86	AVG
3	0.8790	14.38	10.05	24.43	56.00	-31.57	QP
4	0.8790	3.11	10.05	13.16	46.00	-32.84	AVG
5	1.2703	15.30	10.06	25.36	56.00	-30.64	QP
6	1.2703	6.16	10.06	16.22	46.00	-29.78	AVG
7	12.0794	21.03	10.09	31.12	60.00	-28.88	QP
8	12.0794	0.69	10.09	10.78	50.00	-39.22	AVG
9 *	13.6184	33.65	10.09	43.74	60.00	-16.26	QP
10	13.6184	7.61	10.09	17.70	50.00	-32.30	AVG
11	15.0450	22.28	10.10	32.38	60.00	-27.62	QP
12	15.0450	0.94	10.10	11.04	50.00	-38.96	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	24.3°C	Relative Humidity :	50%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

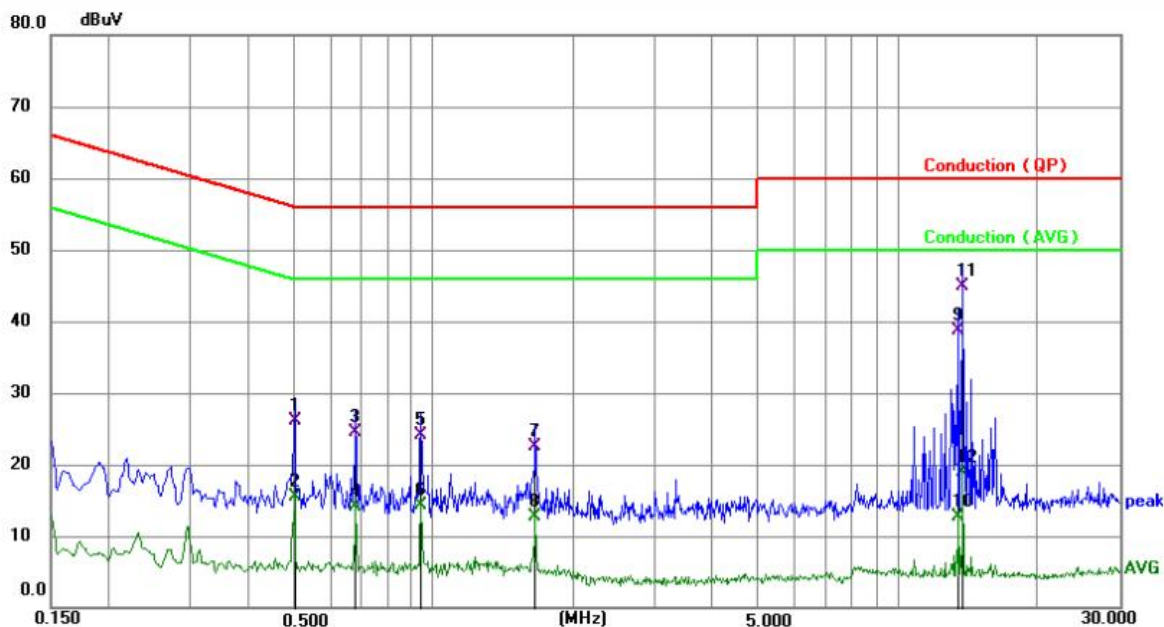

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5010	16.00	10.02	26.02	56.00	-29.98	QP
2	0.5010	5.50	10.02	15.52	46.00	-30.48	AVG
3	0.6809	14.51	10.03	24.54	56.00	-31.46	QP
4	0.6809	4.04	10.03	14.07	46.00	-31.93	AVG
5	0.9420	14.11	10.06	24.17	56.00	-31.83	QP
6	0.9420	4.30	10.06	14.36	46.00	-31.64	AVG
7	1.6620	12.54	10.06	22.60	56.00	-33.40	QP
8	1.6620	2.61	10.06	12.67	46.00	-33.33	AVG
9	13.5060	28.56	10.09	38.65	60.00	-21.35	QP
10	13.5060	2.60	10.09	12.69	50.00	-37.31	AVG
11 *	13.7715	34.90	10.09	44.99	60.00	-15.01	QP
12	13.7715	8.90	10.09	18.99	50.00	-31.01	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

Note: According to § 15.209, the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Field Strength of Fundamental Limit:

- The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. 15,848 microvolts/meter at 3 meters=124 dBuV/m.
- Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. 334 microvolts/meter at 3 meters=90.47 dBuV/m.

4.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.




- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of the emissions at each frequency of significant emissions, with polarization oriented for maximum response.
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
Note:
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

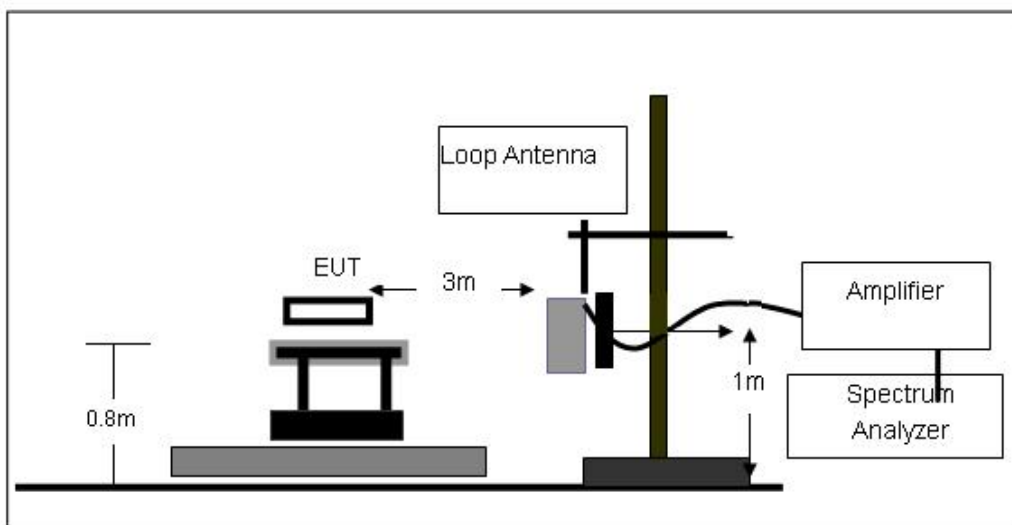




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

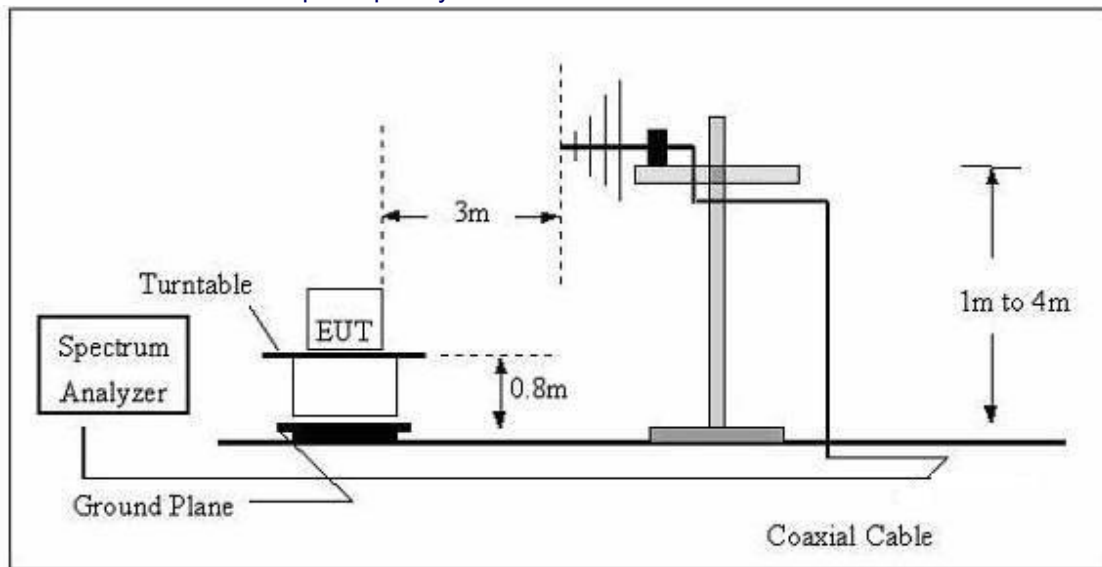

(C) Radiated Emission Test-Up Frequency Above 1GHz

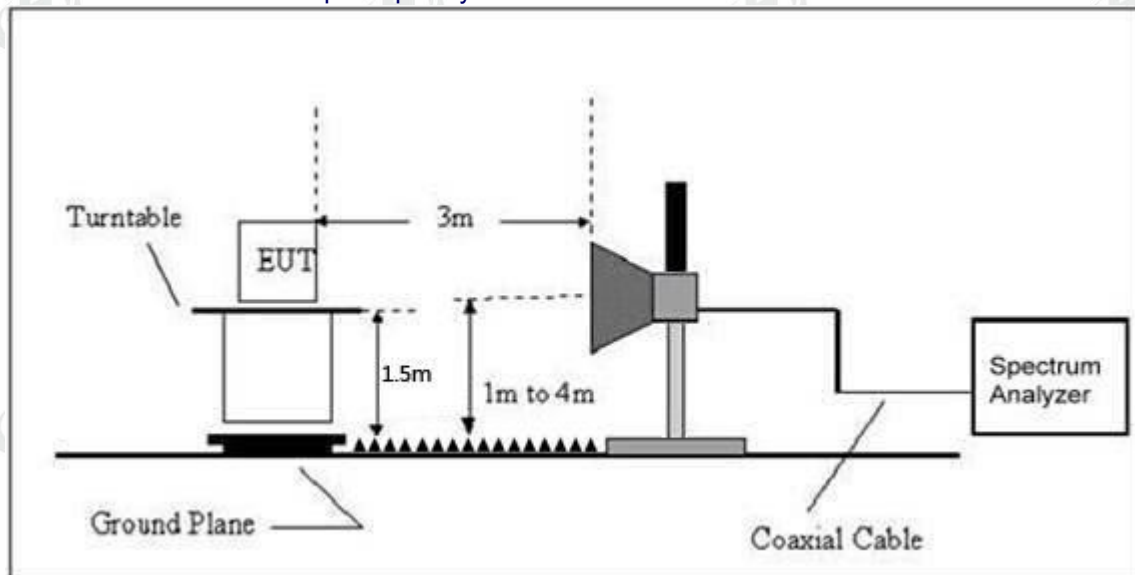


4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



5.2.6 TEST RESULTS

Field Strength of Fundamental

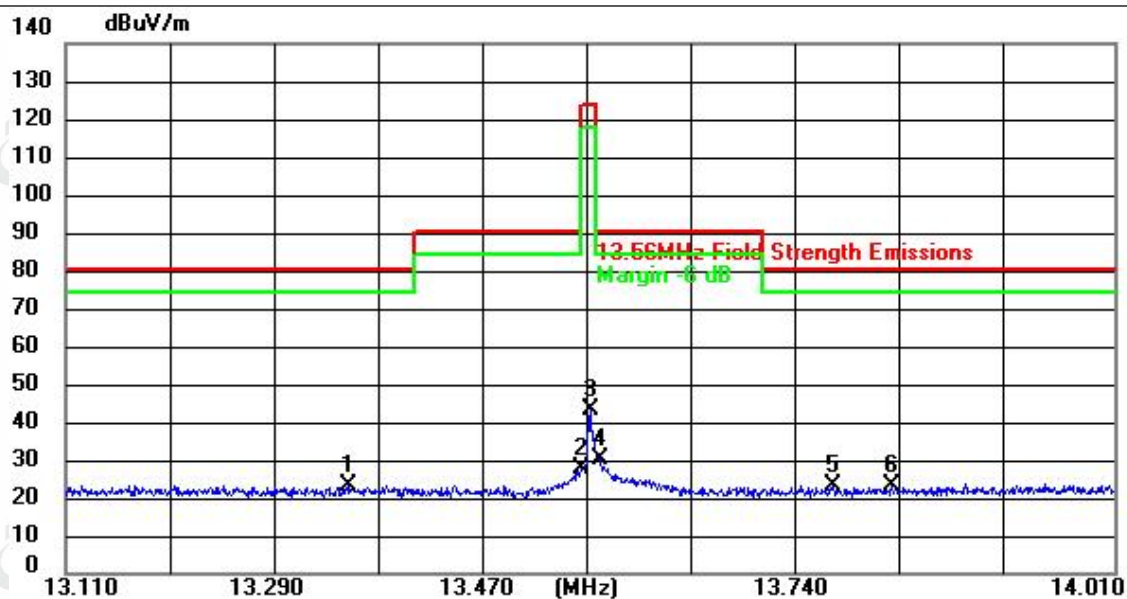

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	13.3530	49.43	-26.15	23.28	80.50	-57.22	peak
2	13.5518	54.01	-26.15	27.86	90.50	-62.64	peak
3	13.5600	69.59	-26.15	43.44	124.00	-80.56	peak
4	13.5690	56.56	-26.16	30.40	90.50	-60.10	peak
5 *	13.7688	49.59	-26.17	23.42	80.50	-57.08	peak
6	13.8192	49.56	-26.18	23.38	80.50	-57.12	peak




Between 9KHz – 30 MHz

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

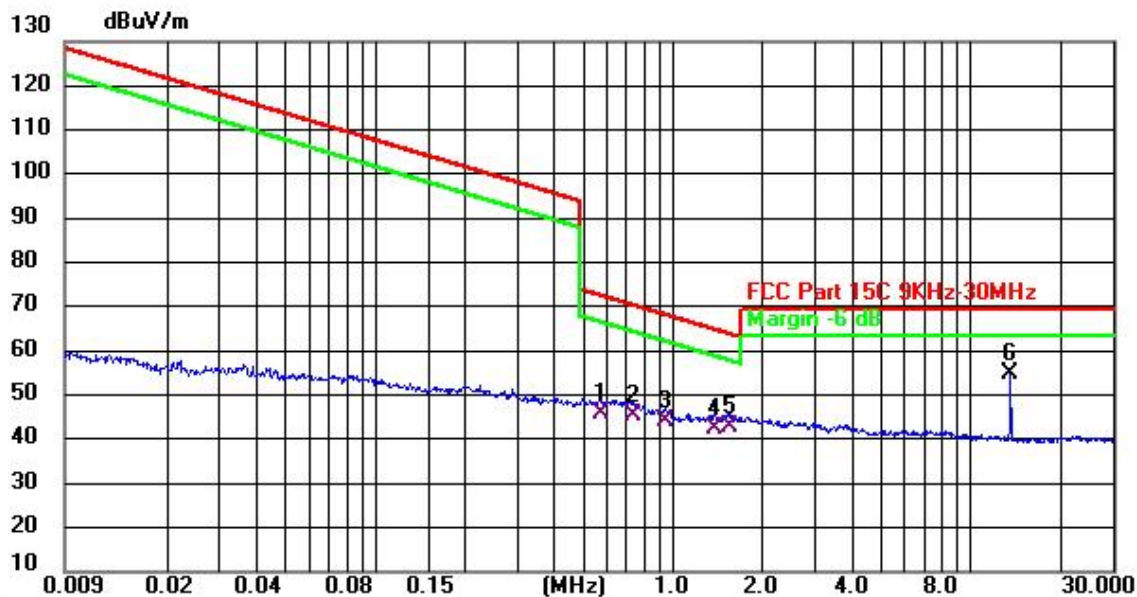

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.5681	44.56	1.24	45.80	72.52	-26.72	QP
2	0.7364	43.63	1.58	45.21	70.26	-25.05	QP
3	0.9394	42.24	1.99	44.23	68.15	-23.92	QP
4	1.3750	39.50	2.89	42.39	64.84	-22.45	QP
5	1.5530	39.42	3.24	42.66	63.78	-21.12	QP
6 *	13.5600	53.88	0.84	54.72	69.54	-14.82	peak

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.


Margin = Emission Level- Limit.

All X/Y/Z directions have been tested, and only the worst X direction test data is reflected in the report.




Between 30MHz – 1GHz

Temperature :	25.1°C	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		

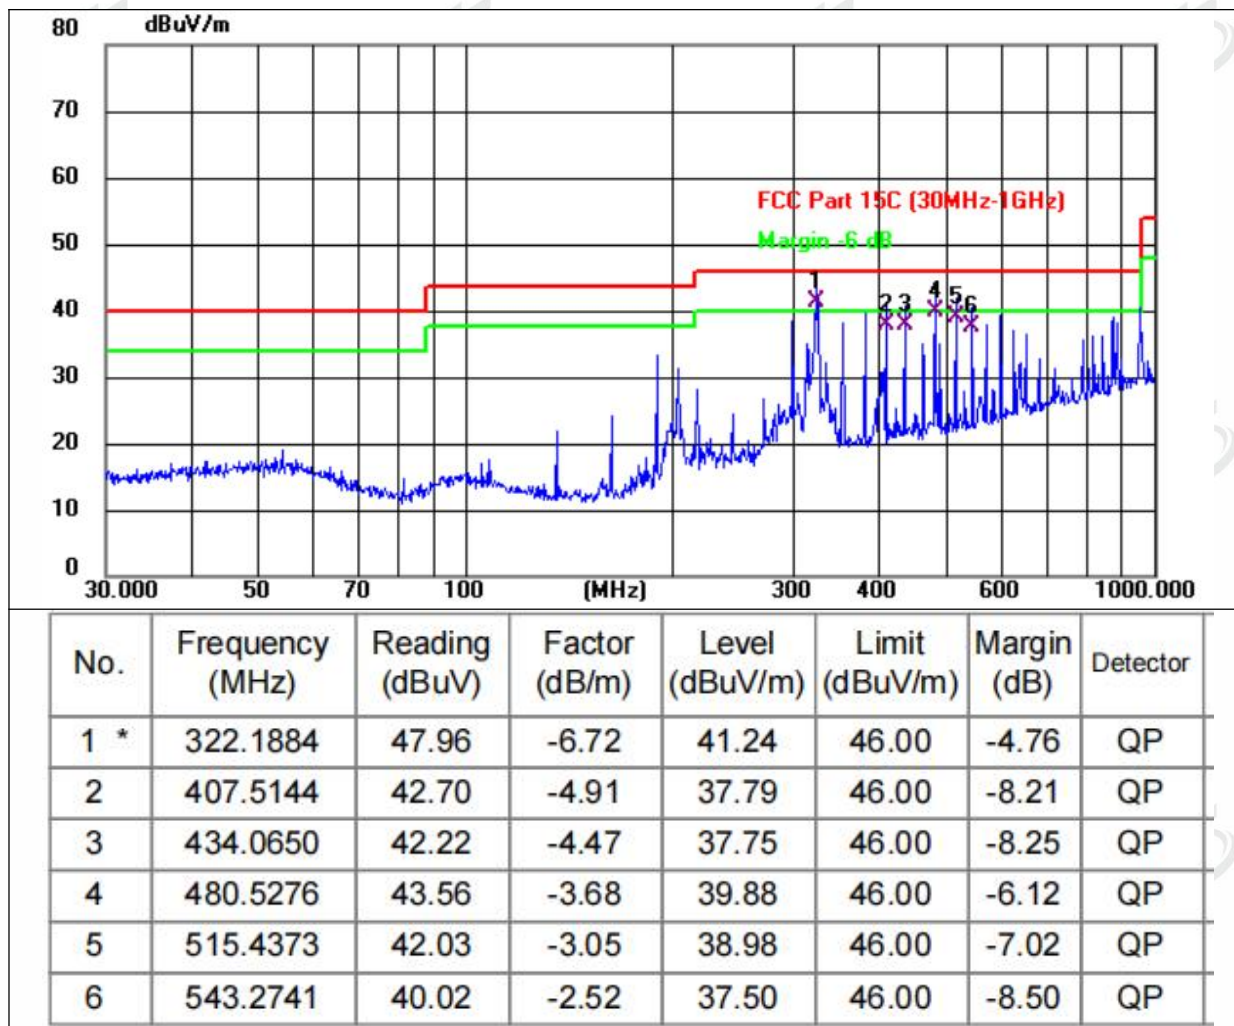



Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		

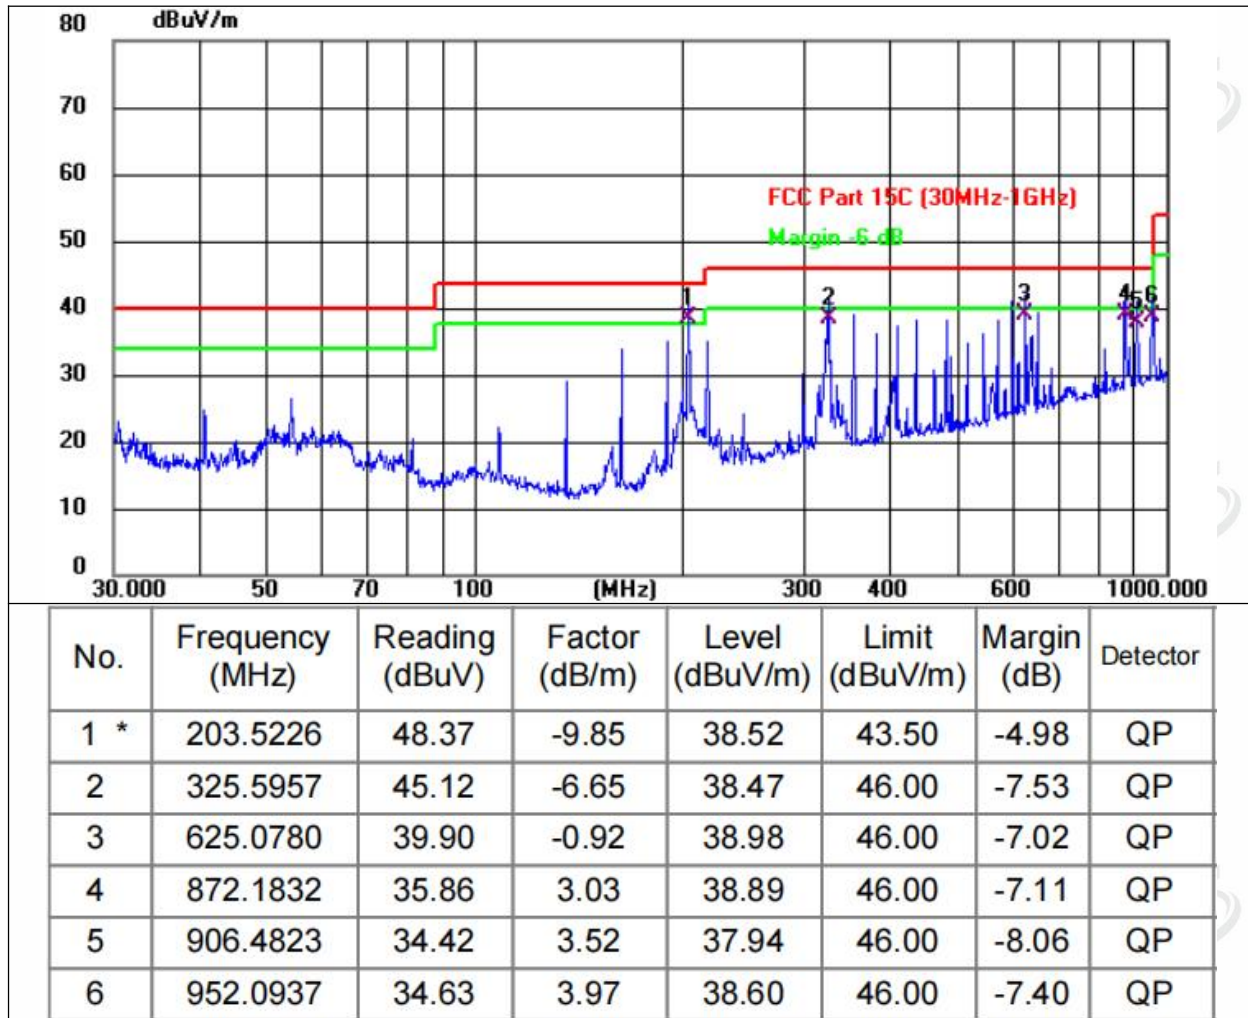

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



5. FREQUENCY TOLERANCE

Test Requirement:	FCC Part15 C Section 15.225(e)
Test Method:	ANSI C63.10-2020

5.1 LIMIT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Limit: $\pm 0.01\%$ of 13.56MHz= ± 1356 Hz

5.2 TEST PROCEDURE

1. Set RBW = 10 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. The transmitter output (antenna port) was connected to the spectrum analyzer.

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP



6.5 TEST RESULT

Test Conditions			Frequency Deviation		Limit
Frequency MHz	Power(Vdc)	Temperature (°C)	Measured Freq. (MHz)	Deviation (%)	
13.56	Normal	-20	13.56111	0.008186	$\pm 0.01\%$
	Normal	-10	13.56115	0.008481	
	Normal	0	13.56115	0.008481	
	Normal	10	13.56101	0.007448	
	Normal	20	13.56117	0.008628	
	Normal	30	13.56099	0.007301	
	Normal	40	13.56108	0.007965	
	Normal	50	13.56134	0.009882	
	Normal*85%	20	13.56104	0.007670	
	Normal *115%	20	13.56120	0.008850	



6. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.215
Test Method:	ANSI C63.10-2020

6.1 APPLIED PROCEDURES / LIMIT

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

6.2 TEST PROCEDURE

1. Set RBW = 10 Hz for 1%-5%OBW.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP




6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	25.4℃	Relative Humidity :	52.2%
Test Mode :	ASK	Test Voltage :	AC 120V/60Hz

Test channel	20dB Channel Bandwidth (KHz)	Result
1	0.098	Pass

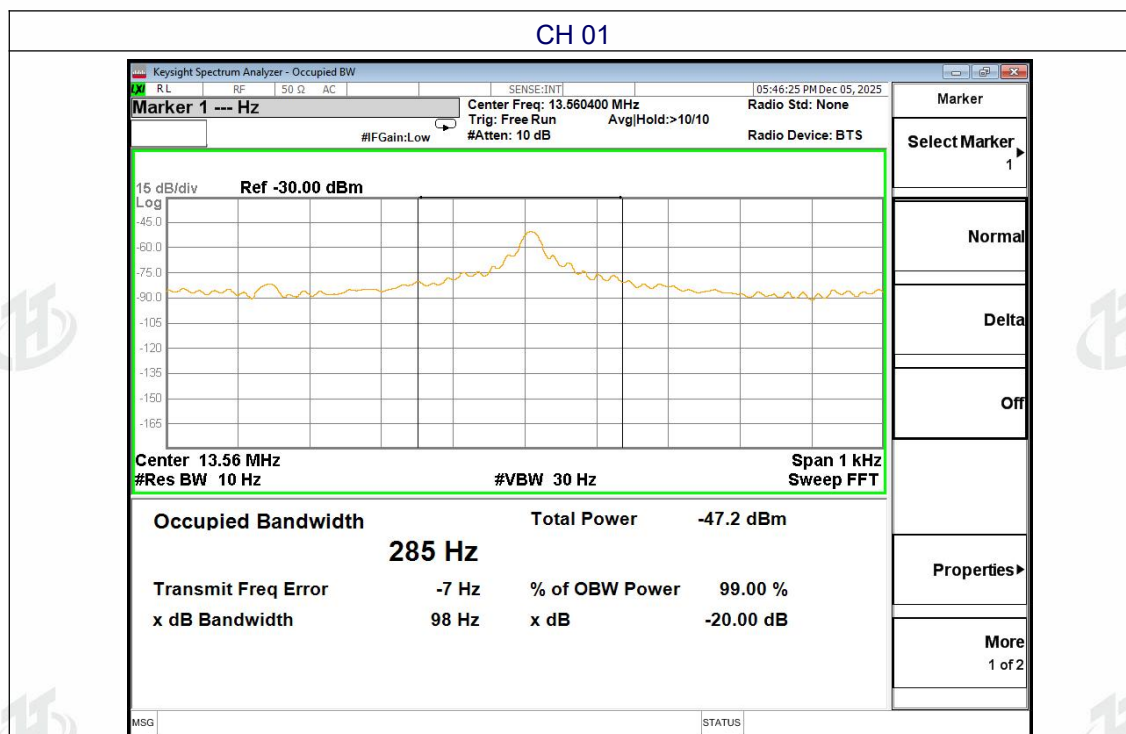

7.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antennas is PCB antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****