



FCC TEST REPORT

FCC ID:2AOVG-G4N

On Behalf of

Hangzhou Sciener Smart Technology Co., Ltd.

SMART LOCK GATEWAY G4N

Model No.: G4N

Prepared for : Hangzhou Sciener Smart Technology Co., Ltd.
Address : Room 1101, Building A2 2-150#, Yunlian Road, Yuhang District
Hangzhou, Zhejiang Province, PRC 311121

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2606098-C01-R02
Date of Receipt : Jun. 2, 2026
Date of Test : Jun. 2, 2026 to Jun. 23, 2026
Date of Report : Jun. 23, 2026
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	RELATED SUBMITTAL(S) / GRANT (S)	7
2.3	TEST METHODOLOGY	7
2.4	TEST FACILITY	7
2.5	ACCESSORIES OF DEVICE (EUT)	7
2.6	TESTED SUPPORTING SYSTEM DETAILS	7
2.7	TEST CONDITIONS	7
2.8	MEASUREMENT UNCERTAINTY	8
3	TEST INSTRUMENTS LIST	9
4	SYSTEM TEST CONFIGURATION	10
4.1	TEST MODE	10
4.2	CONFIGURATION OF TESTED SYSTEM	10
4.3	TRANSMITTER RADIATED POWER (EIRP/ERP)	11
4.4	PEAK-TO-AVERAGE RATIO	14
4.5	OCCUPY BANDWIDTH	15
4.6	MODULATION CHARACTERISTIC	16
4.7	OUT OF BAND EMISSION AT ANTENNA TERMINALS	16
4.8	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	17
4.9	FREQUENCY STABILITY	21
5	PHOTOS OF TEST SETUP	22
6	PHOTOS OF EUT	22

TEST REPORT DECLARATION

Applicant : Hangzhou Sciener Smart Technology Co., Ltd.
Address : Room 1101, Building A2 2-150#, Yunlian Road, Yuhang District Hangzhou,
Zhejiang Province, PRC 311121
Manufacturer : Hangzhou Sciener Smart Technology Co., Ltd.
Address : Room 1101, Building A2 2-150#, Yunlian Road, Yuhang District Hangzhou,
Zhejiang Province, PRC 311121
EUT Description : SMART LOCK GATEWAY G4N
(A) Model No. : G4N
(B) Trademark : N/A

Measurement Standard Used:

FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 90
ANSI C63.26:2015

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Felix Pang
Test Engineer 
Approved by (name + signature).....: Simple Guan
Project Manager 
Date of issue.....: Jun. 23, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	Jun. 23, 2026	Initial released Issue	Felix Pang



1 Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1091	Pass* (Please refer to MPE Report)
Transmitter Radiated Power (EIRP/ERP)	Part 2.1046 Part 90.635(b)	Pass
Peak-To-Average Ratio	KDB 971168 D01(5.7)	Pass
Modulation Characteristics	Part 2.1047	N/A
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 90.209	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 90.691	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 90.691	Pass
Frequency stability	Part 2.1055(a)(1)(b) Part 2.1055(d)(1)(2) Part 90.213	Pass

Note:1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.

5. Transmitter module FCC ID:2AJYU-8XS0001, Test Report No.W7L-P23070009RF05.

2 General Information

2.1 General Description of EUT

Description of Device (EUT)

Description : SMART LOCK GATEWAY G4N
Model Number : G4N
Diff : N/A
Test Voltage : Input: 5V --- 2A

Support Networks	: LTE
Support Bands	: FDD LTE: Band 26
Channel Bandwidth	: LTE Band 26: 1.4MHz/3MHz/5MHz/10MHz
TX Frequency	: LTE Band 26: 814MHz-824MHz
Modulation type	: QPSK, 16QAM
Antenna type	: External Antenna
Antenna gain	: Maximum Gain is 1.00dBi for LTE Band 26
Software version	: V1.0
Hardware version	: V1.0

Remark: 1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for 4G function, and there is no other transmitter involved.

2.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 90 of the FCC CFR 47 Rules.

2.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

2.4 Test Facility

Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 21, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.5 Accessories of Device (EUT)

Accessories : N/A
Manufacturer : N/A
Model : N/A
Ratings : N/A

2.6 Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1.	N/A	N/A	N/A	N/A	N/A

2.7 Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8 Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB



3 Test Instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ EMC	Farad	PSI-3A1
CE	EZ EMC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

4 System test configuration

4.1 Test mode

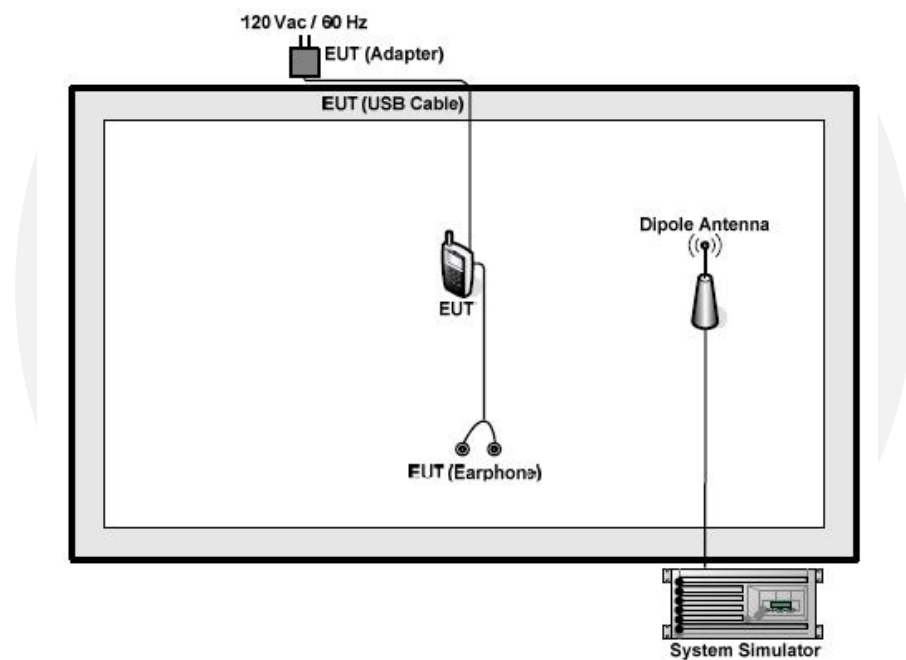
During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
LTE Band 26	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link

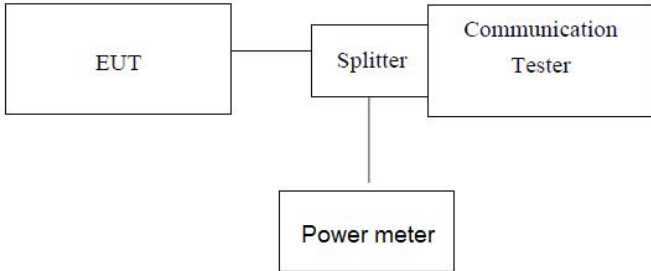
Note: Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03r1 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

4.2 Configuration of Tested System



4.3 Transmitter Radiated Power (EIRP/ERP)

Test Requirement:	Part 2.1046, Part 90.635(b)
Test Method:	ANSI C63.26:2015
Limit:	LTE Band 26: 100W(50dBm)
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	Description of the Conducted Output Power Measurement The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported. The relevant equation for determining the conducted measured value is: Conducted Output Power Value (dBm) = Measured Value (dBm) + Path Loss (dB) where: Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm; Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm; Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB; During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB). For example: In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is: Conducted Output Power Value (dBm) = 24.7 dBm + 8.5 dB = 33.2 dBm Description of the Transmitter Radiated Power Measurement In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the

EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW; GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP); dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when PMeas value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm; Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

EIRP POWER (dBm)

LTE Band 26							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
1.4M- QPSK	26697	814.7	23.03	1	20.88	0.1225	100
	26740	819	23.04	1	20.89	0.1227	100
	26783	823.3	23.00	1	20.85	0.1216	100
1.4M- 16QAM	26697	814.7	22.78	1	20.63	0.1156	100
	26740	819	22.76	1	20.61	0.1151	100
	26783	823.3	22.73	1	20.58	0.1143	100

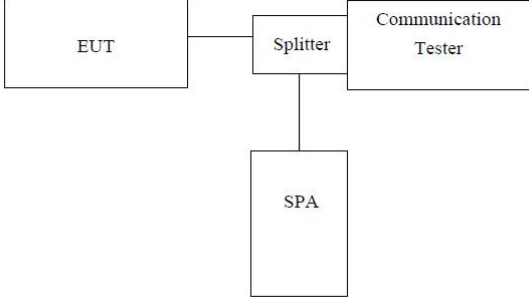
LTE Band 26							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
3M-QPSK	26705	815.5	22.97	1	20.82	0.1208	100
	26740	819	23.05	1	20.90	0.1230	100
	26775	822.5	23.06	1	20.91	0.1233	100
3M- 16QAM	26705	815.5	22.49	1	20.34	0.1081	100
	26740	819	22.41	1	20.26	0.1062	100
	26775	822.5	22.45	1	20.30	0.1072	100

LTE Band 26							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
5M-QPSK	26715	816.5	23.02	1	20.87	0.1222	100
	26740	819	23.01	1	20.86	0.1219	100
	26765	821.5	23.05	1	20.90	0.1230	100
5M- 16QAM	26715	816.5	22.39	1	20.24	0.1057	100
	26740	819	22.40	1	20.25	0.1059	100
	26765	821.5	22.44	1	20.29	0.1069	100

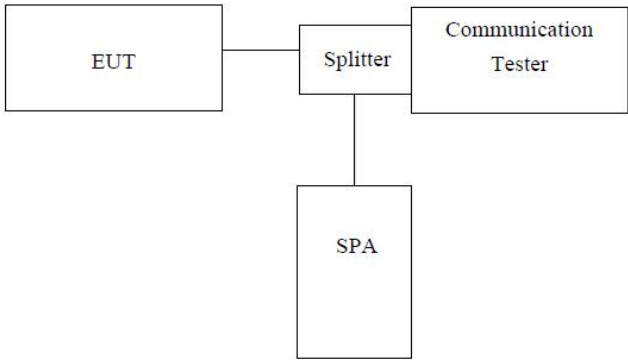
LTE Band 26							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
10M- QPSK	26740	819	23.08	1	20.93	0.1239	100
10M- 16QAM	26740	819	22.50	1	20.35	0.1084	100

Remarks: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB)

4.4 Peak-to-Average Ratio

Test Requirement:	KDB 971168 D01(5.7)
Test Method:	ANSI C63.26:2015
Test Limit:	Used complementary cumulative distribution function (CCDF) of analyzer to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.7. 2. The EUT was connected to spectrum and system simulator via a power divider 3. Using the CCDF measurement of spectrum analyzer; 4. Set RBW≥OBW or specified reference bandwidth; 5. Set the number of counts to a value that stabilizes the measured CCDF curve; 6. Set the measurement interval as 1ms 7. Record the maximum PAPR level associated with a probability of 0.1%.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Conducted measurement please refer to the certificate module FCC ID:2AJYU-8XS0001

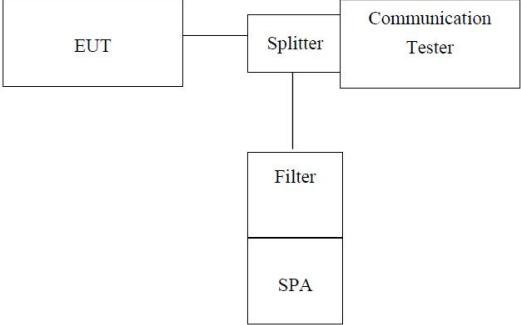
4.5 Occupy Bandwidth

Test Requirement:	Part 2.1049, Part 90.209
Test Method:	ANSI C63.26:2015
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1.The EUT's output RF connector was connected with a short cable to the spectrum analyzer, set center frequency to channel center frequency. 2.RBW was set to about 1%-5% of emission OBW, VBW$\geq$ 3 X RBW. 3.Set spectrum analyzer detection mode to peak, and the trace mode to max hold. 4. Use the 99% OBW function, The 99% power OBW can be found on the plot, determine the "-26dB amplitude" as equal to reference value -26dB.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Conducted measurement please refer to the certificate module FCC ID:2AJYU-8XS0001

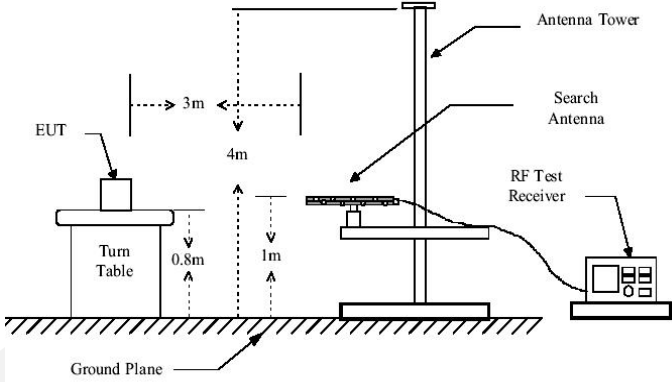
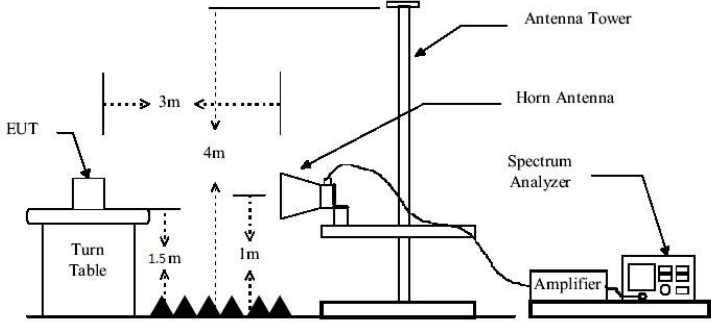
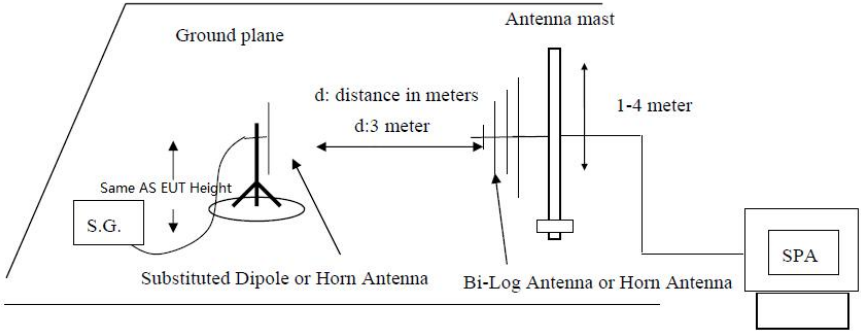
4.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 90 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

4.7 Out of band emission at antenna terminals

Test Requirement:	Part 2.1051, Part 90.691
Test Method:	ANSI C63.26:2015
Limit:	-13dBm
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=1MHz, VBW = 3MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Conducted measurement please refer to the certificate module FCC ID:2AJYU-8XS0001

4.8 Field strength of spurious radiation measurement

Test Requirement:	Part 2.1053, Part 90.691
Test Method:	ANSI C63.26:2015
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data(Worst case):

QPSK Mode:

Test mode:		LTE Band 26(1.4MHz)		Test channel:		Lowest	
Frequency (MHz)	Polarization	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1627.65	Vertical	-23.38	-13.91	-37.29	-13.00	-24.29	Pass
2442.16	V	-34.47	-11.82	-46.29	-13.00	-33.29	Pass
3255.42	V	-36.72	-9.25	-45.97	-13.00	-32.97	Pass
4069.47	V	-39.72	-6.83	-46.55	-13.00	-33.55	Pass
4885.89	V	-42.24	-4.20	-46.44	-13.00	-33.44	Pass
1628.71	Horizontal	-24.12	-13.90	-38.02	-13.00	-25.02	Pass
2441.97	H	-34.17	-11.80	-45.97	-13.00	-32.97	Pass
3255.56	H	-37.05	-9.23	-46.28	-13.00	-33.28	Pass
4070.25	H	-40.03	-6.81	-46.84	-13.00	-33.84	Pass
4884.21	H	-41.71	-4.18	-45.89	-13.00	-32.89	Pass
Test mode:		LTE Band 26(1.4MHz)		Test channel:		Middle	
Frequency (MHz)	Polarization	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1638.96	Vertical	-23.88	-13.87	-37.75	-13.00	-24.75	Pass
2455.66	V	-33.76	-11.78	-45.54	-13.00	-32.54	Pass
3275.15	V	-36.83	-9.21	-46.04	-13.00	-33.04	Pass
4095.89	V	-39.74	-6.79	-46.53	-13.00	-33.53	Pass
4914.55	V	-42.46	-4.16	-46.62	-13.00	-33.62	Pass
1636.65	Horizontal	-24.96	-13.86	-38.82	-13.00	-25.82	Pass
2455.60	H	-33.62	-11.76	-45.38	-13.00	-32.38	Pass
3276.59	H	-37.22	-9.19	-46.41	-13.00	-33.41	Pass
4094.37	H	-40.31	-6.77	-47.08	-13.00	-34.08	Pass
4913.43	H	-42.42	-4.14	-46.56	-13.00	-33.56	Pass
Test mode:		LTE Band 26(1.4MHz)		Test channel:		Highest	
Frequency (MHz)	Polarization	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1647.43	Vertical	-23.71	-13.83	-37.54	-13.00	-24.54	Pass
2471.76	V	-34.38	-11.74	-46.12	-13.00	-33.12	Pass
3296.50	V	-37.49	-9.17	-46.66	-13.00	-33.66	Pass
4120.91	V	-39.97	-6.75	-46.72	-13.00	-33.72	Pass
4942.88	V	-42.45	-4.12	-46.57	-13.00	-33.57	Pass
1646.53	Horizontal	-24.69	-13.82	-38.51	-13.00	-25.51	Pass
2472.41	H	-34.32	-11.72	-46.04	-13.00	-33.04	Pass
3296.19	H	-37.37	-9.15	-46.52	-13.00	-33.52	Pass
4118.09	H	-40.32	-6.73	-47.05	-13.00	-34.05	Pass
4944.36	H	-41.87	-4.10	-45.97	-13.00	-32.97	Pass

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.
3. Level (dBm)= Reading (dBm)+ Factor (dB).
Margin (dB)= Limit (dBm)-Level (dBm)
Factor(dB)= cable loss(dB)+ Preamplifier(dB)+ Antenna gain(dBi)

Measurement Data(Worst case):

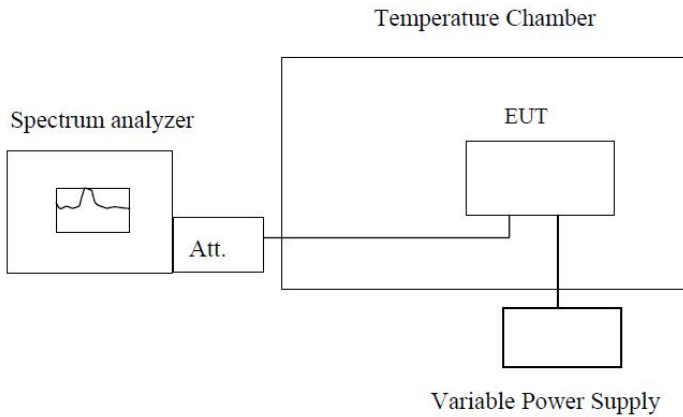
16 QAM Mode:

Test mode:		LTE Band 26(1.4MHz)		Test channel:		Lowest	
Frequency (MHz)	Polarization	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1646.80	Vertical	-23.18	-13.90	-37.08	-13.00	-24.08	Pass
2473.41	V	-34.17	-11.80	-45.97	-13.00	-32.97	Pass
3295.77	V	-36.92	-9.23	-46.15	-13.00	-33.15	Pass
4121.26	V	-39.70	-6.81	-46.51	-13.00	-33.51	Pass
4943.32	V	-41.59	-4.18	-45.77	-13.00	-32.77	Pass
1648.84	Horizontal	-24.59	-13.90	-38.49	-13.00	-25.49	Pass
2473.54	H	-33.74	-11.80	-45.54	-13.00	-32.54	Pass
3297.08	H	-36.90	-9.23	-46.13	-13.00	-33.13	Pass
4121.35	H	-40.23	-6.81	-47.04	-13.00	-34.04	Pass
4944.21	H	-41.82	-4.18	-46.00	-13.00	-33.00	Pass
Test mode:		LTE Band 26(1.4MHz)		Test channel:		Middle	
Frequency (MHz)	Polarization	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1673.89	Vertical	-23.93	-13.86	-37.79	-13.00	-24.79	Pass
2510.43	V	-34.23	-11.76	-45.99	-13.00	-32.99	Pass
3347.38	V	-36.81	-9.19	-46.00	-13.00	-33.00	Pass
4181.80	V	-40.34	-6.77	-47.11	-13.00	-34.11	Pass
5020.12	V	-41.64	-4.14	-45.78	-13.00	-32.78	Pass
1673.64	Horizontal	-24.14	-13.86	-38.00	-13.00	-25.00	Pass
2510.29	H	-33.50	-11.76	-45.26	-13.00	-32.26	Pass
3344.60	H	-37.06	-9.19	-46.25	-13.00	-33.25	Pass
4181.67	H	-40.05	-6.77	-46.82	-13.00	-33.82	Pass
5018.66	H	-42.49	-4.14	-46.63	-13.00	-33.63	Pass
Test mode:		LTE Band 26(1.4MHz)		Test channel:		Highest	
Frequency (MHz)	Polarization	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1698.30	Vertical	-23.13	-13.82	-36.95	-13.00	-23.95	Pass
2547.53	V	-33.86	-11.72	-45.58	-13.00	-32.58	Pass
3396.25	V	-37.09	-9.15	-46.24	-13.00	-33.24	Pass
4244.05	V	-40.36	-6.73	-47.09	-13.00	-34.09	Pass
5093.23	V	-41.82	-4.10	-45.92	-13.00	-32.92	Pass
1698.45	Horizontal	-24.23	-13.82	-38.05	-13.00	-25.05	Pass
2547.48	H	-34.02	-11.72	-45.74	-13.00	-32.74	Pass
3395.98	H	-36.69	-9.15	-45.84	-13.00	-32.84	Pass
4245.68	H	-40.39	-6.73	-47.12	-13.00	-34.12	Pass
5094.68	H	-41.94	-4.10	-46.04	-13.00	-33.04	Pass

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.
3. Level (dBm)= Reading (dBm)+ Factor (dB).
Margin (dB)= Limit (dBm)-Level (dBm)
Factor(dB)= cable loss(dB)+ Preamplifier(dB)+ Antenna gain(dBi)

4.9 Frequency stability

Test Requirement:	Part 2.1055(a)(1)(b), Part 2.1055(d)(1)(2), Part 90.213
Test Method:	ANSI C63.26:2015
Limit:	1.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Conducted measurement please refer to the certificate module FCC ID:2AJYU-8XS0001

5 Photos of test setup

Reference to the **psi2606098-C01-R01 appendix I Test Setup Photo** for details.

6 Photos of EUT

Reference to the **psi2606098-C01-R01 appendix II external photos** and **psi2606098-C01-R01 appendix III internal photos** for details.

----- END OF REPORT-----

