


Diagram illustrating the components included with the Claro device:

- Claro device
- Quick Guide
- Charger
- Batteries
- USB cable

-
- The diagram illustrates the components of the Klaro system. At the top is a central unit with seven numbered callouts: 1 (top left), 2 (top center), 3 (top right), 4 (bottom left), 5 (bottom center), 6 (bottom right), and 7 (bottom right, pointing to a small circular feature). Below this central unit are four side units, each with a numbered callout: 1 (top left), 2 (top center), 3 (top right), 4 (bottom left), 5 (bottom center), 6 (bottom right), and 7 (bottom right, pointing to a small circular feature). The side units are labeled 'Klaro' and 'Klaro'.

-
- The diagram illustrates the connection of a monitor to a receiver box. An HDMI cable connects the monitor's HDMI port to the receiver box's HDMI input. An optical cable connects the monitor's optical port to the receiver box's optical input. A wireless router is shown below the receiver box, with a signal line indicating a wireless connection to the receiver box's wireless input port. The receiver box also features ports for AV, USB, and SD card input.

Bring your entertainment together in one place to easily jump from live TV and on-demand to the top streaming apps, or cast your favorites from your smartphone to your TV. And do it using voice search – search for shows, control your TV, and more.

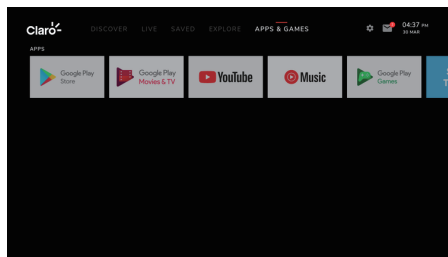

Hardware	
Chipset	Quad Core ARM A55 24,000 DMIPS
RAM	2GB
Flash	eMMC 8GB
Video	
Video Decoding	AV1 MP-10@L5.1 up to 4Kx2K@60fps VP9 Profile-2 up to 4Kx2K@60fps H.265 HEVC MP-10@L5.1 up to 4Kx2K@60fps AVS2-P2 Profile up to 4Kx2K@60fps H.264 AVC HP@L5.1 up to 4Kx2K@30fps H.264 MVC up to 1080P@60fps MPEG-4 ASP@L5 up to 1080P@60fps (ISO-14496) WMV9/VC-1 SP/IMPA/P up to 1080P@60fps AVS-P16(AVS+) /AVS-P2 Jzihun Profile up to 1080P@60fps MPEG-2 MP/HL up to 1080P@60fps (ISO-13818) MPEG-1 MP/HL up to 1080P@60fps (ISO-11172) RealVideo 8/9/10 up to 1080P@60fps
Video File Format	Support *.mkv, *.wmv, *.mpg, *.mpeg, *.dat, *.avi, *.mov, *.iso, *.mp4, *.rm, *.jpg, *.bmp, *.gif etc...
Video Output	HDMI 2.1 , HDCP2.2
Aspect Ratio	Auto, Full screen
Video Resolution	480i/p, 576i/p, 720p, 1080i/p and 4Kx2K
Power	
DC Input Range	12V 1A
Power Consumption	Maximum 12 W

 NOTICE: To prevent fire and electric shock, do not expose this device to rain or moisture. In order to avoid any possible risk of electric shock, never attempt to open the unit. In case of the unit breaking down, repair of the unit should be carried out by qualified technicians. No part of this unit should be repaired by users.

CAUTION!

- Protect the device from high temperatures, humidity, water and dust.
- Do not place any objects that might damage your unit near it (e.g. liquid filled objects or candles).

Third party applications may require monthly subscription.

Radiation Exposure Statement
To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm from your body.