


TR3932-BTC-Infineon

Equipment Under Test:	Indian Ride Command
Requirement(s):	eCFR 47 Part 15.247 RSS-247
Test Date(s):	03/30/2026 - 04/09/2026
Prepared for:	Polaris Industries Inc. Attn: Laura Zehnder 2100 Highway 55 Medina, MN 55340

Report Issued by: Dylan Rosenfeldt, EMC Engineer	
Signature: 	Date: 06/05/2026
Report Reviewed by: Adam Alger, Sr. Manager EMC Laboratory	
Signature: 	Date: 06/03/2026
Report Constructed by: Dylan Rosenfeldt, EMC Engineer	
Signature: 	Date: 05/06/2026

This test report may not be reproduced, except in full, without approval of Ezurio

Company: Polaris Industries Inc.	Page 1 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infineon		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

CONTENTS

Contents.....	2
Ezurio Test Services in Review	3
1 Test Report Summary	4
2 Client Information.....	5
2.1 Equipment Under Test (EUT) Information.....	5
2.2 Product Description.....	5
2.3 Modifications Incorporated for Compliance	5
2.4 Deviations and Exclusions from Test Specifications.....	5
2.5 EUT Information	6
2.6 Antenna Information	6
2.7 Test Channels.....	6
2.8 Power Table and Reduced Video Bandwidth for Average Measurements	6
3 References	7
4 Uncertainty Summary	8
5 Test Data	9
5.1 Antenna Port Conducted Emissions	9
5.2 Radiated Emissions	27
6 Revision History	36

Ezurio Test Services in Review

The Ezurio laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01


Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Polaris Industries Inc.	Page 3 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infineon		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

1 TEST REPORT SUMMARY

During **03/30/2026 - 04/09/2026** the Equipment Under Test (EUT), **Indian Ride Command**, as provided by **Polaris Industries Inc.** was tested to the following requirements:

FCC 15.247 | RSS-247 – FHSS Bluetooth Classic

Requirements	Description	Method	Compliant
15.247(d) 15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.10	Spurious Radiated Emissions in Restricted Bands 30-25000 MHz	ANSI C63.10	Yes
15.247(a)(1)(i) RSS-247 6.2.1	20dB and 99% Occupied Bandwidth	ANSI C63.10	Yes
15.247(b)(1) RSS-247 6.2.3.2	RF Output Power	ANSI C63.10	Yes
15.247 (a)(1)(i) RSS-247 6.2.3.1	Frequency Hopping Systems	ANSI C63.10	Yes
15.247(d) RSS-247 6.6 RSS-GEN Clause 8.9	Out-of-band Emissions	ANSI C63.10	Yes
2.1055(d) RSS-GEN 6.11	Frequency Stability	ANSI C63.10	Reported

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	4.7 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

Company: Polaris Industries Inc.	Page 4 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

2 CLIENT INFORMATION

Company Name	Polaris Industries Inc.
Contact Person	Laura Zehnder
Address	2100 Highway 55 Medina, MN 55340

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	Indian Ride Command
Model Number	RCIP-1230
Serial Number	Conducted Sample 1, Radiated Sample 1
Date of Receipt	03/30/2026
Condition	Good
FCC ID	2AOW7-RCIP-1230V1
IC ID	5966A-RCIP1230V1

2.2 Product Description

The Indian Ride Command RCIP-1230 is an infotainment display. The display supports AM/FM/WB radio, Bluetooth connectivity, Wi-Fi connectivity, vehicle health/performance information, GPS, and maps.

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

Company: Polaris Industries Inc.	Page 5 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infineon		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

2.5 EUT Information

Power Supply - 12V via Automotive Battery or DC Bench Supply

Firmware Version - RCS2.2.0.D6.2603181108patr

Test Software - Compliance HMI v3.0.0

Ancillary Equipment - HP Elitebook 840G1

2.6 Antenna Information

Manufacturer	Radio	Model / Part Number	Type	Peak Gain (dBi)
				2400 - 2500 MHz
F3 Wireless	Infineon BT	-	Trace	6.3
F3 Wireless	Murata WLAN	-	Trace	2.6
F3 Wireless	Murata BT	-	Trace	7.0

2.7 Test Channels

Channel	Frequency (MHz)	Data Rates
0	2402	1Mbps, 2Mbps, 3Mbps
39	2441	
78	2480	

2.8 Power Table and Reduced Video Bandwidth for Average Measurements

Mode	Data Rate	Power Setting	Minimum Average VBW (Hz)
BR	1Mbps	2	10
EDR2	2Mbps	6	10
EDR3	3Mbps	6	10

3 REFERENCES

Publication	Edition	Date	AMD 1	AMD 2
FCC eCFR 47 Part 15	-	2026	-	-
ANSI C63.10	-	2020	2024	-
RSS-247	4	2025	-	-
RSS-GEN	5	2018	2019	2021

References not on Scope of Accreditation

Publication	Edition	Date	AMD 1	AMD 2
KDB 558074 D01	-	2019	-	-

4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References

CISPR 16-4-1

CISPR 16-4-2

CISPR 32

ANSI C63.23

A2LA P103

A2LA P103c

ETSI TR 100-028

Measurement Type	Configuration	Uncertainty $\pm$
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts

Parameter	ETSI U.C. $\pm$	U.C. $\pm$
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %


Company: Polaris Industries Inc.	Page 8 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

5 TEST DATA

5.1 Antenna Port Conducted Emissions

Description of Measurement	The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter. The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.
Example Calculations	Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm) Margin (dB) = Limit (dBm) – Corrected Reading (dBm)

Block Diagram

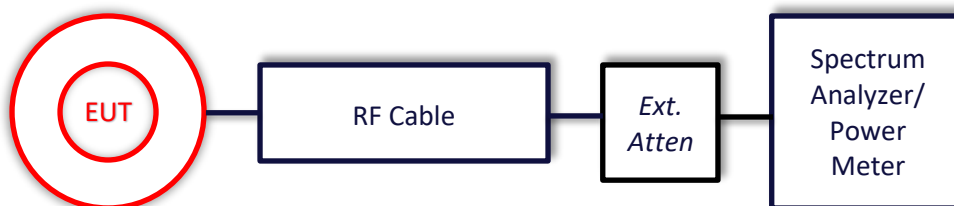

5.1.1 Duty Cycle

Operator	Dylan Rosenfeldt	QA	Adam Alger
Temperature	21.4°C	R.H. %	35.10%
Test Date	3/30/2026	Location	RF Bench
Requirement	ANSI C63.10	Method	ANSI C63.10 11.6

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	8 MHz	VBW	50 MHz
Detector(s)	Peak	Span	0 Hz

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	2/12/2026	2/12/2027	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/2/2026	4/2/2027	Active Calibration

EUT Parameters

Input Power	12V via DC Bench Supply	Mode	BTC Tx
Frequency	2400-2483.5 MHz	Channel	See 2.7

Table

Mode	On-Time (us)	Period (us)	Duty Cycle	Avg VBW (Hz)	DC correction
BTC BR	5000000	5000000	100.0%	0.2	0.0
BTC EDR2	5000000	5000000	100.0%	0.2	0.0
BTC EDR3	5000000	5000000	100.0%	0.2	0.0

Plots



Company: Polaris Industries Inc.	Page 12 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

5.1.2 20dB and 99% Occupied Bandwidth

Operator	Dylan Rosenfeldt	QA	Mitchell Freund
Temperature	21.2°C	R.H. %	36.4%
Test Date	3/31/2026	Location	RF Bench
Requirement	15.247a(2) RSS-247 6.2.1	Method	6.9.2, 6.9.3

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	27kHz	VBW	270kHz
Detector(s)	Peak	Settings	Max Hold

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	2/12/2026	2/12/2027	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/2/2026	4/2/2027	Active Calibration

EUT Parameters

Input Power	12V via DC Bench Supply	Mode	BTC Tx
Frequency	2400-2483.5 MHz	Channel	See 2.7


Table

Mode	Rate	Channel	99% BW (kHz)	20dB BW (kHz)
BR	1Mbps	0	901	963
BR	1Mbps	39	906	961
BR	1Mbps	78	906	962
EDR2	2Mbps	0	1235	1394
EDR2	2Mbps	39	1234	1394
EDR2	2Mbps	78	1235	1394
EDR3	3Mbps	0	1235	1381
EDR3	3Mbps	39	1234	1382
EDR3	3Mbps	78	1235	1383


Plots




Company: Polaris Industries Inc.		Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

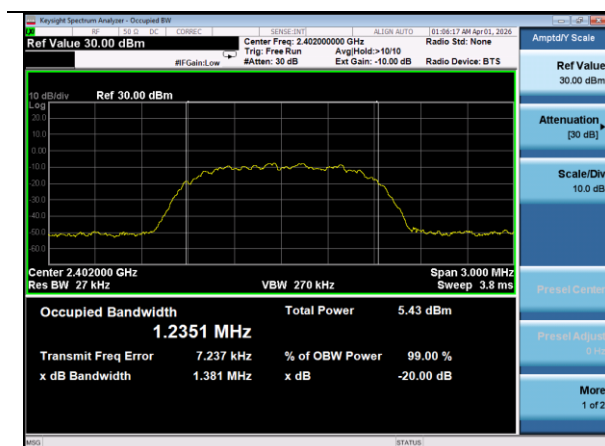

EDR3 | Ch 0

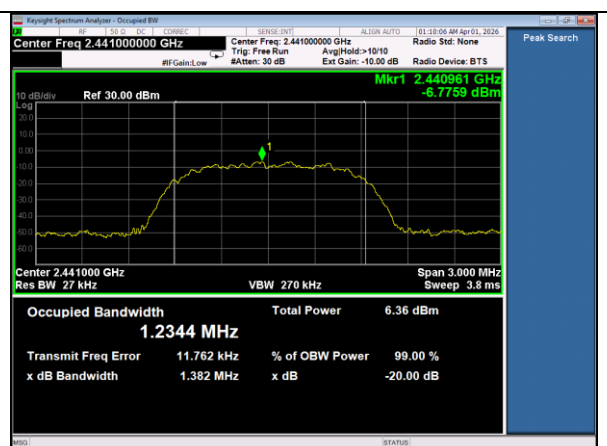

EDR3 | Ch 39

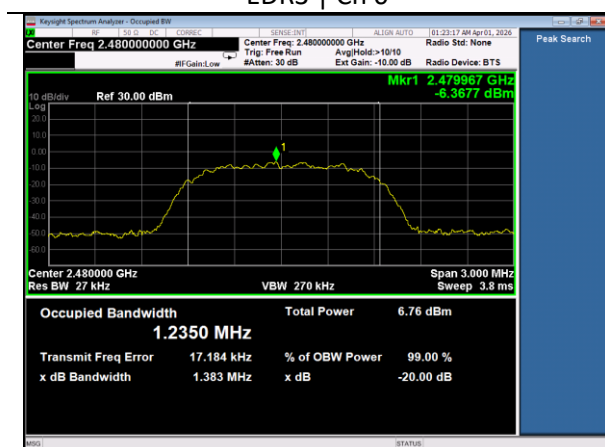

EDR3 | Ch 78

Company: Polaris Industries Inc.	Page 16 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infineon		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

5.1.3 RF Output Power

Operator	Dylan Rosenfeldt	QA	Mitchell Freund
Temperature	21.2°C	R.H. %	36.4%
Test Date	3/31/2026	Location	RF Bench
Requirement	15.247 (b)(2) RSS-247 6.2.2.2	Method	ANSI C63.10 7.8.5

Limit: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	3MHz	VBW	3MHz
Detector(s)	Peak	Settings	Max Hold

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	2/12/2026	2/12/2027	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/2/2026	4/2/2027	Active Calibration


EUT Parameters


Input Power	12V via DC Bench Supply	Mode	BTC Tx
Frequency	2400-2483.5 MHz	Channel	See 2.7

Tables

Channel	Mode	Pk Output Power (dBm)	Limit (dBm)	Margin (dB)	Power Setting
0	BR	-1.6	30	31.6	2
0	EDR2	0.6	30	29.4	6
0	EDR3	1.1	30	28.9	6
39	BR	-0.6	30	30.6	2
39	EDR2	1.5	30	28.5	6
39	EDR3	2.0	30	28.0	6
78	BR	-0.1	30	30.1	2
78	EDR2	1.9	30	28.1	6
78	EDR3	2.3	30	27.7	6


Plots

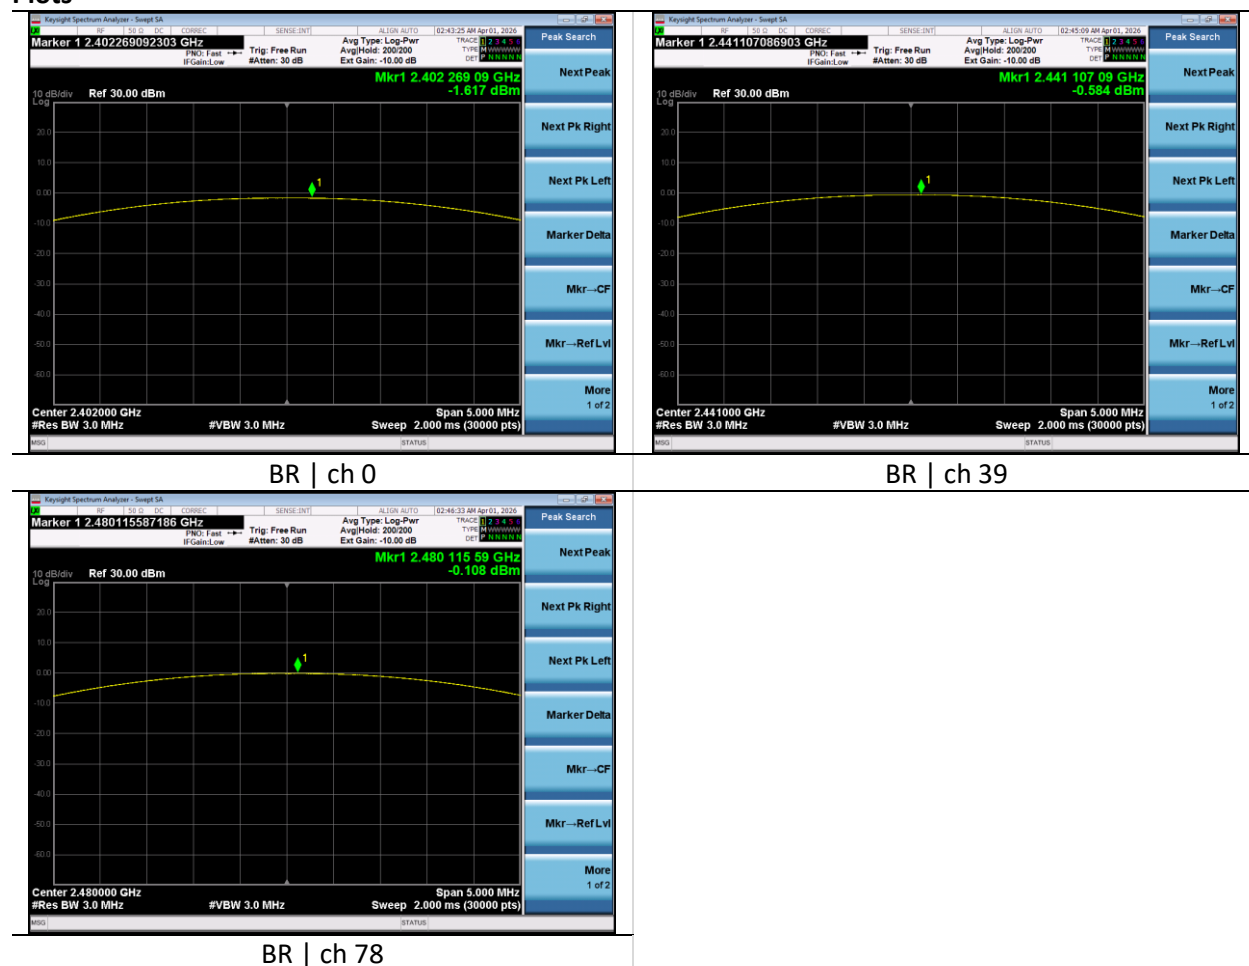

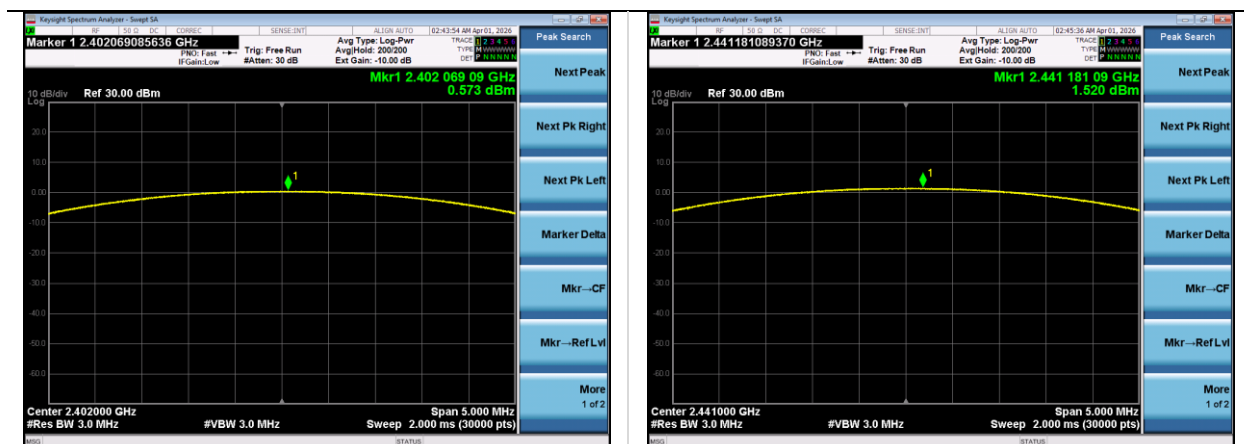


EDR2 | ch 0

EDR2 | ch 39

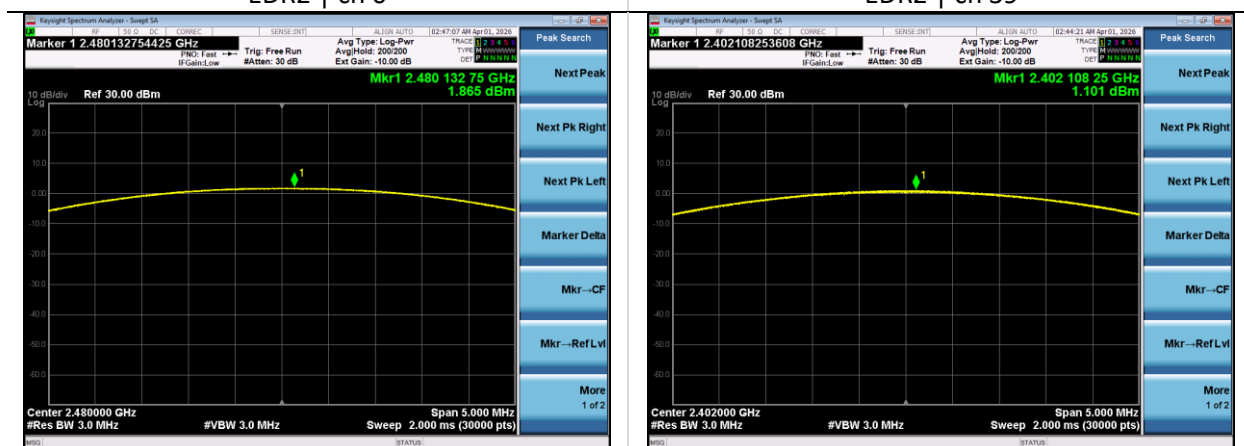

EDR2 | ch 78

EDR3 | ch 0

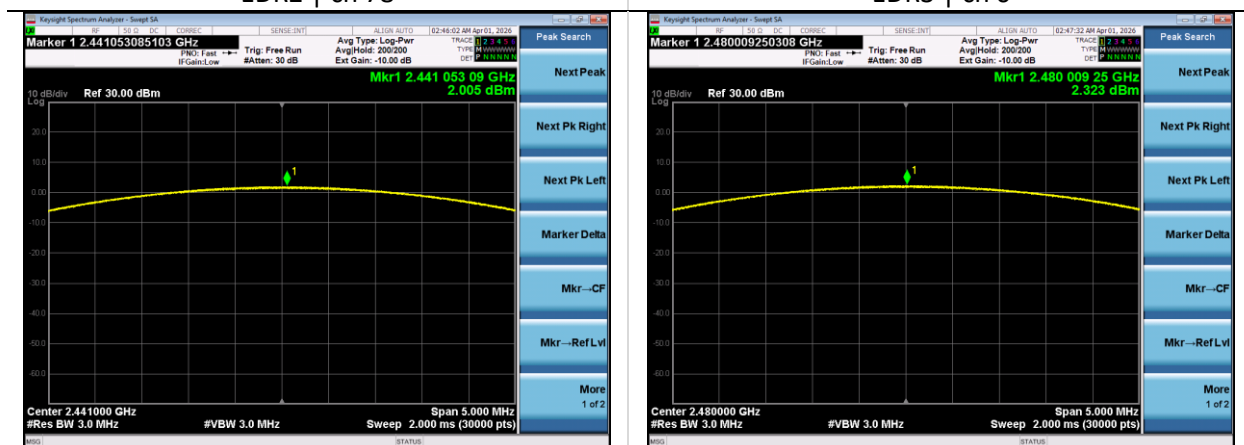

EDR3 | ch 39

EDR3 | ch 78

Company: Polaris Industries Inc.	Page 19 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

5.1.4 Frequency Hopping Systems

Operator	Dylan Rosenfeldt	QA	Mitchell Freund
Temperature	21.4°C, 21.1°C	R.H. %	37.9%, 32.6%
Test Date	3/31/2026, 4/1/2026	Location	RF Bench
Requirement	15.247a(1),(3) RSS-247 6.2.2.1, 6.2.3.1	Method	ANSI C63.10 7.8.2 - 7.8.4

Limits:

Carrier separation: At least 2/3 of 20dB BW

Number of Channels: At Least 15 channels

Time of Occupancy: no greater than 0.4s in a period of 0.4s multiplied by the number of channels

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	200kHz, 300kHz	VBW	200kHz, 300kHz
Detector(s)	Peak	Settings	Max Hold


Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	2/12/2026	2/12/2027	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/2/2026	4/2/2027	Active Calibration


EUT Parameters

Input Power	12V via DC Bench Supply	Mode	BTC BR Hopping TX
Frequency	2400-2483.5 MHz	Channels	0-78

Number of Hopping Channels

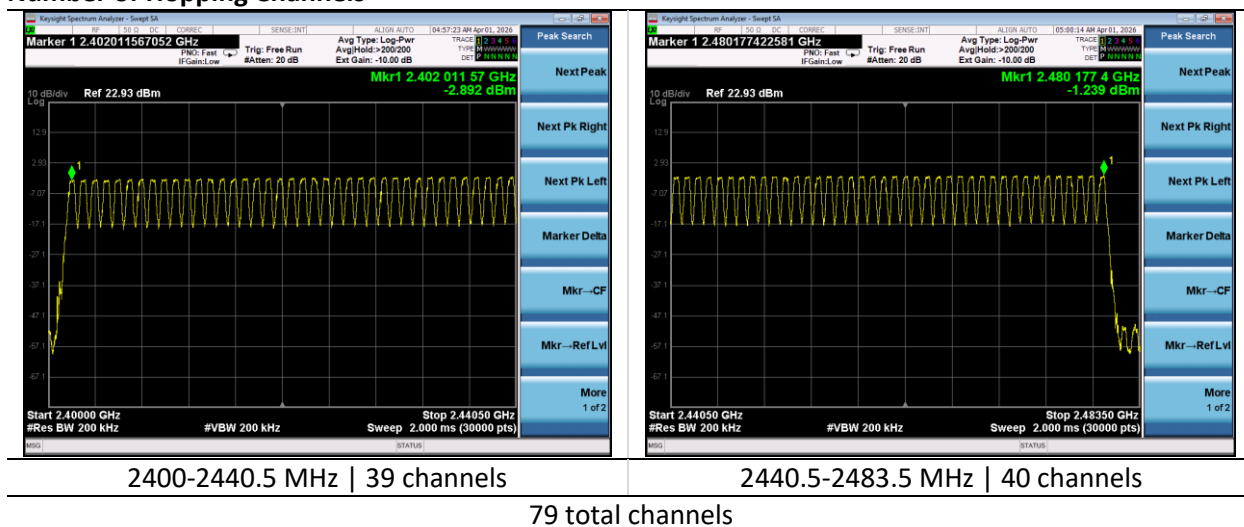


Channel Frequency Separation

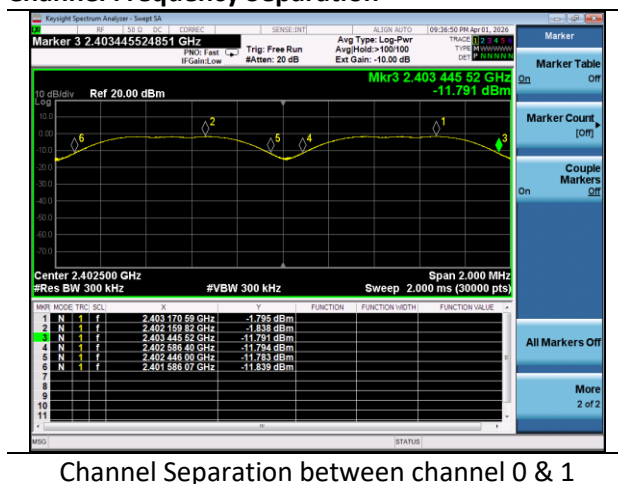

Channel	Mode	Frequency (MHz)	Frequency separation (kHz)	Limit (2/3 20dB BW) (kHz)	Margin (kHz)
0 & 1	BR Hopping	2402.5	999.9	929.3	70.6

Dwell Time

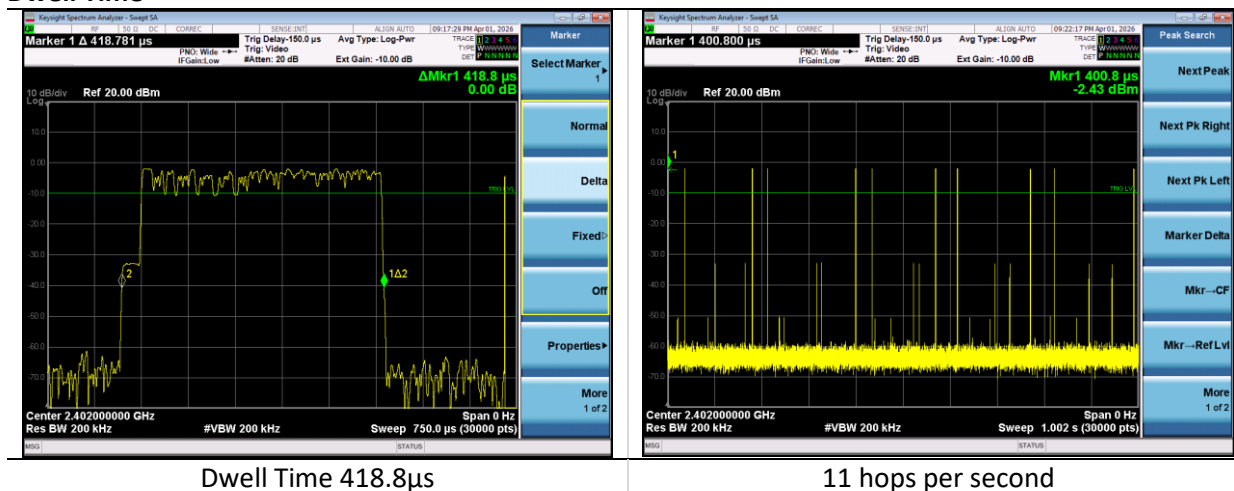

Channel	Mode	Frequency (MHz)	Dwell Time (us)	Average Hops / 1s	Average Occupancy Time per 31.6s (ms)	Limit (ms)	Margin (ms)
0	BR Hopping	2402.0	418.8	11.0	145.6	400.0	254.4

5.1.5 Emissions in Non-Restricted Frequency Bands

Operator	Dylan Rosenfeldt	QA	Mitchell Freund
Temperature	21.4°C	R.H. %	37.9%
Test Date	3/31/2026	Location	RF Bench
Requirement	15.247(d) RSS-247 6.6	Method	7.8.7

Limits: -20dBc

Reference Level (Worst Case PSD)

Channel 78 – BR (-0.8 dBm/100 kHz)

-0.8 dBm-20 dB = -20.8 dBm Limit

Test Parameters

Frequency	30-25000 MHz	Setup	Antenna Port
RBW	100 kHz	VBW	300 kHz
Detector(s)	Peak		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	2/12/2026	2/12/2027	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/2/2026	4/2/2027	Active Calibration

EUT Parameters


Input Power	12V via DC Bench Supply	Mode	BTC Tx
Frequency	2400-2483.5 MHz	Channel	See 2.7

Company: Polaris Industries Inc.	Page 23 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

Measurements


Channel	Mode	Frequency (MHz)	Peak Measurement (dBm)	Limit (dBm)	Margin (dB)	pwr setting
0	BR	1441.2	-49.1	-20.8	28.3	2
0	EDR2	1441.2	-49.2	-20.8	28.4	6
0	EDR2	2399.5	-56.0	-20.8	35.2	6
0	EDR3	1441.3	-48.9	-20.8	28.1	6
0	EDR3	2400.0	-52.1	-20.8	31.3	6
39	BR	1464.6	-47.6	-20.8	26.8	2
39	EDR2	1464.6	-47.6	-20.8	26.8	6
39	EDR3	1464.5	-47.6	-20.8	26.8	6
78	BR	1488.0	-47.4	-20.8	26.6	2
78	EDR2	1488.0	-47.0	-20.8	26.2	6
78	EDR3	1487.9	-47.0	-20.8	26.2	6
FH	BR	2393.1	-52.2	-20.8	31.4	2
FH	BR	2493	-50.3	-20.8	29.5	2
FH	BR	2397	-48.0	-20.8	27.2	6
FH	BR	2493	-45.9	-20.8	25.1	6

Worst Case Plots

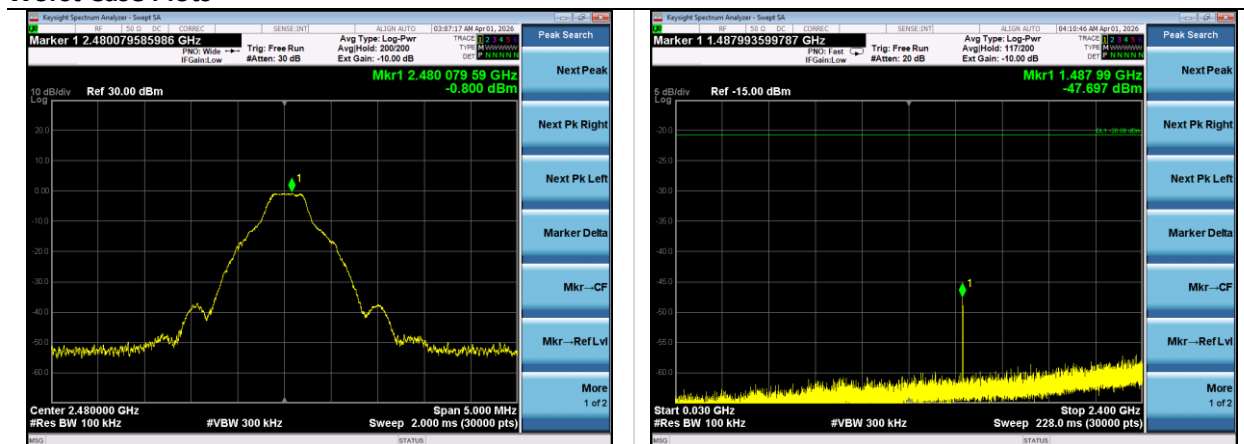


Channel 39 | EDR3 | Reference

Channel 78 | EDR2 | 30-2400 MHz

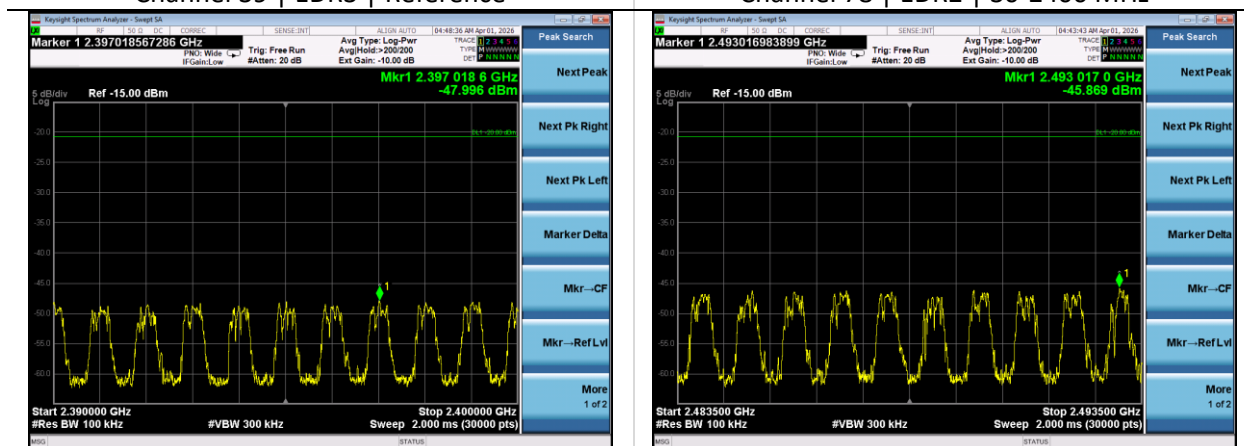

Hopping | BR | 2390-2400 MHz

Hopping | BR | 2483.5-2493.5 MHz

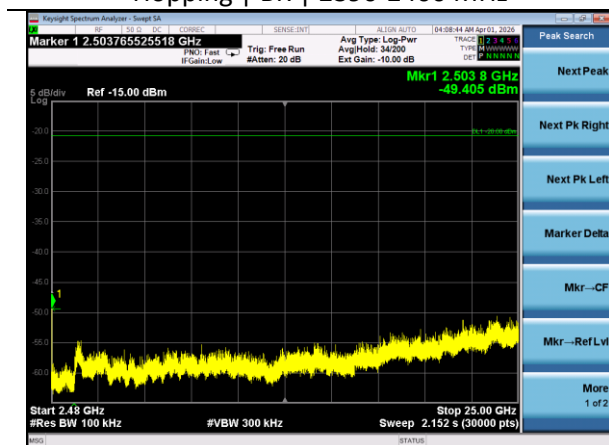

Channel 78 | BR | 2483.5-25000 MHz

Company: Polaris Industries Inc.	Page 25 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

5.1.6 Frequency Stability

Operator	Dylan Rosenfeldt	QA	Adam Alger
Temperature	21.4°C	R.H. %	33.2%
Test Date	4/2/2026	Location	RF Bench
Requirement	2.1055(d) RSS-GEN Clause 6.11	Method	ANSI C63.10 6.8.2

Test Parameters

Frequency	2400-2483.5 MHz	Voltage	12.0, 10.2, 13.8 VDC
Detector(s)	Peak	Settings	Max Hold
Notes	DC power supply used for voltage variation.		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	2/12/2026	2/12/2027	Active Verification
EE 960203	Analyzer - EMI Receiver	Keysight	N9038A	MY56400072	4/1/2026	4/1/2027	Active Calibration

EUT Parameters

Input Power	12V via DC Bench Supply	Mode	CW Tx
Frequency	2400-2483.5 MHz	Channel	See 2.7

Table

Channel	Voltage (VDC)	Center Frequency (Hz)
0	12.0	2402011915
	10.2	2402011731
	13.8	2402011633
39	12.0	2441016637
	10.2	2441016620
	13.8	2441016687
78	12.0	2480021601
	10.2	2480021681
	13.8	2480021523

Company: Polaris Industries Inc.	Page 26 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infineon		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

5.2 Radiated Emissions

Description of Measurement	The frequency spectrum is investigated for intentional and / or unintentional signals emanating from the EUT by use of a standardized test site and measurement antenna. The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed allowing the data to be gathered and reported as corrected values. The maximum emissions from the EUT are determined by turn-table azimuth rotation (360°) and scanning of the measurement antenna. Maximized levels are noted at degree values of azimuth, measurement antenna height, and measurement antenna polarity.
Example Calculations	Measurement (dBμV) + Cable factor (dB) + Other (dB) + Antenna Factor (dB/m) = Corrected Reading (dBμV/m) Margin (dB) = Limit (dBμV/m) - Corrected Reading (dBμV/m) Example at 4000 MHz: Reading = 40 dBμV + 3.4 dB + 0.9 dB + 6.5 dB/m = 50.8 dBμV/m Average Limit = 20 log (500) = 54 dBμV/m Margin = 54 dBμV/m - 50.8 dBμV/m = 3.2 dB

Block Diagram



5.2.1 Spurious Radiated Emissions in the Restricted Bands

Operator	Marcos Pineda, Mitchell Freund	QA	Dylan Rosenfeldt
Temperature	20-25°C	R.H. %	20-50%
Test Date	3/31/2026 - 4/9/2026	Location	Chamber 3
Requirement	15.247(d) RSS-247 Clause 5.5 RSS-GEN Clause 8.10	Method	ANSI C63.10 7.8.8

15.209 Limits:

Frequency (MHz)	Quasi-Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)
30-88	40.0	-	-
88-216	43.5	-	-
216-960	46.0	-	-
960-1000	54.0	-	-
1000-40000	-	54.0	74.0

Test Parameters

Frequency	30-25000 MHz	Distance	3 m
Detector(s)	Peak Trace Peak and Average Final	Table height	<1000 MHz – 80cm >1000 MHz – 150 cm
RBW	<1000 MHz – 120 kHz >1000 MHz – 1 MHz	VBW	<1000 – 1.2 MHz >1000 MHz – 3MHz See 2.8

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
EE 960085	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/1/2026	4/1/2027	Active Calibration
AA 960081	Antenna - Double Ridge Horn	EMCO	3115	6907	10/8/2025	10/8/2026	Active Calibration
LSC-300	Cable	Chamber 3 Emissions	-	-	2/18/2026	2/18/2027	Active Verification
AA 960174	Antenna - Small Horn	ETS Lindgren	3116C-PA	00206880	10/7/2025	10/7/2026	Active Calibration
LSC-546	Cable	A.H. Systems, Inc.	SAC-26G-6	546	2/12/2026	2/12/2027	Active Verification
AA 960210	Antenna - Low Noise Amplifier	Mini-Circuits	ZVA-213X-S+	037101808	10/8/2025	10/8/2026	Active Calibration
AA 960150	Antenna - Biconical	ETS Lindgren	3110B	0003-3346	9/18/2025	9/18/2026	Active Calibration
AA 960195	Antenna - Log Periodic	A.H. Systems, Inc.	SAS-512-2	557	9/18/2025	9/18/2026	Active Calibration
AA 960153	Filter - High Pass 2.4 GHz	KWM	HPF-L-14186	7272-04	3/31/2026	3/31/2027	Active Calibration
EE 960203	Analyzer - EMI Receiver	Keysight	N9038A	MY56400072	4/1/2026	4/1/2027	Active Calibration


EUT Parameters

Input Power	12V Battery	Mode	BTC Tx
AE	AM/FM Antenna, GPS Antenna, USB cable, Audio Amplifier	Channels	See 2.7

Band Edge Radiated Emissions


Frequency (MHz)	Polarity	Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement	Data Rate	Power Setting	Channel
2377.7	H	51.9	74.0	22.1	Pk	BR	2	0
2378.0	H	44.8	54.0	9.2	Avg	BR	2	0
2378.1	H	51.7	74.0	22.3	Pk	EDR2	6	0
2378.0	H	44.6	54.0	9.5	Avg	EDR2	6	0
2378.4	H	53.4	74.0	20.6	Pk	EDR3	6	0
2378.0	H	44.5	54.0	9.6	Avg	EDR3	6	0
2487.4	H	49.4	74.0	24.6	Pk	BR	2	78
2483.5	H	36.9	54.0	17.1	Avg	BR	2	78
2483.5	H	50.8	74.0	23.2	Pk	EDR2	6	78
2483.5	H	37.0	54.0	17.0	Avg	EDR2	6	78
2483.5	H	50.3	74.0	23.7	Pk	EDR3	6	78
2483.5	H	37.0	54.0	17.0	Avg	EDR3	6	78

Band Edge Plots

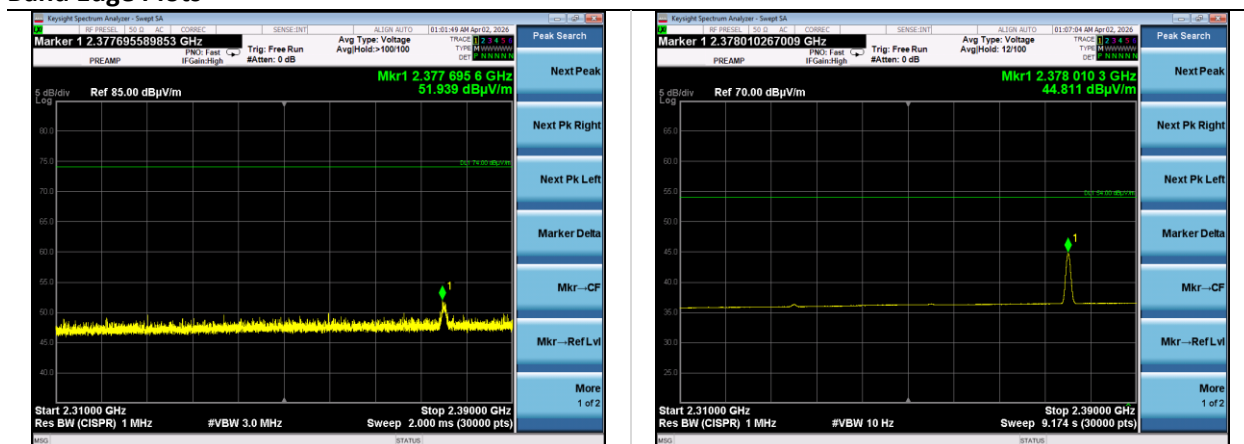


Channel 0 | BR | 2310-2390 MHz | Peak

Channel 0 | BR | 2310-2390 MHz | Average

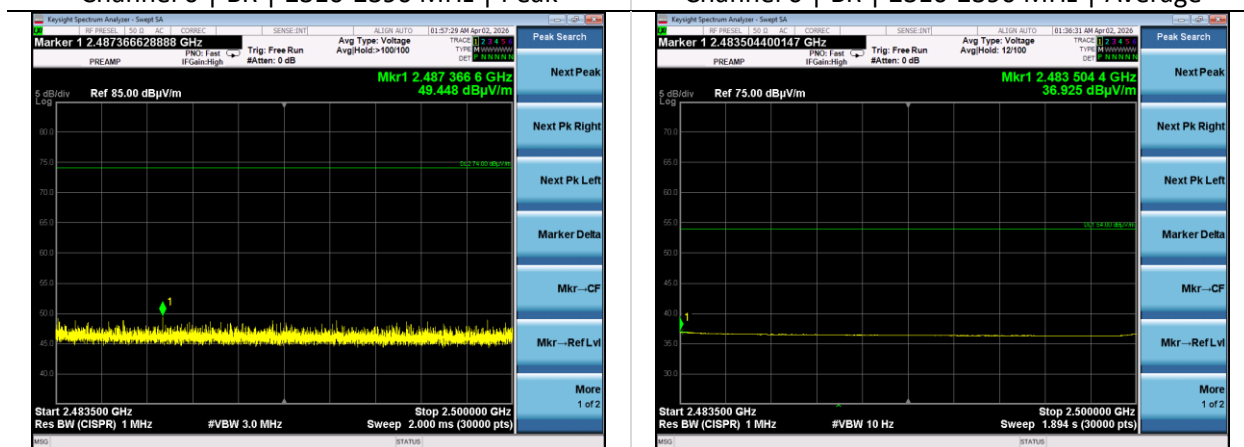

Channel 78 | BR | 2483.5-2500 MHz | Peak


Channel 78 | BR | 2483.5-2500 MHz | Average

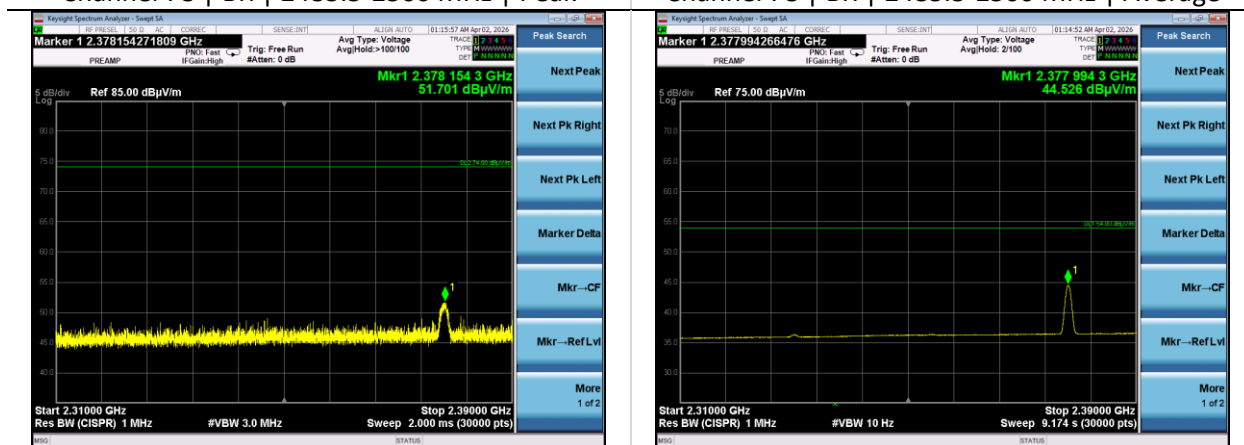


Channel 0 | EDR2 | 2310-2390 MHz | Peak

Channel 0 | EDR2 | 2310-2390 MHz | Average


Company: Polaris Industries Inc.	Page 31 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

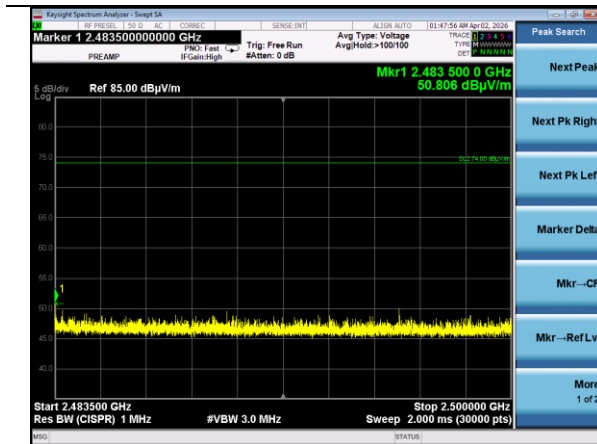


Channel 78 | EDR2 | 2483.5-2500 MHz | Peak

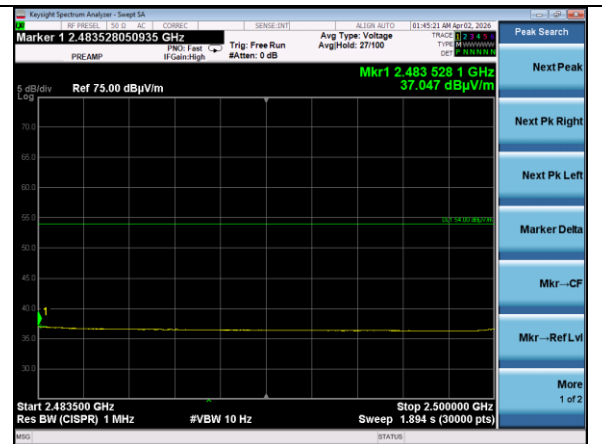


Channel 78 | EDR2 | 2483.5-2500 MHz | Average

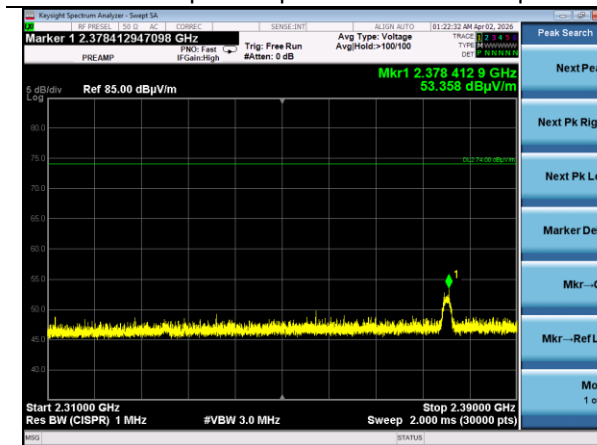


Channel 0 | EDR3 | 2310-2390 MHz | Peak

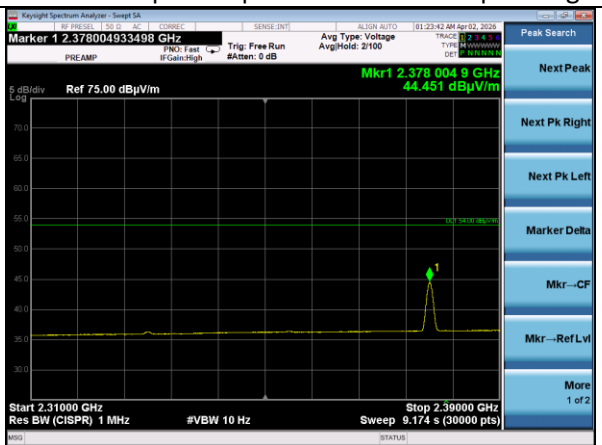

Channel 0 | EDR3 | 2310-2390 MHz | Average

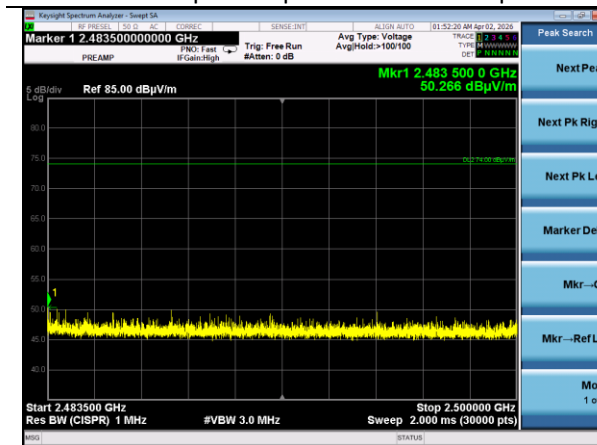

Channel 78 | EDR3 | 2483.5-2500 MHz | Peak

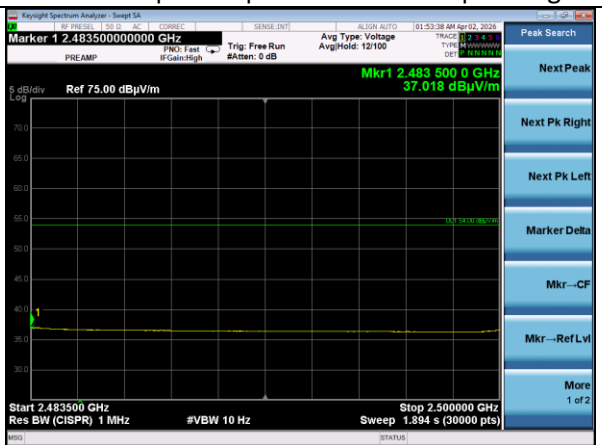


Channel 78 | EDR3 | 2483.5-2500 MHz | Average

Company: Polaris Industries Inc.	Page 32 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1


Spurious Measurements

Mode	Frequency (MHz)	Polarity	Reading (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement	Power Setting
BTC BR	3885.9	H	54.4	74.0	19.6	Peak	2
	3888.0	H	40.4	54.0	13.6	Average	2
	4264.1	V	54.4	74.0	19.6	Peak	2
	4264.0	V	40.4	54.0	13.6	Average	2
	4263.9	H	51.3	74.0	22.7	Peak	2
	4264.1	H	41.0	54.0	13.0	Average	2

Baseline Plots

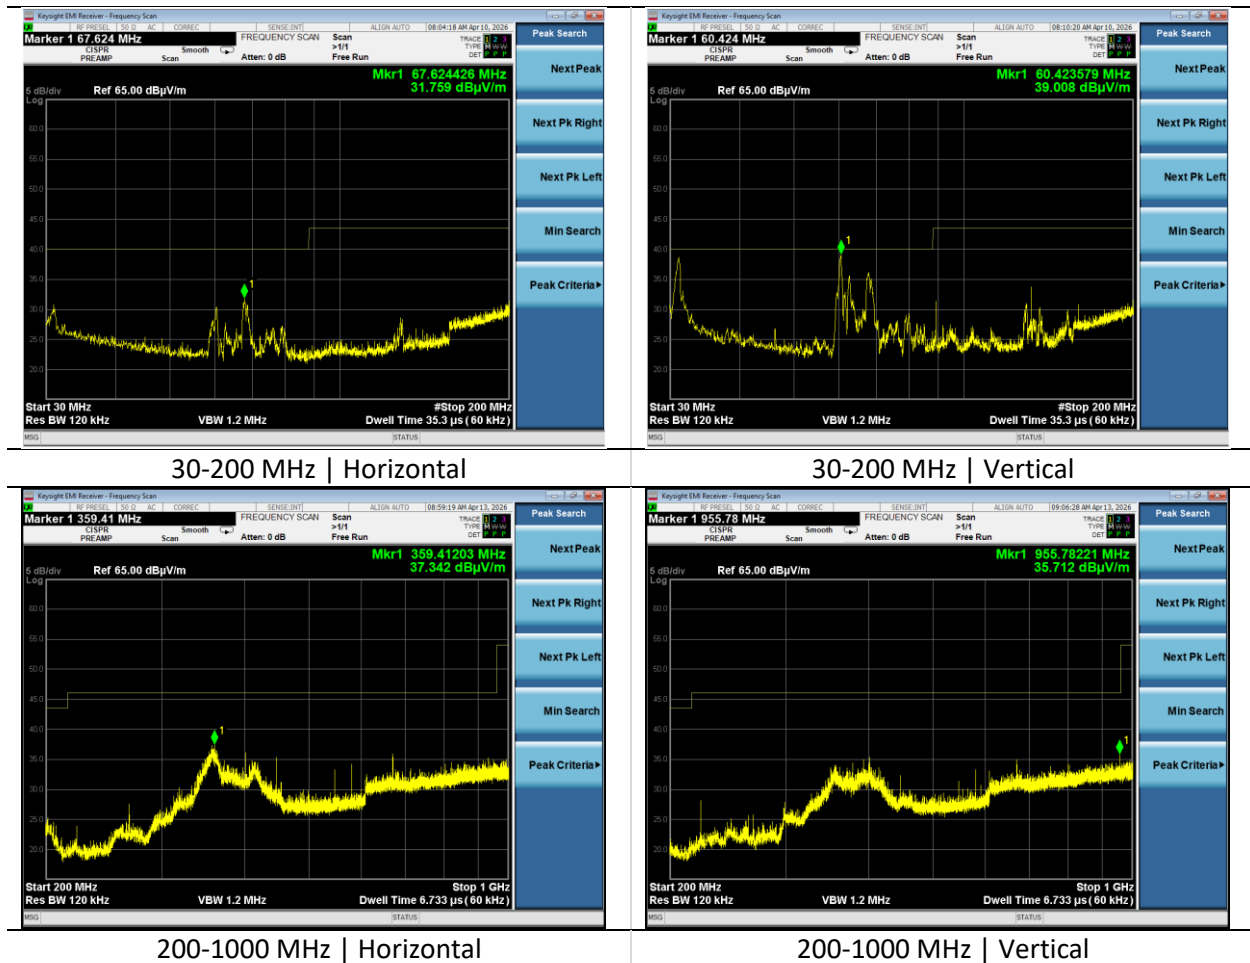


Spurious Emissions Plots

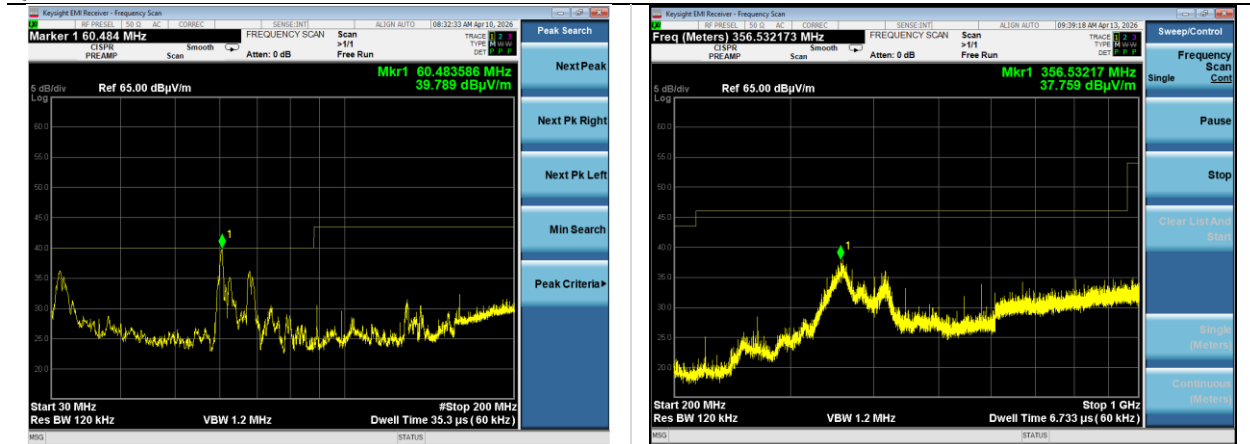


Channel 39 | BR | 30-200 MHz | Vertical

Channel 39 | BR | 200-1000 MHz | Horizontal

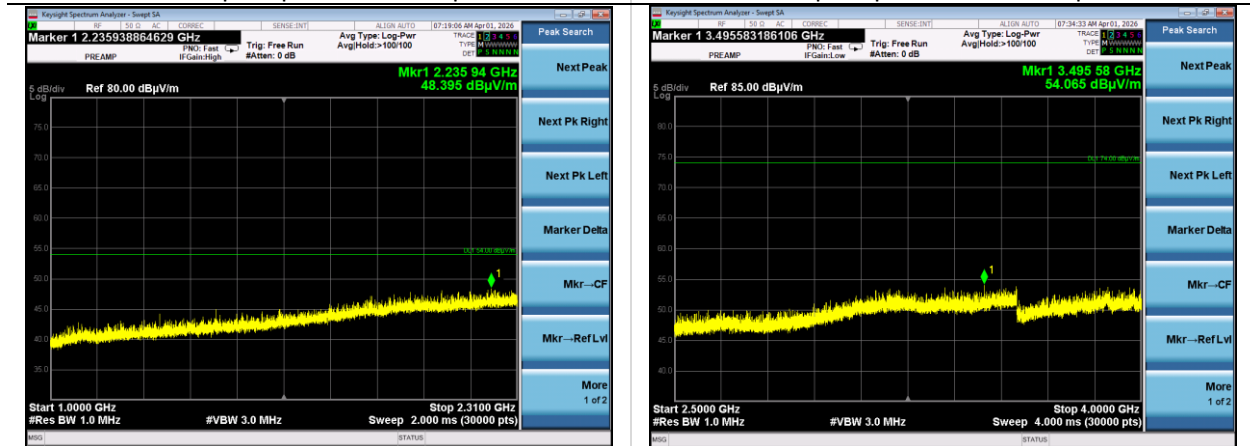

Channel 39 | BR | 1000-2310 MHz | Horizontal

Channel 39 | BR | 2500-4000 MHz | Vertical

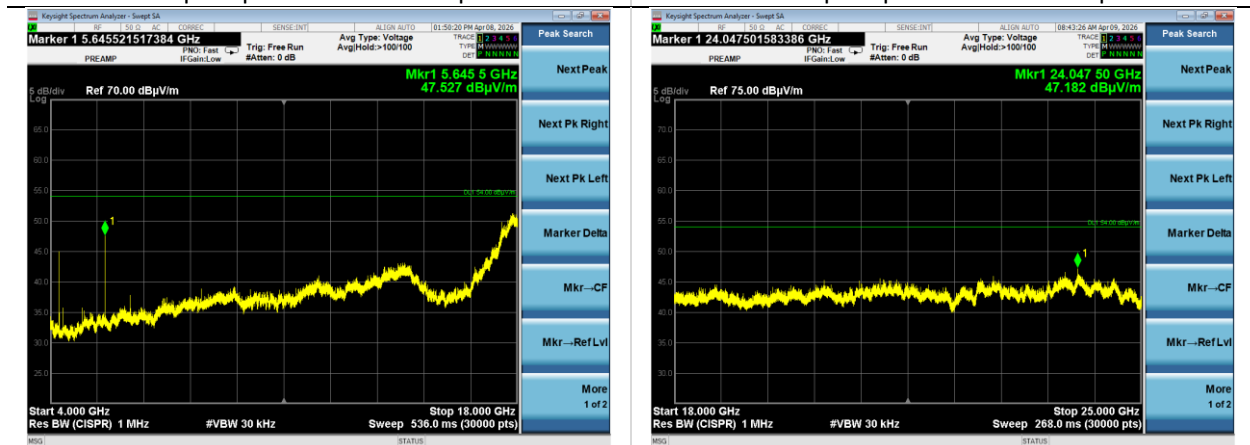

Channel 78 | BR | 4-18 GHz | Horizontal

Channel 39 | BR | 18-25 GHz | Vertical

Company: Polaris Industries Inc.	Page 35 of 36	Name: Indian Ride Command
Report: TR3932-BTC-Infinion		Model: RCIP-1230
Quote: NBO-06-2025-008193		Serial: Conducted Sample 1, Radiated Sample 1

6 REVISION HISTORY

Version	Date	Notes	Person
0	05/06/2026	Initial Draft	Dylan Rosenfeldt
1	05/11/2026	Updated Draft	Dylan Rosenfeldt
2	05/13/2026	Updated Section 2	Dylan Rosenfeldt
3	06/05/2026	Updated company name and address	Dylan Rosenfeldt

END OF REPORT