



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.447	0.357	0.277	0.216	0.168	0.124	0.094

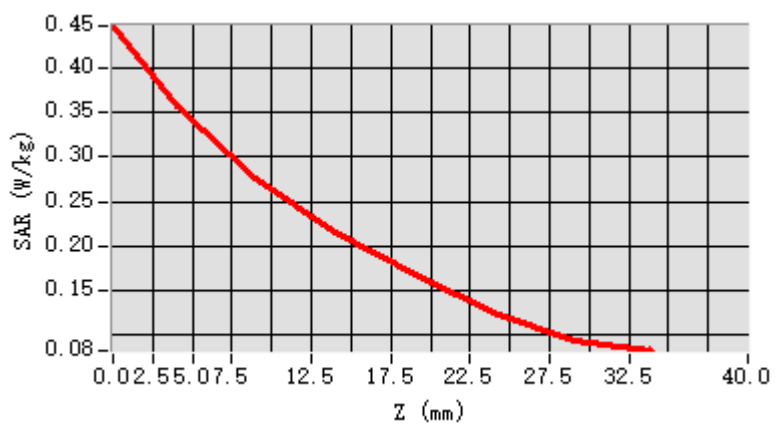


F. 3D Image

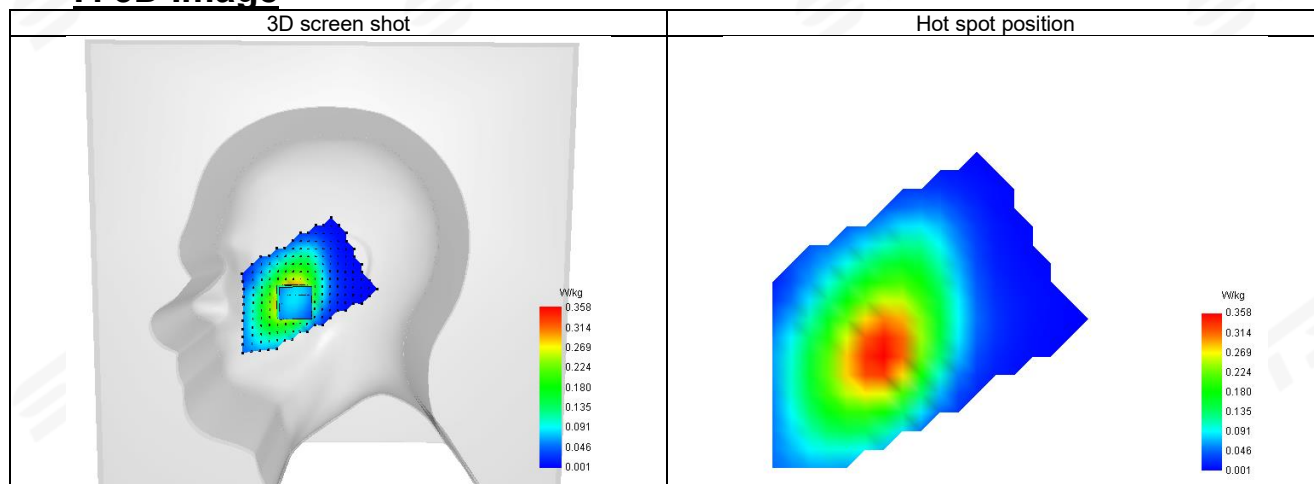

**Plot 16: DUT: Smart Phone; EUT Model: RugKing 2 Pro**

Test Date	2025-09-02
ConvF	1.44
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	41.77
Conductivity (S/m)	0.89

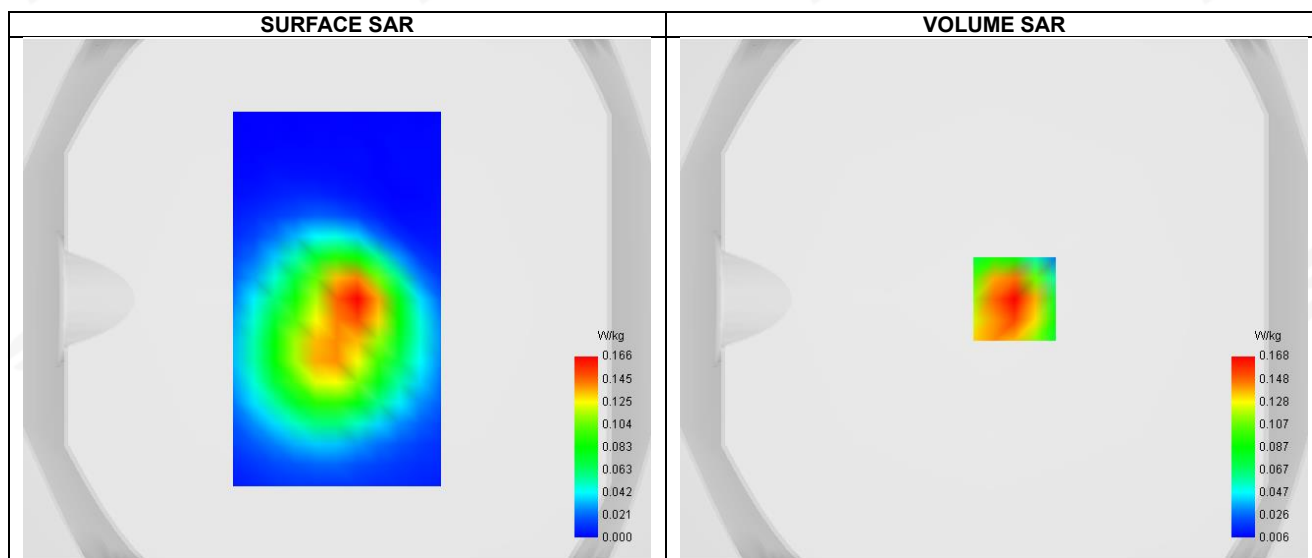



Maximum location: X=8.00, Y=0.00 ; SAR Peak: 0.23 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.157
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	67.455659


**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.228	0.168	0.113	0.076	0.051	0.034	0.023

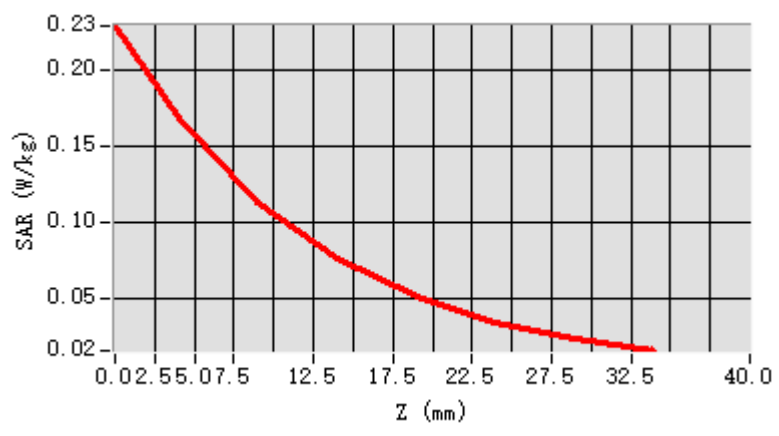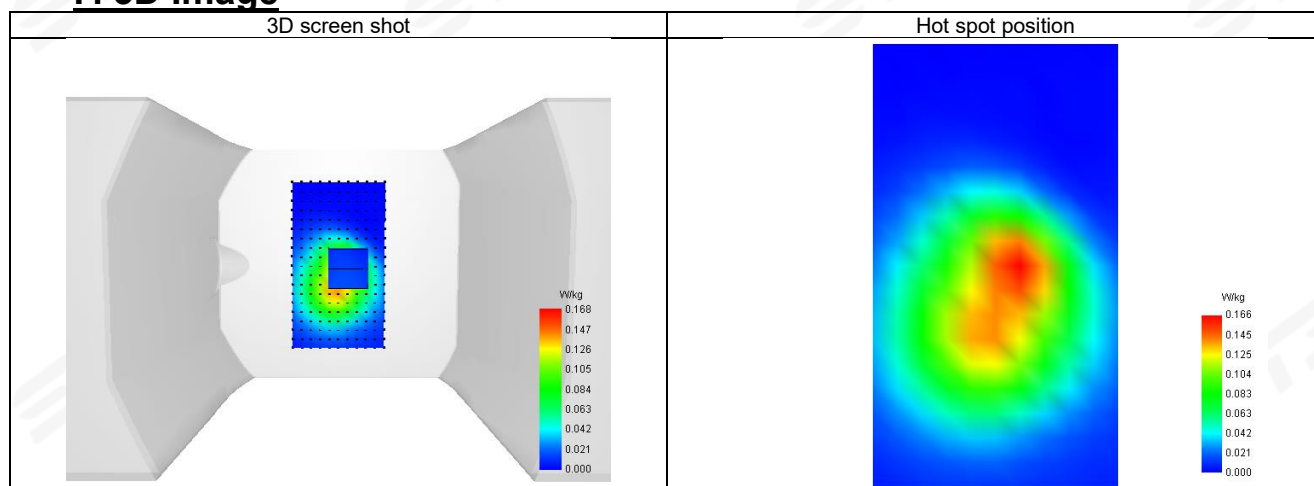**F. 3D Image**

Plot 17: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-04
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2560
Relative permittivity (real part)	39.60
Conductivity (S/m)	1.92

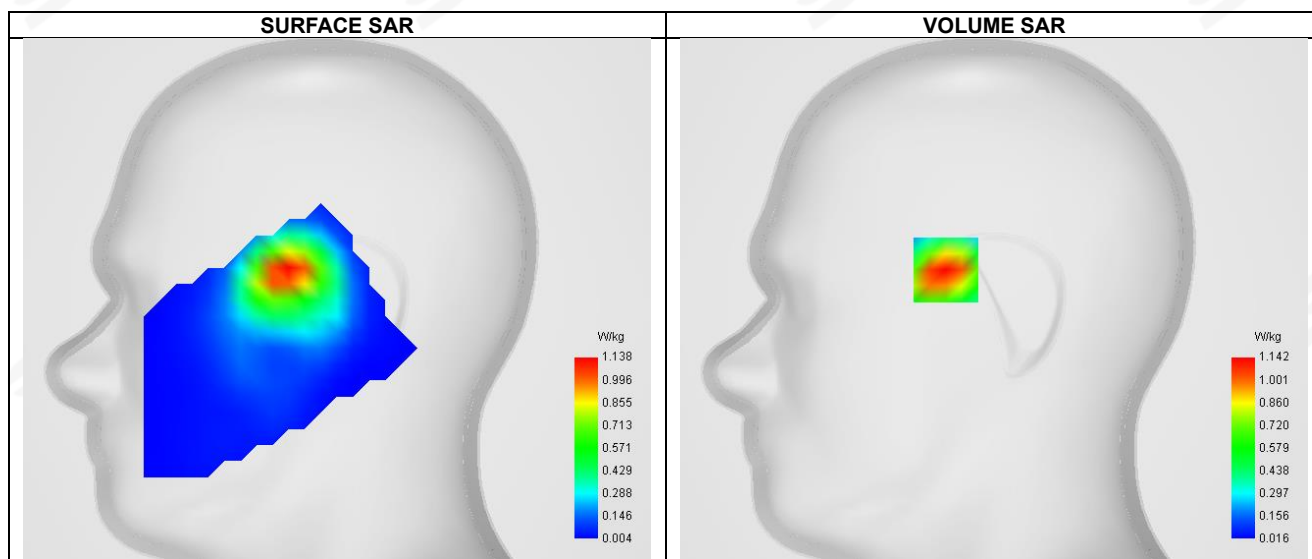


Maximum location: X=-24.00, Y=15.00 ; SAR Peak: 1.85 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.560
SAR 1g (W/Kg)	1.089
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.897757

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.832	1.142	0.608	0.325	0.173	0.093	0.049

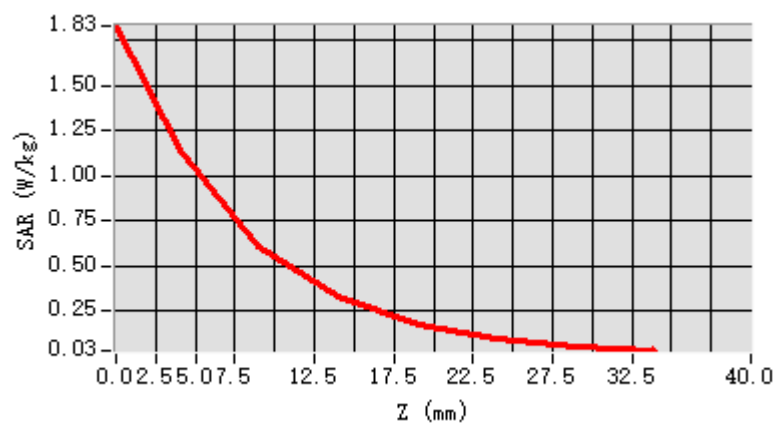


F. 3D Image

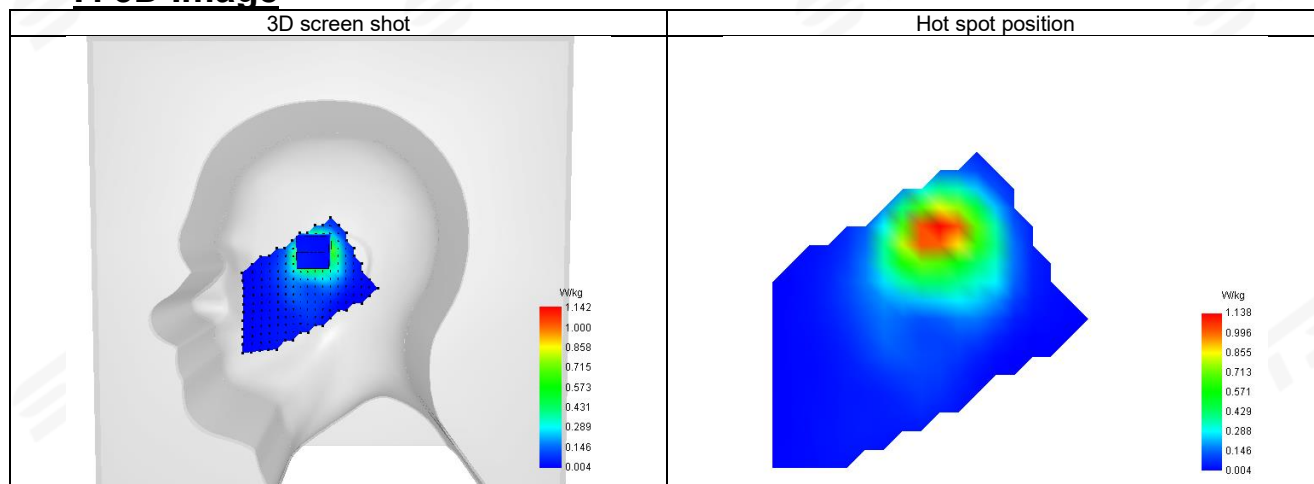

Plot 18: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-04
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2560
Relative permittivity (real part)	39.60
Conductivity (S/m)	1.92

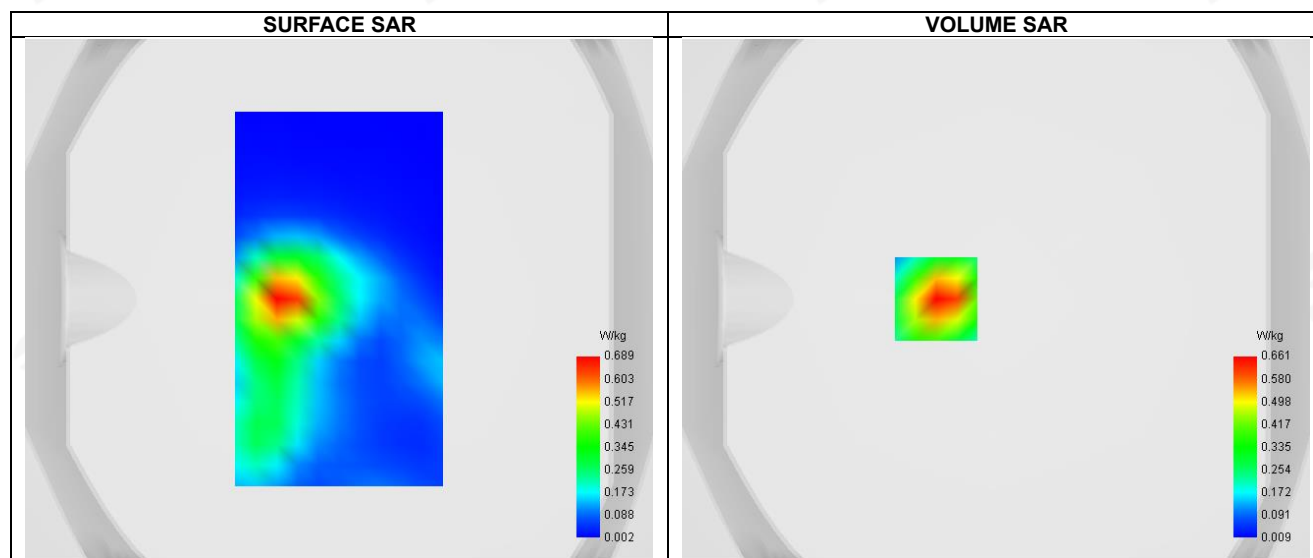


Maximum location: X=-23.00, Y=0.00 ; SAR Peak: 1.09 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.314
SAR 1g (W/Kg)	0.626
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.801138

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.072	0.661	0.349	0.193	0.104	0.057	0.031

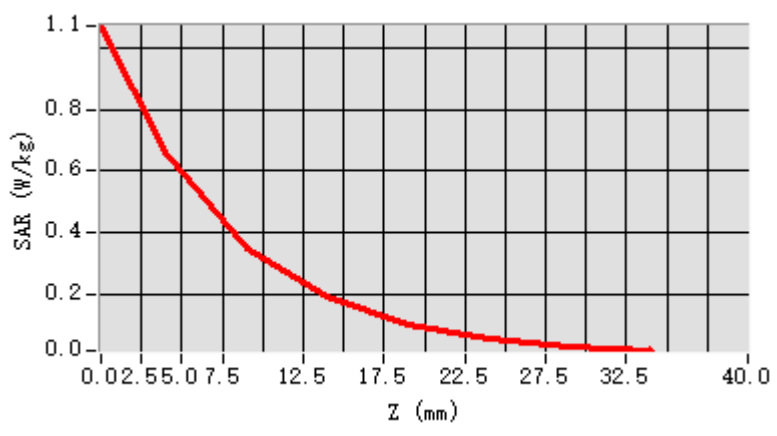


F. 3D Image

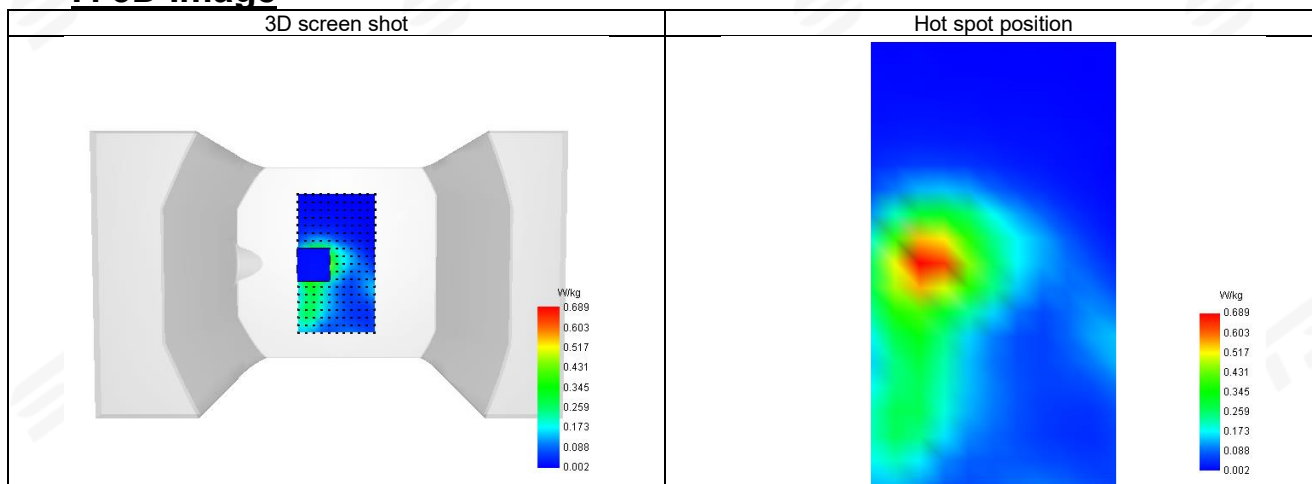

Plot 19: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-08-29
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.81
Conductivity (S/m)	0.89

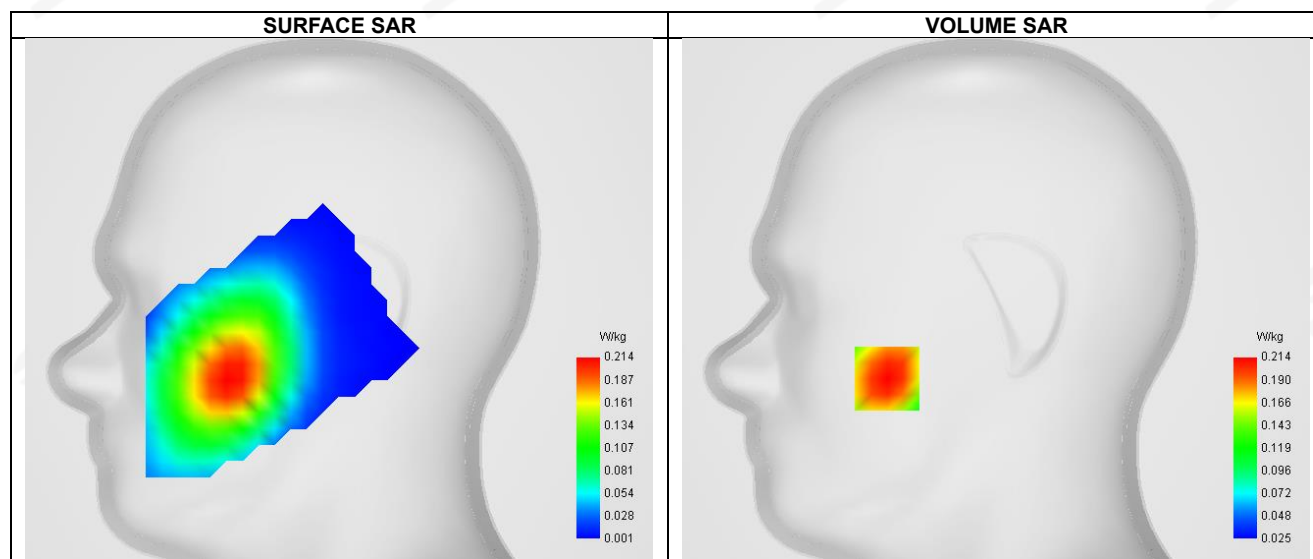


Maximum location: X=-54.00, Y=-39.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.210
Horizontal validation criteria: minimum distance (mm)	11.216745
Vertical validation criteria: SAR ratio M2/M1 (%)	79.651162

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.261	0.214	0.172	0.137	0.109	0.081	0.060

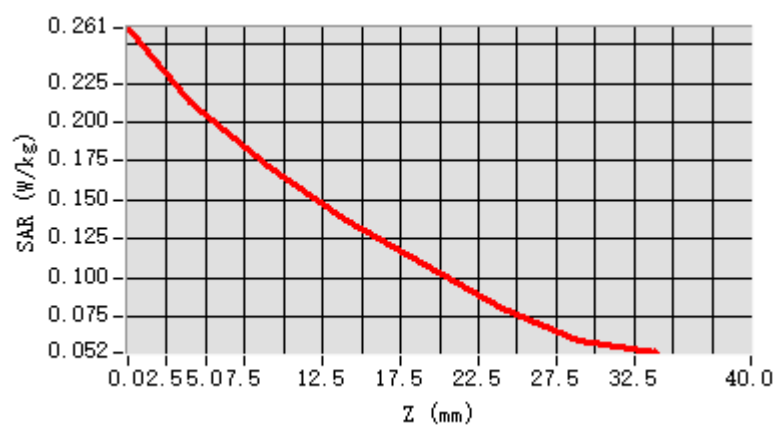


F. 3D Image

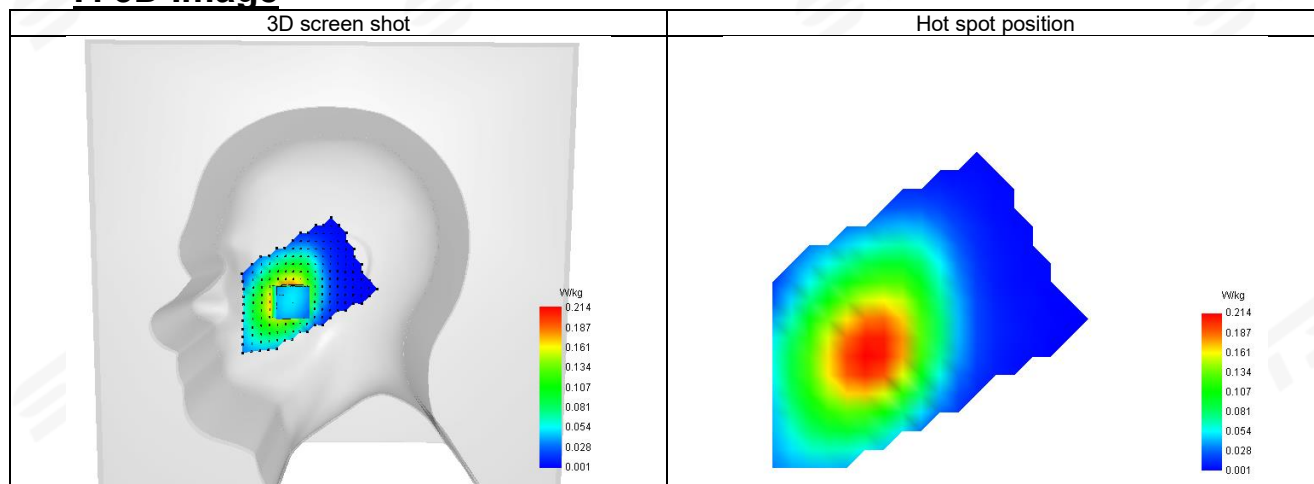

**Plot 20: DUT: Smart Phone; EUT Model: RugKing 2 Pro**


Test Date	2025-08-29
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.81
Conductivity (S/m)	0.89

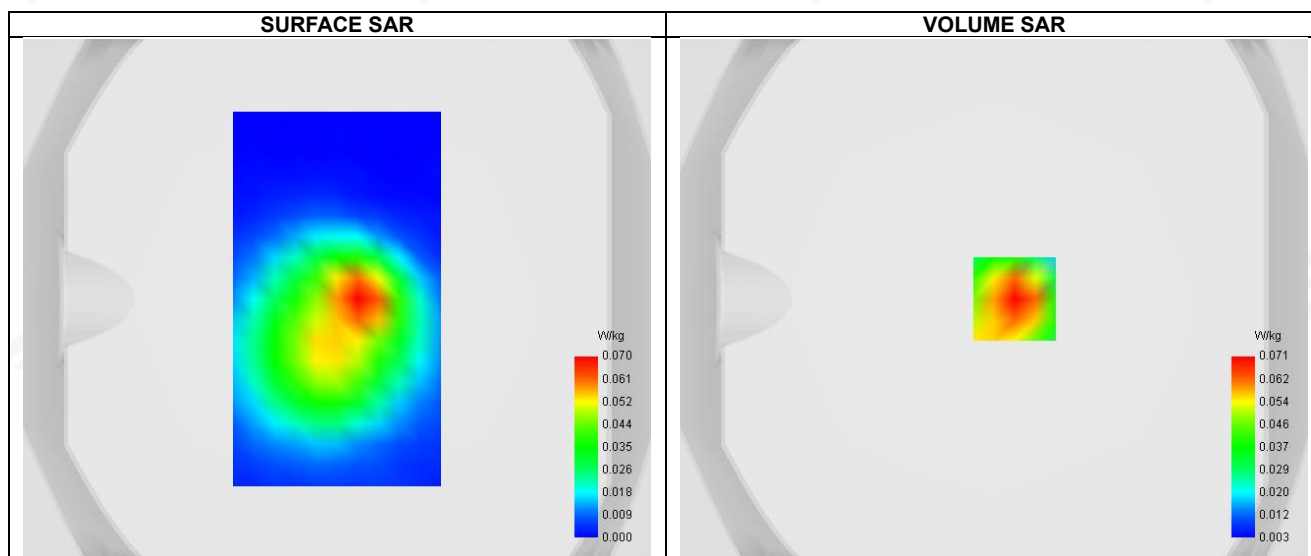**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.067
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	65.091063

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.101	0.071	0.046	0.032	0.022	0.015	0.010

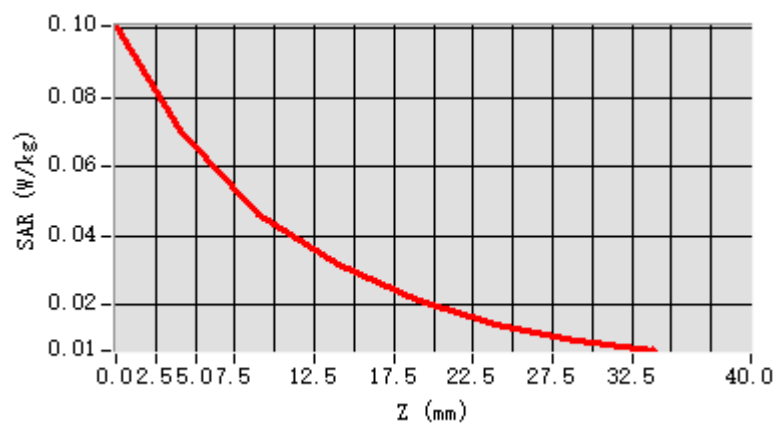


F. 3D Image

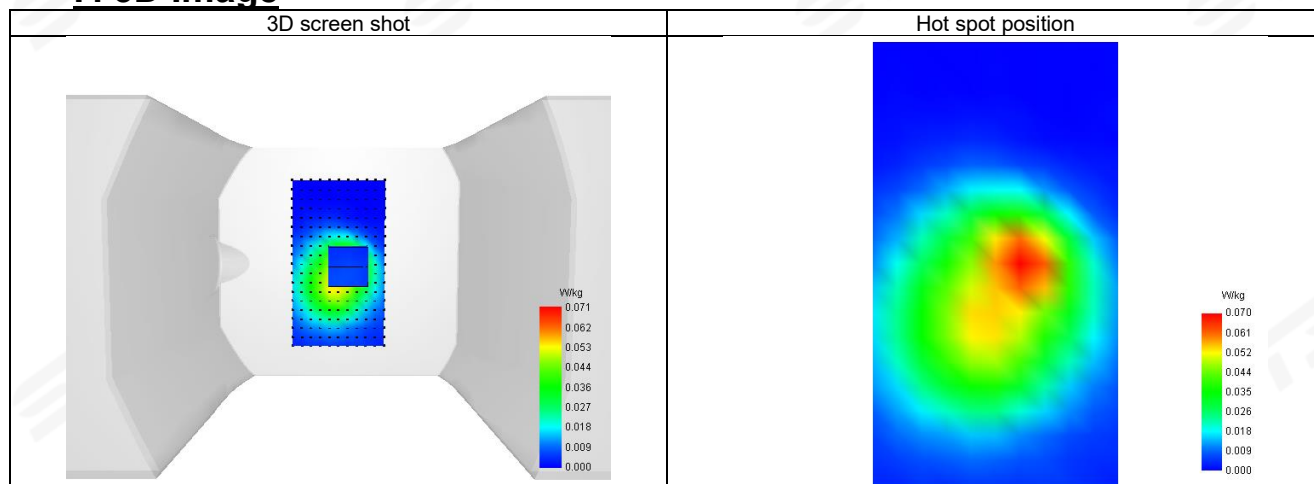

Plot 21: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-08-29
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Left Cheek
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	709
Relative permittivity (real part)	42.25
Conductivity (S/m)	0.89

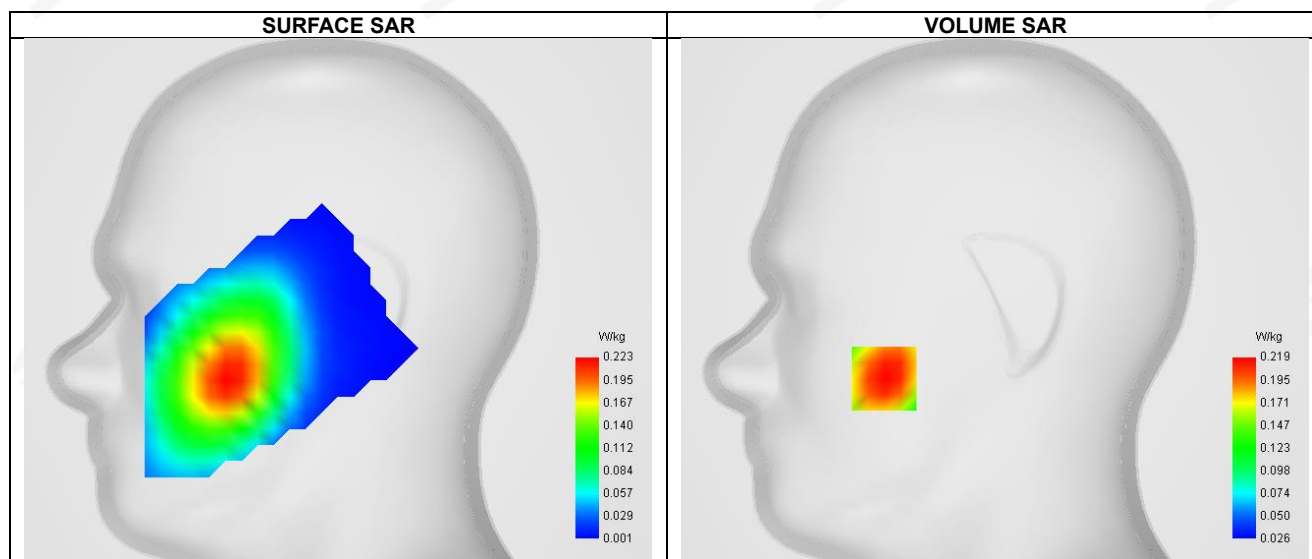


Maximum location: X=-55.00, Y=-39.00 ; SAR Peak: 0.27 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.216
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	80.113636

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.268	0.219	0.176	0.141	0.111	0.082	0.061

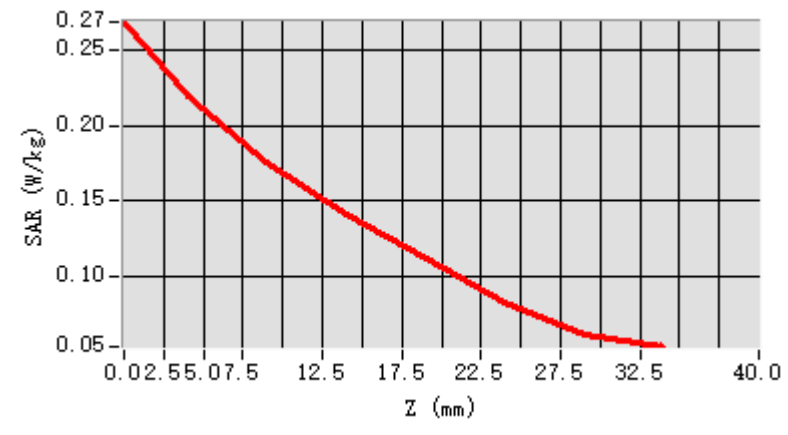


F. 3D Image

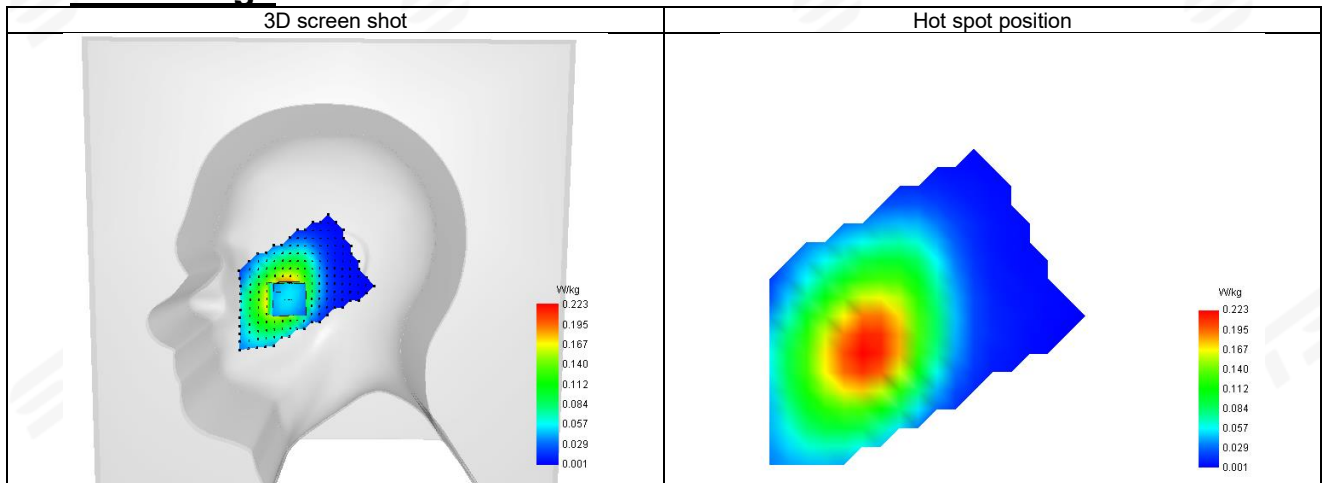

**Plot 22: DUT: Smart Phone; EUT Model: RugKing 2 Pro**

Test Date	2025-08-29
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	709
Relative permittivity (real part)	42.25
Conductivity (S/m)	0.89

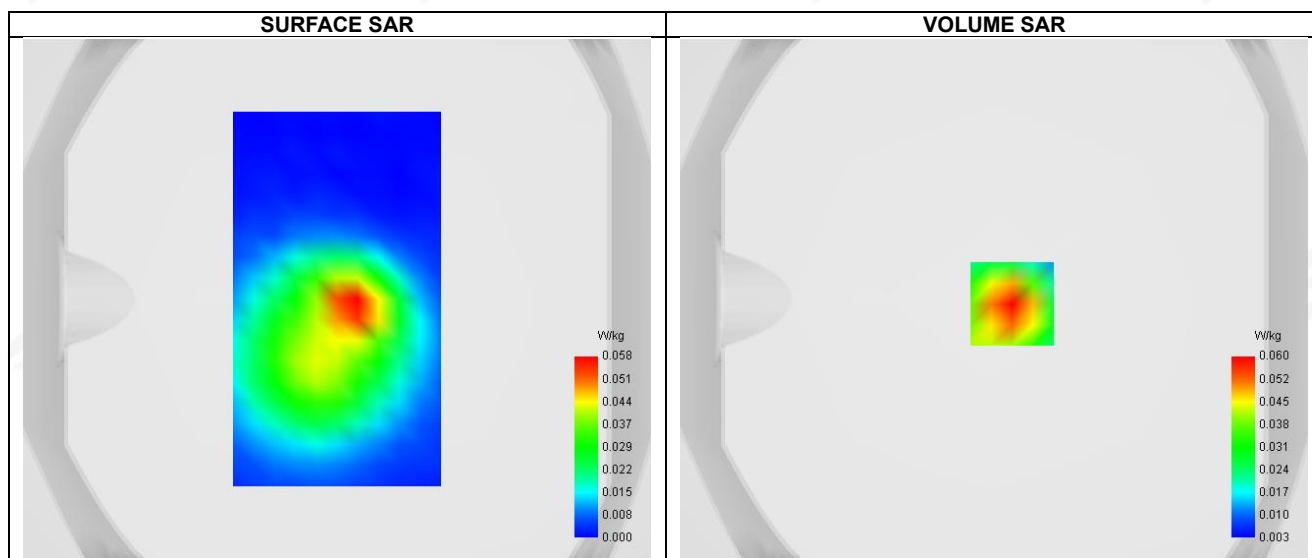


Maximum location: X=7.00, Y=-2.00 ; SAR Peak: 0.09 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.033
SAR 1g (W/Kg)	0.056
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.468735

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.088	0.060	0.037	0.026	0.017	0.011	0.008

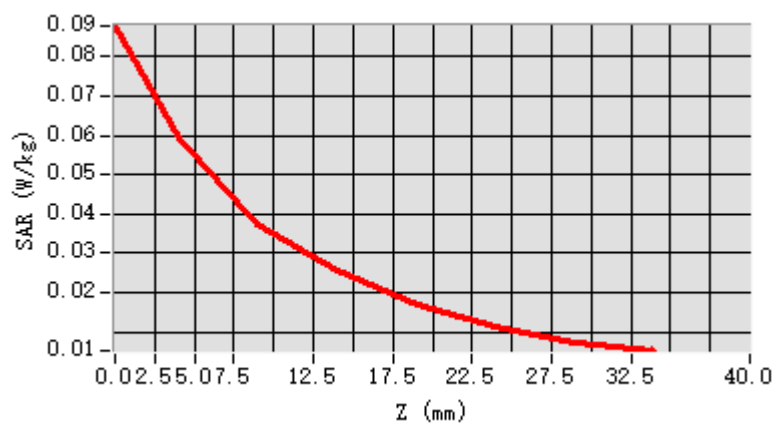


F. 3D Image

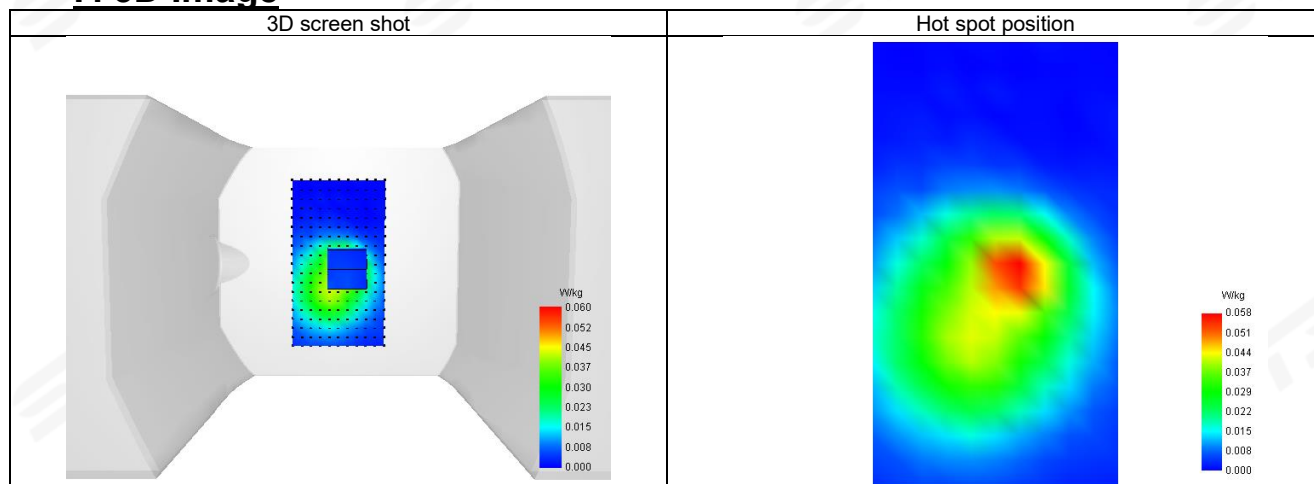

Plot 23: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-04
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2506
Relative permittivity (real part)	39.53
Conductivity (S/m)	1.86

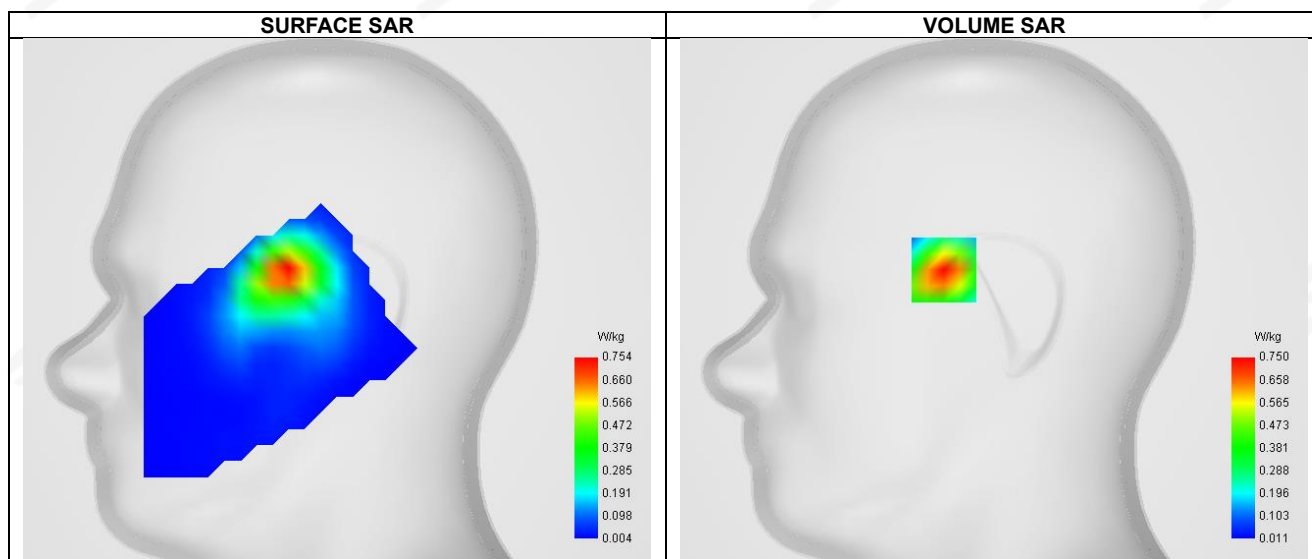


Maximum location: X=-25.00, Y=15.00 ; SAR Peak: 1.21 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.359
SAR 1g (W/Kg)	0.708
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.852771

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.194	0.750	0.404	0.217	0.117	0.063	0.034

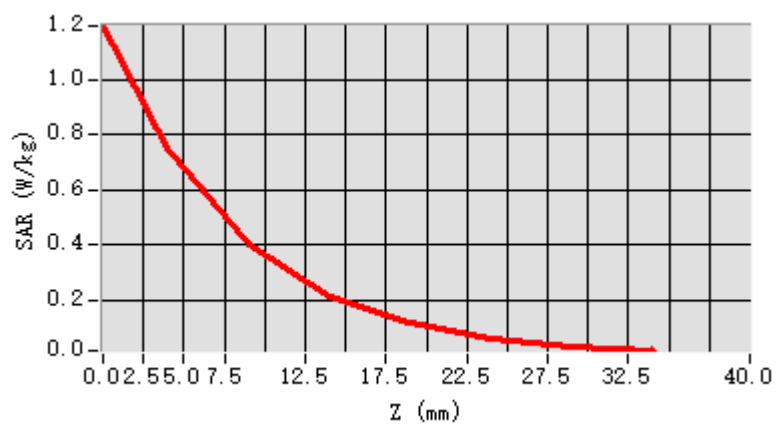


F. 3D Image

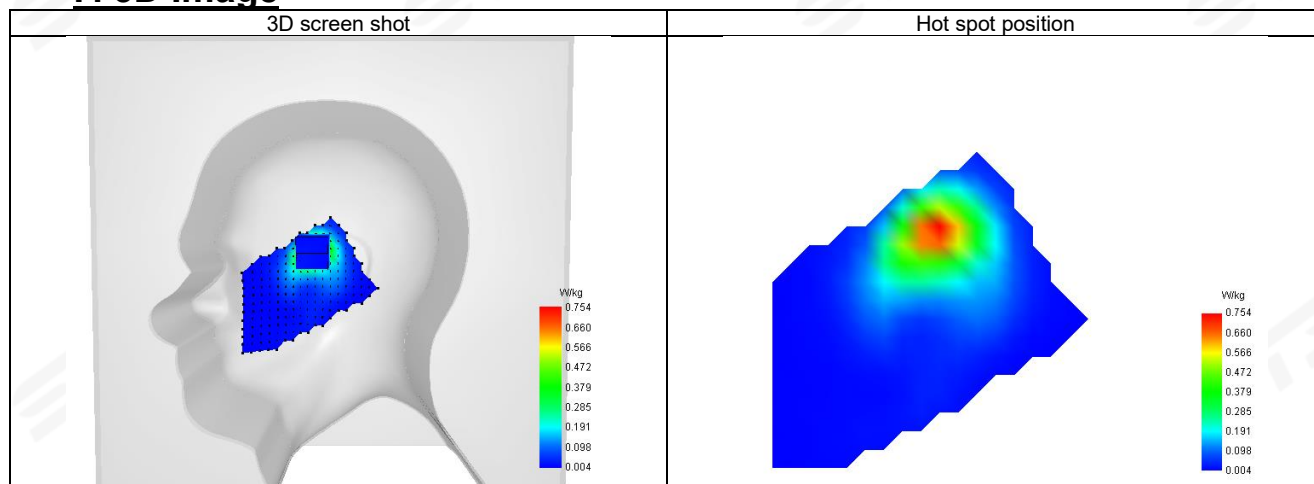

**Plot 24: DUT: Smart Phone; EUT Model: RugKing 2 Pro**

Test Date	2025-09-04
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2506
Relative permittivity (real part)	39.53
Conductivity (S/m)	1.86

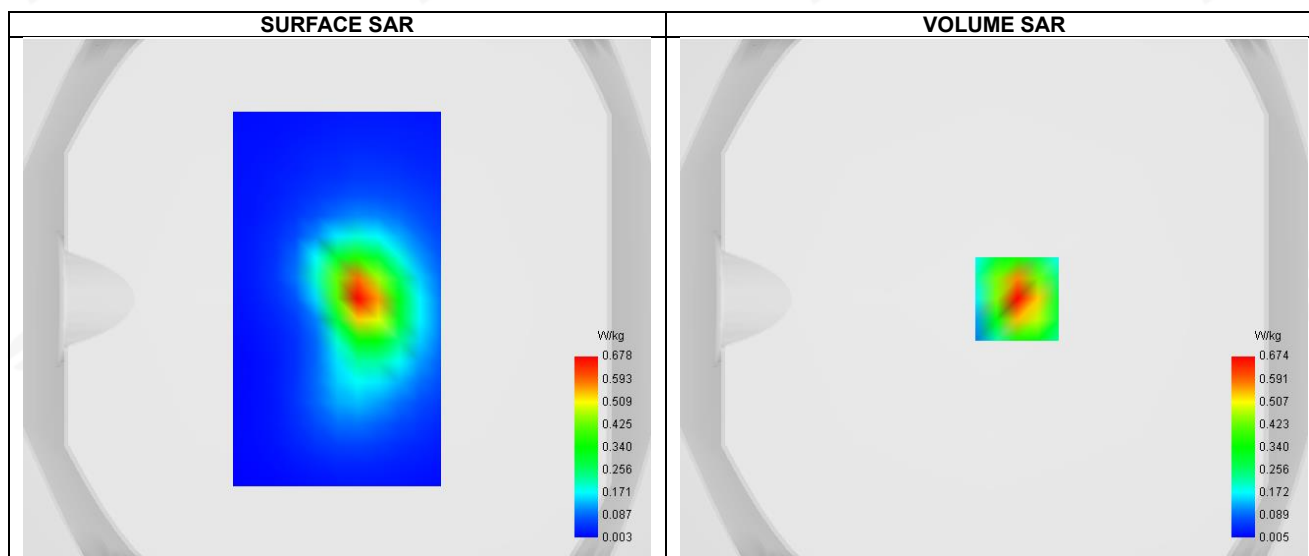


Maximum location: X=9.00, Y=0.00 ; SAR Peak: 1.06 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.302
SAR 1g (W/Kg)	0.617
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	54.631831

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.061	0.674	0.368	0.198	0.107	0.058	0.031

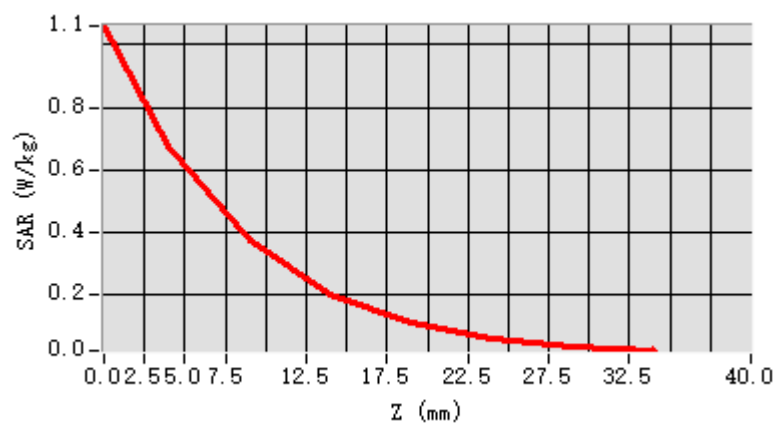


F. 3D Image

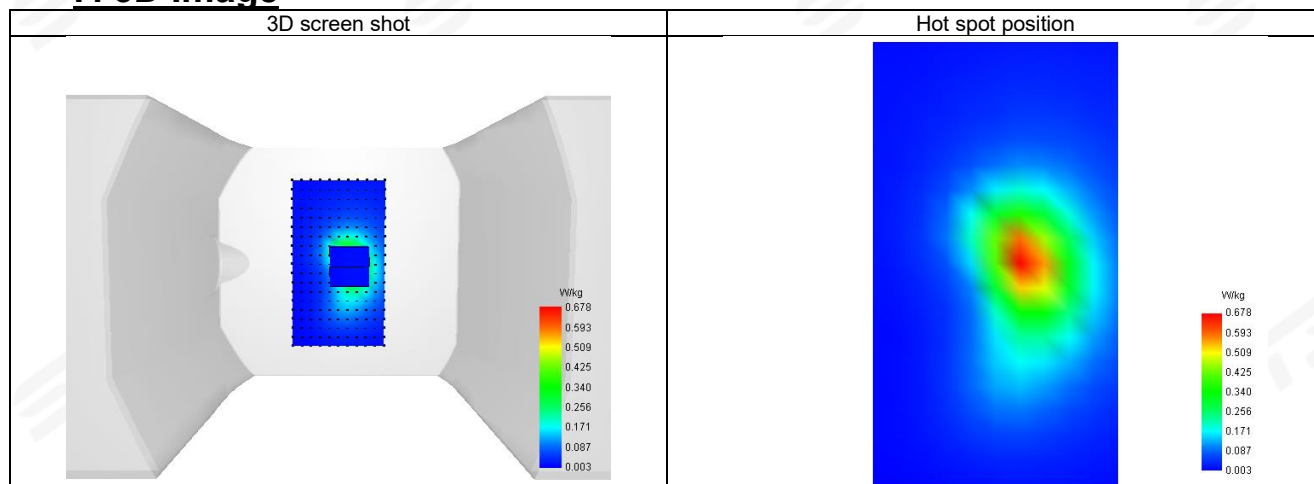

Plot 25: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-08-30
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 61 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	40.40
Conductivity (S/m)	1.38

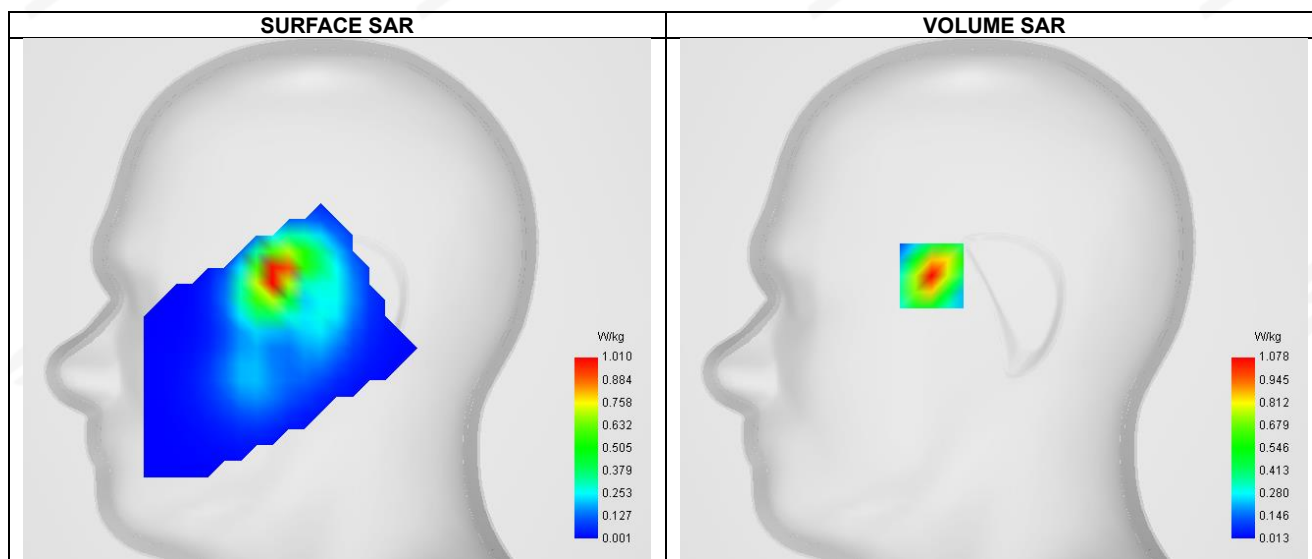


Maximum location: X=-31.00, Y=12.00 ; SAR Peak: 1.69 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.480
SAR 1g (W/Kg)	1.036
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	55.087625

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.701	1.078	0.594	0.341	0.193	0.109	0.061

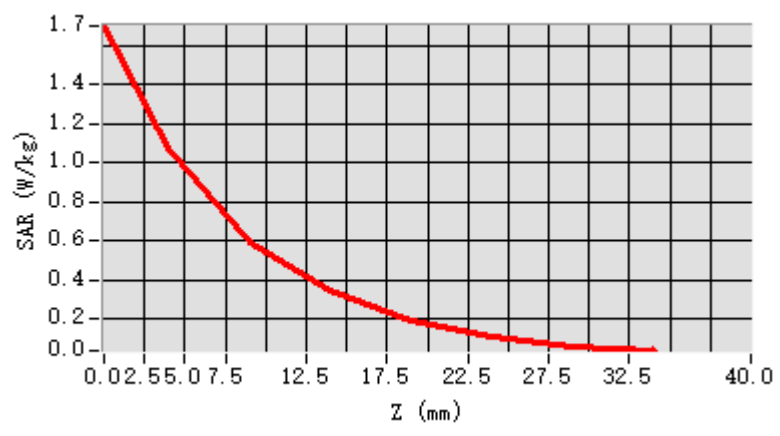


F. 3D Image

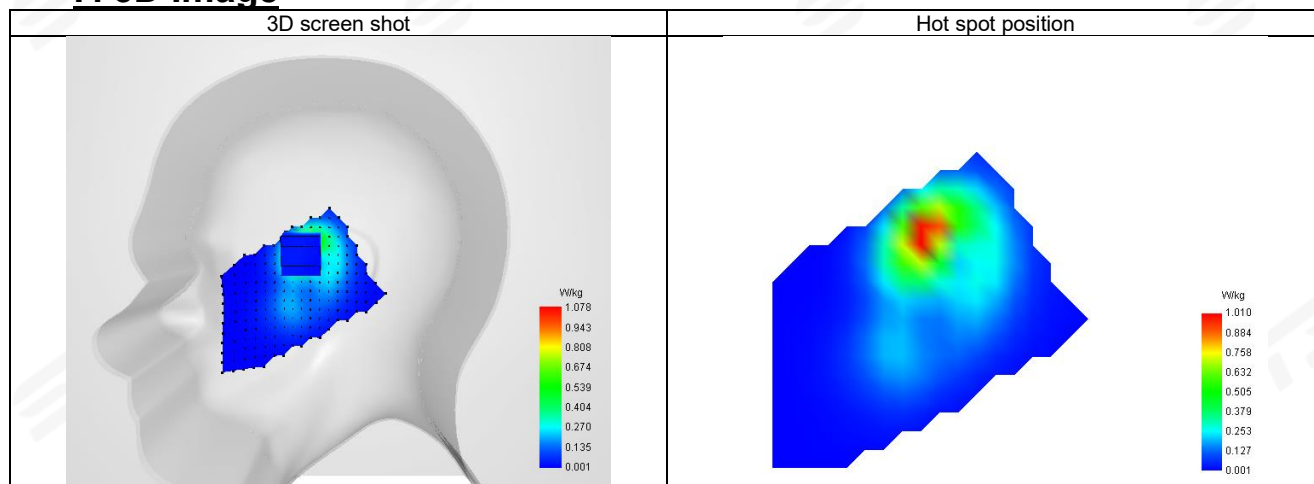

**Plot 26: DUT: Smart Phone; EUT Model: RugKing 2 Pro**

Test Date	2025-08-30
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66 (RB 1)
Signal	LTE (Cr est factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	40.40
Conductivity (S/m)	1.38

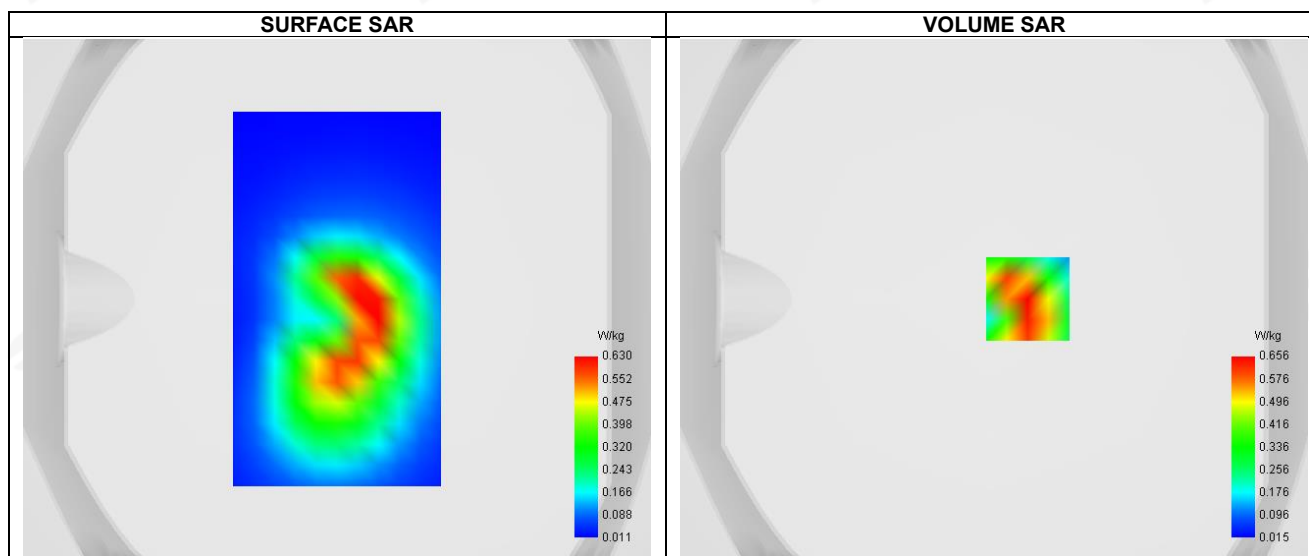



Maximum location: X=13.00, Y=0.00 ; SAR Peak: 0.95 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.335
SAR 1g (W/Kg)	0.604
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.232611


**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.947	0.656	0.408	0.254	0.158	0.098	0.061

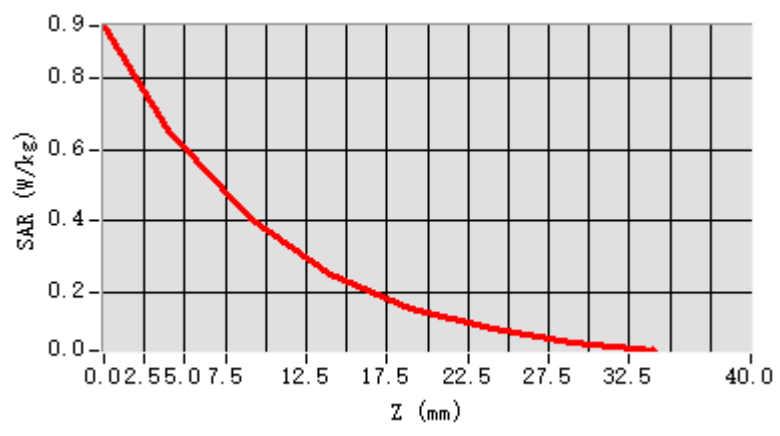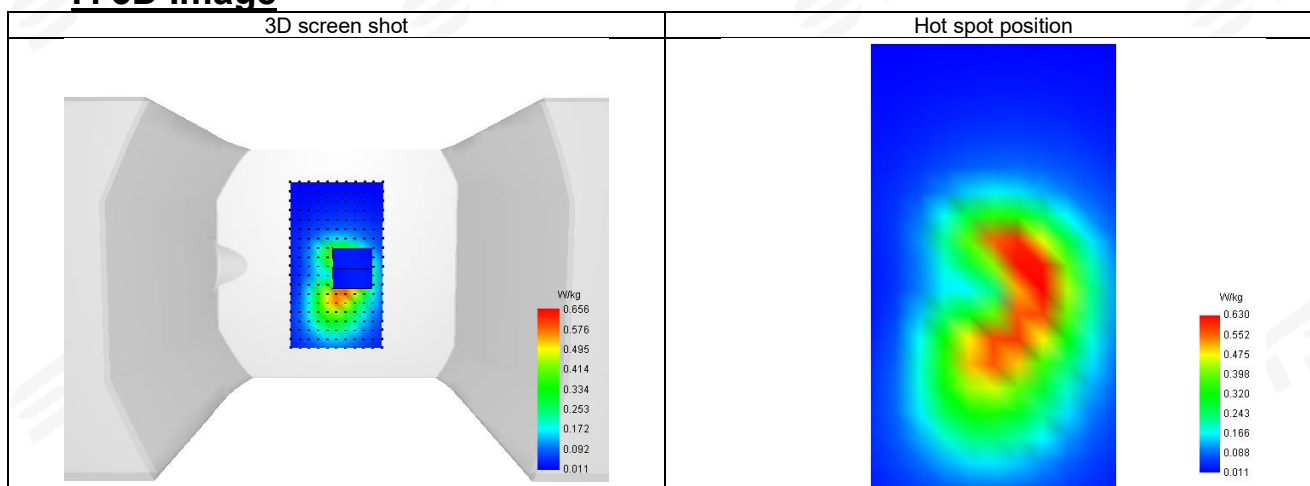**F. 3D Image**

Plot 27: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-03
	1.80
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.81
Conductivity (S/m)	1.77

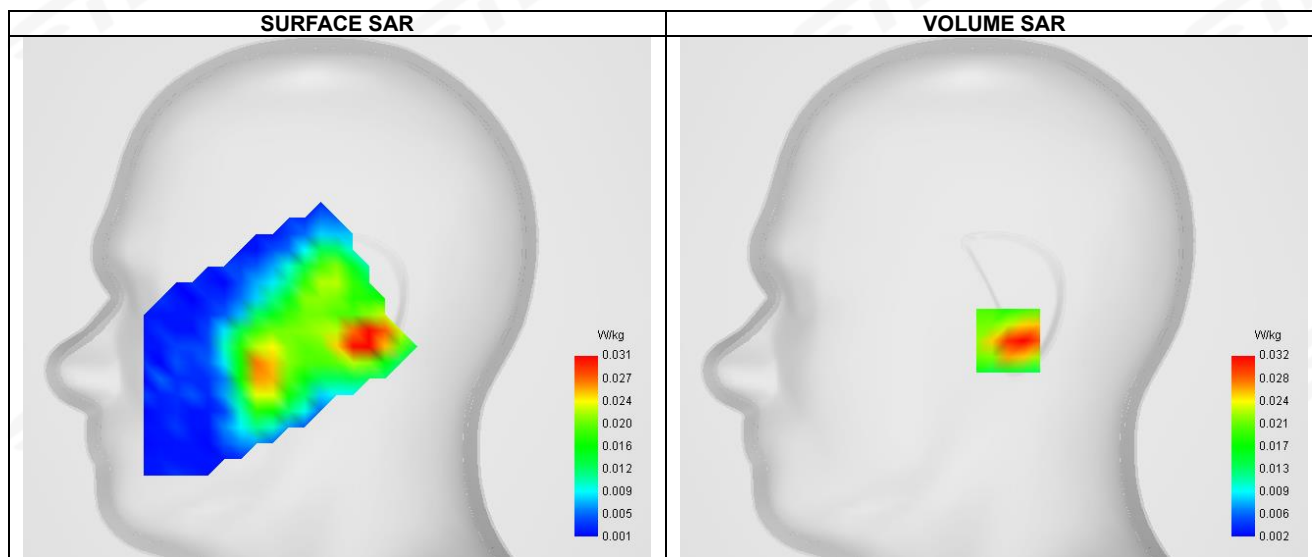


Maximum location: X=7.00, Y=-21.00 ; SAR Peak: 0.06 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.017
SAR 1g (W/Kg)	0.032
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.667780

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.059	0.032	0.015	0.013	0.008	0.006	0.004

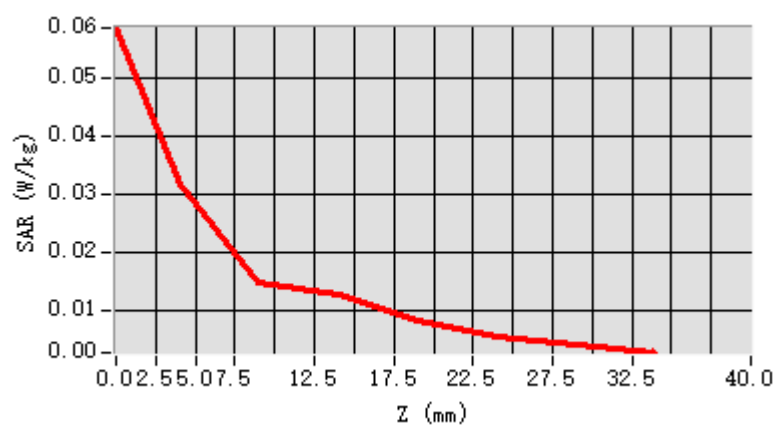


F. 3D Image

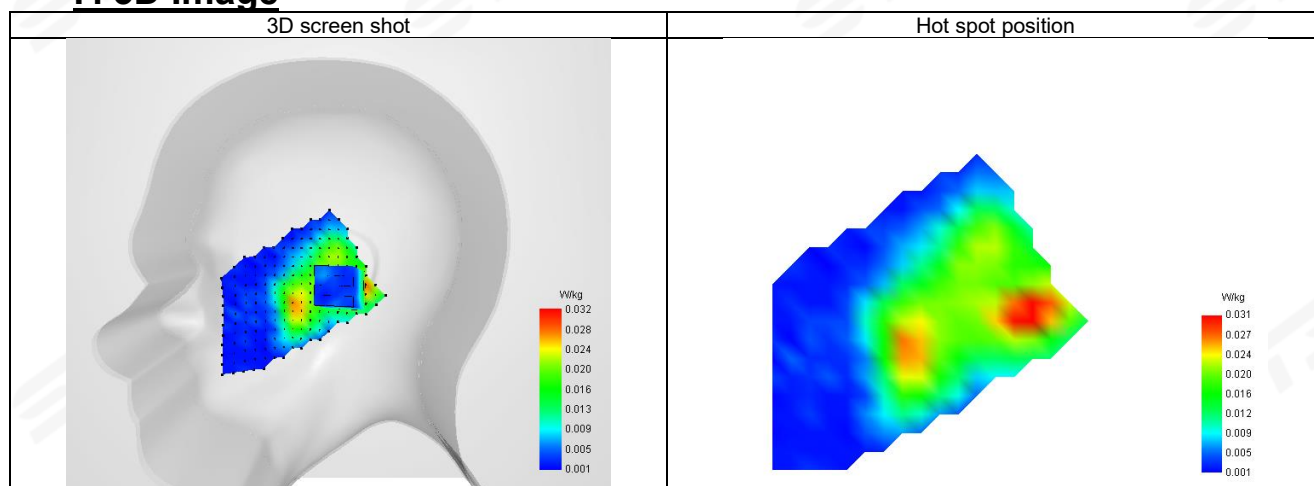

**Plot 28: DUT: Smart Phone; EUT Model: RugKing 2 Pro**

Test Date	2025-09-03
ConvF	1.80
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.81
Conductivity (S/m)	1.77

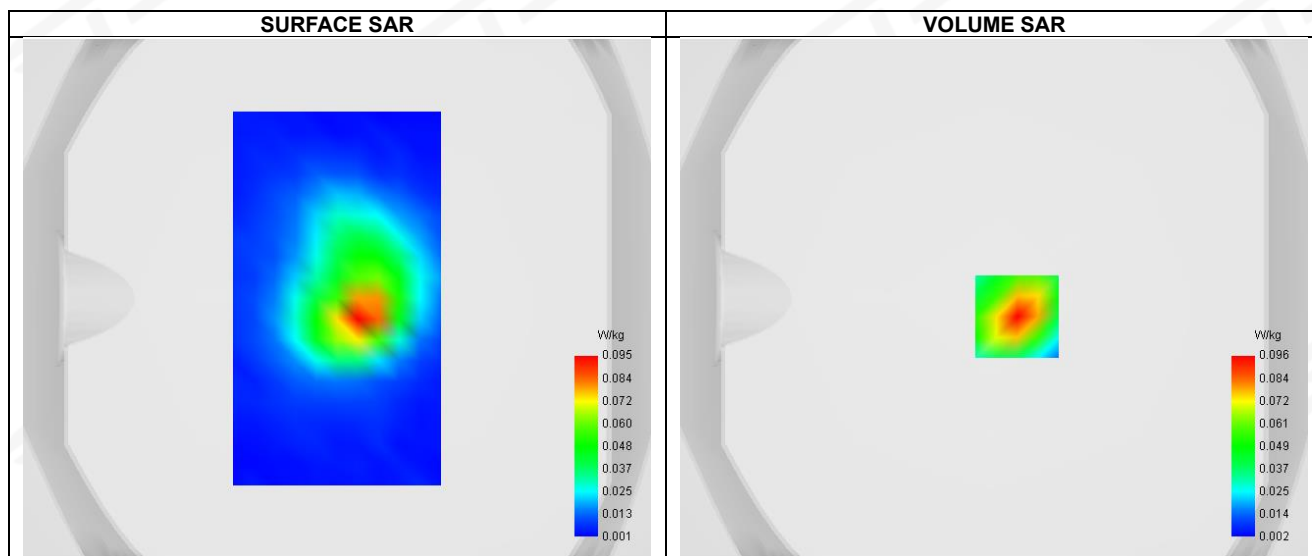


Maximum location: X=9.00, Y=-7.00 ; SAR Peak: 0.15 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.046
SAR 1g (W/Kg)	0.090
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.796369

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.154	0.096	0.052	0.030	0.017	0.009	0.005

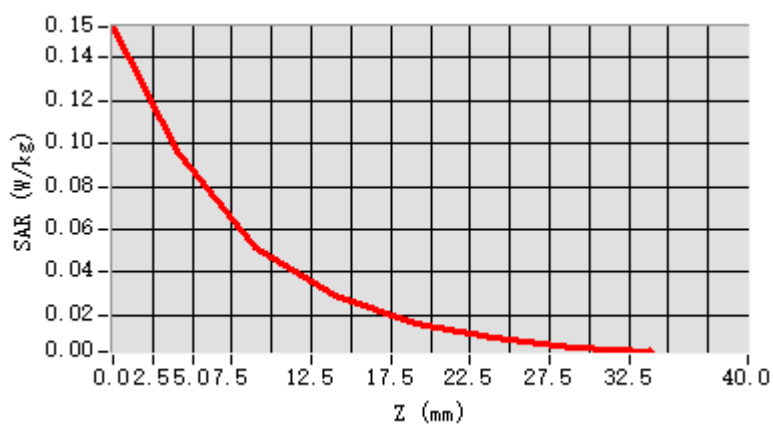


F. 3D Image

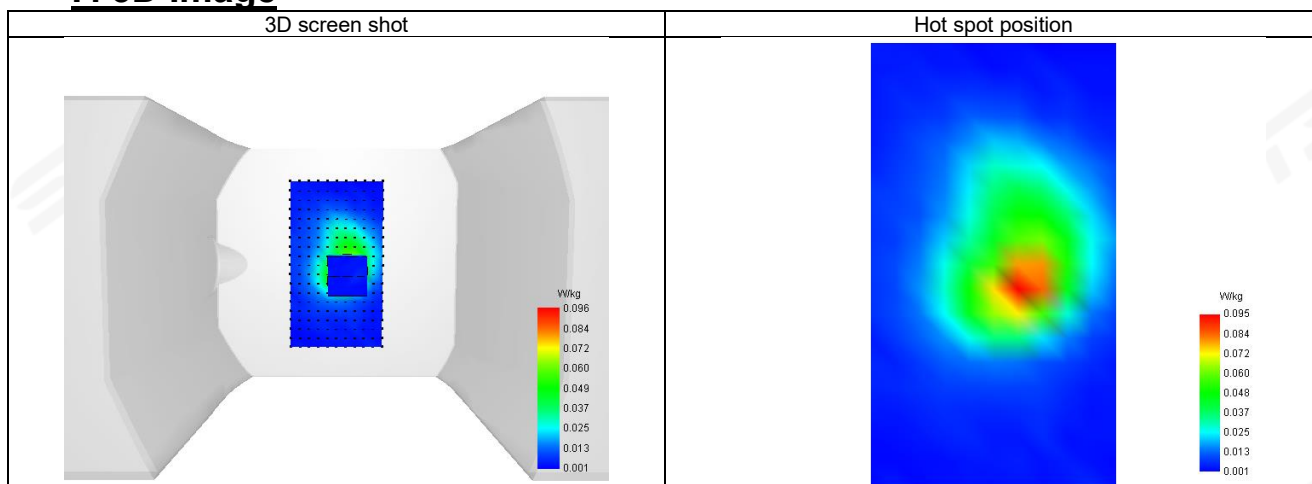

Plot 29: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-09
ConvF	1.33
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	802.11 ac-VHT20 ISM
Signal	802.11 ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.52
Conductivity (S/m)	4.65

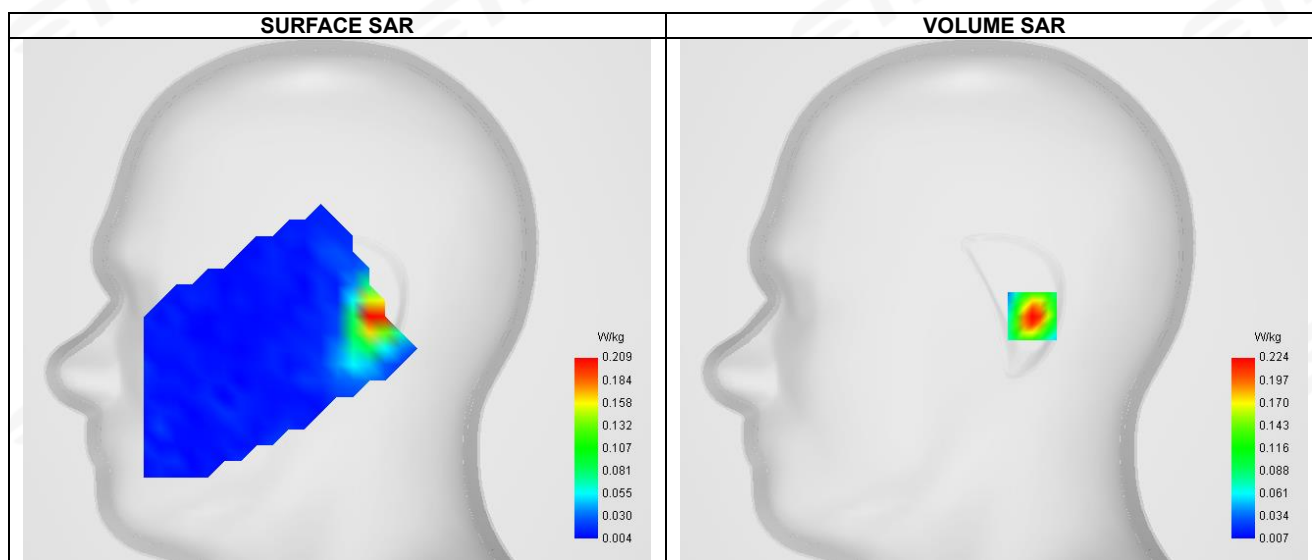


Maximum location: X=19.00, Y=-8.00 ; SAR Peak: 0.59 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.242
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	59.241795

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.352	0.224	0.133	0.076	0.081	0.061	0.045	0.034	0.025	0.019	0.014	0.011

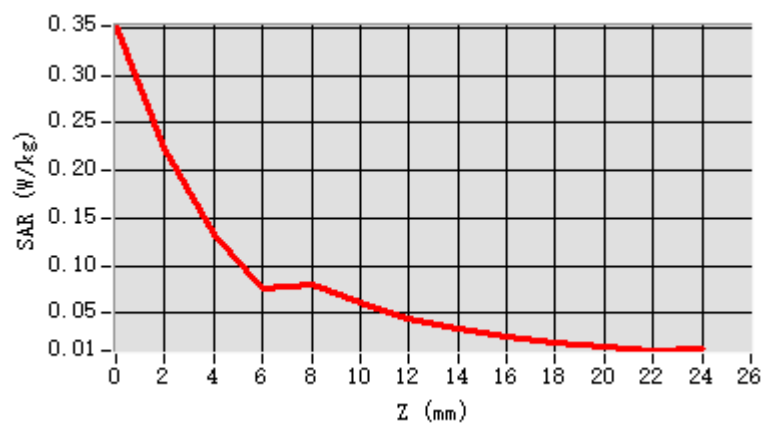


F. 3D Image

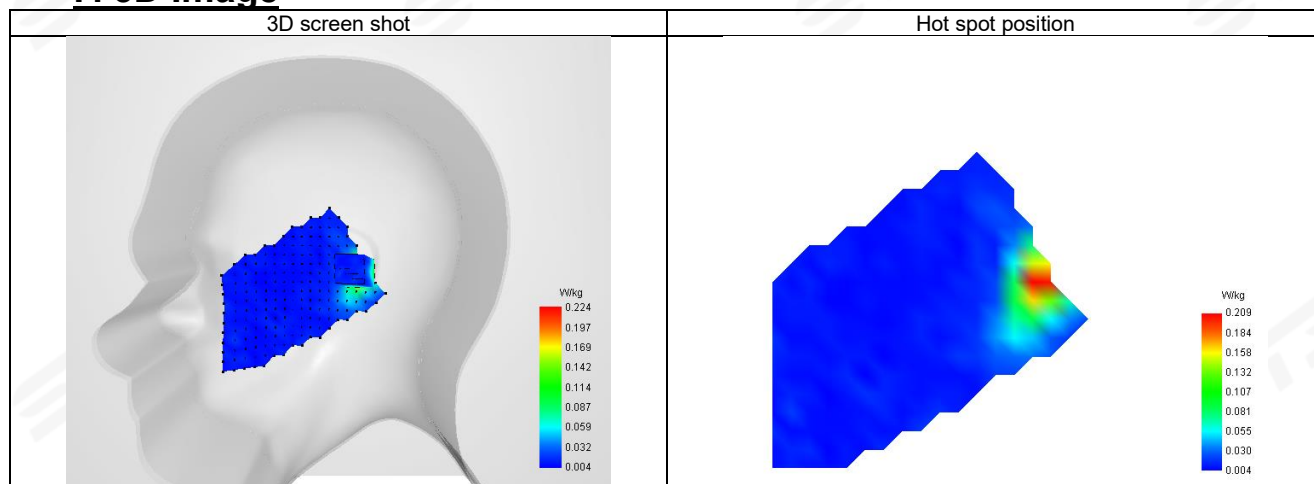

**Plot 30: DUT: Smart Phone; EUT Model: RugKing 2 Pro**


Test Date	2025-09-09
ConvF	1.33
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	802.11 ac-VHT20 ISM
Signal	802.11 ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.52
Conductivity (S/m)	4.65

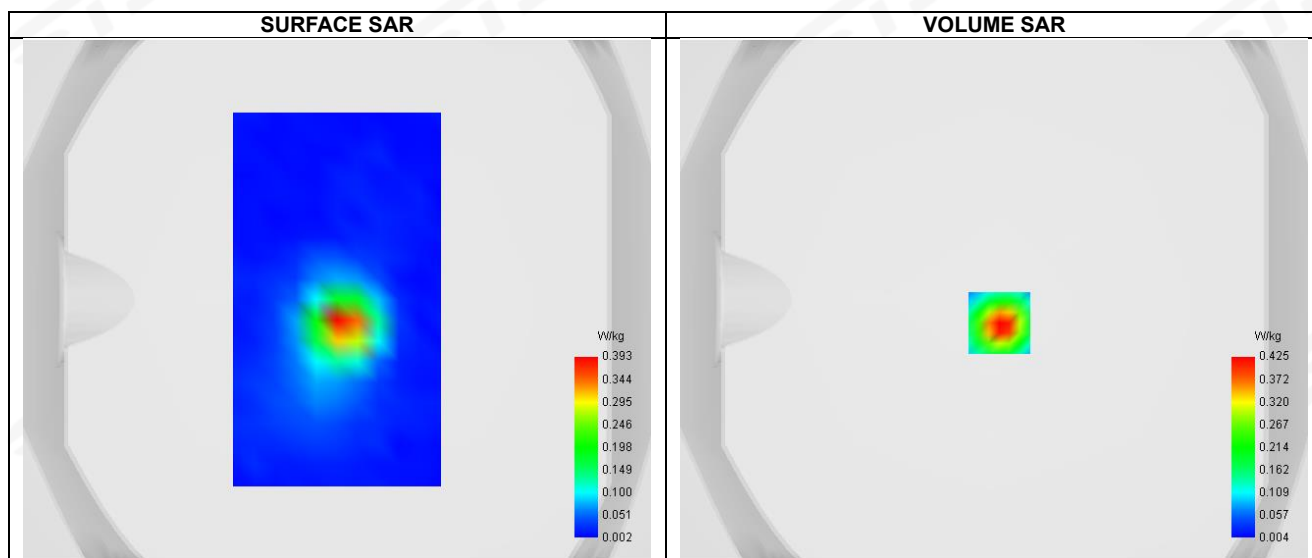**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.105
SAR 1g (W/Kg)	0.280
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	57.894047

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.668	0.425	0.246	0.143	0.130	0.091	0.063	0.044	0.031	0.022	0.015	0.011	0.011

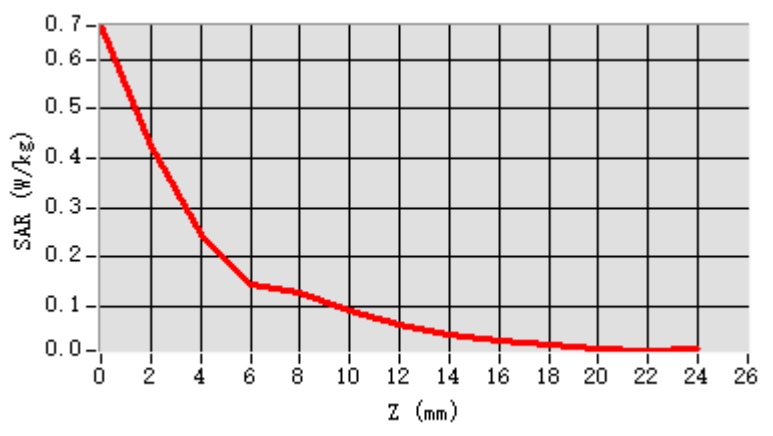


F. 3D Image

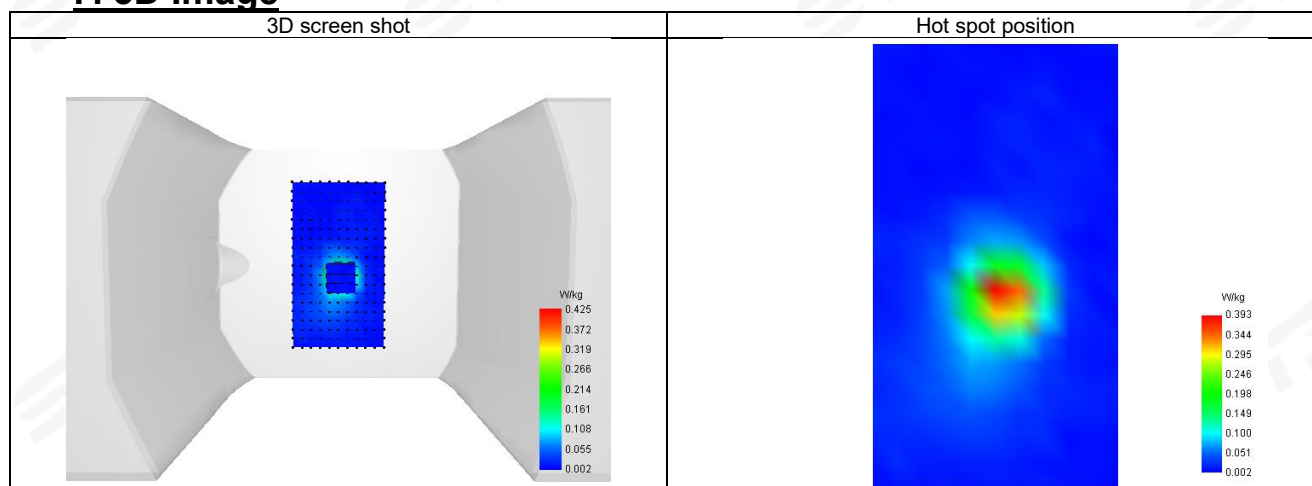

Plot 31: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-09
ConvF	1.31
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	36.20
Conductivity (S/m)	4.76

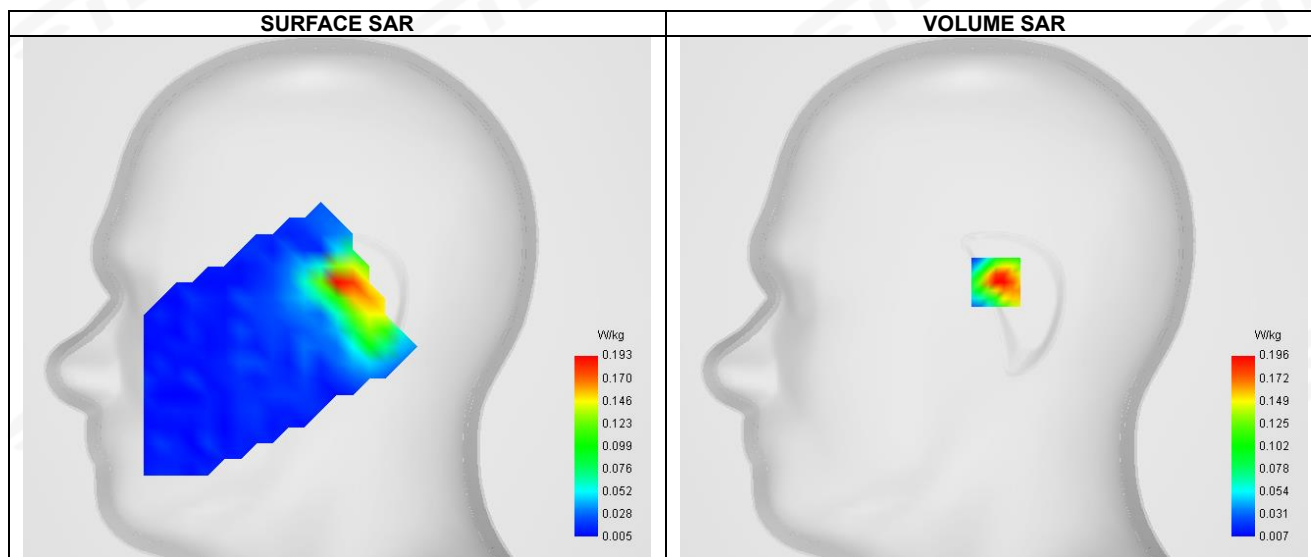


Maximum location: X=1.00, Y=8.00 ; SAR Peak: 0.58 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.234
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	54.815037

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.278	0.196	0.088	0.111	0.075	0.072	0.048	0.046	0.031	0.030	0.020	0.019	

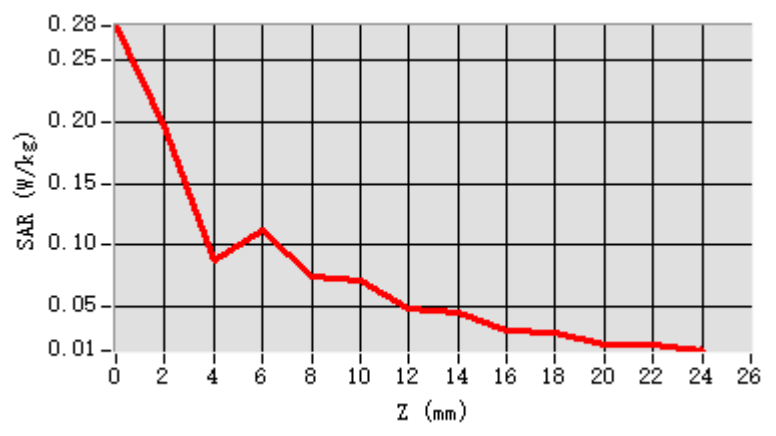


F. 3D Image

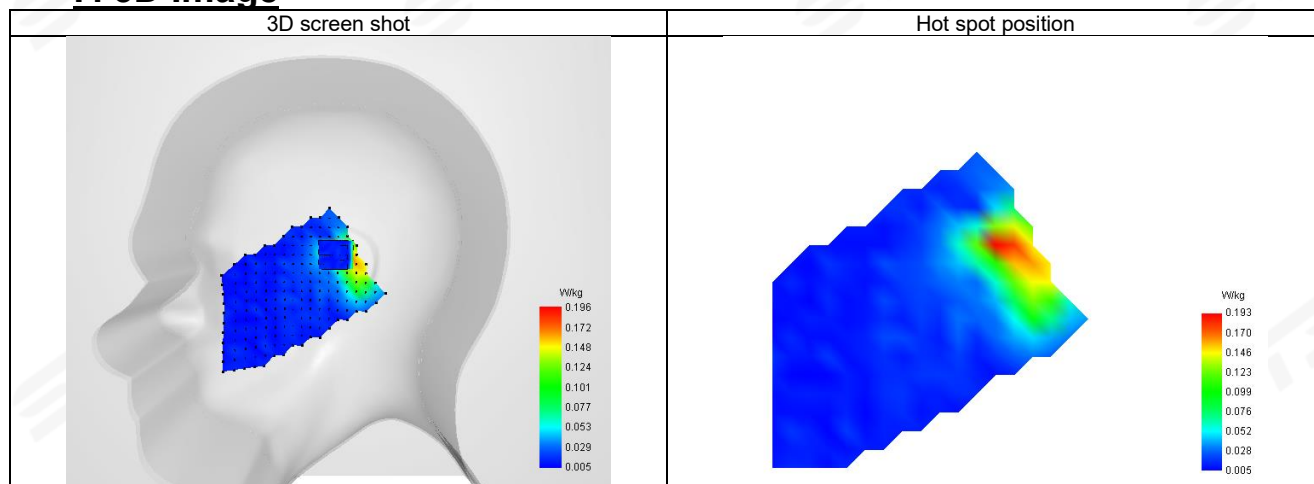

**Plot 32: DUT: Smart Phone; EUT Model: RugKing 2 Pro**

Test Date	2025-09-09
ConvF	1.31
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	36.20
Conductivity (S/m)	4.76

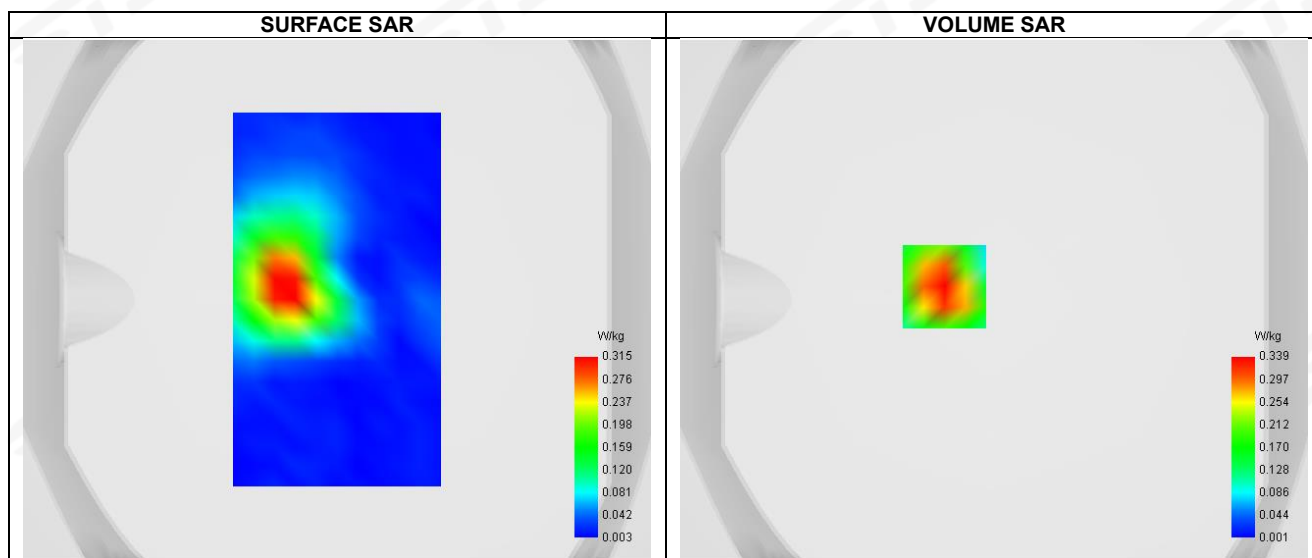


Maximum location: X=-19.00, Y=5.00 ; SAR Peak: 0.70 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.279
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	32.282482

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	0.529	0.339	0.072	0.061	0.028	0.012	0.006

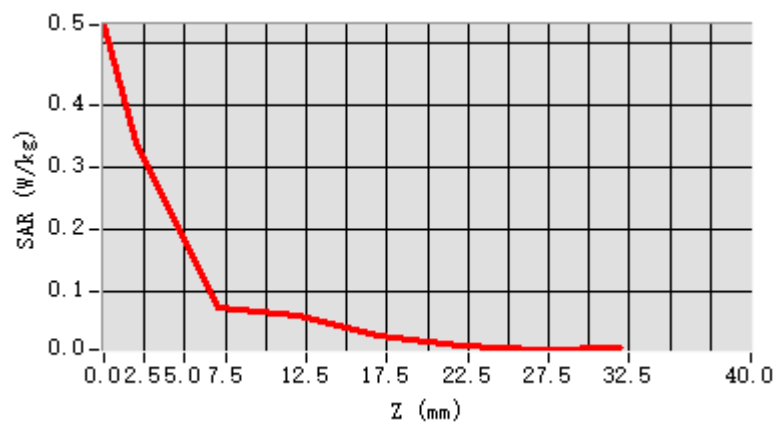


F. 3D Image

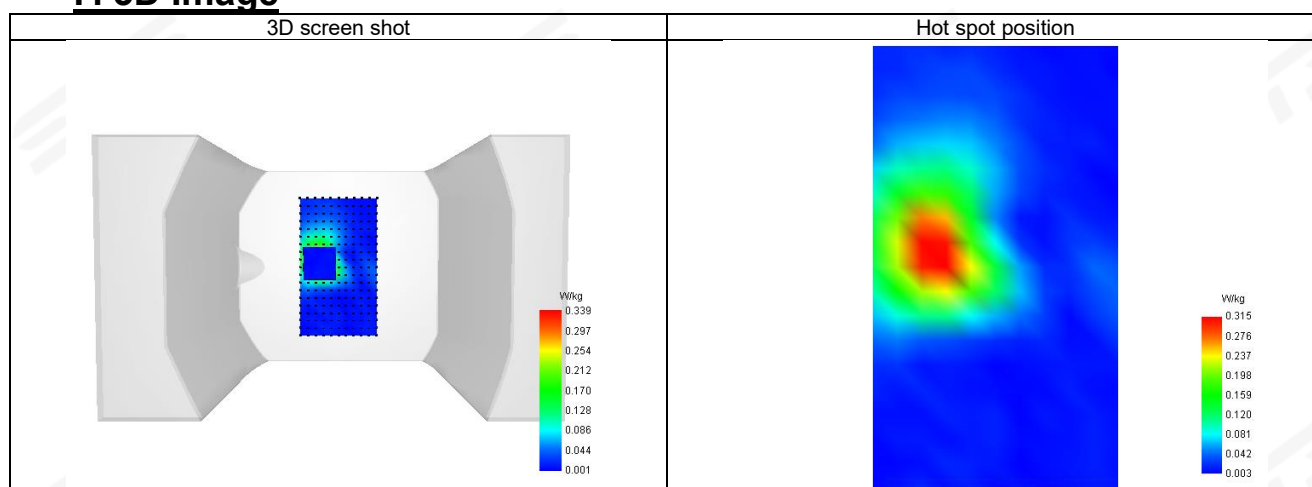

Plot 33: DUT: Smart Phone; EUT Model: RugKing 2 Pro

Test Date	2025-09-09
ConvF	1.35
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	36.37
Conductivity (S/m)	5.22

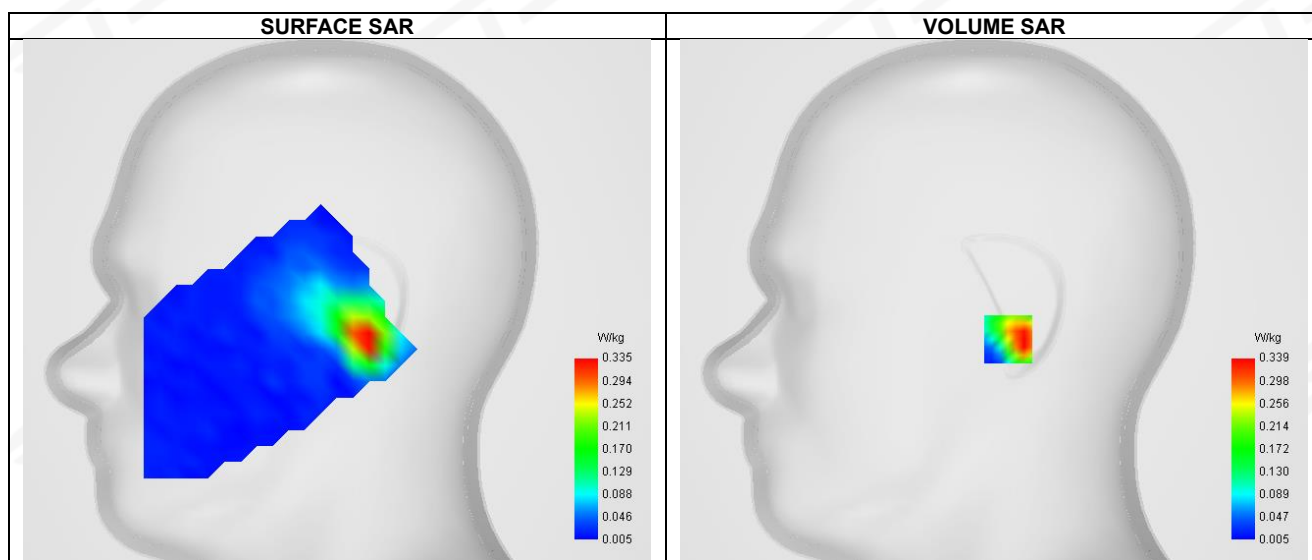


Maximum location: X=7.00, Y=-19.00 ; SAR Peak: 1.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.383
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	53.801411

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.537	0.339	0.081	0.169	0.057	0.094	0.041	0.053	0.029	0.029	0.021	0.016	

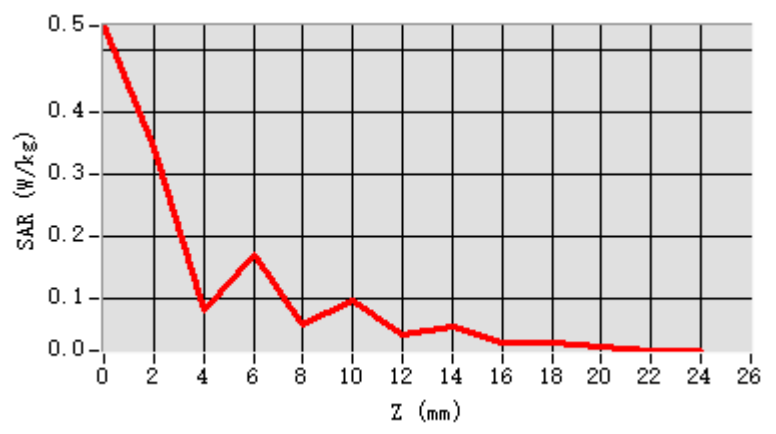


F. 3D Image

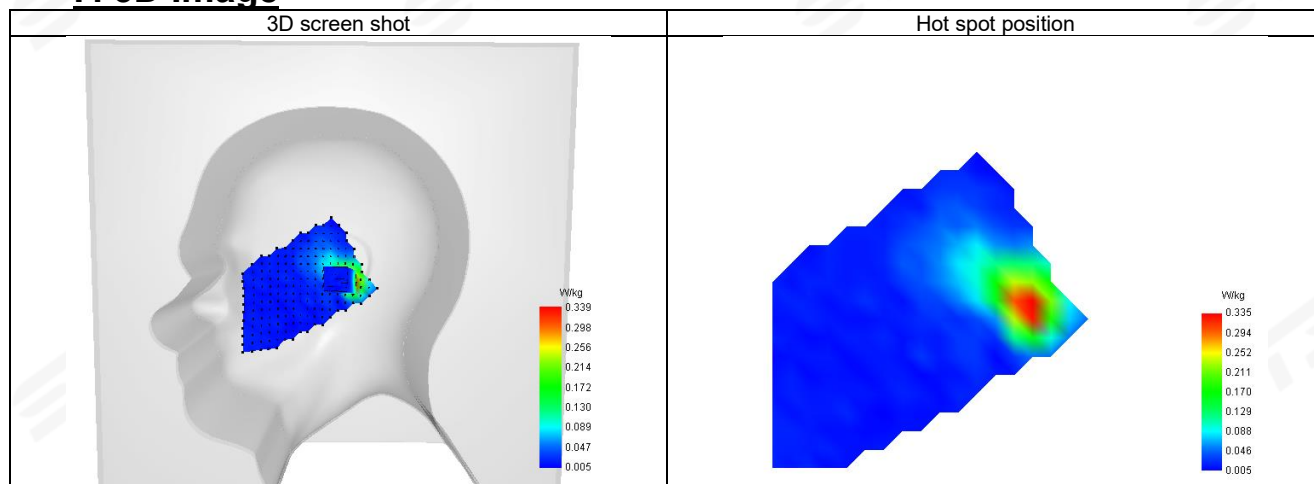

**Plot 34: DUT: Smart Phone; EUT Model: RugKing 2 Pro**


Test Date	2025-09-09
ConvF	1.35
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	36.37
Conductivity (S/m)	5.22

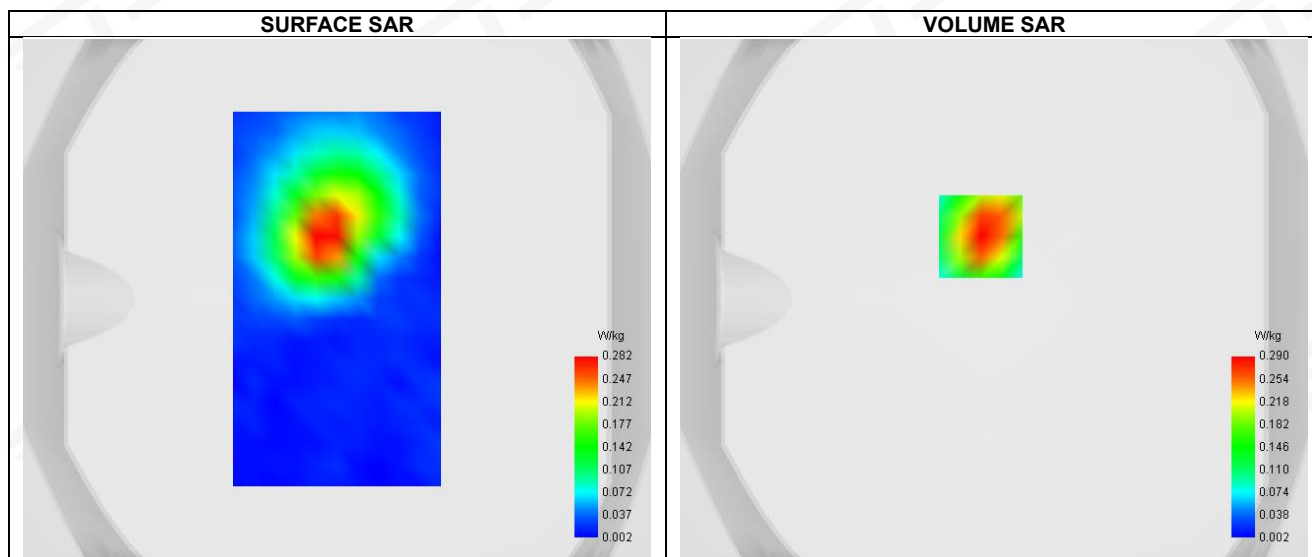**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.096
SAR 1g (W/Kg)	0.232
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	32.659572

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	0.446	0.290	0.070	0.052	0.023	0.010	0.005

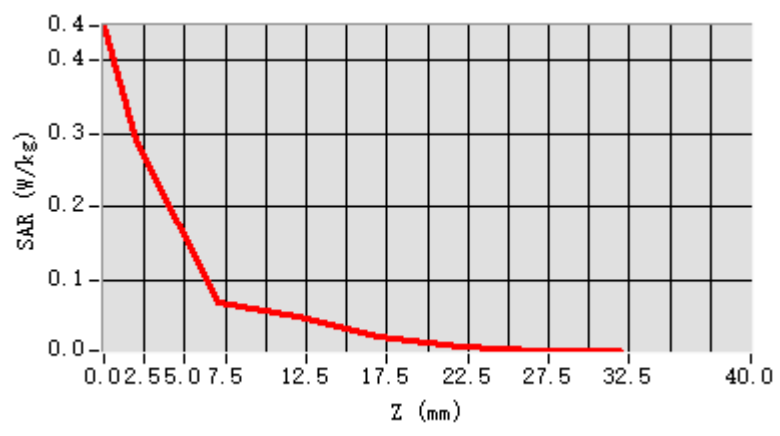

F. 3D Image

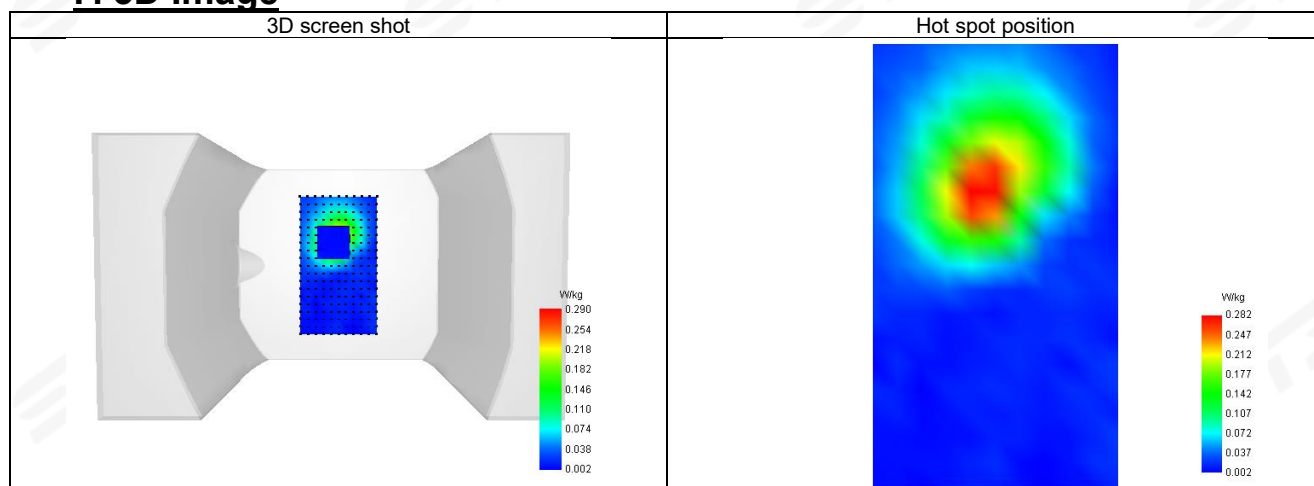



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※