

#4

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels/Frequency	Middle (661)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

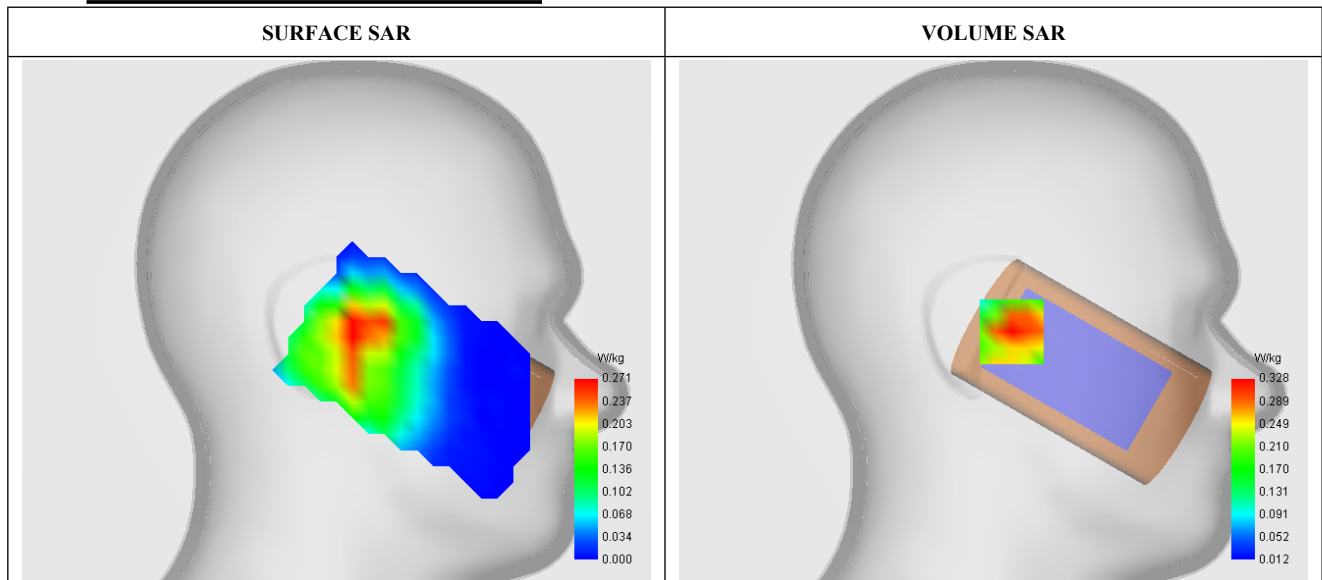


Maximum location: X=-9.00, Y=-5.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.192
SAR 1g (W/Kg)	0.313
Variation (%)	-1.530
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	63.719512

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.488	0.328	0.209	0.159	0.115	0.086	0.063

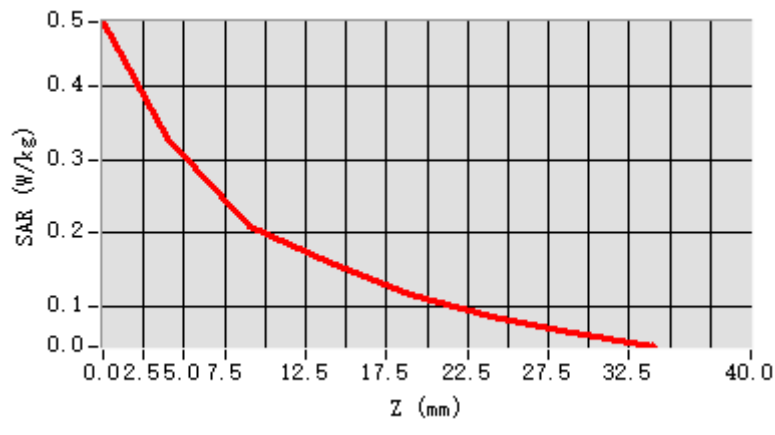

F. 3D Image

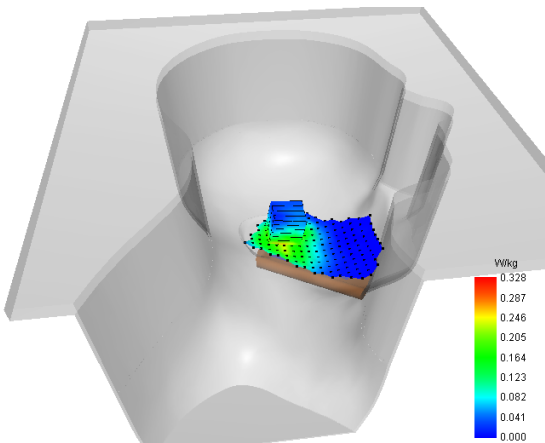3D screen shot	Hot spot position
	

#5

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels/Frequency	Middle (661)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

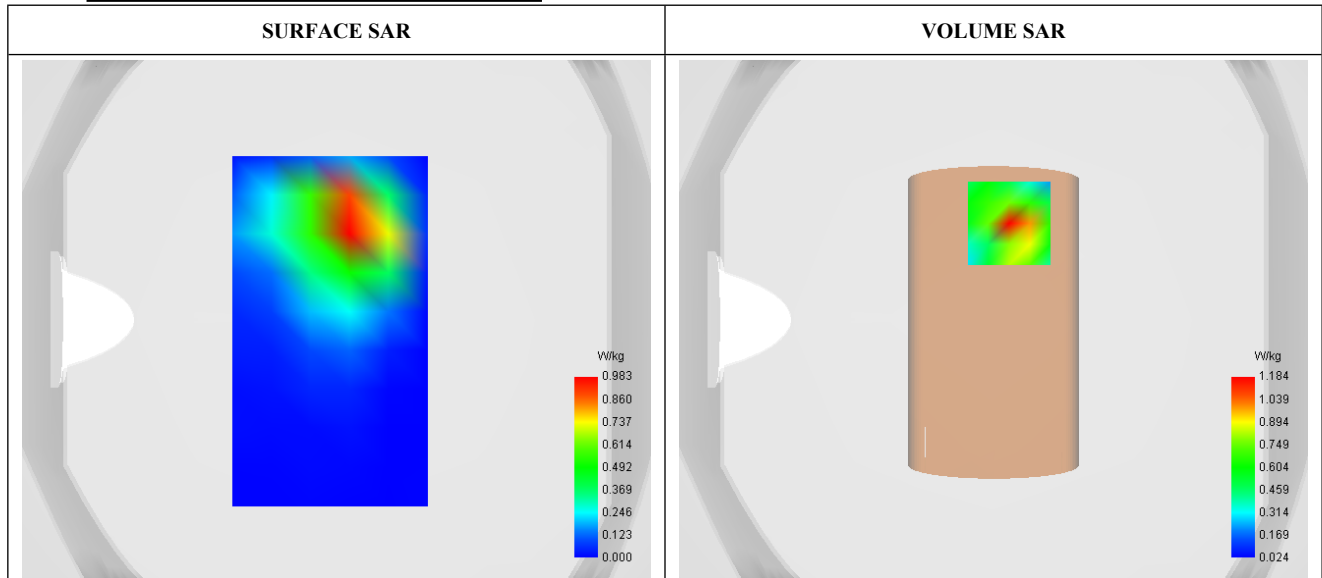


Maximum location: X=6.00, Y=37.00 ; SAR Peak: 2.08 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.498
SAR 1g (W/Kg)	1.065
Variation (%)	0.830
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	46.283784

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.116	1.184	0.548	0.321	0.197	0.115	0.085

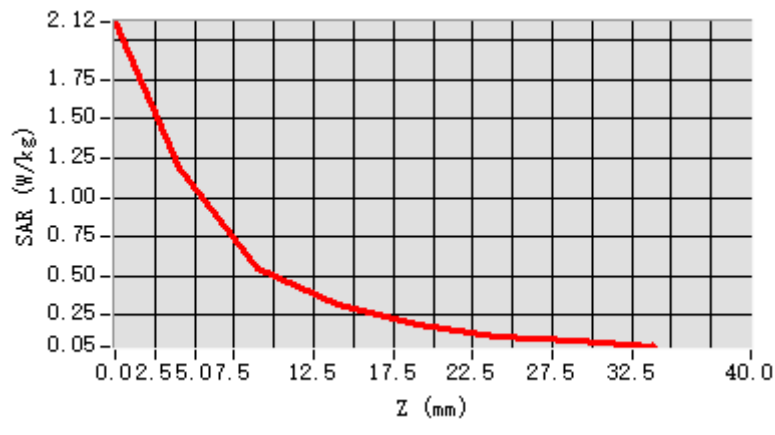

F. 3D Image

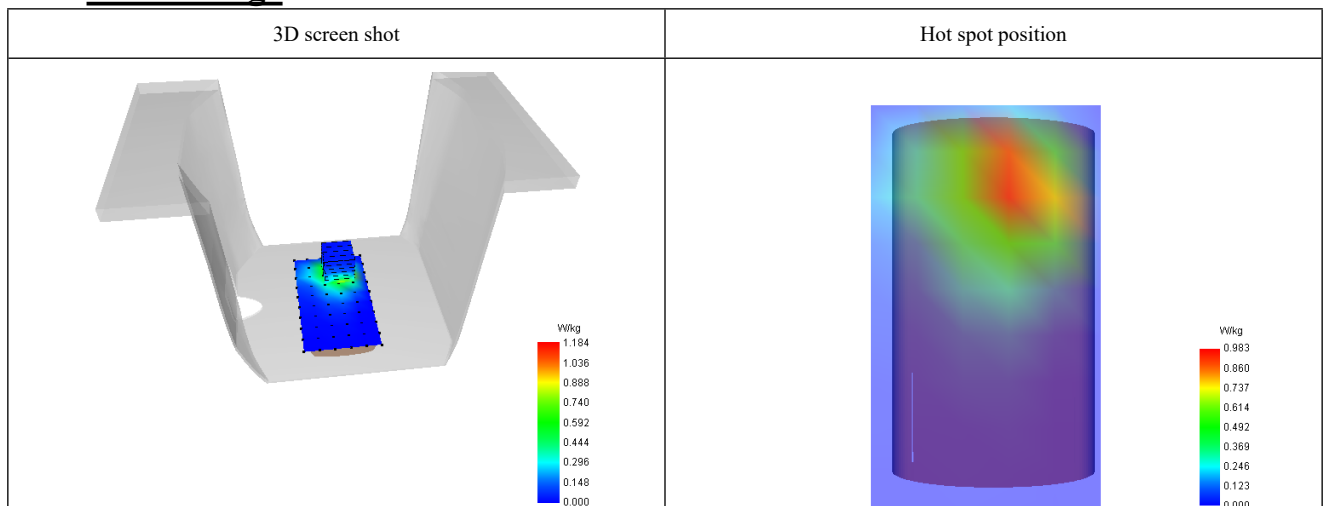

#6

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels/Frequency	Middle (661)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

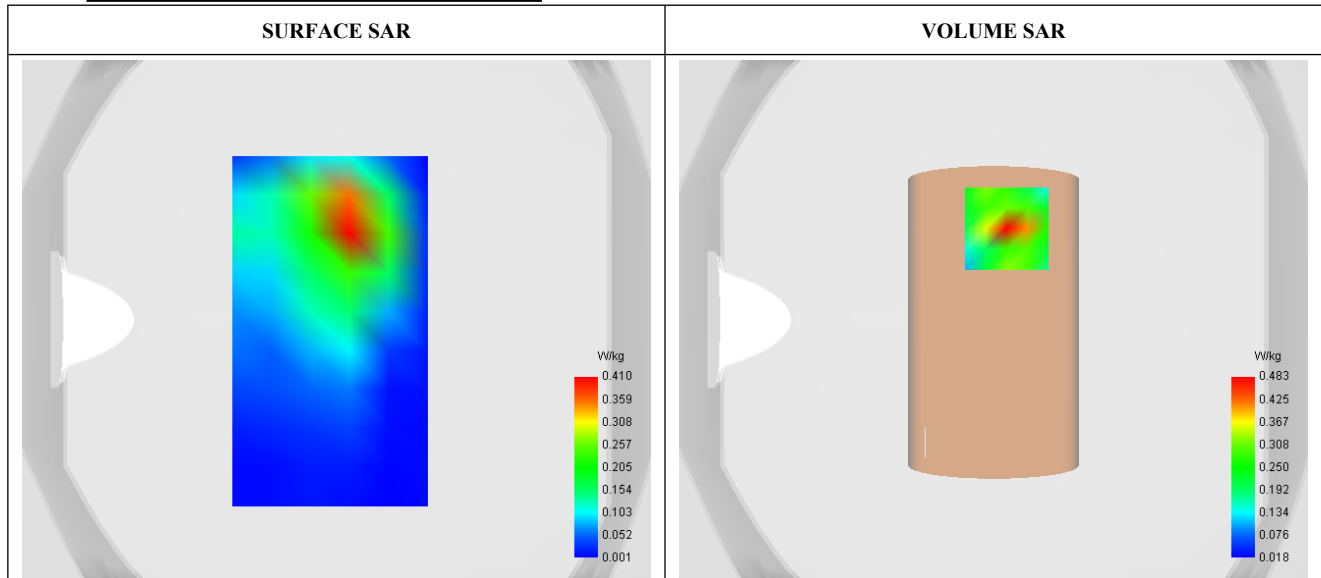


Maximum location: X=5.00, Y=35.00 ; SAR Peak: 0.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.220
SAR 1g (W/Kg)	0.425
Variation (%)	3.390
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	54.865424

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.792	0.483	0.265	0.179	0.120	0.081	0.056

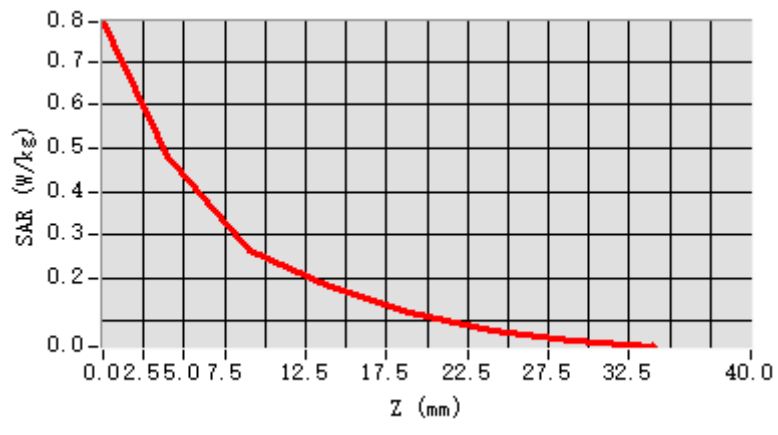

F. 3D Image

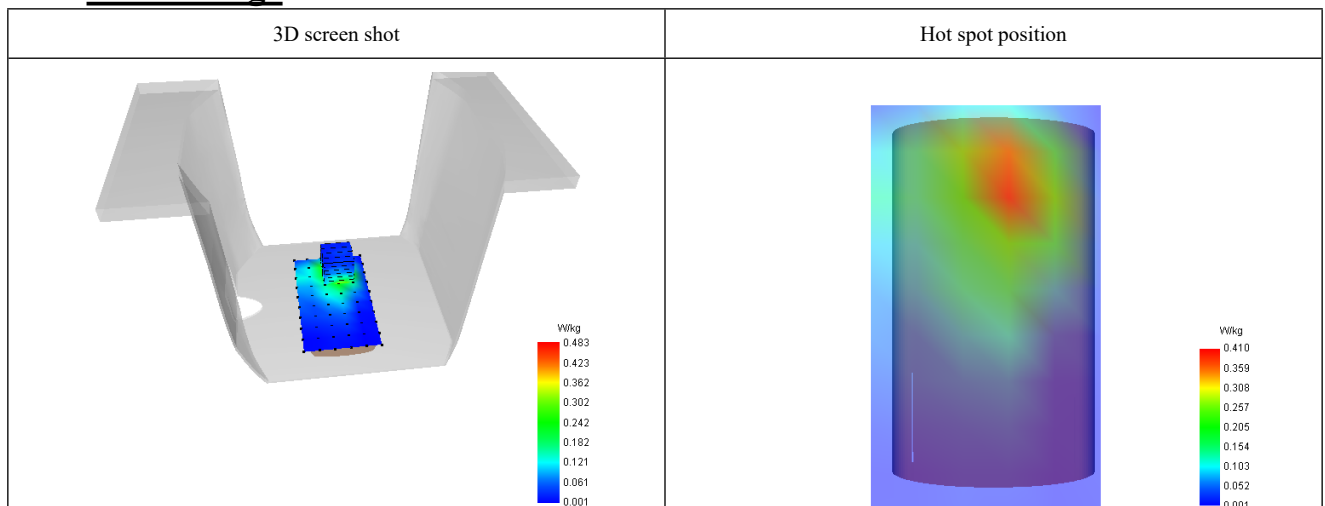

#7

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

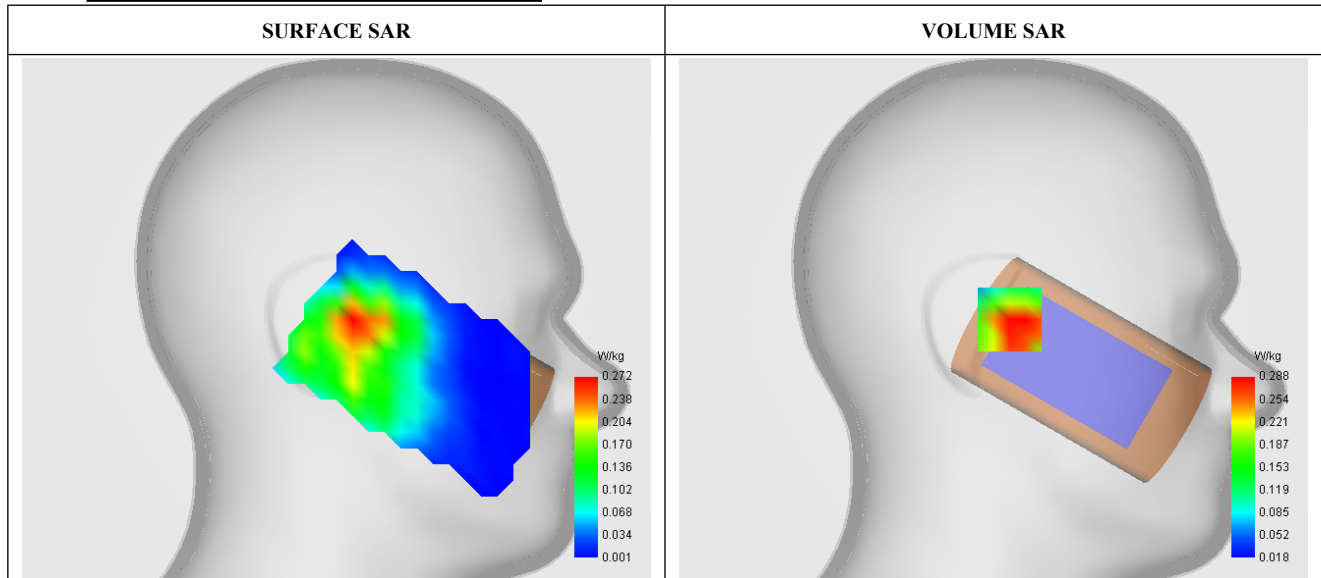


Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.45 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.165
SAR 1g (W/Kg)	0.270
Variation (%)	1.580
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.819444

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.474	0.288	0.155	0.139	0.076	0.082	0.051

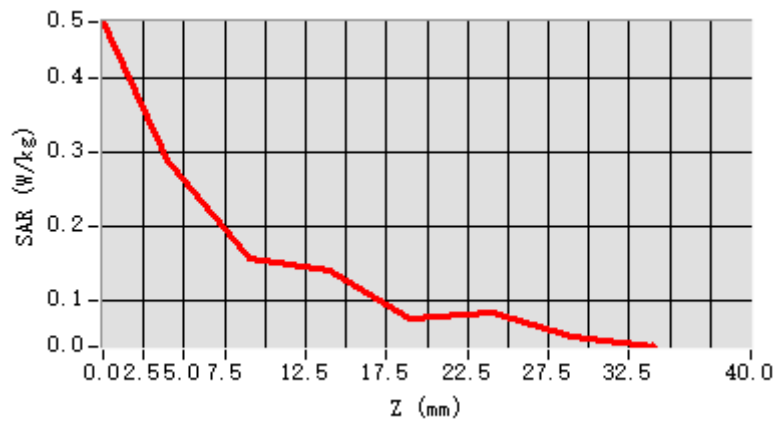

F. 3D Image

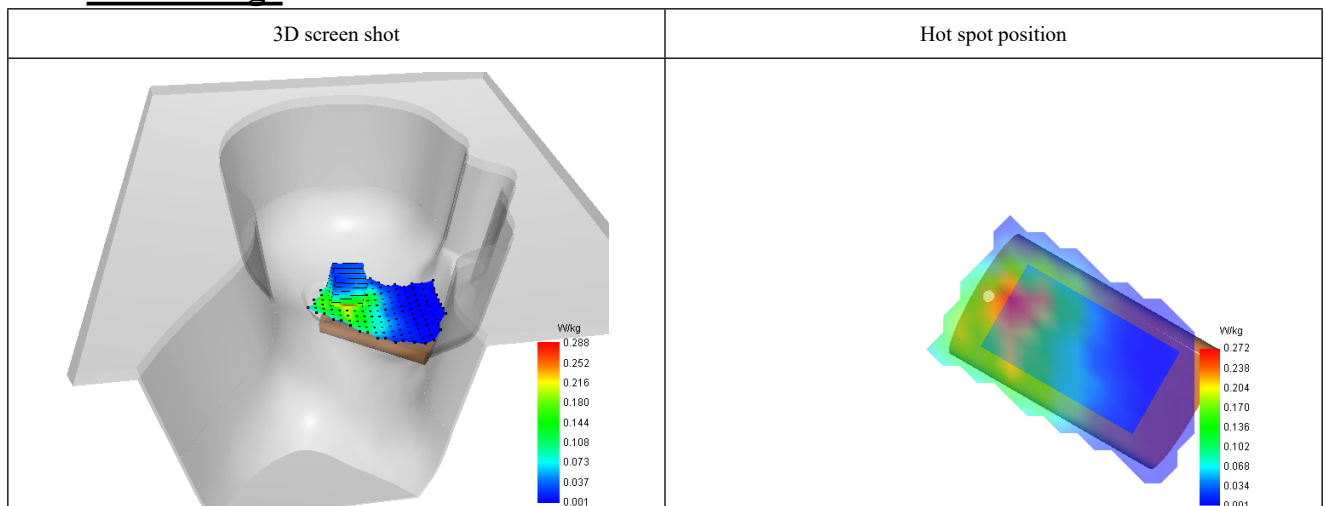

#8

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

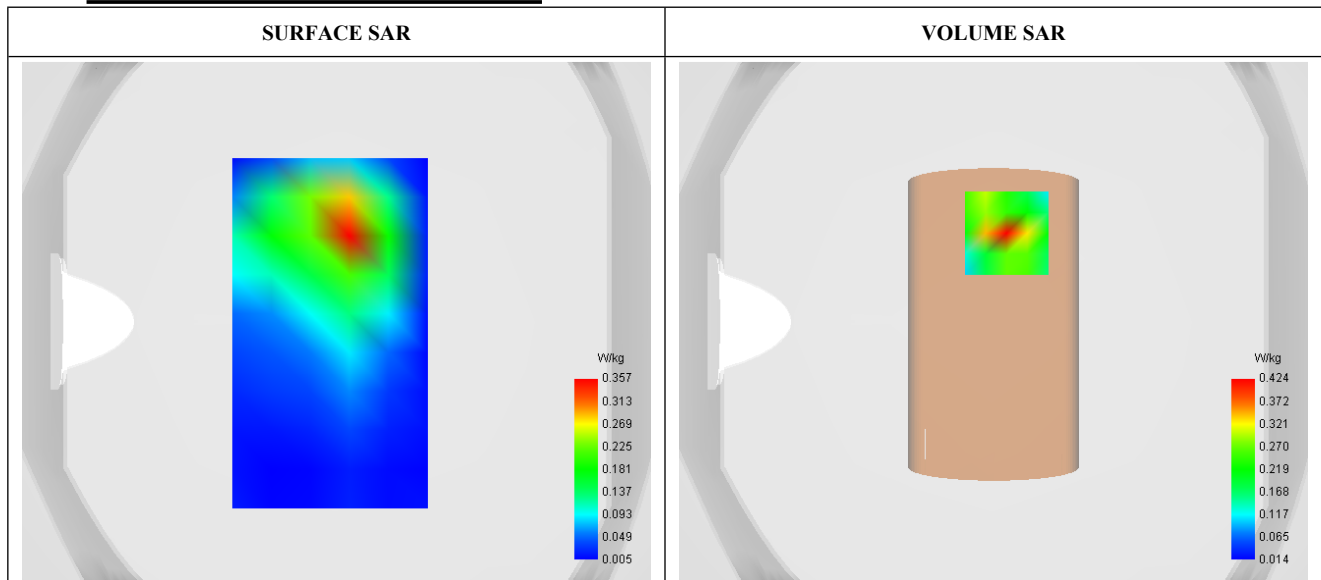


Maximum location: X=5.00, Y=34.00 ; SAR Peak: 0.75 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.186
SAR 1g (W/Kg)	0.378
Variation (%)	-1.890
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	48.820755

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.765	0.424	0.207	0.153	0.111	0.069	0.051

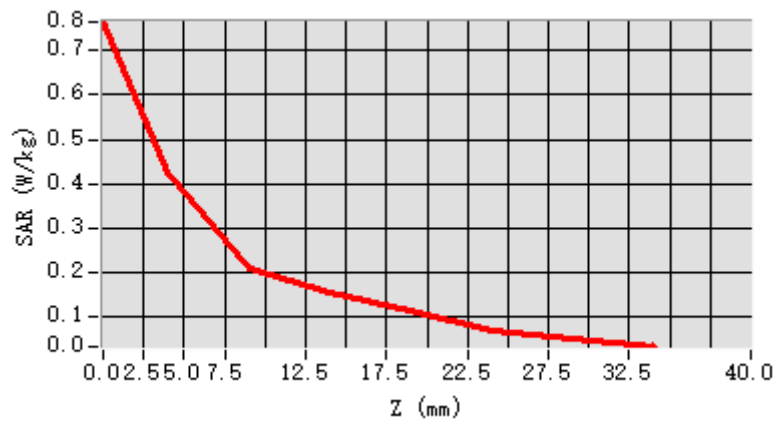

F. 3D Image

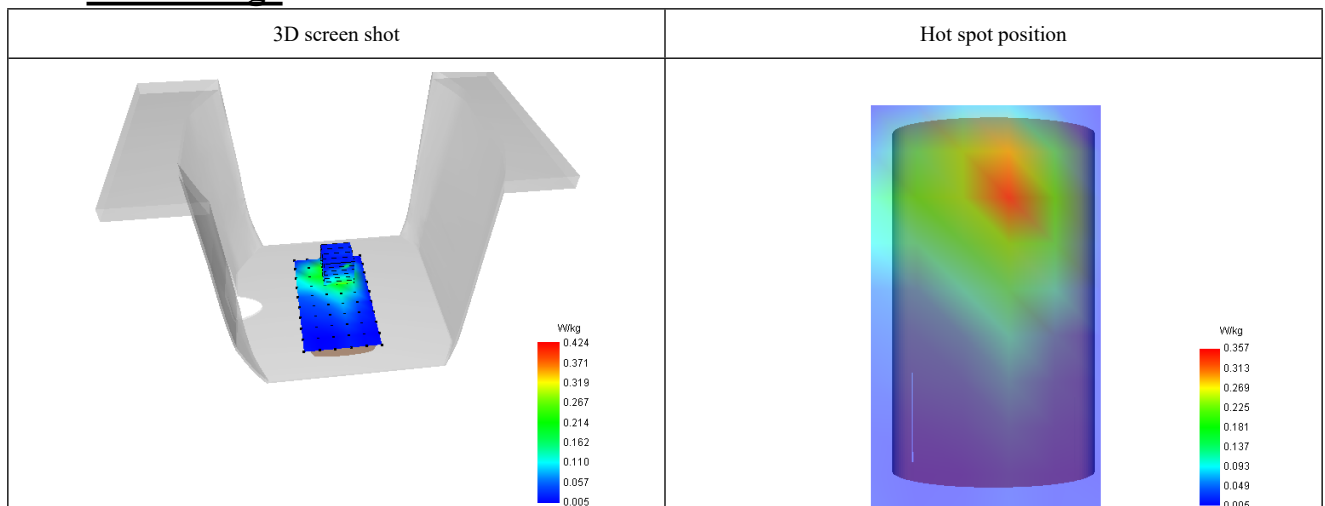

#9

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

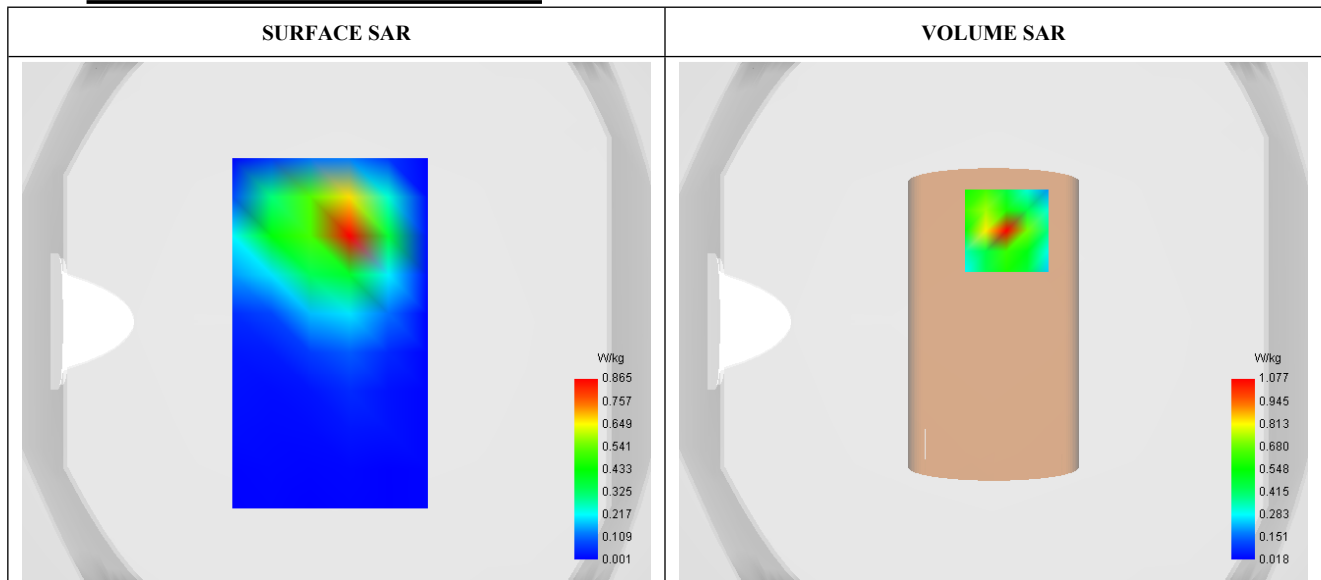


Maximum location: X=5.00, Y=35.00 ; SAR Peak: 2.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.425
SAR 1g (W/Kg)	0.945
Variation (%)	-2.710
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	44.289694

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.029	1.077	0.477	0.293	0.210	0.117	0.080

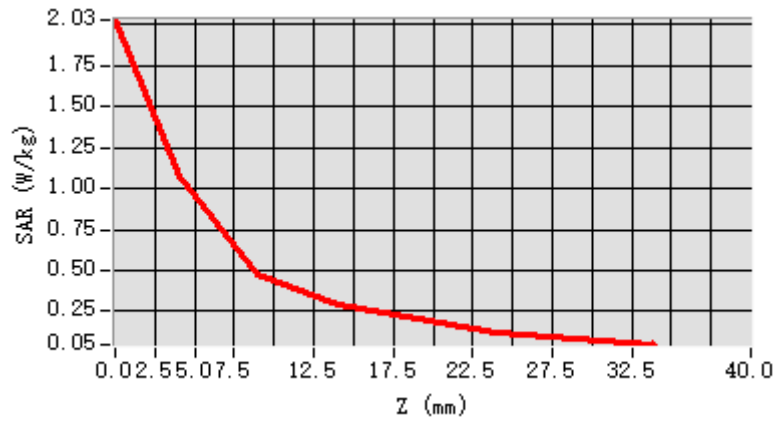

F. 3D Image

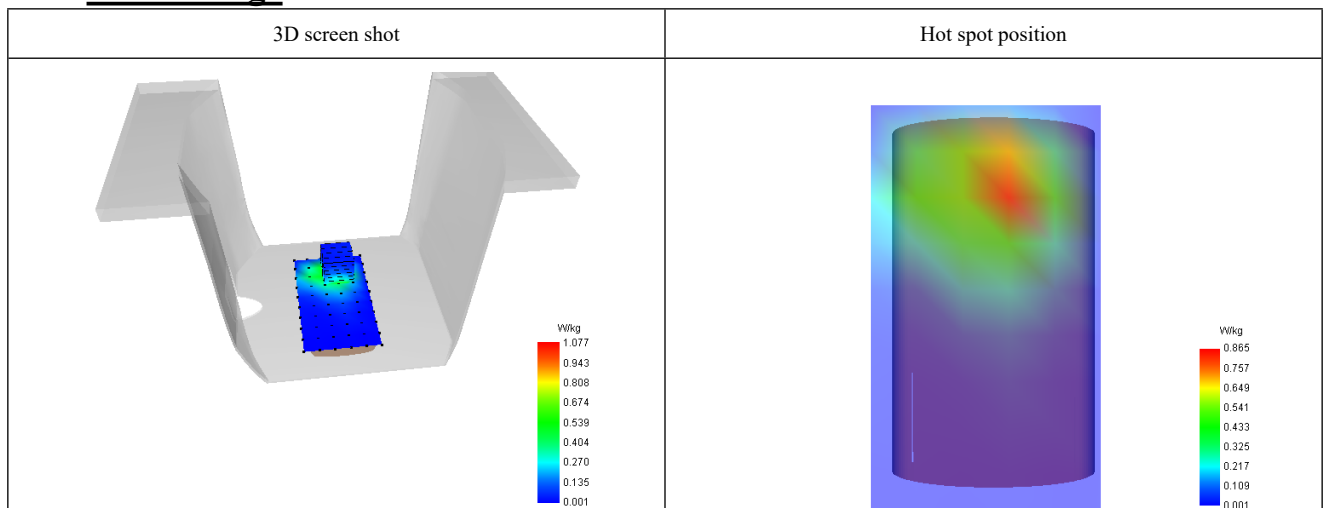

#10

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

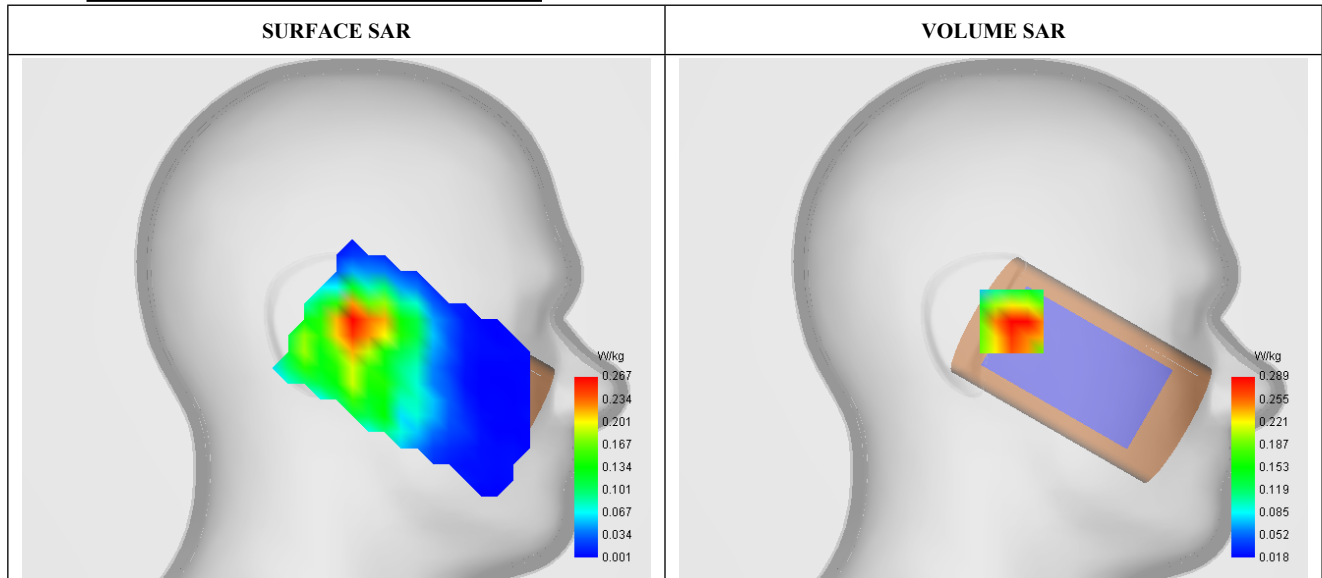


Maximum location: X=-9.00, Y=-1.00 ; SAR Peak: 0.43 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.270
Variation (%)	3.690
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	63.321799

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.422	0.289	0.183	0.135	0.093	0.069	0.053

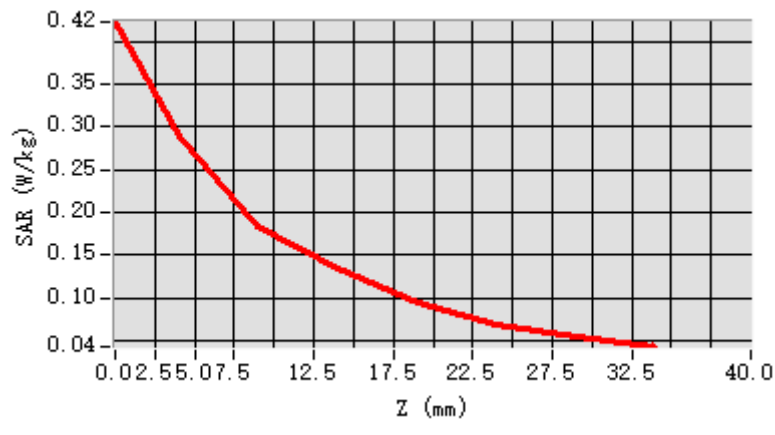

F. 3D Image

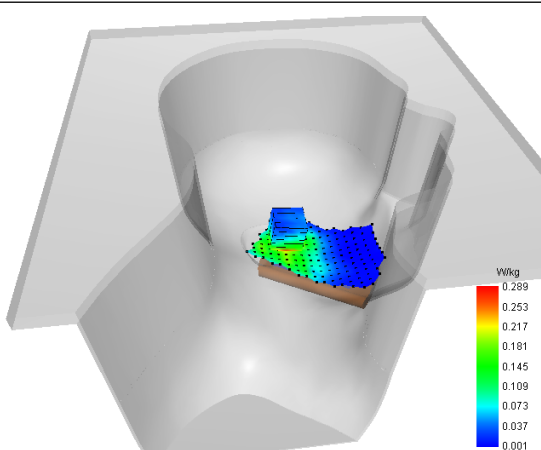3D screen shot	Hot spot position
	

#11

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

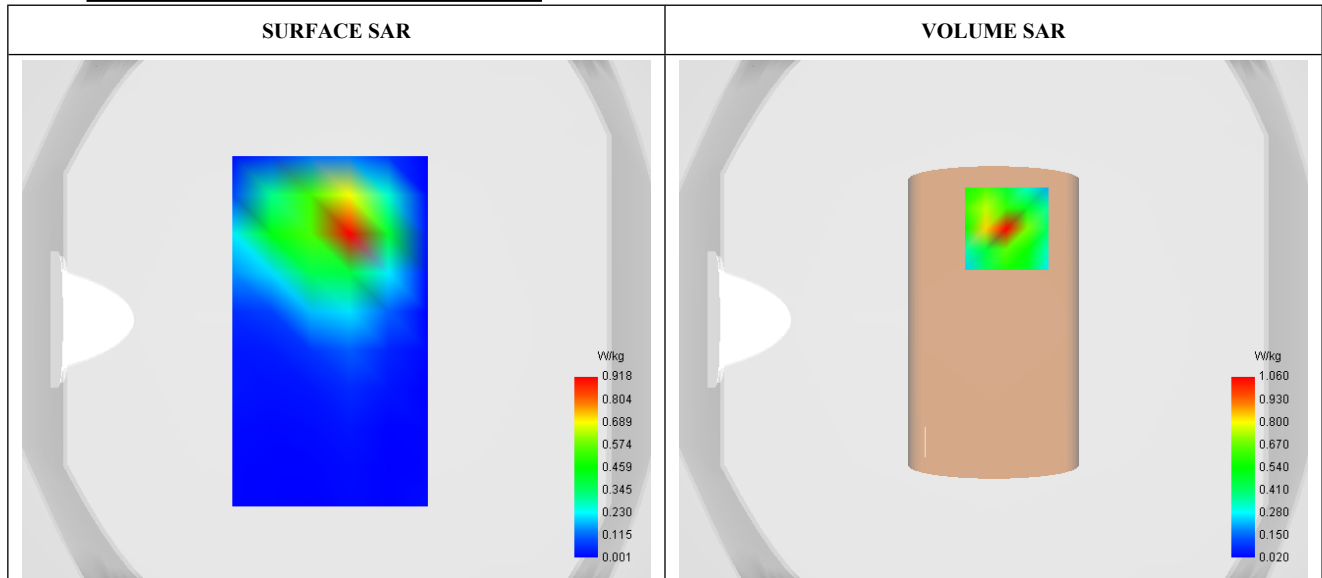


Maximum location: X=5.00, Y=35.00 ; SAR Peak: 2.03 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.434
SAR 1g (W/Kg)	0.950
Variation (%)	-0.130
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	41.886792

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.064	1.060	0.444	0.286	0.212	0.129	0.090

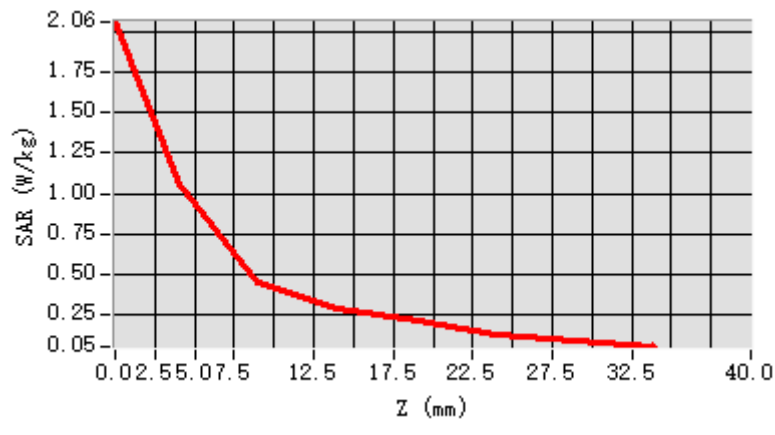

F. 3D Image

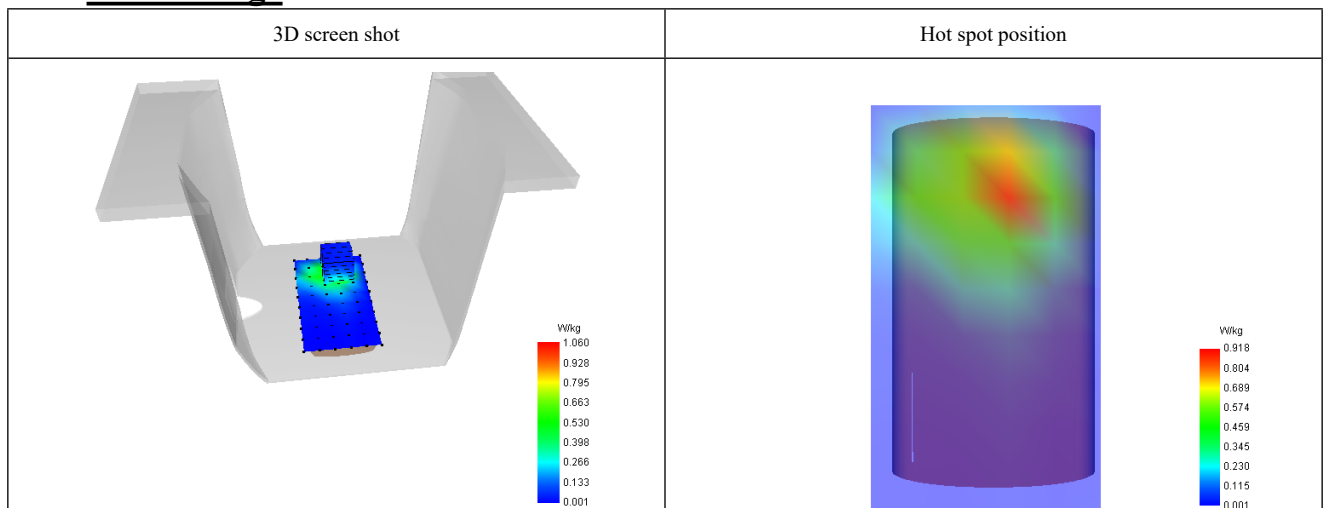

#12

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

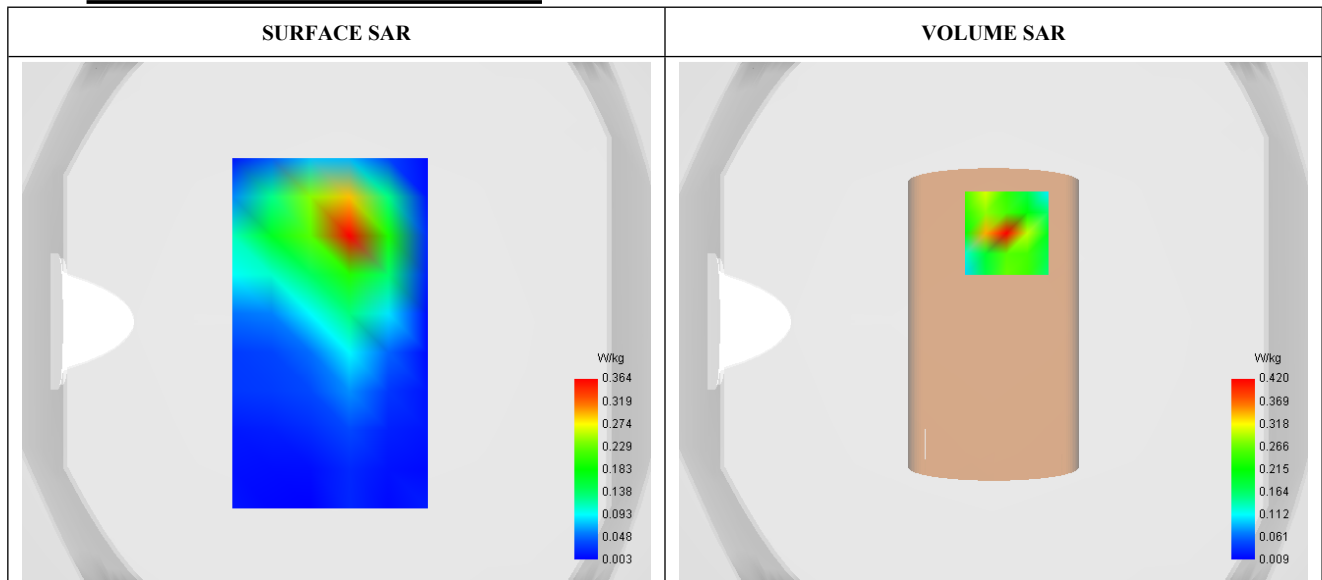


Maximum location: X=5.00, Y=34.00 ; SAR Peak: 0.76 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.190
SAR 1g (W/Kg)	0.379
Variation (%)	-0.690
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	49.523810

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.769	0.420	0.208	0.155	0.122	0.076	0.054

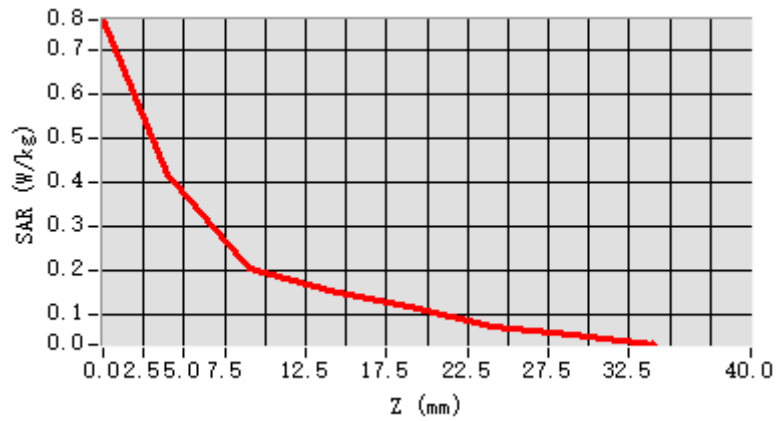

F. 3D Image

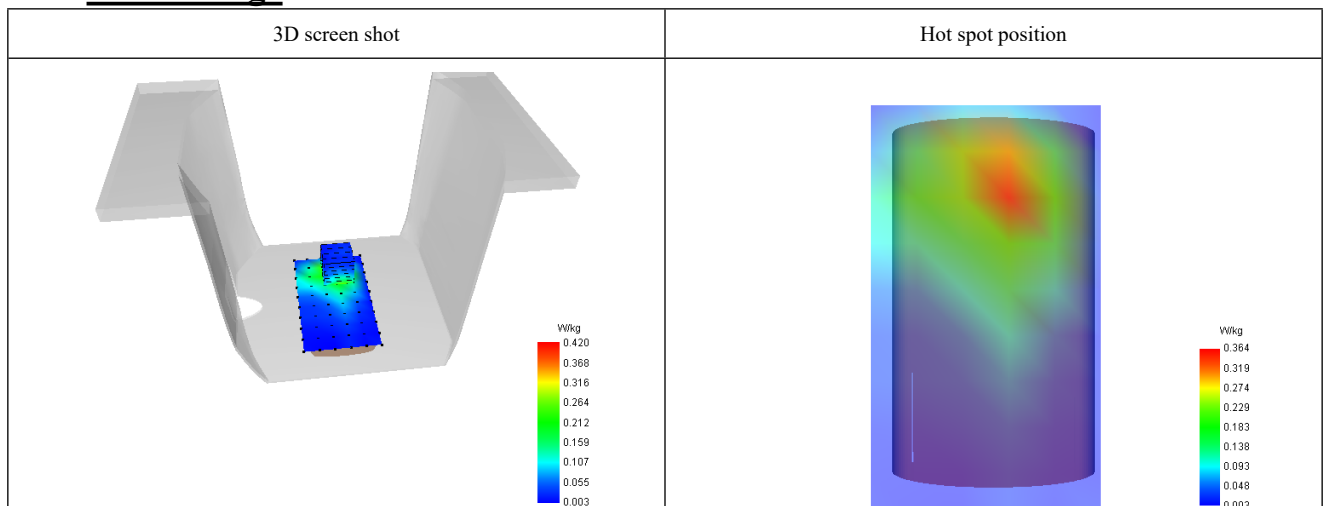

#13

Date of measurement: 13/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

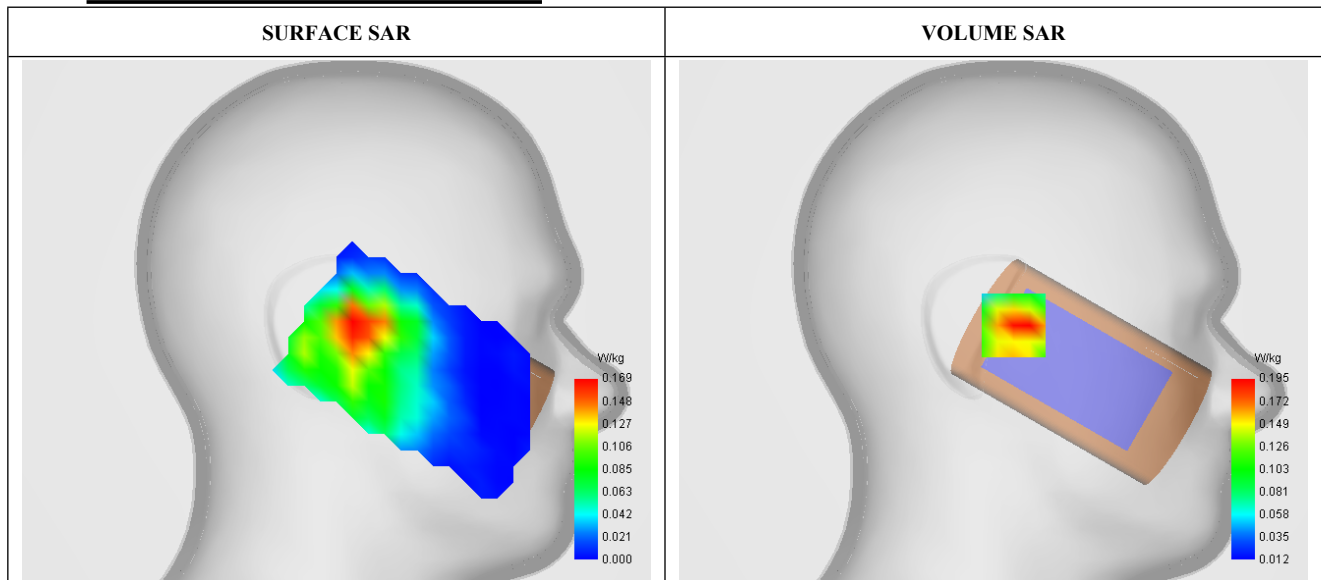


Maximum location: X=-10.00, Y=-2.00 ; SAR Peak: 0.31 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.185
Variation (%)	3.880
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.820513

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.333	0.195	0.103	0.100	0.053	0.056	0.028

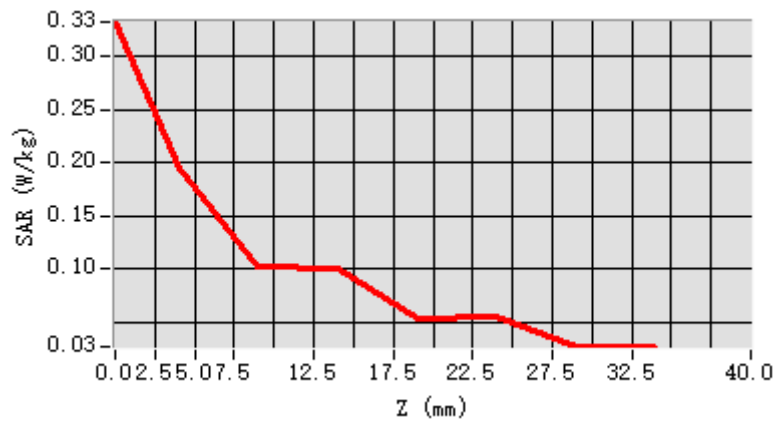

F. 3D Image

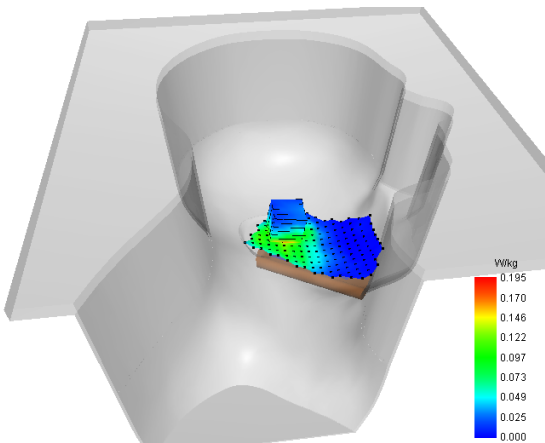3D screen shot	Hot spot position
	

#14

Date of measurement: 13/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

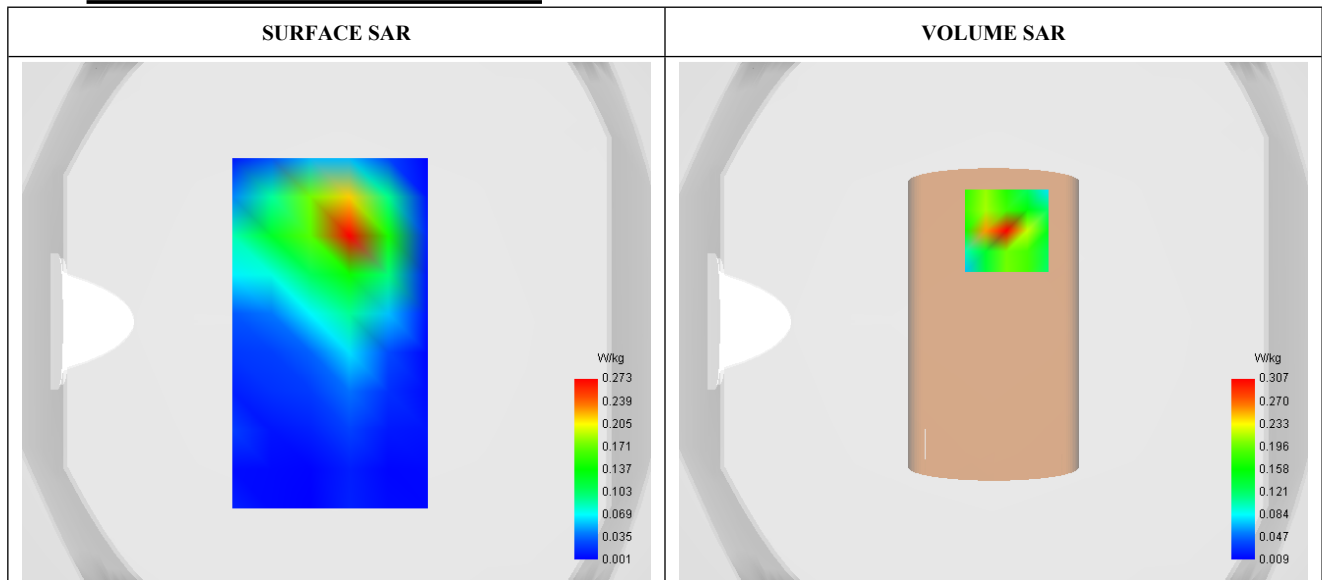


Maximum location: X=5.00, Y=35.00 ; SAR Peak: 0.55 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.278
Variation (%)	-3.480
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	49.185668

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.563	0.307	0.151	0.113	0.087	0.056	0.040

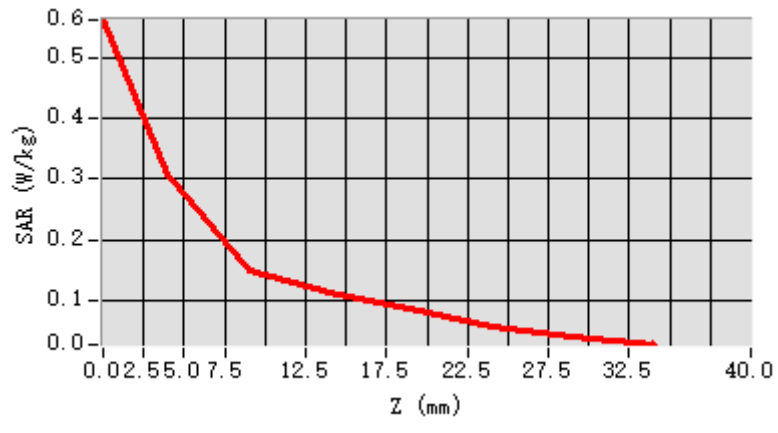

F. 3D Image

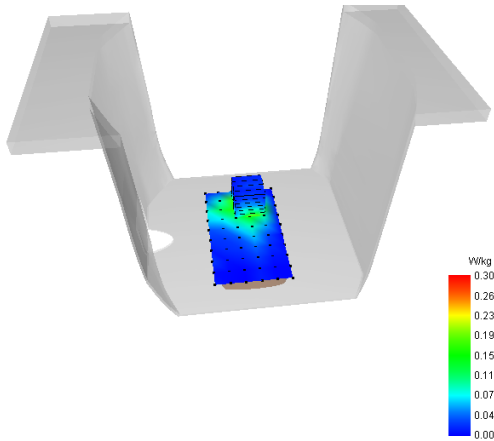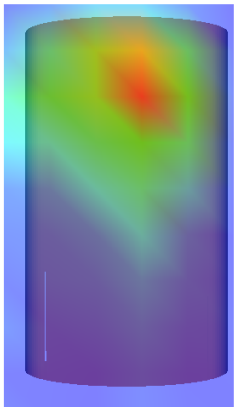3D screen shot	Hot spot position
	

#15

Date of measurement: 13/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

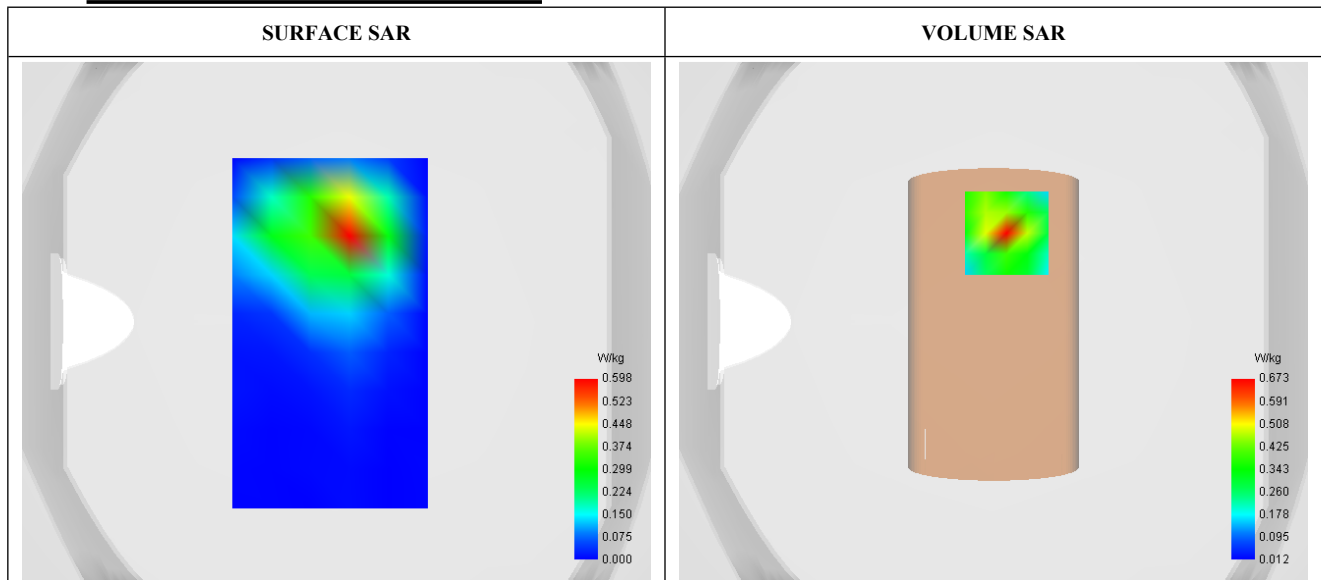


Maximum location: X=5.00, Y=34.00 ; SAR Peak: 1.23 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.280
SAR 1g (W/Kg)	0.601
Variation (%)	0.330
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	45.022288

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.254	0.673	0.303	0.183	0.133	0.081	0.058

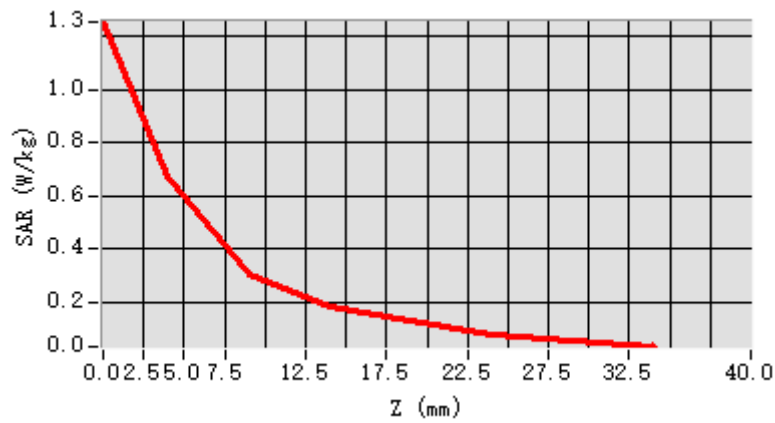

F. 3D Image

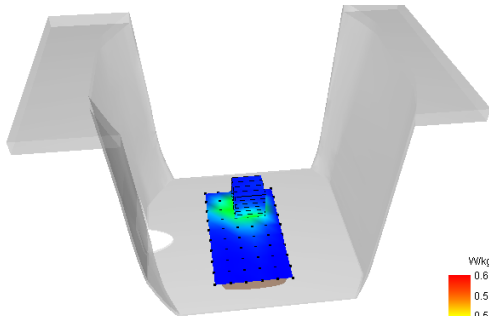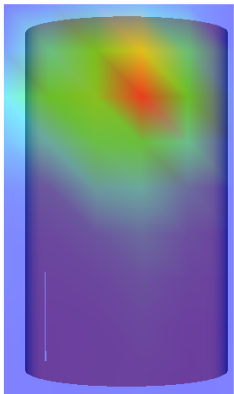3D screen shot	Hot spot position
	

#16

Date of measurement: 20/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.44
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	ISM
Channels/Frequency	Low (1)/ frequency 2412.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2412.00
Relative permittivity (real part)	39.224
Relative permittivity (imaginary part)	13.205
Conductivity (S/m)	1.769

C. SAR Surface and Volume

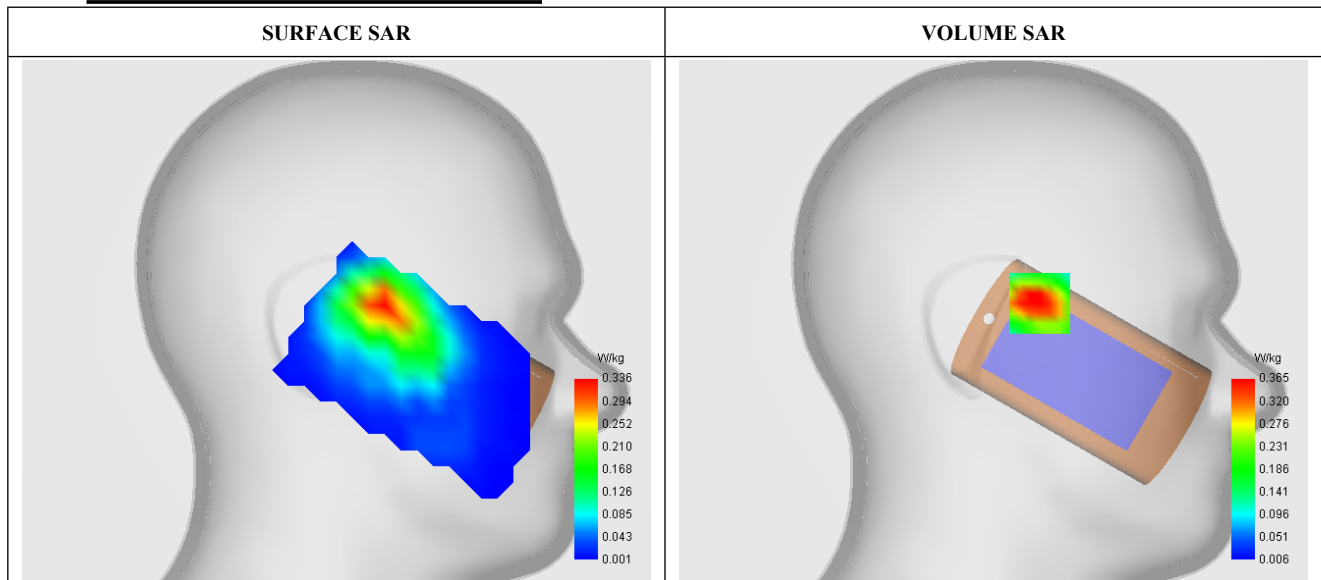


Maximum location: X=-23.00, Y=9.00 ; SAR Peak: 0.61 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.182
SAR 1g (W/Kg)	0.344
Variation (%)	4.110
Horizontal validation criteria: minimum distance (mm)	15.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	69.315068

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.473	0.365	0.253	0.119	0.092	0.052	0.038

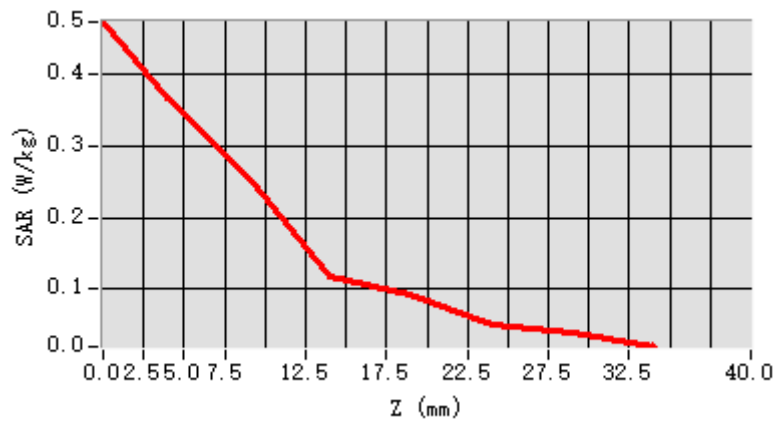

F. 3D Image

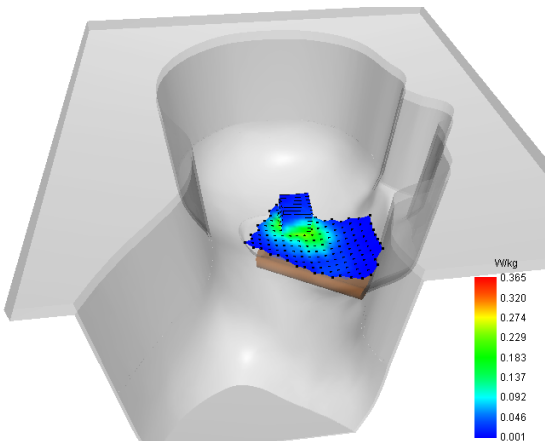3D screen shot	Hot spot position
	

#17

Date of measurement: 20/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.44
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Low (1)/ frequency 2412.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2412.00
Relative permittivity (real part)	39.224
Relative permittivity (imaginary part)	13.205
Conductivity (S/m)	1.769

C. SAR Surface and Volume

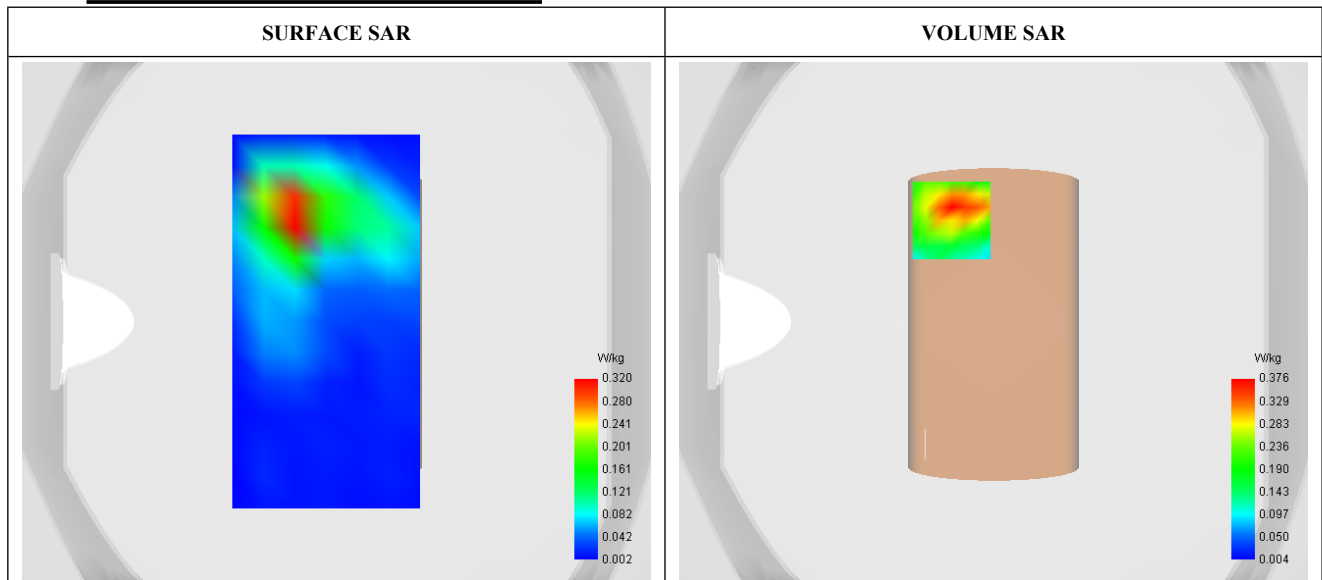


Maximum location: X=-16.00, Y=39.00 ; SAR Peak: 0.60 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.165
SAR 1g (W/Kg)	0.326
Variation (%)	2.590
Horizontal validation criteria: minimum distance (mm)	15.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	42.287234

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.727	0.376	0.159	0.085	0.064	0.024	0.013

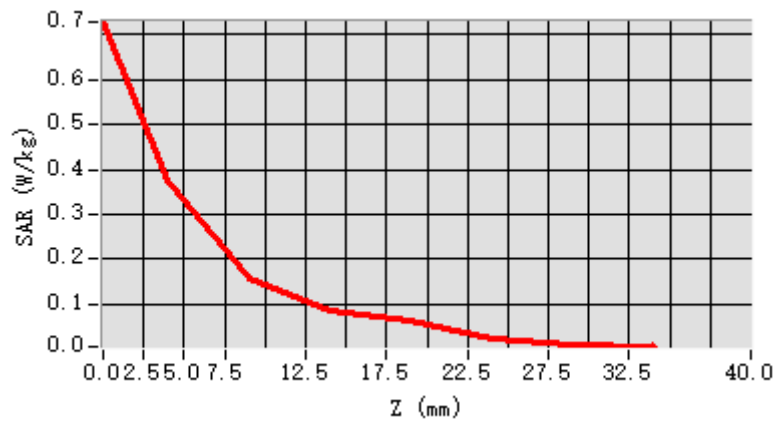

F. 3D Image

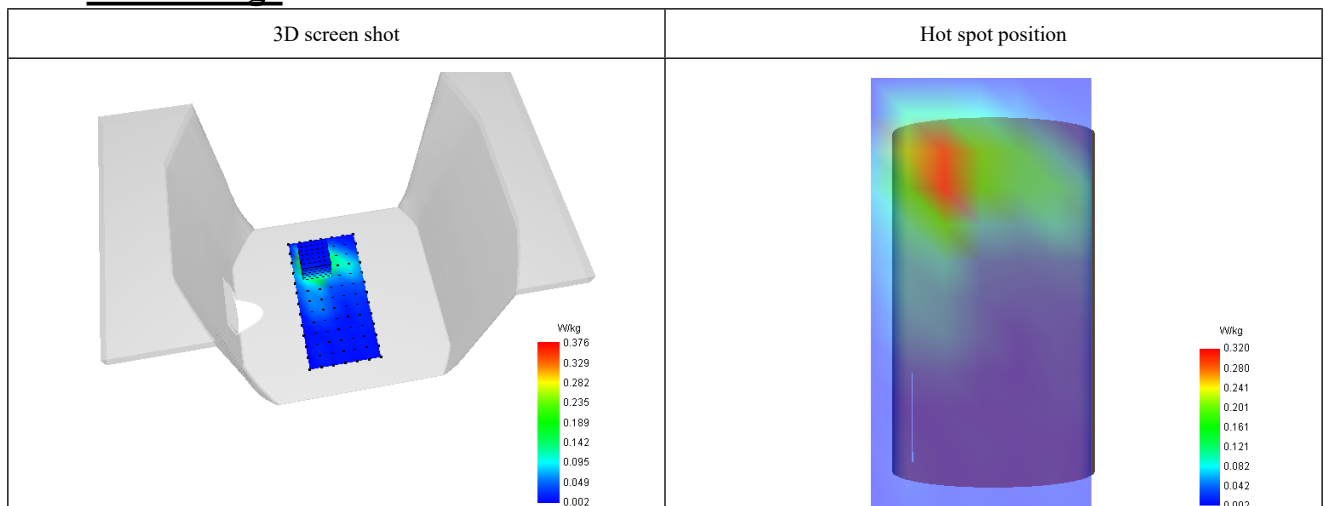

#18

Date of measurement: 20/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.44
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Low (1)/ frequency 2412.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2412.00
Relative permittivity (real part)	39.224
Relative permittivity (imaginary part)	13.205
Conductivity (S/m)	1.769

C. SAR Surface and Volume

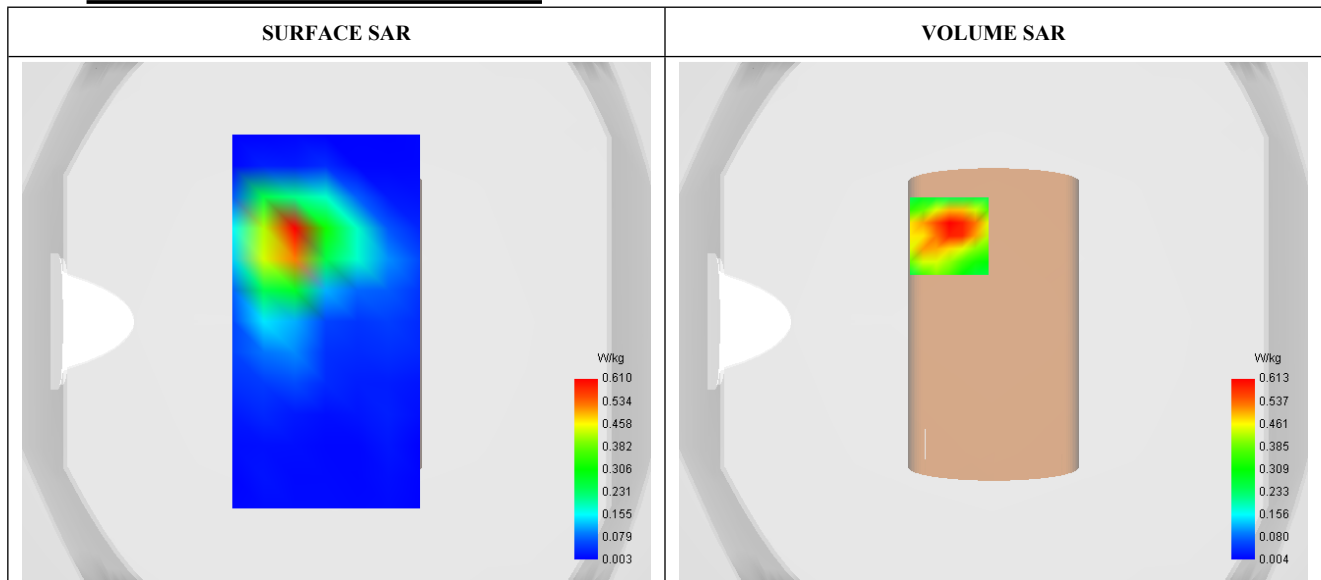


Maximum location: X=-17.00, Y=33.00 ; SAR Peak: 1.09 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.276
SAR 1g (W/Kg)	0.591
Variation (%)	1.430
Horizontal validation criteria: minimum distance (mm)	10.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	41.598695

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.182	0.613	0.255	0.088	0.098	0.031	0.040

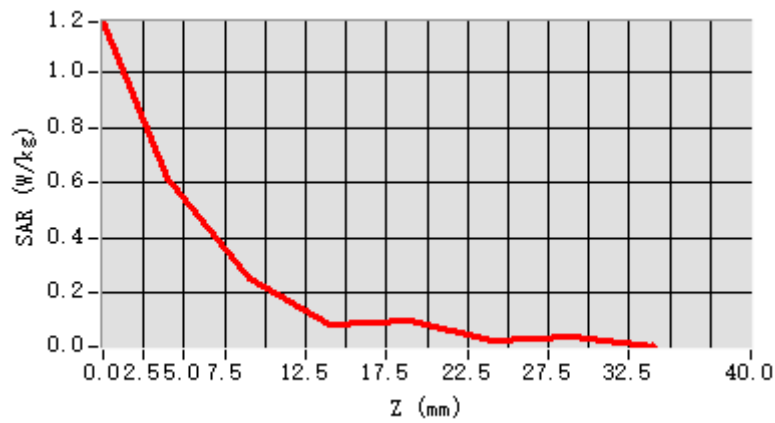

F. 3D Image

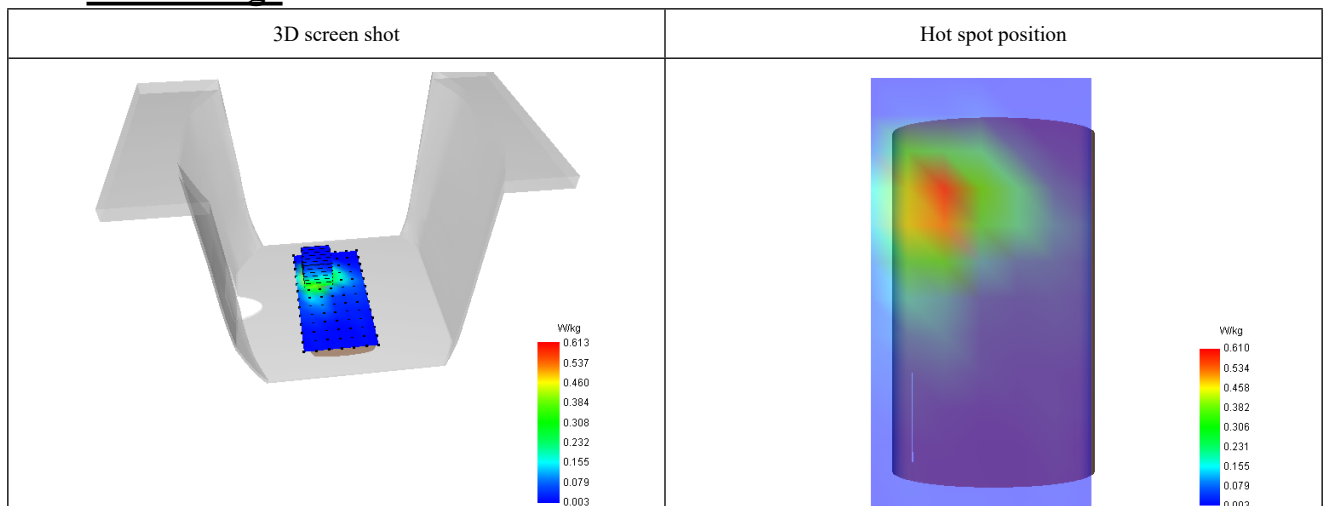

#19

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Channel Center [EARFCN] / Channel Center [MHz]	Middle (18900)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

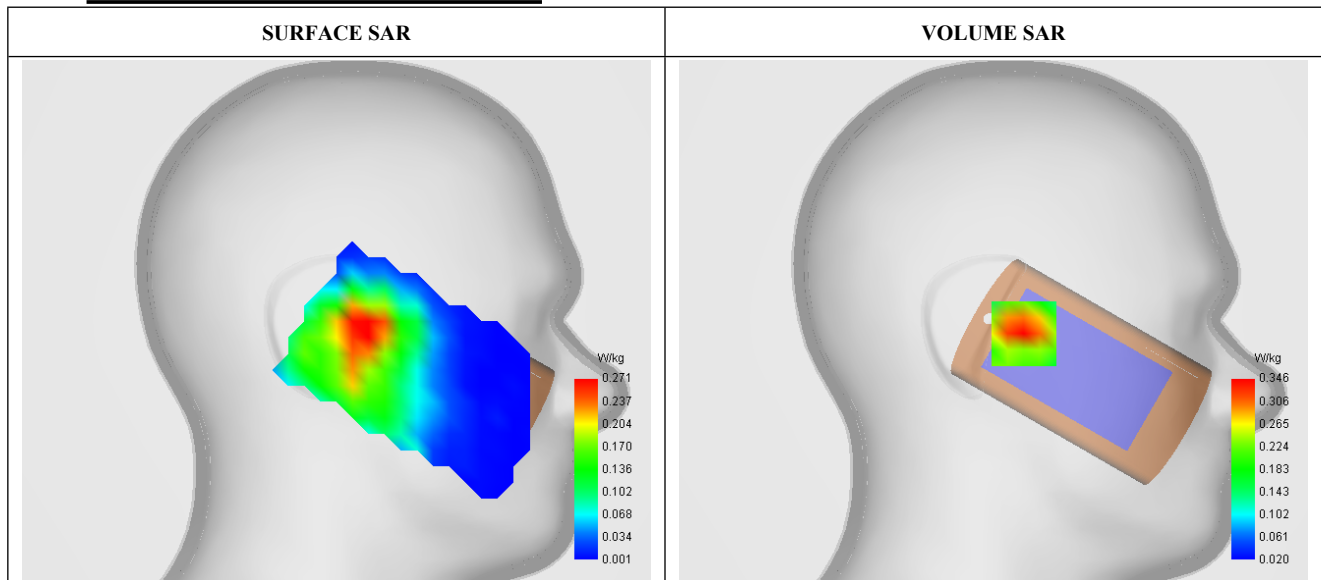


Maximum location: X=-15.00, Y=-6.00 ; SAR Peak: 0.54 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.205
SAR 1g (W/Kg)	0.339
Variation (%)	3.040
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	61.560694

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.543	0.346	0.213	0.169	0.124	0.097	0.069

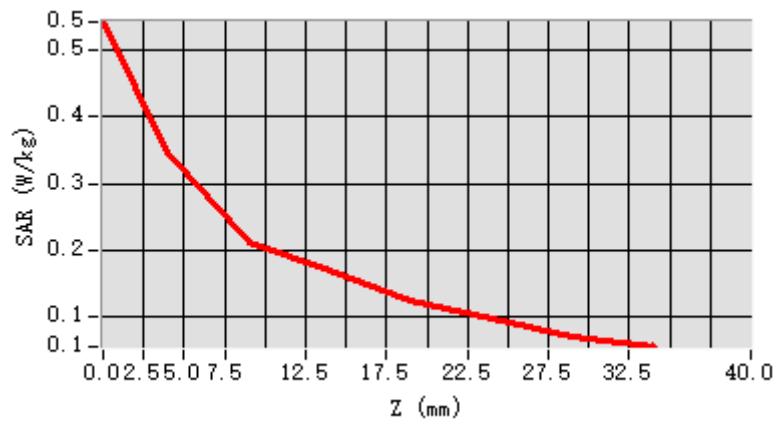

F. 3D Image

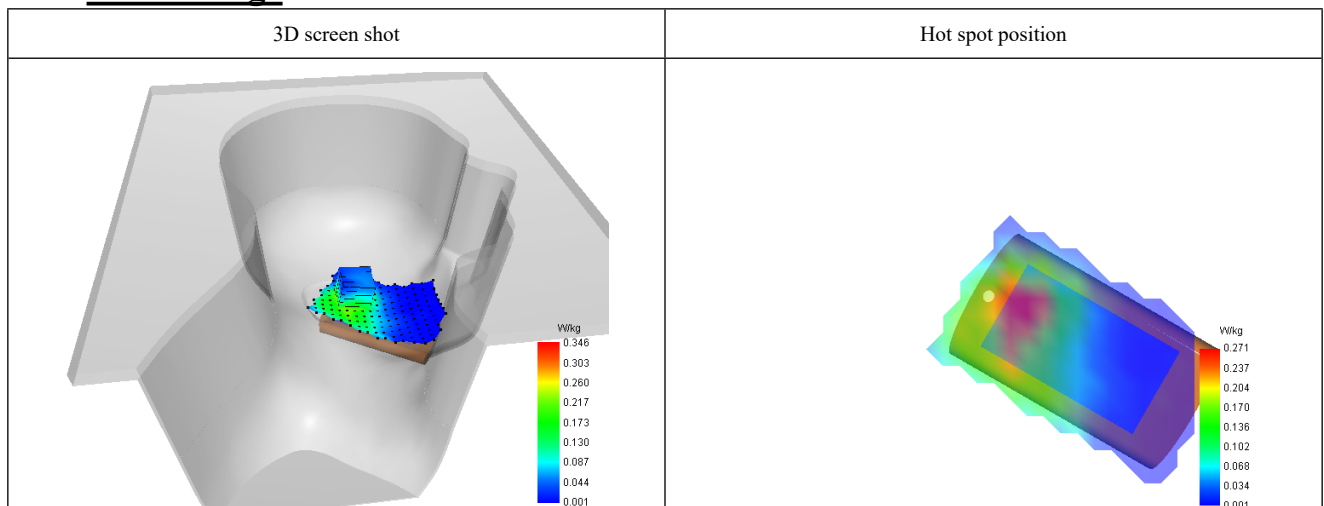

#20

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channel Center [EARFCN] / Channel Center [MHz]	Middle (18900)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

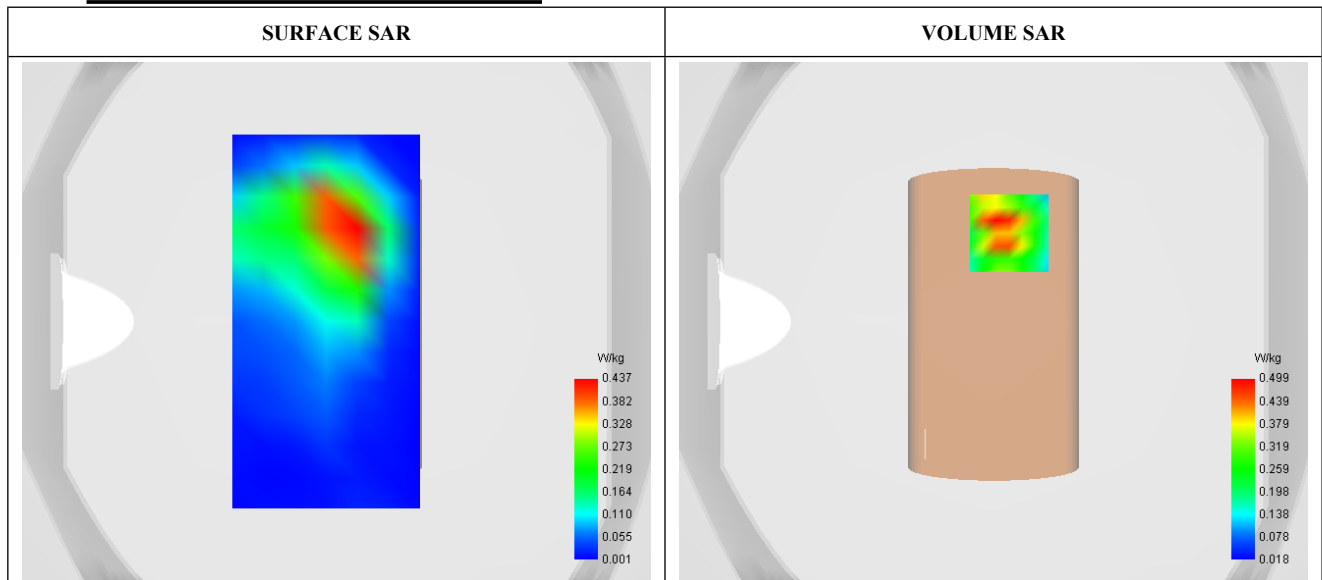


Maximum location: X=6.00, Y=34.00 ; SAR Peak: 0.83 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.247
SAR 1g (W/Kg)	0.433
Variation (%)	-3.430
Horizontal validation criteria: minimum distance (mm)	11.180340
Vertical validation criteria: SAR ratio M2/M1 (%)	54.909820

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.819	0.499	0.274	0.189	0.132	0.098	0.069

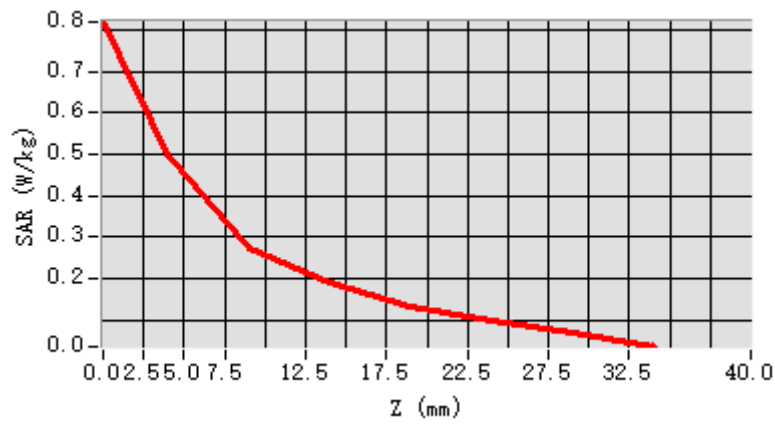

F. 3D Image

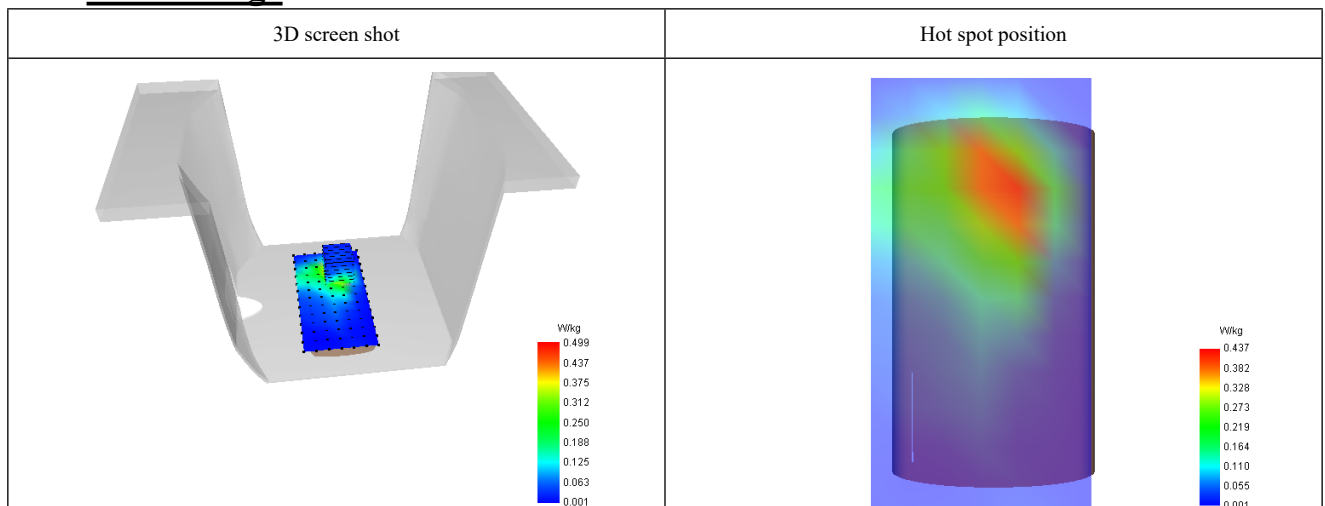

#21

Date of measurement: 15/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.20
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channel Center [EARFCN] / Channel Center [MHz]	Middle (18900)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

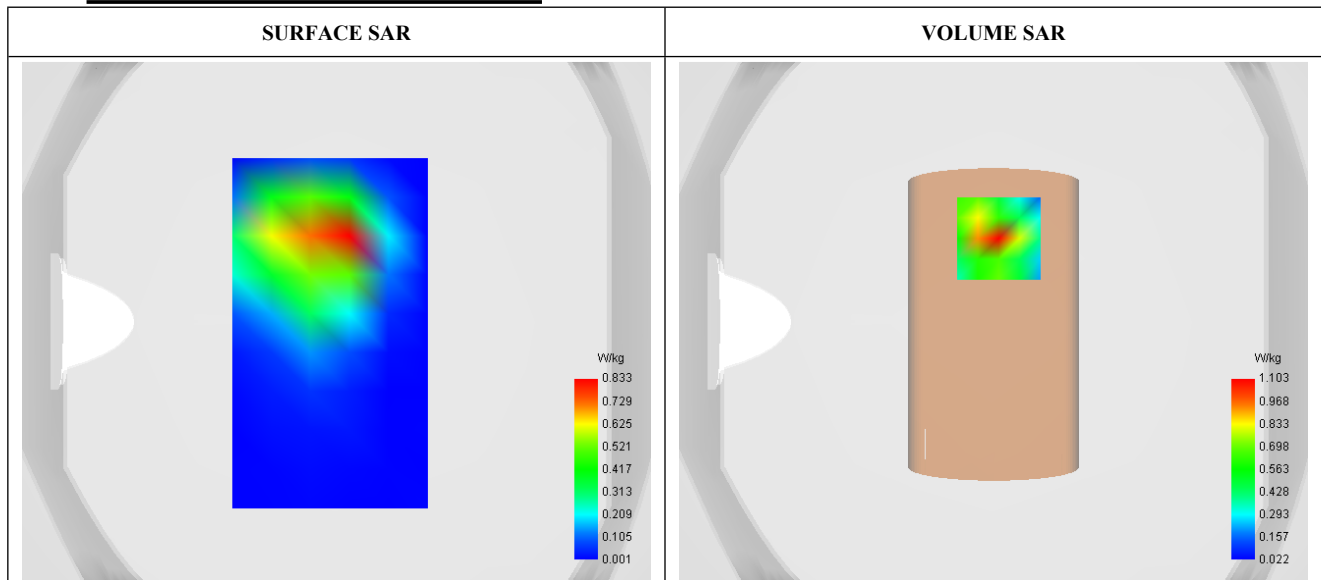


Maximum location: X=2.00, Y=32.00 ; SAR Peak: 2.03 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.470
SAR 1g (W/Kg)	0.999
Variation (%)	1.260
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	44.696283

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.050	1.103	0.493	0.339	0.223	0.140	0.101

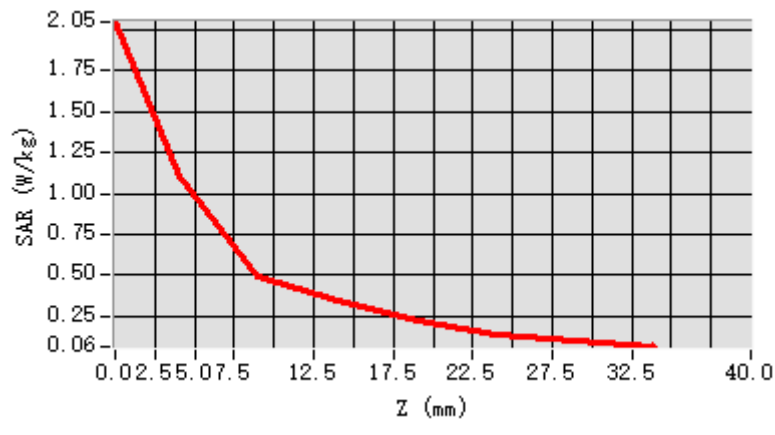

F. 3D Image

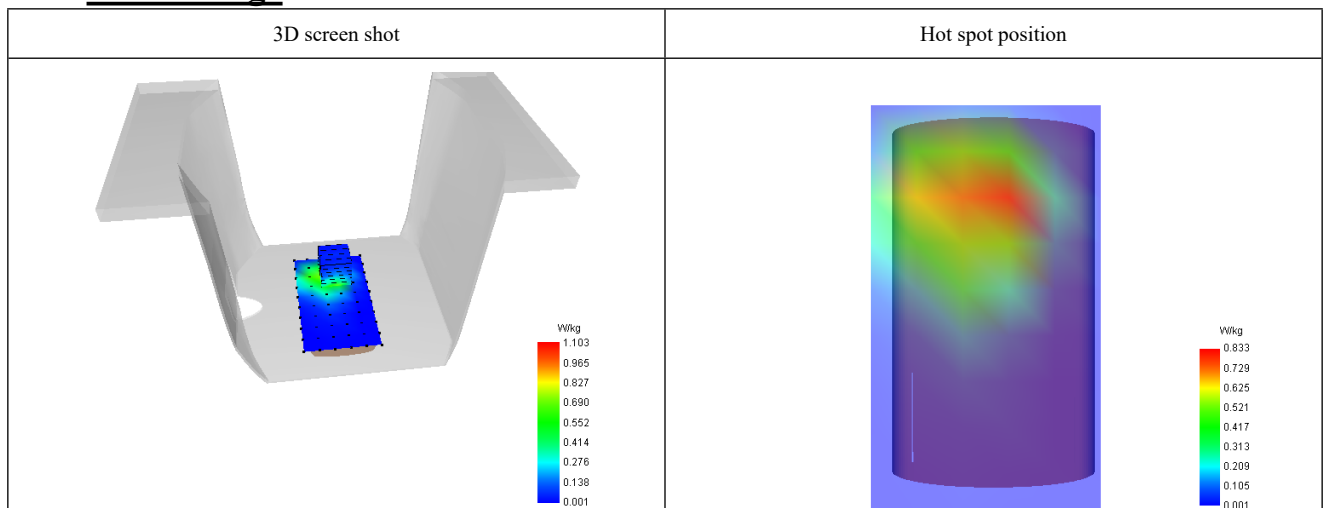

#22

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.01
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20175)/ frequency 1732.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.50
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

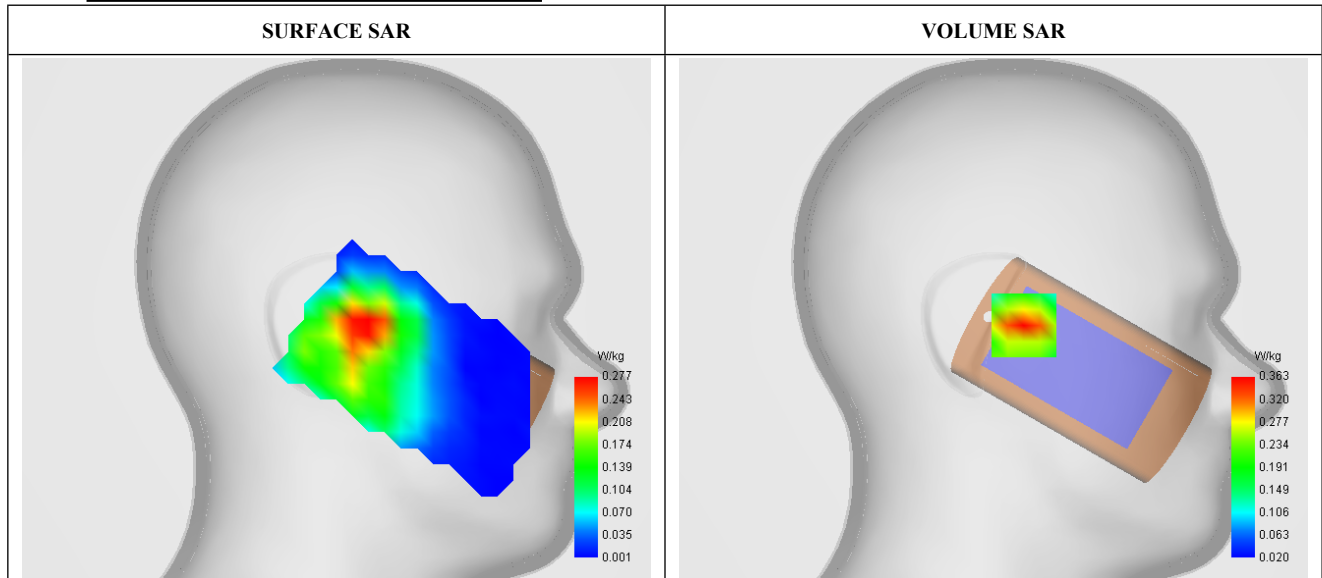

Maximum location: X=-15.00, Y=-3.00 ; SAR Peak: 0.56 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.204
SAR 1g (W/Kg)	0.343
Variation (%)	1.110
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	61.432507