

FCC CFR47 PART 27 CERTIFICATION TEST REPORT FCC ID: 2AOWK-5002

Product: 5G Smart Phone

Trade Mark: ulefone

Model Number: GQ5002

Family Model: Armor 12 5G, Armor 12T 5G, Armor 12P 5G,
Armor 12E 5G, Armor 12S 5G, Armor 10 5G,
Armor 11 5G, Armor 11T 5G, Armor 13 5G

Report No.: STR210706002007E

Prepared for

Shenzhen Gotron Electronic CO.,LTD.
7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen
City, Guangdong Province China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name.....: Shenzhen Gotron Electronic CO.,LTD.
Address.....: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China
Manufacturer's Name.....: Shenzhen Gotron Electronic CO.,LTD.
Address.....: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China
Product name.....: 5G Smart Phone
Model and/or type reference: GQ5002
Family Model: Armor 12 5G, Armor 12T 5G, Armor 12P 5G, Armor 12E 5G, Armor 12S 5G, Armor 10 5G, Armor 11 5G, Armor 11T 5G, Armor 13 5G
Standards.....: FCC CFR 47 Part 27
Test procedure.....: ANSI C63.46:2015
 ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.


Date of Test.....:

Date (s) of performance of tests.....: Jul 06, 2021 ~Sep 07, 2021

Date of Issue.....: Sep 07, 2021

Test Result.....: **Pass**

Testing Engineer :



(Mukzi Lee)

Authorized Signatory :



(Alex Li)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 MEASUREMENT UNCERTAINTY.....	6
1.6 SPECIAL ACCESSORIES.....	6
1.7 WORST-CASE CONFIGURATION AND MODE.....	6
1.8 SUMMARY OF TEST RESULTS.....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE.....	8
2.3 CONFIGURATION OF EUT SYSTEM.....	8
2.4 TEST SETUP.....	9
3.TEST AND MEASUREMENT EQUIPMENT.....	10
4. OUTPUT POWER.....	12
4.1 OUTPUT POWER MEASUREMENT.....	12
5. OCCUPIED BANDWIDTH.....	13
6. BANEDGE AND EMISSION MASK.....	14
7. OUT OF BAND EMISSIONS.....	15
8. RADIATED MEASUREMENT.....	17
8.1. RADIATED POWER (ERP & EIRP).....	17
8.2 NR BAND 41.....	18
8.3 NR BAND 78.....	20
9. SPURIOUS RADIATION EMISSION.....	23

9.1 NR BAND 41.....	25
9.2 NR BAND 78.....	29
9.3 LTE BAND 5+NR BAND 78.....	33
10. FREQUENCY STABILITY.....	37
10.1 NR BAND 41.....	38
10.2 NR BAND 78.....	40
11. PEAK-TO-AVERAGE RATIO.....	42
11.1 Description of the PAR Measurement.....	42
11.2 Measuring Instruments.....	42
11.3 Test Procedures.....	42
11.4 Test Setup.....	42
11.5 MODES TESTED.....	42

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	5G Smart Phone
Trade Mark	ulefone
Model Name	GQ5002
Family Model	Armor 12 5G, Armor 12T 5G, Armor 12P 5G, Armor 12E 5G, Armor 12S 5G, Armor 10 5G, Armor 11 5G, Armor 11T 5G, Armor 13 5G
Model Difference	All the model are the same circuit and RF module,except the Model names.
FCC ID:	2AOWK-5002
Frequency Bands:	U.S. Bands: ☒ NR TDD Band 41, NR FDD Band 78
Frequency Range:	NR TDD Band 41 Uplink/Downlink: 2496 MHz - 2690 MHz NR TDD Band 78 Uplink/Downlink: 3700 MHz - 3800 MHz
Type of Modulation:	DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM
Subcarrier spacing	☒ 15KHz, ☒ 30KHz, ☐ 60KHz
NR architecture	☒ SA , ☒ NSA
Antenna:	PIFA Antenna
Antenna gain:	Band 41: 0.3dBi; Band 78: 0.5dBi
Power Supply:	DC 3.85V/ 5180mAh, 19.94Wh from battery or DC 5V from Adapter.
Adapter:	Model: HJ-FC038K7-US Input: AC 100-240V~50/60Hz 0.6A Output: DC 5.0V---3.0A DC 9.0V---2.0A DC 12.0V---1.5A
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.85V) (Note 1)
HW Version	A200-04
SW Version	Armor 12 5G_AH1_EEA_V01
** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AOWK-5002** filing to comply with the FCC Part 27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 27, ANSI C63.46:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.46:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

1.5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has NR Bands of: Band 41.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.8 SUMMARY OF TEST RESULTS

FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark: 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items.			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	5G Smart Phone	GQ5002	FCC ID: 2AOWK-5002	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

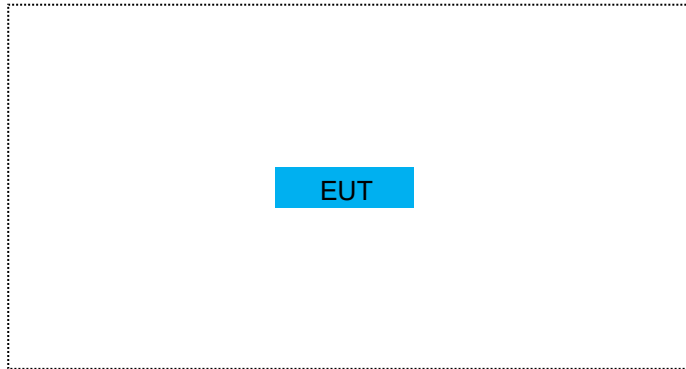


For Conducted Output Power

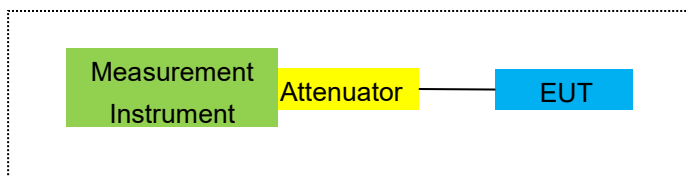

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

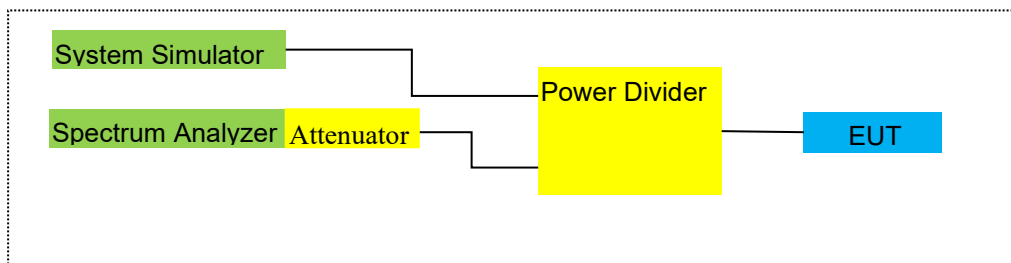

For Frequency Stability

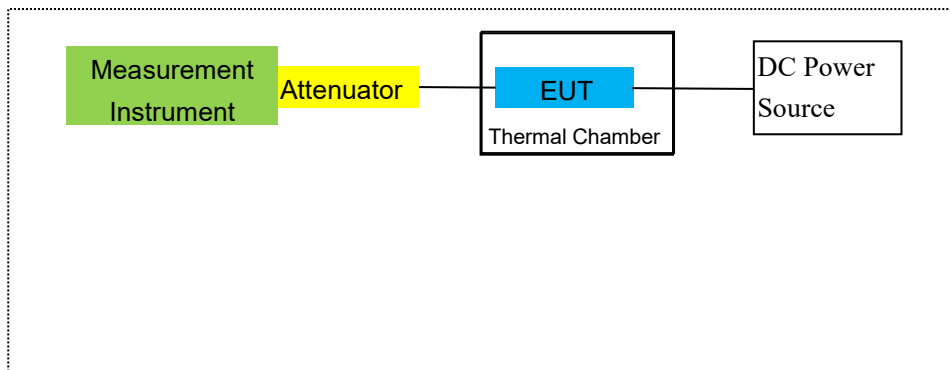

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
2	Test Receiver	R&S	ESPI	101318	2021.04.27	2022.04.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-1018 0	2011071402	2021.03.29	2022.03.28	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
7	Amplifier	EM	EM-30180	060538	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2021.04.27	2022.04.26	1 year
9	Power Meter	R&S	NRVS	100696	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.0 5	2021.04.27	2022.04.26	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
15	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
16	LISN	EMCO	3816/2	00042990	2021.04.27	2022.04.26	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2021.04.27	2022.04.26	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2021.04.27	2022.04.26	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2021.04.27	2022.04.26	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2021.04.27	2022.04.26	1 year
24	test receiver	R&S	ESCI	a0304218	2021.04.27	2022.04.26	1 year
25	Communication Tester	R&S	CMU200	A0304247	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year

26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2021.04.27	2022.04.26	1 year
27	DC Power Source	N/A	PS-6005D	20170402923	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
29	Communication Tester	R&S	CMW500	148500	2020.07.13 2021.07.01	2021.07.12 2022.06.30	1 year
30	Radio Communication Analyzer	Anritsu	MT8821C	SN 6262186364	2020.10.13	2021.10.12	1 year
31	Radio Communication Test Station	Anritsu	MT8000A	SN 6262192315	2020.10.13	2021.10.12	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

NR Measurement Procedure:

All NR bands conducted power peak and average are obtained from the MT8821C telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 38.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table Table 6.2.2.3-1: of the 3GPP TS 38.521-1 (V15.3.0) (07-2019).

Table 6.2.2.3-1: UE Power Class

EUTRA band	Class 1 (dBm)	Tolerance (dB)	Class 2 (dBm)	Tolerance (dB)	Class 3 (dBm)	Tolerance (dB)	Class 4 (dBm)	Tolerance (dB)
1					23	±2		
2					23	±2 ²		
3					23	±2 ²		
4					23	±2		
5					23	±2		
6					23	±2		
7					23	±2		
8					23	±2		
9					23	±2		
10					23	±2		
11					23	±2		
12					23	±2		
13					23	±2		
14					23	±2		
15					23	±2		
16					23	±2		
17					23	±2		
18					23	±2		
19					23	±2		
20					23	±2		
21					23	±2		
22					23	±2		
23					23	±2		
24					23	±2		
25					23	±2		
26			26	±2	23	±2		
27					23	±2		
28					23	±2		
29					23	±2		
30					23	±2		
31					23	±2		
32					23	±2		
33					23	±2		
34					23	±2		
35					23	±2		
36					23	±2		
37					23	±2		
38					23	±2		
39					23	±2		
40					23	±2		
41					23	±2 ²		
42					23	+2/-3		
43					23	+2/-3		
44					23	+2/[-3]		
45					23	±2		
46					23	±2		
47			26	±2	23	±2		

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS 38.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

NR Band 41

NR Band 78

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

FCC: §2.1046,

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

NR Band 41

NR Band 78

RESULTS

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line

- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

NR Band 41

NR Band 78

MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

NR Band 41

NR Band 78

RESULTS

Pass

8.2 NR BAND 41

Radiated Power (EIRP) for Band 41 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	2501.01	0.18	4.54	27.75	23.39	218.273	Horizontal	Pass
		2592.99	-0.05	4.69	27.72	22.98	198.609	Horizontal	Pass
		2685	0.30	4.71	27.71	23.30	213.796	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	2503.5	0.35	4.55	27.76	23.56	226.986	Horizontal	Pass
		2592.99	0.62	4.69	27.72	23.65	231.739	Horizontal	Pass
		2682.48	0.71	4.72	27.7	23.69	233.884	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	2506.02	0.38	4.55	27.77	23.60	229.087	Horizontal	Pass
		2592.99	-0.08	4.69	27.72	22.95	197.242	Horizontal	Pass
		2679.99	0.65	4.72	27.69	23.62	230.144	Horizontal	Pass
40.0MHz DFT_QPSK	1@1	2516.01	0.17	4.57	27.78	23.38	217.771	Horizontal	Pass
		2592.99	0.65	4.73	27.72	23.64	231.206	Horizontal	Pass
		2670	0.70	4.75	27.68	23.63	230.675	Horizontal	Pass
50.0MHz DFT_QPSK	1@1	2521.02	0.31	4.54	27.75	23.52	224.905	Horizontal	Pass
		2592.99	-0.02	4.69	27.72	23.01	199.986	Horizontal	Pass
		2664.99	0.69	4.71	27.71	23.69	233.884	Horizontal	Pass
60.0MHz DFT_QPSK	1@1	2526	0.18	4.55	27.76	23.39	218.273	Horizontal	Pass
		2592.99	0.20	4.69	27.72	23.23	210.378	Horizontal	Pass
		2659.98	0.06	4.72	27.7	23.04	201.372	Horizontal	Pass
80.0MHz DFT_QPSK	1@1	2536.02	0.01	4.55	27.77	23.23	210.378	Horizontal	Pass
		2592.99	0.24	4.69	27.72	23.27	212.324	Horizontal	Pass
		2649.99	0.72	4.72	27.69	23.69	233.884	Horizontal	Pass
90.0MHz DFT_QPSK	1@1	2541	0.06	4.57	27.78	23.27	212.324	Horizontal	Pass
		2592.99	0.64	4.73	27.72	23.63	230.675	Horizontal	Pass
		2644.98	0.48	4.75	27.68	23.41	219.280	Horizontal	Pass
100.0MHz DFT_QPSK	1@1	2546.01	0.05	4.57	27.78	23.26	211.836	Horizontal	Pass
		2592.99	0.11	4.73	27.72	23.10	204.174	Horizontal	Pass
		2640	0.02	4.75	27.68	22.95	197.242	Horizontal	Pass

Radiated Power (EIRP) for Band 41 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QAM16	1@1	2501.01	0.12	4.54	27.75	23.33	215.278	Vertical	Pass
		2592.99	0.10	4.69	27.72	23.13	205.589	Vertical	Pass
		2685	0.00	4.71	27.71	23.00	199.526	Vertical	Pass
15.0MHz DFT_QAM16	1@1	2503.5	0.10	4.55	27.76	23.31	214.289	Vertical	Pass
		2592.99	0.45	4.69	27.72	23.48	222.844	Vertical	Pass
		2682.48	0.44	4.72	27.7	23.42	219.786	Vertical	Pass
20.0MHz DFT_QAM16	1@1	2506.02	-0.28	4.55	27.77	22.94	196.789	Vertical	Pass
		2592.99	0.64	4.69	27.72	23.67	232.809	Vertical	Pass
		2679.99	0.10	4.72	27.69	23.07	202.768	Vertical	Pass
40.0MHz DFT_QAM16	1@1	2516.01	0.07	4.57	27.78	23.28	212.814	Vertical	Pass
		2592.99	0.35	4.73	27.72	23.34	215.774	Vertical	Pass
		2670	0.09	4.75	27.68	23.02	200.447	Vertical	Pass
50.0MHz DFT_QAM16	1@1	2521.02	-0.15	4.54	27.75	23.06	202.302	Vertical	Pass
		2592.99	-0.08	4.69	27.72	22.95	197.242	Vertical	Pass
		2664.99	0.10	4.71	27.71	23.10	204.174	Vertical	Pass
60.0MHz DFT_QAM16	1@1	2526	0.23	4.55	27.76	23.44	220.800	Vertical	Pass
		2592.99	0.17	4.69	27.72	23.20	208.930	Vertical	Pass
		2659.98	0.01	4.72	27.7	22.99	199.067	Vertical	Pass
80.0MHz DFT_QAM16	1@1	2536.02	-0.05	4.55	27.77	23.17	207.491	Vertical	Pass
		2592.99	-0.01	4.69	27.72	23.02	200.447	Vertical	Pass
		2649.99	0.09	4.72	27.69	23.06	202.302	Vertical	Pass
90.0MHz DFT_QAM16	1@1	2541	0.33	4.57	27.78	23.54	225.944	Vertical	Pass
		2592.99	0.33	4.73	27.72	23.32	214.783	Vertical	Pass
		2644.98	0.26	4.75	27.68	23.19	208.449	Vertical	Pass
100.0MHz DFT_QAM16	1@1	2546.01	0.06	4.57	27.78	23.27	212.324	Vertical	Pass
		2592.99	0.25	4.73	27.72	23.24	210.863	Vertical	Pass
		2640	0.26	4.75	27.68	23.19	208.449	Vertical	Pass

8.3 NR BAND 78

Radiated Power (EIRP) for N78 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	3705	-0.45	5.12	29.16	23. 59	228.560	Horizontal	Pass
		3750	-0.58	5.18	28.92	23. 16	207.014	Horizontal	Pass
		3795	-0.62	5.23	28.91	23. 06	202.302	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	3707.5	-0.74	5.12	28.97	23. 11	204.644	Horizontal	Pass
		3750	-0.53	5.18	28.92	23. 21	209.411	Horizontal	Pass
		3792.5	-0.07	5.22	28.91	23. 62	230.144	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	3710	-0.57	5.13	28.97	23. 27	212.324	Horizontal	Pass
		3750	-0.58	5.18	28.92	23. 16	207.014	Horizontal	Pass
		3790	-0.59	5.21	28.89	23. 09	203.704	Horizontal	Pass
25.0MHz DFT_QPSK	1@1	3712.5	-0.67	5.13	28.98	23. 18	207.970	Horizontal	Pass
		3750	-0.35	5.18	28.92	23. 39	218.273	Horizontal	Pass
		3787.5	-0.10	5.21	28.9	23. 59	228.560	Horizontal	Pass
30.0MHz DFT_QPSK	1@1	3715	-0.27	5.14	28.98	23. 57	227.510	Horizontal	Pass
		3750	-0.41	5.18	28.93	23. 34	215.774	Horizontal	Pass
		3785	-0.28	5.2	28.9	23. 42	219.786	Horizontal	Pass
40.0MHz DFT_QPSK	1@1	3720	-0.22	5.14	28.99	23. 63	230.675	Horizontal	Pass
		3750	-0.59	5.18	28.92	23. 15	206.538	Horizontal	Pass
		3780	-0.33	5.19	28.88	23. 36	216.770	Horizontal	Pass
50.0MHz DFT_QPSK	1@1	3725	-0.78	5.14	28.95	23. 03	200.909	Horizontal	Pass
		3750	-0.05	5.18	28.92	23. 68	233.346	Horizontal	Pass
		3775	-0.48	5.19	28.92	23. 25	211.349	Horizontal	Pass
60.0MHz DFT_QPSK	1@1	3730	-0.64	5.14	28.96	23. 18	207.970	Horizontal	Pass
		3750	-0.06	5.18	28.93	23. 69	233.884	Horizontal	Pass
		3770	-0.34	5.19	28.9	23. 37	217.270	Horizontal	Pass
80.0MHz DFT_QPSK	1@1	3740	-0.35	5.14	28.97	23. 48	222.844	Horizontal	Pass
		3750	-0.08	5.18	28.92	23. 66	232.274	Horizontal	Pass
		3760	-0.36	5.19	28.9	23. 35	216.272	Horizontal	Pass
90.0MHz DFT_QPSK	1@1	3745	-0.56	5.14	28.99	23. 29	213.304	Horizontal	Pass
		3750	-0.27	5.18	28.92	23. 47	222.331	Horizontal	Pass

		3755	-0.47	5.19	28.89	23.23	210.378	Horizontal	Pass
100.0MHz DFT_QPSK	1@1	3750	-0.57	5.14	28.98	23.27	212.324	Horizontal	Pass

Radiated Power (EIRP) for N78 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QAM16	1@1	3705	-0.79	5.12	29.16	23.25	211.35	Vertical	Pass
		3750	-0.25	5.18	28.92	23.49	223.36	Vertical	Pass
		3795	-0.46	5.23	28.91	23.22	209.89	Vertical	Pass
15.0MHz DFT_QAM16	1@1	3707.5	-0.46	5.12	28.97	23.39	218.27	Vertical	Pass
		3750	-0.36	5.18	28.92	23.38	217.77	Vertical	Pass
		3792.5	-0.27	5.22	28.91	23.42	219.79	Vertical	Pass
20.0MHz DFT_QAM16	1@1	3710	-0.29	5.13	28.97	23.55	226.46	Vertical	Pass
		3750	-0.13	5.18	28.92	23.61	229.61	Vertical	Pass
		3790	-0.41	5.21	28.89	23.27	212.32	Vertical	Pass
25.0MHz DFT_QAM16	1@1	3712.5	-0.73	5.13	28.98	23.12	205.12	Vertical	Pass
		3750	-0.22	5.18	28.92	23.52	224.91	Vertical	Pass
		3787.5	-0.01	5.21	28.90	23.68	233.35	Vertical	Pass
30.0MHz DFT_QAM16	1@1	3715	-0.41	5.14	28.98	23.43	220.29	Vertical	Pass
		3750	-0.28	5.18	28.93	23.47	222.33	Vertical	Pass
		3785	-0.21	5.20	28.90	23.49	223.36	Vertical	Pass
40.0MHz DFT_QAM16	1@1	3720	-0.22	5.14	28.99	23.63	230.67	Vertical	Pass
		3750	-0.33	5.18	28.92	23.41	219.28	Vertical	Pass
		3780	-0.30	5.19	28.88	23.39	218.27	Vertical	Pass
50.0MHz DFT_QAM16	1@1	3725	-0.53	5.14	28.95	23.28	212.81	Vertical	Pass
		3750	-0.29	5.18	28.93	23.46	221.82	Vertical	Pass
		3775	-0.49	5.19	28.92	23.24	210.86	Vertical	Pass
60.0MHz DFT_QAM16	1@1	3730	-0.18	5.14	28.96	23.64	231.21	Vertical	Pass
		3750	-0.28	5.18	28.93	23.47	222.33	Vertical	Pass
		3770	-0.38	5.19	28.90	23.33	215.28	Vertical	Pass
80.0MHz DFT_QAM16	1@1	3740	-0.56	5.14	28.97	23.27	212.32	Vertical	Pass
		3750	-0.42	5.18	28.92	23.32	214.78	Vertical	Pass
		3760	-0.19	5.19	28.90	23.52	224.91	Vertical	Pass
90.0MHz	1@1	3745	-0.33	5.14	28.99	23.52	224.91	Vertical	Pass

DFT_QAM16		3750	-0.34	5.18	28.92	23.40	218.78	Vertical	Pass
		3755	-0.15	5.19	28.89	23.55	226.46	Vertical	Pass
100.0MHz DFT_QAM16	1@1	3750	-0.45	5.14	28.98	23.39	218.27	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10} (P \text{ [Watts]})$.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10} (P \text{ [Watts]})$, where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

NR Band 41

NR Band 78

RESULTS

PASS

9.1 NR BAND 41

QPSK EIRP POWER FOR NR BAND 41 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2501.01MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5002.02	-51.61	6.14	27.3	-30.45	-13	-17.45	Horizontal
5002.02	-53.40	6.14	27.3	-32.24	-13	-19.24	Vertical
7503.3	-46.43	6.58	28.51	-24.50	-13	-11.50	Vertical
7503.3	-44.32	6.58	28.51	-22.39	-13	-9.39	Horizontal
202.6	-52.12	0.68	16.27	-36.53	-13	-23.53	Vertical
311.9	-47.57	1.04	16.43	-32.18	-13	-19.18	Horizontal
Test Results for Mid Channel 2592.99MHz							
5185.98	-51.59	6.15	27.32	-30.42	-13	-17.42	Horizontal
5185.98	-44.77	6.15	27.32	-23.60	-13	-10.60	Vertical
7778.97	-50.98	6.61	28.51	-29.08	-13	-16.08	Vertical
7778.97	-53.75	6.61	28.51	-31.85	-13	-18.85	Horizontal
183.0	-48.84	0.61	15.11	-34.34	-13	-21.34	Vertical
281.3	-49.84	0.94	16.28	-34.50	-13	-21.50	Horizontal
Test Results for High Channel 2685MHz							
5370	-48.19	6.18	27.32	-31.87	-13	-6.87	Horizontal
5370	-51.36	6.18	27.32	-32.26	-13	-7.26	Vertical
8055	-52.89	6.68	28.89	-32.02	-13	-7.02	Vertical
8055	-45.03	6.68	28.89	-29.06	-13	-4.06	Horizontal
197.5	-45.52	0.66	15.25	-32.38	-13	-7.38	Vertical
260.0	-46.91	0.87	16.37	-31.12	-13	-6.12	Horizontal

QPSK EIRP POWER FOR NR BAND 41 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2546.01MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5092.02	-50.39	6.14	27.3	-29.23	-13	-16.23	Horizontal
5092.02	-44.22	6.14	27.3	-23.06	-13	-10.06	Vertical
7638.03	-46.68	6.59	28.51	-24.76	-13	-11.76	Vertical
7638.03	-54.00	6.59	28.51	-32.08	-13	-19.08	Horizontal
192.0	-49.91	0.64	16.23	-34.32	-13	-21.32	Vertical
373.4	-44.33	1.24	16.48	-29.09	-13	-16.09	Horizontal
Test Results for Mid Channel 2592.99MHz							
5185.98	-46.74	6.16	27.32	-25.58	-13	-12.58	Horizontal
5185.98	-47.82	6.16	27.32	-26.66	-13	-13.66	Vertical
7778.97	-46.37	6.68	28.51	-24.54	-13	-11.54	Vertical
7778.97	-50.03	6.68	28.51	-28.20	-13	-15.20	Horizontal
205.6	-53.95	0.69	15.14	-39.50	-13	-26.50	Vertical
283.1	-49.67	0.94	16.33	-34.28	-13	-21.28	Horizontal
Test Results for High Channel 2640MHz							
5280	-47.21	6.21	27.32	-26.10	-13	-13.10	Horizontal
5280	-49.88	6.21	27.32	-28.77	-13	-15.77	Vertical
7920	-49.97	6.71	28.89	-27.79	-13	-14.79	Vertical
7920	-45.56	6.71	28.89	-23.38	-13	-10.38	Horizontal
199.6	-51.42	0.67	15.20	-36.89	-13	-23.89	Vertical
401.4	-53.20	1.34	15.41	-39.13	-13	-26.13	Horizontal

16QAM EIRP POWER FOR NR BAND 41 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5002.02	-52.85	6.14	27.3	-31.69	-13	-18.69	Horizontal
5002.02	-53.54	6.14	27.3	-32.38	-13	-19.38	Vertical
7503.3	-48.29	6.58	28.51	-26.36	-13	-13.36	Vertical
7503.3	-50.00	6.58	28.51	-28.07	-13	-15.07	Horizontal
192.0	-48.99	0.64	16.31	-33.32	-13	-20.32	Vertical
364.1	-44.48	1.21	16.24	-29.45	-13	-16.45	Horizontal
Test Results for Mid Channel 2535MHz							
5185.98	-48.15	6.15	27.32	-26.98	-13	-13.98	Horizontal
5185.98	-48.33	6.15	27.32	-27.16	-13	-14.16	Vertical
7778.97	-47.32	6.61	28.51	-25.42	-13	-12.42	Vertical
7778.97	-51.21	6.61	28.51	-29.31	-13	-16.31	Horizontal
185.5	-50.91	0.62	15.12	-36.41	-13	-23.41	Vertical
260.4	-51.44	0.87	16.46	-35.85	-13	-22.85	Horizontal
Test Results for High Channel 2567.5MHz							
5370	-53.96	6.18	27.32	-31.87	-13	-6.87	Horizontal
5370	-46.22	6.18	27.32	-32.26	-13	-7.26	Vertical
8055	-52.25	6.68	28.89	-32.02	-13	-7.02	Vertical
8055	-49.56	6.68	28.89	-29.06	-13	-4.06	Horizontal
194.7	-48.53	0.65	15.13	-32.38	-13	-7.38	Vertical
443.2	-52.92	1.48	15.10	-31.12	-13	-6.12	Horizontal

16QAM EIRP POWER FOR NR BAND 41 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5092.02	-45.14	6.14	27.3	-23.98	-13	-10.98	Horizontal
5092.02	-50.00	6.14	27.3	-28.84	-13	-15.84	Vertical
7638.03	-52.96	6.59	28.51	-31.04	-13	-18.04	Vertical
7638.03	-50.86	6.59	28.51	-28.94	-13	-15.94	Horizontal
194.3	-52.07	0.65	15.31	-37.41	-13	-24.41	Vertical
281.1	-48.15	0.94	16.51	-32.58	-13	-19.58	Horizontal
Test Results for Mid Channel 2535MHz							
5185.98	-50.67	6.16	27.32	-29.51	-13	-16.51	Horizontal
5185.98	-48.52	6.16	27.32	-27.36	-13	-14.36	Vertical
7778.97	-49.75	6.68	28.51	-27.92	-13	-14.92	Vertical
7778.97	-53.55	6.68	28.51	-31.72	-13	-18.72	Horizontal
176.1	-51.96	0.59	16.01	-36.54	-13	-23.54	Vertical
360.6	-49.69	1.20	15.44	-35.45	-13	-22.45	Horizontal
Test Results for High Channel 2560MHz							
5280	-50.97	6.21	27.32	-29.86	-13	-16.86	Horizontal
5280	-46.56	6.21	27.32	-25.45	-13	-12.45	Vertical
7920	-47.43	6.71	28.89	-25.25	-13	-12.25	Vertical
7920	-46.00	6.71	28.89	-23.82	-13	-10.82	Horizontal
198.8	-50.30	0.66	15.14	-35.82	-13	-22.82	Vertical
408.6	-51.19	1.36	16.71	-35.84	-13	-22.84	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)
 Over Limit= : P_{Mea}(dBm)-Limit(dBm)

9.2 NR BAND 78

QPSK EIRP POWER FOR NR BAND 78 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 3705MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7410	-48.66	2.63	28.37	-22.92	-13	-9.92	Horizontal
7410	-50.88	2.63	28.37	-25.14	-13	-12.14	Vertical
11115	-48.51	3.38	28.25	-23.64	-13	-10.64	Vertical
11115	-44.09	3.38	28.25	-19.22	-13	-6.22	Horizontal
188.4	-44.40	0.63	16.09	-28.94	-13	-15.94	Vertical
269.8	-53.94	0.90	16.51	-38.33	-13	-25.33	Horizontal
Test Results for Mid Channel 3750MHz							
7500	-47.42	2.65	28.33	-21.74	-13	-8.74	Horizontal
7500	-48.63	2.65	28.33	-22.95	-13	-9.95	Vertical
11250	-47.02	4.14	28.26	-22.90	-13	-9.90	Vertical
11250	-53.53	4.14	28.26	-29.41	-13	-16.41	Horizontal
188.1	-45.00	0.63	15.10	-30.53	-13	-17.53	Vertical
314.2	-48.97	1.05	15.13	-34.89	-13	-21.89	Horizontal
Test Results for High Channel 3795MHz							
7590	-53.07	2.65	28.41	-27.31	-13	-14.31	Horizontal
7590	-52.52	2.65	28.41	-26.76	-13	-13.76	Vertical
11385	-47.16	5.23	28.15	-24.24	-13	-11.24	Vertical
11385	-51.75	5.23	28.89	-28.09	-13	-15.09	Horizontal
187.6	-44.50	0.63	15.25	-29.88	-13	-16.88	Vertical
279.9	-44.94	0.93	15.44	-30.43	-13	-17.43	Horizontal

QPSK EIRP POWER FOR NR BAND 78 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2546.01MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7500	-46.32	2.63	28.33	-20.62	-13	-7.62	Horizontal
7500	-44.34	2.63	28.33	-18.64	-13	-5.64	Vertical
11250	-46.39	3.38	28.26	-21.51	-13	-8.51	Vertical
11250	-49.11	3.38	28.26	-24.23	-13	-11.23	Horizontal
204.6	-51.59	0.68	16.04	-36.23	-13	-23.23	Vertical
395.3	-45.19	1.32	15.12	-31.39	-13	-18.39	Horizontal

16QAM EIRP POWER FOR NR BAND 78 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 3305.01MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7410	-50.21	2.63	28.37	-24.47	-13	-11.47	Horizontal
7410	-50.94	2.63	28.37	-25.20	-13	-12.20	Vertical
11115	-52.27	3.38	28.25	-27.40	-13	-14.40	Vertical
11115	-53.18	3.38	28.25	-28.31	-13	-15.31	Horizontal
184.8	-48.90	0.62	15.05	-34.47	-13	-21.47	Vertical
327.8	-47.05	1.09	16.31	-31.83	-13	-18.83	Horizontal
Test Results for Mid Channel 3549.99MHz							
7500	-47.37	2.65	28.33	-21.69	-13	-8.69	Horizontal
7500	-51.77	2.65	28.33	-26.09	-13	-13.09	Vertical
11250	-48.03	4.14	28.26	-23.91	-13	-10.91	Vertical
11250	-53.06	4.14	28.26	-28.94	-13	-15.94	Horizontal
185.1	-44.56	0.62	15.19	-29.99	-13	-16.99	Vertical
345.4	-49.03	1.15	16.38	-33.80	-13	-20.80	Horizontal
Test Results for High Channel 3795MHz							
7590	-53.03	2.65	28.41	-27.27	-13	-14.27	Horizontal
7590	-49.21	2.65	28.41	-23.45	-13	-10.45	Vertical
11385	-47.40	5.23	28.15	-24.48	-13	-11.48	Vertical
11385	-49.08	5.23	28.89	-25.42	-13	-12.42	Horizontal
198.7	-52.00	0.66	16.32	-36.34	-13	-23.34	Vertical
391.4	-46.03	1.30	15.51	-31.82	-13	-18.82	Horizontal

16QAM EIRP POWER FOR NR BAND 78 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 3350.01MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7500	-52.57	2.63	28.33	-26.87	-13	-13.87	Horizontal
7500	-44.55	2.63	28.33	-18.85	-13	-5.85	Vertical
11250	-47.37	3.38	28.26	-22.49	-13	-9.49	Vertical
11250	-48.69	3.38	28.26	-23.81	-13	-10.81	Horizontal
185.3	-46.44	0.62	15.04	-32.02	-13	-19.02	Vertical
371.5	-52.00	1.24	15.68	-37.56	-13	-24.56	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$
 Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

9.3 LTE BAND 5+NR BAND 78

EN-DC QPSK EIRP POWER FOR LTE BAND 5+NR BAND 78 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7410	-47.78	2.63	28.37	-22.04	-13	-9.04	Horizontal
7410	-46.68	2.63	28.37	-20.94	-13	-7.94	Vertical
11115	-49.92	3.38	28.25	-25.05	-13	-12.05	Vertical
11115	-52.44	3.38	28.25	-27.57	-13	-14.57	Horizontal
1653.0	-50.87	2.78	27.51	-26.14	-13	-6.83	Horizontal
1653.0	-53.86	2.78	27.51	-29.13	-13	-13.73	Vertical
2479.5	-47.12	2.90	27.81	-22.21	-13	-9.43	Vertical
2479.5	-48.86	2.90	27.81	-23.95	-13	-13.43	Horizontal
210.0	-44.84	0.70	16.10	-29.44	-13	-16.44	Vertical
348.3	-45.31	1.16	16.06	-30.41	-13	-17.41	Horizontal
Test Results for Mid Channel							
7500	-52.59	2.65	28.33	-26.91	-13	-13.91	Horizontal
7500	-50.90	2.65	28.33	-25.22	-13	-12.22	Vertical
11250	-46.22	4.14	28.26	-22.10	-13	-9.10	Vertical
11250	-51.58	4.14	28.26	-27.46	-13	-14.46	Horizontal
1673	-51.09	2.78	27.51	-26.36	-13	-6.83	Horizontal
1673	-46.44	2.78	27.51	-21.71	-13	-13.73	Vertical
2509.5	-53.06	2.92	27.76	-28.22	-13	-9.43	Vertical
2509.5	-45.94	2.92	27.76	-21.10	-13	-13.43	Horizontal
211.5	-47.27	0.70	16.40	-31.57	-13	-18.57	Vertical
337.7	-47.57	1.13	16.18	-32.52	-13	-19.52	Horizontal
Test Results for High Channel							
7590	-49.97	2.65	28.41	-24.21	-13	-11.21	Horizontal
7590	-48.49	2.65	28.41	-22.73	-13	-9.73	Vertical
11385	-53.38	5.23	28.15	-30.46	-13	-17.46	Vertical
11385	-50.14	5.23	28.89	-26.48	-13	-13.48	Horizontal
1693	-44.96	2.81	27.51	-20.26	-13	-6.83	Horizontal
1693	-49.75	2.81	27.51	-25.05	-13	-13.73	Vertical
2539.5	-51.97	2.93	27.77	-27.13	-13	-9.43	Vertical
2539.5	-44.46	2.93	27.77	-19.62	-13	-13.43	Horizontal
205.4	-50.07	0.68	16.01	-34.74	-13	-21.74	Vertical
269.6	-50.78	0.90	16.49	-35.19	-13	-22.19	Horizontal

EN-DC QPSK EIRP POWER FOR LTE BAND 5+NR BAND 78 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 3750MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7500	-50.59	2.63	28.33	-24.89	-13	-11.89	Horizontal
7500	-44.72	2.63	28.33	-19.02	-13	-6.02	Vertical
11250	-52.10	3.38	28.26	-27.22	-13	-14.22	Vertical
11250	-52.57	3.38	28.26	-27.69	-13	-14.69	Horizontal
40900	-50.21	2.78	27.50	-25.49	-13	-12.49	Horizontal
40900	-45.28	2.78	27.50	-20.56	-13	-7.56	Vertical
61350	-53.21	2.90	27.80	-28.31	-13	-15.31	Vertical
61350	-52.82	2.90	27.80	-27.92	-13	-14.92	Horizontal
202.3	-50.10	0.67	15.11	-35.66	-13	-22.66	Vertical
277.6	-51.74	0.93	15.43	-37.24	-13	-24.24	Horizontal

EN-DC 16QAM EIRP POWER FOR LTE BAND 5+NR BAND 78 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7410	-52.80	2.63	28.37	-27.06	-13	-14.06	Horizontal
7410	-51.19	2.63	28.37	-25.45	-13	-12.45	Vertical
11115	-45.58	3.38	28.25	-20.71	-13	-7.71	Vertical
11115	-52.70	3.38	28.25	-27.83	-13	-14.83	Horizontal
1653.0	-44.92	2.78	27.51	-20.19	-13	-6.83	Horizontal
1653.0	-44.27	2.78	27.51	-19.54	-13	-13.73	Vertical
2479.5	-48.09	2.90	27.81	-23.18	-13	-9.43	Vertical
2479.5	-48.32	2.90	27.81	-23.41	-13	-13.43	Horizontal
187.1	-53.03	0.62	16.37	-37.28	-13	-24.28	Vertical
403.6	-47.09	1.35	16.13	-32.31	-13	-19.31	Horizontal
Test Results for Mid Channel							
7500	-50.19	2.65	28.33	-24.51	-13	-11.51	Horizontal
7500	-50.38	2.65	28.33	-24.70	-13	-11.70	Vertical
11250	-50.14	4.14	28.26	-26.02	-13	-13.02	Vertical
11250	-49.46	4.14	28.26	-25.34	-13	-12.34	Horizontal
1673	-48.14	2.78	27.51	-23.41	-13	-6.83	Horizontal
1673	-46.09	2.78	27.51	-21.36	-13	-13.73	Vertical
2509.5	-50.15	2.92	27.76	-25.31	-13	-9.43	Vertical
2509.5	-49.24	2.92	27.76	-24.40	-13	-13.43	Horizontal
190.5	-49.48	0.64	15.03	-35.09	-13	-22.09	Vertical
342.2	-53.62	1.14	16.13	-38.63	-13	-25.63	Horizontal
Test Results for High Channel							
7590	-53.69	2.65	28.41	-27.93	-13	-14.93	Horizontal
7590	-51.79	2.65	28.41	-26.03	-13	-13.03	Vertical
11385	-49.88	5.23	28.15	-26.96	-13	-13.96	Vertical
11385	-47.97	5.23	28.89	-24.31	-13	-11.31	Horizontal
1693	-46.33	2.81	27.51	-21.63	-13	-6.83	Horizontal
1693	-48.09	2.81	27.51	-23.39	-13	-13.73	Vertical
2539.5	-48.21	2.93	27.77	-23.37	-13	-9.43	Vertical
2539.5	-47.72	2.93	27.77	-22.88	-13	-13.43	Horizontal
205.2	-49.32	0.68	16.26	-33.74	-13	-20.74	Vertical
270.3	-52.23	0.90	16.06	-37.07	-13	-24.07	Horizontal

EN-DC 16QAM EIRP POWER FOR LTE BAND 5+NR BAND 78 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 3350.01MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7500	-48.45	2.63	28.33	-22.75	-13	-9.75	Horizontal
7500	-45.13	2.63	28.33	-19.43	-13	-6.43	Vertical
11250	-51.93	3.38	28.26	-27.05	-13	-14.05	Vertical
11250	-50.93	3.38	28.26	-26.05	-13	-13.05	Horizontal
40900	-46.86	2.78	27.50	-22.14	-13	-9.14	Horizontal
40900	-51.70	2.78	27.50	-26.98	-13	-13.98	Vertical
61350	-45.27	2.90	27.80	-20.37	-13	-7.37	Vertical
61350	-53.43	2.90	27.80	-28.53	-13	-15.53	Horizontal
185.0	-52.32	0.62	16.10	-36.84	-13	-23.84	Vertical
256.2	-48.20	0.85	15.05	-34.00	-13	-21.00	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}\text{C}$

Voltage = low voltage, DC 3.4V, Normal, DC 3.85V and High voltage, DC 4.2V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

NR Band 41

NR Band 78

RESULTS

See the following pages.

10.1 NR BAND 41

DFT_QPSK, (100MHz CH 518598 RB Allocation 135@67 SCS 30K)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2592.99	2.33	0.000898	2.5
3.85	2592.99	1.56	0.000603	2.5
4.2	2592.99	1.41	0.000542	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2592.99	2.58	0.003081	2.5
Extreme (50C)	2592.99	1.52	0.001813	2.5
Extreme (40C)	2592.99	2.80	0.003347	2.5
Extreme (30C)	2592.99	5.86	0.007010	2.5
Extreme (10C)	2592.99	5.04	0.006021	2.5
Extreme (0C)	2592.99	0.64	0.000768	2.5
Extreme (-10C)	2592.99	2.00	0.002388	2.5
Extreme (-20C)	2592.99	1.21	0.001445	2.5
Extreme (-30C)	2592.99	1.63	0.001943	2.5

DFT_16QAM, (100MHz CH 518598 RB Allocation 135@67 SCS 30K)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.66	2592.99	1.03	0.000396	2.5
3.85	2592.99	2.22	0.000856	2.5
4.43	2592.99	2.45	0.000943	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
---------------------	--------------------	-------------------------	-------------------------	----------------

Normal (25C)	2592.99	3.40	0.004063	2.5
Extreme (50C)	2592.99	5.66	0.006764	2.5
Extreme (40C)	2592.99	3.29	0.003930	2.5
Extreme (30C)	2592.99	2.64	0.003162	2.5
Extreme (10C)	2592.99	2.62	0.003137	2.5
Extreme (0C)	2592.99	4.56	0.005453	2.5
Extreme (-10C)	2592.99	4.12	0.004922	2.5
Extreme (-20C)	2592.99	1.23	0.001472	2.5
Extreme (-30C)	2592.99	5.26	0.006288	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 NR BAND 78

DFT QPSK, (100MHz CH 650000 RB Allocation 135@67

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	3750	2.82	0.000751	2.5
3.85	3750	0.47	0.000126	2.5
4.2	3750	1.42	0.000379	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3750	4.95	0.001954	2.5
Extreme (50C)	3750	0.91	0.000358	2.5
Extreme (40C)	3750	3.33	0.001314	2.5
Extreme (30C)	3750	0.83	0.000329	2.5
Extreme (10C)	3750	1.41	0.000555	2.5
Extreme (0C)	3750	0.41	0.000161	2.5
Extreme (-10C)	3750	5.72	0.002257	2.5
Extreme (-20C)	3750	0.94	0.000373	2.5
Extreme (-30C)	3750	4.02	0.001584	2.5

N78 16QAM, (100MHz CH 650000 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.66	3750	3.49	0.000931	2.5
3.85	3750	1.83	0.000488	2.5
4.43	3750	4.16	0.001110	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 78 DFT_QAM16, (CH 518598 1@1 100MHz BANDWIDTH)				
Normal (25C)	3750	2.16	0.000577	2.5
Extreme (50C)	3750	0.60	0.000159	2.5
Extreme (40C)	3750	2.02	0.000539	2.5
Extreme (30C)	3750	0.38	0.000101	2.5
Extreme (10C)	3750	5.51	0.001468	2.5
Extreme (0C)	3750	2.15	0.000573	2.5
Extreme (-10C)	3750	5.31	0.001416	2.5
Extreme (-20C)	3750	5.32	0.001420	2.5
Extreme (-30C)	3750	0.15	0.000040	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

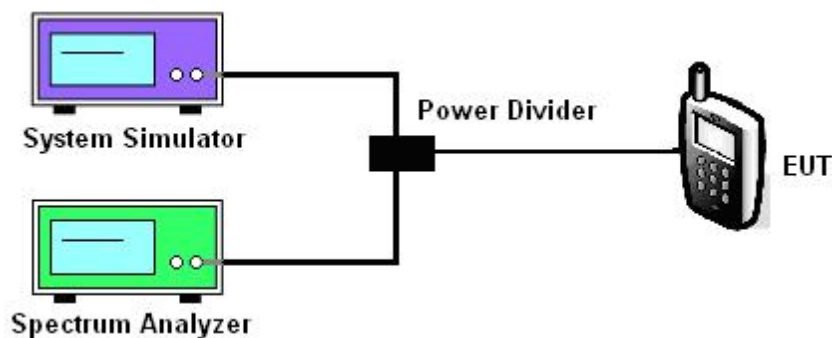

11.5 MODES TESTED

NR Band 41
 NR Band 78

Test data reference attachment.

----END OF REPORT----