

FCC REPORT

Applicant: Shenzhen Gotron Electronic CO., LTD.

Address of Applicant: 518, 5F, R&D building, Tsinghua Hi-Tech park, Nanshan district, Shenzhen 518057 P.R. China

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: GQ3060

Trade mark: ulefone

FCC ID: 2AOWK3060

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.225

Date of sample receipt: 01 Jun., 2018

Date of Test: 05 Jun., to 26 Jul., 2018

Date of report issue: 30 Jul., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	30 Jul., 2018	Original

Tested by:

Carrey Chen

Date:

30 Jul., 2018

Test Engineer

Reviewed by:

Wimer Zhang

Date:

30 Jul., 2018

Project Engineer

3 Contents

	Page
.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T	5
5.3 TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 LABORATORY FACILITY	6
5.6 LABORATORY LOCATION	6
5.7 TEST INSTRUMENTSLIST	7
6 TEST RESULTS ANDMEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT	8
6.2 RADIATED EMISSION	9
6.3 20dB BANDWIDTH	16
6.4 FREQUENCY TOLERANCE	18
6.5 CONDUCTED EMISSION	20
7 TEST SETUP PHOTOS	23
8 EUT CONSTRUCTIONAL PHOTOS	24

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Field strength of the fundamental signal	15.225 (a)	Pass
Spurious emissions	15.225(d)& 15.209	Pass
20dB Bandwidth	15.215(c)	Pass
Frequency tolerance	15.225 (e)	Pass
Conducted Emission	15.207	Pass

Remarks:

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Gotron Electronic CO., LTD.
Address:	518, 5F, R&D building, Tsinghua Hi-Tech park, Nanshan district, Shenzhen 518057 P.R. China
Manufacturer:	Shenzhen Gotron Electronic CO., LTD.
Address:	518, 5F, R&D building, Tsinghua Hi-Tech park, Nanshan district, Shenzhen 518057 P.R. China

5.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	GQ3060
Operation Frequency:	13.56MHz
Channel numbers:	1
Modulation type:	ASK
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V-10300mAh
AC adapter:	Model: APS-KI018WU-G Input: AC100-240V, 50/60Hz 0.5A MAX Output: DC 5V/7V/9V, 2.0A; 12V, 1.5A.

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation		
Pre-Test Mode:			
CCIS has verified the construction and function in typical operation,The EUT was placed on three different polar directions;i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:			
Axis	X	Y	Z
Field Strength(dBuV/m)	45.36	44.42	39.21
Final Test Mode:			
According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”: Y axis (see the test setup photo).			

5.4 Description of Support Units

N/A

5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.7 Test Instrumentslist

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-07-2018	03-06-2019
2	Loop Antenna	SCHWARZBECK	FMZB 1519 B	CCIS0188	03-16-2018	03-15-2019
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	03-16-2018	03-15-2019
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	03-16-2018	03-15-2019
4	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	03-07-2018	03-06-2019
5	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	03-07-2018	03-06-2019
6	Spectrum analyzer	Rohde & Schwarz	FSP30	CCIS0023	03-07-2018	03-06-2019

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	07-22-2017	07-21-2020
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-07-2018	03-06-2019
3	LISN	CHASE	MN2050D	CCIS0074	03-19-2018	03-18-2019
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A


6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The EUT make use of an Internal antenna, The typical gain of the antenna is 0dBi.	
	

6.2 Radiated Emission


Test Requirement:	FCC Part15 C Section 15.225(a) and 15.209				
Test Method:	ANSI C63.10: 2013				
TestFrequencyRange:	9 kHz to 1000MHz				
Test site:	Measurement Distance: 3m(Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120kHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (uV/m @30m)		Limit (dBuV/m @3m)
	13.553MHz-13.567MHz		15848		124.0
	13.410MHz-13.553MHz & 13.567MHz-13.710MHz		334		90.5
	13.110MHz-13.410MHz & 13.710MHz-14.010MHz		106		80.5
	Remark: Per FCC part 15.31, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).				
Limit: (Spurious Emissions)	Frequency (MHz)		Limit (uV/m @3m)		Distance (m)
	0.009-0.490		2400/F(kHz)		300
	0.490-1.705		24000/F(kHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 1GHz		500		3
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup.	9kHz-30MHz				

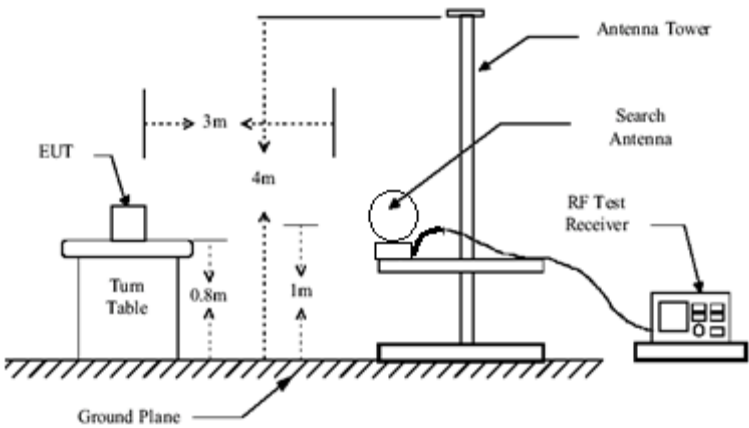

30MHz-1GHz

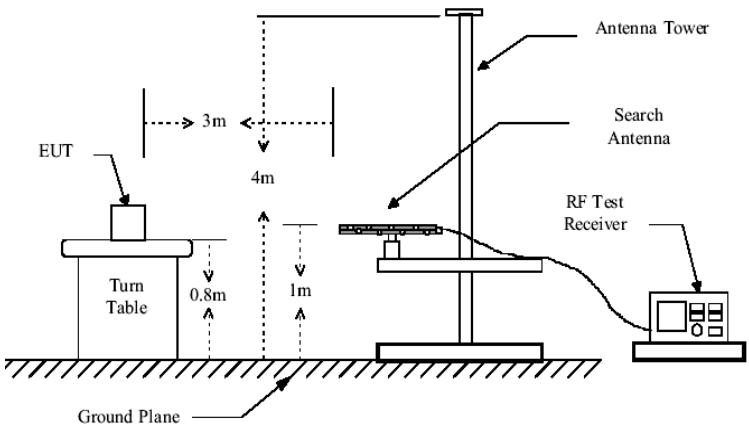


Above 1GHz

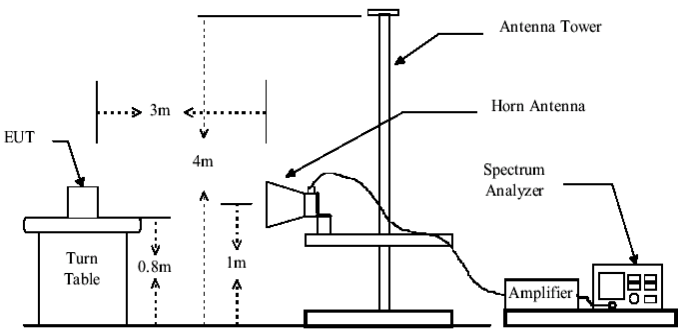

Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Measurement Record:	Uncertainty:±4.88 dB
Test results:	Pass

Measurement Data:

Field Strength Of The Fundamental Signal

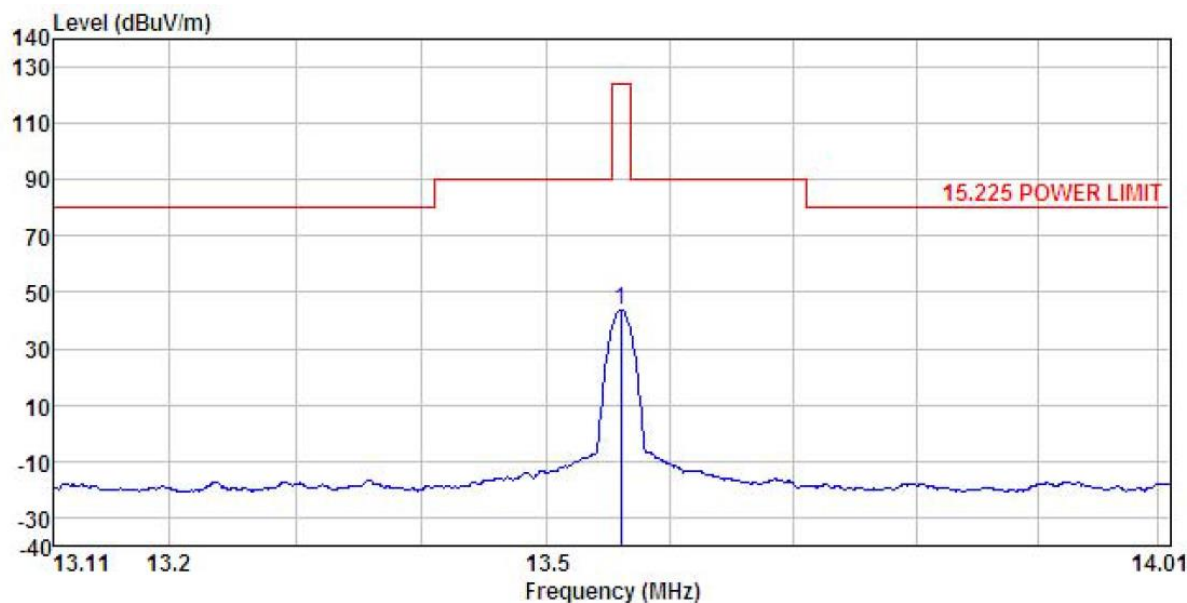


Site : 3m chamber
 Condition : 15.225 POWER LIMIT 3m LOOP-FM2B 1519B HORIZONTAL
 EUT : Mobile Phone
 Model : GQ3060
 Test mode : NFC mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Carey
 Remark :

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	13.560	69.59	-26.48	0.64	0.00	43.75	124.00 -80.25

Spurious Emissions

Test frequency range: 150kHz-30MHz

Test Polarization: Horizontal

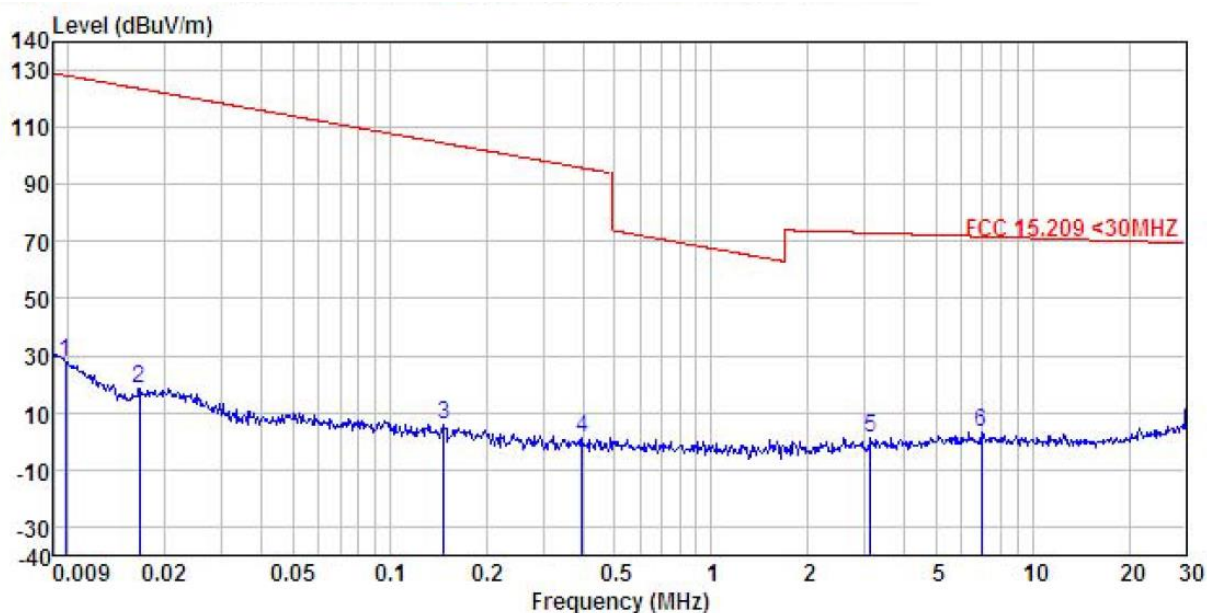


Site : 3m chamber
 Condition : FCC 15.209 <30MHz 3m LOOP-FMZB 1519B HORIZONTAL
 EUT : Mobile Phone
 Model : GQ3060
 Test mode : NFC mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Carey
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	0.010	53.74	-25.75	0.02	0.00	28.01	128.29	-100.28	
2	0.017	44.29	-25.87	0.05	0.00	18.47	123.60	-105.13	
3	0.148	32.00	-26.16	0.26	0.00	6.10	104.50	-98.40	
4	0.398	27.41	-26.27	0.37	0.00	1.51	95.83	-94.32	
5	3.146	27.21	-26.55	0.66	0.00	1.32	73.04	-71.72	
6	6.966	28.94	-26.50	0.50	0.00	2.94	71.79	-68.85	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of 9 kHz~150 kHz are background noise and very lower than the limit, not show in test report.

Test Polarization: Vertical

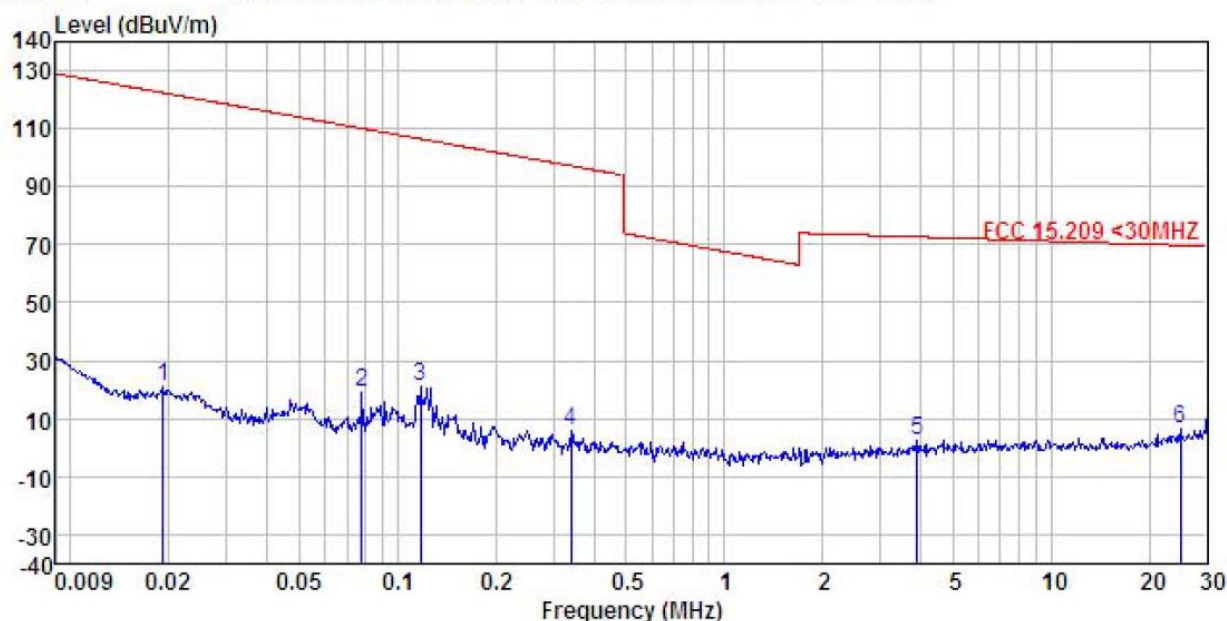

Site : 3m chamber
 Condition : FCC 15.209 <30MHZ 3m LOOP-FM2B 1519B VERTICAL
 EUT : Mobile Phone
 Model : GQ3060
 Test mode : NFC mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Carey
 Remark :


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	0.019	46.90	-25.89	0.06	0.00	21.07	122.39-101.32	
2	0.078	44.70	-26.06	0.19	0.00	18.83	110.11 -91.28	
3	0.118	46.96	-26.12	0.22	0.00	21.06	106.48 -85.42	
4	0.341	31.41	-26.26	0.36	0.00	5.51	97.18 -91.67	
5	3.885	28.47	-26.57	0.66	0.00	2.56	72.71 -70.15	
6	24.894	31.26	-25.81	0.73	0.00	6.18	69.79 -63.61	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of 9 kHz~150 kHz are background noise and very lower than the limit, not show in test report.

Test frequency range: 30MHz-1000MHz

Test Polarization: Horizontal

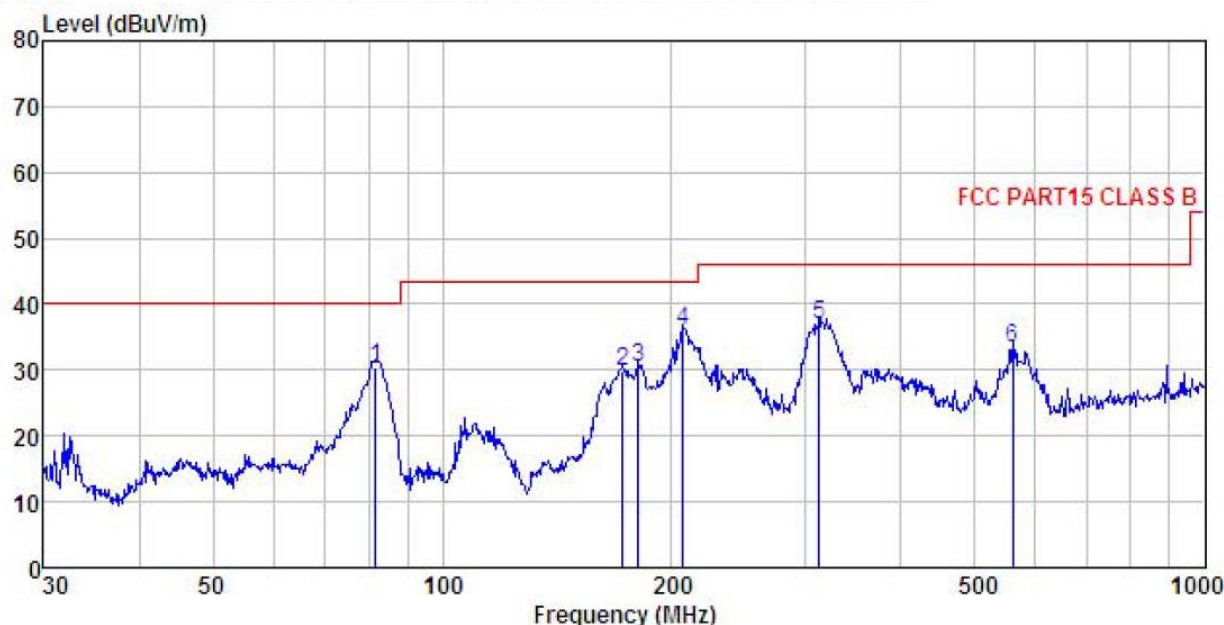


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) HORIZONTAL
 EUT : Mobile Phone
 Model : GQ3060
 Test mode : NFC mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Carey
 Remark :

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	81.783	49.90	8.46	1.72	29.63	30.45	40.00	-9.55 QP
2	172.599	46.77	9.51	2.68	29.03	29.93	43.50	-13.57 QP
3	180.649	46.63	9.89	2.73	28.97	30.28	43.50	-13.22 QP
4	207.123	50.01	11.78	2.86	28.78	35.87	43.50	-7.63 QP
5	312.179	48.58	13.86	2.98	28.48	36.94	46.00	-9.06 QP
6	560.693	40.23	18.27	3.90	29.07	33.33	46.00	-12.67 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test Polarization: Vertical

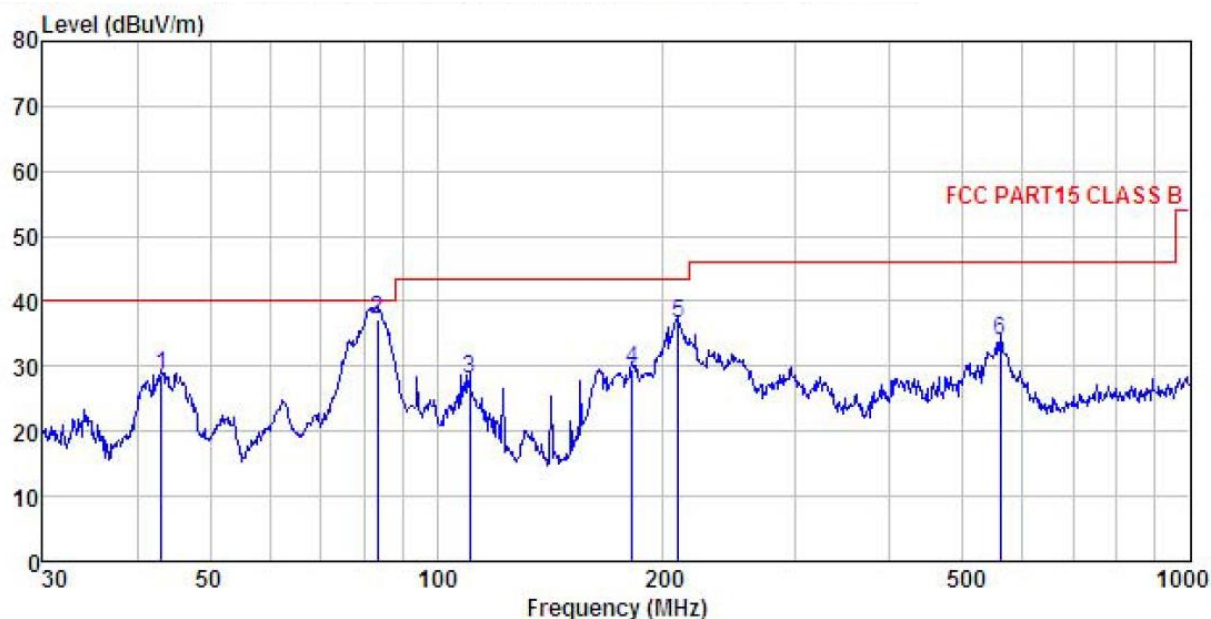


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) VERTICAL
 EUT : Mobile Phone
 Model : GQ3060
 Test mode : NFC mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Carey
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	43.050	43.81	13.36	1.26	29.88	28.55	40.00	-11.45	QP
2	83.522	56.24	8.80	1.79	29.61	37.22	40.00	-2.78	QP
3	110.569	43.13	12.18	2.05	29.45	27.91	43.50	-15.59	QP
4	181.920	45.78	10.07	2.74	28.96	29.63	43.50	-13.87	QP
5	209.313	50.62	11.87	2.86	28.77	36.58	43.50	-6.92	QP
6	560.693	40.91	18.27	3.90	29.07	34.01	46.00	-11.99	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


6.3 20dB Bandwidth

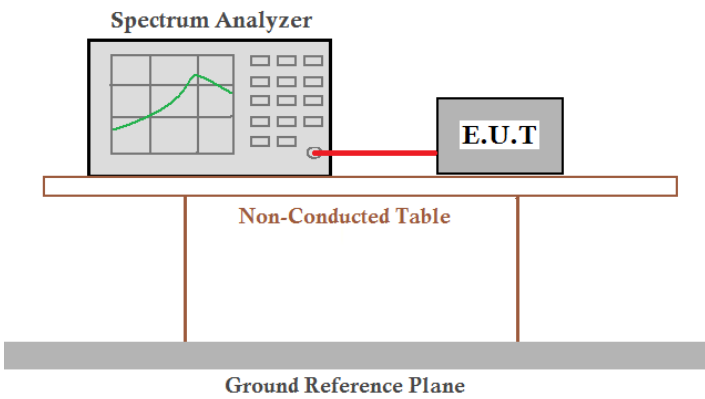Test Requirement:	FCC Part15 C Section 15.215 (c)
Test Method:	ANSI C63.4:2014
Receiver setup:	RBW=200Hz, VBW=300Hz, detector: Peak
Limit:	The fundamental emission be kept within atleast the central 80% of the permitted band
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

20dB bandwidth (kHz)	Limit (kHz)	Results
0.868	11.2	Passed
Note: For 13.56MHz, permitted Band is 14 kHz, so the Limit is 11.2 kHz.		

Test plot as follows:

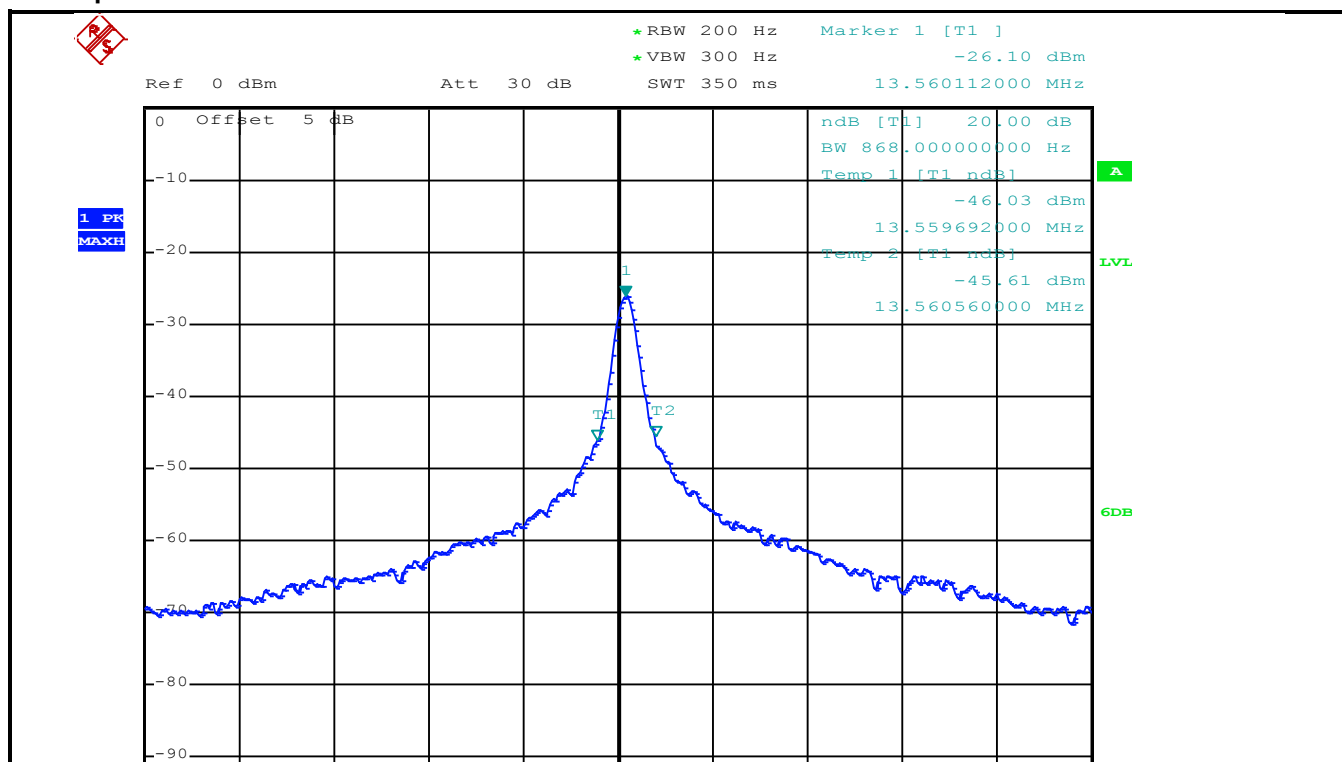

6.4 Frequency Tolerance

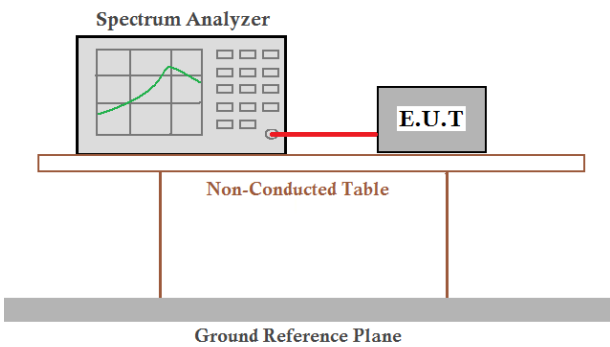Test Requirement:	FCC Part15 C Section 15.225 (e)
Test Method:	ANSI C63.10: 2013
Receiver setup:	RBW=200Hz, VBW=300Hz, span=14kHz, detector: Peak
Limit:	±0.01% of the operating frequency
Test mode:	Transmitting mode
Test Procedure:	Frequency stability V.S. Temperature measurement 1. The equipment under test was powered by a fresh battery. 2. RF output was connected to spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached Frequency stability V.S. Voltage measurement 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a feed-through attenuator. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


a) Frequency stability V.S. Temperature measurement

	Temperature (°C)	Frequency Tolerance (MHz)	Frequency Error (%)	Limit (%)	Results
3.8	-20	13.56014	0.001	0.01	Pass
	-10	13.56010	0.001	0.01	Pass
	0	13.56013	0.001	0.01	Pass
	+10	13.56011	0.001	0.01	Pass
	+20	13.56013	0.001	0.01	Pass
	+30	13.56009	0.001	0.01	Pass
	+40	13.56008	0.001	0.01	Pass
	+50	13.56008	0.001	0.01	Pass

b) Frequency stability V.S. Voltage measurement


Temperature (°C)	Voltage (Vdc)	Frequency Tolerance (MHz)	Frequency Error (%)	Limit (%)	Results
25	3.50	13.56007	0.001	0.01	Pass
	3.80	13.56013	0.001	0.01	Pass
	4.35	13.56014	0.001	0.01	Pass

6.5 Conducted Emission

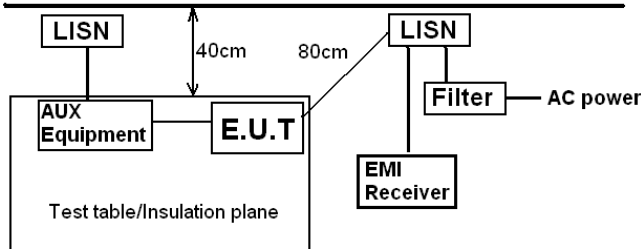Test Requirement:	FCC Part15 B Section 15.207					
Test Method:	ANSI C63.4:2014					
TestFrequencyRange:	150kHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9kHz, VBW=30kHz					
Limit:	Frequency range (MHz)		Limit (dBμV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	0.5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.).It provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.					
Test environment:	Temp.:	23°C	Humid.:	56%	Press.:	101kPa
Measurement Record:	Uncertainty: 3.28dB					
Test Instruments:	Refer to section 5.7 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

Measurement Data:

Test Phase: Line

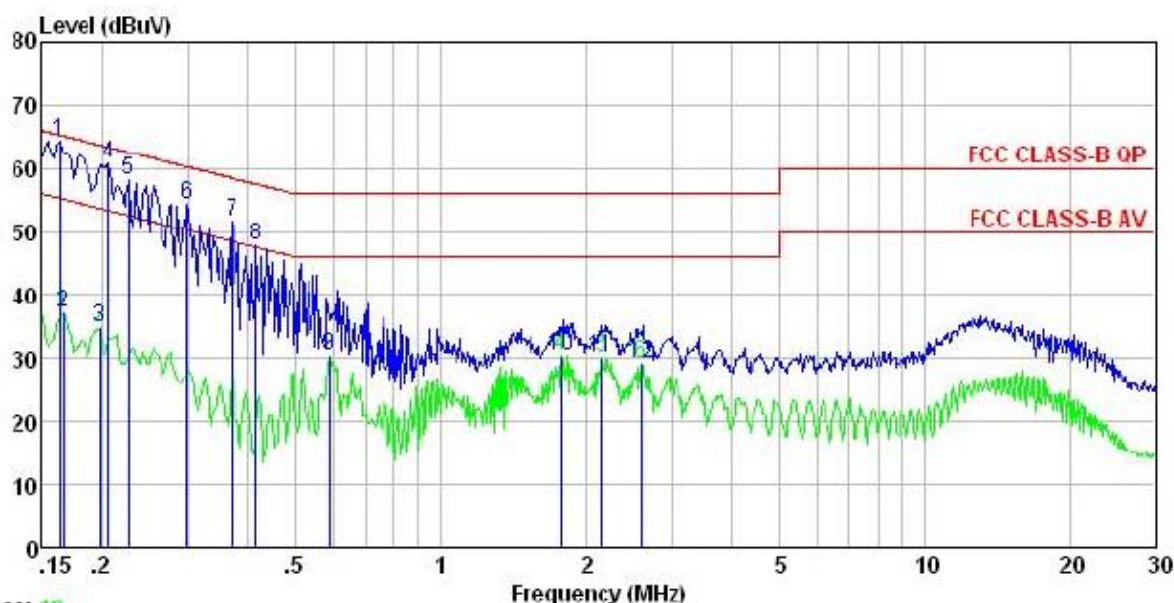

Trace: 19


Site : CCIS Shielding Room
 Condition : FCC CLASS-B QP LISN LINE
 EUT : Mobile Phone
 Model : GQ3060
 Test Mode : NFC mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23.5°C Humi:57% Atmos:101KPa
 Test Engineer: Carey
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	52.70	0.97	10.77	64.44	65.34	-0.90	QP
2	0.166	25.49	0.97	10.77	37.23	55.16	-17.93	Average
3	0.198	23.08	0.92	10.76	34.76	53.71	-18.95	Average
4	0.206	49.03	0.92	10.76	60.71	63.36	-2.65	QP
5	0.226	46.33	0.94	10.75	58.02	62.61	-4.59	QP
6	0.299	42.47	0.97	10.74	54.18	60.28	-6.10	QP
7	0.369	39.97	0.97	10.73	51.67	58.52	-6.85	QP
8	0.415	36.24	0.97	10.73	47.94	57.55	-9.61	QP
9	0.589	18.72	0.97	10.76	30.45	46.00	-15.55	Average
10	1.772	18.53	0.98	10.94	30.45	46.00	-15.55	Average
11	2.144	18.32	0.98	10.95	30.25	46.00	-15.75	Average
12	2.594	17.24	0.99	10.93	29.16	46.00	-16.84	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Test Phase: Neutral

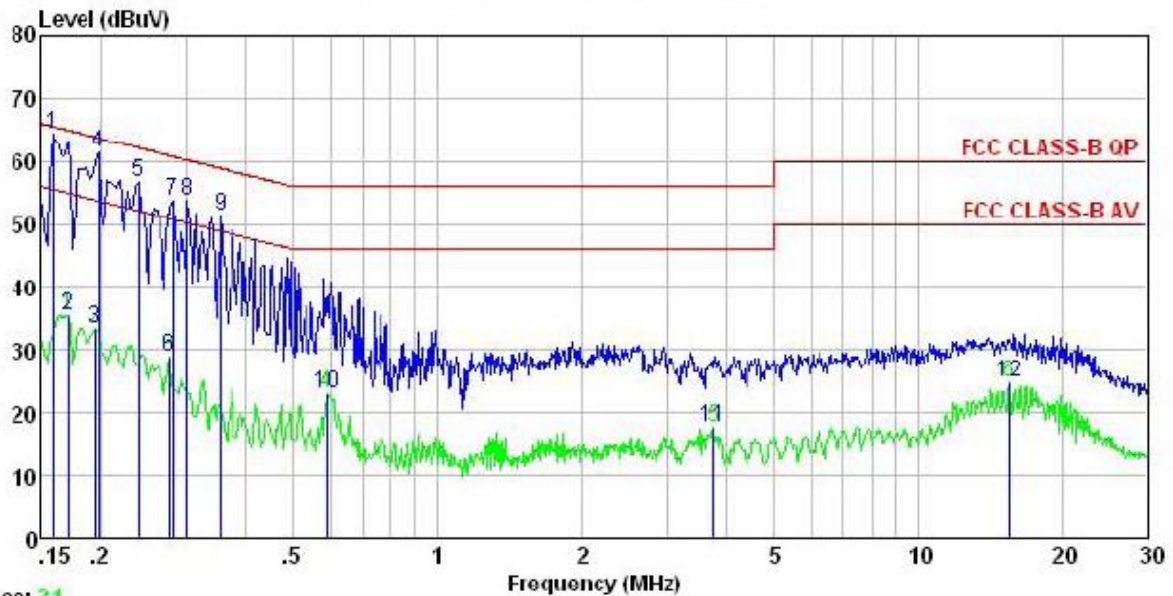

Trace: 21

Site : CCIS Shielding Room
 Condition : FCC CLASS-B QP LISN NEUTRAL
 EUT : Mobile Phone
 Model : GQ3060
 Test Mode : NFC mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23.5°C Humi:57% Atmos:101KPa
 Test Engineer: Carey
 Remark :

	Read	LISN	Cable	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.158	52.51	0.98	10.77	64.26	65.56 -1.30 QP
2	0.170	23.80	0.96	10.77	35.53	54.94 -19.41 Average
3	0.194	21.53	0.93	10.76	33.22	53.84 -20.62 Average
4	0.198	49.83	0.92	10.76	61.51	63.71 -2.20 QP
5	0.238	45.11	0.94	10.75	56.80	62.17 -5.37 QP
6	0.277	17.21	0.96	10.74	28.91	50.90 -21.99 Average
7	0.282	42.16	0.96	10.74	53.86	60.76 -6.90 QP
8	0.302	41.88	0.97	10.74	53.59	60.19 -6.60 QP
9	0.354	39.71	0.97	10.73	51.41	58.87 -7.46 QP
10	0.589	11.20	0.97	10.76	22.93	46.00 -23.07 Average
11	3.759	5.78	1.00	10.90	17.68	46.00 -28.32 Average
12	15.470	12.96	0.88	10.90	24.74	50.00 -25.26 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.