

FCC RADIO TEST REPORT

FCC ID: 2AOWK3093

Product : Mobile Phone

Trade Mark : ulefone

Model Name : GQ3093

Family Model : Armor X8, Armor X8S, Armor X8E,
Armor X8P, Armor X8A, Armor X8T,
Armor X8 Pro, Armor X8 lite,
Armor X8 Plus

Report No. : STR200721001004E

Prepared for

Shenzhen Gotron Electronic CO.,LTD.
518, 5F, R&D building, Tsinghua Hi-Tech park, Nanshan district,
Shenzhen 518057 P.R.China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 6588
Fax.: +86-755-6115 6599
Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Gotron Electronic CO.,LTD.
Address : 518, 5F, R&D building, Tsinghua Hi-Tech park, Nanshan district,
Shenzhen 518057 P.R.China
Manufacturer's Name : Shenzhen Gotron Electronic CO.,LTD.
Address : 518, 5F, R&D building, Tsinghua Hi-Tech park, Nanshan district,
Shenzhen 518057 P.R.China

Product description

Product name : Mobile Phone
Model and/or type reference : GQ3093
Family Model..... : Armor X8, Armor X8S, Armor X8E, Armor X8P, Armor X8A,
Armor X8T, Armor X8 Pro, Armor X8 lite, Armor X8 Plus

Standards : FCC Part15.407

Test procedure ANSI C63.10-2013 and KDB 789033 D02 General UNII Test
Procedures New Rules v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests 21 Jul. 2020 ~ 20 Aug, 2020

Date of Issue 20 Aug, 2020


Test Result **Pass**

Testing Engineer :



(Mary Hu)

Technical Manager :



(Jason Chen)

Authorized Signatory :



(Alex Li)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . TEST REQUIREMENTS	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION MEASUREMENT	20
3.3 POWER SPECTRAL DENSITY TEST	35
3.4 26DB & 99% EMISSION BANDWIDTH	38
3.5 MINIMUM 6 DB BANDWIDTH	40
3.6 MAXIMUM CONDUCTED OUTPUT POWER	42
3.7 OUT OF BAND EMISSIONS	46
3.8 SPURIOUS RF CONDUCTED EMISSIONS	48
3.9 FREQUENCY STABILITY MEASUREMENT	49
4. ANTENNA REQUIREMENT	56
4.1 STANDARD REQUIREMENT	56
4.2 EUT ANTENNA	56
5. TEST RESULTS	57
5.2G	57
DUTY CYCLE	57
MAXIMUM CONDUCTED OUTPUT POWER	65
OCCUPIED CHANNEL BANDWIDTH	66
MAXIMUM POWER SPECTRAL DENSITY LEVEL	81
BAND EDGE	89
CONDUCTED RF SPURIOUS EMISSION	96
5.8G	104
DUTY CYCLE	104
MAXIMUM CONDUCTED OUTPUT POWER	112
-6DB EMISSION BANDWIDTH	113

Table of Contents

	Page
OCCUPIED CHANNEL BANDWIDTH	121
MAXIMUM POWER SPECTRAL DENSITY LEVEL	136
BAND EDGE	144
CONDUCTED RF SPURIOUS EMISSION	151

Revision History

Report No.	Version	Description	Issued Date
STR200721001004E	Rev.01	Initial issue of report	20 Aug, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen
518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and
CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.
- IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074
- FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184
- A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized
International Standard ISO/IEC 17025:2005 General requirements for the
competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined
scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
- Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.
- Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a
standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of
approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone	
Trade Mark	ulefone	
Model Name	GQ3093	
Family Model	Armor X8, Armor X8S, Armor X8E, Armor X8P, Armor X8A, Armor X8T, Armor X8 Pro, Armor X8 lite, Armor X8 Plus	
Model Difference	All the model are the same circuit and RF module, except the Model names.	
FCC ID	2AOWK3093	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11n/ac (40MHz channel bandwidth) ☒ 802.11ac (80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20):MCS0-MCS8; 802.11ac(VHT40/VHT80):MCS0-MCS9;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20) / ac(VHT20); 5190-5230MHz for 802.11n(HT40)/ac(VHT40); 5210MHz for 802.11ac(VHT80) ☒ 5745-5825 MHz for 802.11a/n(HT20)/ ac(VHT20); 5755-5795 MHz for 802.11a/n(HT40)/ ac(VHT40); 5775MHz for 802.11ac(VHT80)
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Type	PIFA Antenna
	Antenna Gain	0.9dBi
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		
Ratings	DC 3.85V/5080mAh from battery or DC 5V from Adapter.	
Adapter	Model: HJ-0502000W2-US Input: 100-240V~50/60Hz 0.3A Output: 5V---2000mA	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	P2N_02	
SW Version	Armor X8_SH1_EEA_V01	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n/ac(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band I (5190-5230MHz):

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11ac(80MHz) band I (5210MHz):

802.11ac(80MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
42	5210	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band IV (5755-5795MHz):

802.11n/ac(40MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) band IV (5775MHz):

802.11ac(80MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775			-	-

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 / ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 / ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

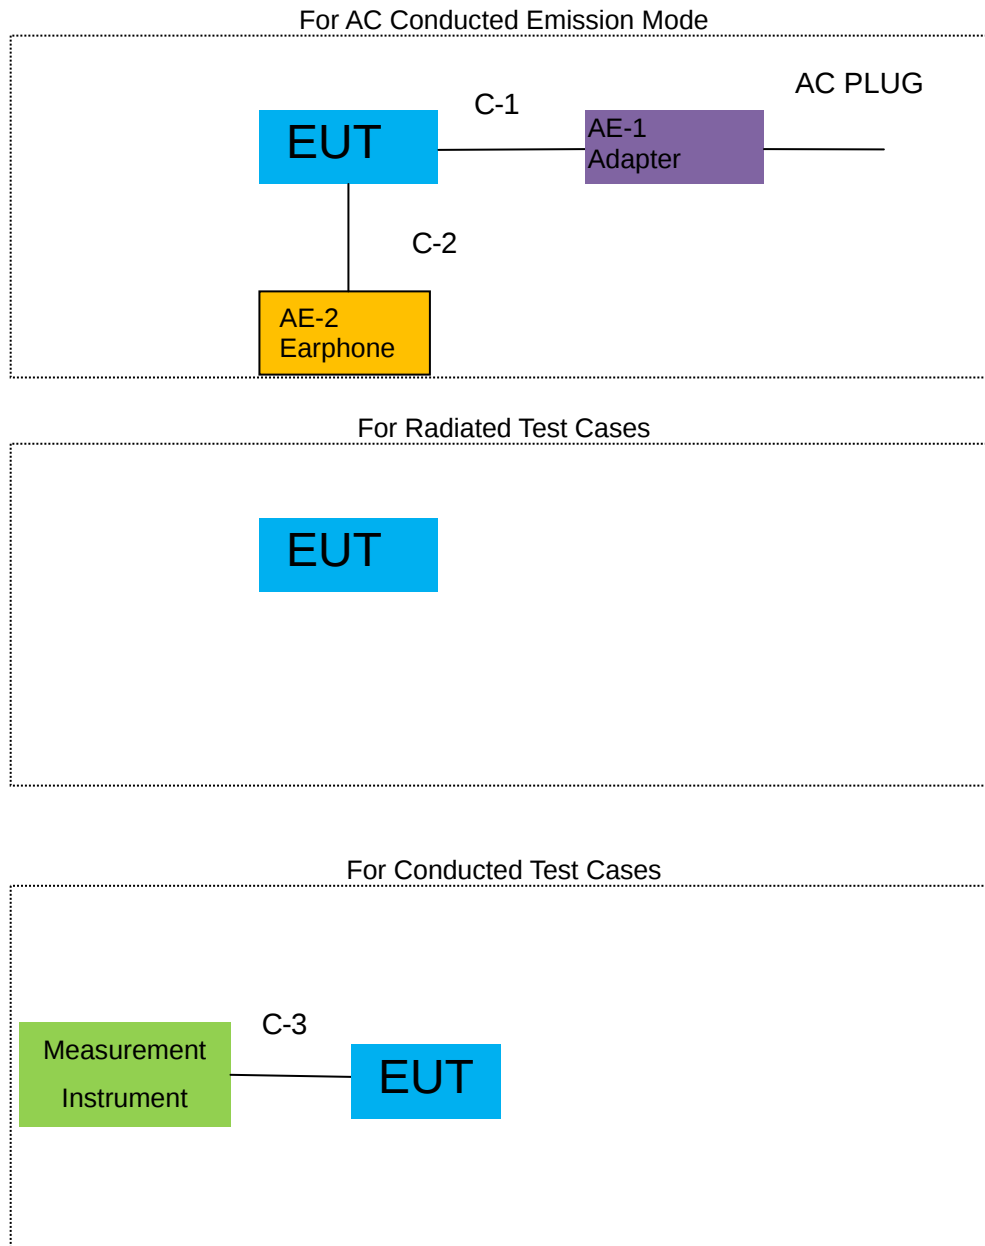

Note:1.The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.
2.EUT built-in battery-powered, the battery is fully-charged.

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	HJ-0502000W2-US	N/A	Peripherals
AE-2	Earphone	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	1.0m
C-2	Earphone Cable	NO	NO	1.2m
C-3	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.07.13	2021.07.12	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.07.13	2021.07.12	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.12.10	2020.12.09	1 year
9	Amplifier	EMC	EMC051835SE	980246	2020.07.13	2021.07.12	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.12.11	2020.12.10	1 year
11	Power Meter	DARE	RPR3006W	15100041SN084	2020.07.13	2021.07.12	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.6	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.6	2022.08.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2020.04.11	2021.04.10	1 year
16	Filter	TRILTHIC	2400MHz	29	2020.07.13	2021.07.12	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.04.11	2021.04.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2021.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

3. TEST REQUIREMENTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 TEST CONFIGURATION

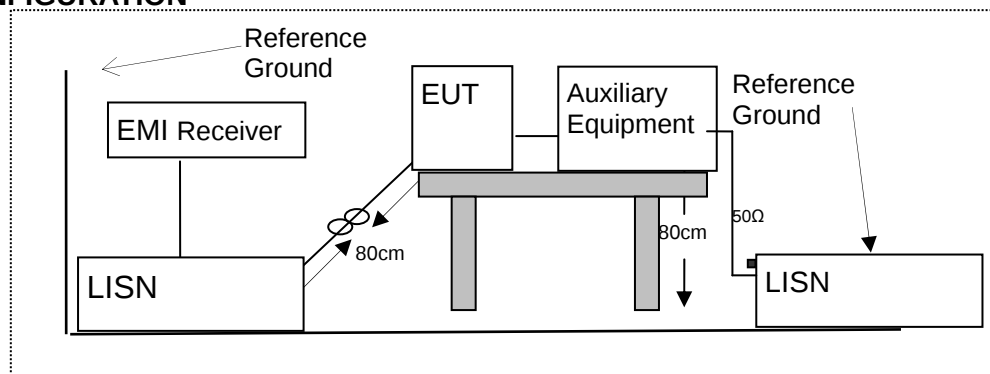

3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


3.1.5 TEST RESULTS

EUT :	Mobile Phone	Model Name :	GQ3093
Temperature :	25 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.7060	38.10	9.55	47.65	56.00	-8.35	peak
0.7060	32.50	9.55	42.05	46.00	-3.95	AVG
1.4140	24.79	9.56	34.35	46.00	-11.65	AVG
2.3740	37.76	9.58	47.34	56.00	-8.66	peak
18.3140	31.71	9.88	41.59	60.00	-18.41	peak
19.1020	16.92	9.91	26.83	50.00	-23.17	AVG

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

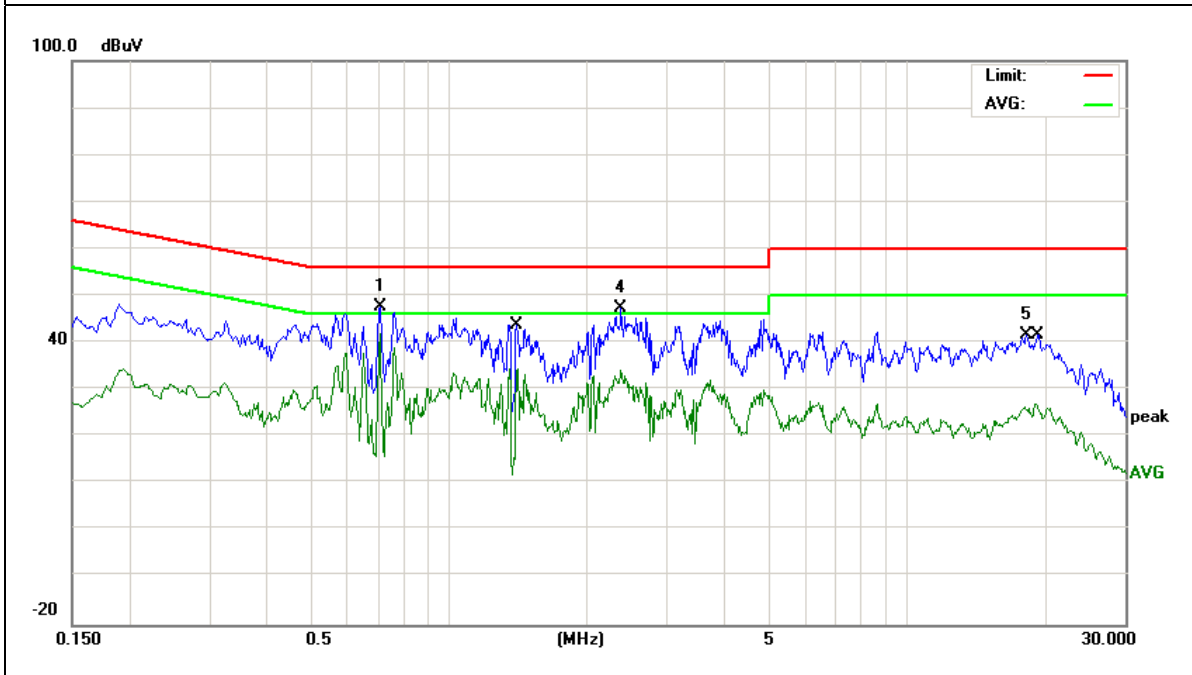

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.7620	24.83	9.54	34.37	46.00	-11.63	AVG
1.2220	35.40	9.55	44.95	56.00	-11.05	peak
2.4500	23.36	9.57	32.93	46.00	-13.07	AVG
2.4980	37.36	9.57	46.93	56.00	-9.07	peak
8.6500	17.50	9.67	27.17	50.00	-22.83	AVG
14.6700	31.82	9.75	41.57	60.00	-18.43	peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

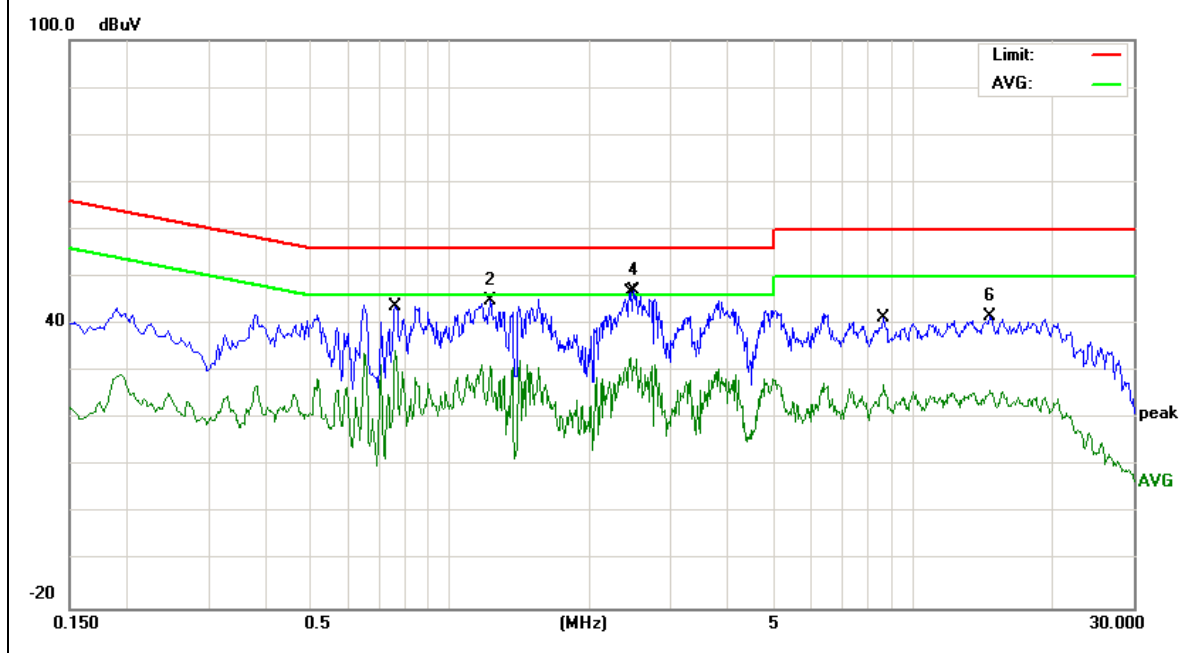


EUT :	Mobile Phone	Model Name :	GQ3093
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.706	38.09	9.54	47.63	56	-8.37	QP
0.706	28.36	9.54	37.9	46	-8.1	AVG
0.9739	27.57	9.55	37.12	56	-18.88	QP
0.9739	19.18	9.55	28.73	46	-17.27	AVG
1.254	27.57	9.55	37.12	56	-18.88	QP
1.254	17.98	9.55	27.53	46	-18.47	AVG
1.822	25.43	9.57	35	56	-21	QP
1.822	16.13	9.57	25.7	46	-20.3	AVG
11.2739	33.8	9.71	43.51	60	-16.49	QP
11.2739	20.63	9.71	30.34	50	-19.66	AVG
19.0939	31.06	9.89	40.95	60	-19.05	QP
19.0939	18.27	9.89	28.16	50	-21.84	AVG

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

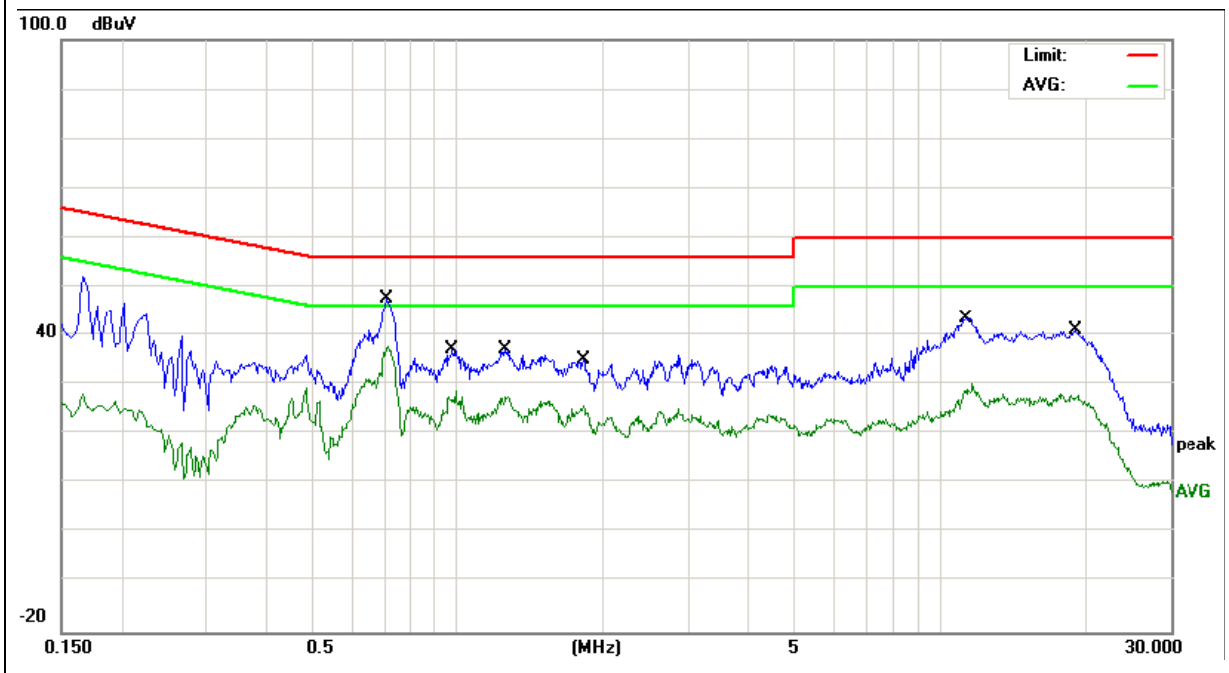

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.722	38.06	9.54	47.6	56	-8.4	QP
0.722	26.17	9.54	35.71	46	-10.29	AVG
1.29	34.35	9.55	43.9	56	-12.1	QP
1.29	21.91	9.55	31.46	46	-14.54	AVG
2.794	29.32	9.59	38.91	56	-17.09	QP
2.794	13.29	9.59	22.88	46	-23.12	AVG
6.5659	40.3	9.64	49.94	60	-10.06	QP
6.5659	15.67	9.64	25.31	50	-24.69	AVG
11.9219	46.45	9.72	56.17	60	-3.83	QP
11.9219	30.31	9.72	40.03	50	-9.97	AVG
14.0059	45.77	9.74	55.51	60	-4.49	QP
14.0059	30.97	9.74	40.71	50	-9.29	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

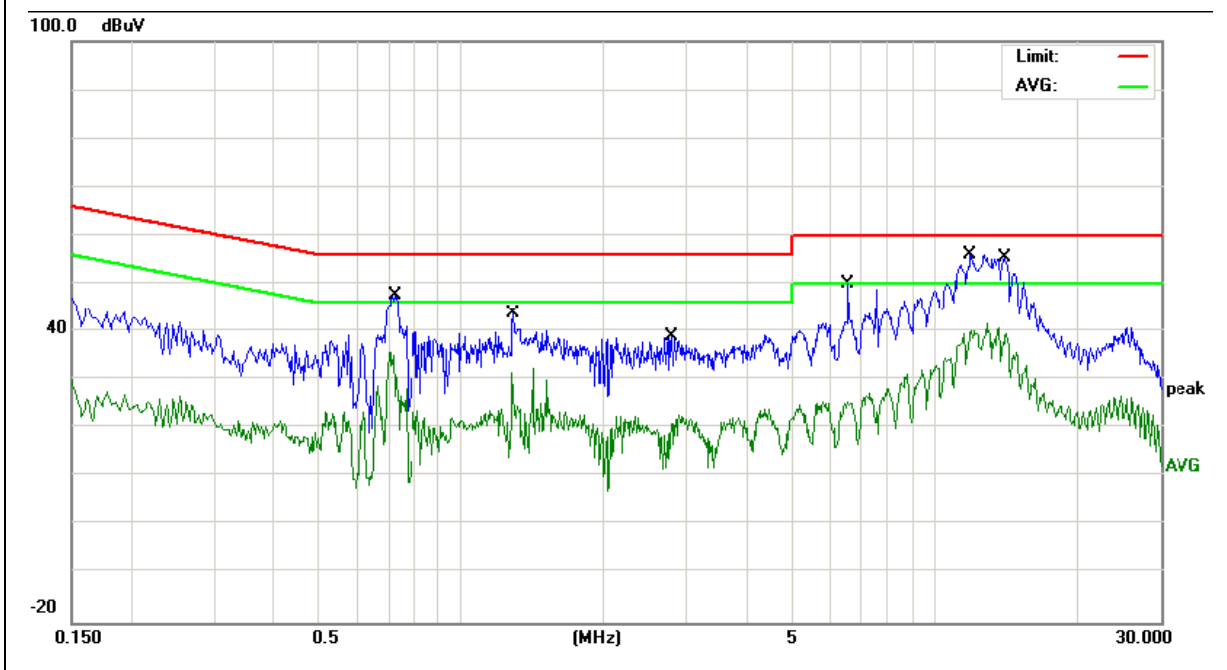

3.2 RADIATED EMISSION MEASUREMENT**3.2.1 APPLICABLE STANDARD**

According to FCC Part 15.407(b) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B ($\text{dB}\mu\text{V/m}$) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\mu\text{V/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor = $40 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor = $20 \log (\text{Specific distance/ test distance})(\text{dB})$;


Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

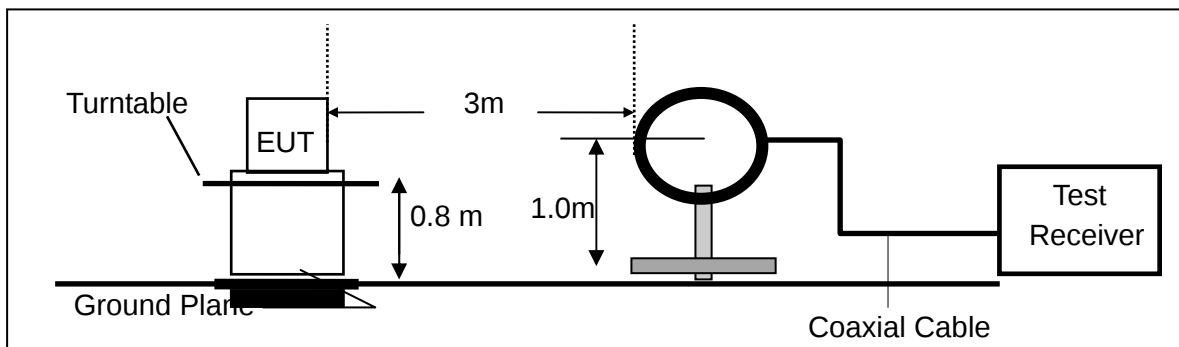

(b) For radiated emissions from 30MHz to 1000MHz

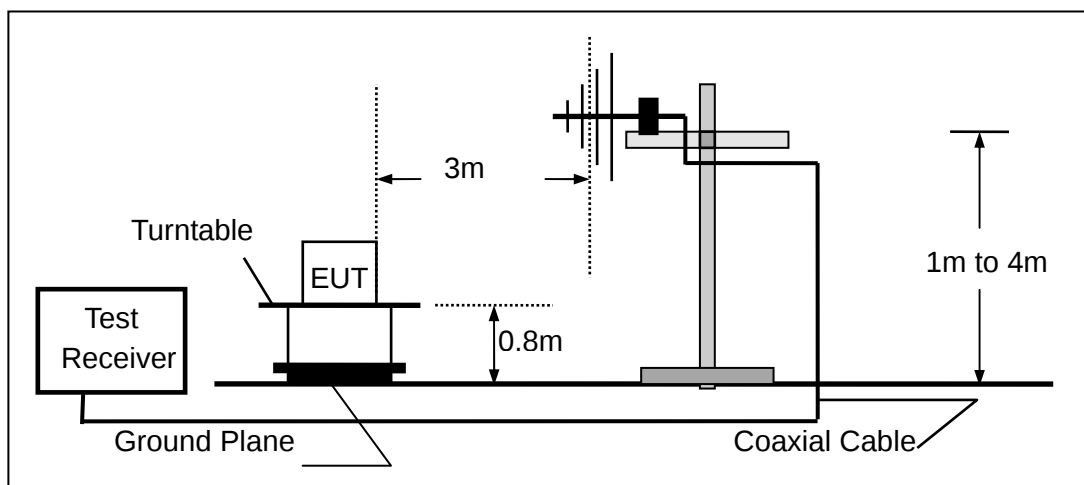

(c) For radiated emissions above 1000MHz

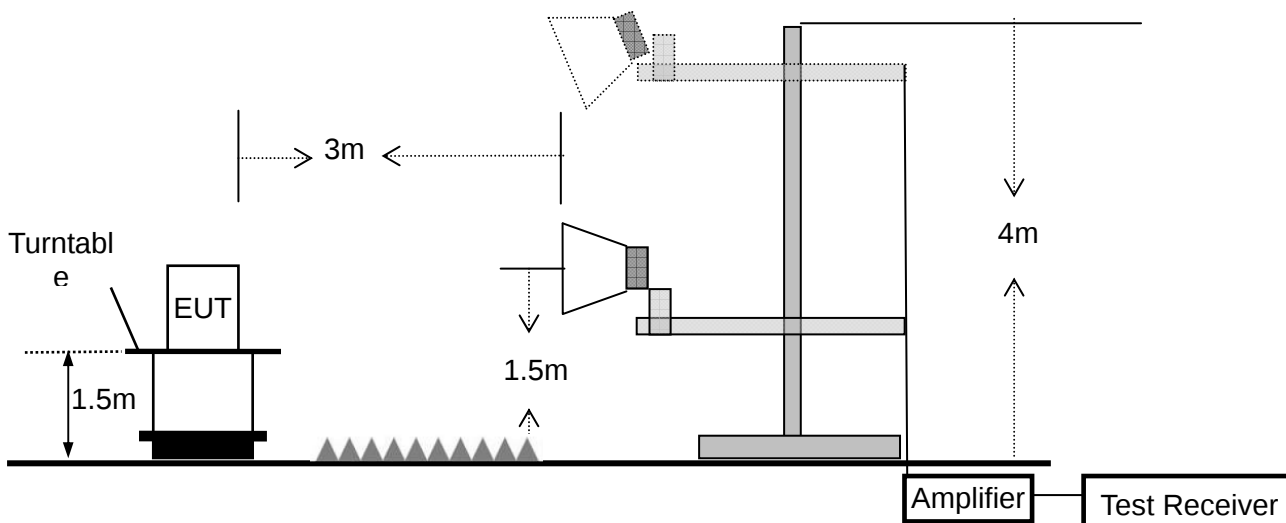

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHz – 30 MHz)

EUT:	Mobile Phone	Model Name. :	GQ3093
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.2.7 TEST RESULTS (30MHz – 1GHz)

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(5.2G)- 802.11a (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	38.8878	10.95	14.51	25.46	40.00	-14.54	peak
V	64.6594	11.56	6.23	17.79	40.00	-22.21	peak
V	147.9214	9.81	12.00	21.81	43.50	-21.69	peak
V	279.0436	7.66	15.72	23.38	46.00	-22.62	peak
V	32.4059	9.64	17.69	27.33	40.00	-12.67	peak
V	199.9856	14.71	9.10	23.81	43.50	-19.69	peak

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

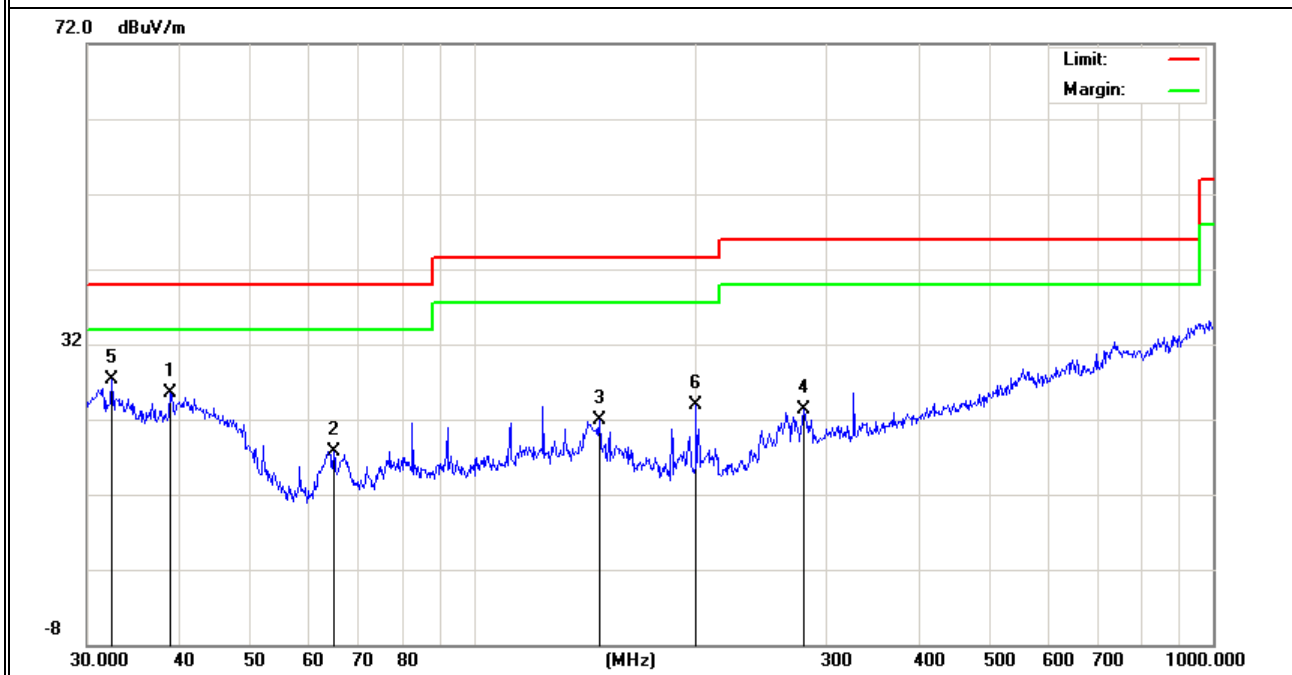

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.3172	6.20	18.68	24.88	40.00	-15.12	peak
H	76.2442	11.52	7.32	18.84	40.00	-21.16	peak
H	147.4036	10.28	12.01	22.29	43.50	-21.21	peak
H	279.0436	9.72	15.72	25.44	46.00	-20.56	peak
H	317.7010	9.92	15.16	25.08	46.00	-20.92	peak
H	830.4002	6.92	25.65	32.57	46.00	-13.43	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

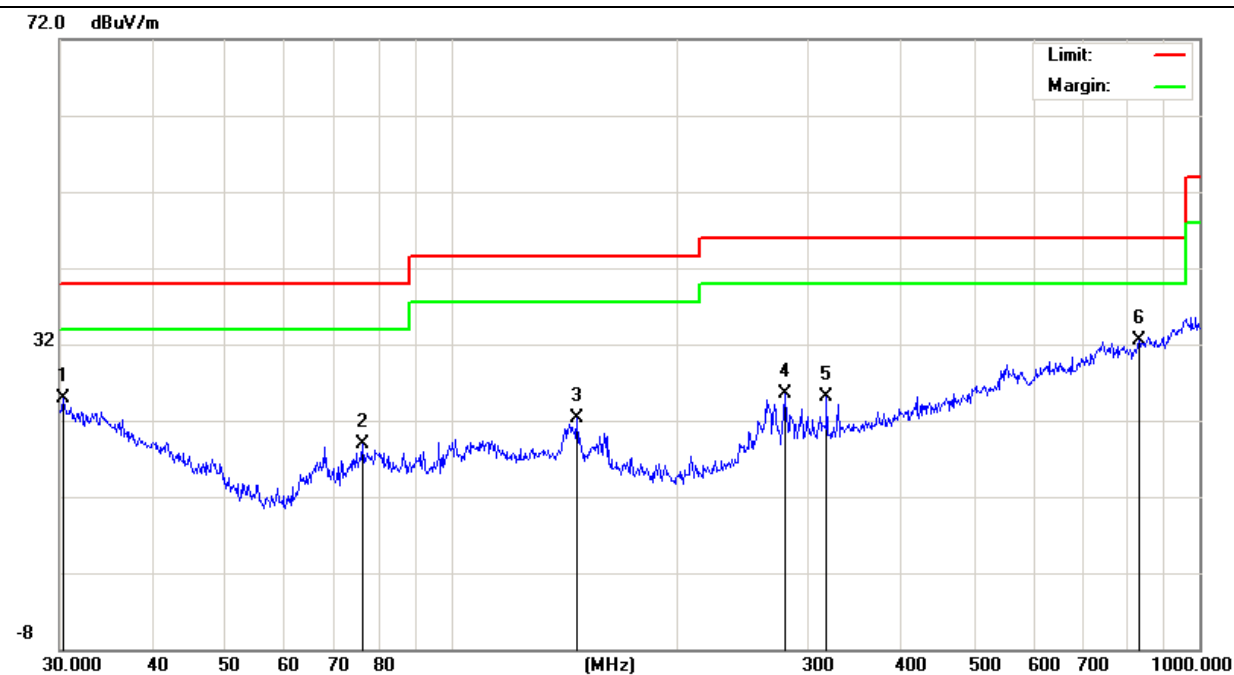


EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(5.8G)- 802.11a (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.7454	8.51	18.44	26.95	40.00	-13.05	peak
V	80.9275	11.56	8.14	19.70	40.00	-20.30	peak
V	112.1305	12.80	11.72	24.52	43.50	-18.98	peak
V	170.1948	13.69	10.79	24.48	43.50	-19.02	peak
V	222.1698	12.84	10.93	23.77	46.00	-22.23	peak
V	912.8619	11.84	26.84	38.68	46.00	-7.32	peak

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

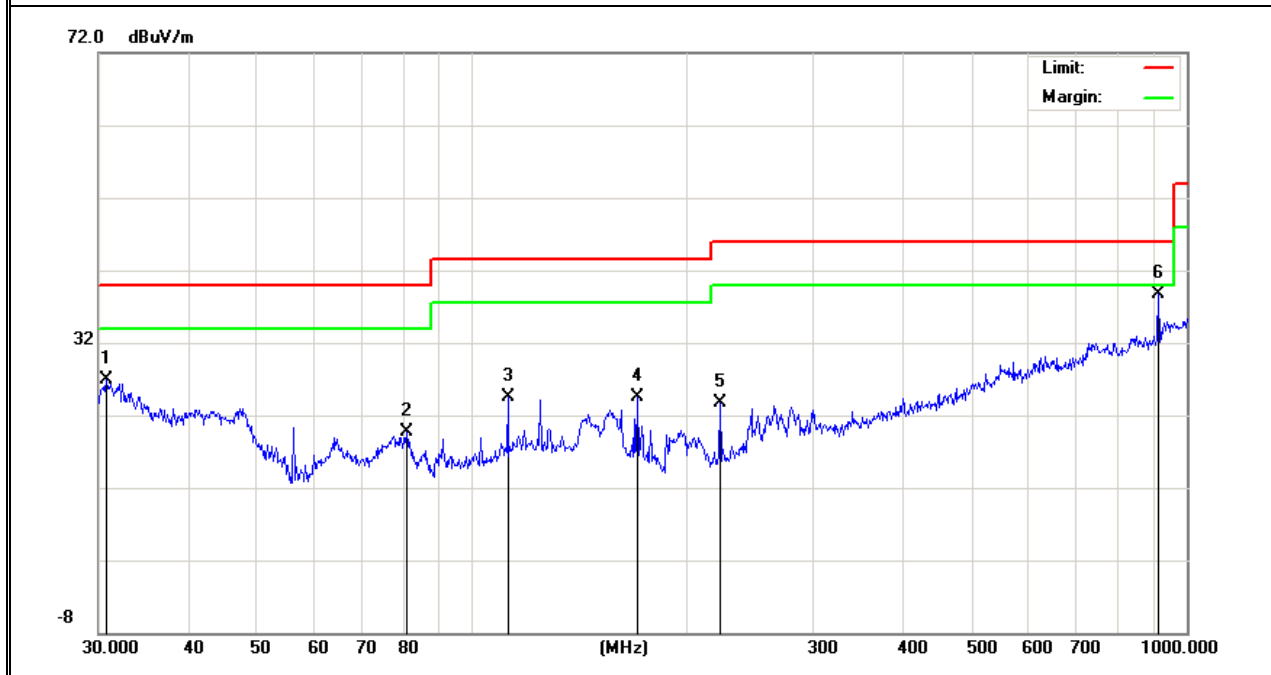

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.1053	6.00	18.78	24.78	40.00	-15.22	peak
H	143.8295	6.82	12.13	18.95	43.50	-24.55	peak
H	279.0436	9.14	15.72	24.86	46.00	-21.14	peak
H	316.5890	11.24	15.21	26.45	46.00	-19.55	peak
H	554.8254	6.87	22.50	29.37	46.00	-16.63	peak
H	958.7943	6.97	28.41	35.38	46.00	-10.62	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

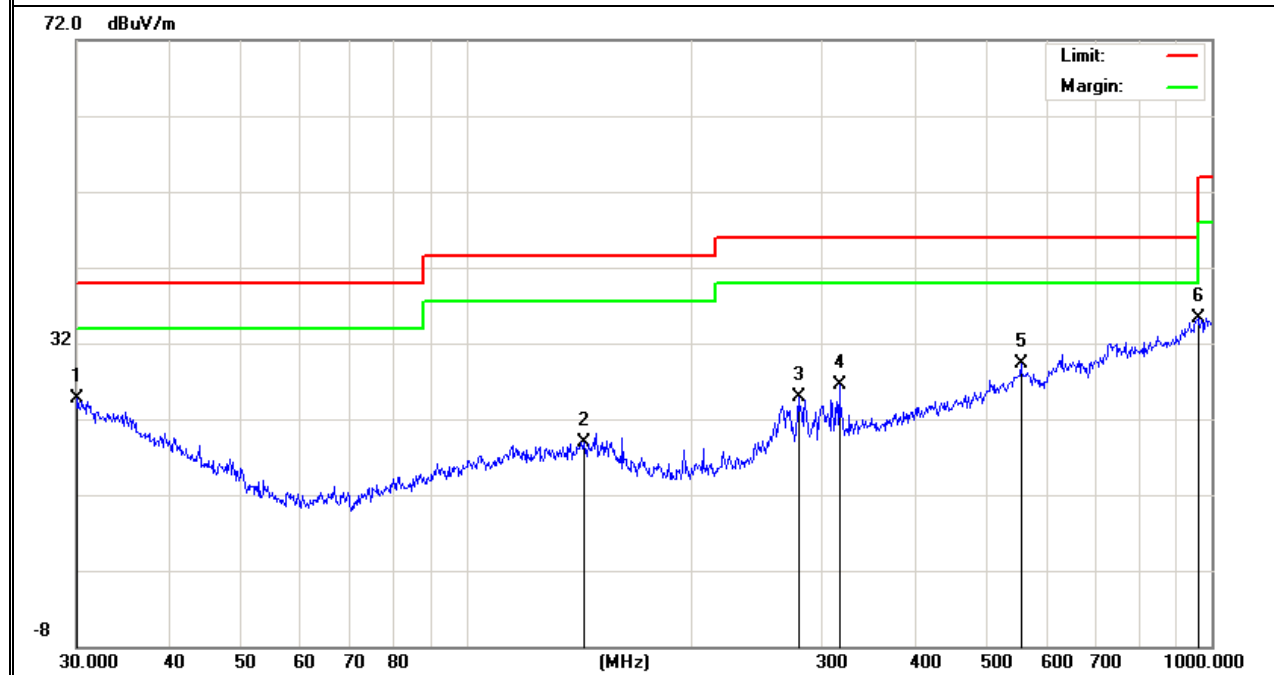

3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(5.2G) - 802.11a _ 5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015	55.47	5.94	35.40	44.00	52.81	68.2	-14.88	Pk
Vertical	10360	59.78	8.46	39.75	44.50	63.49	68.2	-4.71	Pk
Vertical	15540	55.36	10.12	38.80	44.10	60.18	74	-13.82	Pk
Vertical	15540	42.66	10.12	38.80	42.70	48.88	54	-5.12	AV
Horizontal	2981	60.37	5.94	35.18	44.00	57.49	68.2	-10.71	Pk
Horizontal	10360	55.08	8.46	38.71	44.50	57.75	68.2	-10.45	Pk
Horizontal	15540	59.1	10.12	38.38	44.10	63.50	74	-10.50	Pk
Horizontal	15540	41.94	10.12	38.38	44.10	46.34	54	-7.66	AV
Middle Channel (5200 MHz)-Above 1G									
Vertical	3561	58.43	6.48	36.35	44.05	57.21	68.2	-10.99	Pk
Vertical	10400	56.36	8.47	37.88	44.51	58.20	68.2	-10.00	Pk
Vertical	15600	59.65	10.12	38.80	44.10	64.47	74	-9.53	Pk
Vertical	15600	45.1	10.12	38.80	42.70	51.32	54	-2.68	AV
Horizontal	3363	57.68	6.48	36.37	44.05	56.48	68.2	-11.72	Pk
Horizontal	10400	58.76	8.47	38.64	44.50	61.37	68.2	-6.83	Pk
Horizontal	15600	58.48	10.12	38.38	44.10	62.88	74	-11.12	Pk
Horizontal	15600	41.11	10.12	38.38	44.10	45.51	54	-8.49	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3926	56.04	7.10	37.24	43.50	56.88	74	-17.12	Pk
Vertical	3926	41.57	7.10	37.24	43.50	42.41	54	-11.59	AV
Vertical	10480	55.65	8.46	37.68	44.50	57.29	68.2	-10.91	Pk
Vertical	15720	56.55	10.12	38.80	44.10	61.37	74	-12.63	Pk
Vertical	15720	44.28	10.12	38.80	42.70	50.50	54	-3.50	AV
Horizontal	3885	60.78	7.10	37.24	43.50	61.62	74	-12.38	Pk
Horizontal	3885	41.24	7.10	37.24	43.50	42.08	54	-11.92	AV
Horizontal	10480	56.21	8.46	38.57	44.50	58.74	68.2	-9.46	Pk
Horizontal	15720	57.04	10.12	38.38	44.10	61.44	74	-12.56	Pk
Horizontal	15720	45.34	10.12	38.38	44.10	49.74	54	-4.26	AV

Note:"802.11a (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.8G) -- 802.11ac20 _5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806	58.02	5.94	35.40	44.00	55.36	74.00	-18.64	Pk
Vertical	2806	41.37	5.94	35.40	44.00	38.71	54.00	-15.29	AV
Vertical	11490	58.41	8.46	39.75	44.50	62.12	74.00	-11.88	Pk
Vertical	11490	43.75	8.46	39.75	44.50	47.46	54.00	-6.54	AV
Vertical	17235	56.08	10.12	38.80	44.10	60.90	68.20	-7.30	Pk
Horizontal	2911	59.55	5.94	35.18	44.00	56.67	68.20	-11.53	AV
Horizontal	11490	59.93	8.46	38.71	44.50	62.60	74.00	-11.40	Pk
Horizontal	11490	42.13	8.46	38.71	44.50	44.80	54.00	-9.20	AV
Horizontal	17235	56.09	10.12	38.38	44.10	60.49	68.20	-7.71	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763	56.1	6.48	36.35	44.05	54.88	74.00	-19.12	Pk
Vertical	3763	44.26	6.48	36.35	44.05	43.04	54.00	-10.96	AV
Vertical	11570	58.53	8.47	37.88	44.51	60.37	74.00	-13.63	Pk
Vertical	11570	43.6	8.47	37.88	44.51	45.44	54.00	-8.56	AV
Vertical	17355	55.43	10.12	38.8	44.10	60.25	68.20	-7.95	Pk
Horizontal	3561	55	6.48	36.37	44.05	53.80	68.20	-14.40	AV
Horizontal	11570	55.11	8.47	38.64	44.50	57.72	74.00	-16.28	AV
Horizontal	11570	44.3	8.47	38.64	44.50	46.91	54.00	-7.09	Pk
Horizontal	17355	57.97	10.12	38.38	44.10	62.37	68.20	-5.83	Pk
High Channel (5825 MHz)-Above 1G									
Vertical	3907	55.69	7.10	37.24	43.50	56.53	74.00	-17.47	Pk
Vertical	3907	42.86	7.10	37.24	43.50	43.70	54.00	-10.30	AV
Vertical	11650	55.7	8.46	37.68	44.50	57.34	74.00	-16.66	Pk
Vertical	11650	41.44	8.46	37.68	44.50	43.08	54.00	-10.92	AV
Vertical	17475	60.79	10.12	38.8	44.10	65.61	68.20	-2.59	Pk
Horizontal	3912	58.27	7.10	37.24	43.50	59.11	74.00	-14.89	Pk
Horizontal	3912	44.22	7.10	37.24	43.50	45.06	54.00	-8.94	AV
Horizontal	11650	60.3	8.46	38.57	44.50	62.83	74.00	-11.17	Pk
Horizontal	11650	42.41	8.46	38.57	44.50	44.94	54.00	-9.06	AV
Horizontal	17475	56.44	10.12	38.38	44.10	60.84	68.20	-7.36	Pk

Note:"802.11ac20 (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.2.9 TEST RESULTS (18GHz-40GHz)

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz, TX (5.8G)-802.11n20 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:

Low Channel (5180 MHz)-Above 1G


Horizontal

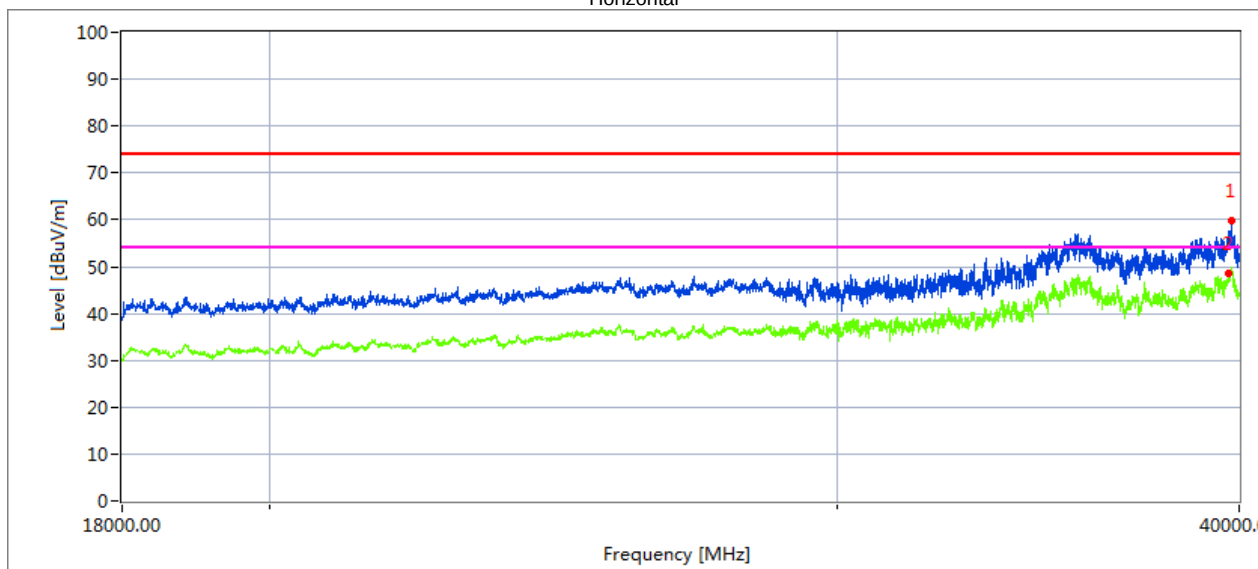

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39765.004	38.03	20.09	44.1	43.22	59	68.2	-9.2
39711.708	38.31	20.09	44.1	43.22	48.5	54	-5.5


Vertical

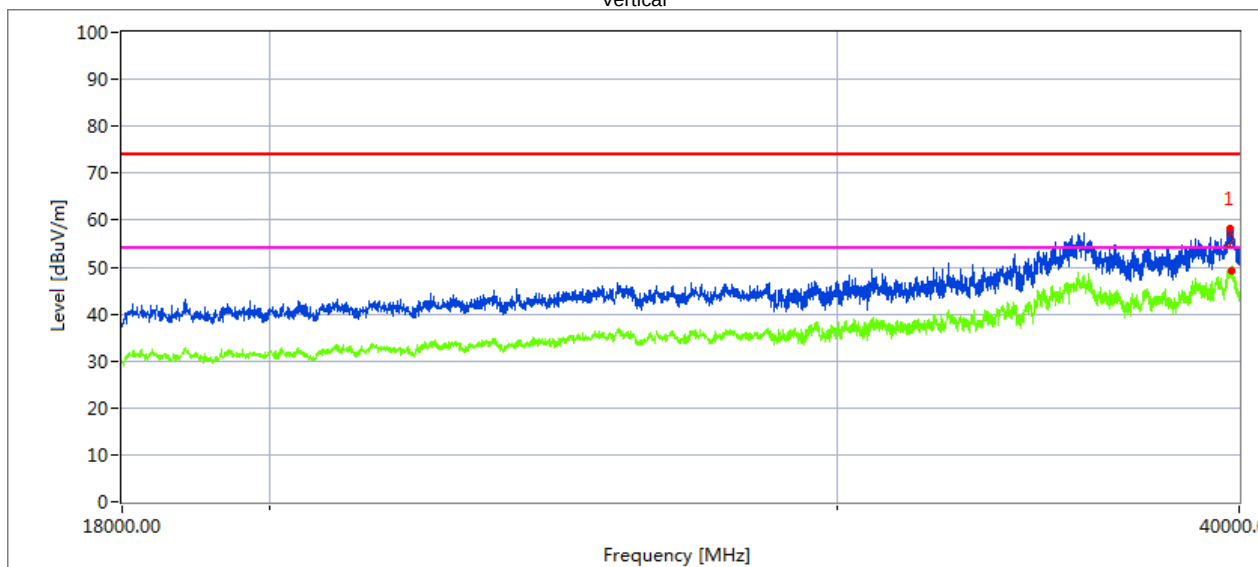

Measurement Result:


Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39787.004	32.23	20.09	44.1	43.22	53.2	68.2	-15.0
39728.984	39.01	20.09	44.1	43.22	49.2	54	-4.8

High Channel (5240 MHz)-Above 1G

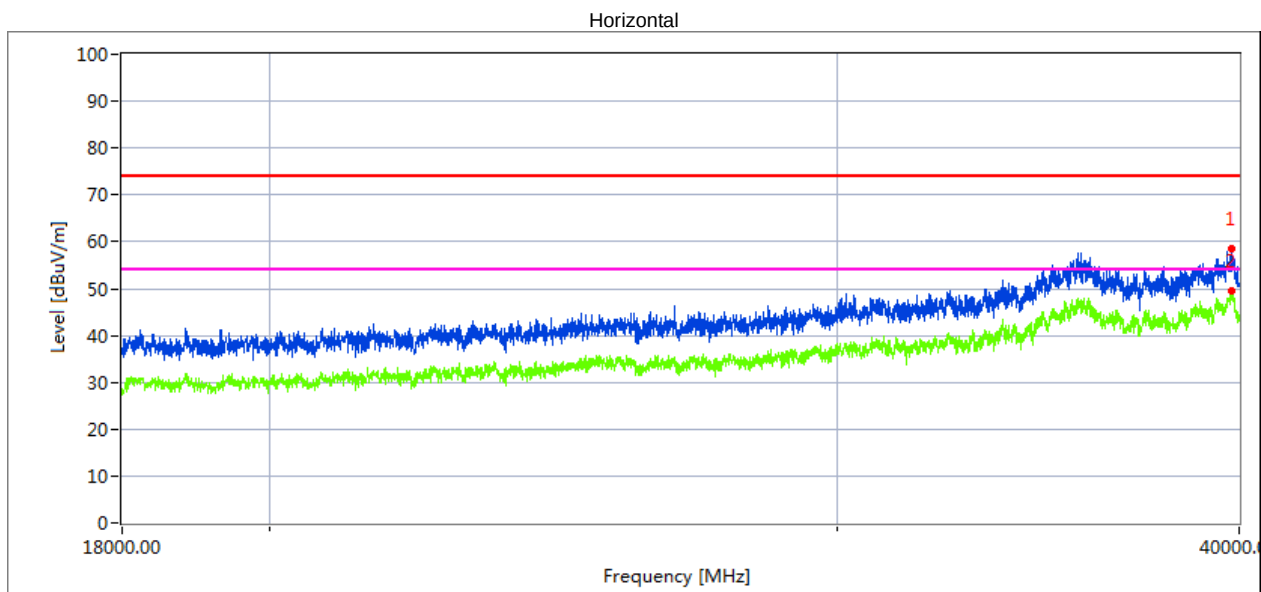

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39769.114	38.23	20.09	44.1	43.22	59.2	68.2	-9.0
39765.828	35.91	20.09	44.1	43.22	46.1	54	-7.9

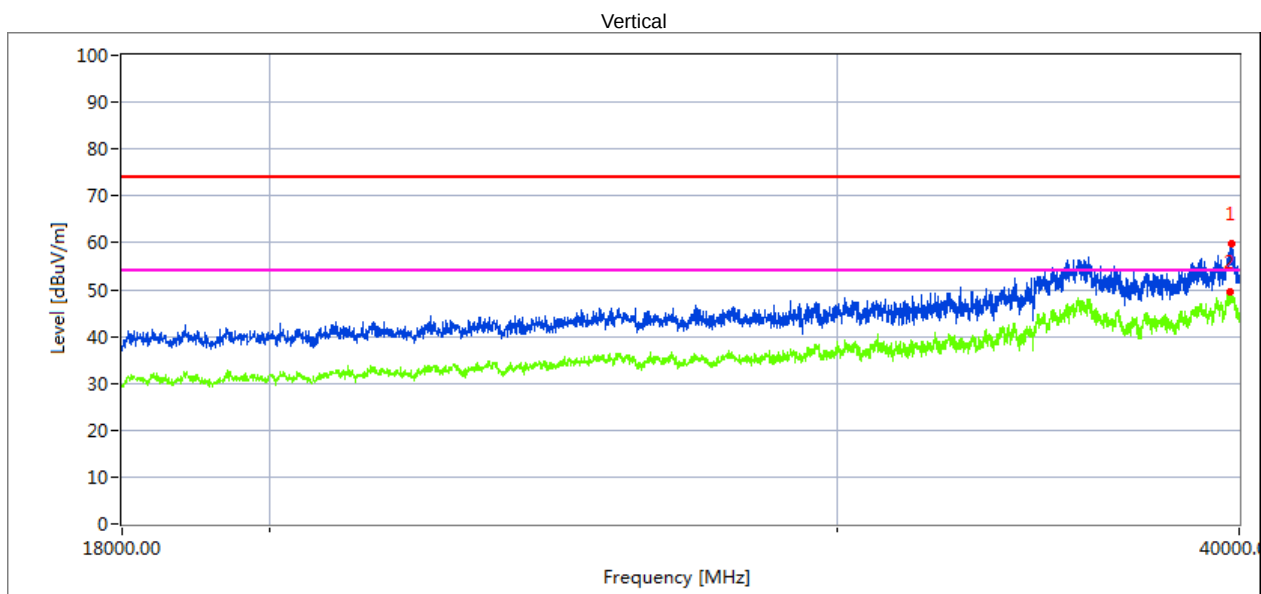


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39770.880	38.63	20.09	44.1	43.22	59.6	68.2	-8.6
39726.734	38.91	20.09	44.1	43.22	49.1	54	-4.9

Low Channel (5745 MHz)-Above 1G


Horizontal

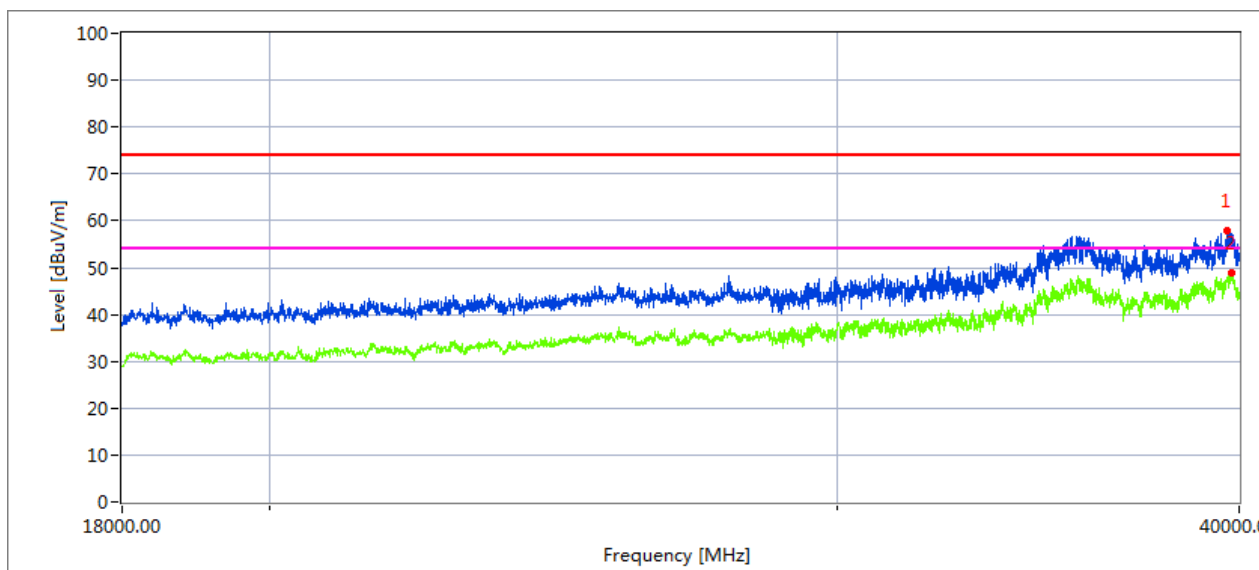

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39656.332	32.03	20.09	44.1	43.22	53	68.2	-15.2
39795.386	39.41	20.09	44.1	43.22	49.6	54	-4.4

Vertical

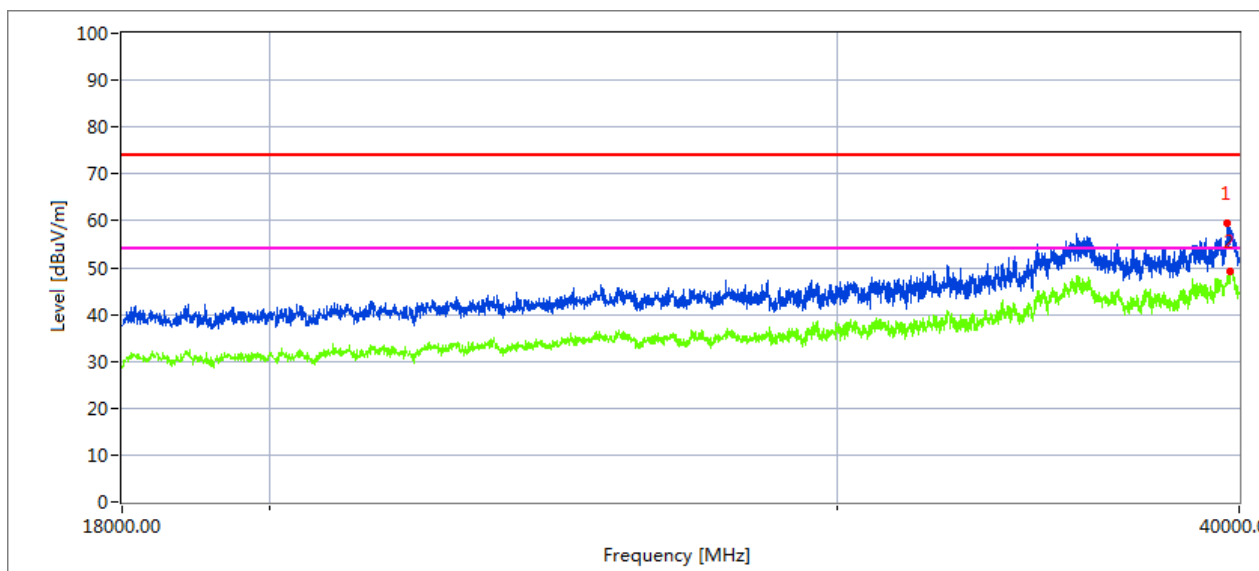


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39673.022	35.42	20.09	44.07	43.48	56.1	68.2	-12.1
39741.302	38.24	20.09	44.07	43.48	48.4	54	-5.6

High Channel (5825 MHz)-Above 1G


Horizontal

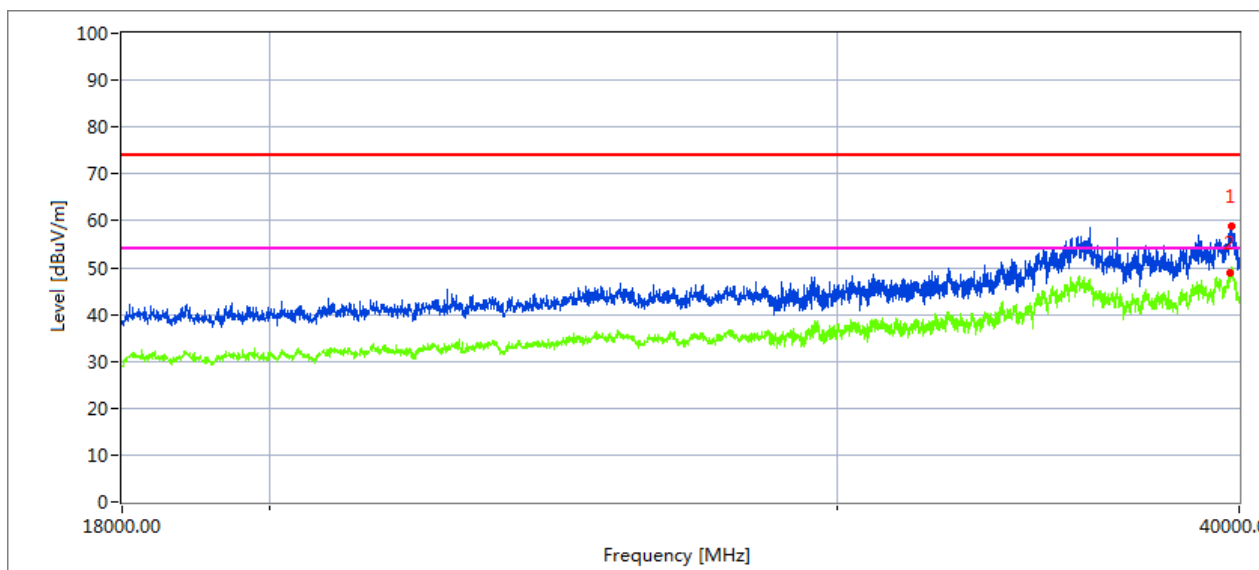

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39794.052	33.43	20.09	44.1	43.22	54.4	68.2	-13.8
39726.504	35.41	20.09	44.1	43.22	45.6	54	-8.4

Vertical

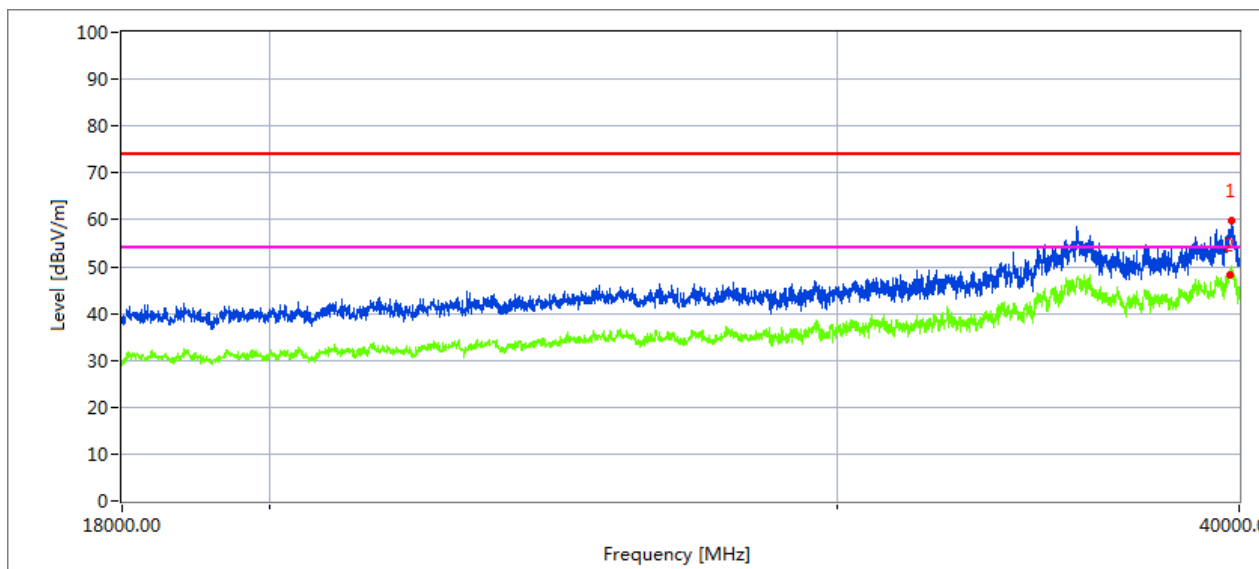

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB
39794.052	33.53	20.09	44.1	43.22	54.5	68.2	-13.7
39726.504	34.01	20.09	44.1	43.22	44.2	54	-9.8

3.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.2G)-802.11a 5150MHz~5250MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequen cy	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detec tor	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11ac40 Mode									
4500	60.96	5.2	35.6	44.2	57.56	74	-16.44	Pk	Horizontal
4500	44.99	5.2	35.6	44.2	41.59	54	-12.41	AV	Horizontal
4500	52.00	5.2	35.6	44.2	48.60	74	-25.40	Pk	Vertical
4500	38.35	5.2	35.6	44.2	34.95	54	-19.05	AV	Vertical
5150	73.06	5.36	35.66	44.22	69.86	74	-4.14	Pk	Horizontal
5150	50.69	5.36	35.66	44.22	47.49	54	-6.51	AV	Horizontal
5150	74.00	5.36	35.66	44.22	70.80	74	-3.20	Pk	Vertical
5150	50.31	5.36	35.66	44.22	47.11	54	-6.89	AV	Vertical
5350	60.11	5.68	35.68	44.22	57.25	74	-16.75	Pk	Vertical
5350	39.80	5.68	35.68	44.22	36.94	54	-17.06	AV	Vertical
5350	52.23	5.68	35.68	44.22	49.37	74	-24.63	Pk	Horizontal
5350	37.76	5.68	35.68	44.22	34.90	54	-19.10	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3.3 POWER SPECTRAL DENSITY TEST

3.3.1 Applied procedures / limit

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3.3 DEVIATION FROM STANDARD

No deviation.

3.3.4 TEST SETUP



3.3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULTS

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

3.4 26DB & 99% EMISSION BANDWIDTH

3.4.1 Applied procedures / limit


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

3.4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

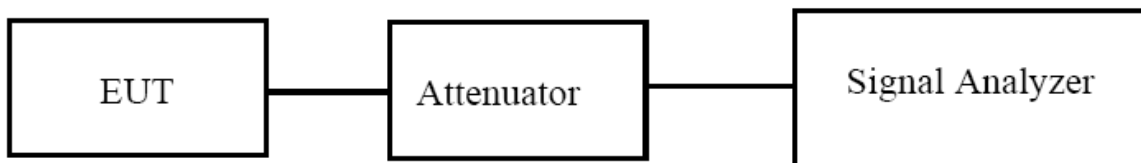

3.4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.4 TEST RESULTS

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

3.5 MINIMUM 6 DB BANDWIDTH

3.5.1 Applied procedures / limit

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.5.3 DEVIATION FROM STANDARD

No deviation.

3.5.4 TEST SETUP

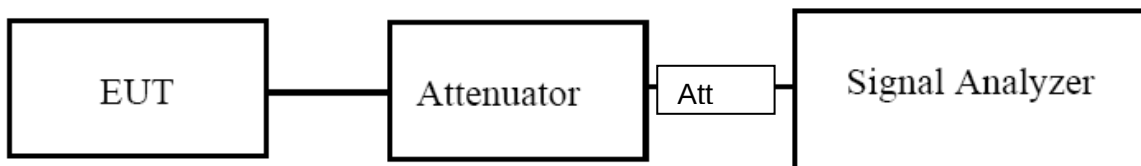

3.5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.5.6 TEST RESULTS

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5850MHz)		

Test data reference attachment.

3.6 MAXIMUM CONDUCTED OUTPUT POWER

3.6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

3.6.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

3.6.3 DEVIATION FROM STANDARD

No deviation.

3.6.4 TEST SETUP

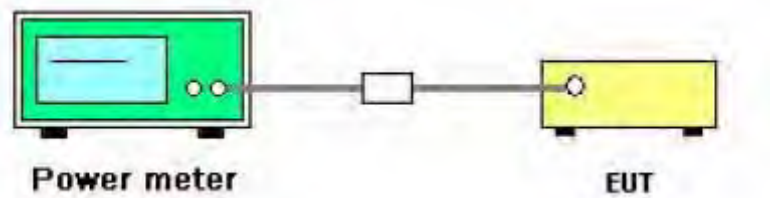

3.6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6.6 TEST RESULTS

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

3.7 OUT OF BAND EMISSIONS

3.7.1 Applicable Standard

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

3.7.3 DEVIATION FROM STANDARD

No deviation.

3.7.4 TEST SETUP

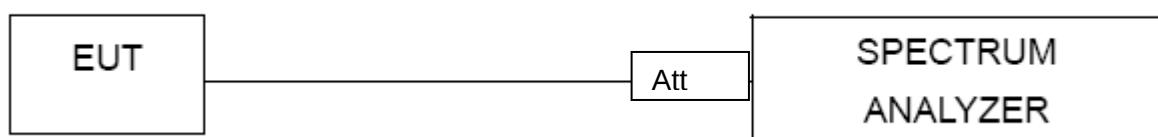

3.7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.7.6 TEST RESULTS

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V

Test data reference attachment.

3.8 SPURIOUS RF CONDUCTED EMISSIONS

3.8.1 Conformance Limit

According to FCC §15.407(b)(1) (2) (3) (4)

3.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

3.8.3 Test Setup

Please refer to Section 6.1 of this test report.

3.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 40GHz.

3.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test data reference attachment.

3.9 FREQUENCY STABILITY MEASUREMENT


3.9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6 \text{ ppm}$.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

3.9.3 TEST SETUP LAYOUT

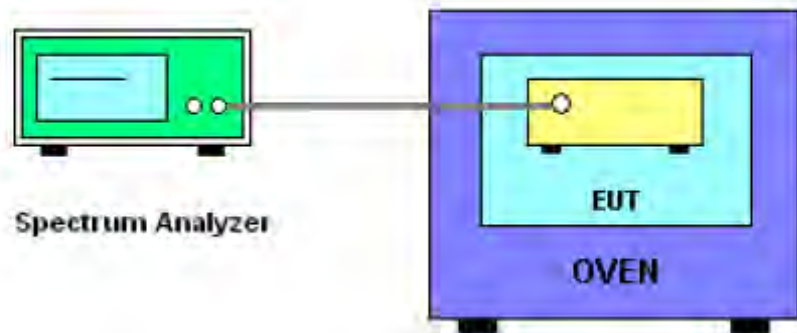

3.9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

3.9.5 TEST RESULTS

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5180.0375	5180	0.0375	-7.2475
		V max (V)	3.4	5180.0738	5180	0.0738	-14.2525
		V min (V)	4.4	5180.0456	5180	0.0456	-8.7943
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5180.0318	5180	0.0318	-6.1344
		T (°C)	-10	5180.0018	5180	0.0018	-0.3392
		T (°C)	0	5180.0685	5180	0.0685	-13.2193
		T (°C)	10	5180.0386	5180	0.0386	-7.4453
		T (°C)	20	5180.0286	5180	0.0286	-5.5293
		T (°C)	30	5180.0604	5180	0.0604	-11.6634
		T (°C)	40	5180.0087	5180	0.0087	-1.6851
		T (°C)	50	5180.0648	5180	0.0648	-12.5084
		T (°C)	60	5180.0360	5180	0.0360	-6.9562
		T (°C)	70	5180.0375	5180	0.0375	-7.2372
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5200.0582	5200	0.0582	-11.1940
		V max (V)	3.4	5200.0656	5200	0.0656	-12.6112
		V min (V)	4.4	5200.0133	5200	0.0133	-2.5594
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5200.0074	5200	0.0074	-1.4254
		T (°C)	-10	5200.0143	5200	0.0143	-2.7476
		T (°C)	0	5200.0538	5200	0.0538	-10.3382
		T (°C)	10	5200.0148	5200	0.0148	-2.8422
		T (°C)	20	5200.0757	5200	0.0757	-14.5613
		T (°C)	30	5200.0183	5200	0.0183	-3.5266
		T (°C)	40	5200.0466	5200	0.0466	-8.9671
		T (°C)	50	5200.0325	5200	0.0325	-6.2490
		T (°C)	60	5200.0764	5200	0.0764	-14.6947
		T (°C)	70	5200.0504	5200	0.0504	-9.6844
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5240.0454	5240	0.0454	-8.6733
		V max (V)	3.4	5240.0679	5240	0.0679	-12.9563
		V min (V)	4.4	5240.0681	5240	0.0681	-12.9978
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5240.0761	5240	0.0761	-14.5217
		T (°C)	-10	5240.0722	5240	0.0722	-13.7747
		T (°C)	0	5240.0490	5240	0.0490	-9.3439
		T (°C)	10	5240.0073	5240	0.0073	-1.3977
		T (°C)	20	5240.0196	5240	0.0196	-3.7327
		T (°C)	30	5240.0117	5240	0.0117	-2.2313
		T (°C)	40	5240.0255	5240	0.0255	-4.8747
		T (°C)	50	5240.0541	5240	0.0541	-10.3194
		T (°C)	60	5240.0455	5240	0.0455	-8.6827
		T (°C)	70	5240.0587	5240	0.0587	-11.2095
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Mobile Phone	Model Name. :	GQ3093
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency(5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5745.0631	5745	0.06310	-10.9835
		V max (V)	3.4	5745.0703	5745	0.07030	-12.2371
		V min (V)	4.4	5745.0650	5745	0.06498	-11.3112
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5745.0501	5745	0.05013	-8.7255
		T (°C)	-10	5745.0504	5745	0.05042	-8.7763
		T (°C)	0	5745.0023	5745	0.00231	-0.4013
		T (°C)	10	5745.0797	5745	0.07973	-13.8777
		T (°C)	20	5745.0774	5745	0.07739	-13.4700
		T (°C)	30	5745.0763	5745	0.07635	-13.2890
		T (°C)	40	5745.0530	5745	0.05296	-9.2189
		T (°C)	50	5745.0503	5745	0.05034	-8.7632
		T (°C)	60	5745.0441	5745	0.04407	-7.6709
		T (°C)	70	5745.0295	5745	0.02950	-5.1347
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom(° C)	20	V nom (V)	3.85	5785.0036	5785	0.00363	-0.6280
		V max (V)	3.4	5785.0701	5785	0.07014	-12.1250
		V min (V)	4.4	5785.0292	5785	0.02918	-5.0439
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5785.0333	5785	0.03326	-5.7502
		T (°C)	-10	5785.0182	5785	0.01816	-3.1391
		T (°C)	0	5785.0398	5785	0.03976	-6.8733
		T (°C)	10	5785.0635	5785	0.06350	-10.9763
		T (°C)	20	5785.0416	5785	0.04164	-7.1977
		T (°C)	30	5785.0743	5785	0.07427	-12.8381
		T (°C)	40	5785.0423	5785	0.04226	-7.3053
		T (°C)	50	5785.0711	5785	0.07107	-12.2848
		T (°C)	60	5785.0622	5785	0.06225	-10.7604
		T (°C)	70	5785.0721	5785	0.07210	-12.4637
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5825.0404	5825	0.04043	-6.9407
		V max (V)	3.40	5825.0614	5825	0.06142	-10.5438
		V min (V)	4.40	5825.0188	5825	0.01876	-3.2213
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
Vnom (V)	3.85	T (°C)	-20	5825.0339	5825	0.03395	-5.8280
		T (°C)	-10	5825.0138	5825	0.01385	-2.3770
		T (°C)	0	5825.0681	5825	0.06812	-11.6943
		T (°C)	10	5825.0657	5825	0.06570	-11.2797
		T (°C)	20	5825.0499	5825	0.04993	-8.5709
		T (°C)	30	5825.0499	5825	0.04991	-8.5684
		T (°C)	40	5825.0397	5825	0.03970	-6.8159
		T (°C)	50	5825.0669	5825	0.06691	-11.4872
		T (°C)	60	5825.0452	5825	0.04518	-7.7554
		T (°C)	70	5825.0218	5825	0.02183	-3.7485
Limits				Within 5745-5850MHz			
Result				Complies			

4. ANTENNA REQUIREMENT

4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.2 EUT ANTENNA

The EUT antenna is permanent attached PIFA antenna (antenna gain: 0.9dBi). It comply with the standard requirement.


5. TEST RESULTS

5.2G


DUTY CYCLE

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	802.11a	5180	100	0
NVNT	802.11a	5200	100	0
NVNT	802.11a	5240	100	0
NVNT	802.11ac20	5180	100	0
NVNT	802.11ac20	5200	100	0
NVNT	802.11ac20	5240	100	0
NVNT	802.11ac40	5190	100	0
NVNT	802.11ac40	5230	100	0
NVNT	802.11ac80	5210	100	0
NVNT	802.11n(HT20)	5180	100	0
NVNT	802.11n(HT20)	5200	100	0
NVNT	802.11n(HT20)	5240	100	0
NVNT	802.11n(HT40)	5190	100	0
NVNT	802.11n(HT40)	5230	100	0

Duty Cycle NVNT 802.11a 5180MHz

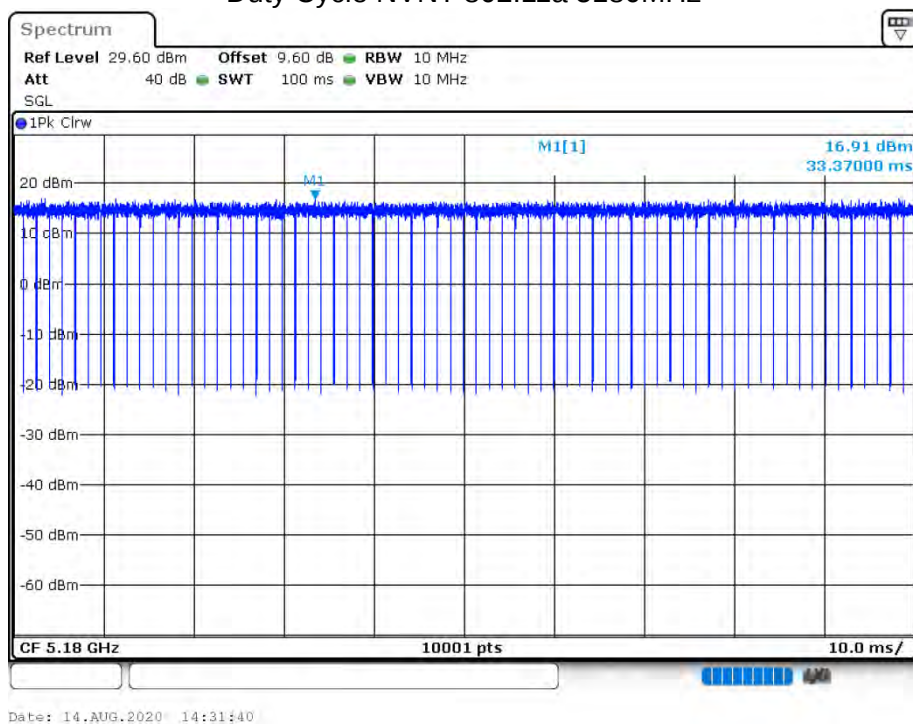


Duty Cycle NVNT 802.11a 5200MHz

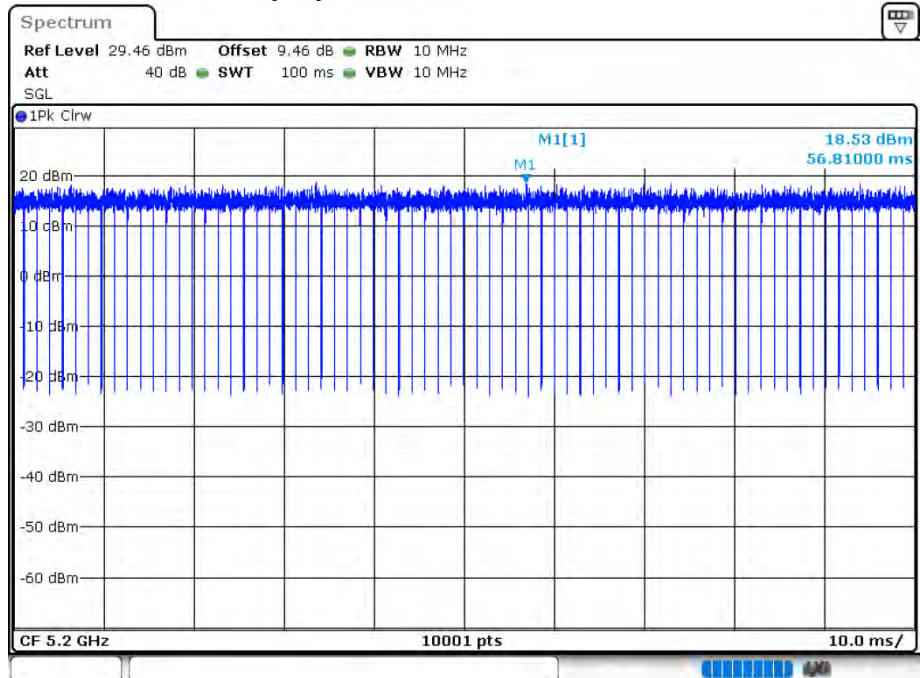


Date: 14.AUG.2020 14:32:51

Duty Cycle NVNT 802.11a 5240MHz

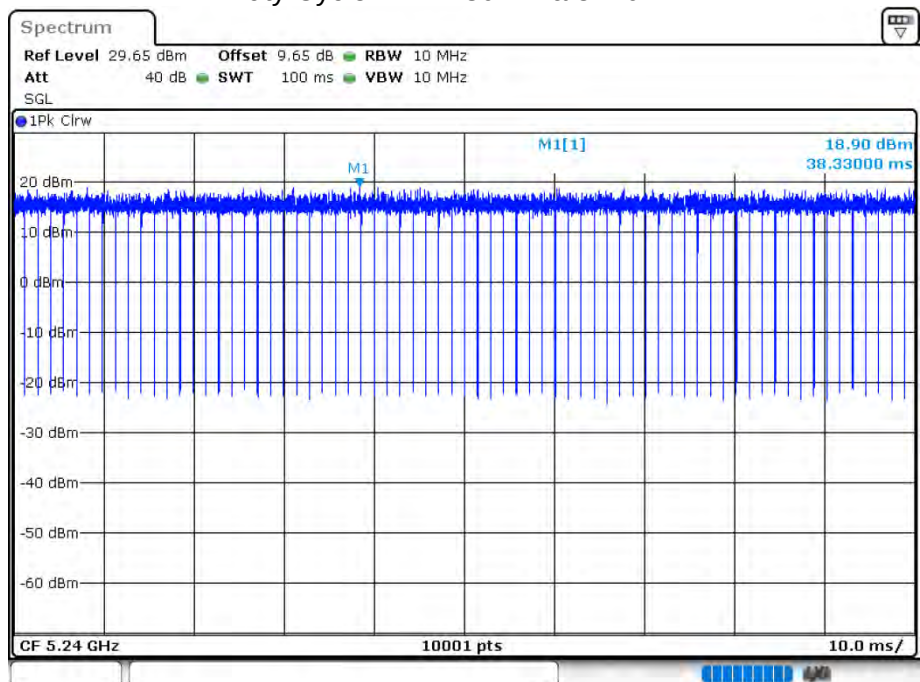


Date: 14.AUG.2020 14:34:02


Duty Cycle NVNT 802.11ac20 5180MHz

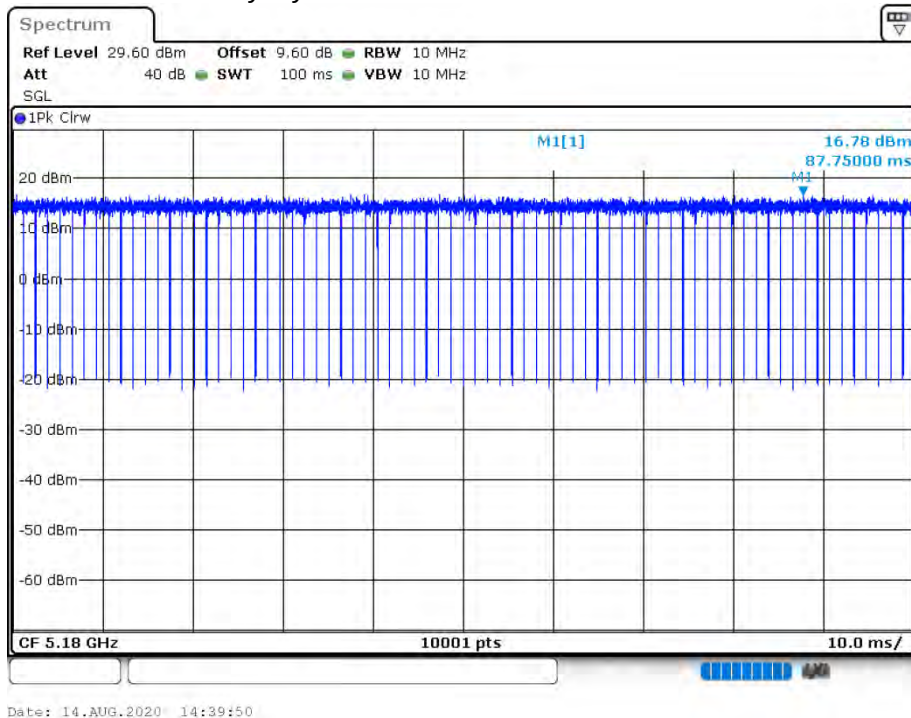

Duty Cycle NVNT 802.11ac20 5200MHz

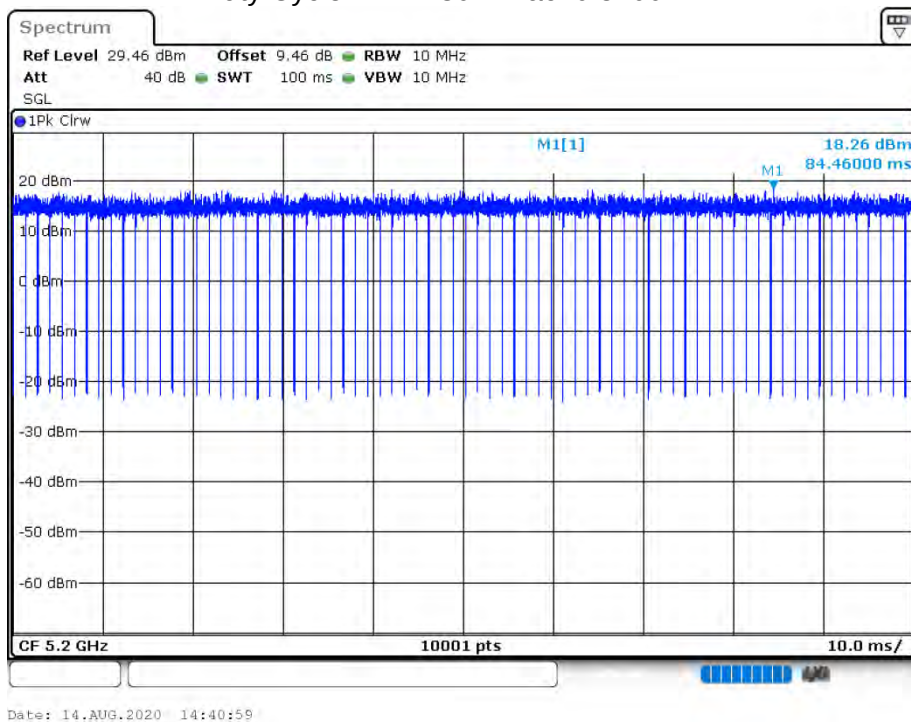


Duty Cycle NVNT 802.11ac20 5240MHz

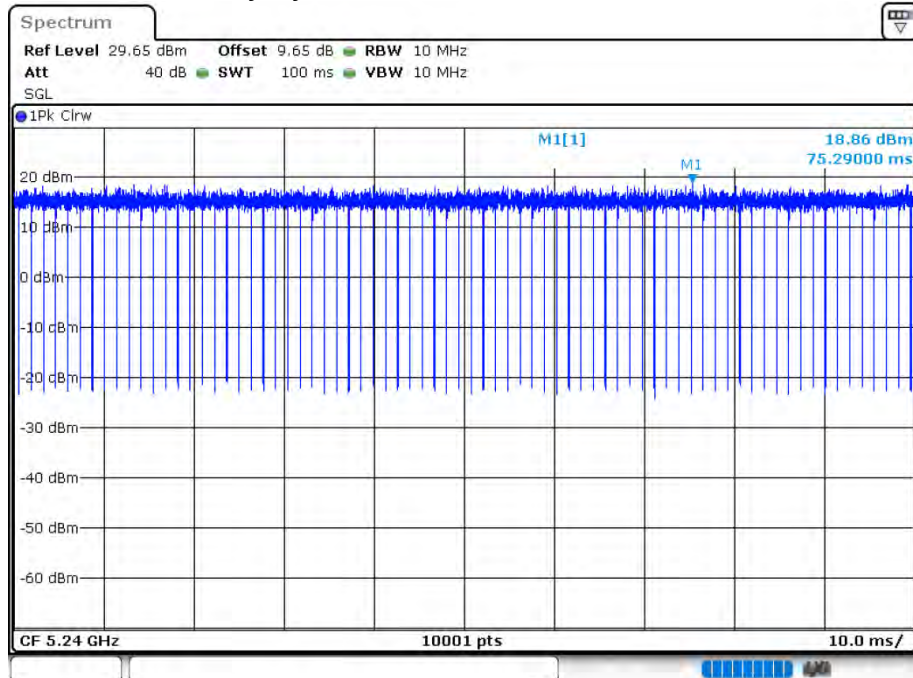


Date: 14.AUG.2020 14:42:09

Duty Cycle NVNT 802.11ac40 5190MHz

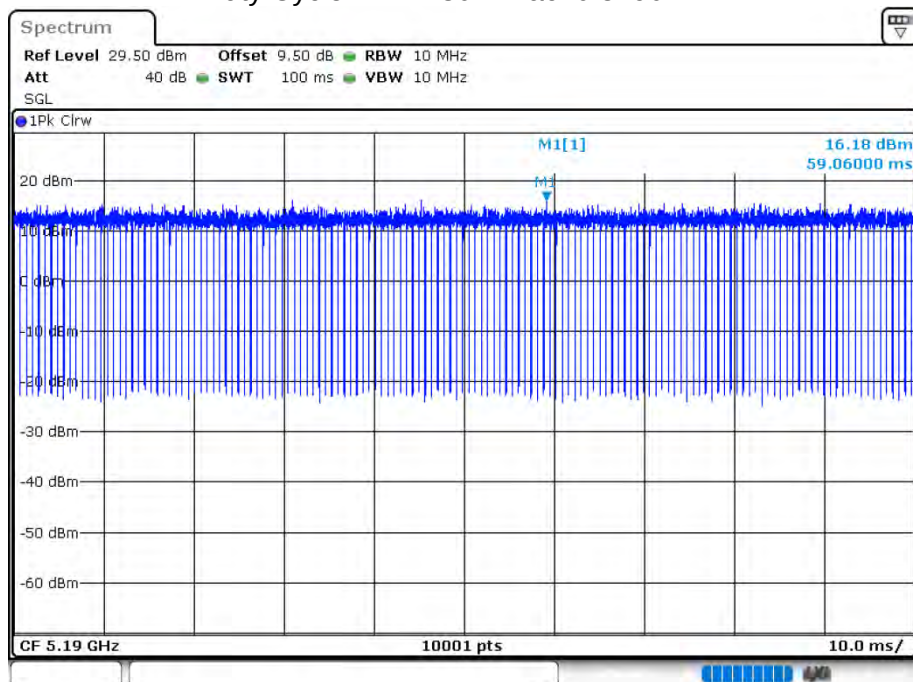


Date: 14.AUG.2020 14:46:15

Duty Cycle NVNT 802.11ac40 5230MHz

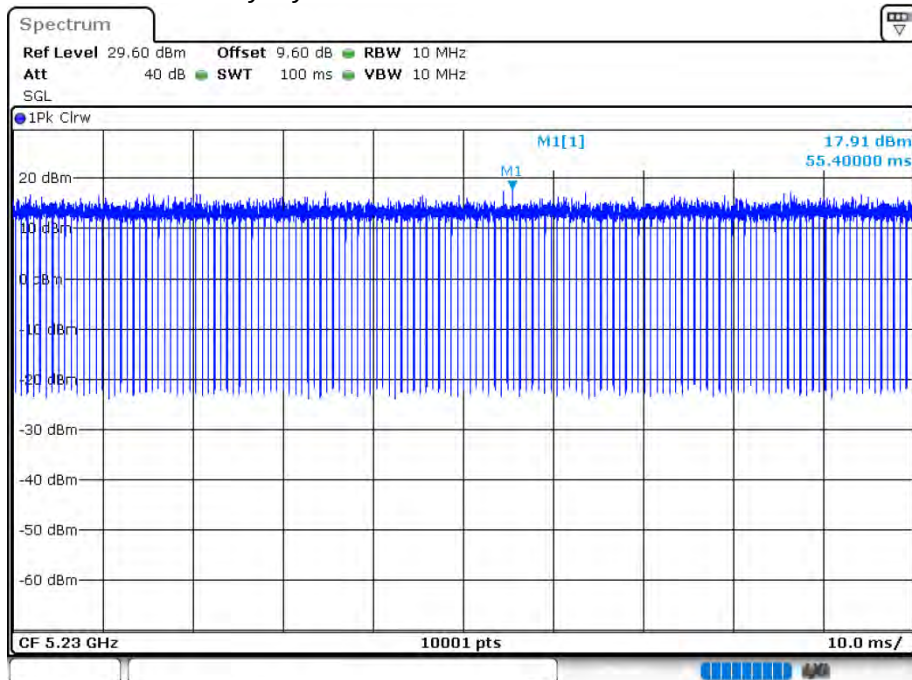


Date: 14.AUG.2020 14:47:39

Duty Cycle NVNT 802.11ac80 5210MHz

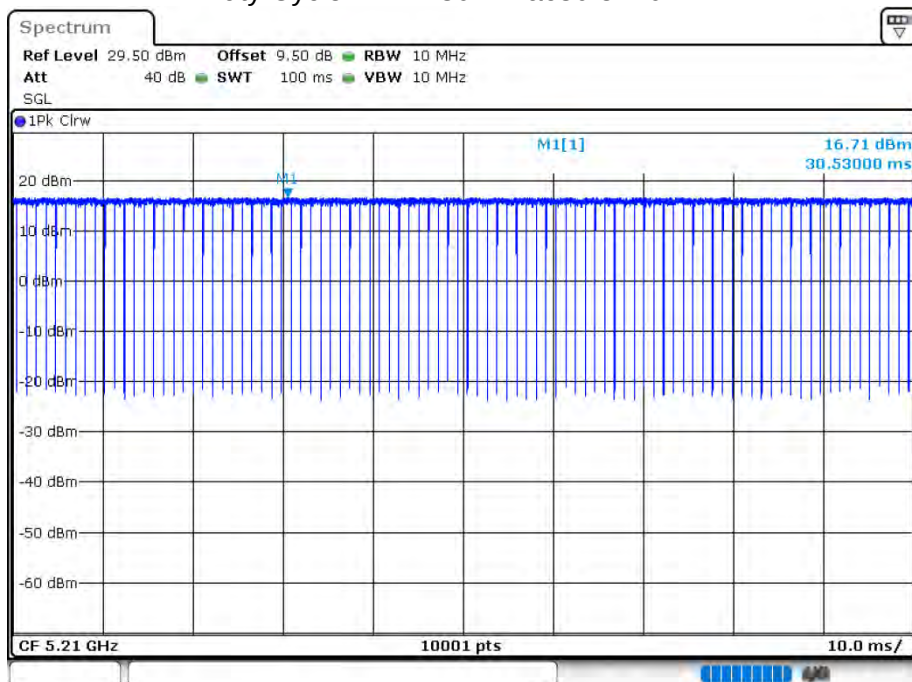


Date: 14.AUG.2020 14:49:11


Duty Cycle NVNT 802.11n(HT20) 5180MHz

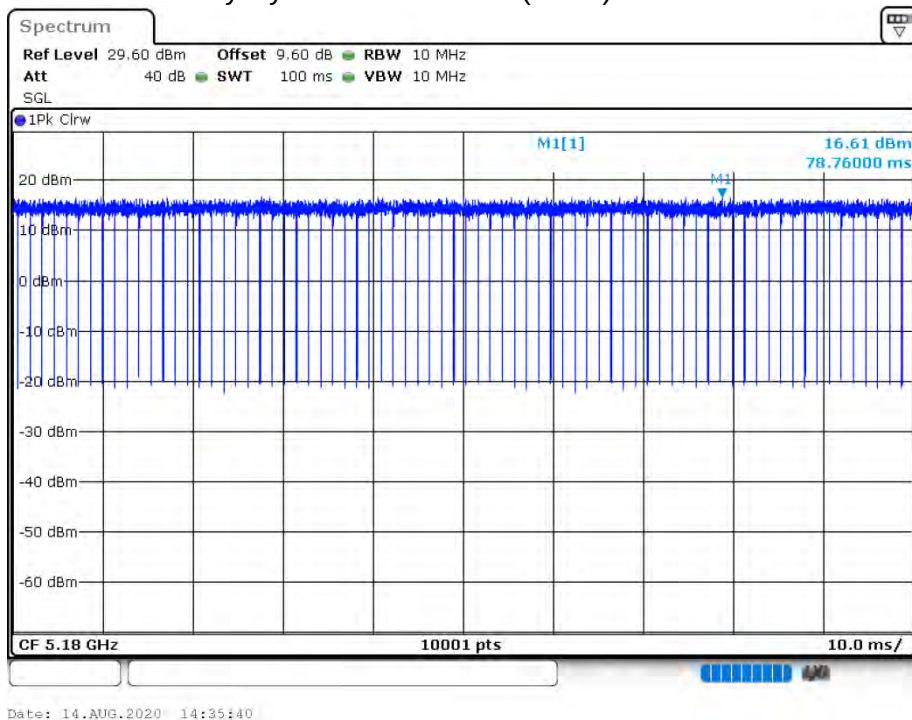

Duty Cycle NVNT 802.11n(HT20) 5200MHz

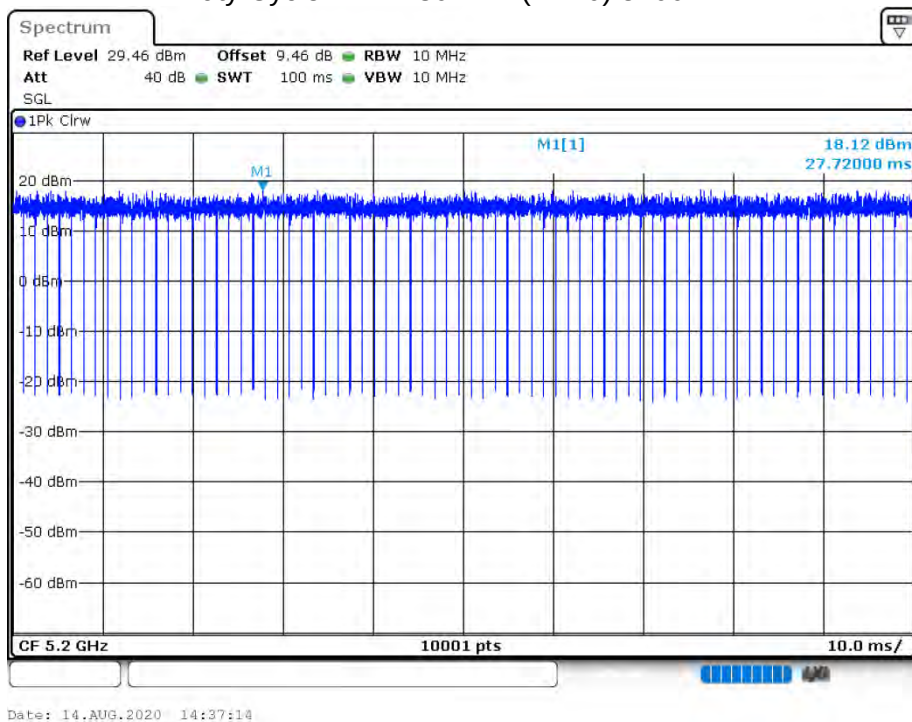


Duty Cycle NVNT 802.11n(HT20) 5240MHz

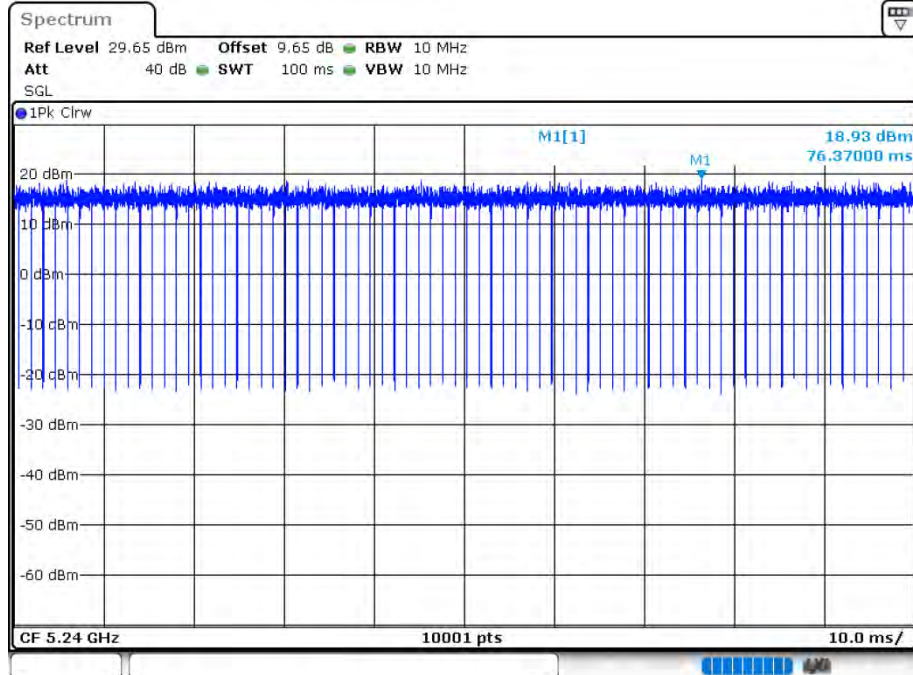


Date: 14.AUG.2020 14:38:18

Duty Cycle NVNT 802.11n(HT40) 5190MHz

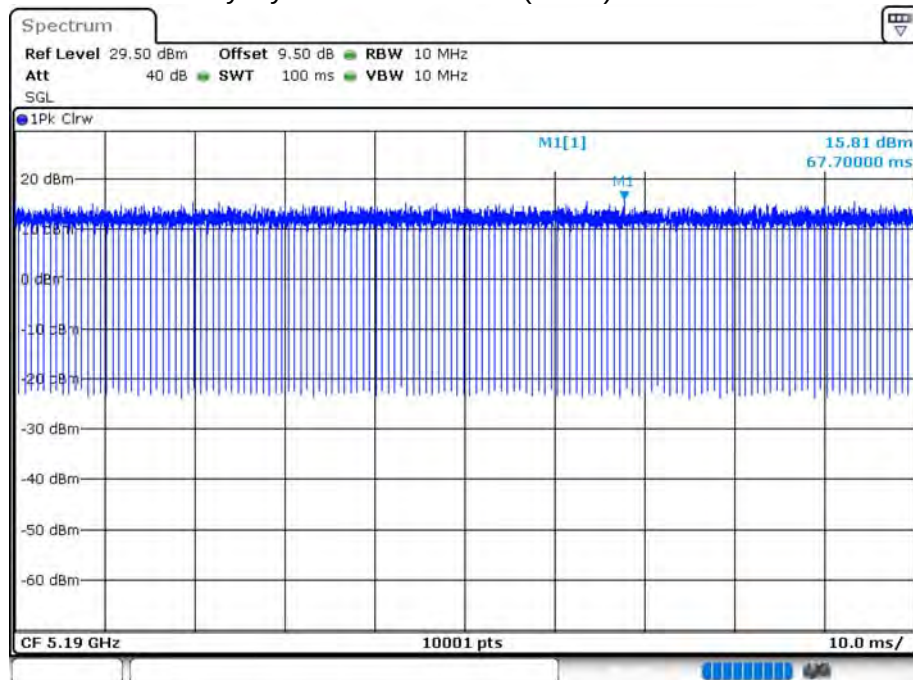

Date: 14.AUG.2020 14:43:35

Duty Cycle NVNT 802.11n(HT40) 5230MHz

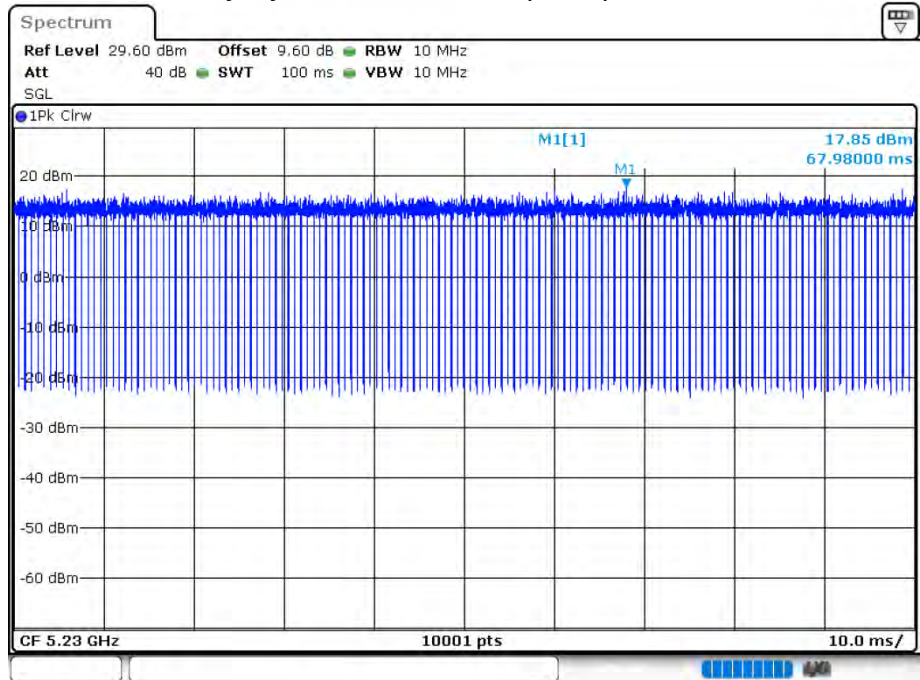

Date: 14.AUG.2020 14:44:51

MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5180	Ant 1	8.26	0	8.26	24	Pass
NVNT	802.11a	5200	Ant 1	8.26	0	8.26	24	Pass
NVNT	802.11a	5240	Ant 1	8.83	0	8.83	24	Pass
NVNT	802.11ac20	5180	Ant 1	8.13	0	8.13	24	Pass
NVNT	802.11ac20	5200	Ant 1	8.26	0	8.26	24	Pass
NVNT	802.11ac20	5240	Ant 1	8.49	0	8.49	24	Pass
NVNT	802.11ac40	5190	Ant 1	8.12	0	8.12	24	Pass
NVNT	802.11ac40	5230	Ant 1	9.00	0	9.00	24	Pass
NVNT	802.11ac80	5210	Ant 1	8.93	0	8.93	24	Pass
NVNT	802.11n(HT20)	5180	Ant 1	8.2	0	8.2	24	Pass
NVNT	802.11n(HT20)	5200	Ant 1	8.26	0	8.26	24	Pass
NVNT	802.11n(HT20)	5240	Ant 1	8.66	0	8.66	24	Pass
NVNT	802.11n(HT40)	5190	Ant 1	8.2	0	8.2	24	Pass
NVNT	802.11n(HT40)	5230	Ant 1	9.00	0	9.00	24	Pass


OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5180	Ant 1	16.6143	19.94	0	Pass
NVNT	802.11a	5200	Ant 1	16.6063	19.568	0	Pass
NVNT	802.11a	5240	Ant 1	16.6343	19.748	0	Pass
NVNT	802.11ac20	5180	Ant 1	17.7542	23.844	0	Pass
NVNT	802.11ac20	5200	Ant 1	17.5462	20.084	0	Pass
NVNT	802.11ac20	5240	Ant 1	17.6142	20.016	0	Pass
NVNT	802.11ac40	5190	Ant 1	36.1164	54.672	0	Pass
NVNT	802.11ac40	5230	Ant 1	35.9484	40.632	0	Pass
NVNT	802.11ac80	5210	Ant 1	74.7125	99.264	0	Pass
NVNT	802.11n(HT20)	5180	Ant 1	17.7742	20.328	0	Pass
NVNT	802.11n(HT20)	5200	Ant 1	17.6062	20.264	0	Pass
NVNT	802.11n(HT20)	5240	Ant 1	17.5422	20.292	0	Pass
NVNT	802.11n(HT40)	5190	Ant 1	36.0684	42.12	0	Pass
NVNT	802.11n(HT40)	5230	Ant 1	35.8924	40.68	0	Pass

OBW NVNT 802.11a 5180MHz Ant1



-26 dB BW NVNT 802.11a 5180MHz Ant1

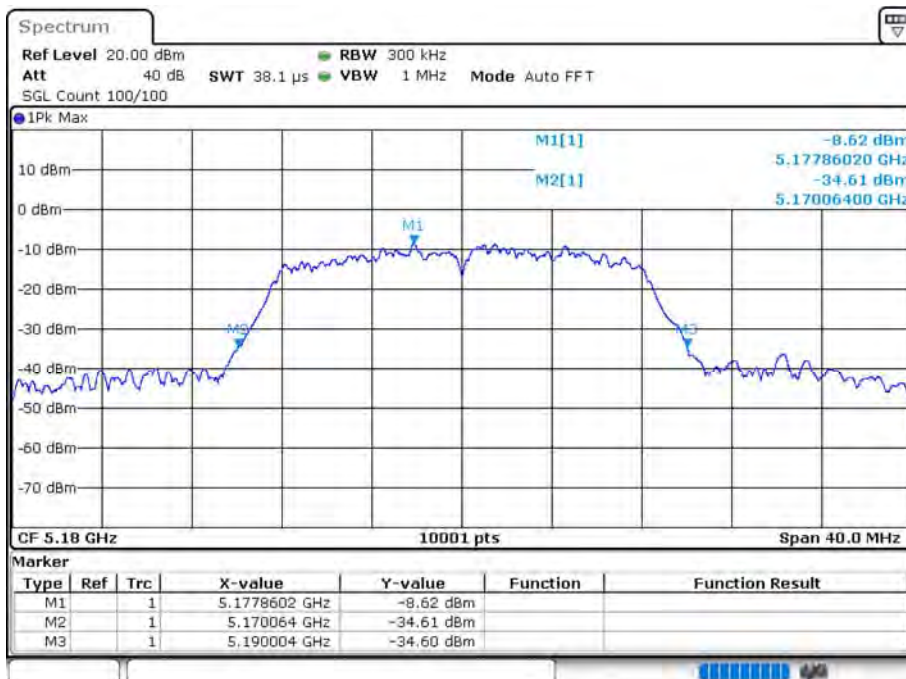


Date: 14.AUG.2020 14:31:55

OBW NVNT 802.11a 5200MHz Ant1




Date: 14.AUG.2020 14:33:04


-26 dB BW NVNT 802.11a 5200MHz Ant1

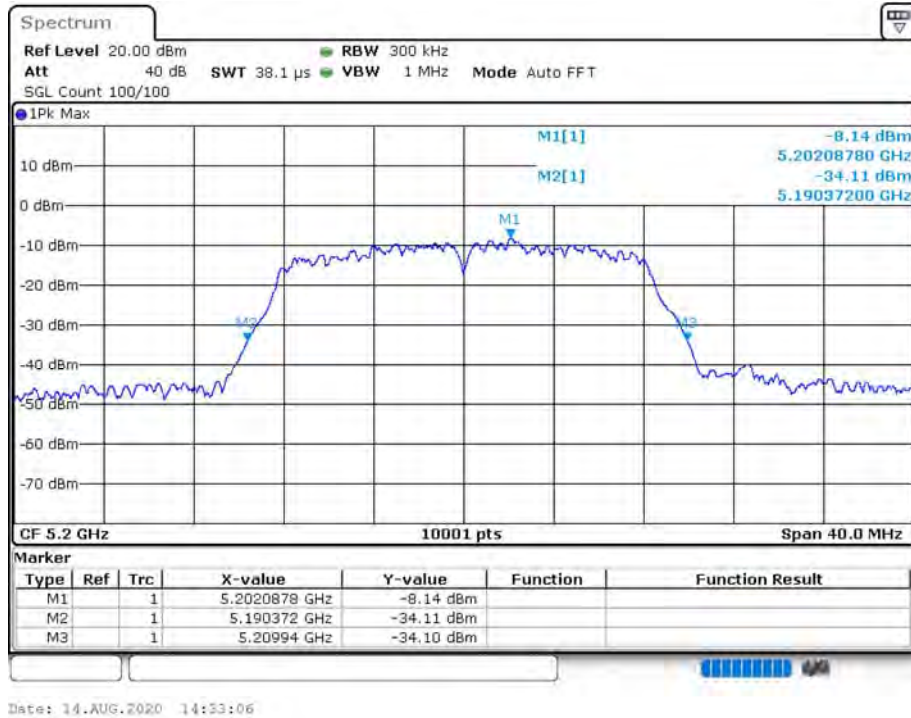


OBW NVNT 802.11a 5240MHz Ant1

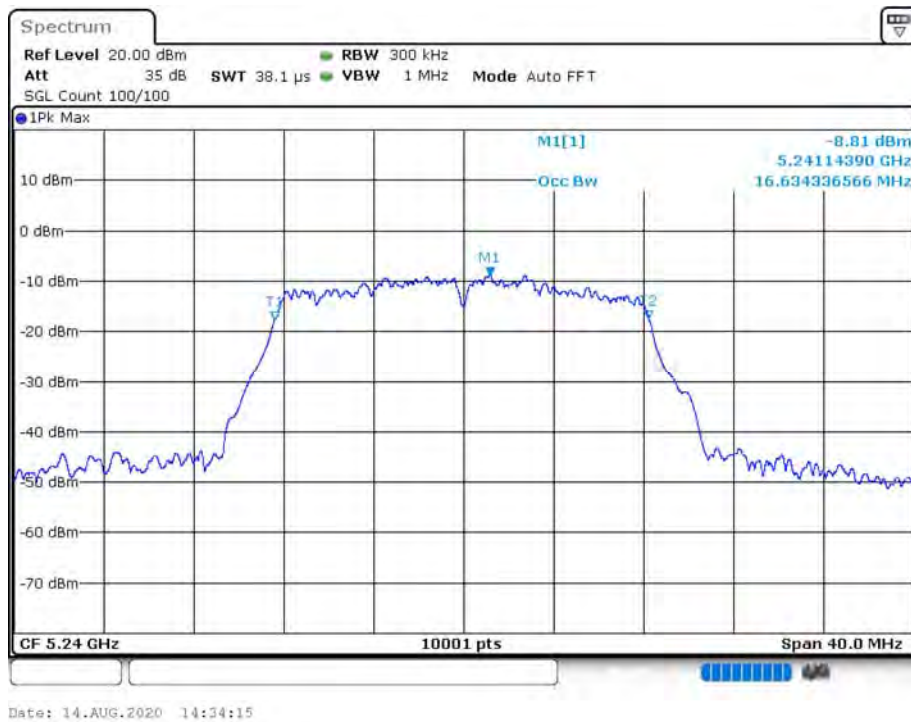


-26 dB BW NVNT 802.11a 5240MHz Ant1

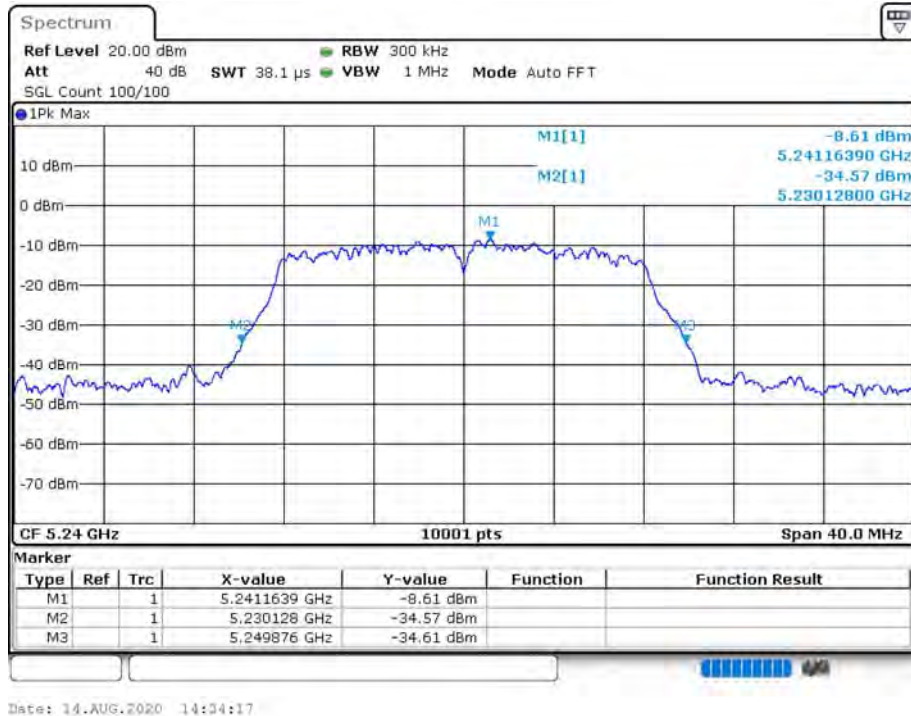


OBW NVNT 802.11ac20 5180MHz Ant1

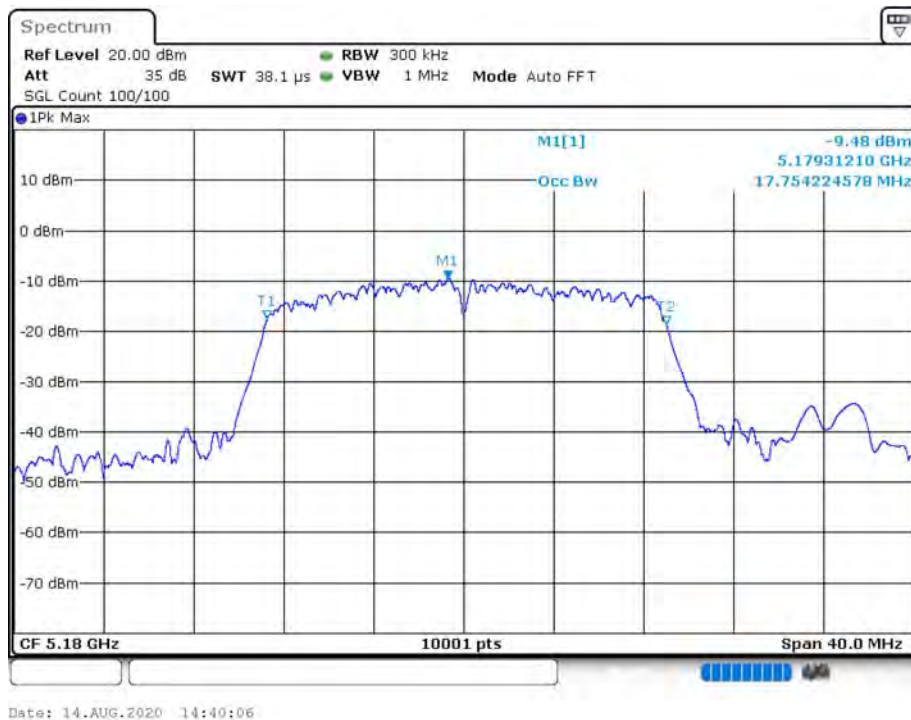


-26 dB BW NVNT 802.11ac20 5180MHz Ant1

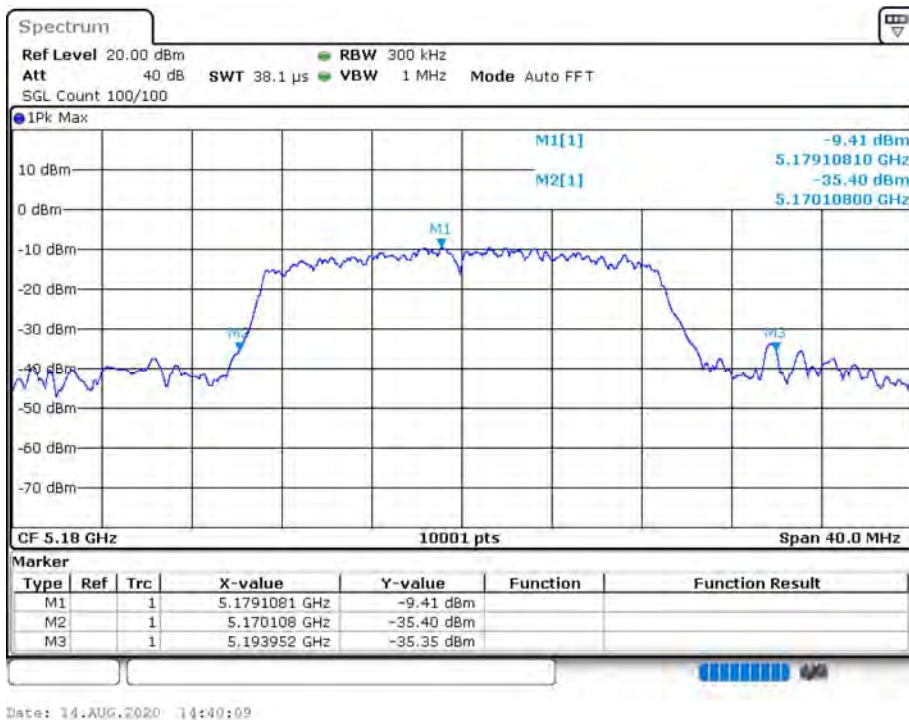

OBW NVNT 802.11ac20 5200MHz Ant1

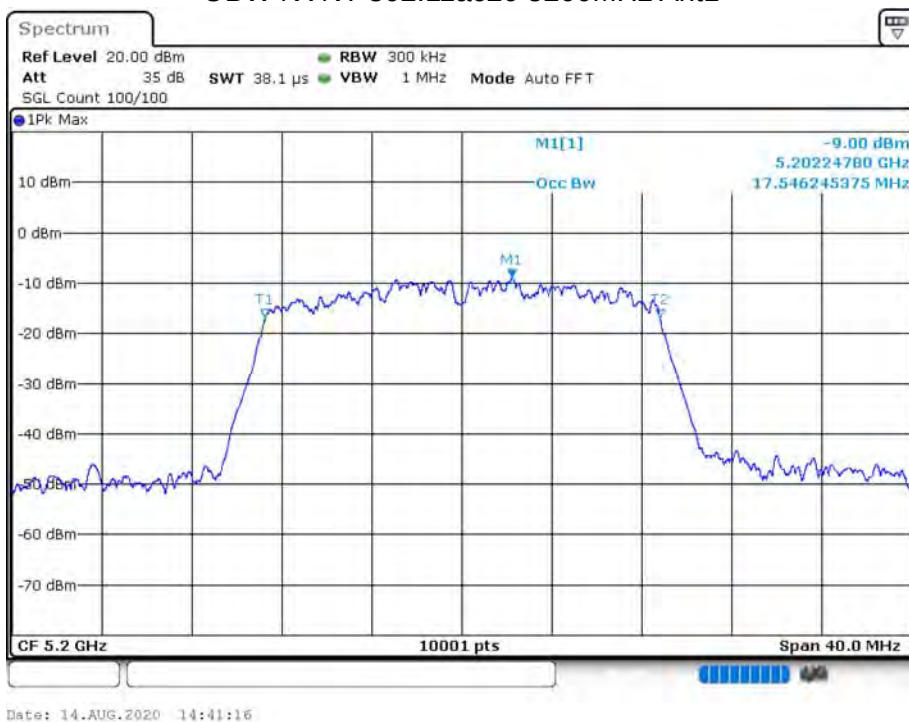


-26 dB BW NVNT 802.11ac20 5200MHz Ant1

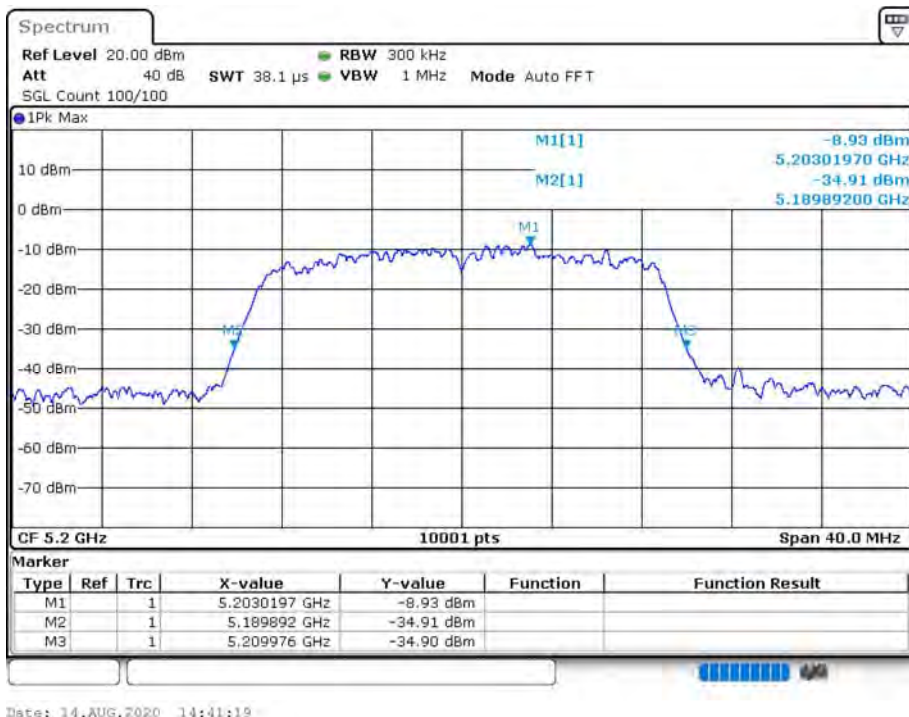


OBW NVNT 802.11ac20 5240MHz Ant1




-26 dB BW NVNT 802.11ac20 5240MHz Ant1

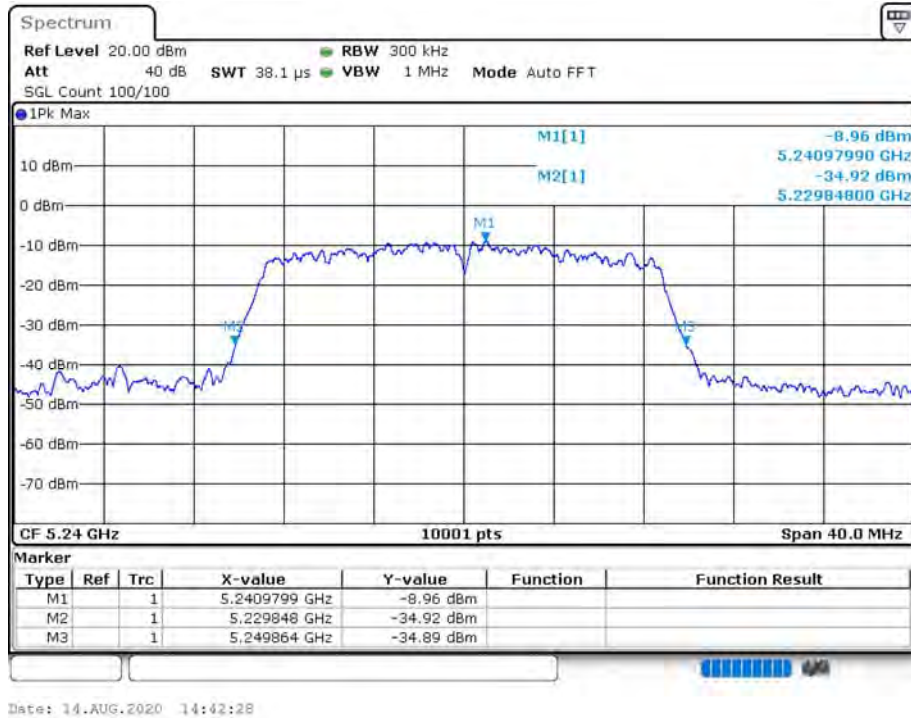


OBW NVNT 802.11ac40 5190MHz Ant1

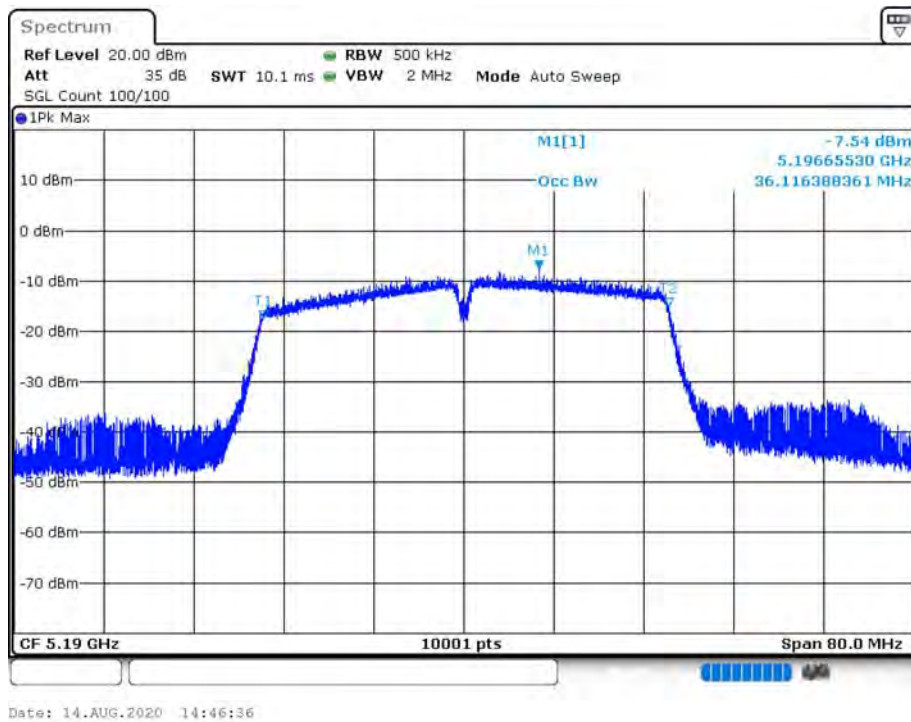


-26 dB BW NVNT 802.11ac40 5190MHz Ant1

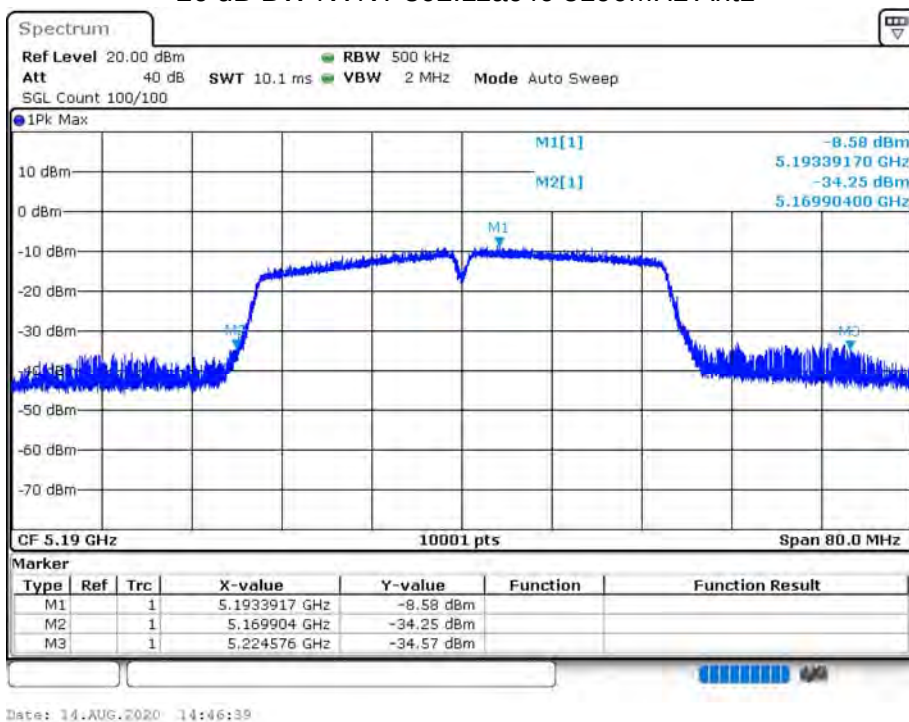


OBW NVNT 802.11ac40 5230MHz Ant1

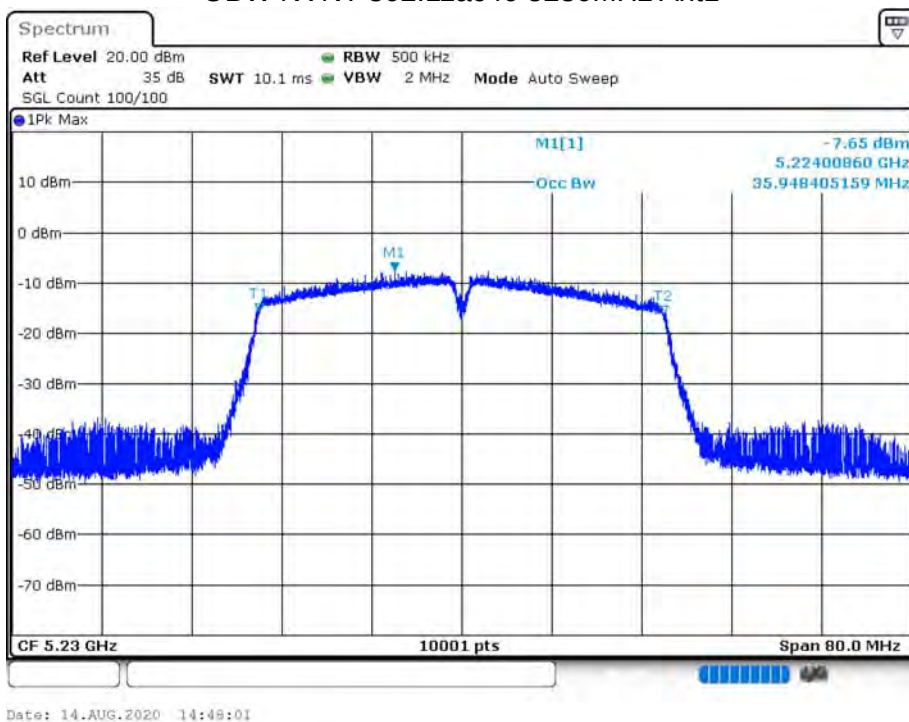


-26 dB BW NVNT 802.11ac40 5230MHz Ant1

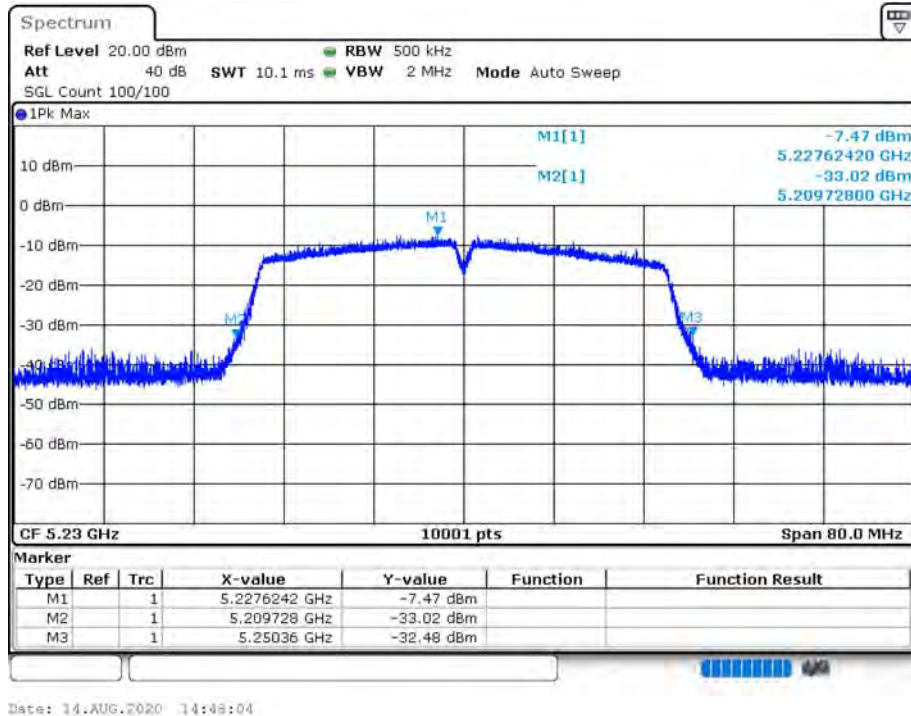


OBW NVNT 802.11ac80 5210MHz Ant1

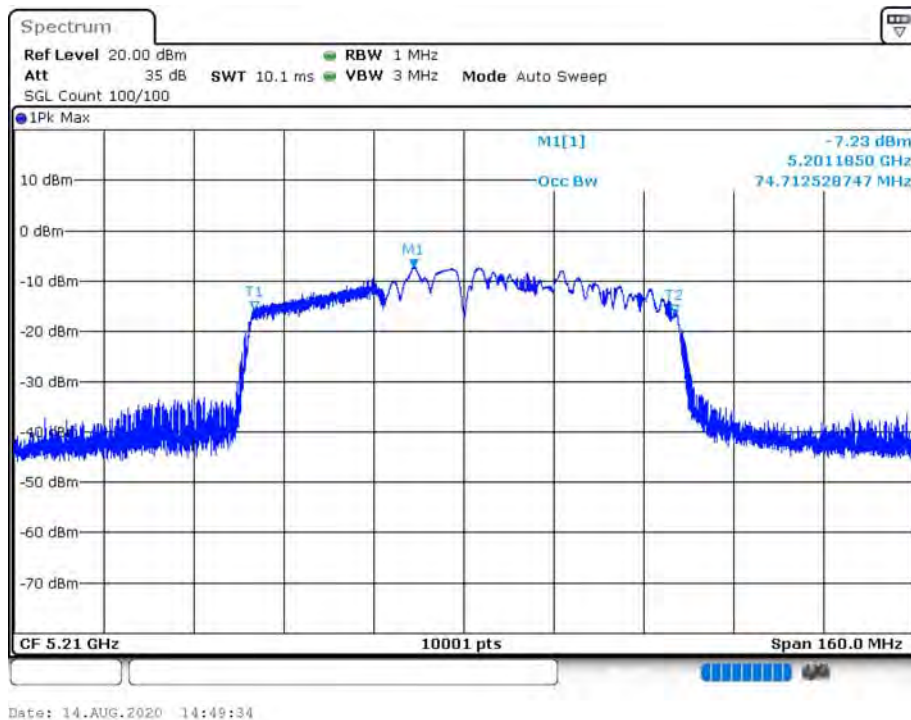


-26 dB BW NVNT 802.11ac80 5210MHz Ant1

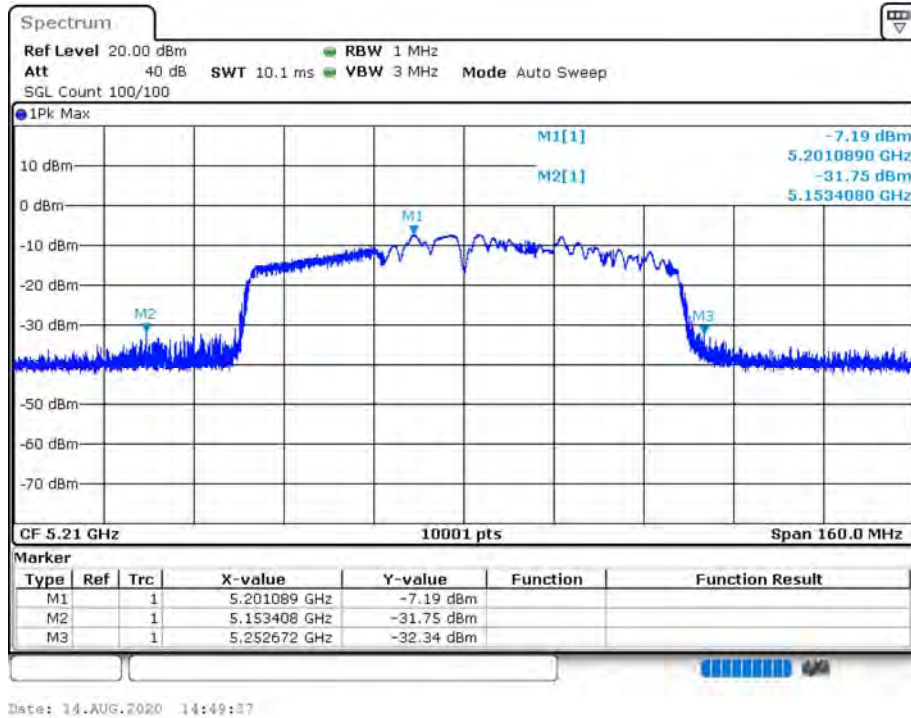


OBW NVNT 802.11n(HT20) 5180MHz Ant1

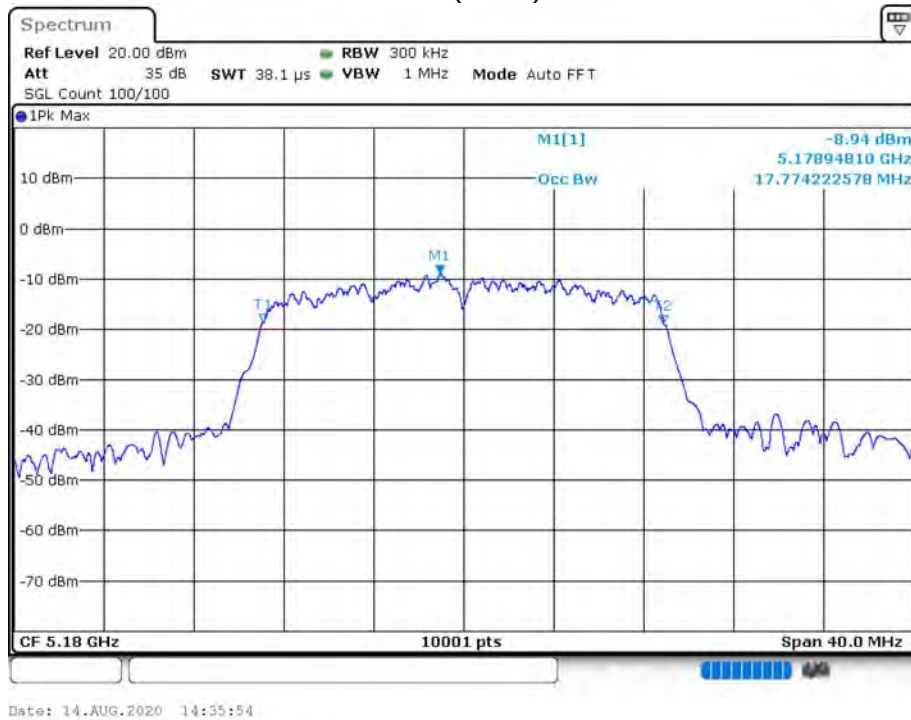


-26 dB BW NVNT 802.11n(HT20) 5180MHz Ant1

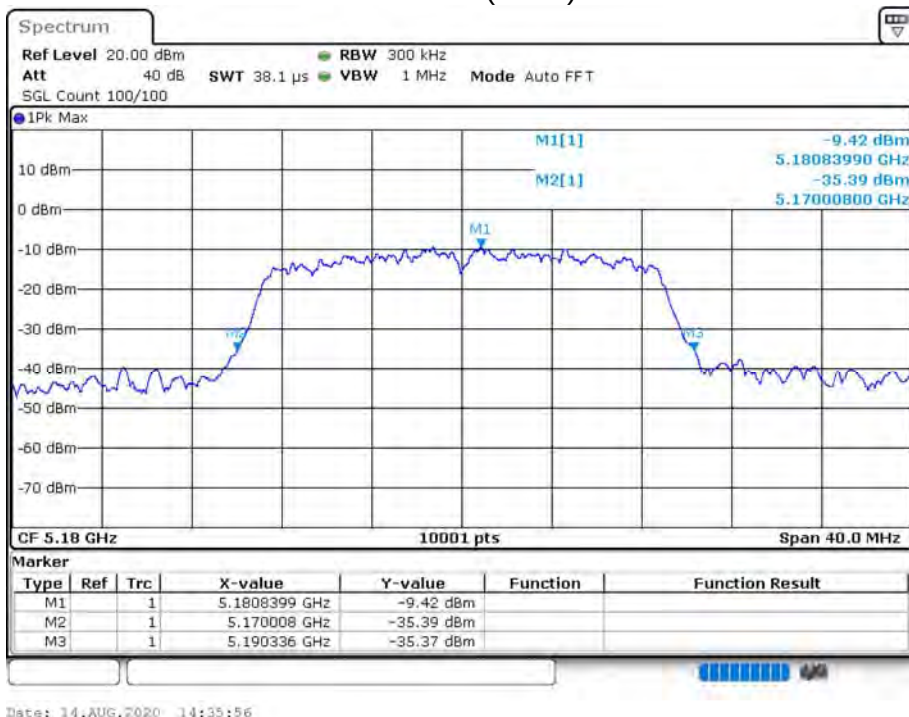


OBW NVNT 802.11n(HT20) 5200MHz Ant1

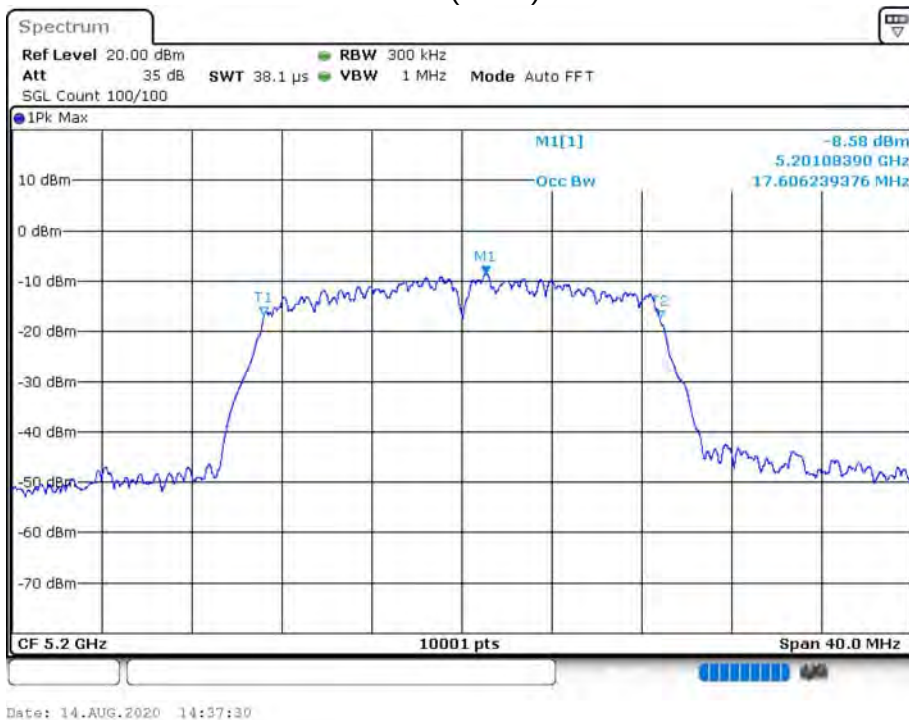


-26 dB BW NVNT 802.11n(HT20) 5200MHz Ant1

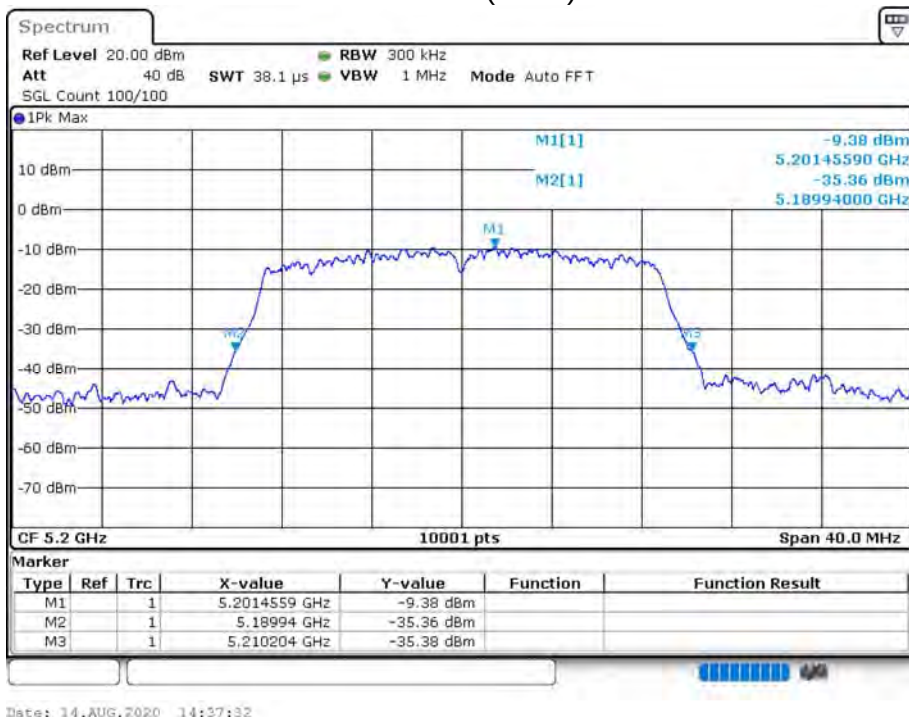


OBW NVNT 802.11n(HT20) 5240MHz Ant1

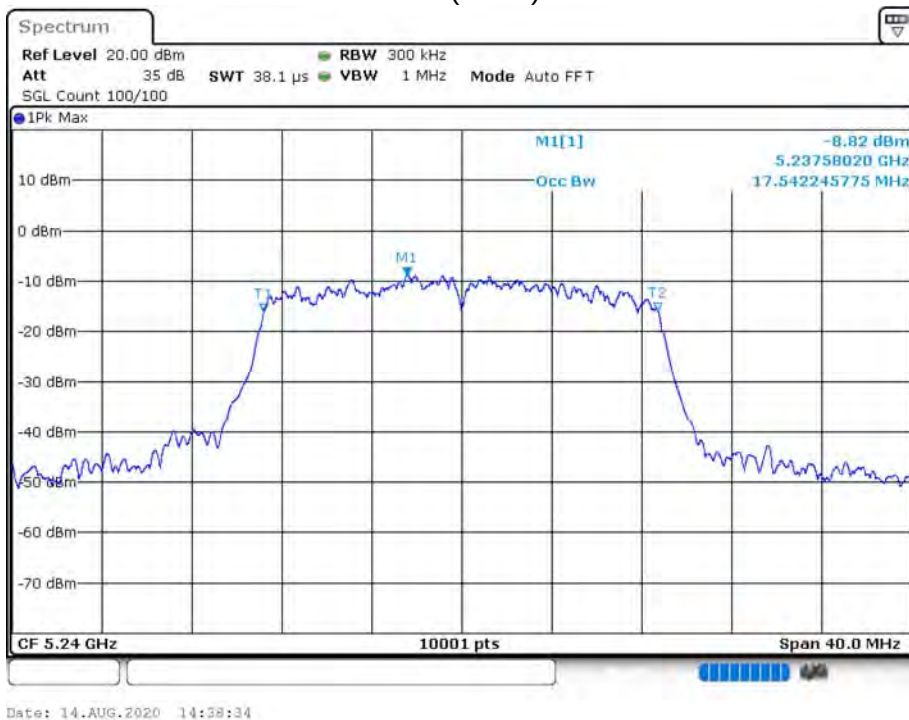


-26 dB BW NVNT 802.11n(HT20) 5240MHz Ant1

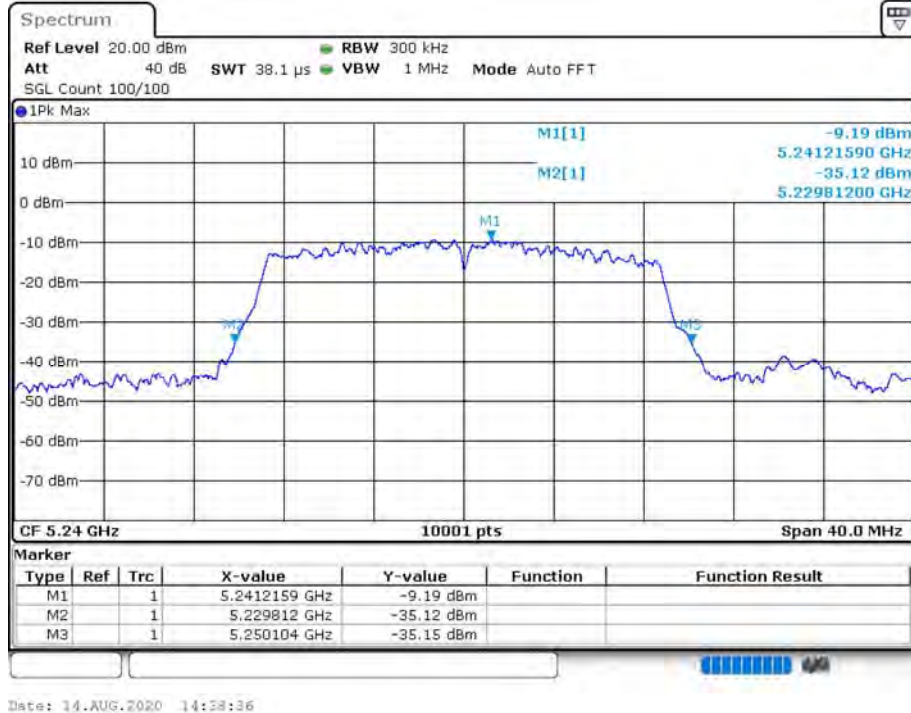

OBW NVNT 802.11n(HT40) 5190MHz Ant1

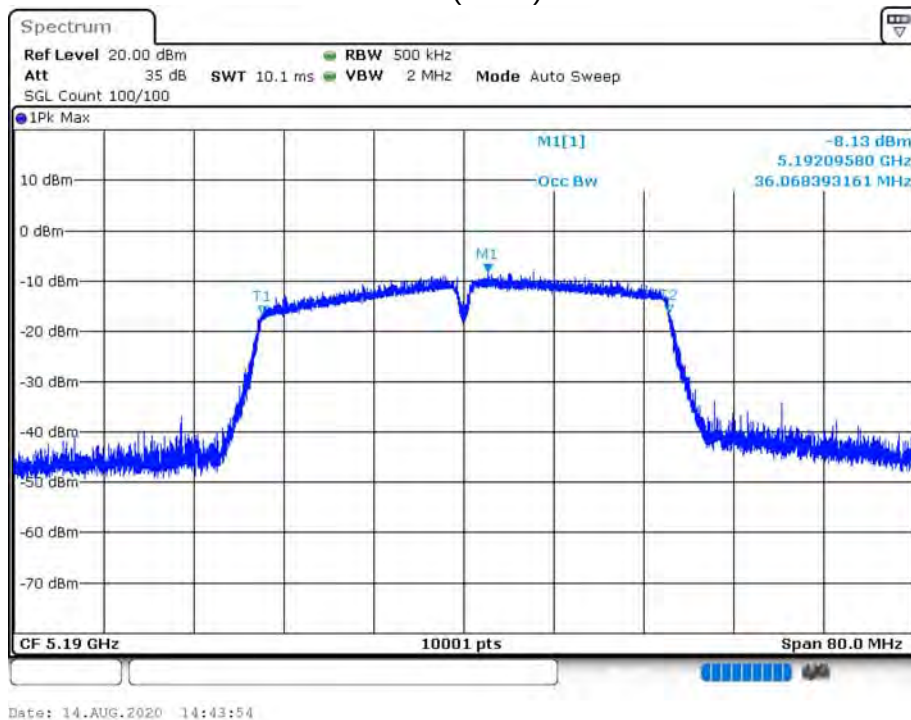


-26 dB BW NVNT 802.11n(HT40) 5190MHz Ant1

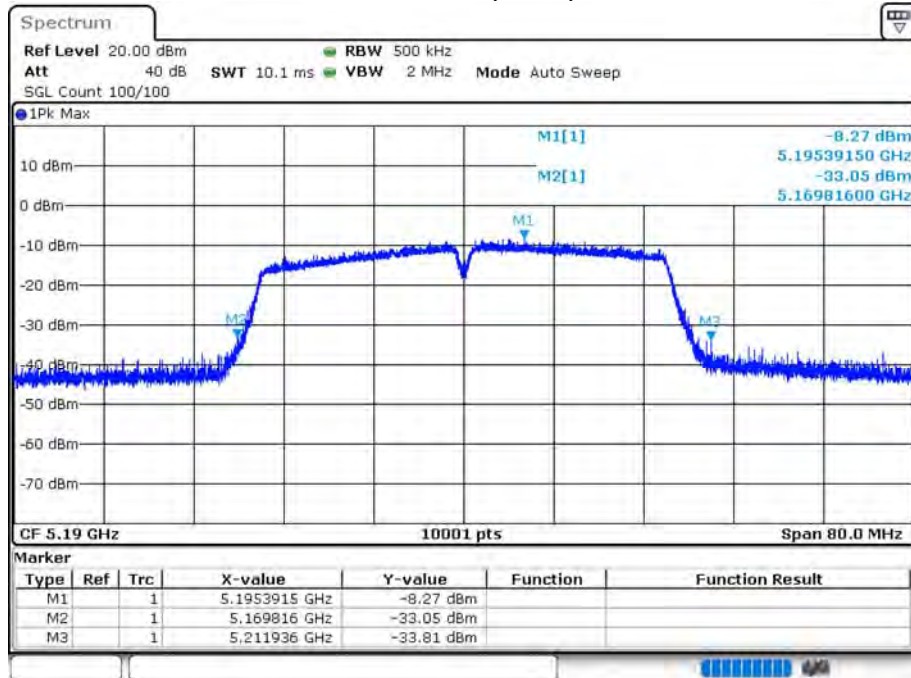


Date: 14.AUG.2020 14:43:56

OBW NVNT 802.11n(HT40) 5230MHz Ant1

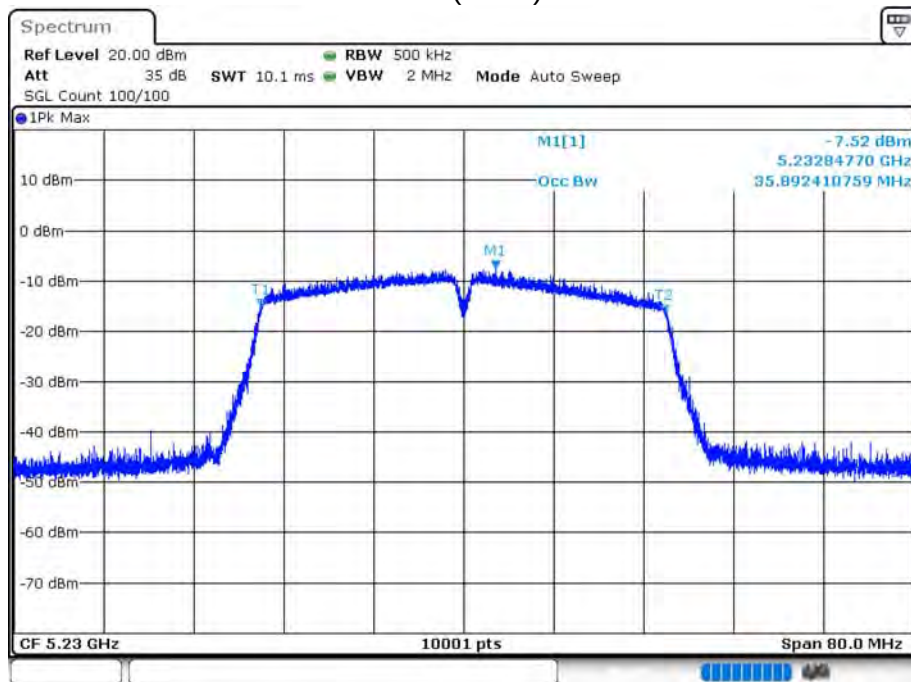

Date: 14.AUG.2020 14:45:11

-26 dB BW NVNT 802.11n(HT40) 5230MHz Ant1

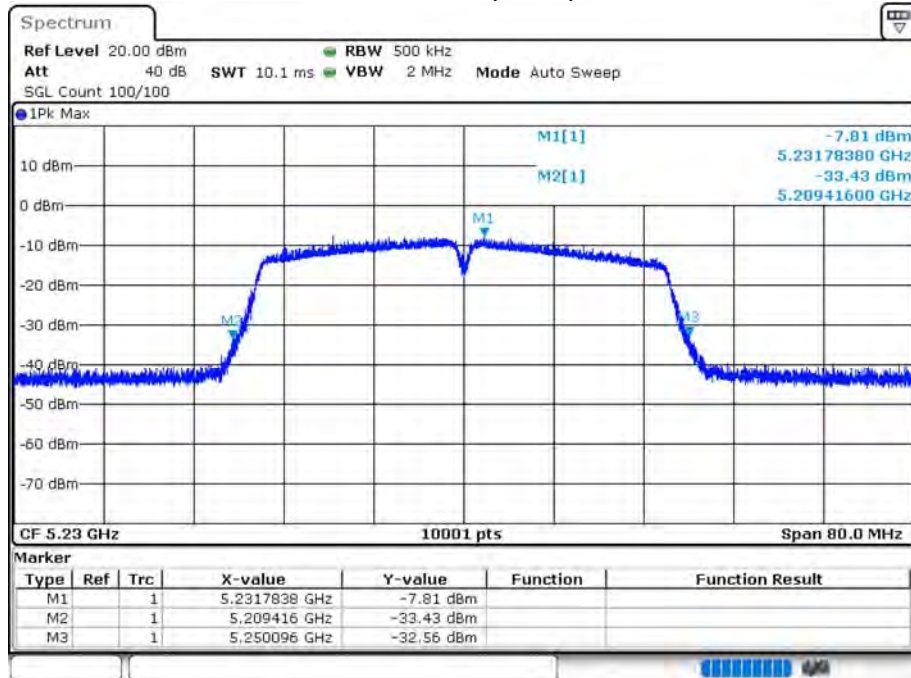


Date: 14.AUG.2020 14:45:12

MAXIMUM POWER SPECTRAL DENSITY LEVEL


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5180	Ant 1	5.096	11	Pass
NVNT	802.11a	5200	Ant 1	5.298	11	Pass
NVNT	802.11a	5240	Ant 1	5.488	11	Pass
NVNT	802.11ac20	5180	Ant 1	5.179	11	Pass
NVNT	802.11ac20	5200	Ant 1	4.988	11	Pass
NVNT	802.11ac20	5240	Ant 1	5.052	11	Pass
NVNT	802.11ac40	5190	Ant 1	2.29	11	Pass
NVNT	802.11ac40	5230	Ant 1	3.272	11	Pass
NVNT	802.11ac80	5210	Ant 1	0.041	11	Pass
NVNT	802.11n(HT20)	5180	Ant 1	5.71	11	Pass
NVNT	802.11n(HT20)	5200	Ant 1	4.714	11	Pass
NVNT	802.11n(HT20)	5240	Ant 1	5.973	11	Pass
NVNT	802.11n(HT40)	5190	Ant 1	2.365	11	Pass
NVNT	802.11n(HT40)	5230	Ant 1	3.198	11	Pass

PSD NVNT 802.11a 5180MHz Ant1

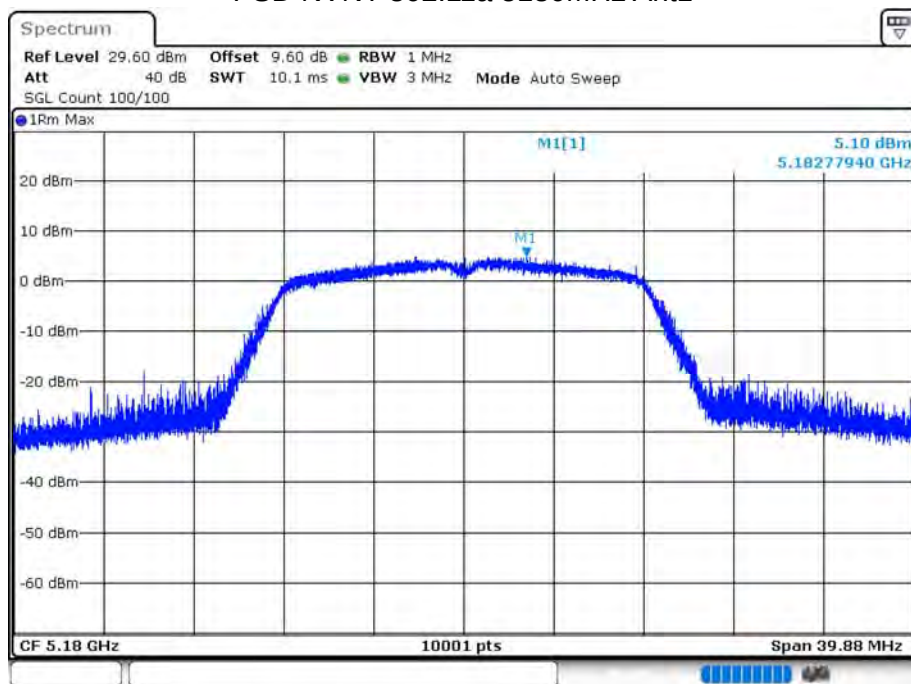


Date: 14.AUG.2020 14:32:01


PSD NVNT 802.11a 5200MHz Ant1

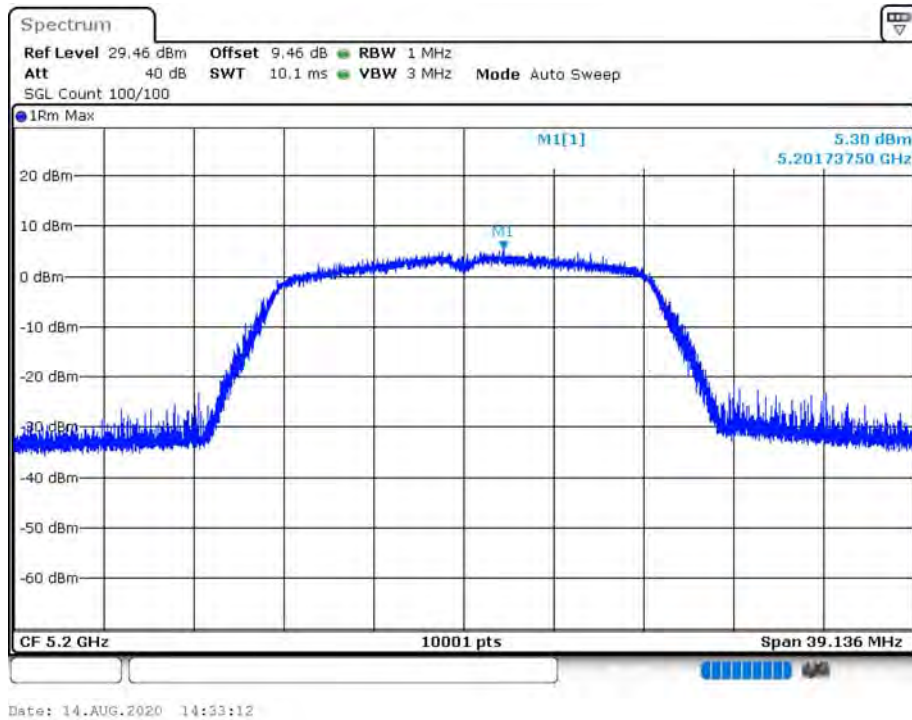


PSD NVNT 802.11a 5240MHz Ant1

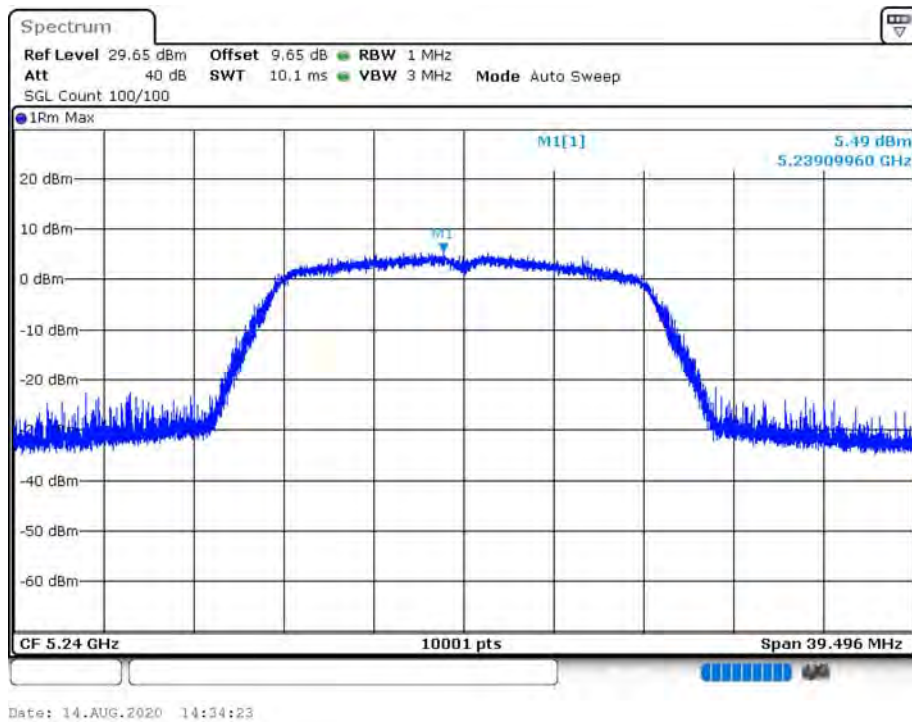


PSD NVNT 802.11ac20 5180MHz Ant1

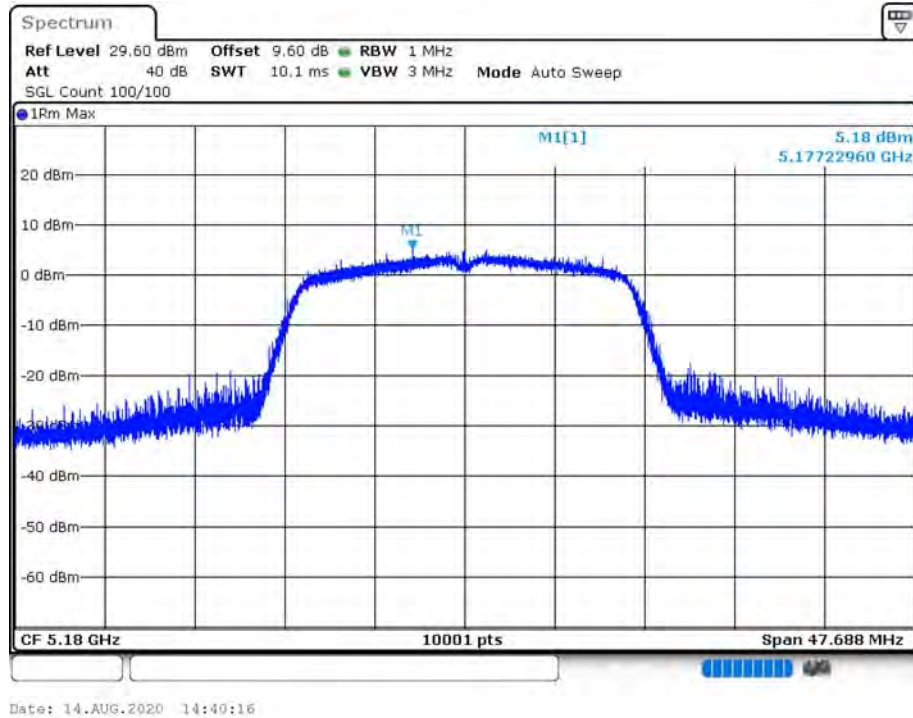


PSD NVNT 802.11ac20 5200MHz Ant1

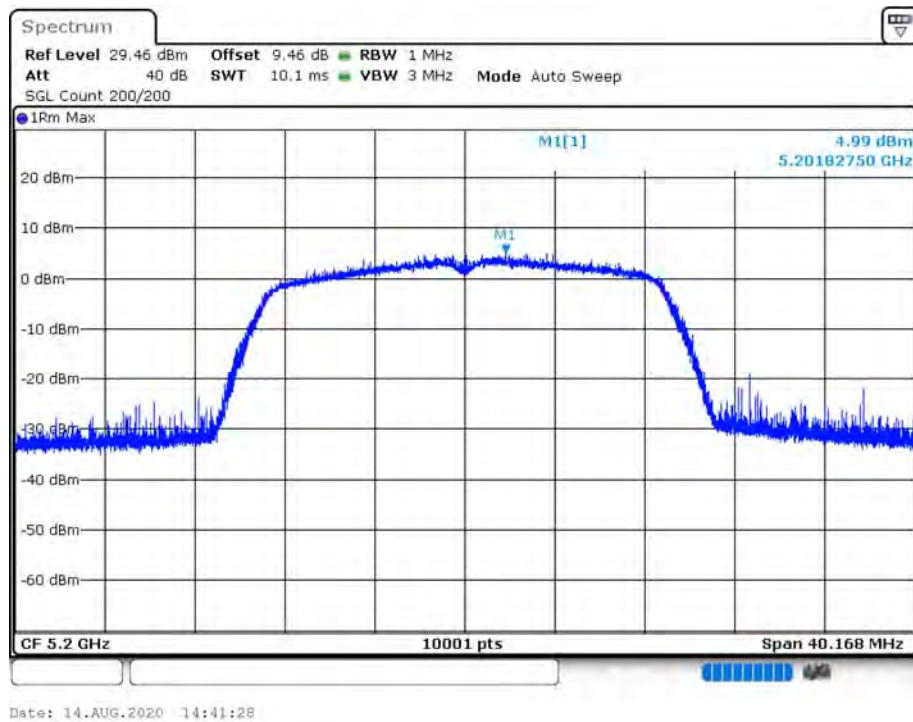


PSD NVNT 802.11ac20 5240MHz Ant1

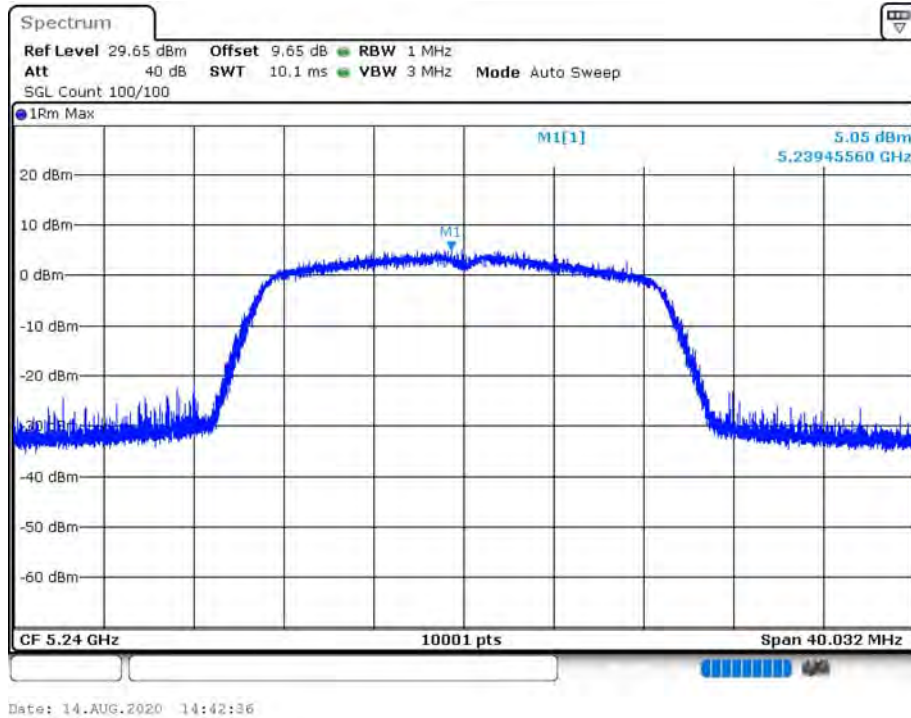


PSD NVNT 802.11ac40 5190MHz Ant1

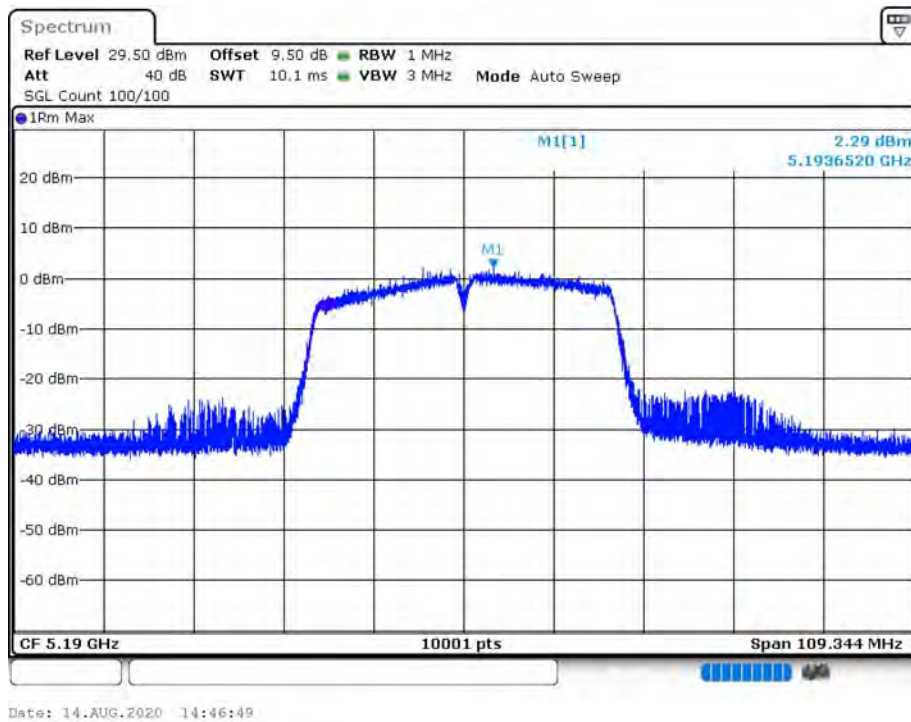


PSD NVNT 802.11ac40 5230MHz Ant1

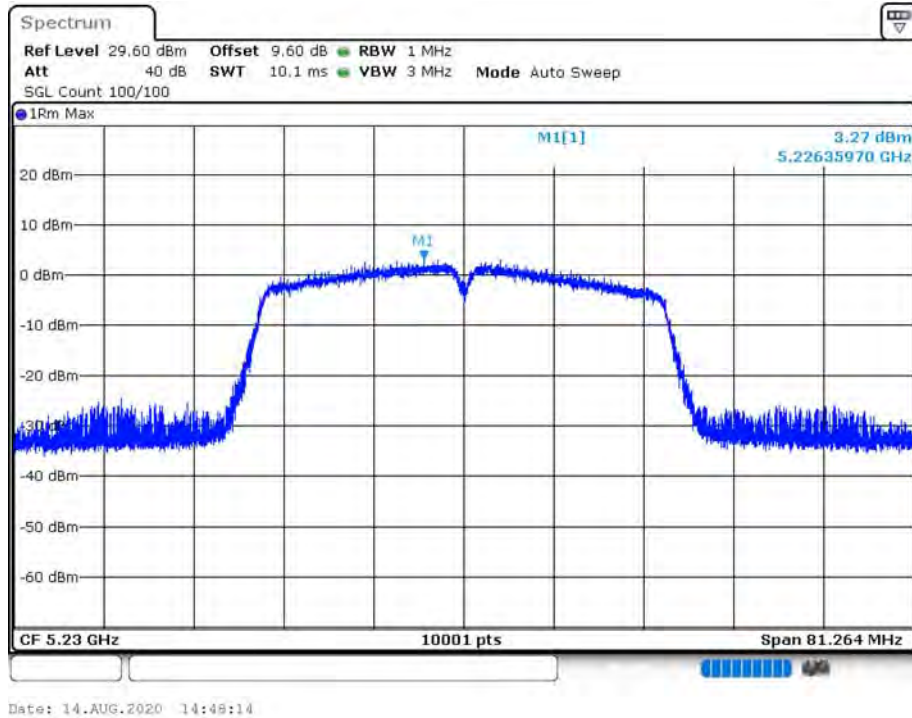


PSD NVNT 802.11ac80 5210MHz Ant1

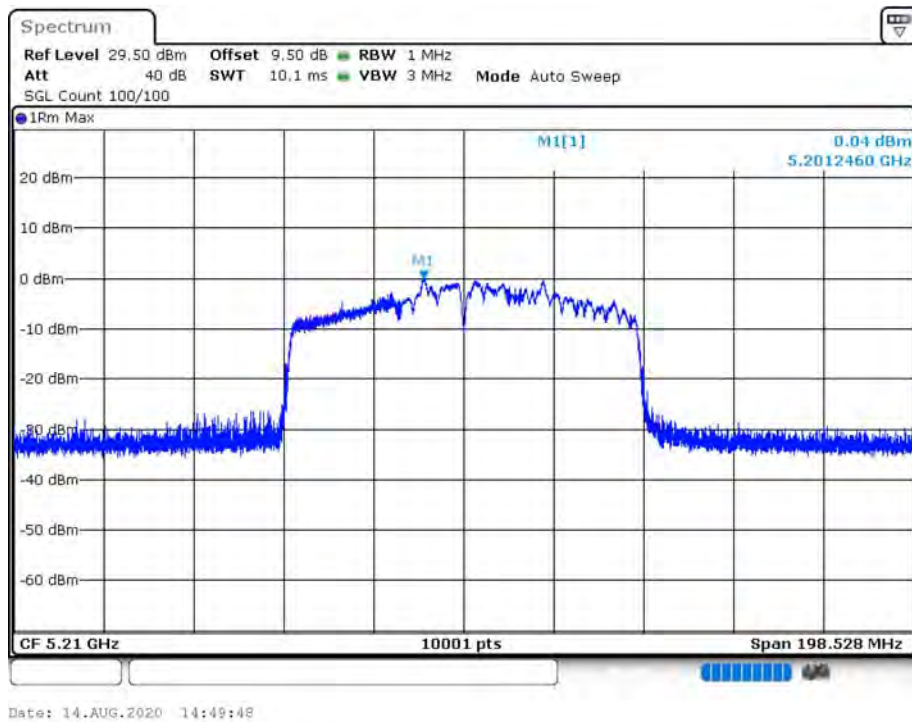


PSD NVNT 802.11n(HT20) 5180MHz Ant1

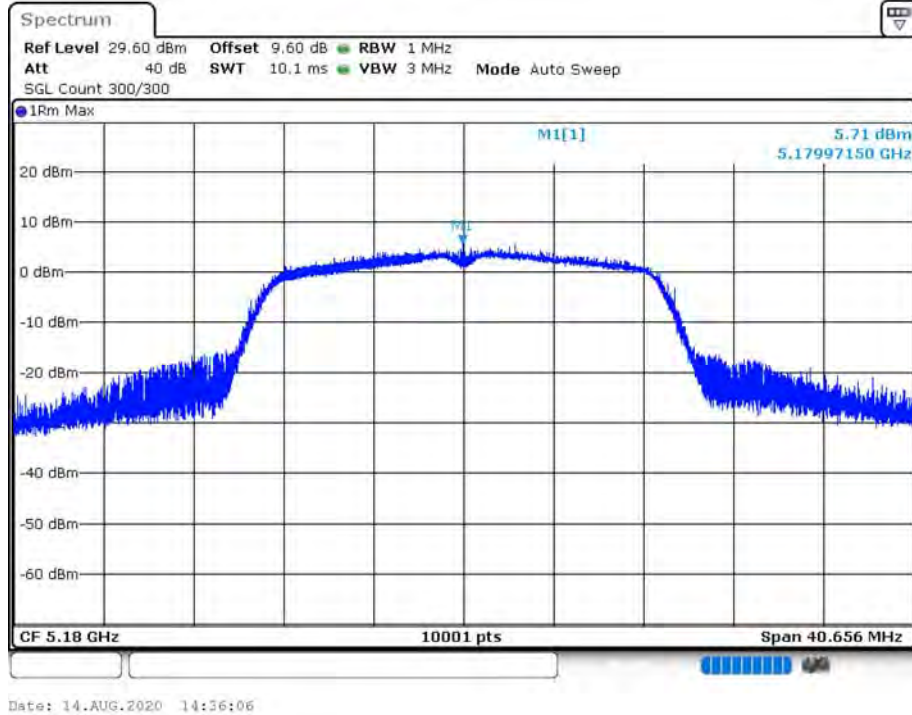


PSD NVNT 802.11n(HT20) 5200MHz Ant1

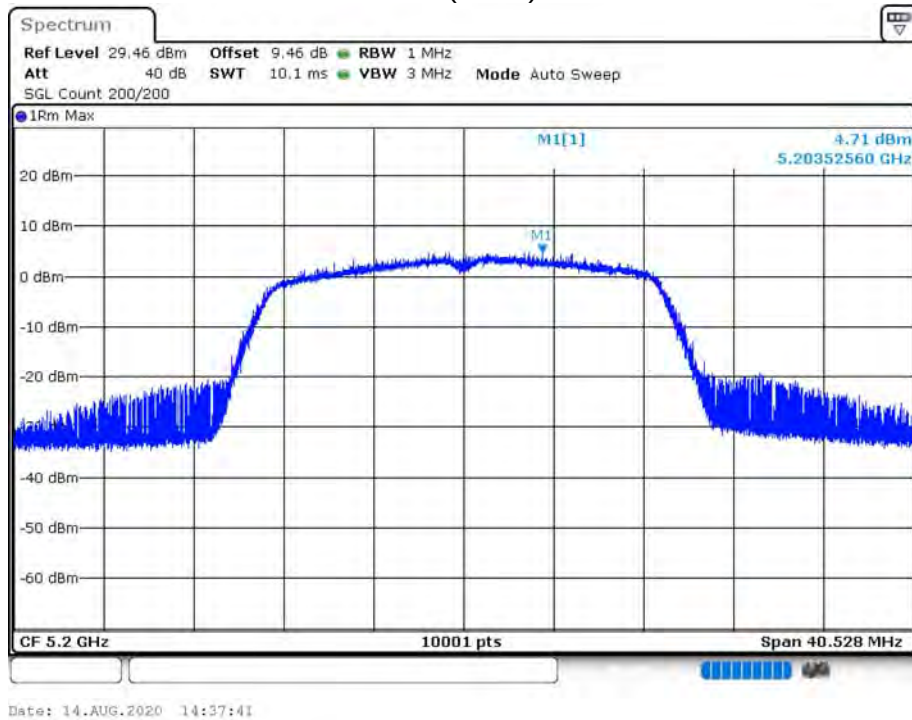

PSD NVNT 802.11n(HT20) 5240MHz Ant1

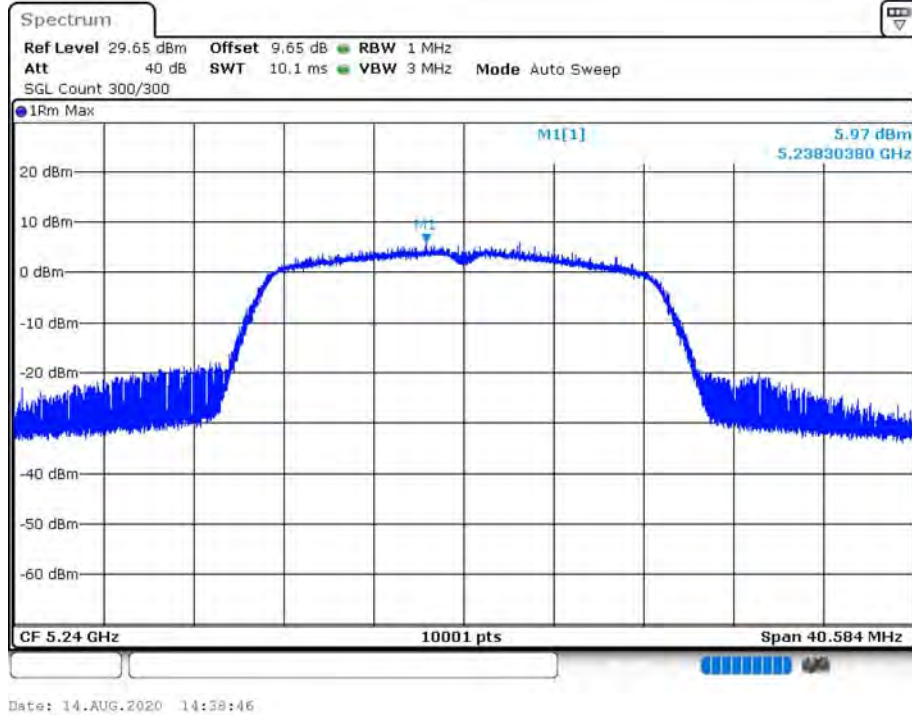

PSD NVNT 802.11n(HT40) 5190MHz Ant1

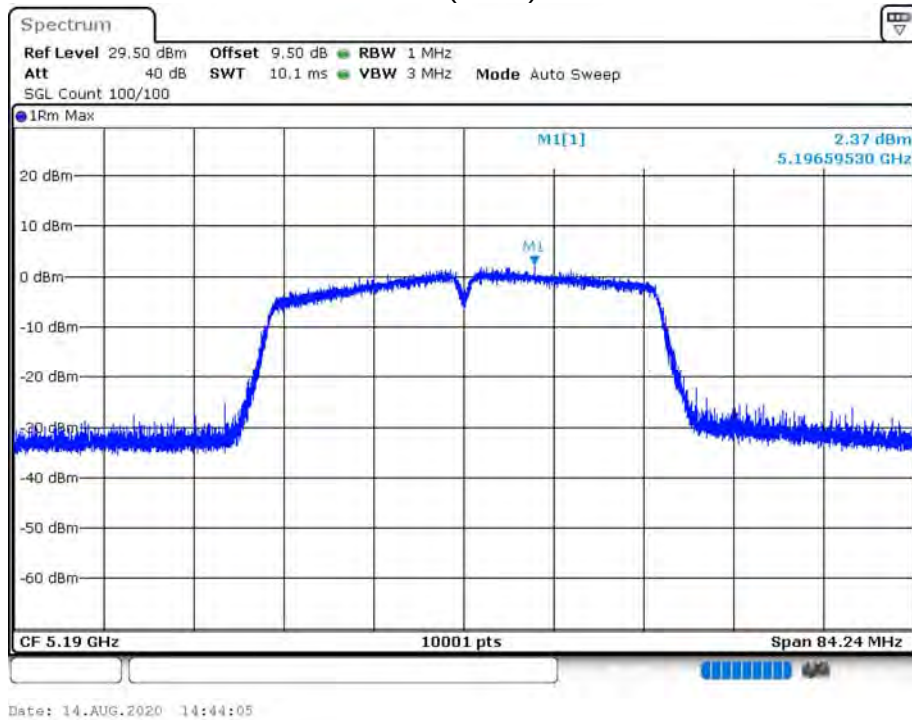

PSD NVNT 802.11n(HT40) 5230MHz Ant1




Date: 14.AUG.2020 14:45:23

BAND EDGE


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5180	Ant 1	-32.96	-27	Pass
NVNT	802.11a	5240	Ant 1	-45.13	-27	Pass
NVNT	802.11ac20	5180	Ant 1	-34.28	-27	Pass
NVNT	802.11ac20	5240	Ant 1	-45.26	-27	Pass
NVNT	802.11ac40	5190	Ant 1	-33.33	-27	Pass
NVNT	802.11ac40	5230	Ant 1	-45.95	-27	Pass
NVNT	802.11ac80	5210	Ant 1	-36.85	-27	Pass
NVNT	802.11ac80	5210	Ant 1	-31.42	-27	Pass
NVNT	802.11n(HT20)	5180	Ant 1	-36.52	-27	Pass
NVNT	802.11n(HT20)	5240	Ant 1	-44.4	-27	Pass
NVNT	802.11n(HT40)	5190	Ant 1	-33.95	-27	Pass
NVNT	802.11n(HT40)	5230	Ant 1	-45.72	-27	Pass

Band Edge NVNT 802.11a 5180MHz Low Ant1

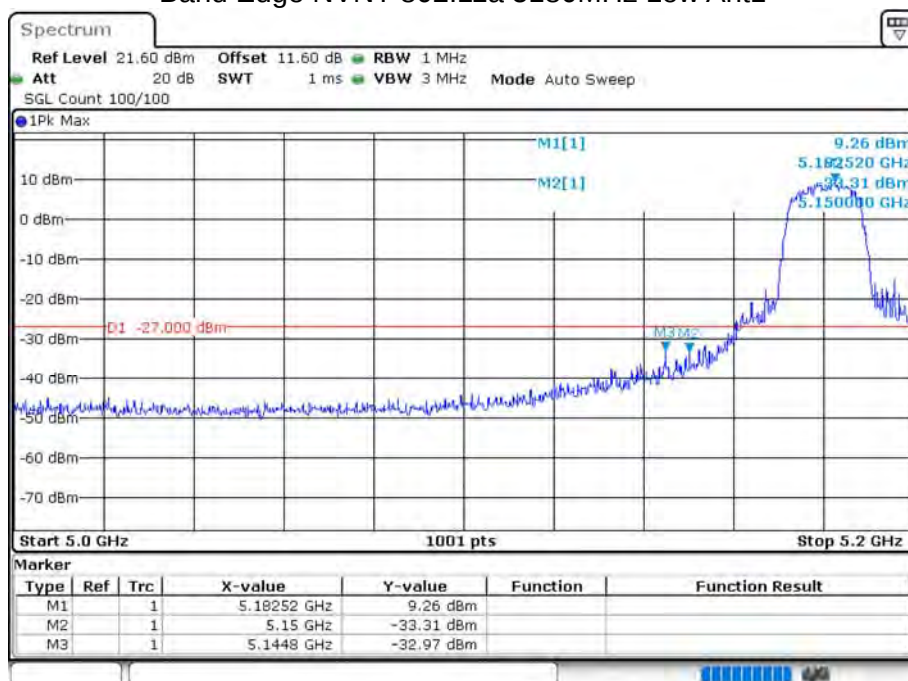


Date: 14.AUG.2020 14:32:04


Band Edge NVNT 802.11a 5240MHz High Ant1

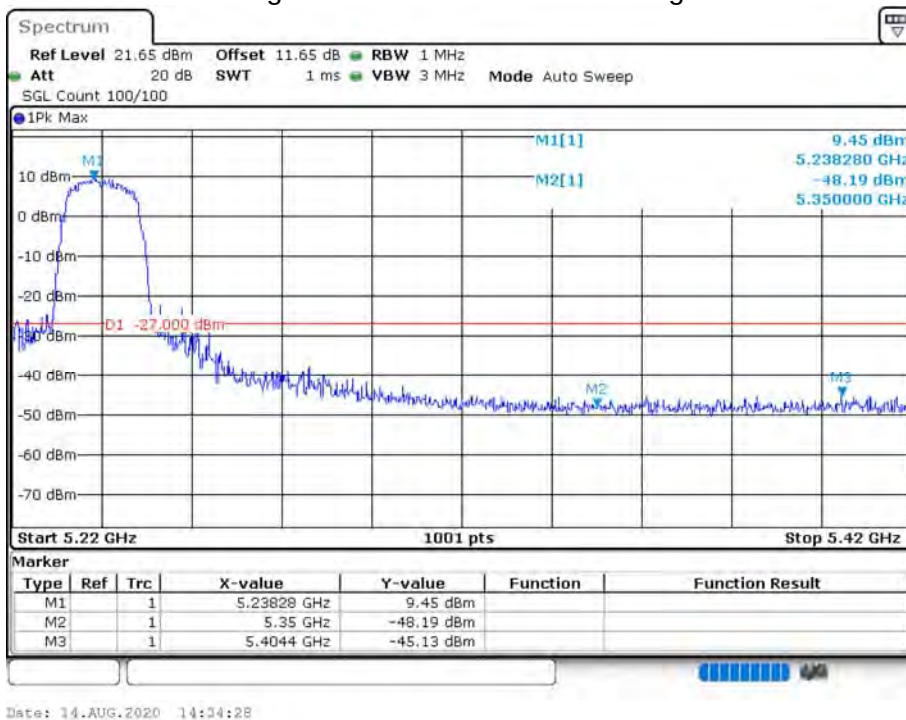


Band Edge NVNT 802.11ac20 5180MHz Low Ant1

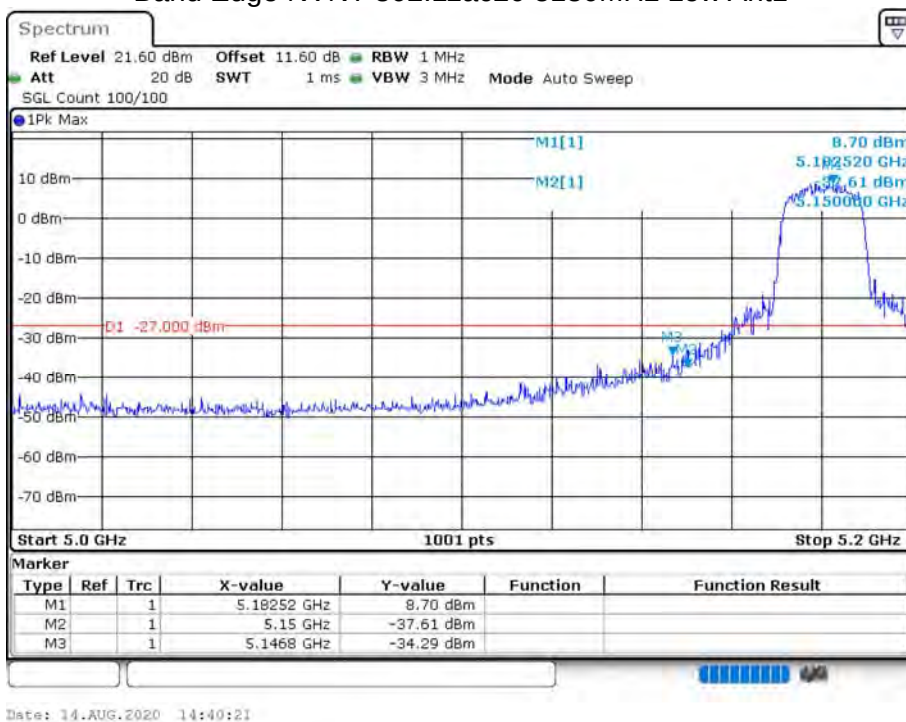


Band Edge NVNT 802.11ac20 5240MHz High Ant1

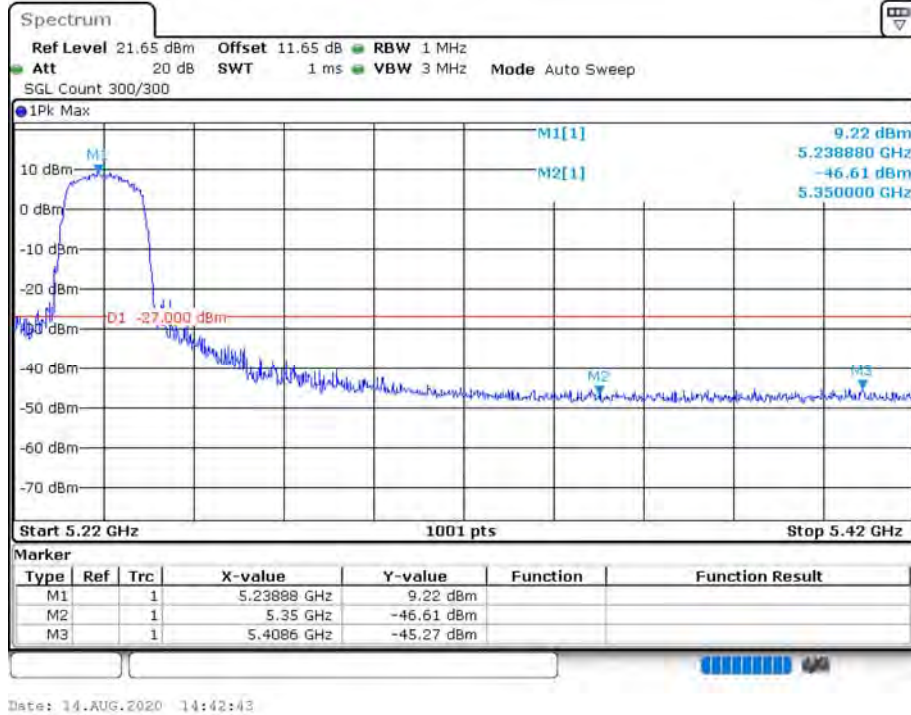


Band Edge NVNT 802.11ac40 5190MHz Low Ant1

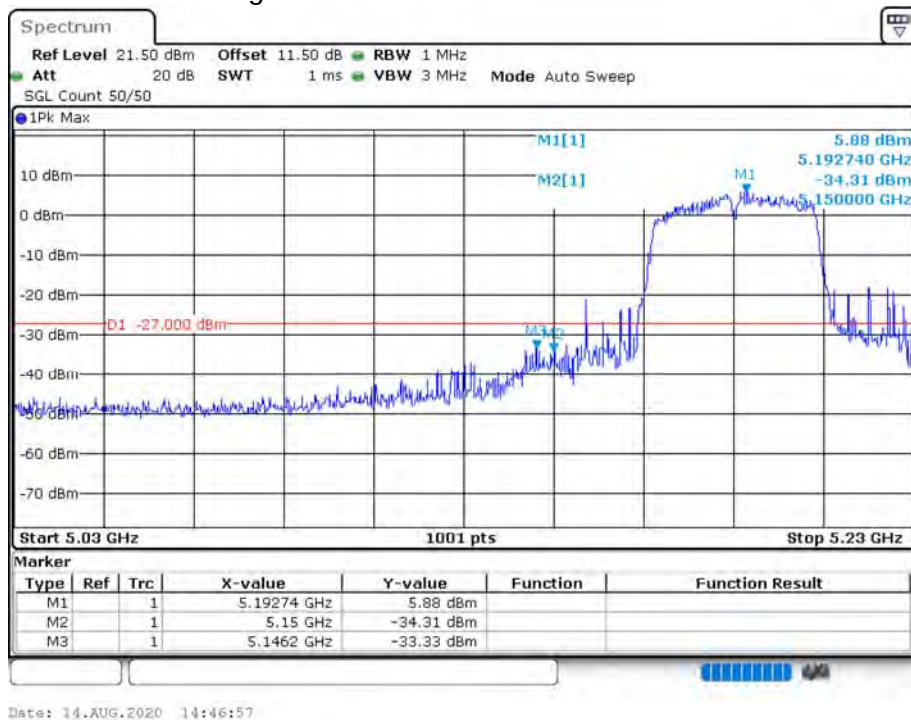


Band Edge NVNT 802.11ac40 5230MHz High Ant1

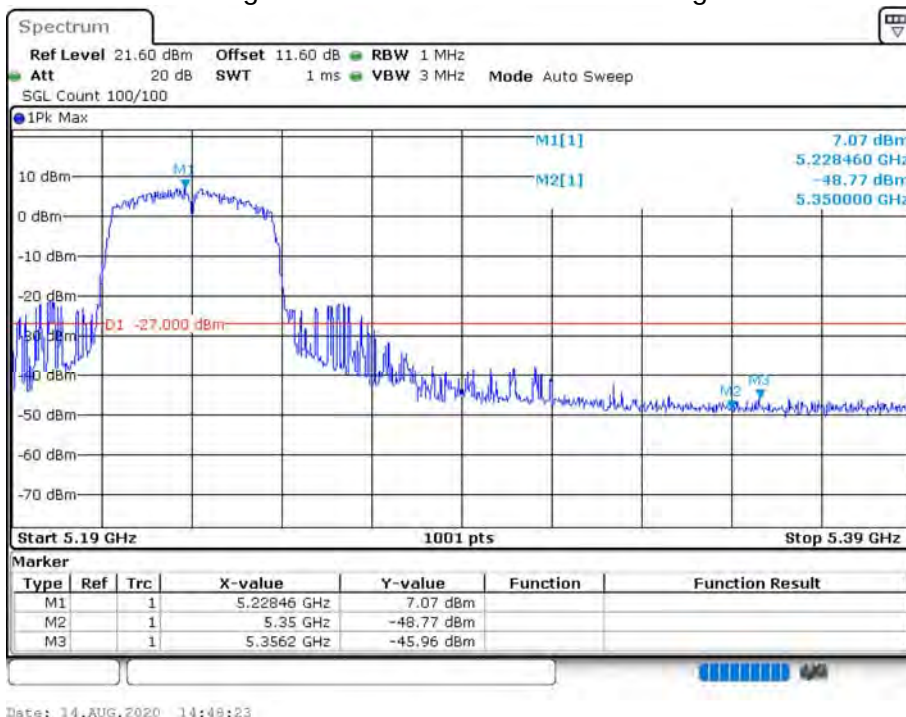


Band Edge NVNT 802.11ac80 5210MHz High Ant1

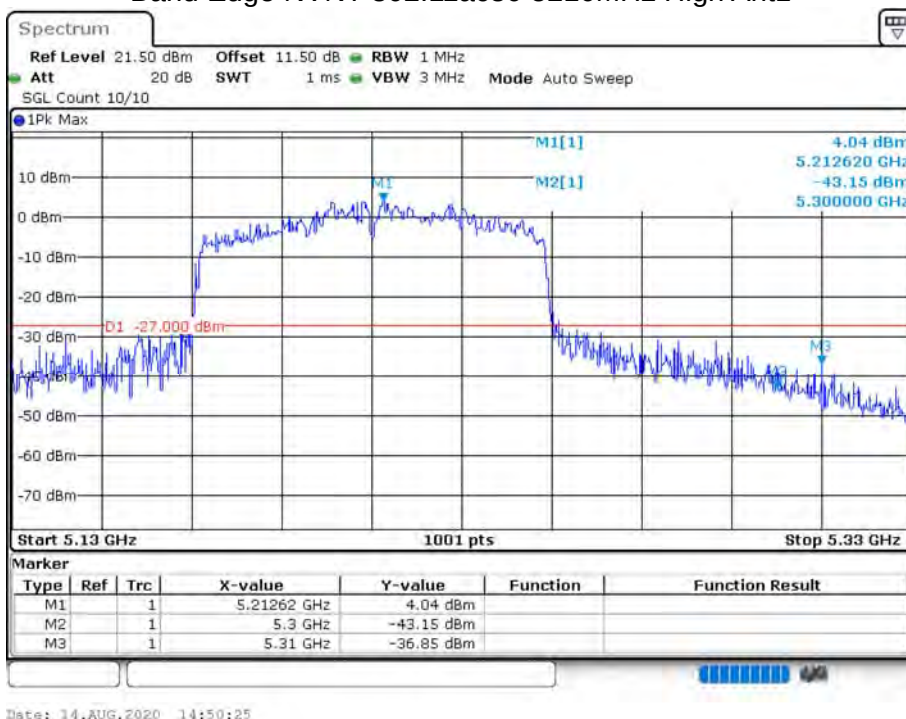


Band Edge NVNT 802.11ac80 5210MHz Low Ant1

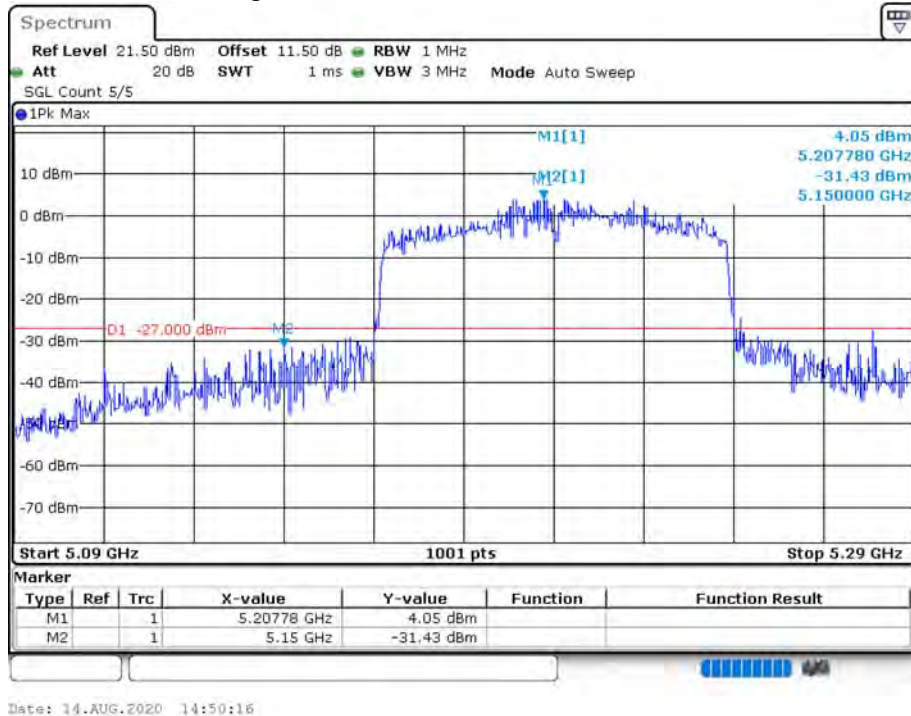

Band Edge NVNT 802.11n(HT20) 5180MHz Low Ant1

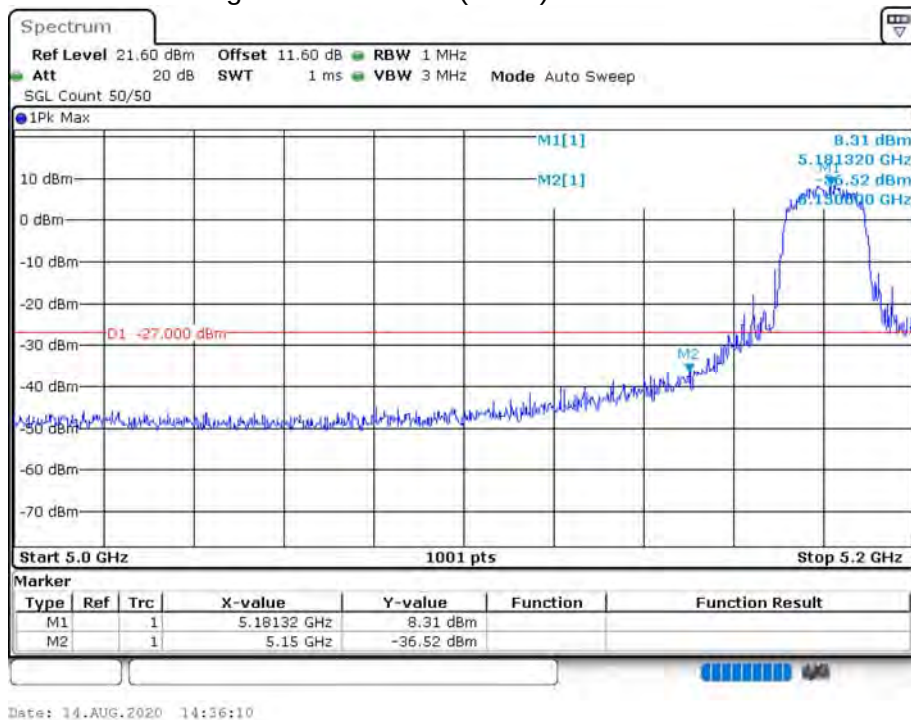


Band Edge NVNT 802.11n(HT20) 5240MHz High Ant1

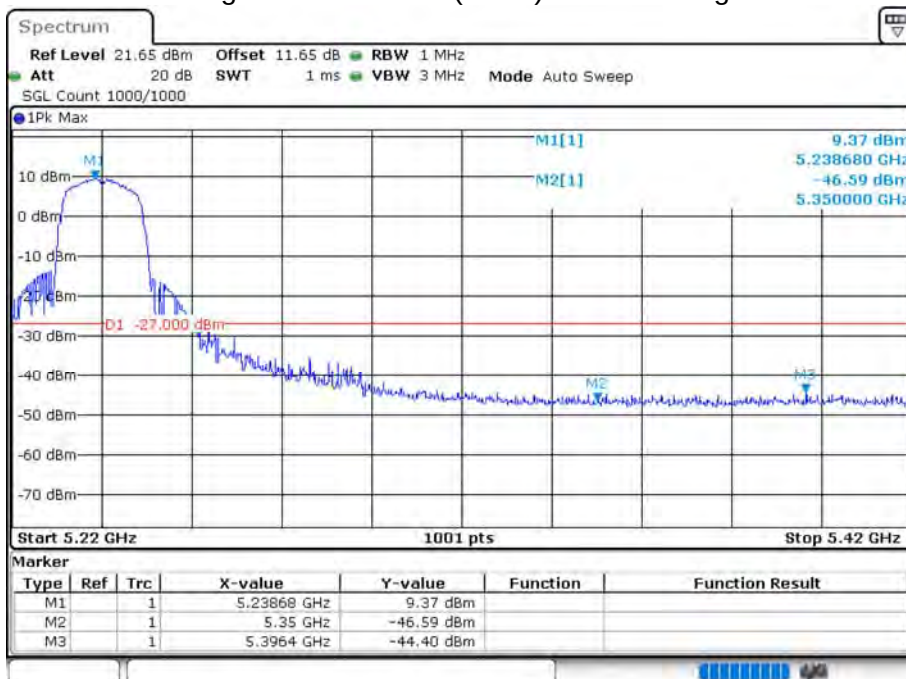


Date: 14.AUG.2020 14:38:57

Band Edge NVNT 802.11n(HT40) 5190MHz Low Ant1

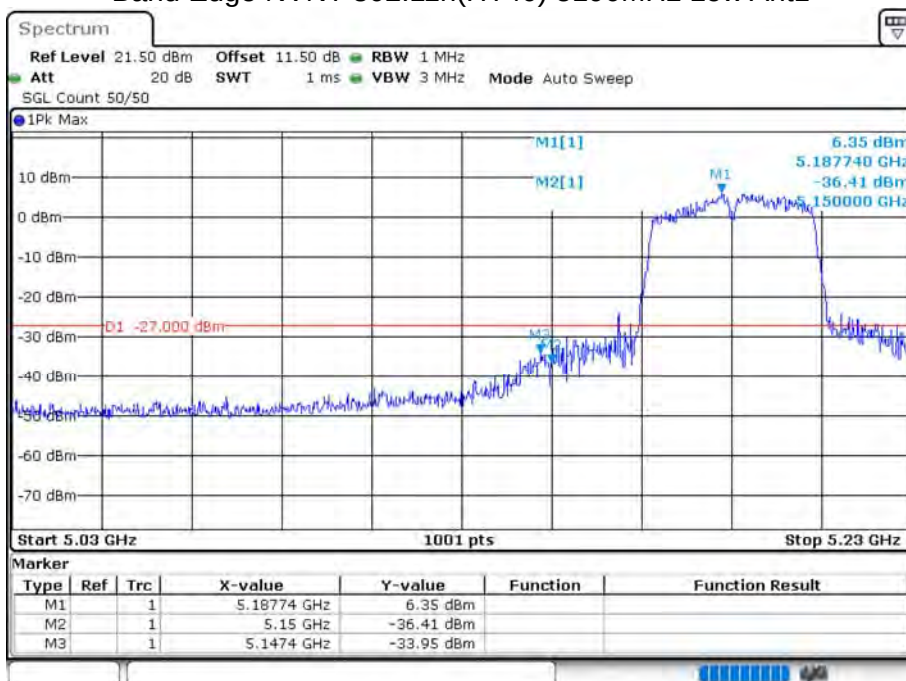

Date: 14.AUG.2020 14:44:12

Band Edge NVNT 802.11n(HT40) 5230MHz High Ant1

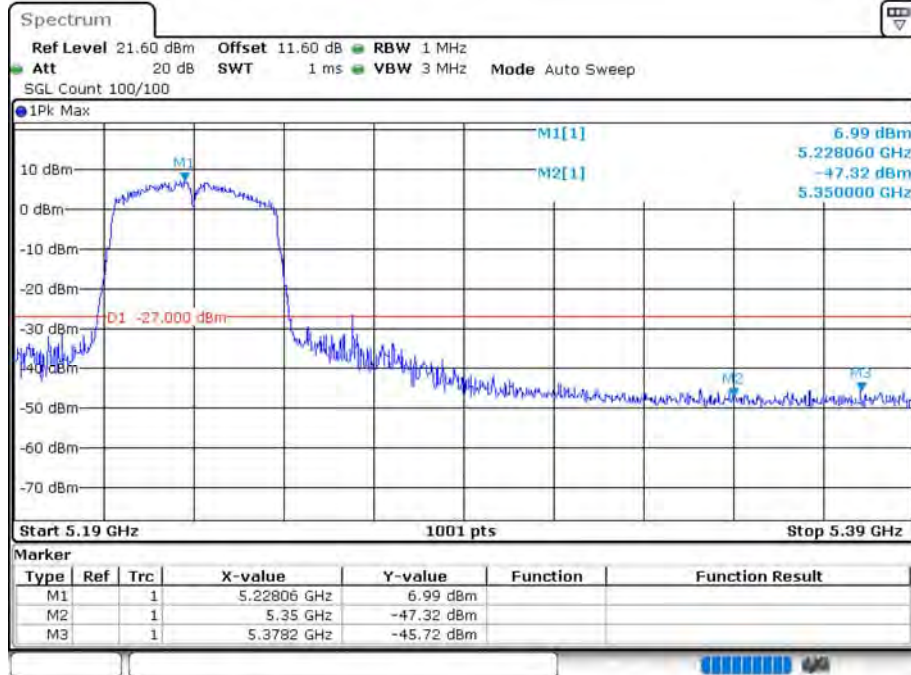


Date: 14.AUG.2020 14:45:30

CONDUCTED RF SPURIOUS EMISSION


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11a	5180	Ant 1	-35.35	-27	Pass
NVNT	802.11a	5200	Ant 1	-35.71	-27	Pass
NVNT	802.11a	5240	Ant 1	-34.98	-27	Pass
NVNT	802.11ac20	5180	Ant 1	-34.51	-27	Pass
NVNT	802.11ac20	5200	Ant 1	-35.35	-27	Pass
NVNT	802.11ac20	5240	Ant 1	-35.09	-27	Pass
NVNT	802.11ac40	5190	Ant 1	-35.82	-27	Pass
NVNT	802.11ac40	5230	Ant 1	-35.11	-27	Pass
NVNT	802.11ac80	5210	Ant 1	-35.76	-27	Pass
NVNT	802.11n(HT20)	5180	Ant 1	-35.02	-27	Pass
NVNT	802.11n(HT20)	5200	Ant 1	-35.61	-27	Pass
NVNT	802.11n(HT20)	5240	Ant 1	-35.44	-27	Pass
NVNT	802.11n(HT40)	5190	Ant 1	-35.58	-27	Pass
NVNT	802.11n(HT40)	5230	Ant 1	-34.37	-27	Pass

Tx. Spurious NVNT 802.11a 5180MHz Ant1 Emission

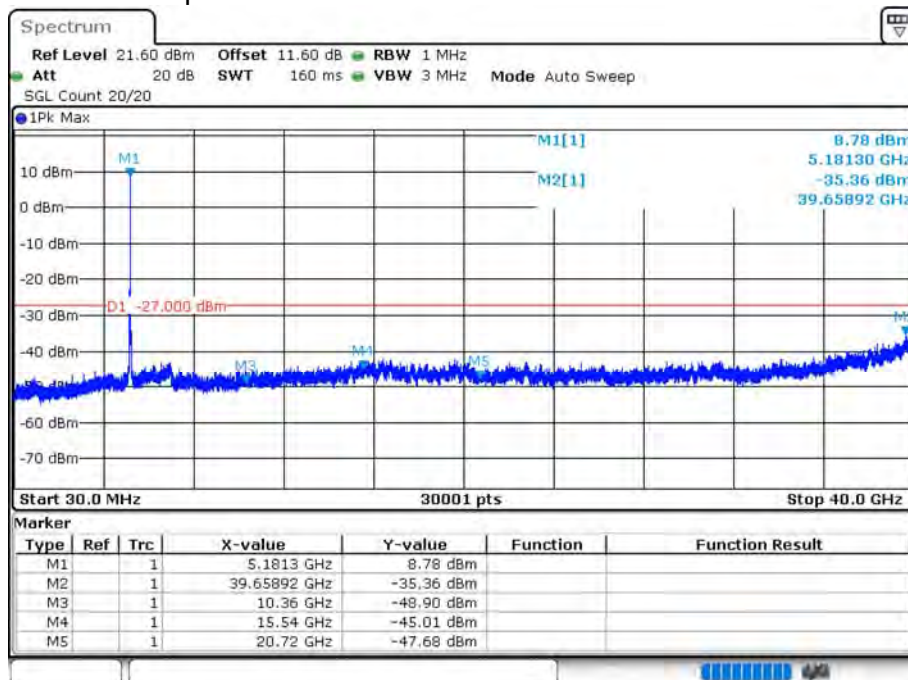


Date: 14.AUG.2020 14:32:19


Tx. Spurious NVNT 802.11a 5200MHz Ant1 Emission

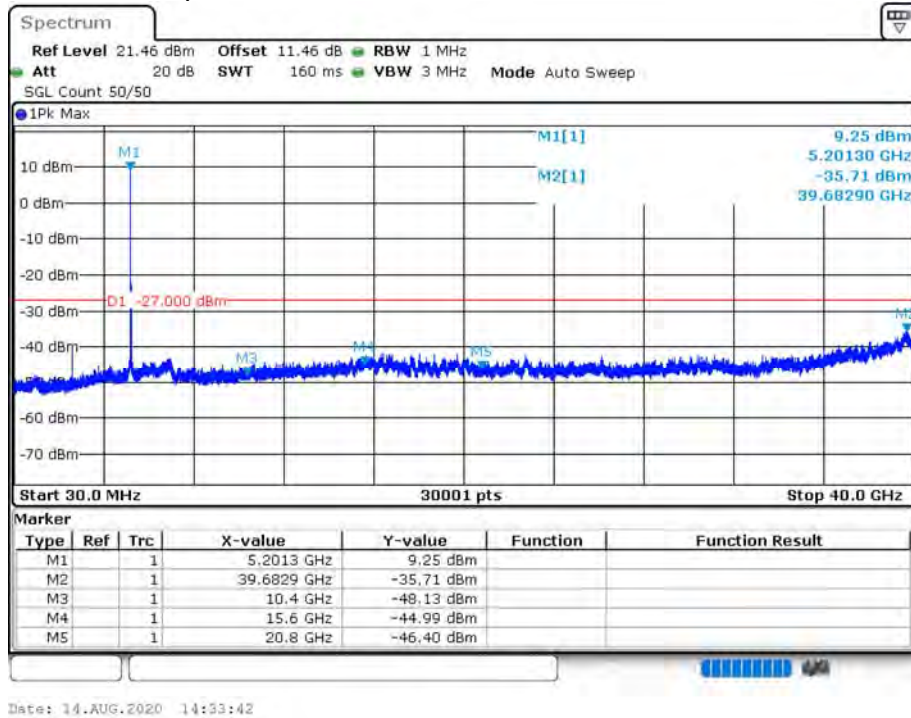


Tx. Spurious NVNT 802.11a 5240MHz Ant1 Emission

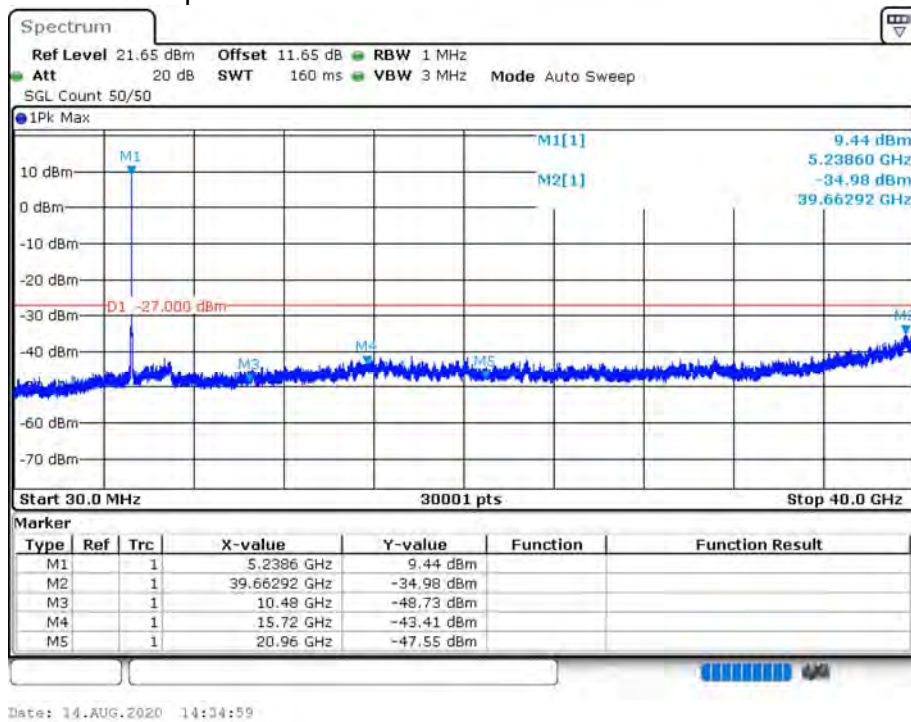


Tx. Spurious NVNT 802.11ac20 5180MHz Ant1 Emission

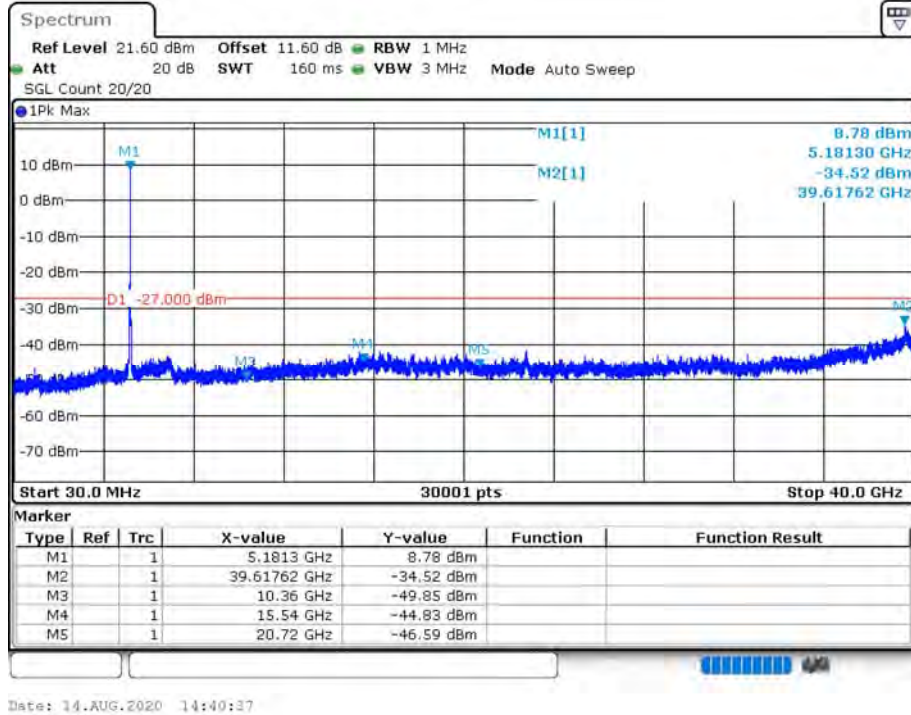

Tx. Spurious NVNT 802.11ac20 5200MHz Ant1 Emission

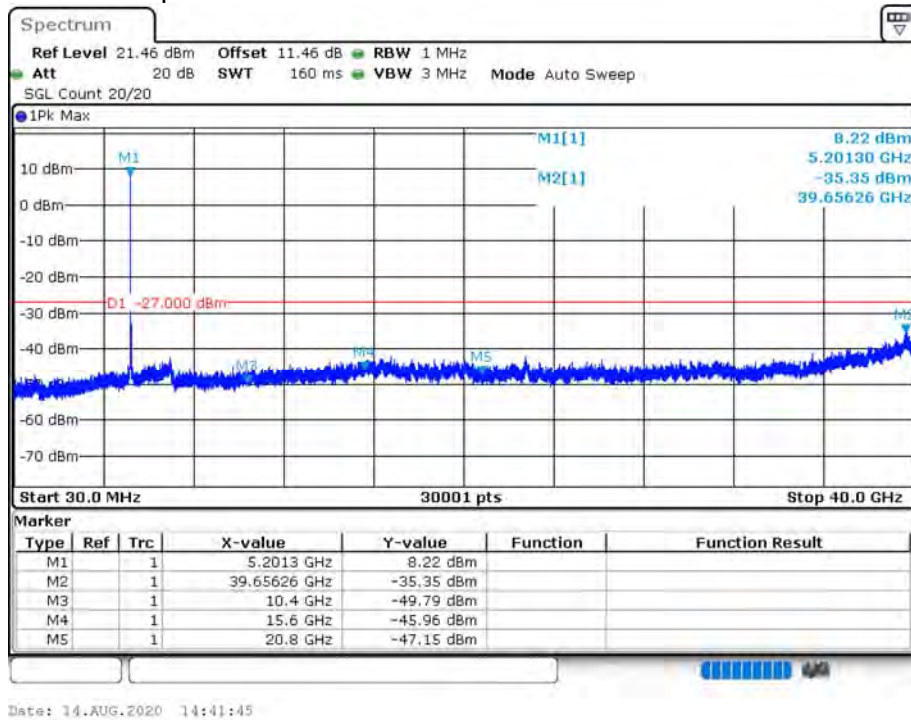


Tx. Spurious NVNT 802.11ac20 5240MHz Ant1 Emission

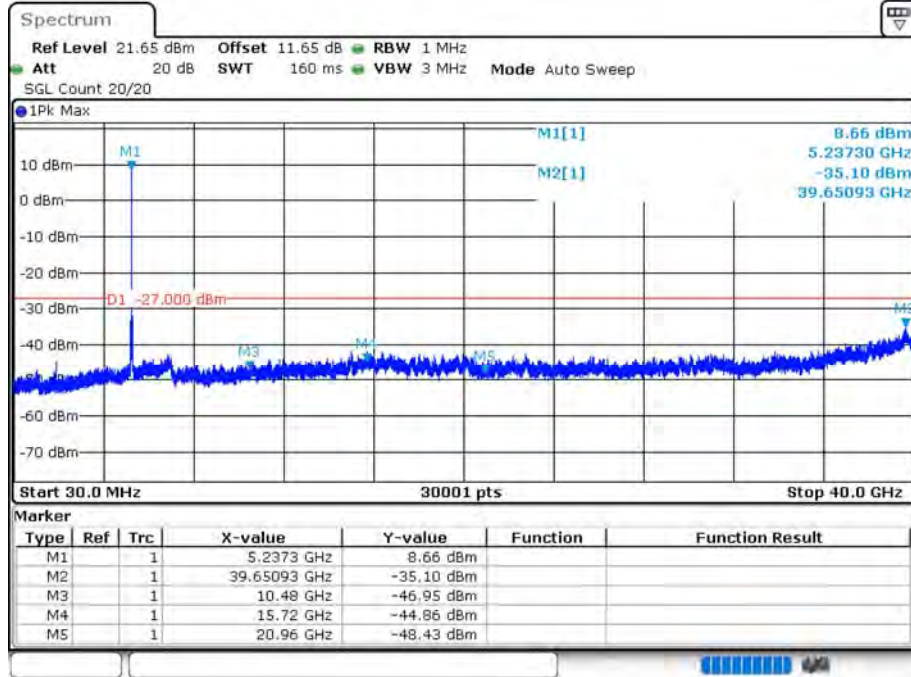


Date: 14.AUG.2020 14:43:00

Tx. Spurious NVNT 802.11ac40 5190MHz Ant1 Emission

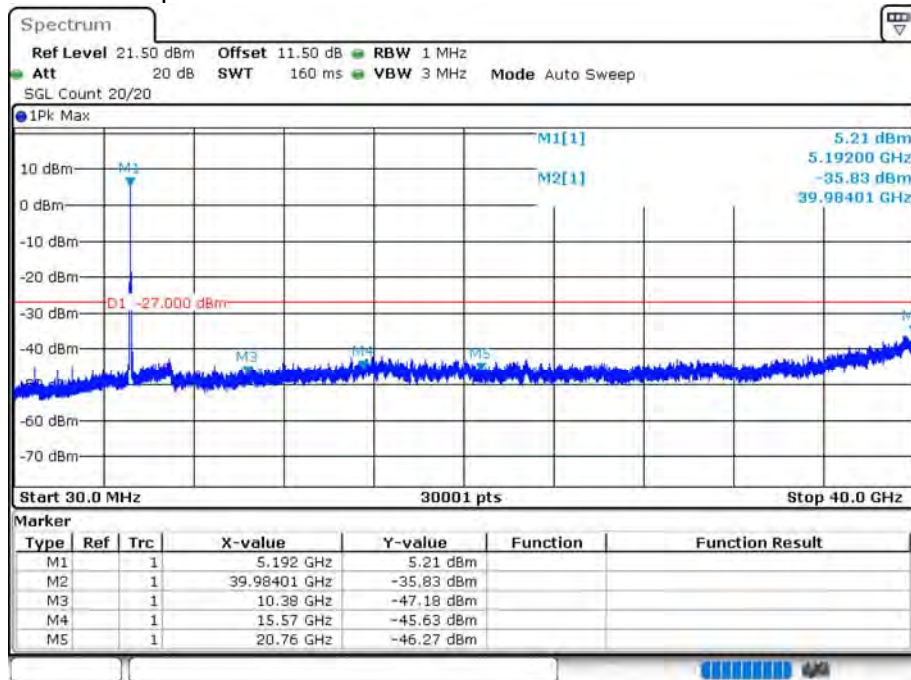


Date: 14.AUG.2020 14:47:15

Tx. Spurious NVNT 802.11ac40 5230MHz Ant1 Emission

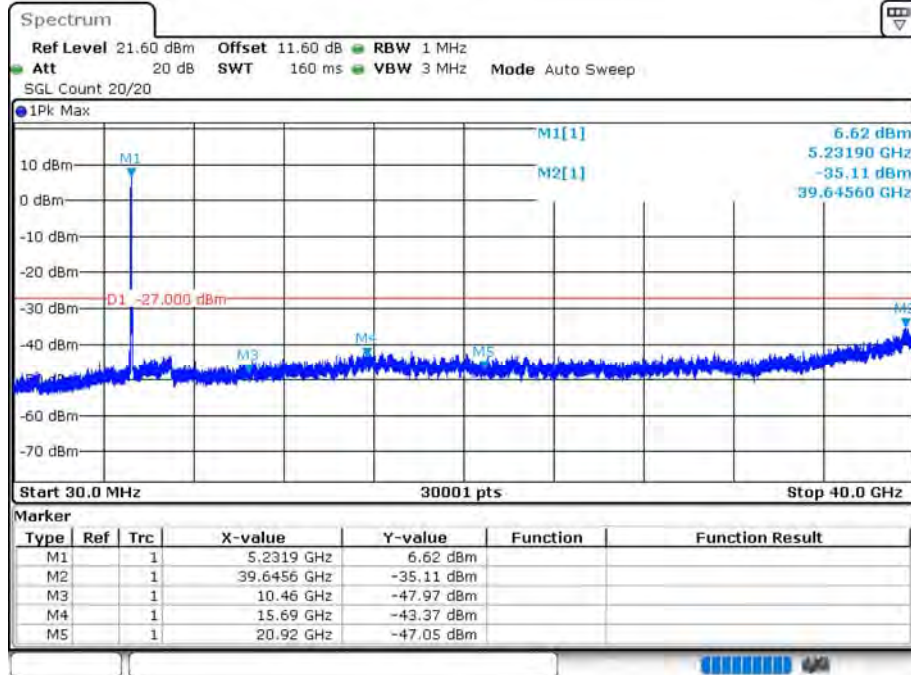


Date: 14.AUG.2020 14:48:42

Tx. Spurious NVNT 802.11ac80 5210MHz Ant1 Emission

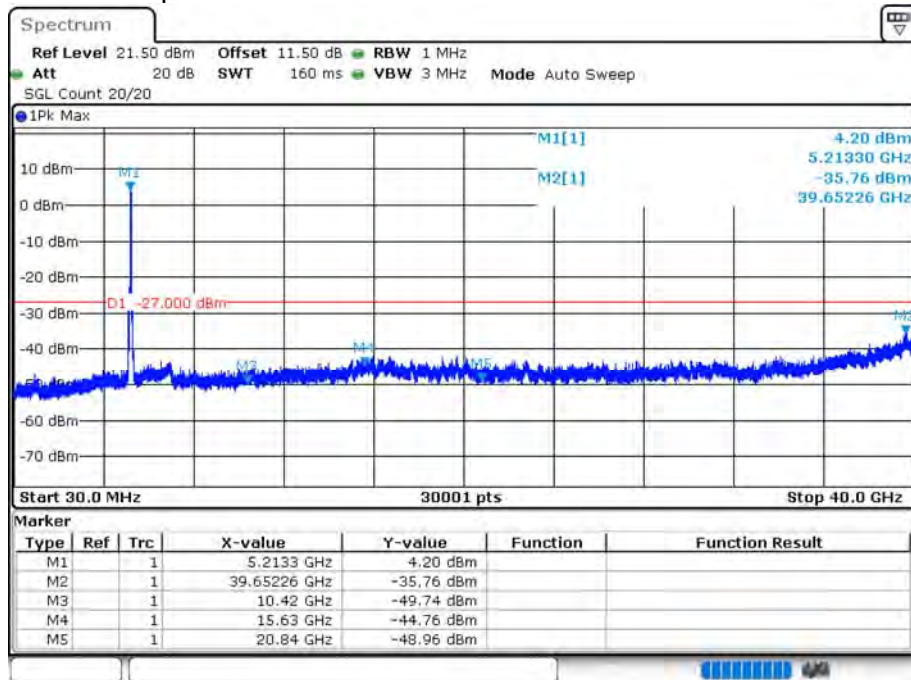


Date: 14.AUG.2020 14:50:07


Tx. Spurious NVNT 802.11n(HT20) 5180MHz Ant1 Emission

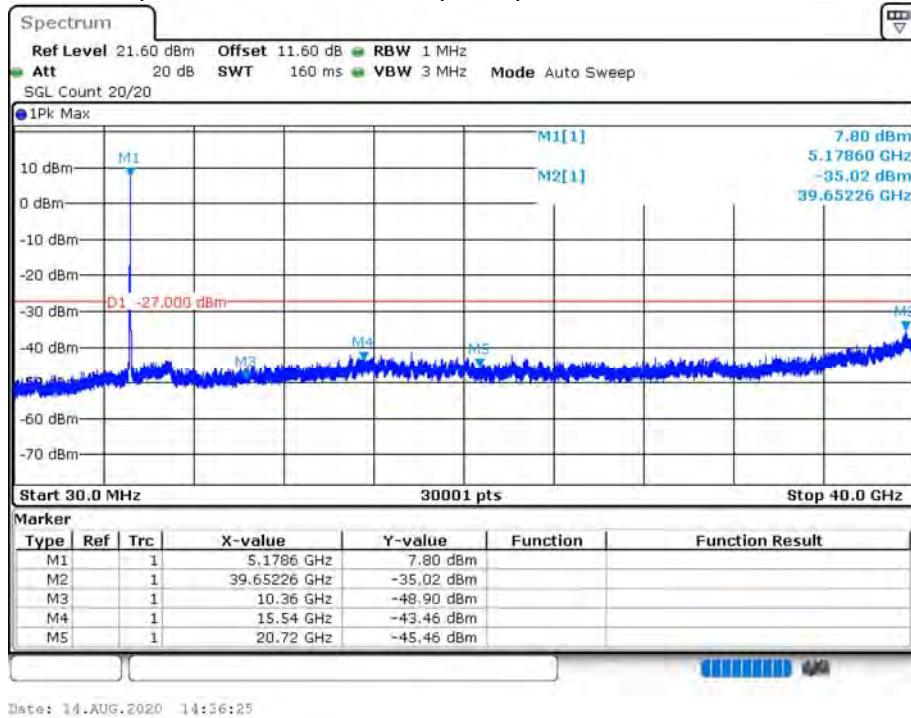

Tx. Spurious NVNT 802.11n(HT20) 5200MHz Ant1 Emission

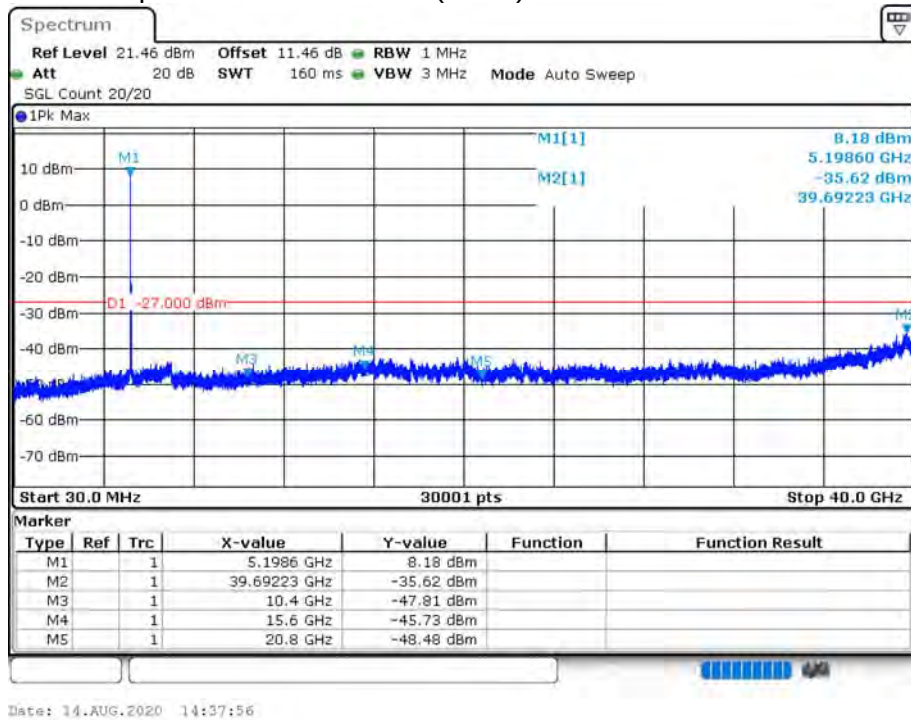


Tx. Spurious NVNT 802.11n(HT20) 5240MHz Ant1 Emission

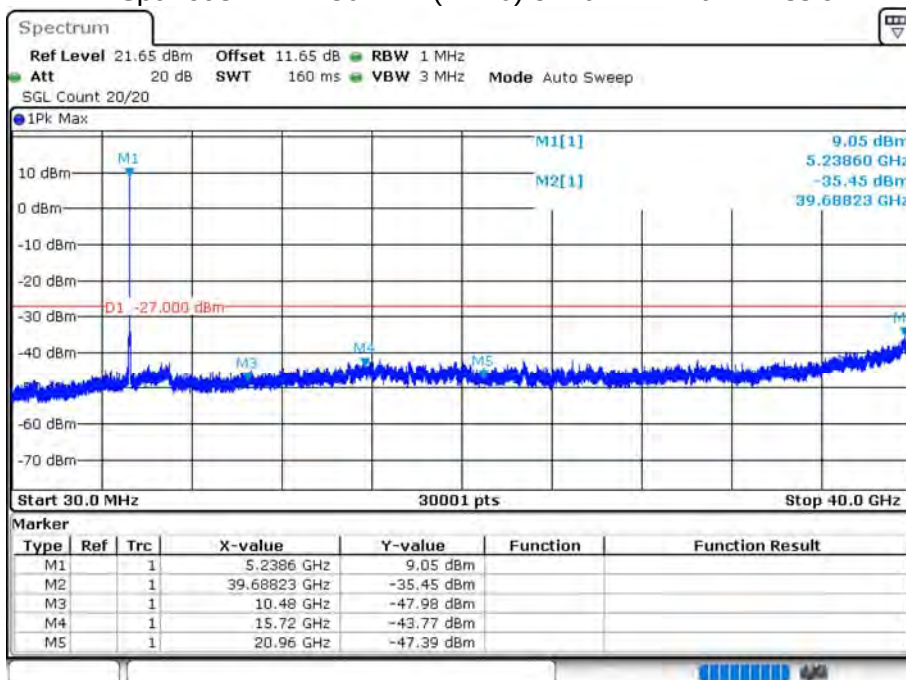


Date: 14.AUG.2020 14:39:12

Tx. Spurious NVNT 802.11n(HT40) 5190MHz Ant1 Emission

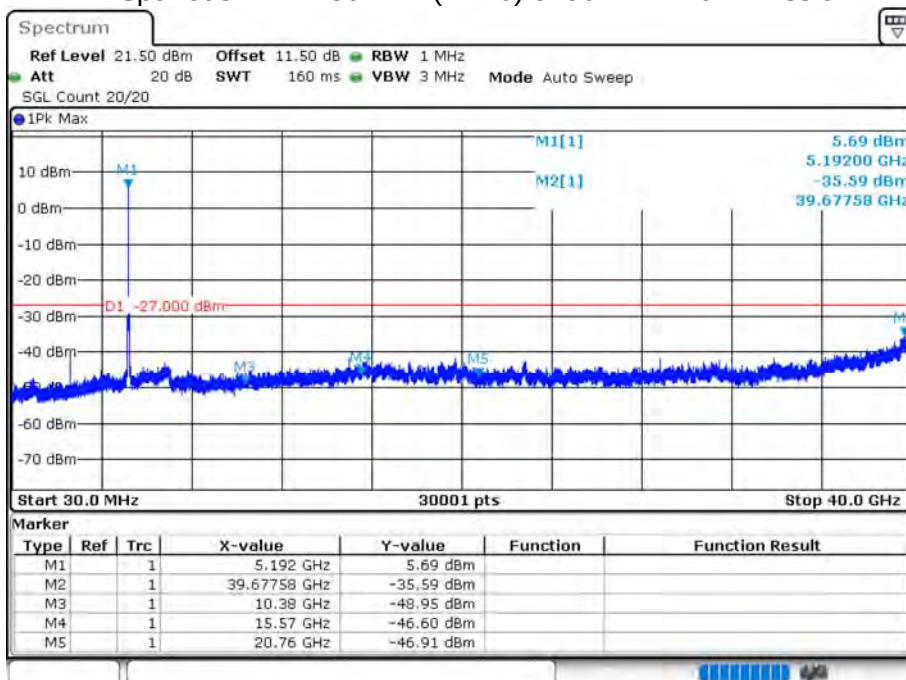

Date: 14.AUG.2020 14:44:30

Tx. Spurious NVNT 802.11n(HT40) 5230MHz Ant1 Emission

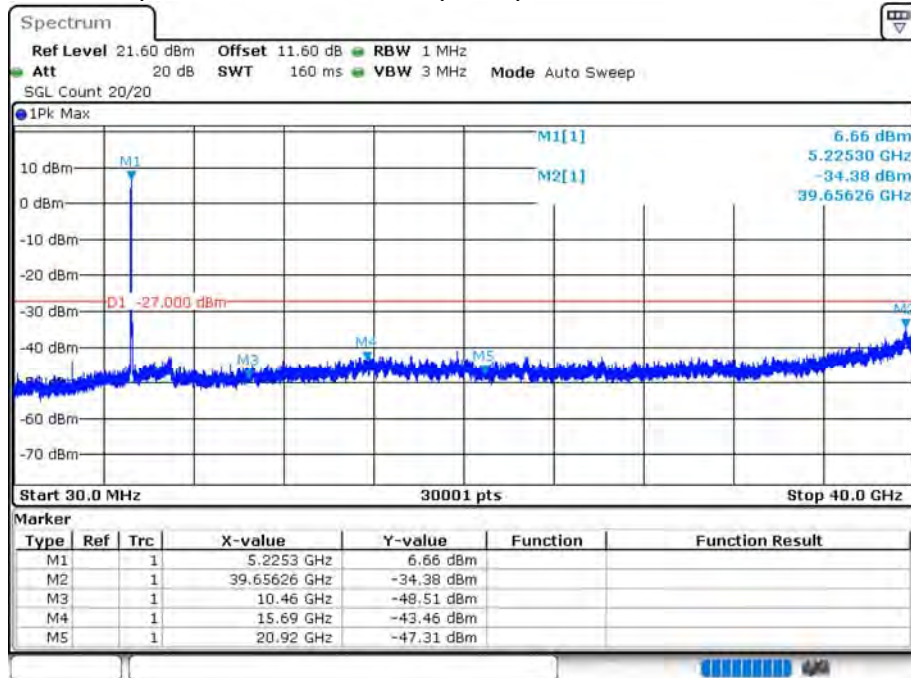


Date: 14.AUG.2020 14:45:48

5.8G

DUTY CYCLE


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	802.11a	5745	100	0
NVNT	802.11a	5785	100	0
NVNT	802.11a	5825	100	0
NVNT	802.11ac20	5745	100	0
NVNT	802.11ac20	5785	100	0
NVNT	802.11ac20	5825	100	0
NVNT	802.11ac40	5755	100	0
NVNT	802.11ac40	5795	100	0
NVNT	802.11ac80	5775	100	0
NVNT	802.11n(HT20)	5745	100	0
NVNT	802.11n(HT20)	5785	100	0
NVNT	802.11n(HT20)	5825	100	0
NVNT	802.11n(HT40)	5755	100	0
NVNT	802.11n(HT40)	5795	100	0

Duty Cycle NVNT 802.11a 5745MHz

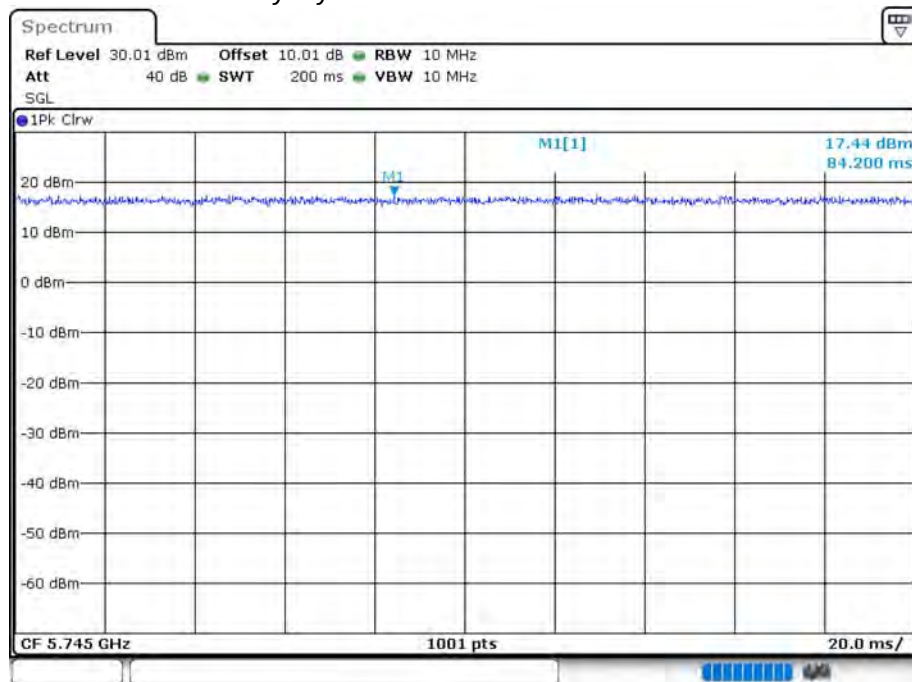


Date: 14.AUG.2020 14:56:59


Duty Cycle NVNT 802.11a 5785MHz

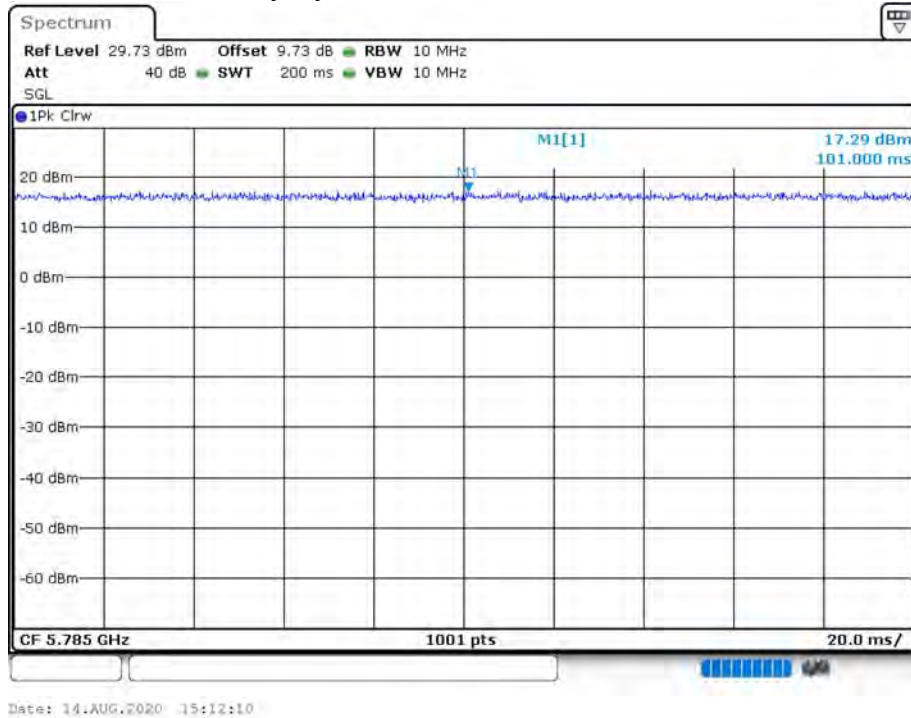


Duty Cycle NVNT 802.11a 5825MHz

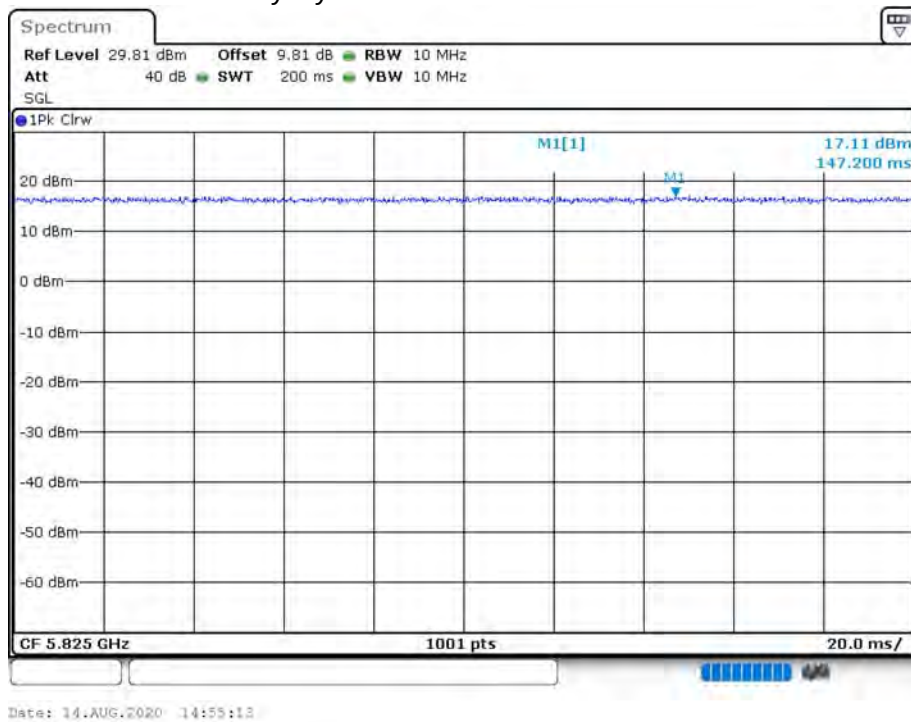


Duty Cycle NVNT 802.11ac20 5745MHz

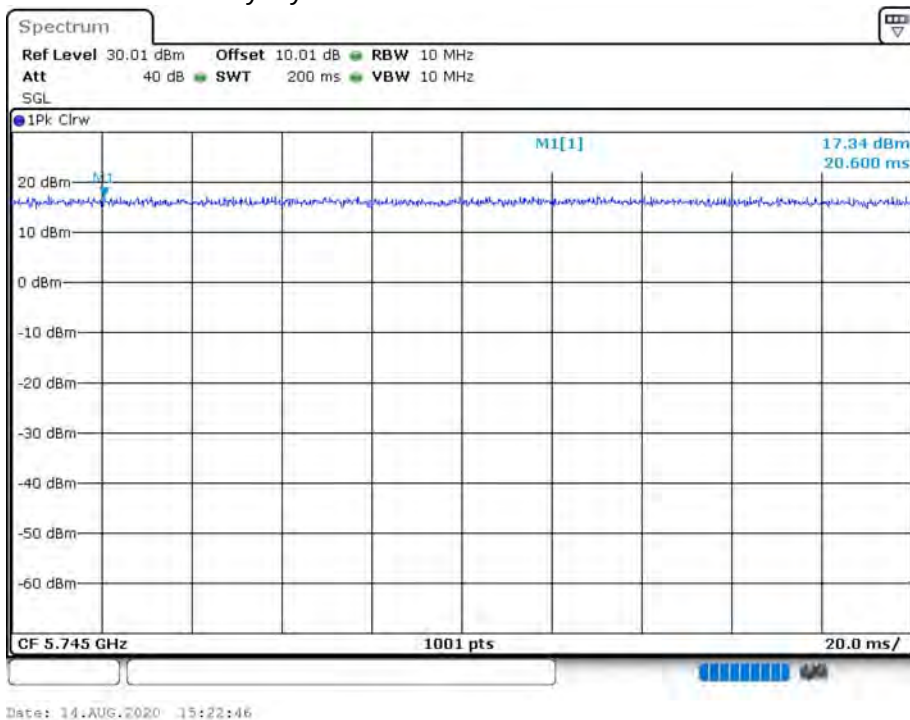


Duty Cycle NVNT 802.11ac20 5785MHz

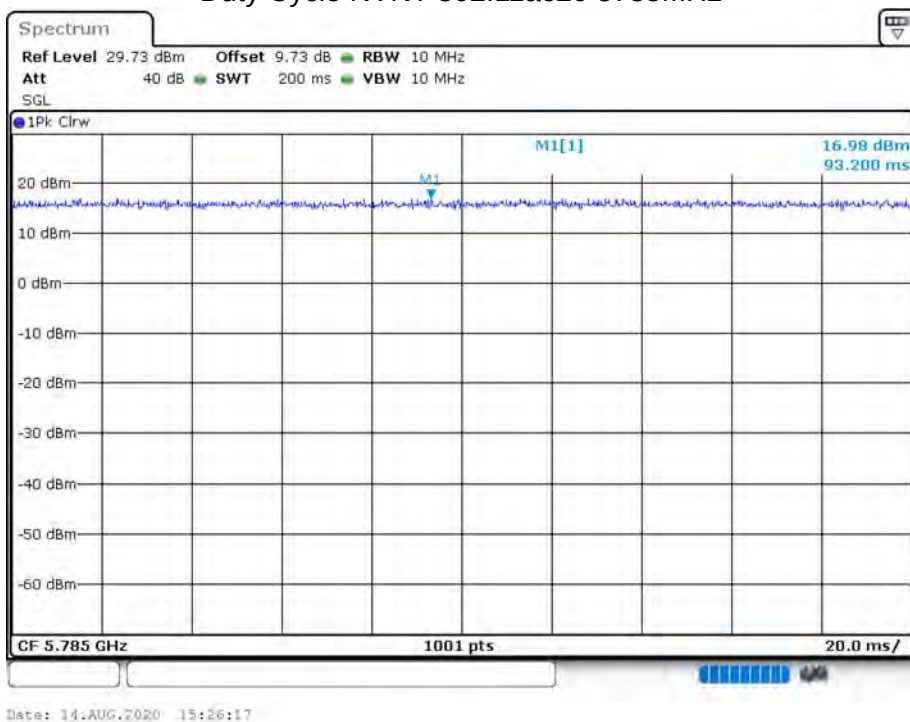


Duty Cycle NVNT 802.11ac20 5825MHz

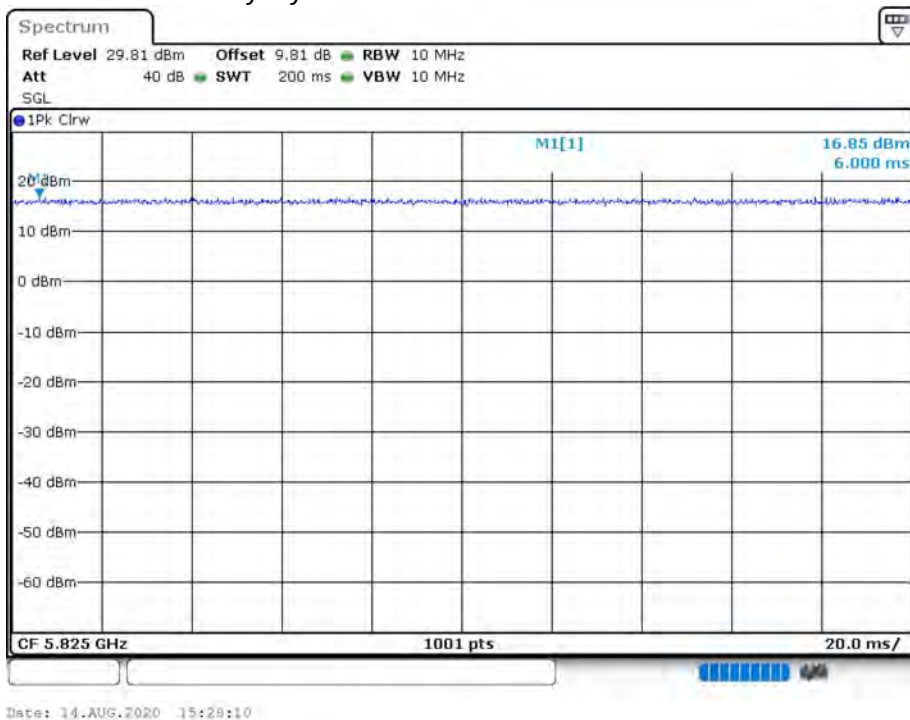


Duty Cycle NVNT 802.11ac40 5755MHz

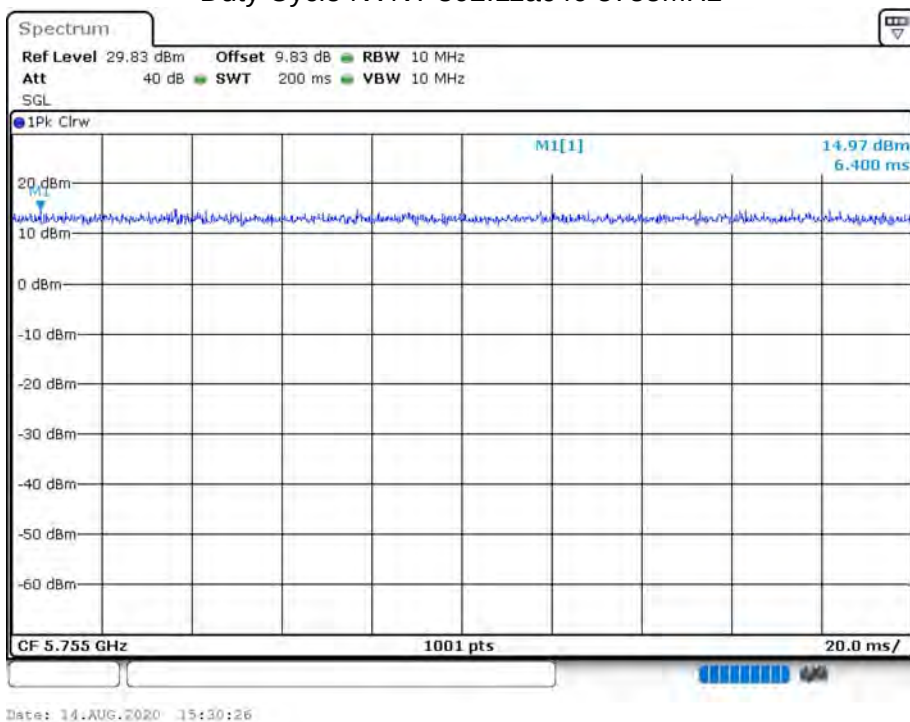


Duty Cycle NVNT 802.11ac40 5795MHz

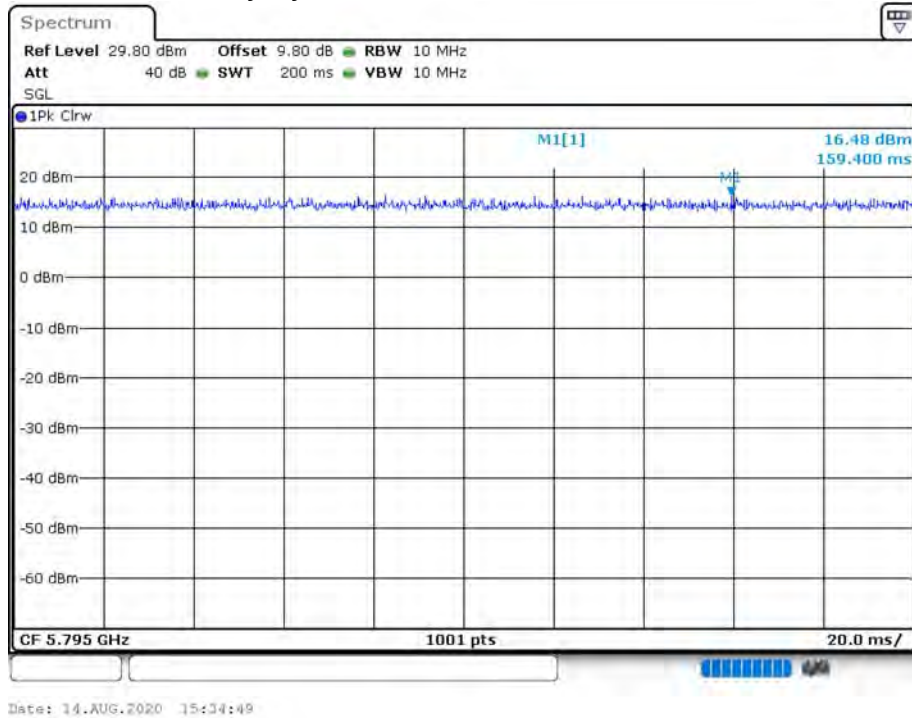


Duty Cycle NVNT 802.11ac80 5775MHz

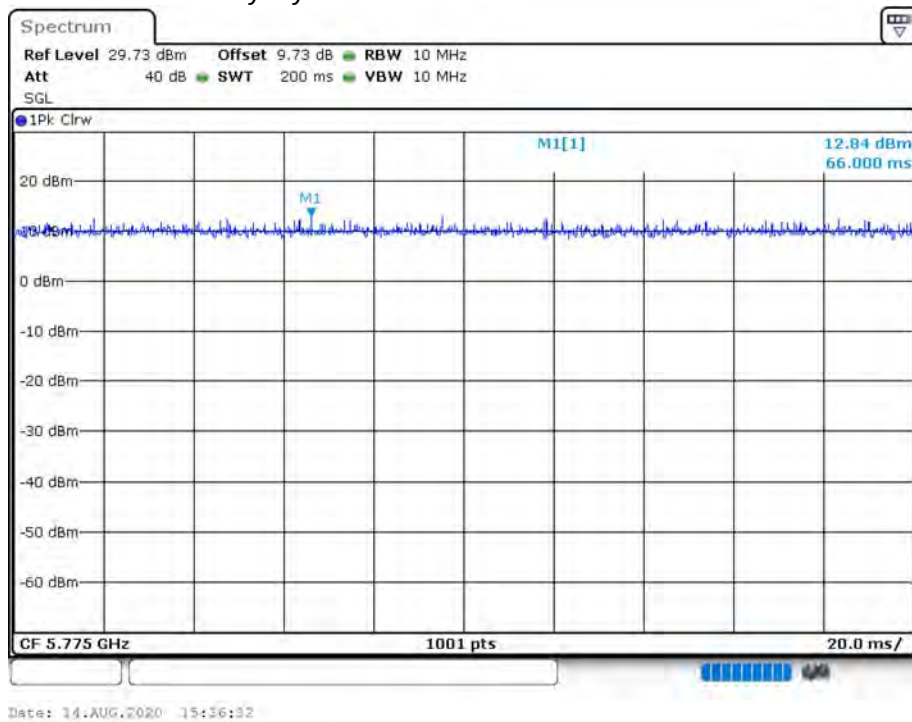


Duty Cycle NVNT 802.11n(HT20) 5745MHz

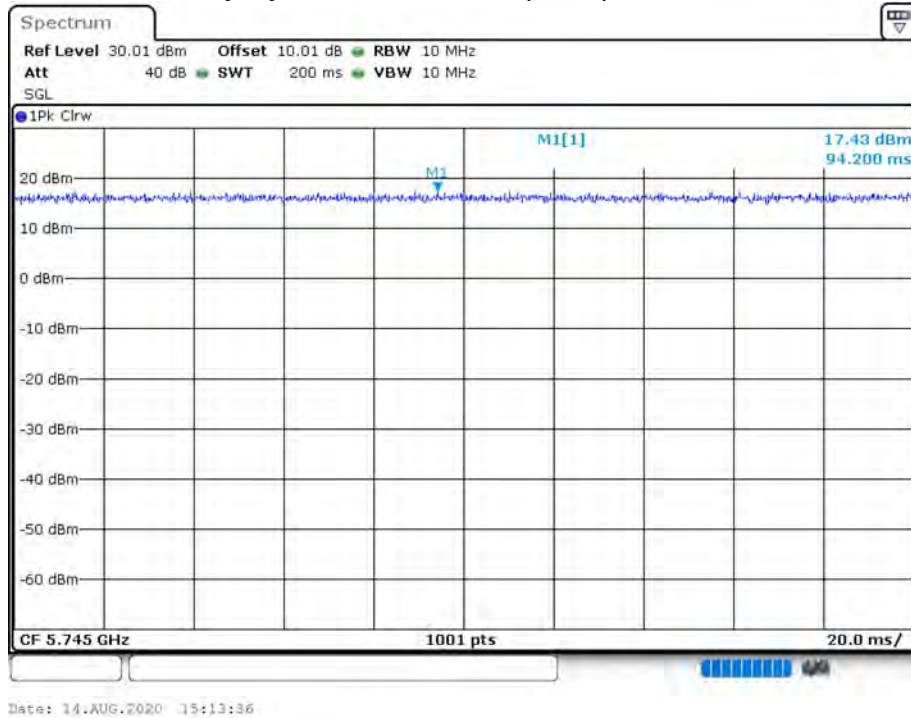


Duty Cycle NVNT 802.11n(HT20) 5785MHz

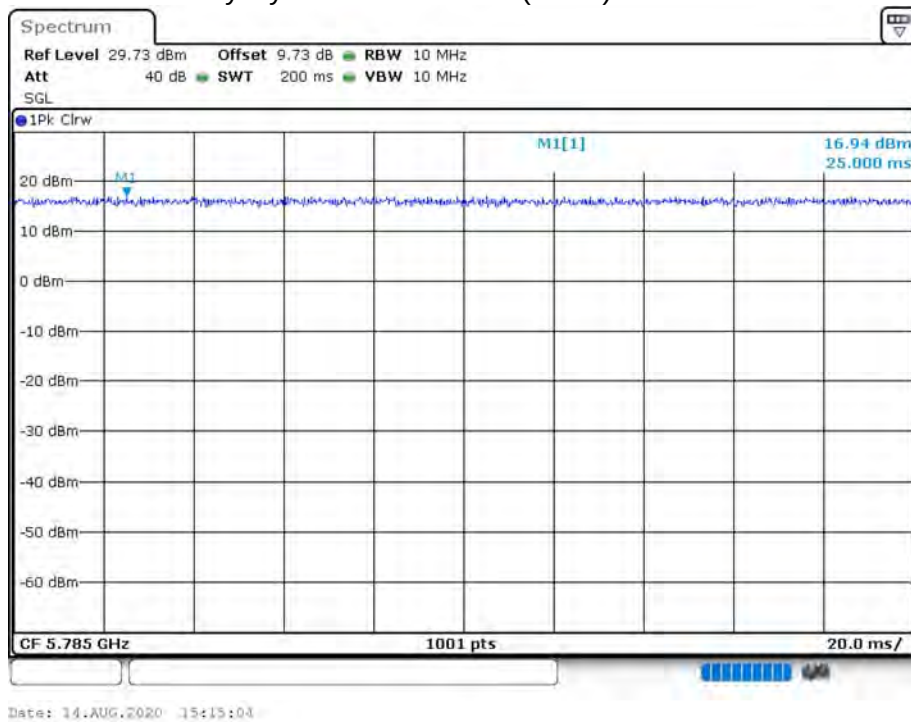


Duty Cycle NVNT 802.11n(HT20) 5825MHz

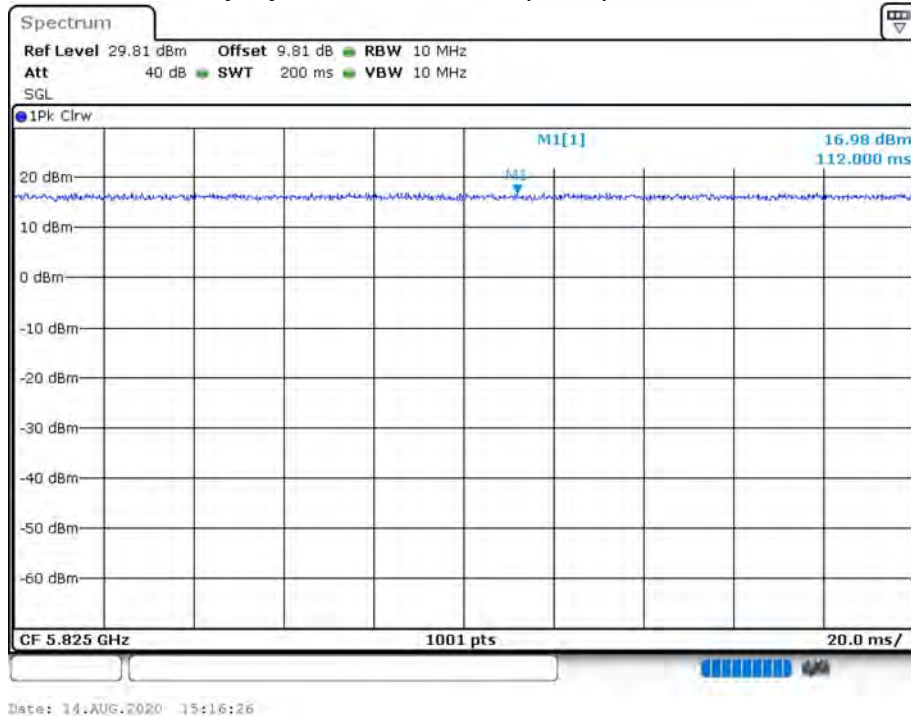

Duty Cycle NVNT 802.11n(HT40) 5755MHz

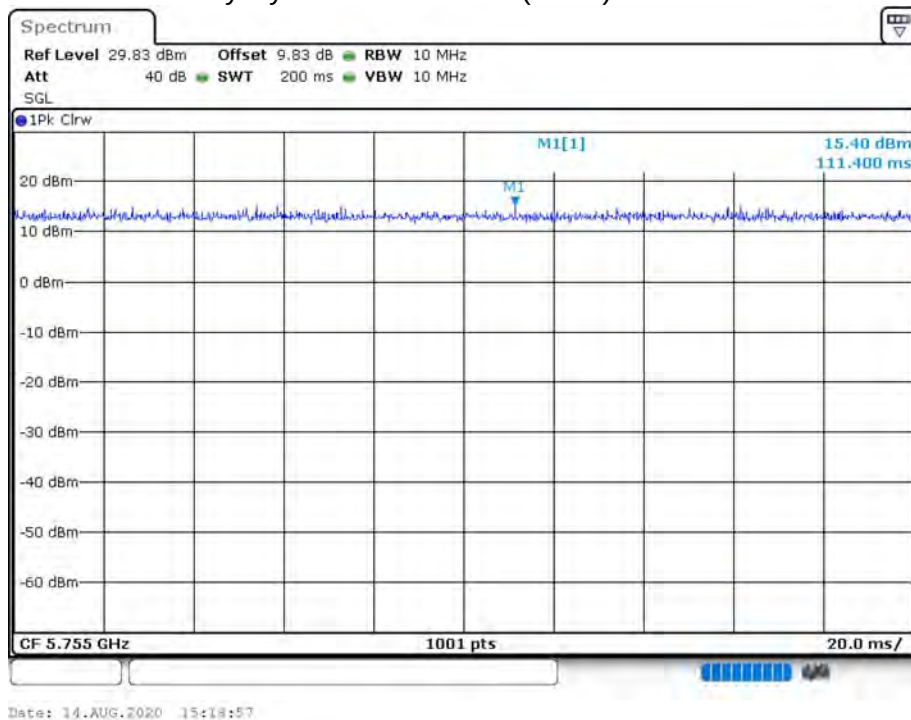

Duty Cycle NVNT 802.11n(HT40) 5795MHz

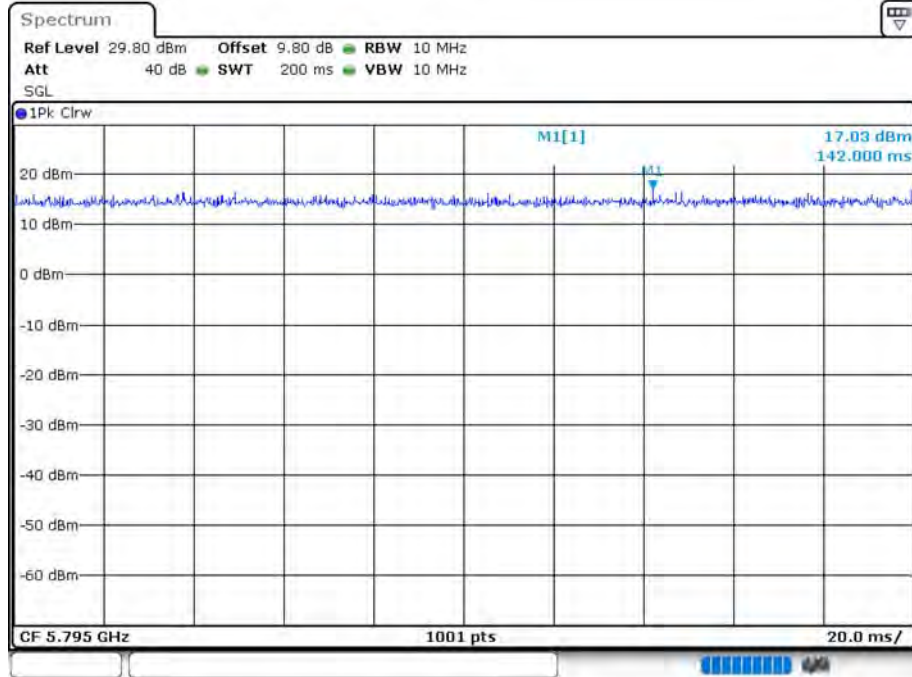

Date: 14.AUG.2020 15:20:42


MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5745	Ant 1	8.3	0	8.3	30	Pass
NVNT	802.11a	5785	Ant 1	8.23	0	8.23	30	Pass
NVNT	802.11a	5825	Ant 1	9.03	0	9.03	30	Pass
NVNT	802.11ac20	5745	Ant 1	8.36	0	8.36	30	Pass
NVNT	802.11ac20	5785	Ant 1	8.13	0	8.13	30	Pass
NVNT	802.11ac20	5825	Ant 1	8.76	0	8.76	30	Pass
NVNT	802.11ac40	5755	Ant 1	7.56	0	7.56	30	Pass
NVNT	802.11ac40	5795	Ant 1	8.73	0	8.73	30	Pass
NVNT	802.11ac80	5775	Ant 1	7.93	0	7.93	30	Pass
NVNT	802.11n(HT20)	5745	Ant 1	8.19	0	8.19	30	Pass
NVNT	802.11n(HT20)	5785	Ant 1	7.94	0	7.94	30	Pass
NVNT	802.11n(HT20)	5825	Ant 1	8.92	0	8.92	30	Pass
NVNT	802.11n(HT40)	5755	Ant 1	7.57	0	7.57	30	Pass
NVNT	802.11n(HT40)	5795	Ant 1	8.86	0	8.86	30	Pass


-6DB EMISSION BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5745	Ant 1	15.44	0.5	Pass
NVNT	802.11a	5785	Ant 1	15.12	0.5	Pass
NVNT	802.11a	5825	Ant 1	15.72	0.5	Pass
NVNT	802.11ac20	5745	Ant 1	15.12	0.5	Pass
NVNT	802.11ac20	5785	Ant 1	15.48	0.5	Pass
NVNT	802.11ac20	5825	Ant 1	15.32	0.5	Pass
NVNT	802.11ac40	5755	Ant 1	35.12	0.5	Pass
NVNT	802.11ac40	5795	Ant 1	35.12	0.5	Pass
NVNT	802.11ac80	5775	Ant 1	75.2	0.5	Pass
NVNT	802.11n(HT20)	5745	Ant 1	15.96	0.5	Pass
NVNT	802.11n(HT20)	5785	Ant 1	15.12	0.5	Pass
NVNT	802.11n(HT20)	5825	Ant 1	15.12	0.5	Pass
NVNT	802.11n(HT40)	5755	Ant 1	35.12	0.5	Pass
NVNT	802.11n(HT40)	5795	Ant 1	33.92	0.5	Pass


EBW NVNT 802.11a 5745MHz Ant1

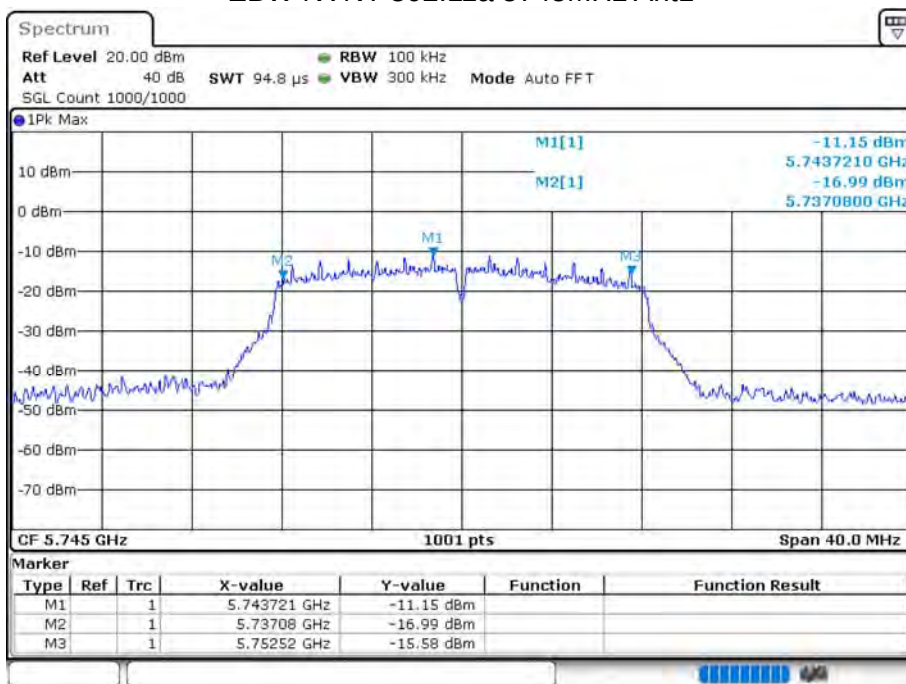


EBW NVNT 802.11a 5785MHz Ant1

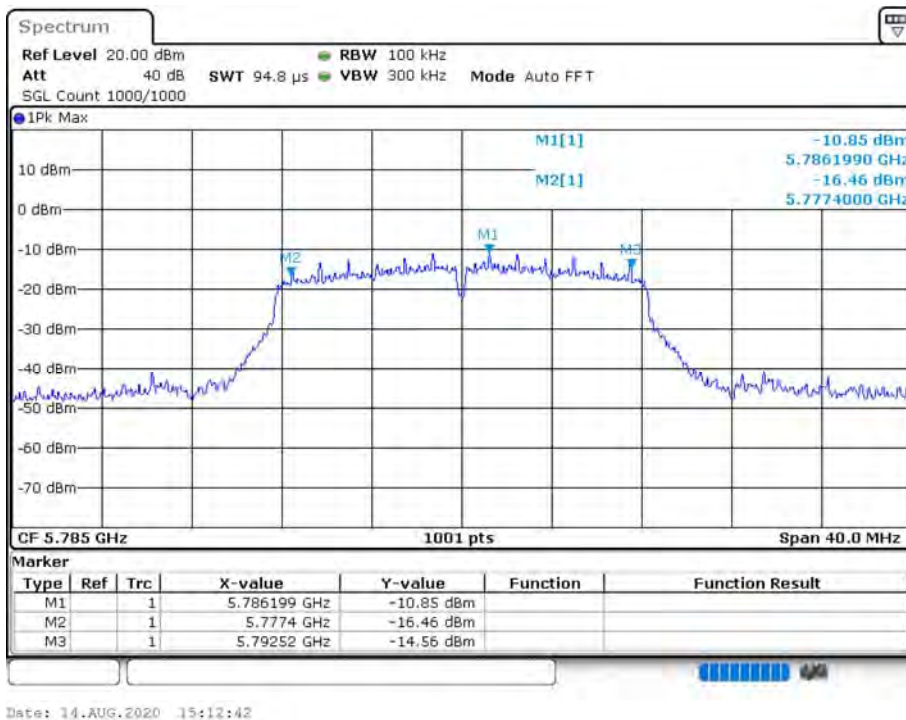


EBW NVNT 802.11a 5825MHz Ant1

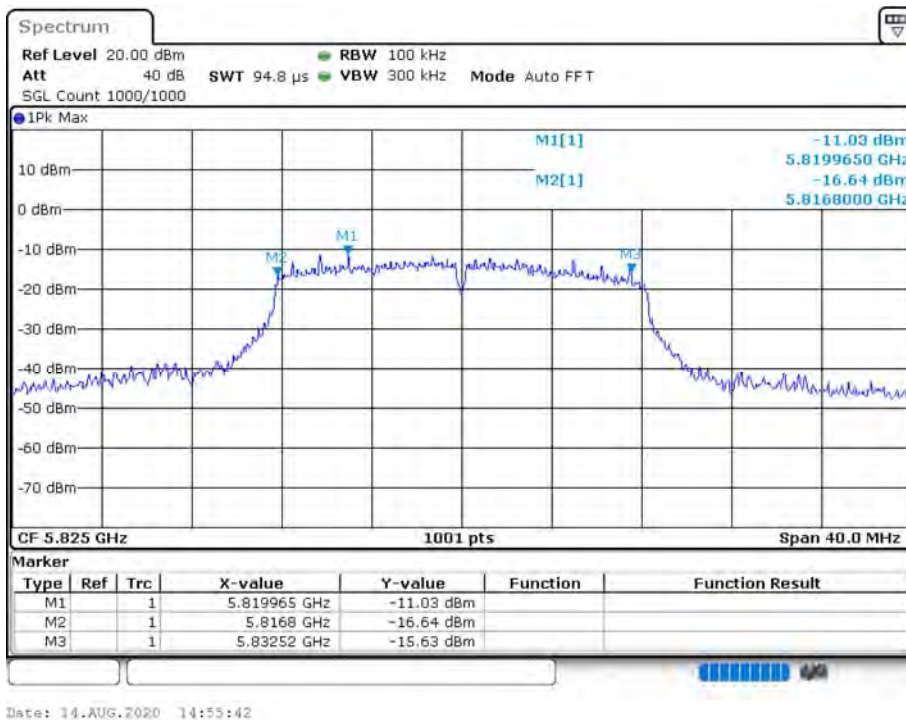


EBW NVNT 802.11ac20 5745MHz Ant1

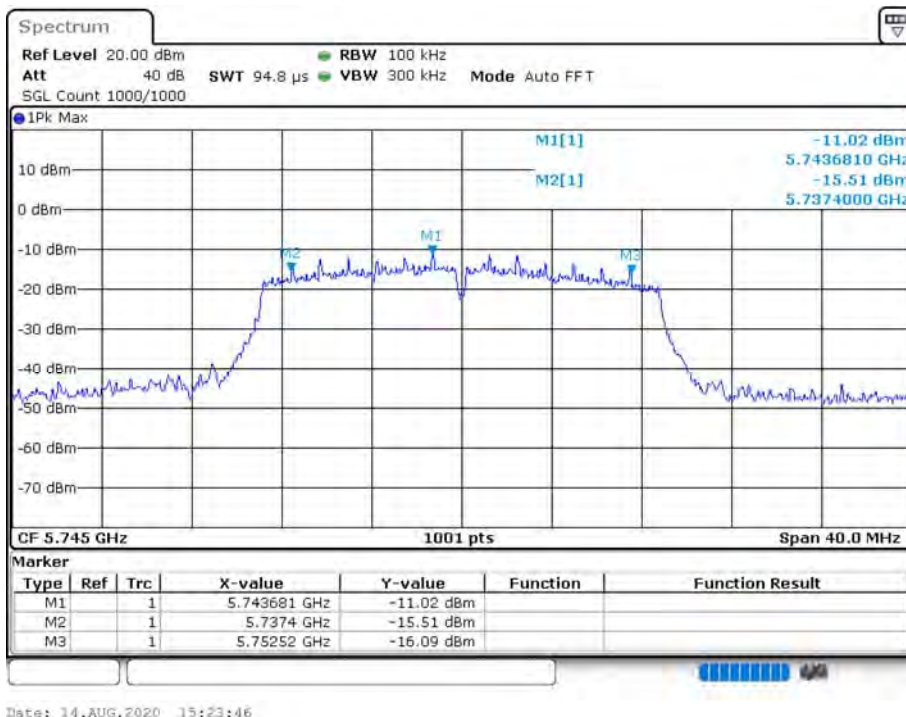


EBW NVNT 802.11ac20 5785MHz Ant1

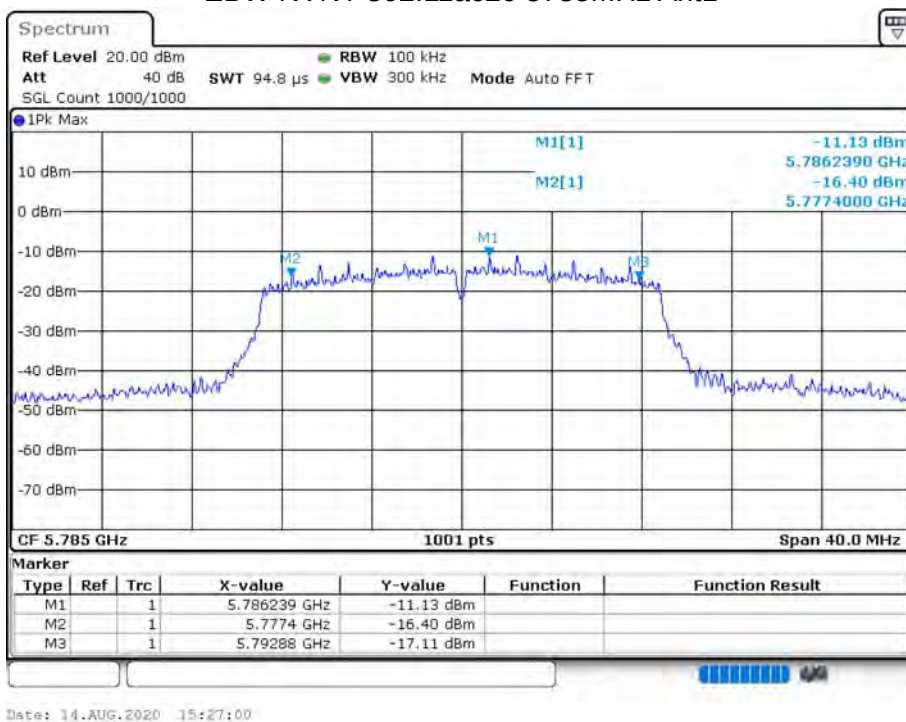


EBW NVNT 802.11ac20 5825MHz Ant1

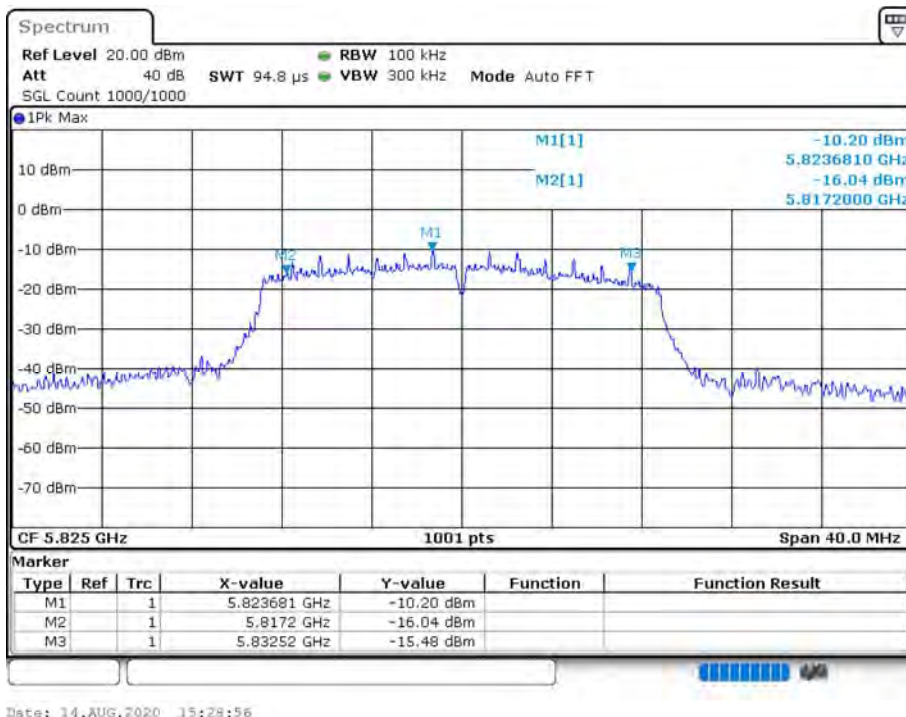


EBW NVNT 802.11ac40 5755MHz Ant1

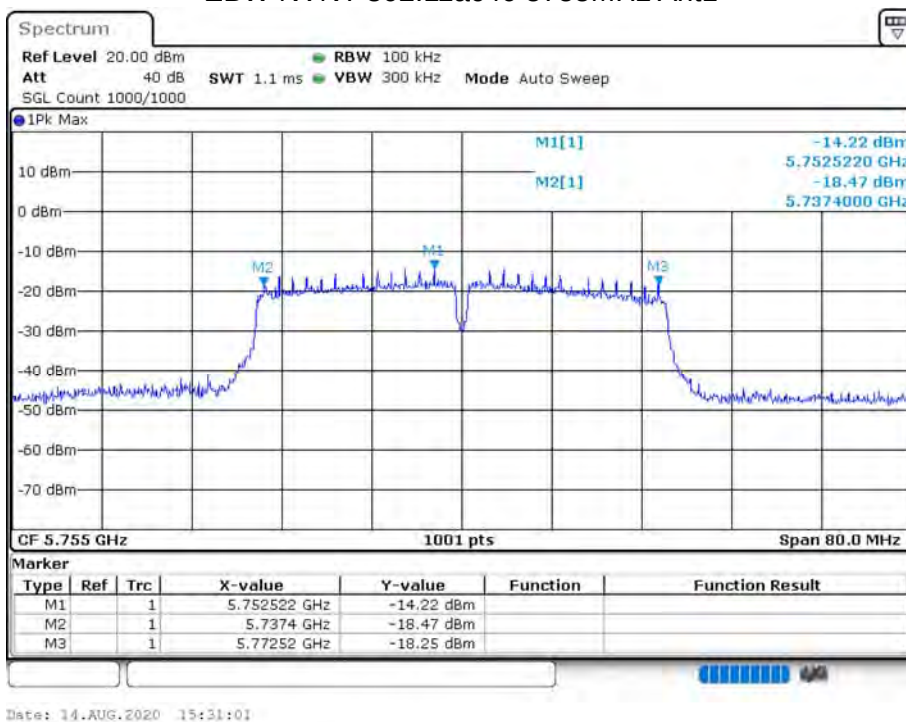


EBW NVNT 802.11ac40 5795MHz Ant1

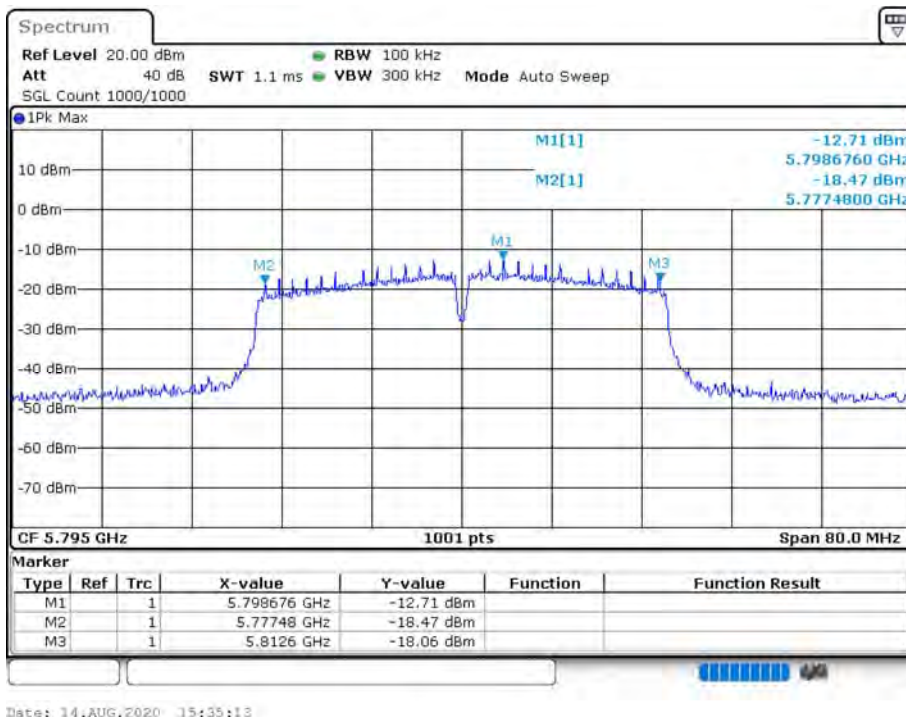


EBW NVNT 802.11ac80 5775MHz Ant1

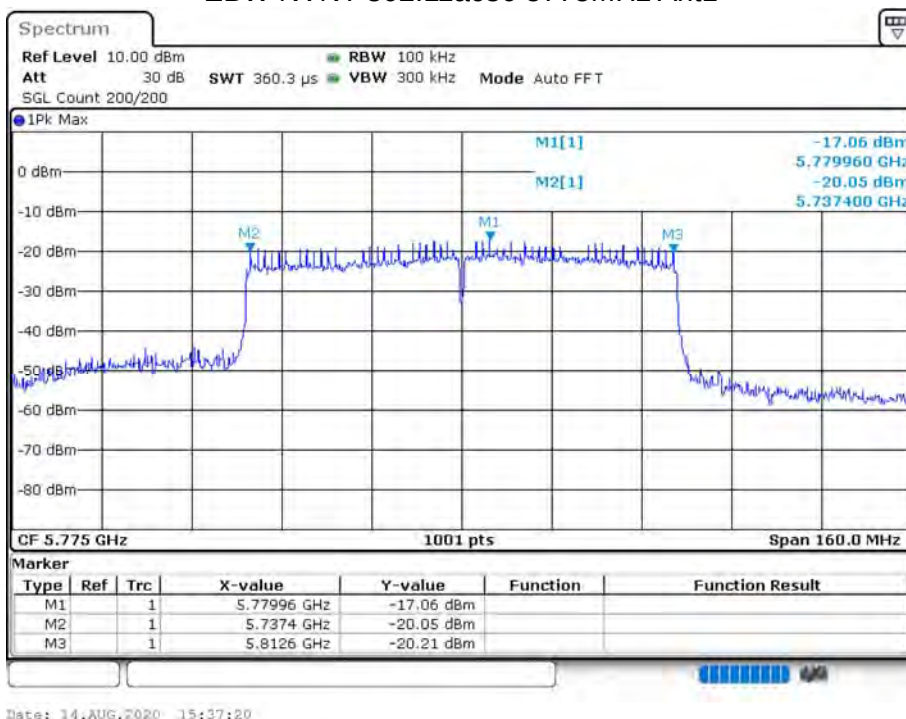


EBW NVNT 802.11n(HT20) 5745MHz Ant1

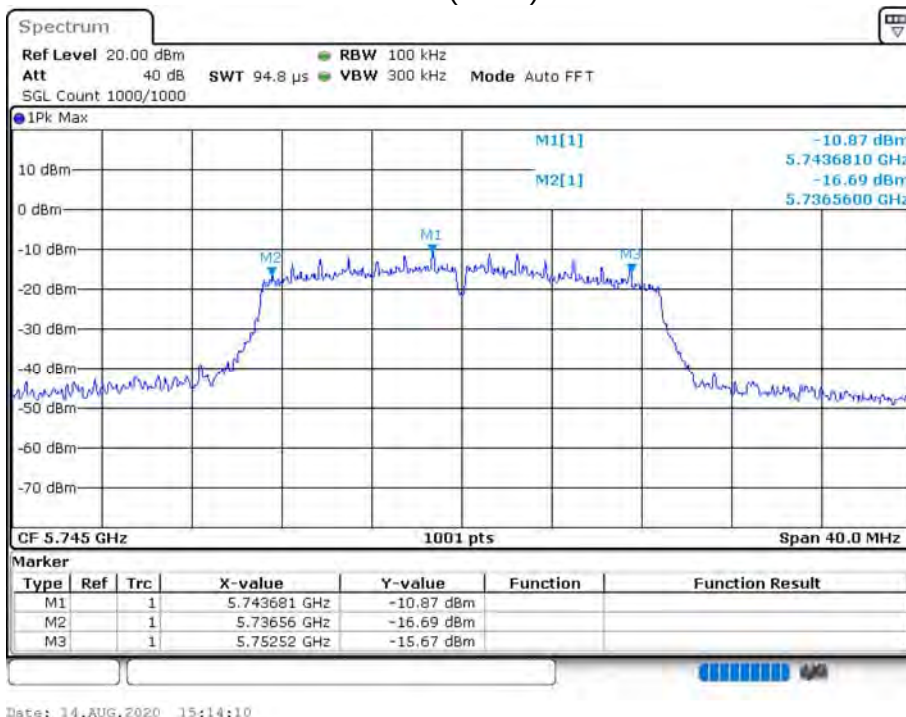


EBW NVNT 802.11n(HT20) 5785MHz Ant1

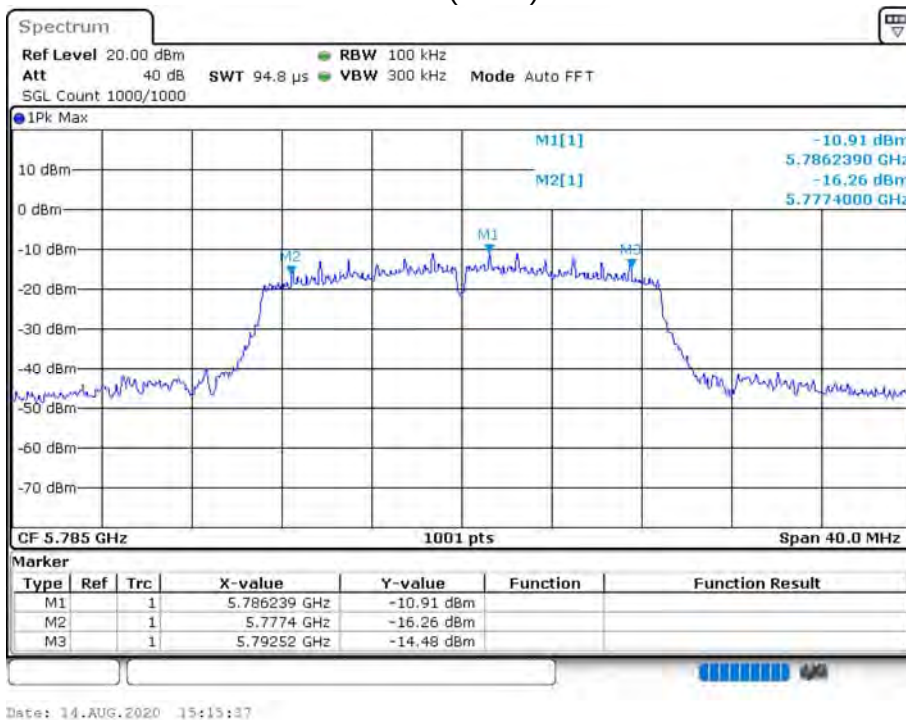


EBW NVNT 802.11n(HT20) 5825MHz Ant1

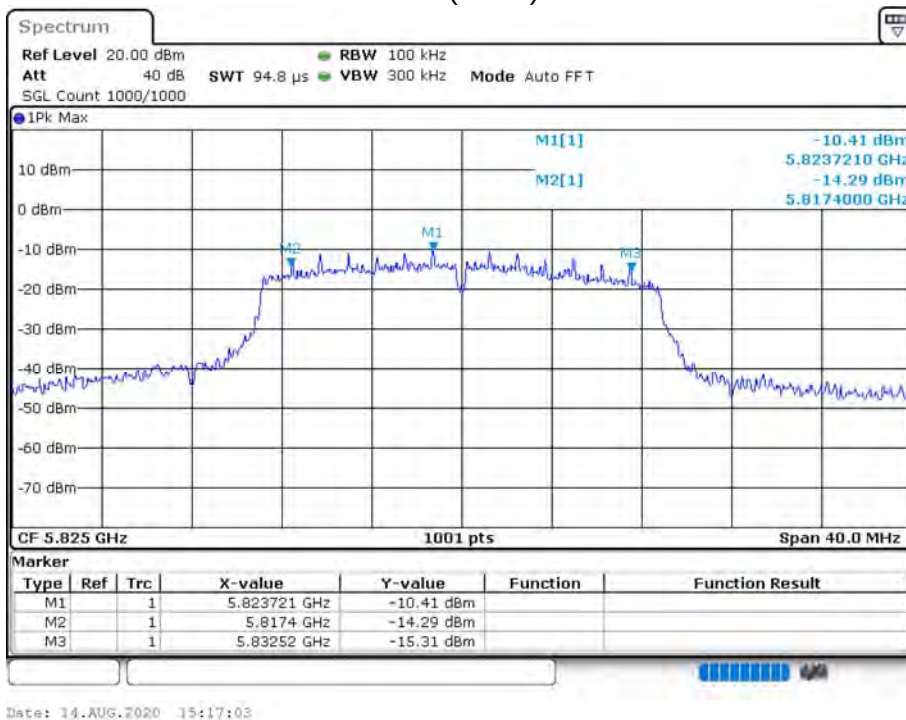

EBW NVNT 802.11n(HT40) 5755MHz Ant1

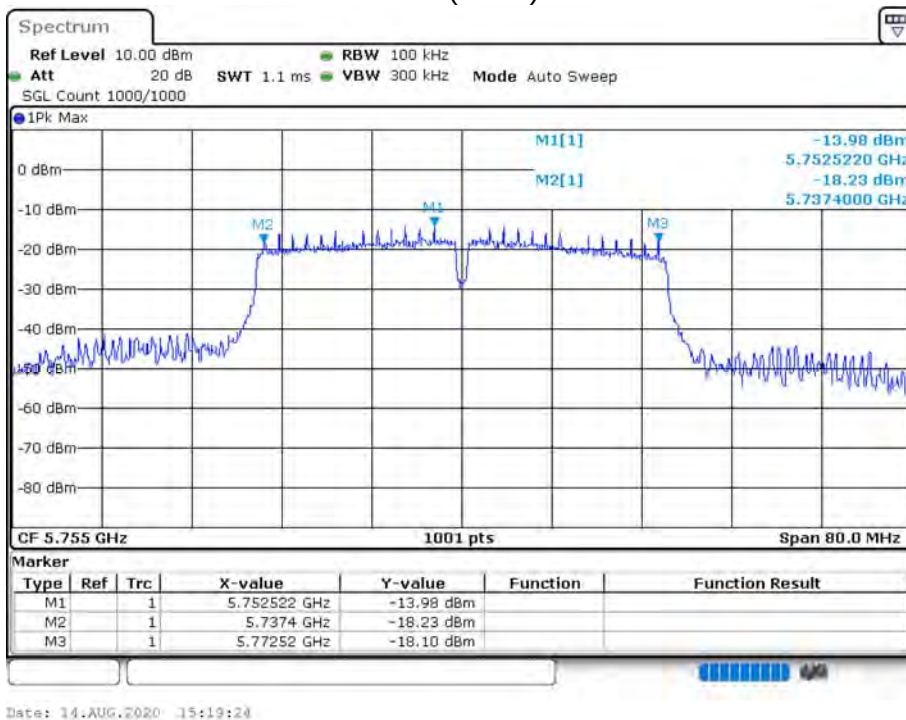

EBW NVNT 802.11n(HT40) 5795MHz Ant1

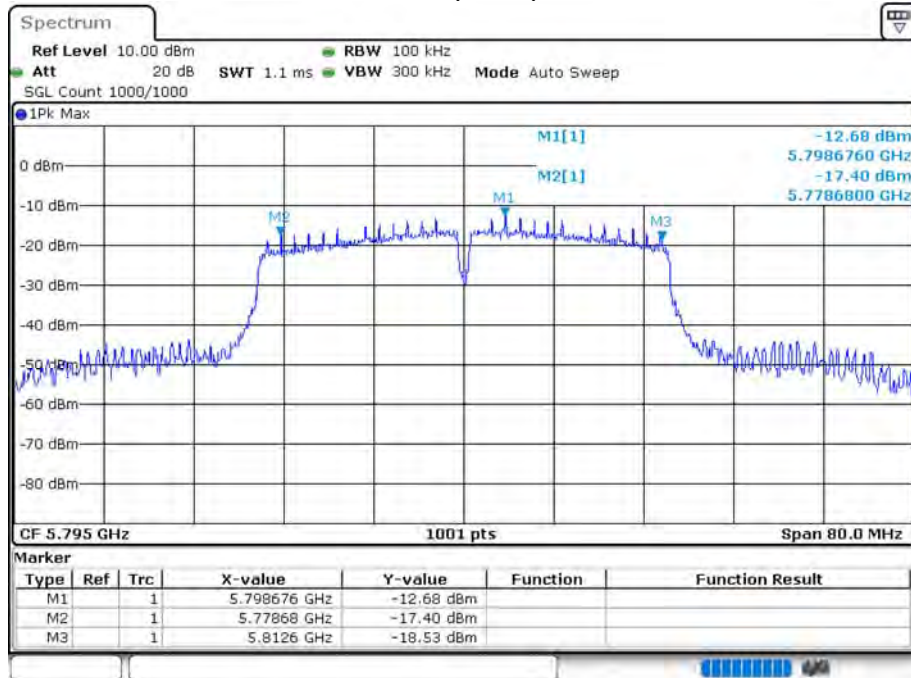


Date: 14.AUG.2020 15:21:14


OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5745	Ant 1	16.4635	20	0.5	Pass
NVNT	802.11a	5785	Ant 1	16.6633	19.2	0.5	Pass
NVNT	802.11a	5825	Ant 1	16.7033	19.8	0.5	Pass
NVNT	802.11ac20	5745	Ant 1	17.7423	20.12	0.5	Pass
NVNT	802.11ac20	5785	Ant 1	17.7023	19.88	0.5	Pass
NVNT	802.11ac20	5825	Ant 1	17.7423	24.76	0.5	Pass
NVNT	802.11ac40	5755	Ant 1	36.3636	42.56	0.5	Pass
NVNT	802.11ac40	5795	Ant 1	36.1239	40.4	0.5	Pass
NVNT	802.11ac80	5775	Ant 1	75.7642	95.68	0.5	Pass
NVNT	802.11n(HT20)	5745	Ant 1	17.8621	20.64	0.5	Pass
NVNT	802.11n(HT20)	5785	Ant 1	17.5824	20.04	0.5	Pass
NVNT	802.11n(HT20)	5825	Ant 1	17.7023	21.48	0.5	Pass
NVNT	802.11n(HT40)	5755	Ant 1	36.4436	69.6	0.5	Pass
NVNT	802.11n(HT40)	5795	Ant 1	36.044	41.92	0.5	Pass


OBW NVNT 802.11a 5745MHz Ant1

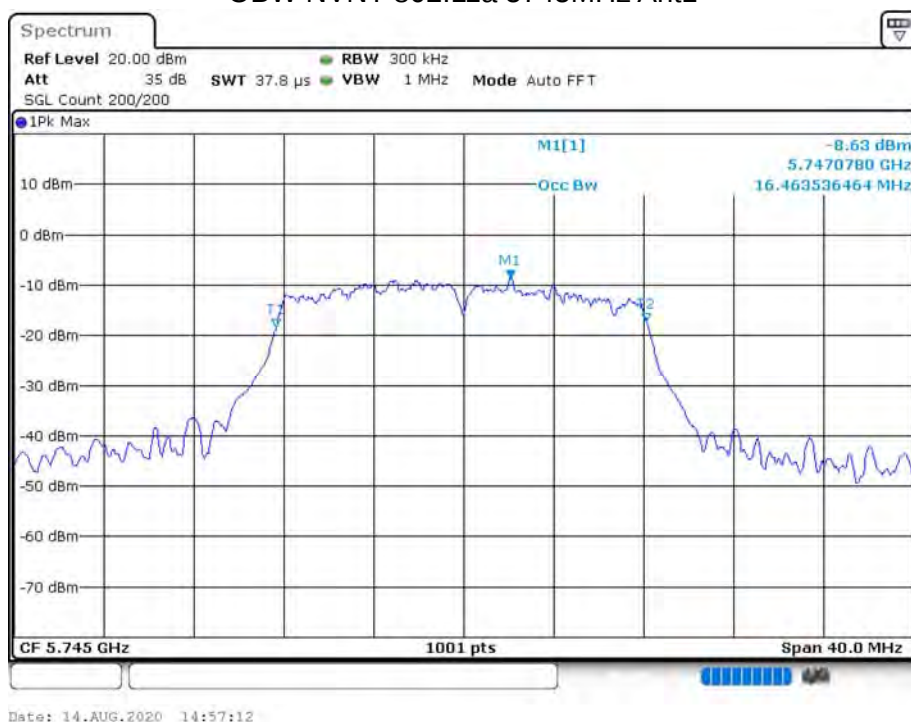


-26 dB BW NVNT 802.11a 5745MHz Ant1

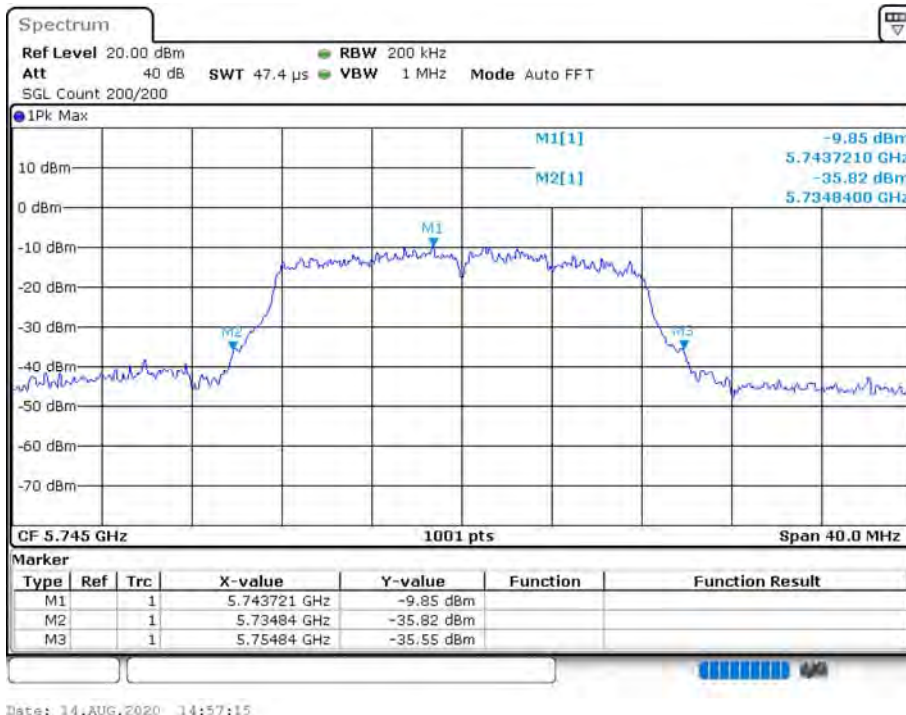


OBW NVNT 802.11a 5785MHz Ant1

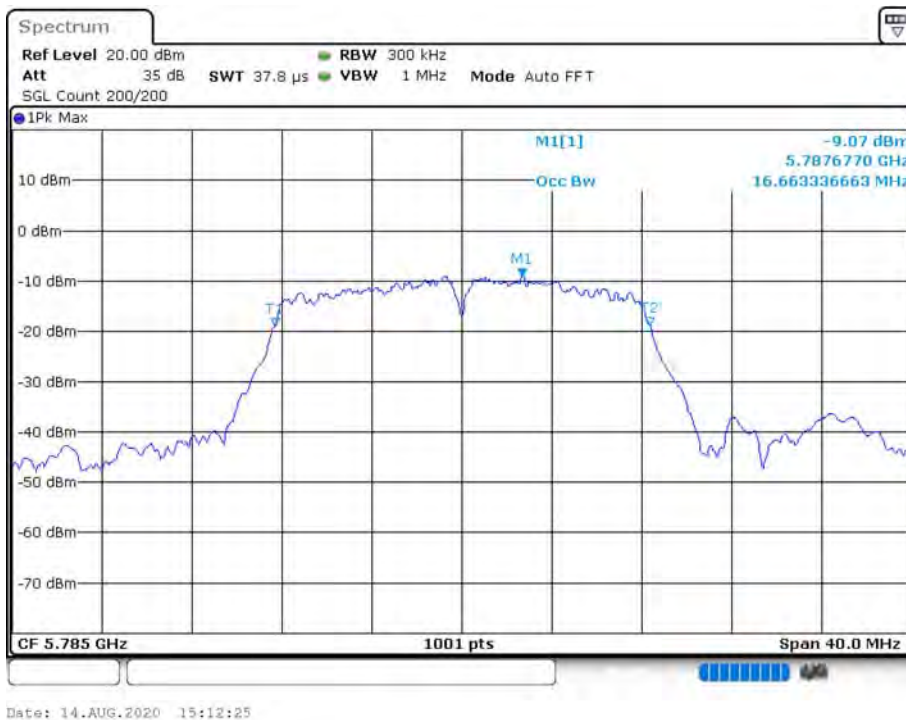


-26 dB BW NVNT 802.11a 5785MHz Ant1

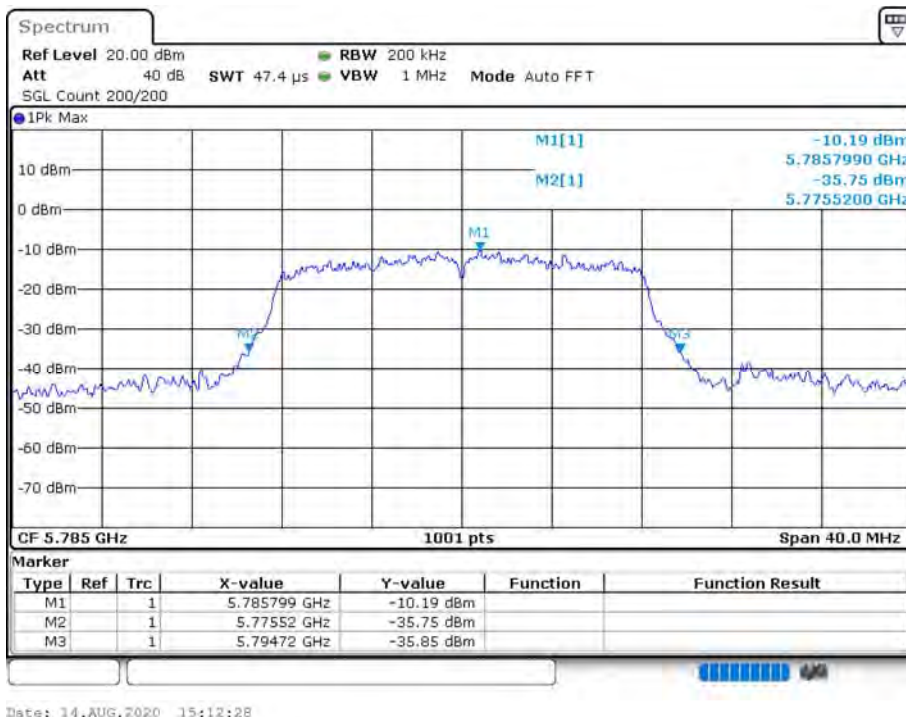


OBW NVNT 802.11a 5825MHz Ant1

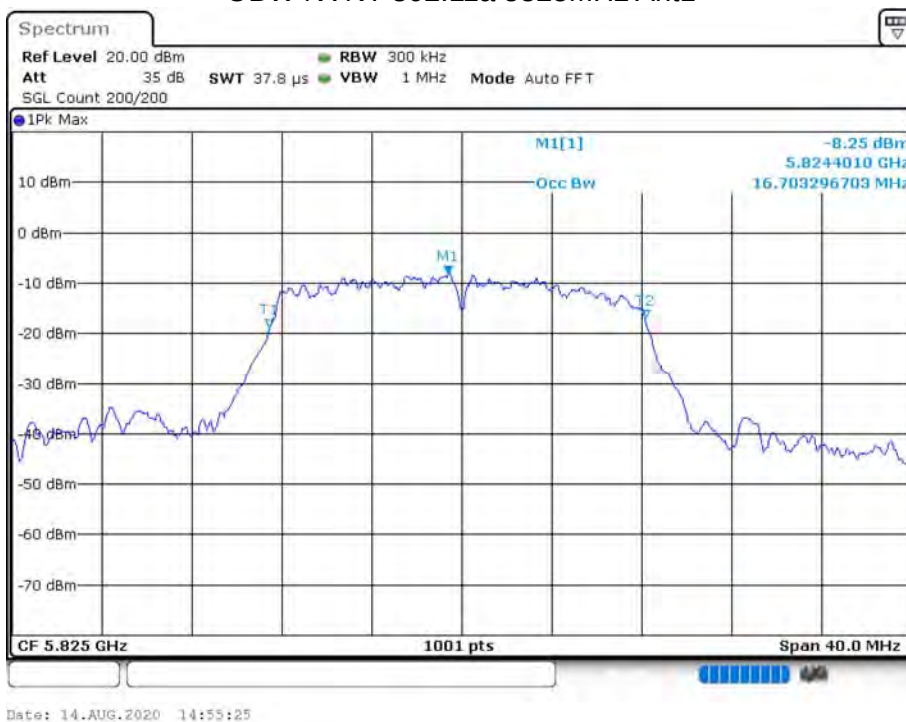


-26 dB BW NVNT 802.11a 5825MHz Ant1

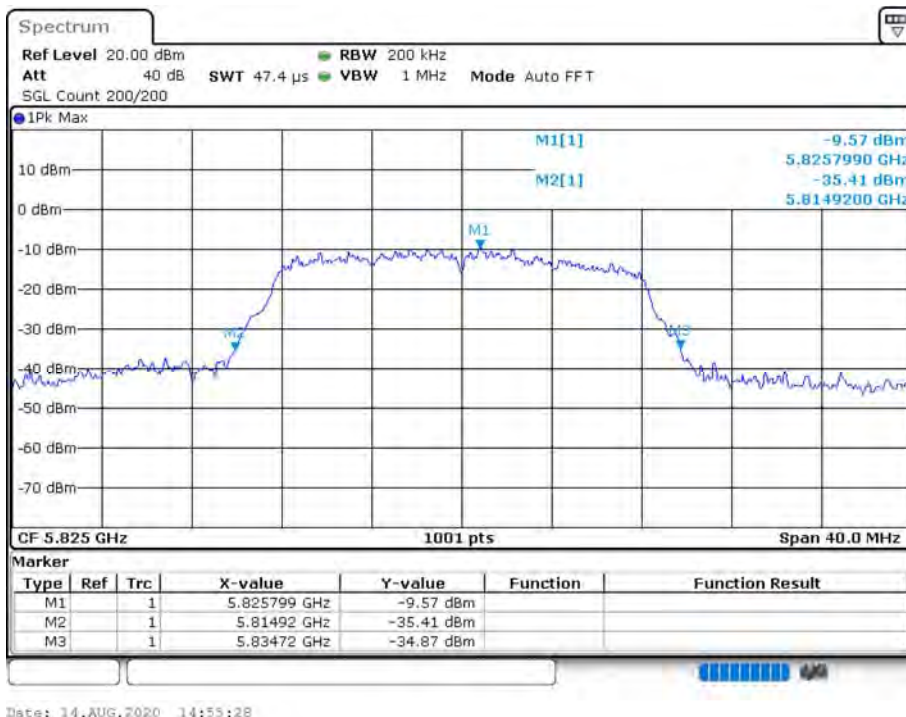


OBW NVNT 802.11ac20 5745MHz Ant1

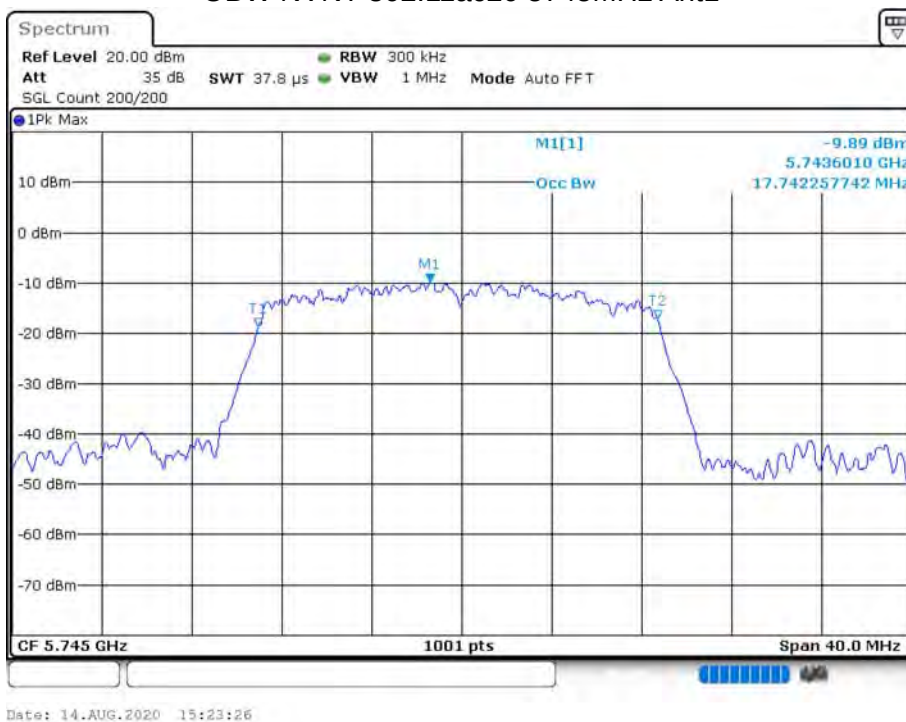


-26 dB BW NVNT 802.11ac20 5745MHz Ant1

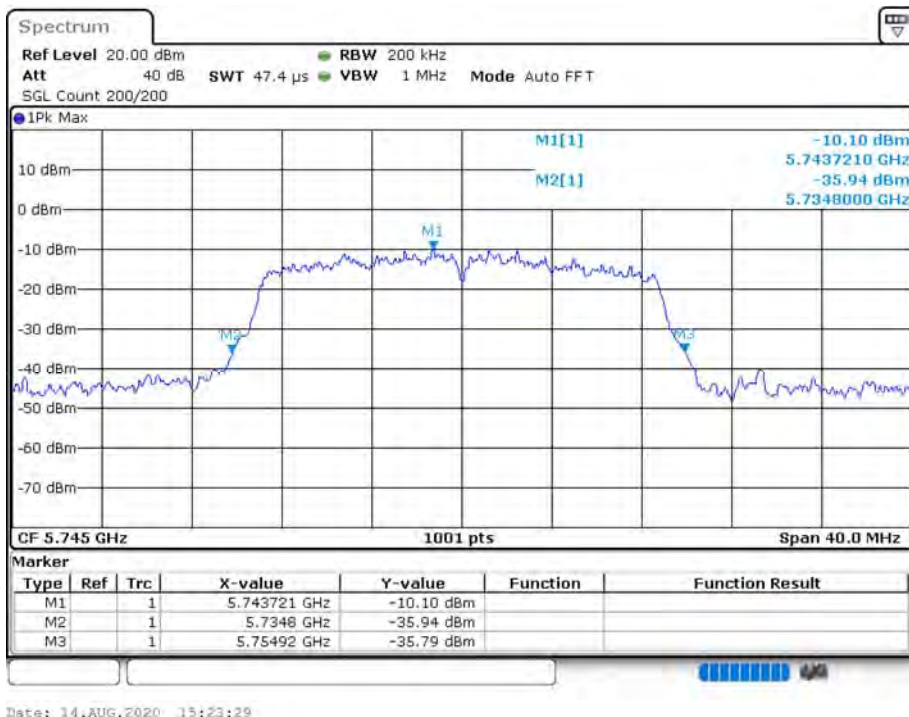

OBW NVNT 802.11ac20 5785MHz Ant1

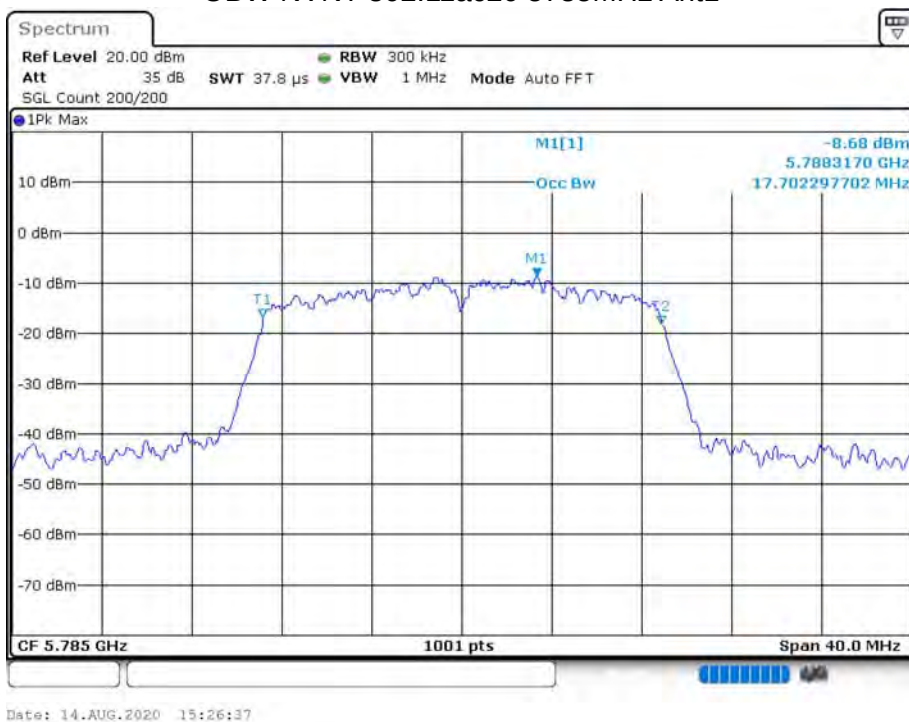

-26 dB BW NVNT 802.11ac20 5785MHz Ant1

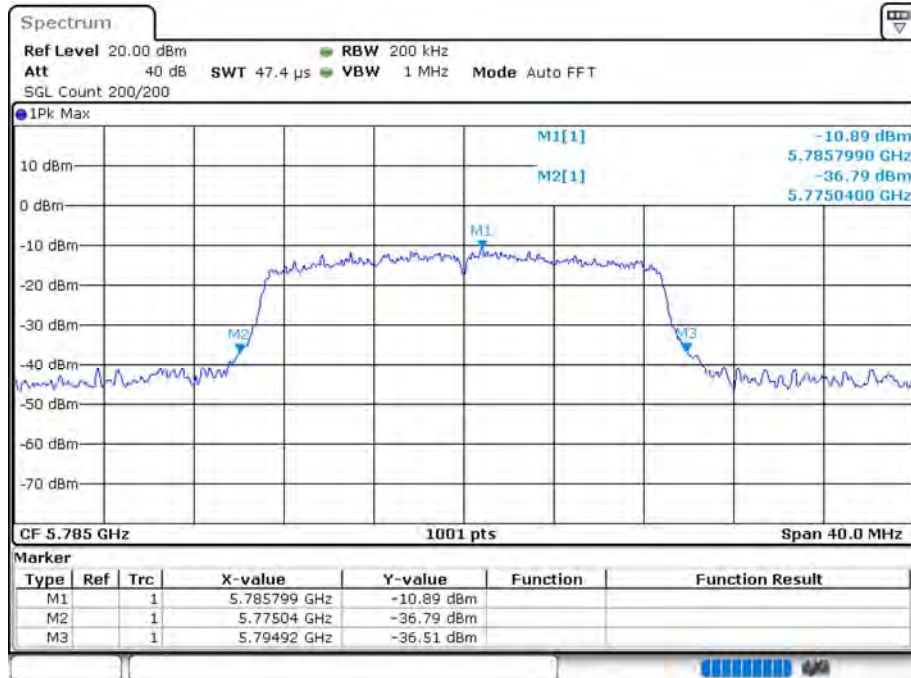


Date: 14.AUG.2020 15:26:40

OBW NVNT 802.11ac20 5825MHz Ant1




Date: 14.AUG.2020 15:28:32


-26 dB BW NVNT 802.11ac20 5825MHz Ant1

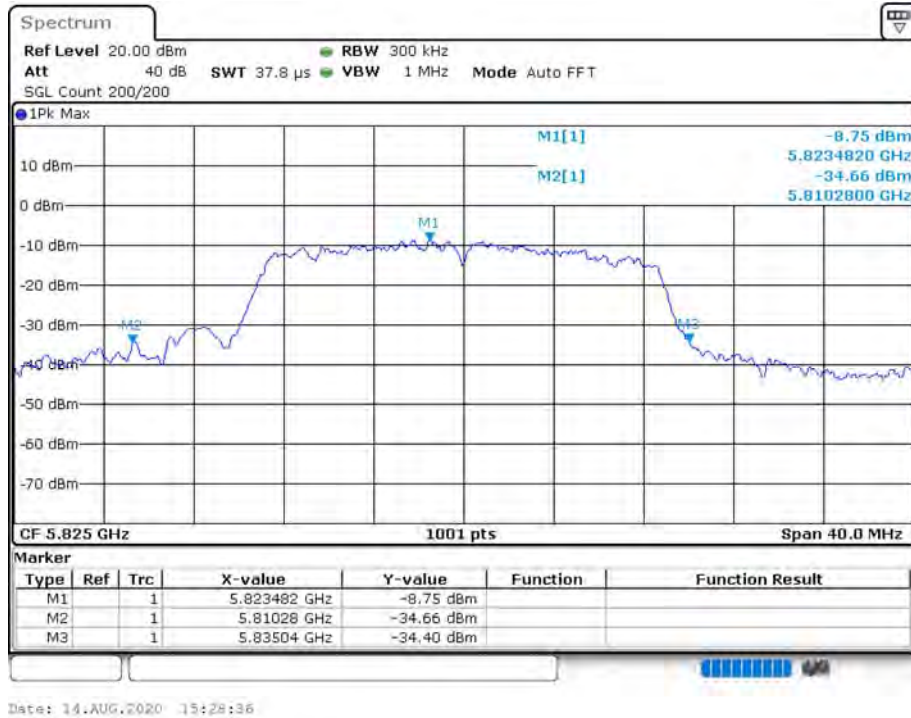


OBW NVNT 802.11ac40 5755MHz Ant1

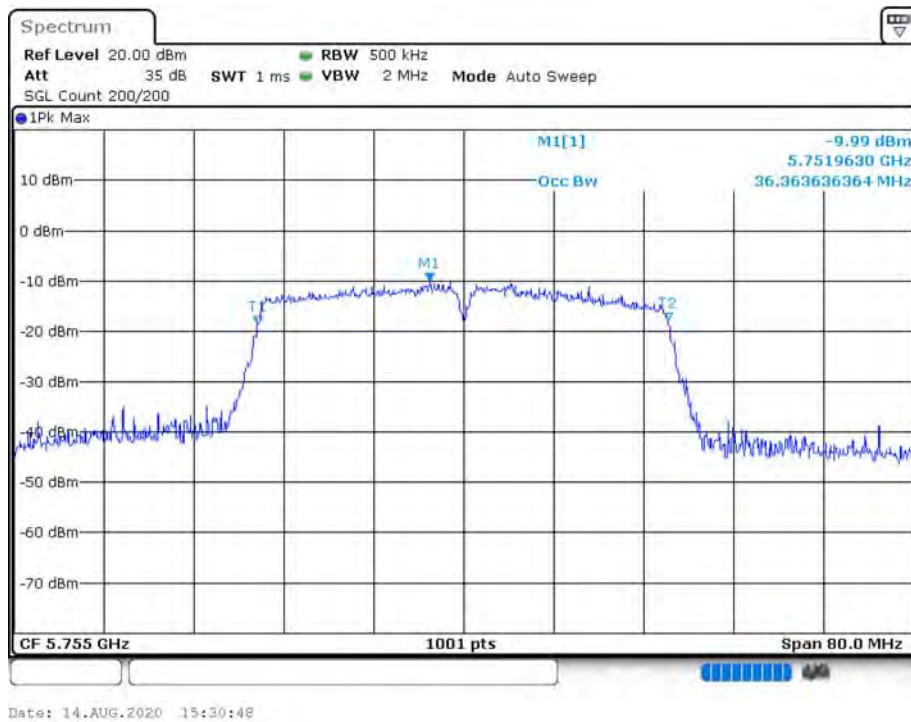


-26 dB BW NVNT 802.11ac40 5755MHz Ant1

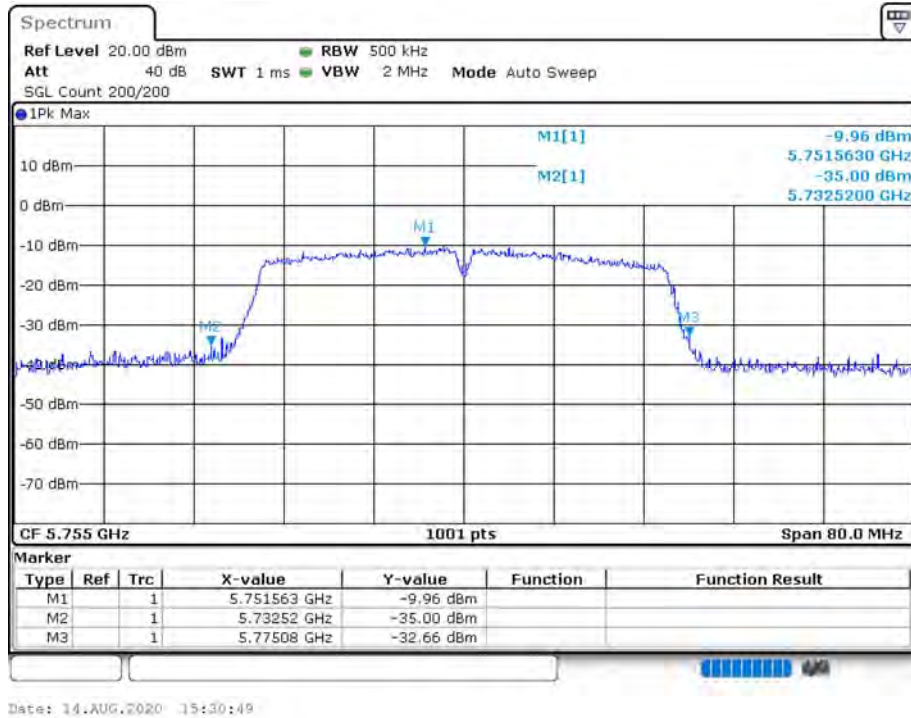

OBW NVNT 802.11ac40 5795MHz Ant1

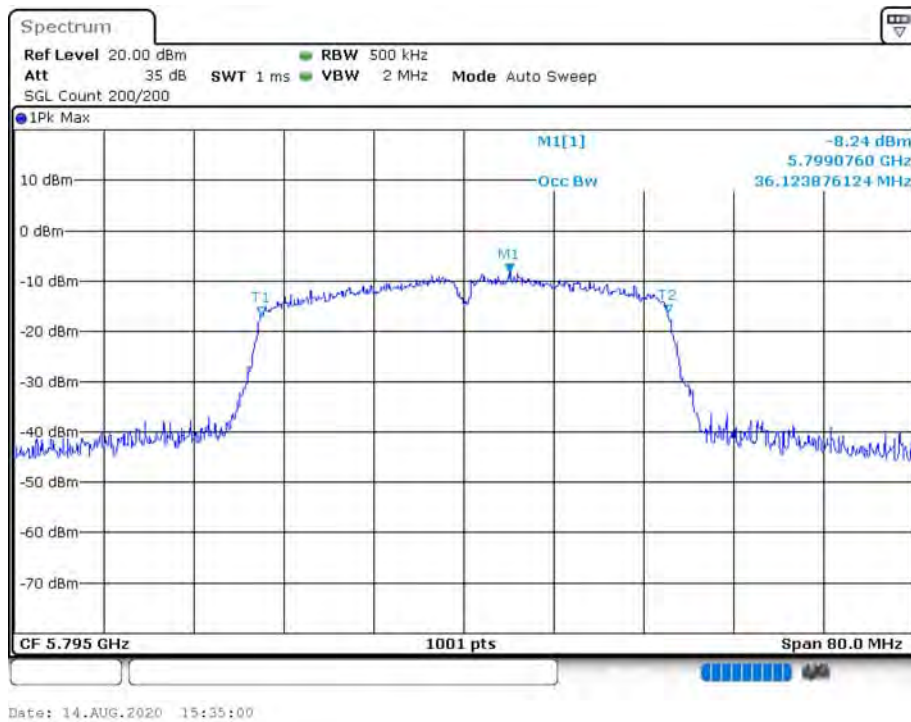


-26 dB BW NVNT 802.11ac40 5795MHz Ant1

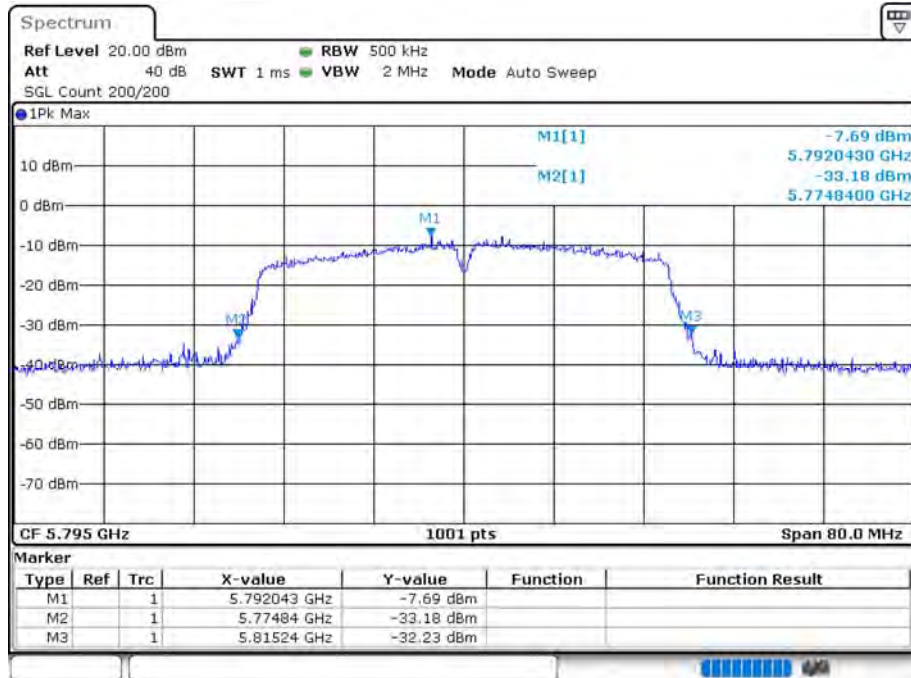


Date: 14.AUG.2020 15:35:02

OBW NVNT 802.11ac80 5775MHz Ant1

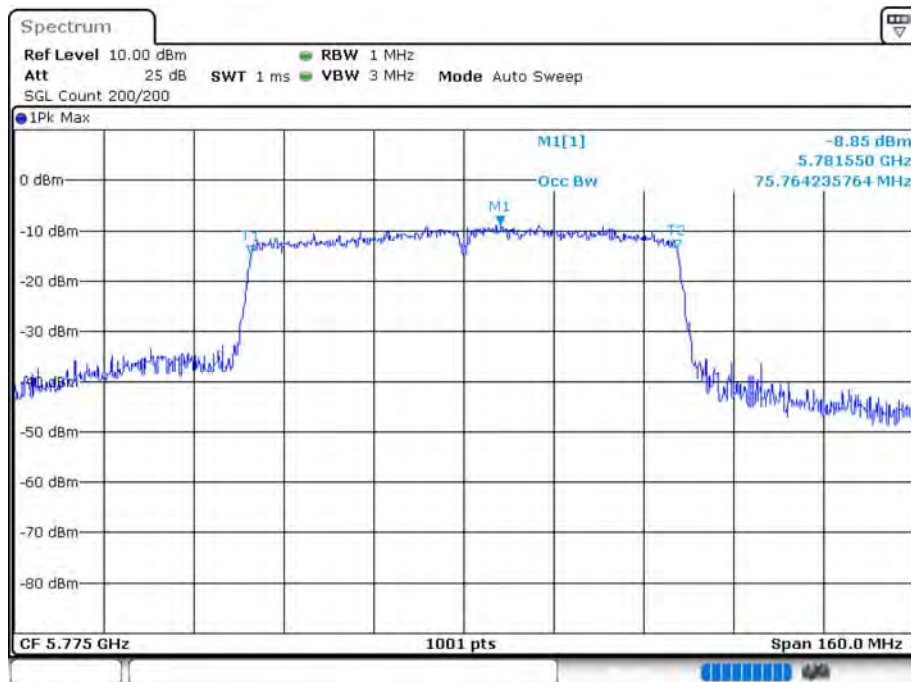


Date: 14.AUG.2020 15:37:01


-26 dB BW NVNT 802.11ac80 5775MHz Ant1

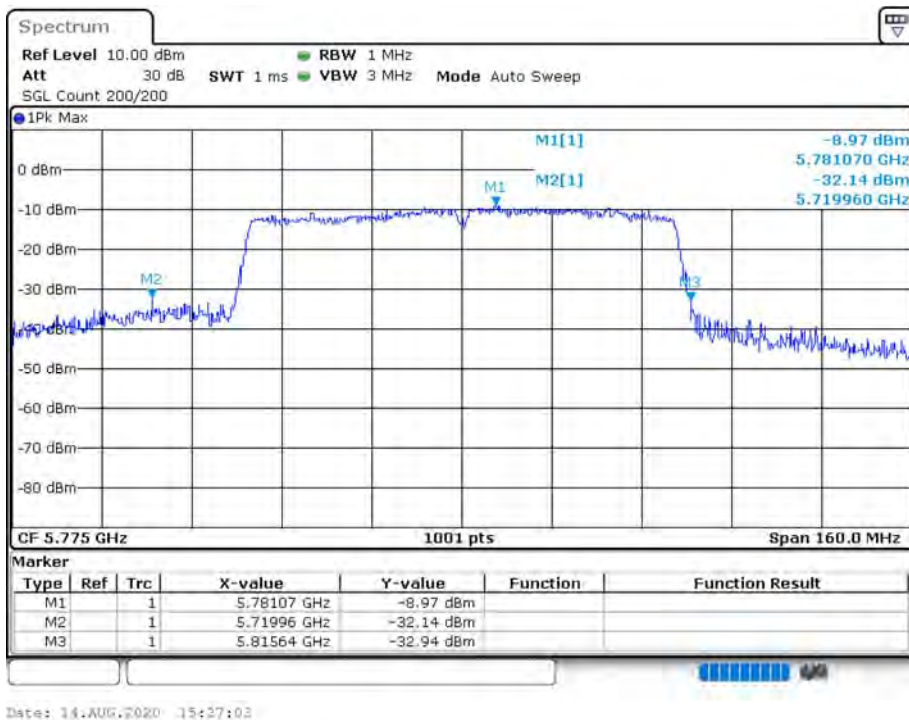


OBW NVNT 802.11n(HT20) 5745MHz Ant1

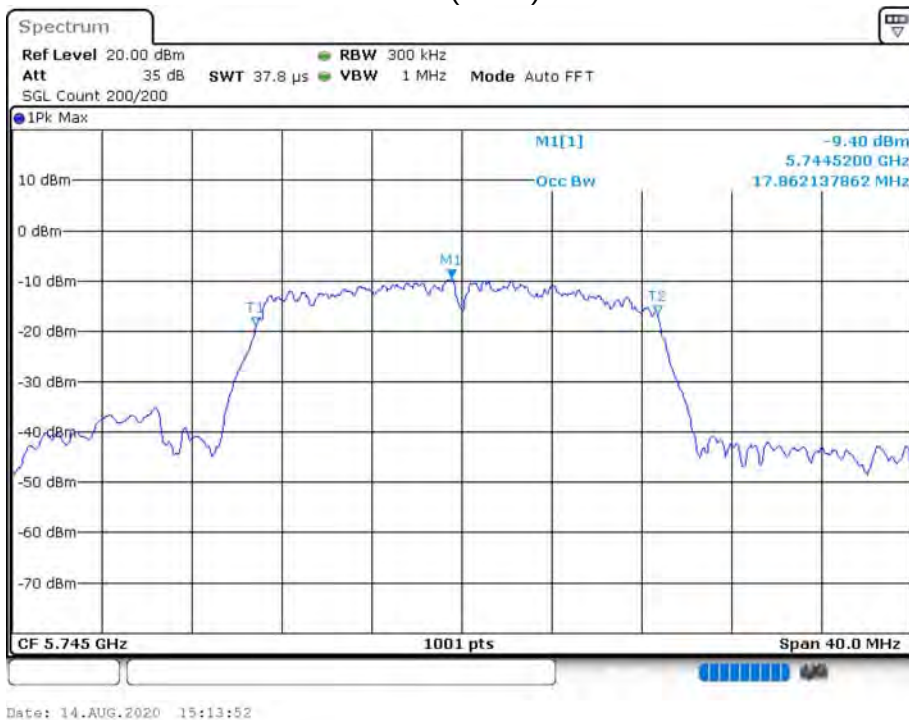


-26 dB BW NVNT 802.11n(HT20) 5745MHz Ant1

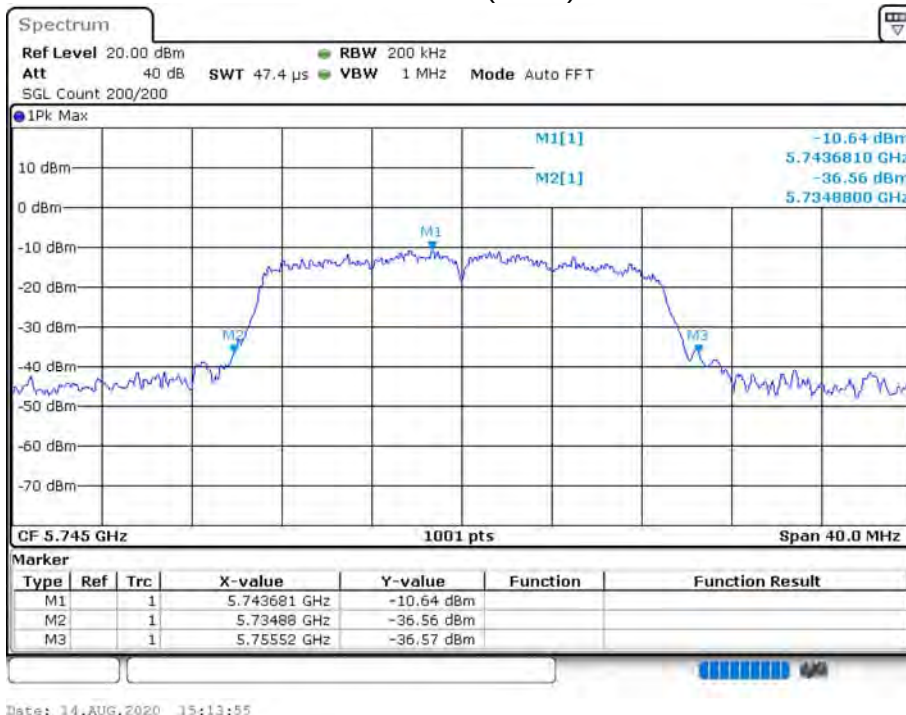


OBW NVNT 802.11n(HT20) 5785MHz Ant1

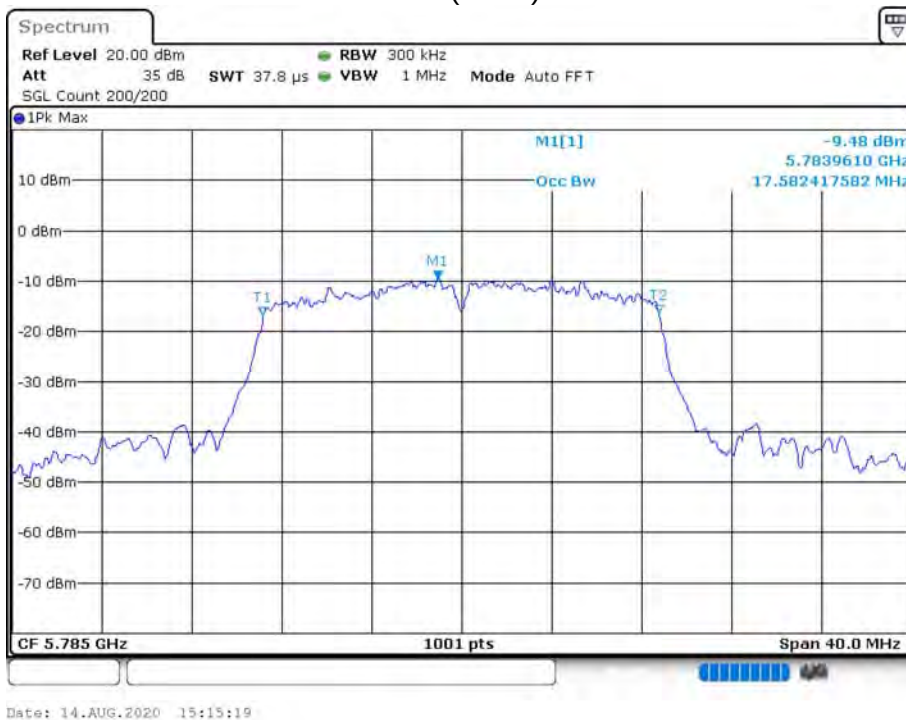


-26 dB BW NVNT 802.11n(HT20) 5785MHz Ant1

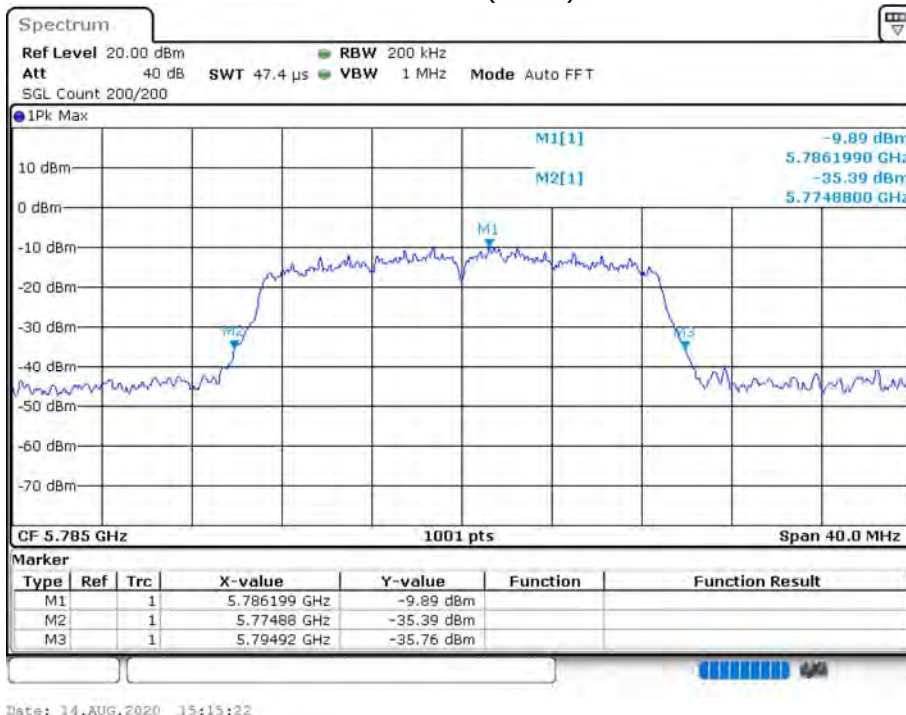


OBW NVNT 802.11n(HT20) 5825MHz Ant1

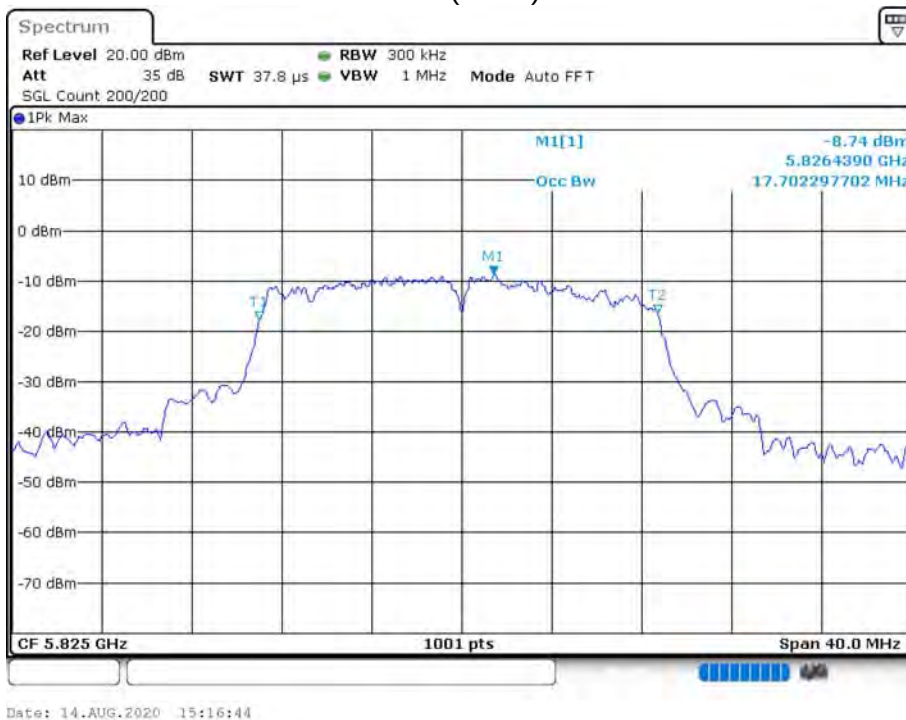


-26 dB BW NVNT 802.11n(HT20) 5825MHz Ant1

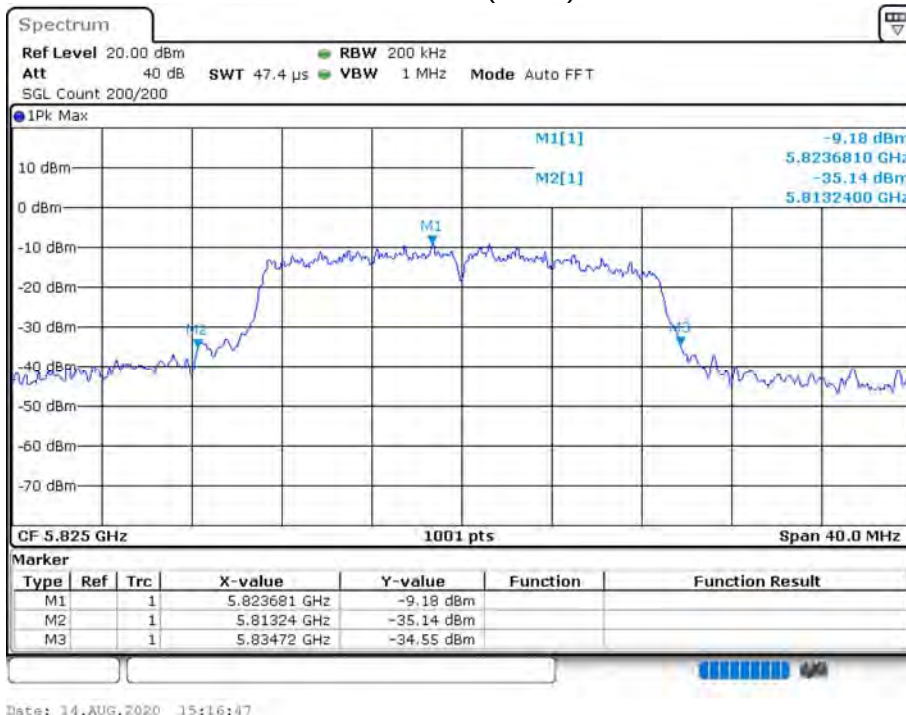


OBW NVNT 802.11n(HT40) 5755MHz Ant1

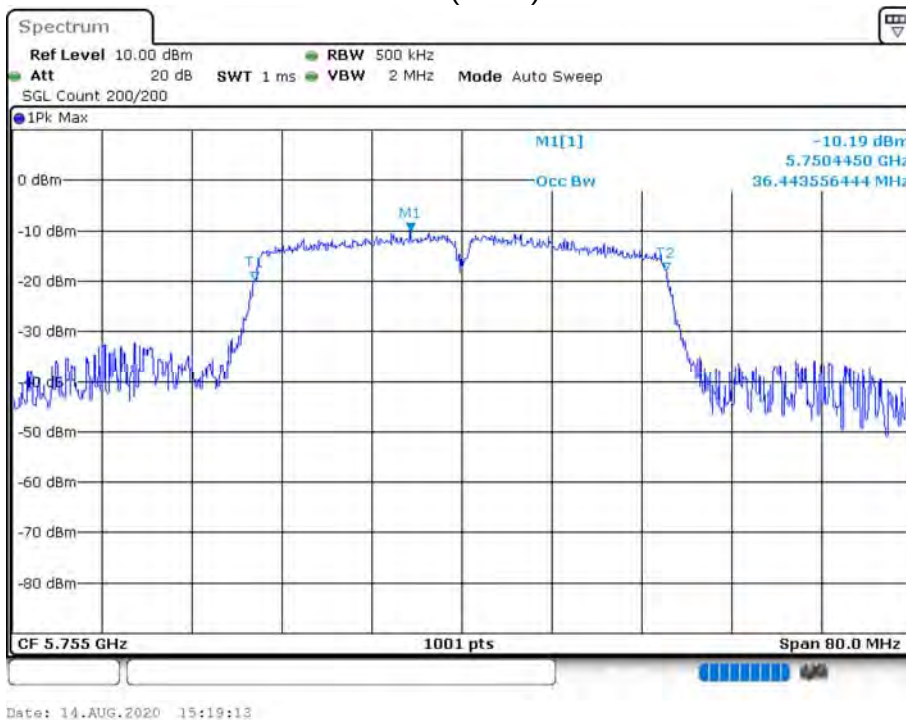


-26 dB BW NVNT 802.11n(HT40) 5755MHz Ant1

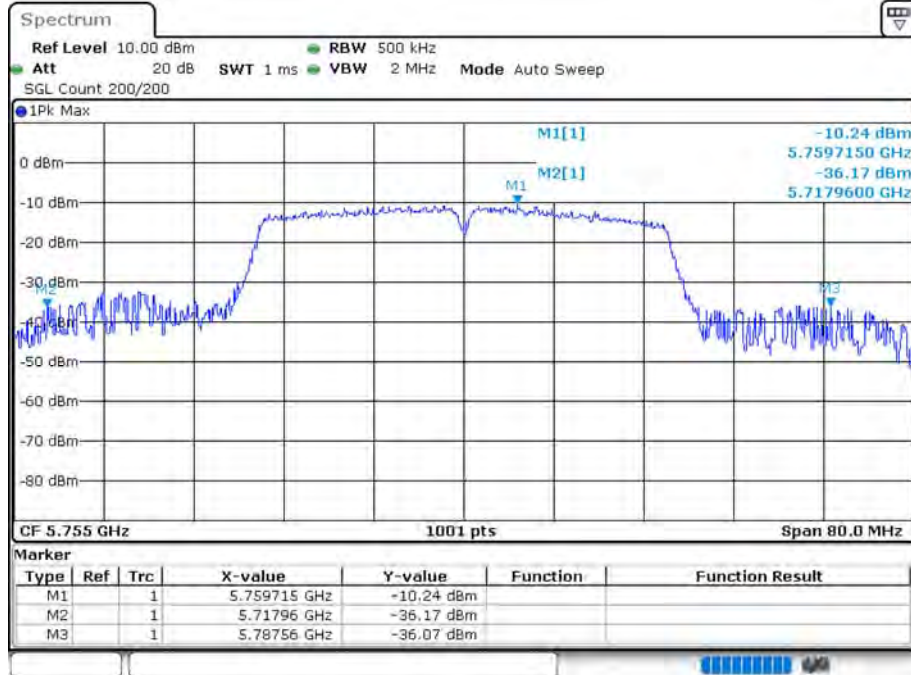

OBW NVNT 802.11n(HT40) 5795MHz Ant1

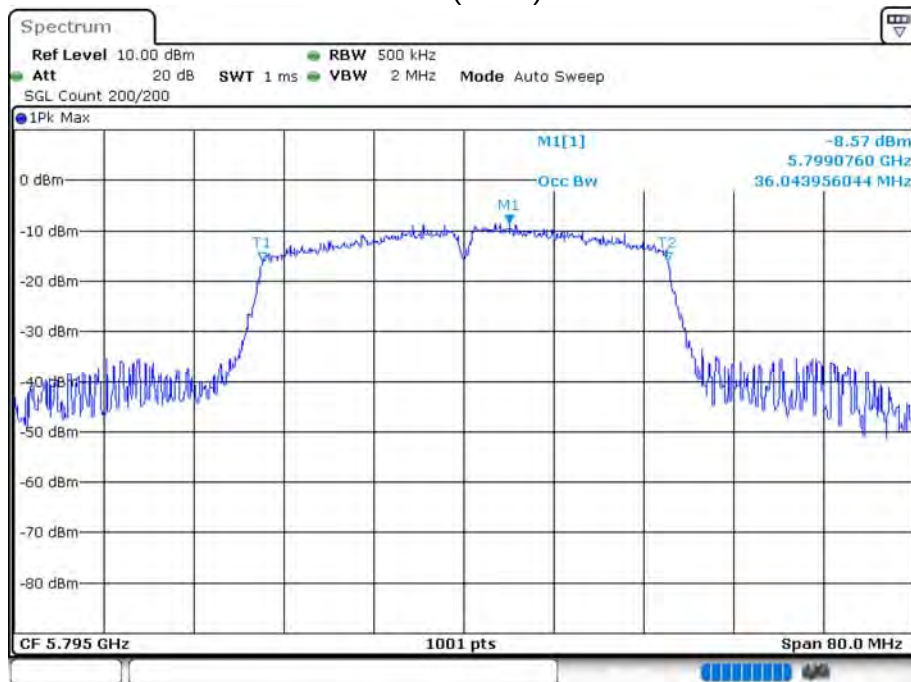

-26 dB BW NVNT 802.11n(HT40) 5795MHz Ant1

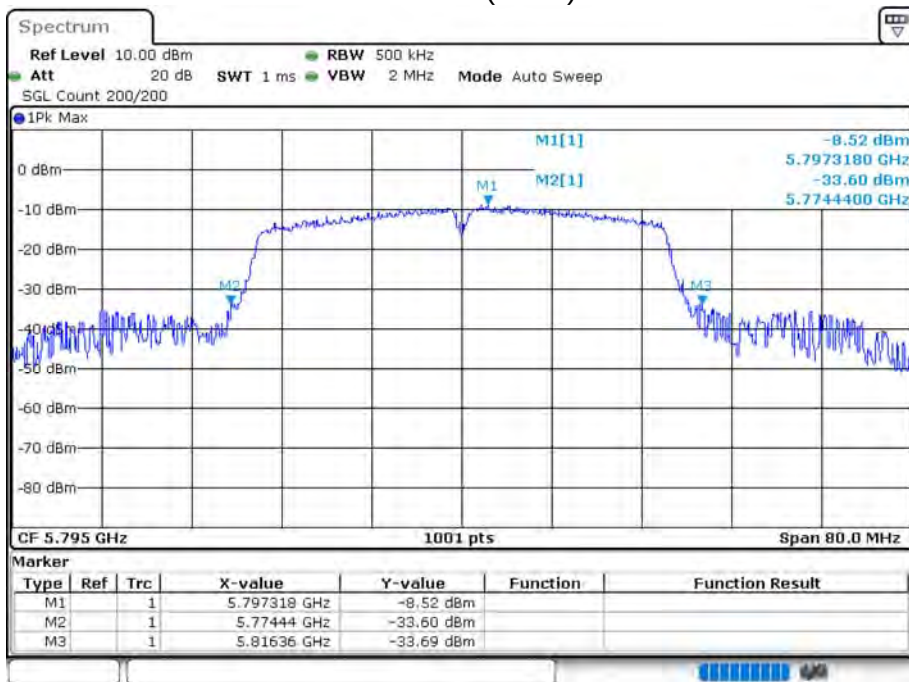


Date: 14-AUG-2020 15:21:04

MAXIMUM POWER SPECTRAL DENSITY LEVEL


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5745	Ant 1	2.673	30	Pass
NVNT	802.11a	5785	Ant 1	2.378	30	Pass
NVNT	802.11a	5825	Ant 1	3.884	30	Pass
NVNT	802.11ac20	5745	Ant 1	1.99	30	Pass
NVNT	802.11ac20	5785	Ant 1	2.676	30	Pass
NVNT	802.11ac20	5825	Ant 1	2.554	30	Pass
NVNT	802.11ac40	5755	Ant 1	-1.004	30	Pass
NVNT	802.11ac40	5795	Ant 1	0.063	30	Pass
NVNT	802.11ac80	5775	Ant 1	-4.571	30	Pass
NVNT	802.11n(HT20)	5745	Ant 1	2.751	30	Pass
NVNT	802.11n(HT20)	5785	Ant 1	2.333	30	Pass
NVNT	802.11n(HT20)	5825	Ant 1	3.144	30	Pass
NVNT	802.11n(HT40)	5755	Ant 1	-1.103	30	Pass
NVNT	802.11n(HT40)	5795	Ant 1	0.051	30	Pass

PSD NVNT 802.11a 5745MHz Ant1

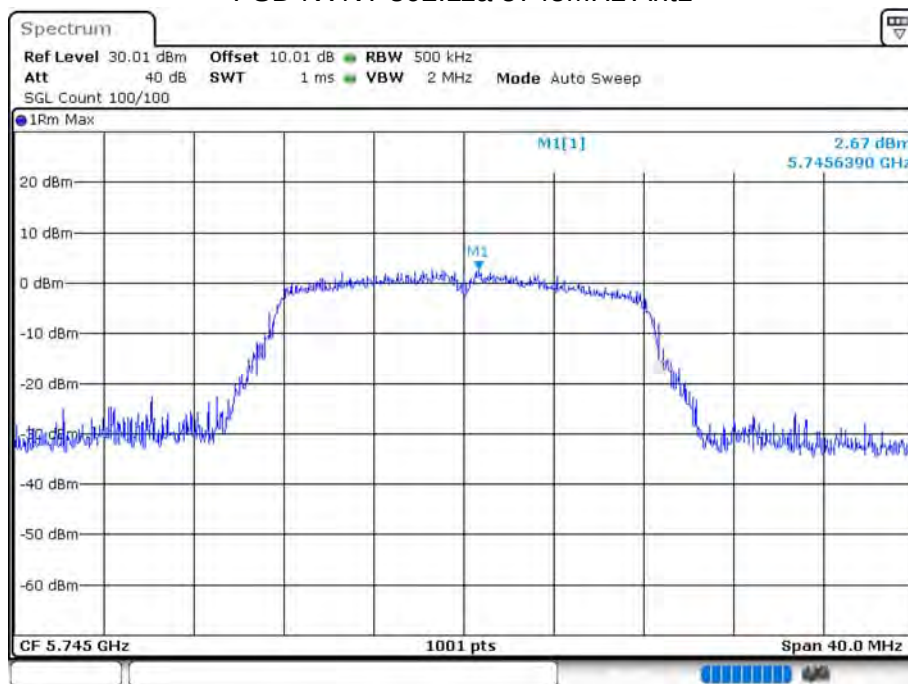


Date: 14.AUG.2020 14:57:32


PSD NVNT 802.11a 5785MHz Ant1

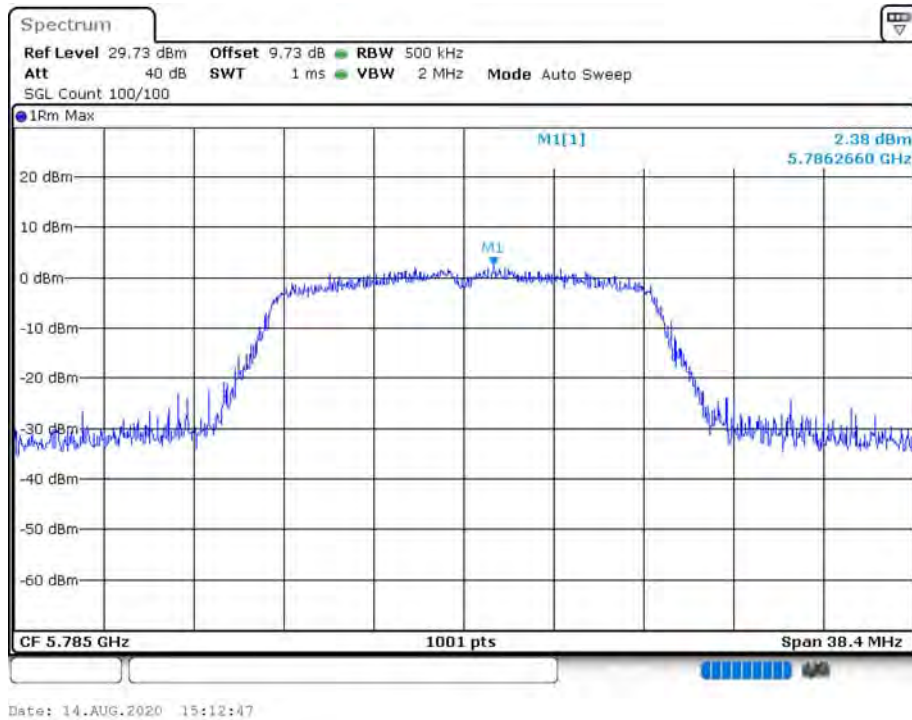


PSD NVNT 802.11a 5825MHz Ant1

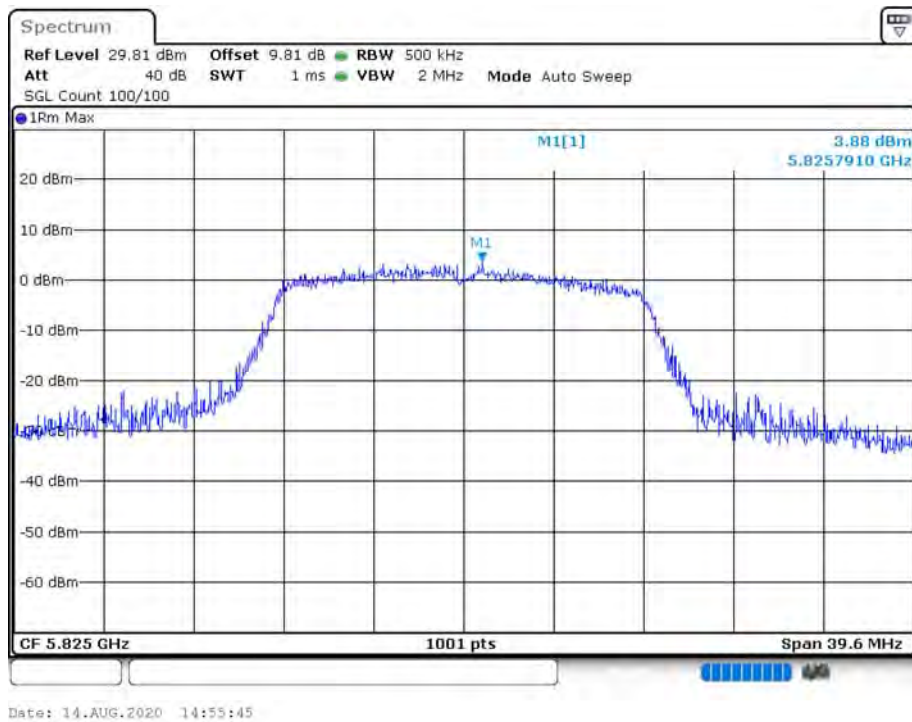


PSD NVNT 802.11ac20 5745MHz Ant1

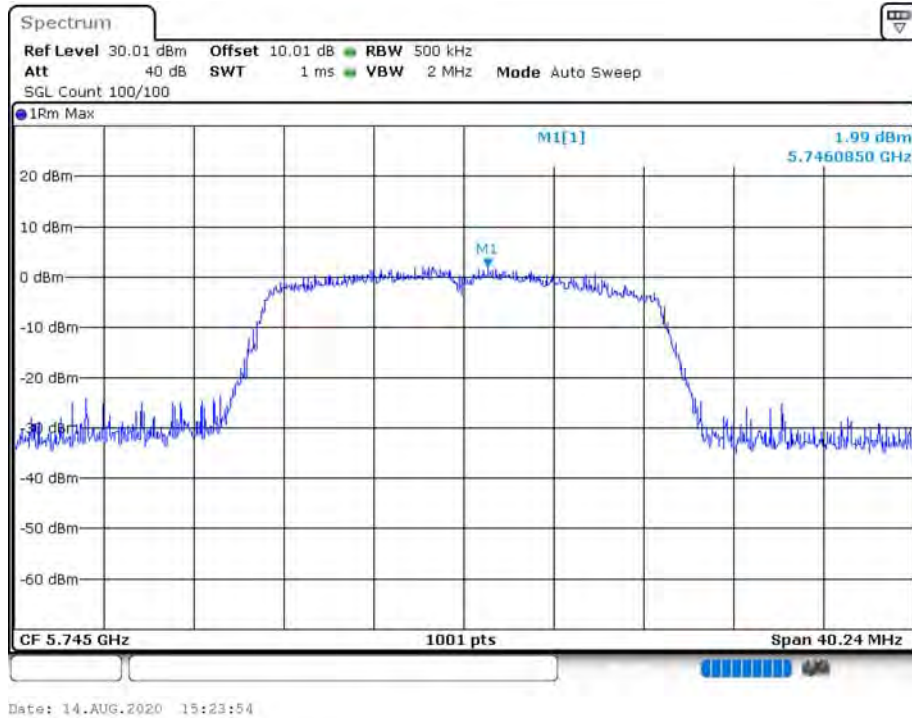


PSD NVNT 802.11ac20 5785MHz Ant1

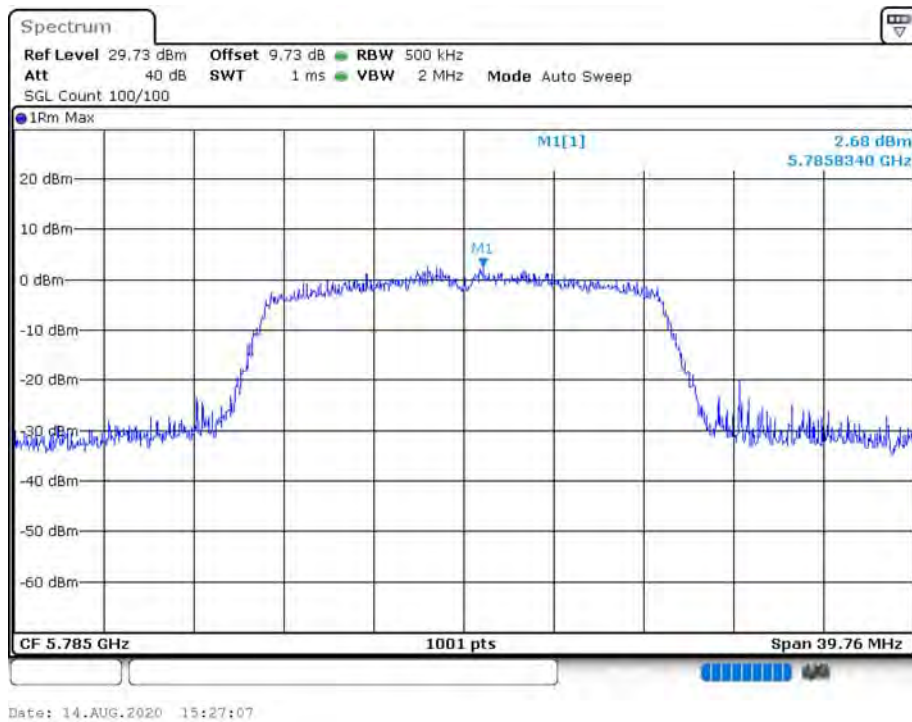


PSD NVNT 802.11ac20 5825MHz Ant1

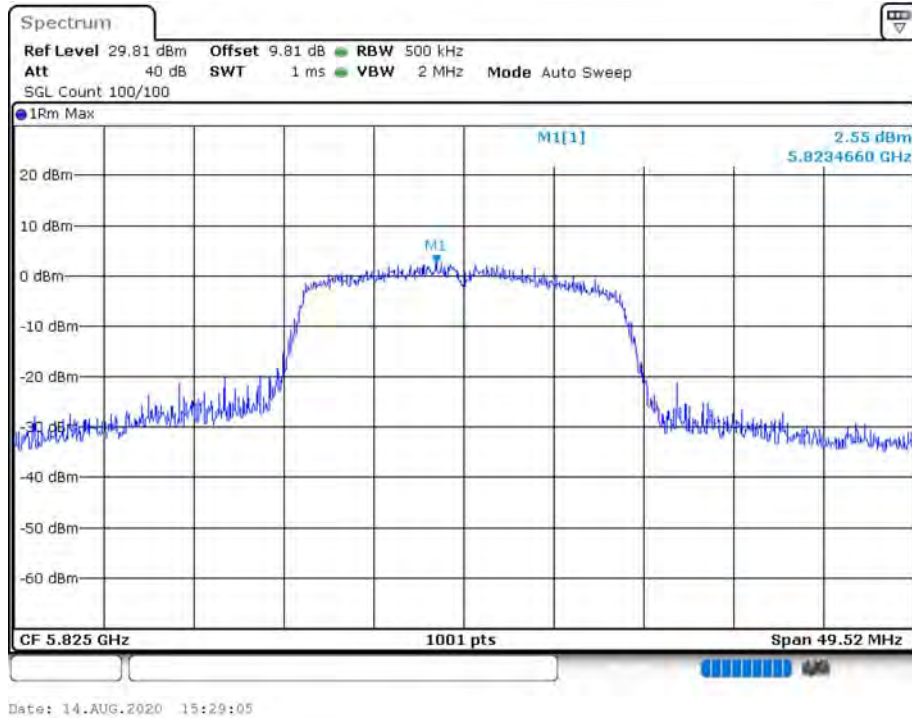


PSD NVNT 802.11ac40 5755MHz Ant1

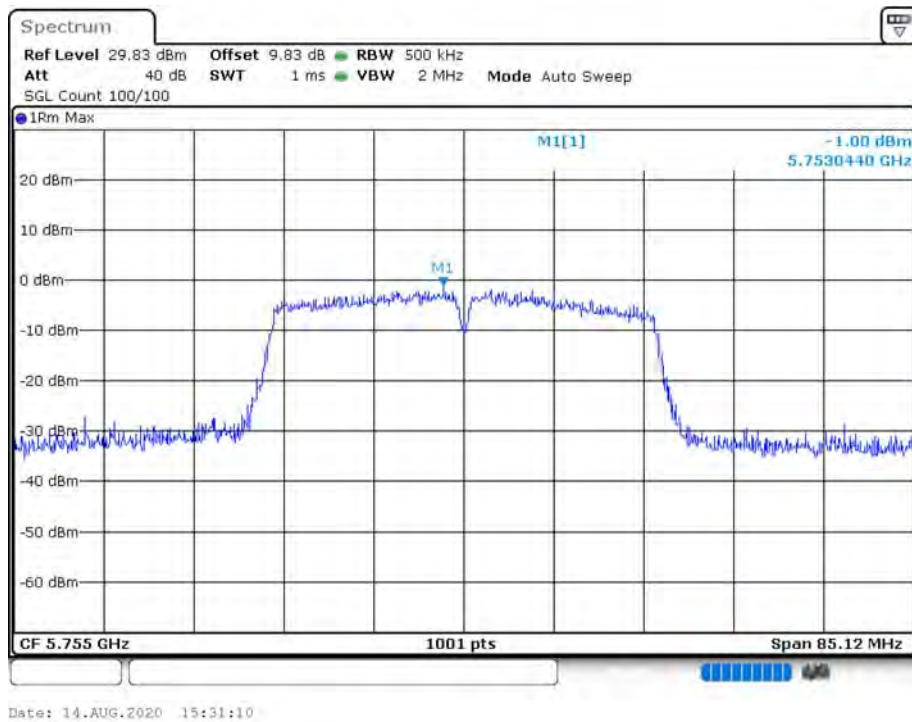


PSD NVNT 802.11ac40 5795MHz Ant1

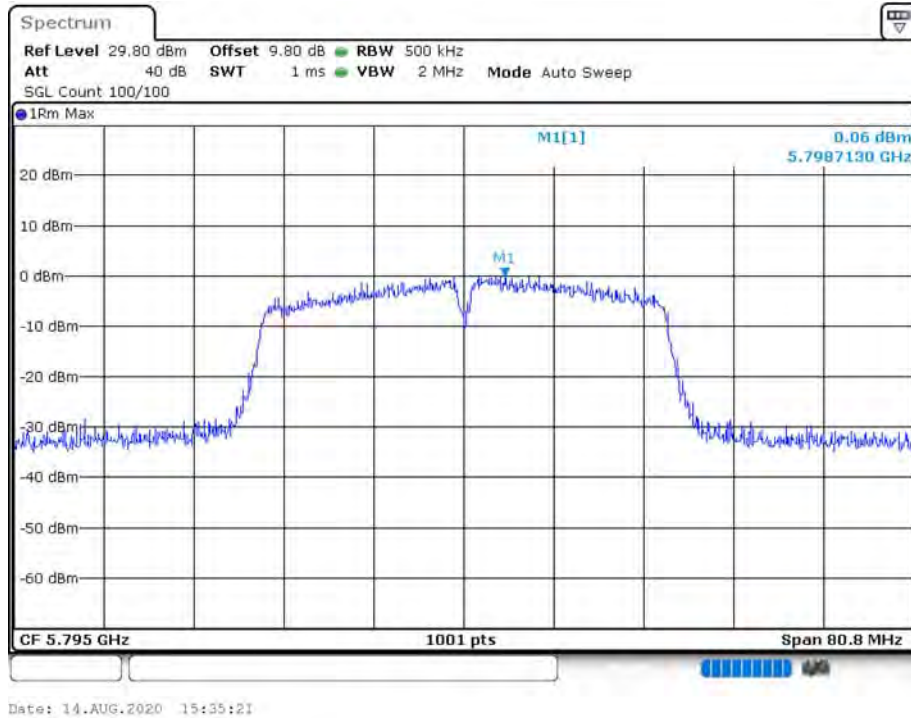


PSD NVNT 802.11ac80 5775MHz Ant1

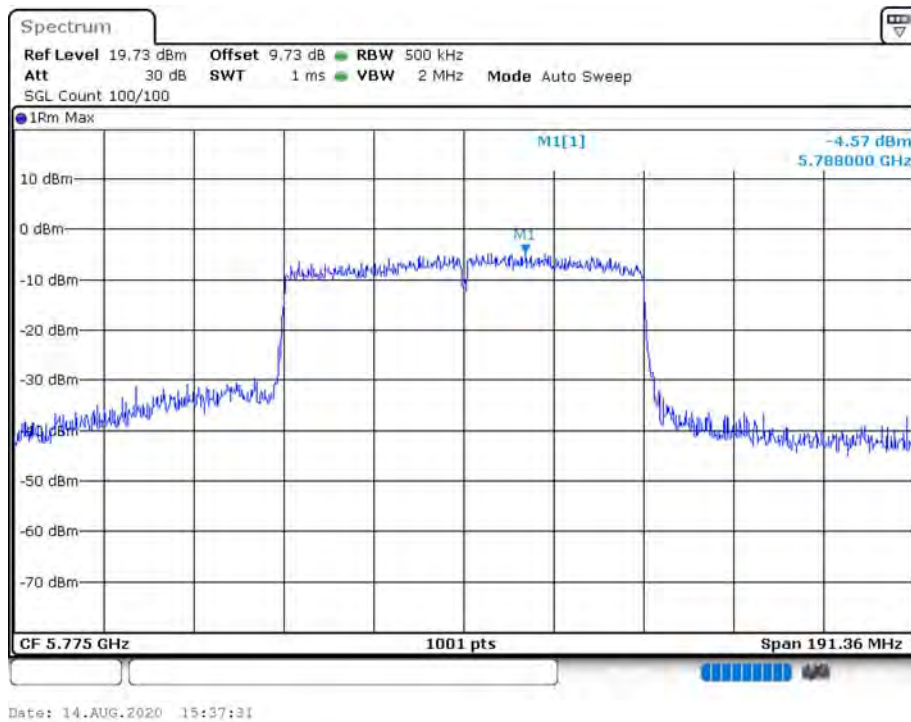


PSD NVNT 802.11n(HT20) 5745MHz Ant1

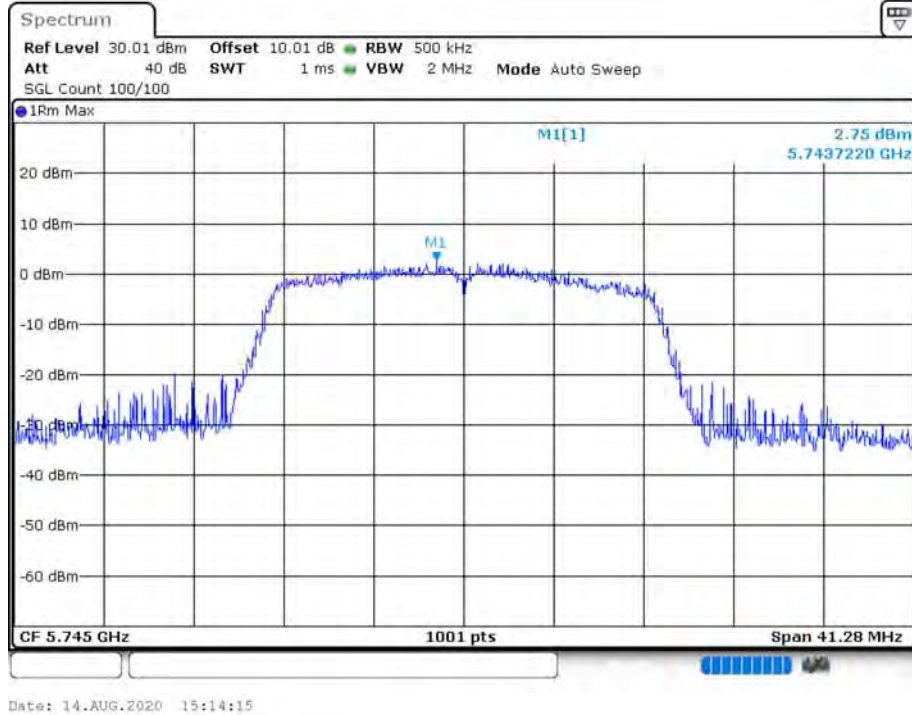

PSD NVNT 802.11n(HT20) 5785MHz Ant1

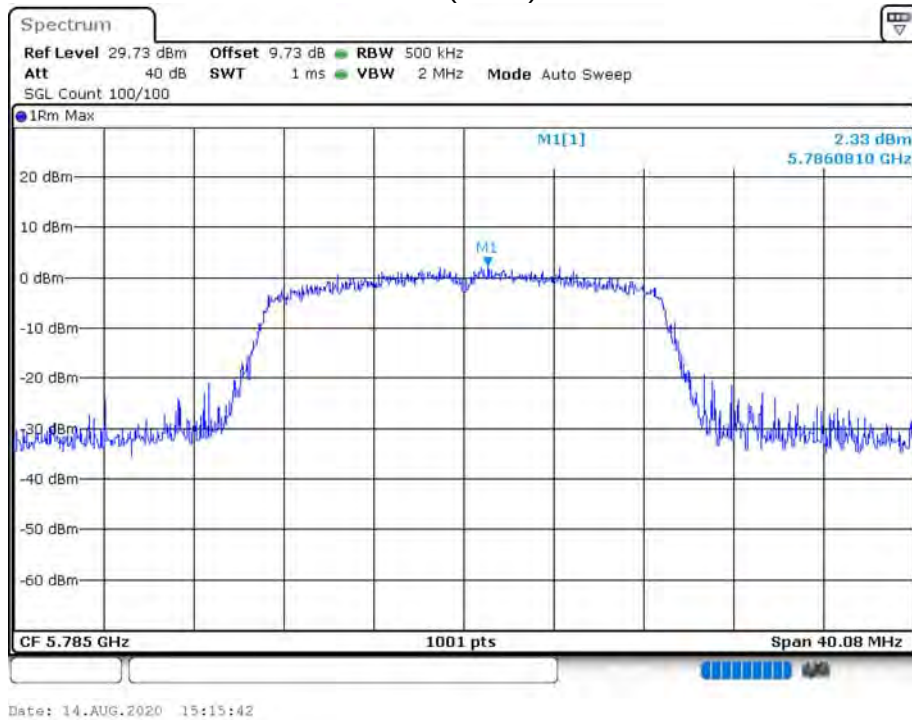


PSD NVNT 802.11n(HT20) 5825MHz Ant1

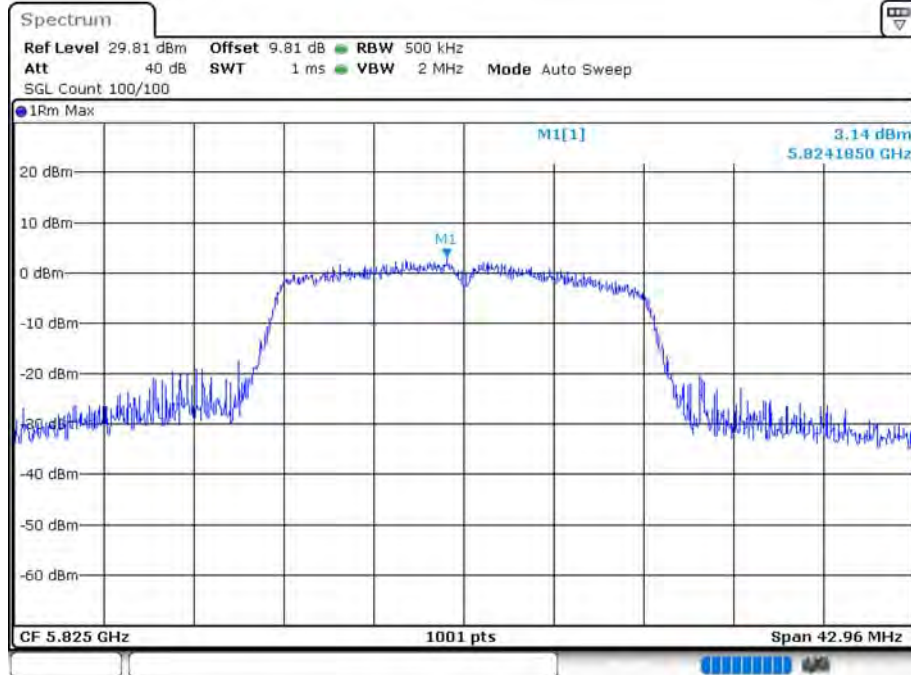


Date: 14.AUG.2020 15:17:09

PSD NVNT 802.11n(HT40) 5755MHz Ant1

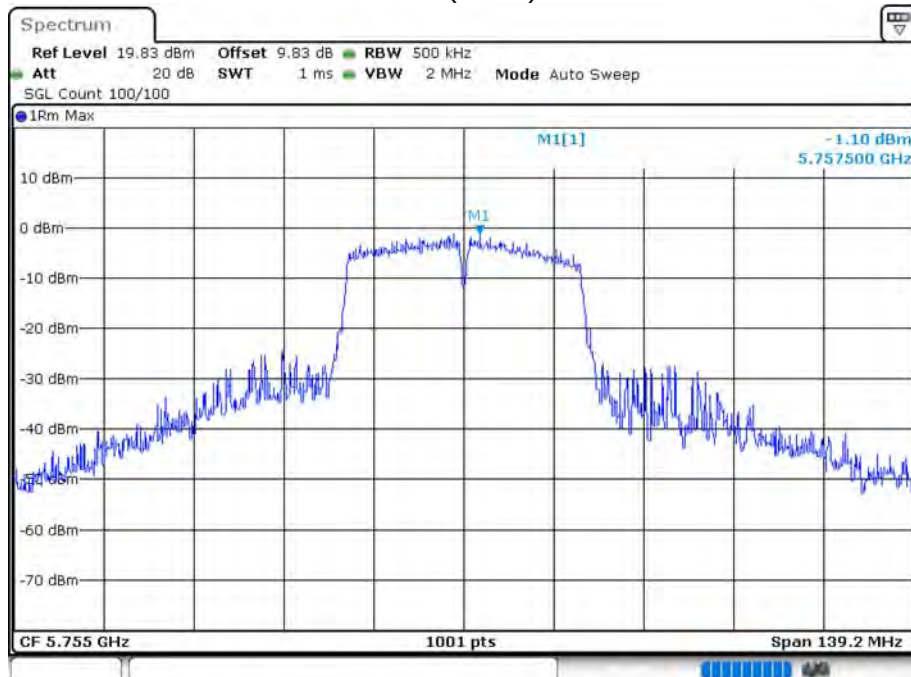

Date: 14.AUG.2020 15:19:31

PSD NVNT 802.11n(HT40) 5795MHz Ant1

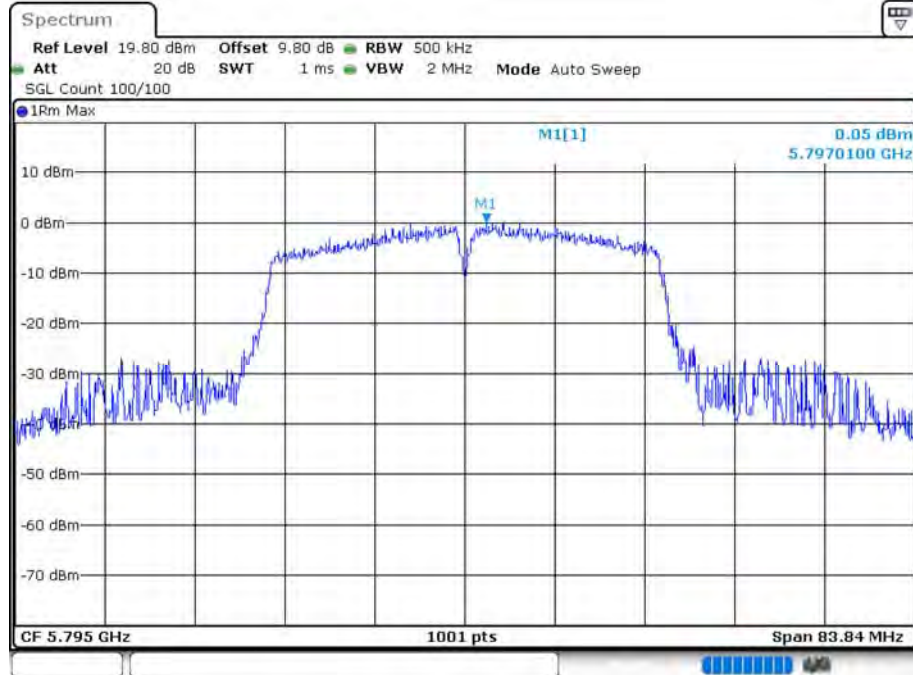


Date: 14.AUG.2020 15:21:21

BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5745	Ant 1	-19.78		Pass
NVNT	802.11a	5825	Ant 1	-26.94		Pass
NVNT	802.11ac20	5745	Ant 1	-18.23		Pass
NVNT	802.11ac20	5825	Ant 1	-25.69		Pass
NVNT	802.11ac40	5755	Ant 1	-19.79		Pass
NVNT	802.11ac40	5795	Ant 1	-29.7		Pass
NVNT	802.11ac80	5775	Ant 1	-28.29		Pass
NVNT	802.11ac80	5775	Ant 1	-19.64		Pass
NVNT	802.11n(HT20)	5745	Ant 1	-20.16		Pass
NVNT	802.11n(HT20)	5825	Ant 1	-26.96		Pass
NVNT	802.11n(HT40)	5755	Ant 1	-12.39		Pass
NVNT	802.11n(HT40)	5795	Ant 1	-30.97		Pass


Band Edge NVNT 802.11a 5745MHz Low Ant1

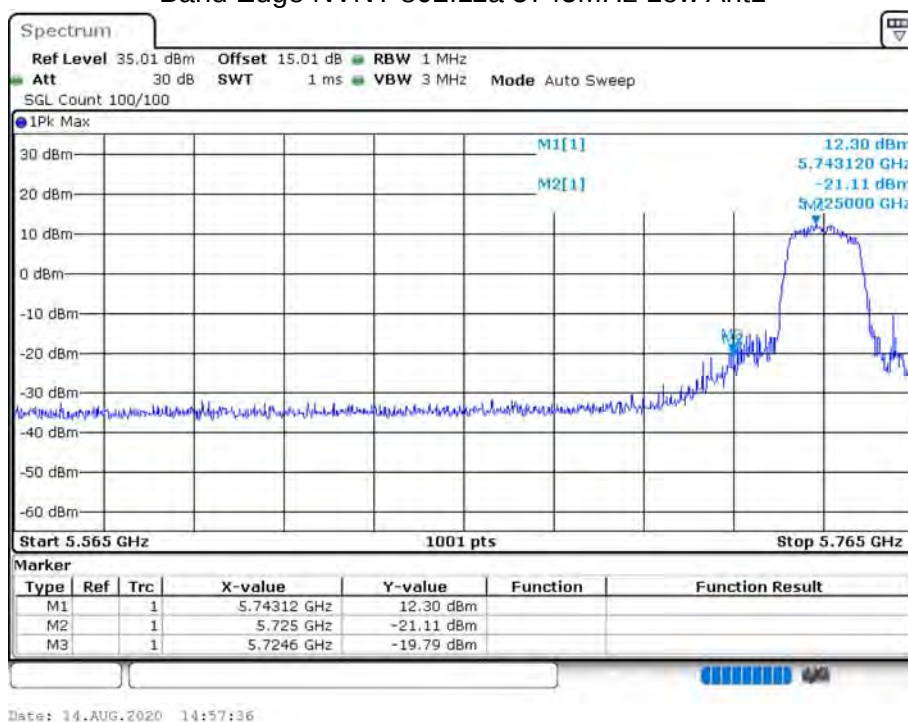

Band Edge NVNT 802.11a 5825MHz High Ant1



Band Edge NVNT 802.11ac20 5745MHz Low Ant1

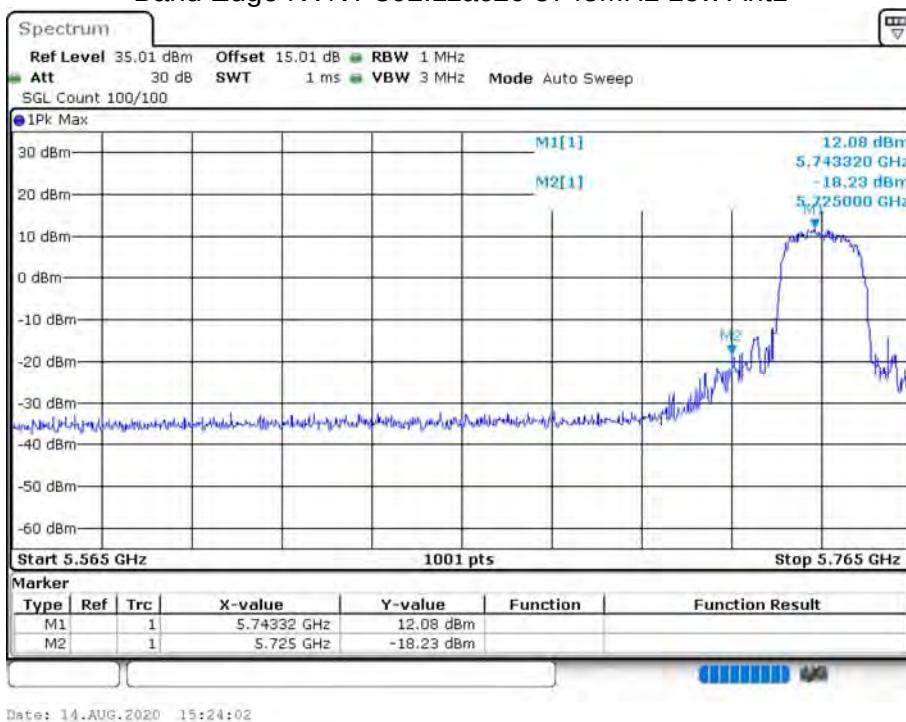

Band Edge NVNT 802.11ac20 5825MHz High Ant1




Band Edge NVNT 802.11ac40 5755MHz Low Ant1




Band Edge NVNT 802.11ac40 5795MHz High Ant1




Band Edge NVNT 802.11ac80 5775MHz High Ant1

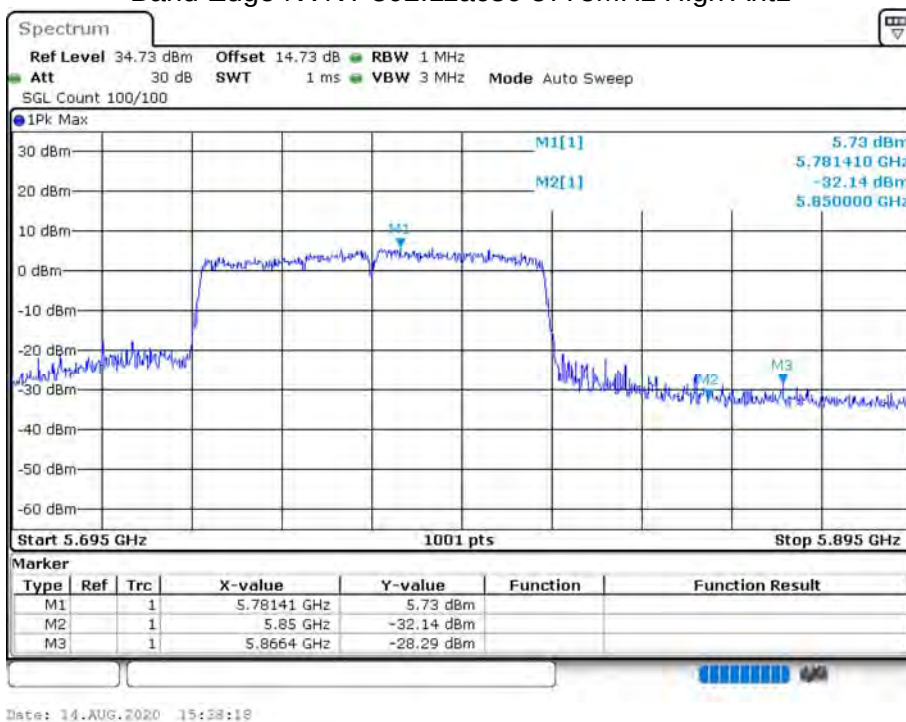

Band Edge NVNT 802.11ac80 5775MHz Low Ant1

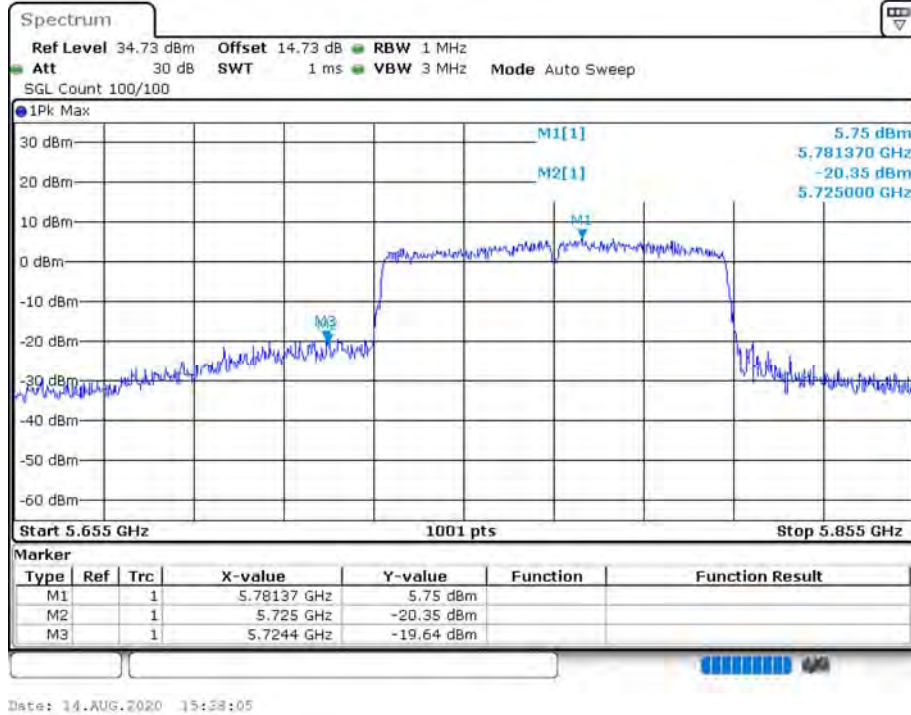

Band Edge NVNT 802.11n(HT20) 5745MHz Low Ant1

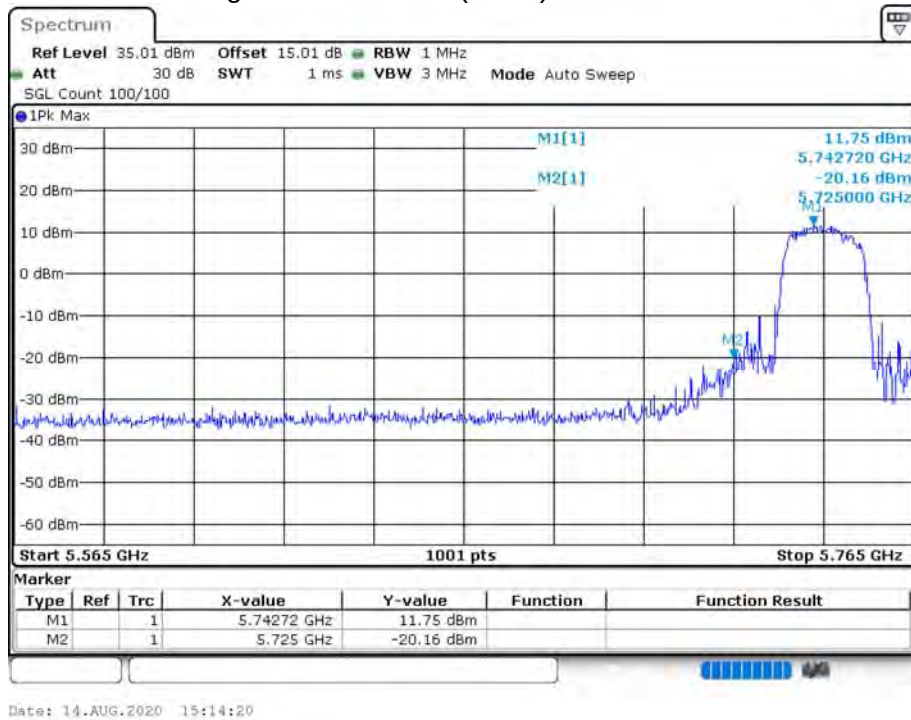


Band Edge NVNT 802.11n(HT20) 5825MHz High Ant1



Band Edge NVNT 802.11n(HT40) 5755MHz Low Ant1



Band Edge NVNT 802.11n(HT40) 5795MHz High Ant1

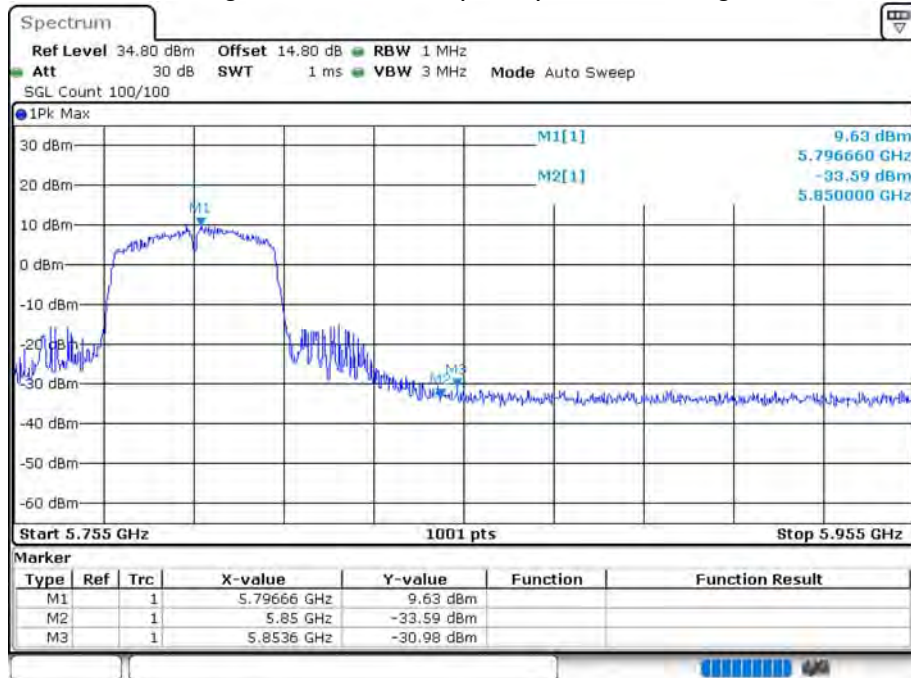


Date: 14.AUG.2020 15:21:29

CONDUCTED RF SPURIOUS EMISSION


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11a	5745	Ant 1	-32.06	-27	Pass
NVNT	802.11a	5785	Ant 1	-30	-27	Pass
NVNT	802.11a	5825	Ant 1	-32.22	-27	Pass
NVNT	802.11ac20	5745	Ant 1	-32.22	-27	Pass
NVNT	802.11ac20	5785	Ant 1	-32.02	-27	Pass
NVNT	802.11ac20	5825	Ant 1	-32.24	-27	Pass
NVNT	802.11ac40	5755	Ant 1	-32.48	-27	Pass
NVNT	802.11ac40	5795	Ant 1	-32.66	-27	Pass
NVNT	802.11ac80	5775	Ant 1	-29.5	-27	Pass
NVNT	802.11n(HT20)	5745	Ant 1	-32.56	-27	Pass
NVNT	802.11n(HT20)	5785	Ant 1	-32.51	-27	Pass
NVNT	802.11n(HT20)	5825	Ant 1	-32.75	-27	Pass
NVNT	802.11n(HT40)	5755	Ant 1	-31.43	-27	Pass
NVNT	802.11n(HT40)	5795	Ant 1	-32.47	-27	Pass

Tx. Spurious NVNT 802.11a 5745MHz Ant1 Emission

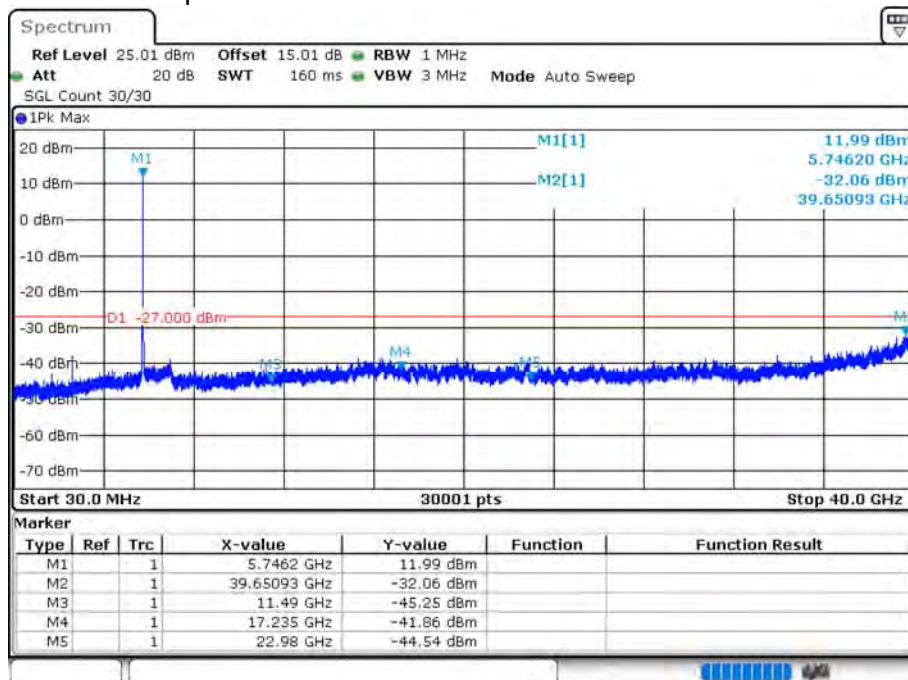


Date: 14.AUG.2020 14:57:56


Tx. Spurious NVNT 802.11a 5785MHz Ant1 Emission

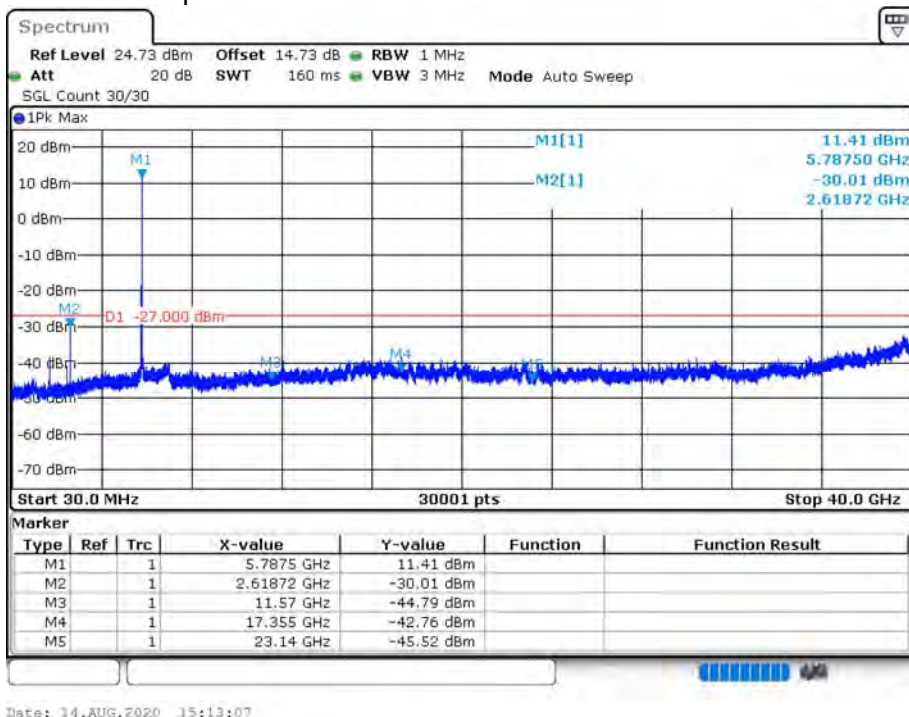

Tx. Spurious NVNT 802.11a 5825MHz Ant1 Emission

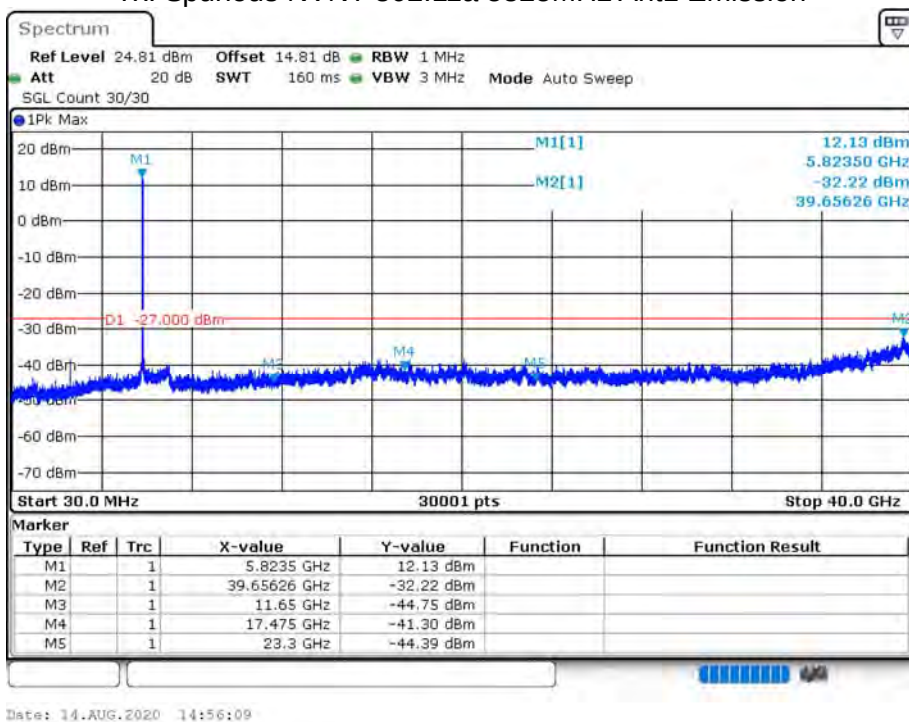


Tx. Spurious NVNT 802.11ac20 5745MHz Ant1 Emission

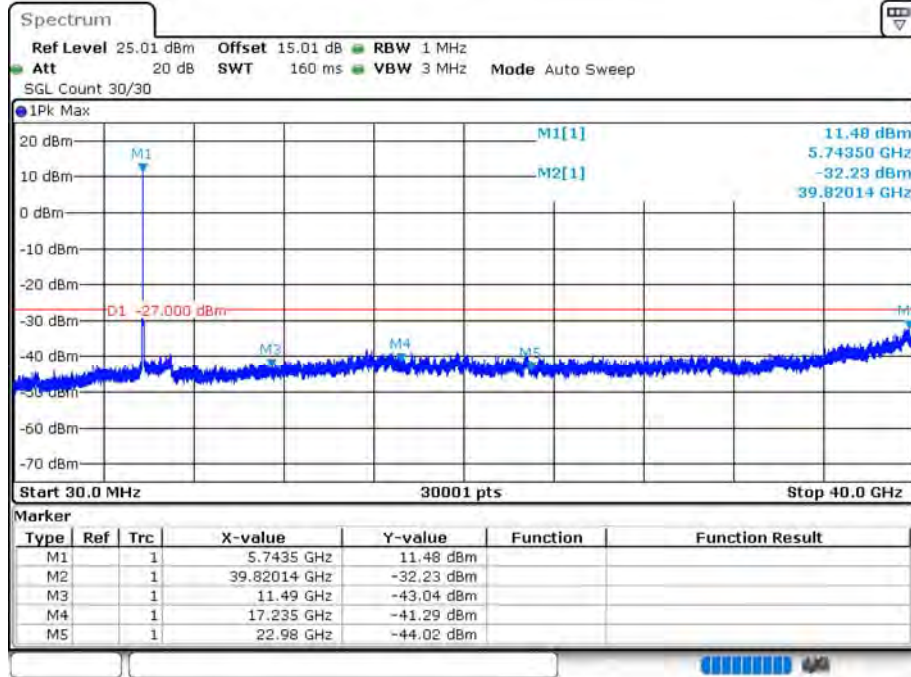


Date: 14.AUG.2020 15:24:25

Tx. Spurious NVNT 802.11ac20 5785MHz Ant1 Emission

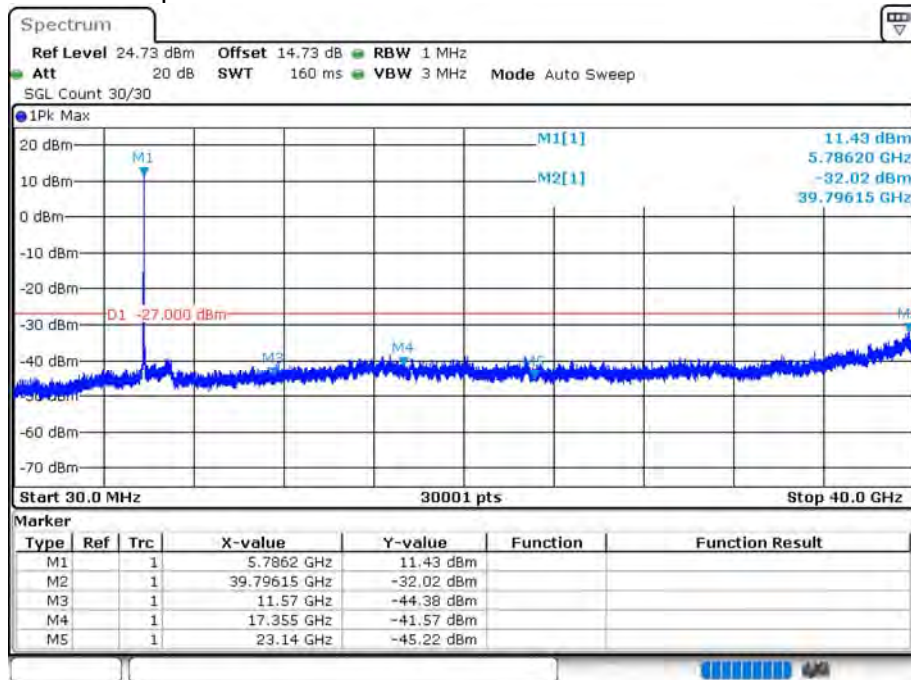


Date: 14.AUG.2020 15:27:29


Tx. Spurious NVNT 802.11ac20 5825MHz Ant1 Emission

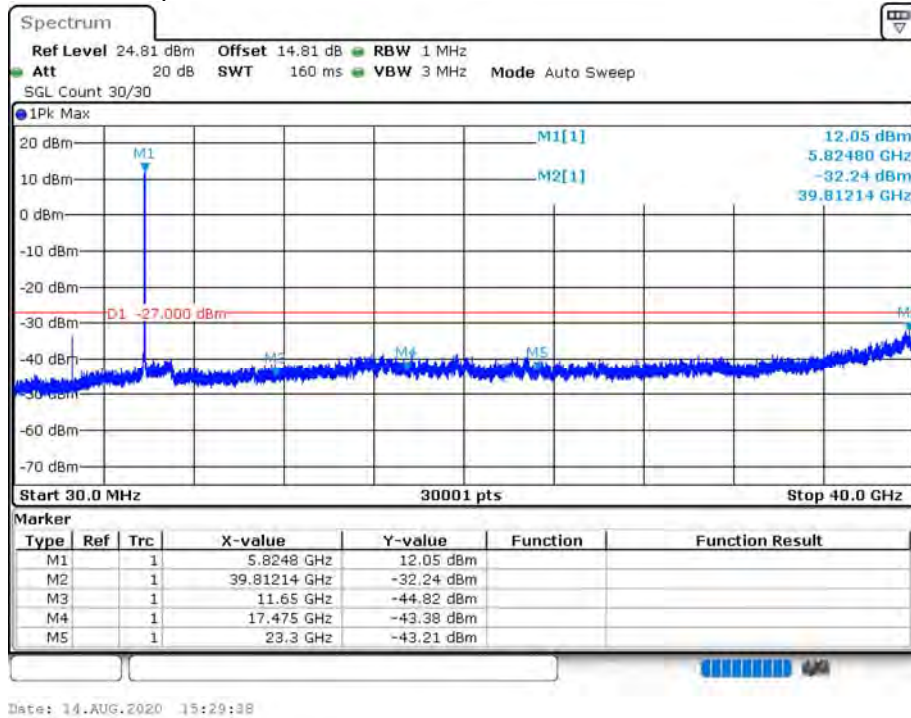

Tx. Spurious NVNT 802.11ac40 5755MHz Ant1 Emission

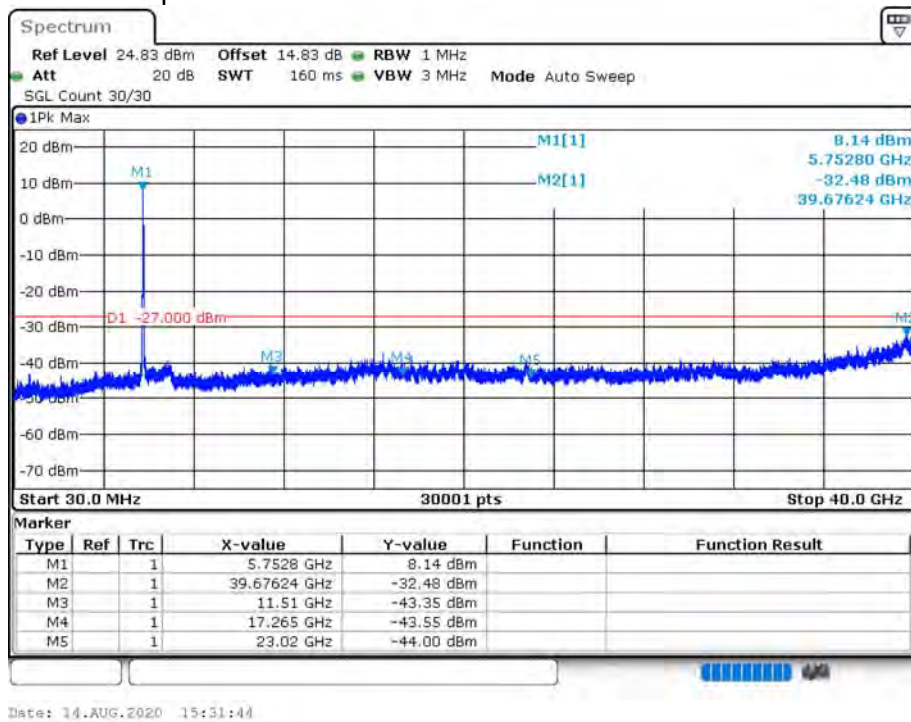


Tx. Spurious NVNT 802.11ac40 5795MHz Ant1 Emission

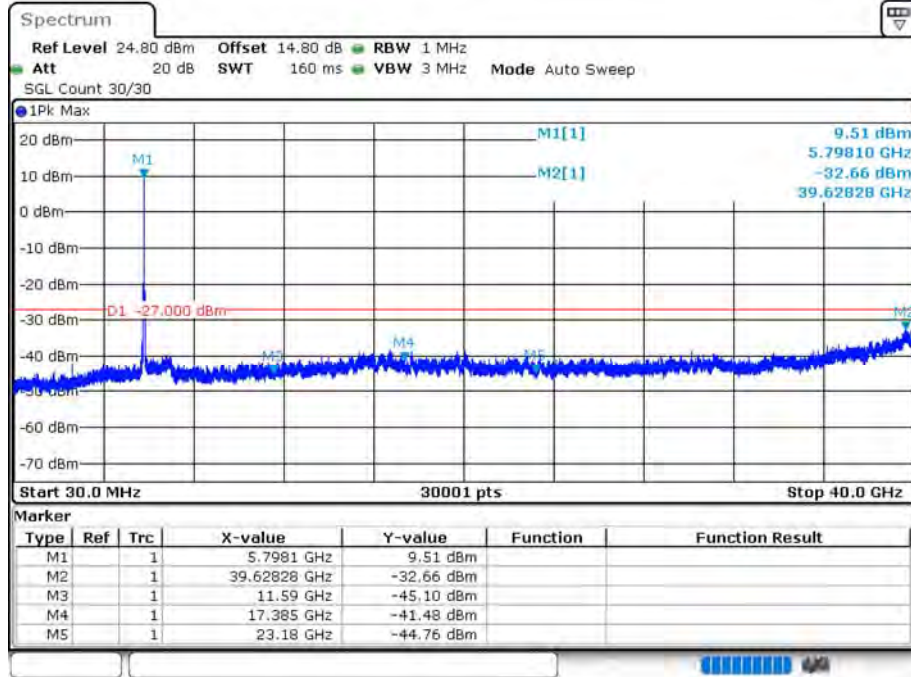


Date: 14.AUG.2020 15:35:54

Tx. Spurious NVNT 802.11ac80 5775MHz Ant1 Emission

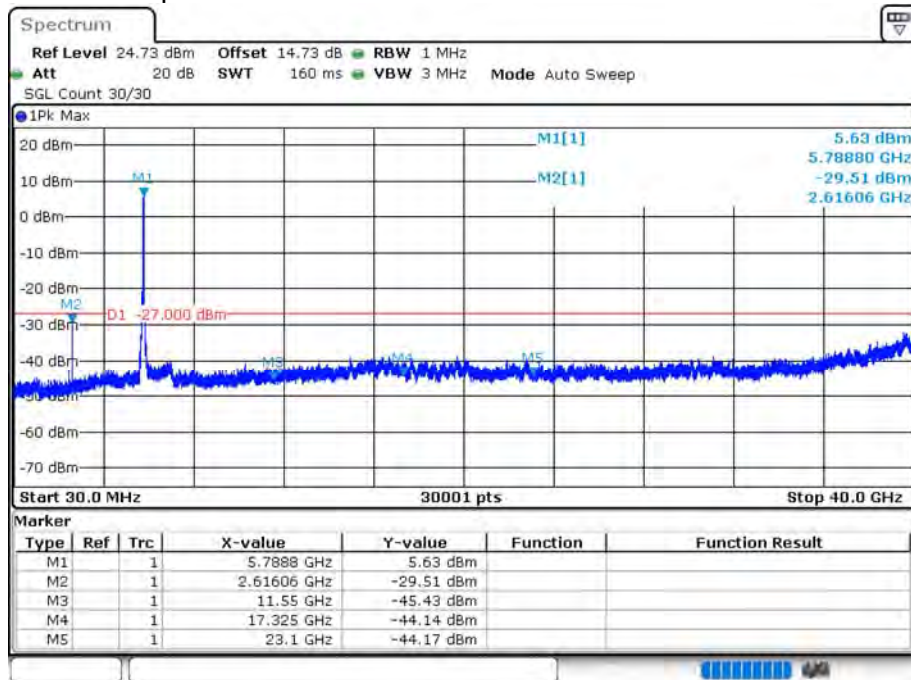


Date: 14.AUG.2020 15:37:55


Tx. Spurious NVNT 802.11n(HT20) 5745MHz Ant1 Emission

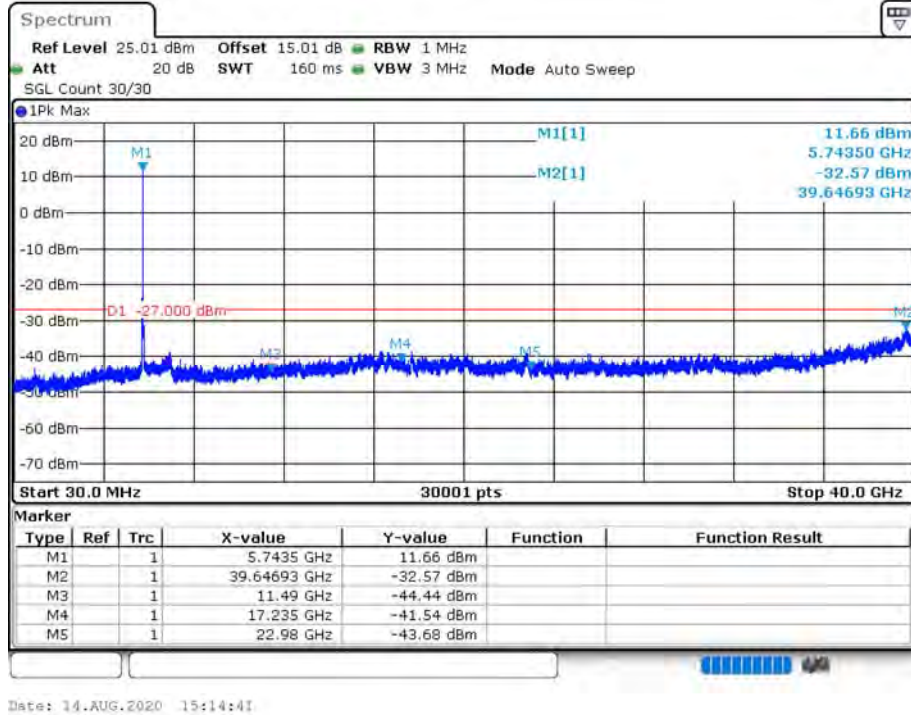


Tx. Spurious NVNT 802.11n(HT20) 5785MHz Ant1 Emission

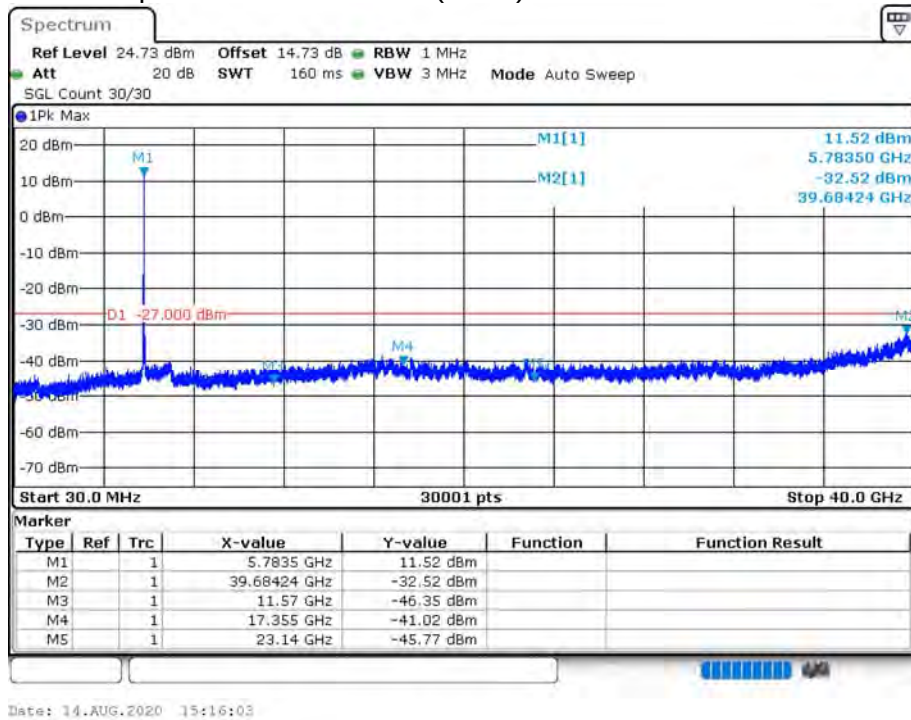


Tx. Spurious NVNT 802.11n(HT20) 5825MHz Ant1 Emission

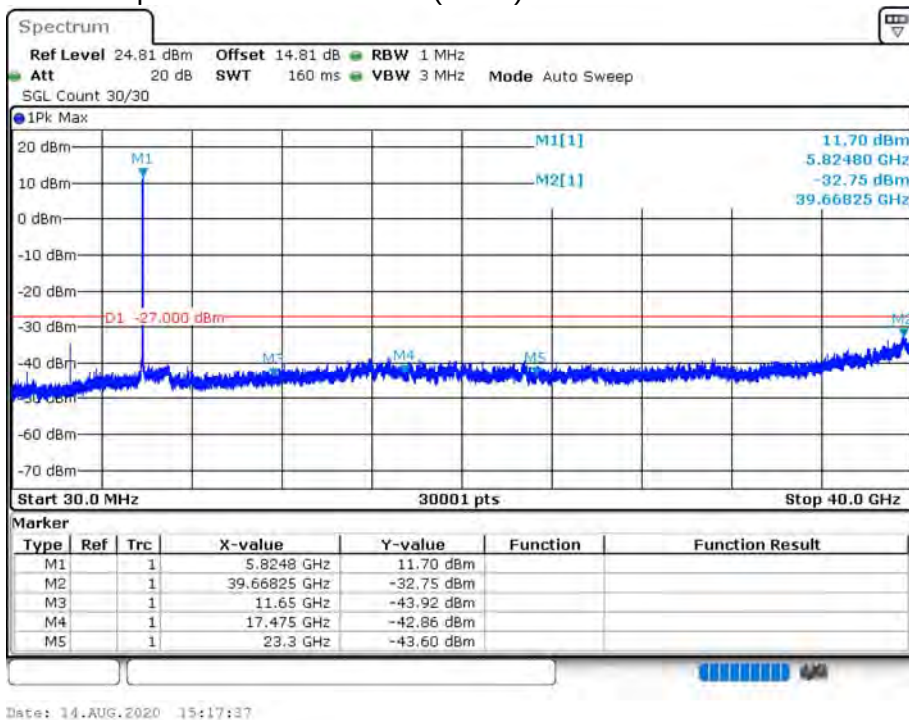

Tx. Spurious NVNT 802.11n(HT40) 5755MHz Ant1 Emission

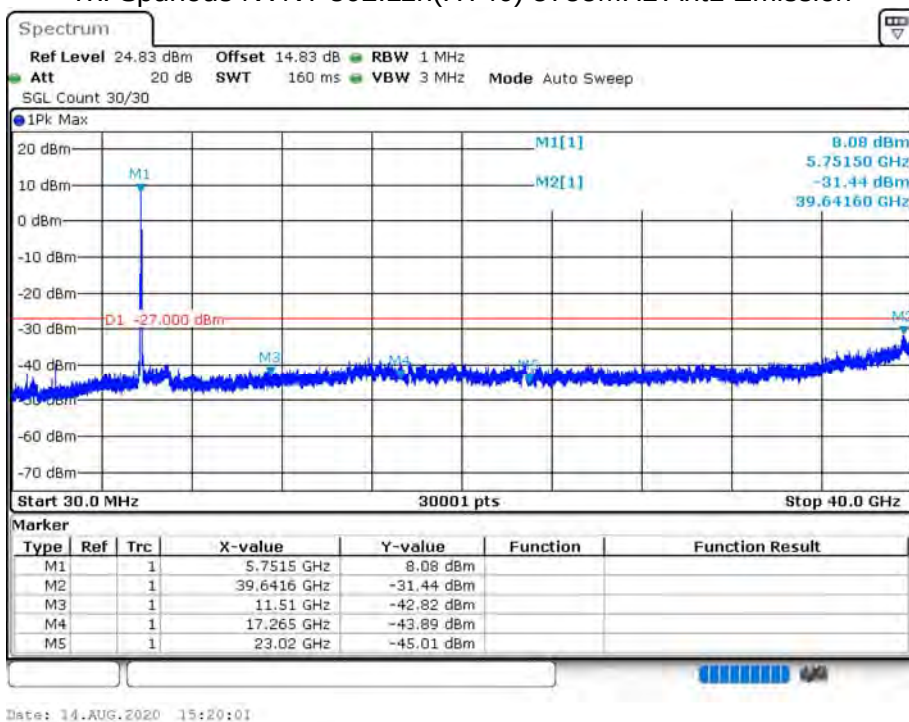

Tx. Spurious NVNT 802.11n(HT40) 5795MHz Ant1 Emission

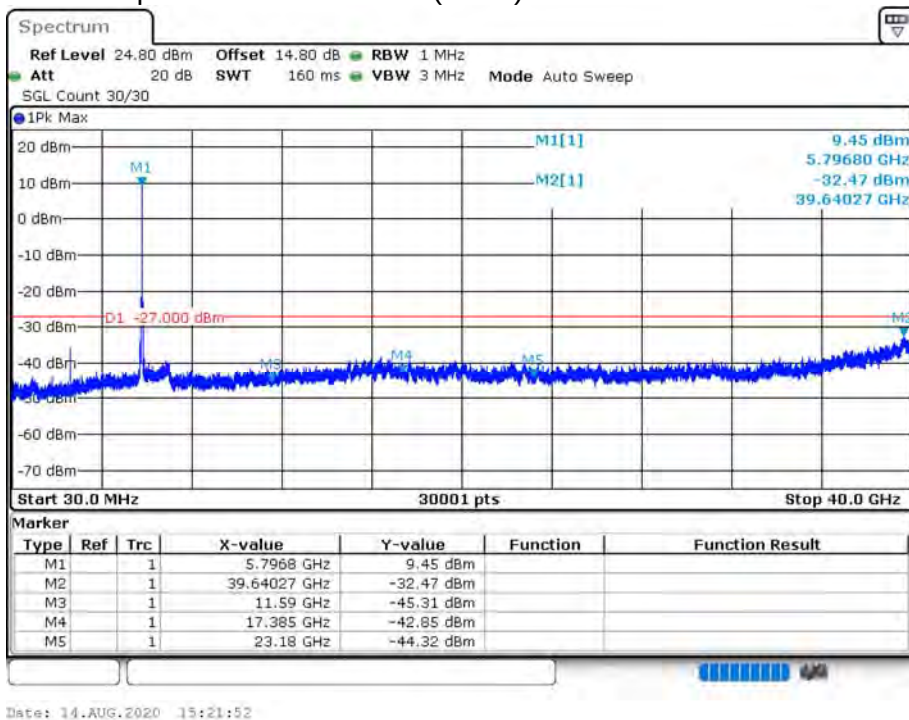

END OF REPORT