Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V03
Report Template Revision Date: Mar.1st, 2017

FCC Test Report

Report No. :	CQASZ171201621EW-01
Applicant:	Beijing Boshi Linkage Technology Co., Ltd.
Address of Applicant:	Room 2229-2230, No. 2# Building, Zhongguancun Software Park Incubator, Dongbeiwang Road, Haidian District, Beijing City, China
Manufacturer:	Beijing Boshi Linkage Technology Co., Ltd.
Address of Manufacturer:	Room 2229-2230, No. 2# Building, Zhongguancun Software Park Incubator, Dongbeiwang Road, Haidian District, Beijing City, China
Factory:	Beijing Boshi Linkage Technology Co., Ltd.
Address of Factory:	Room 2229-2230, No. 2# Building, Zhongguancun Software Park Incubator, Dongbeiwang Road, Haidian District, Beijing City, China

Equipment Under Test (EUT):

Product:	Elite Care
Model No.:	EC-210
Brand Name:	BSLK BOSHI LINKAGE 博实联创
FCC ID:	2AOXA-EC-210
Standards:	47 CFR Part 15, Subpart C
Date of Test:	2018-01-10 to 2018-01-15
Date of Issue:	2018-01-15
Test Result :	**PASS***

Tested By: Aaron Ma

(Aaron Ma)

Reviewed By: Owen Zhou

(Owen Zhou)

Approved By:

(Jack Ai)

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD. CQA 华夏准测 APPROVED

* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

2 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ171201621EW-01	Rev.01	Initial report	2018-01-15

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

4 Contents

Page

1 COVER PAGE 1
2 VERSION 2
3 TEST SUMMARY 3
4 CONTENTS 4
5 GENERAL INFORMATION 5
5.1 CLIENT INFORMATION 5
5.2 GENERAL DESCRIPTION OF EUT 5
5.3 TEST ENVIRONMENT 7
5.4 DESCRIPTION OF SUPPORT UNITS 7
5.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY 7
5.6 TEST FACILITY 8
5.7 DEVIATION FROM STANDARDS 8
5.8 ABNORMALITIES FROM STANDARD CONDITIONS 8
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER 8
5.10 EQUIPMENT LIST 9
6 TEST RESULTS AND MEASUREMENT DATA 10
6.1 ANTENNA REQUIREMENT 10
6.2 CONDUCTED EMISSIONS 11
6.3 CONDUCTED PEAK OUTPUT POWER 15
6.4 6DB OCCUPY BANDWIDTH 18
6.5 POWER SPECTRAL DENSITY 21
6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS 24
6.7 SPURIOUS RF CONDUCTED EMISSIONS 26
6.8 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS 32
6.8.1 Spurious Emissions 32
7 PHOTOGRAPHS - EUT TEST SETUP 38
7.1 RADIATED SPURIOUS EMISSION 38
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS 40

5 General Information

5.1 Client Information

Applicant:	Beijing Boshi Linkage Technology Co., Ltd.
Address of Applicant:	Room 2229-2230, No. 2# Building, Zhongguancun Software Park Incubator, Dongbeiwang Road, Haidian District, Beijing City, China
Manufacturer:	Beijing Boshi Linkage Technology Co., Ltd.
Address of Manufacturer:	Room 2229-2230, No. 2# Building, Zhongguancun Software Park Incubator, Dongbeiwang Road, Haidian District, Beijing City, China
Factory:	Beijing Boshi Linkage Technology Co., Ltd.
Address of Factory:	Room 2229-2230, No. 2# Building, Zhongguancun Software Park Incubator, Dongbeiwang Road, Haidian District, Beijing City, China

5.2 General Description of EUT

Product Name:	Elite Care
Model No.:	EC-210
Trade Mark:	BSLK BOSHI LINKAGE
Hardware Version:	V2.02
Software Version:	V3.10
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Software of EUT:	CYBLE MTK (Manufacturer provide)
Antenna Type:	Ceramic antenna
Antenna Gain:	0dBi
EUT Power Supply:	Adapter: Model:GAT-0501000U Input:AC100-240V 0.4A 50/60Hz Output: DC5V 1000mA

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar
Test Mode:	Use test software (CYBLE MTK) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. Note: In the process of transmitting of EUT, the duty cycle ＞98%.

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Adapter	Guoaotong	GAT-0501000U	Provide by client	Verification

5.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	±5.12dB	(1)
Radiated Emission	Above 1GHz	±4.60dB	(1)
Conducted Disturbance	0.15~30MHz	±3.34dB	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:
IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Equipment List

Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Due Date
1	EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/24
2	Spectrum analyzer	R&S	FSU26	CQA-038	2018/9/24
3	Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/24
4	Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/9/24
5	Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/3/21
6	Bilog Antenna	R&S	HL562	CQA-011	2018/9/24
7	Horn Antenna	R&S	HF906	CQA-012	2018/9/24
8	Horn Antenna	R&S	BBHA 9170	CQA-088	2018/9/24
9	Coax cable (9KHz~40GHz)	CQA	RE-low-01	CQA-077	2018/9/24
10	Coax cable (9KHz~40GHz)	CQA	RE-high-02	CQA-078	2018/9/24
11	Antenna Connector	CQA	RFC-01	CQA-080	2018/9/24
12	RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/24
13	EMI Test Receiver	R&S	ESPI3	CQA-005	2018/9/24
14	LISN	R&S	ENV216	CQA-003	2018/9/24
15	Coaxial cable (9KHz~300MHz)	CQA	N/A	CQA-C009	2018/10/17

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	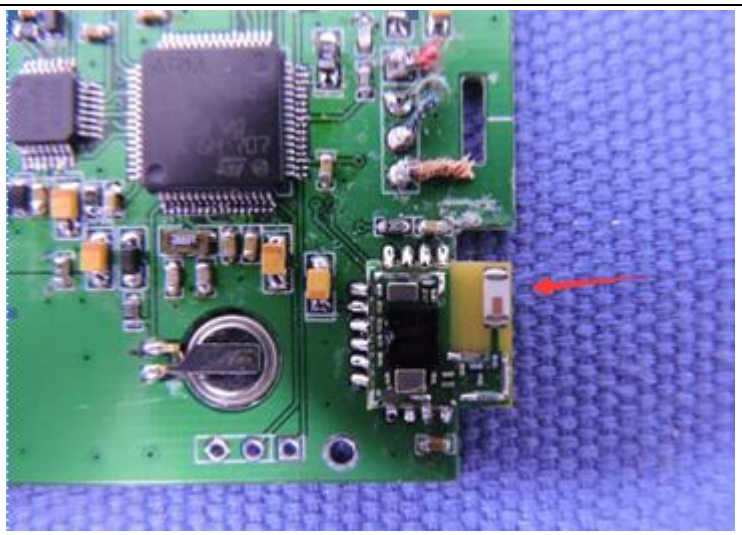
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.	

6.2 Conducted Emissions

<table>
<tr><td>Test Requirement:</td><td>47 CFR Part 15C Section 15.207</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10: 2013</td></tr>
<tr><td>Test Frequency Range:</td><td>150kHz to 30MHz</td></tr>
<tr><td>Limit:</td><td>
<table>
<tr><td rowspan="2">Frequency range (MHz)</td><td colspan="2">Limit (dBuV)</td></tr>
<tr><td>Quasi-peak</td><td>Average</td></tr>
<tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr>
<tr><td>0.5-5</td><td>56</td><td>46</td></tr>
<tr><td>5-30</td><td>60</td><td>50</td></tr>
</table>
* Decreases with the logarithm of the frequency.
</td></tr>
<tr><td>Test Procedure:</td><td>1) The mains terminal disturbance voltage test was conducted in a shielded room.
2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</td></tr>
</table>

Test Setup:	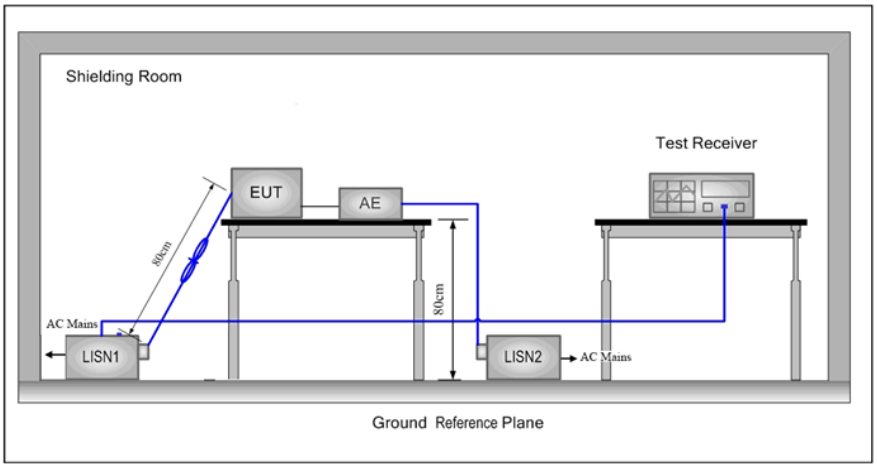
Exploratory Test Mode:	Transmitting mode with GFSK modulation at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

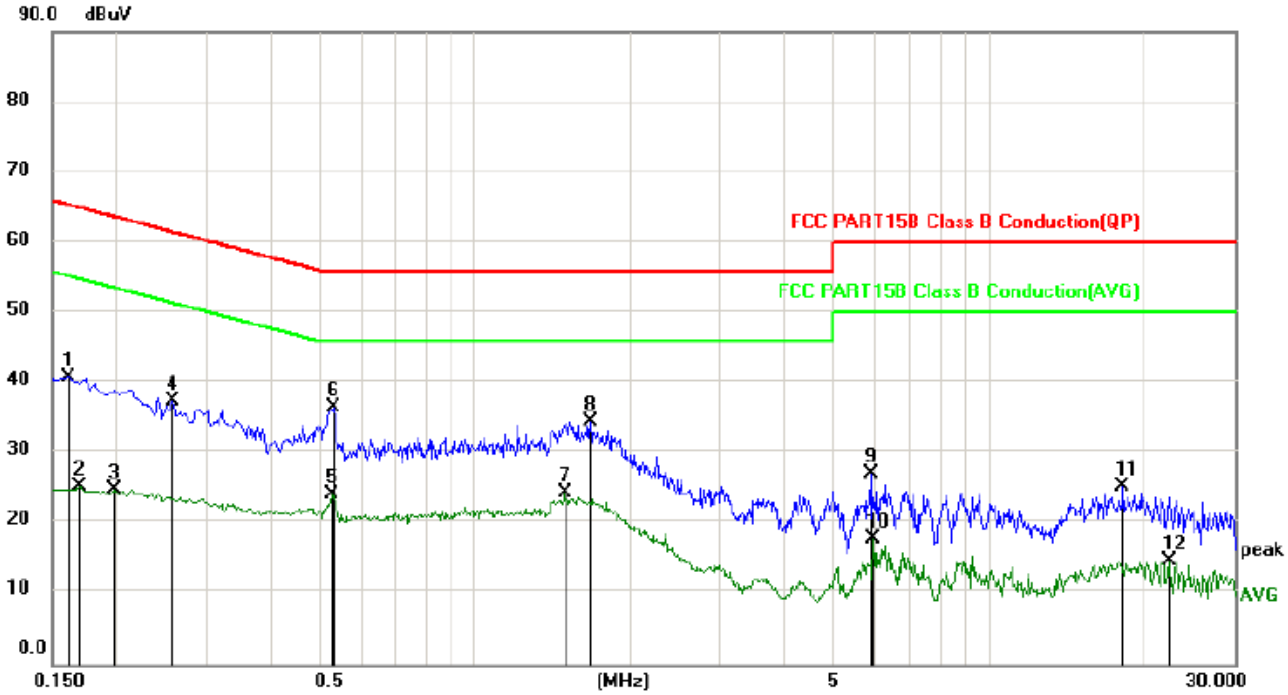

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	31.07	9.73	40.80	65.36	-24.56	peak
2		0.1700	15.69	9.73	25.42	54.96	-29.54	AVG
3		0.1980	15.11	9.74	24.85	53.69	-28.84	AVG
4		0.2580	27.72	9.74	37.46	61.50	-24.04	peak
5		0.5260	14.52	9.74	24.26	46.00	-21.74	AVG
6	*	0.5299	26.92	9.74	36.66	56.00	-19.34	peak
7		1.4940	14.73	9.75	24.48	46.00	-21.52	AVG
8		1.6780	24.85	9.76	34.61	56.00	-21.39	peak
9		5.8980	17.36	9.79	27.15	60.00	-32.85	peak
10		5.9540	8.17	9.79	17.96	50.00	-32.04	AVG
11		18.1660	15.55	9.87	25.42	60.00	-34.58	peak
12		22.3420	4.76	9.88	14.64	50.00	-35.36	AVG

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

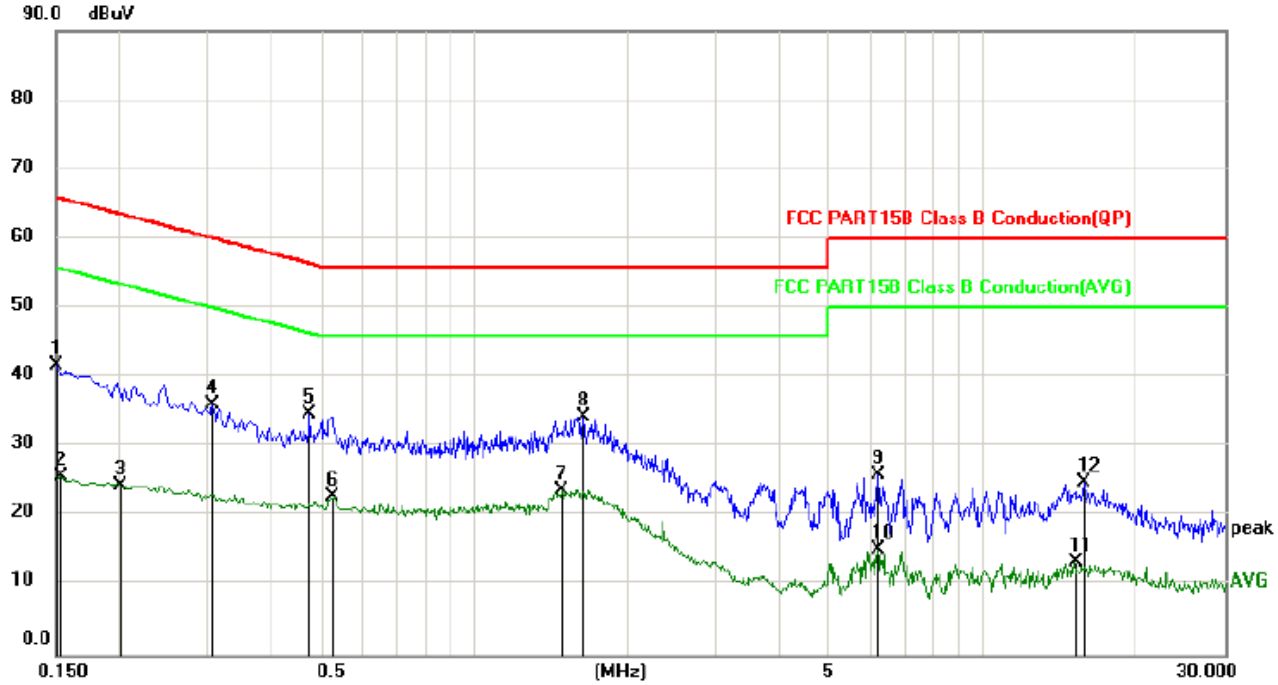

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1500	31.85	9.79	41.64	66.00	-24.36	peak
2		0.1539	16.00	9.79	25.79	55.79	-30.00	AVG
3		0.2007	14.67	9.80	24.47	53.58	-29.11	AVG
4		0.3060	26.27	9.80	36.07	60.08	-24.01	peak
5		0.4740	25.00	9.80	34.80	56.44	-21.64	peak
6		0.5299	12.95	9.80	22.75	46.00	-23.25	AVG
7		1.4940	13.91	9.84	23.75	46.00	-22.25	AVG
8	*	1.6380	24.55	9.85	34.40	56.00	-21.60	peak
9		6.2500	16.12	9.84	25.96	60.00	-34.04	peak
10		6.2500	5.26	9.84	15.10	50.00	-34.90	AVG
11		15.1460	3.49	9.88	13.37	50.00	-36.63	AVG
12		15.8740	14.93	9.88	24.81	60.00	-35.19	peak

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10 2013
Test Setup:	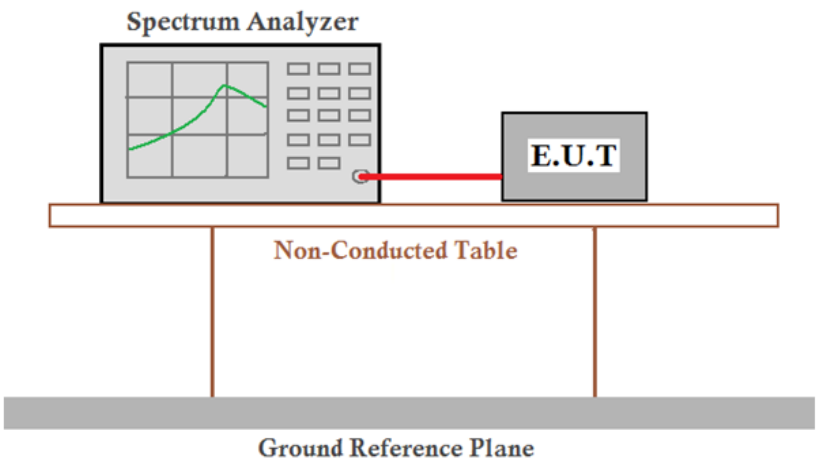 *Remark: Offset=Cable loss+ attenuation factor.*
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.88	30.00	Pass
Middle	-3.53	30.00	Pass
Highest	-2.72	30.00	Pass

Test plot as follows:

Graphs	
LCH	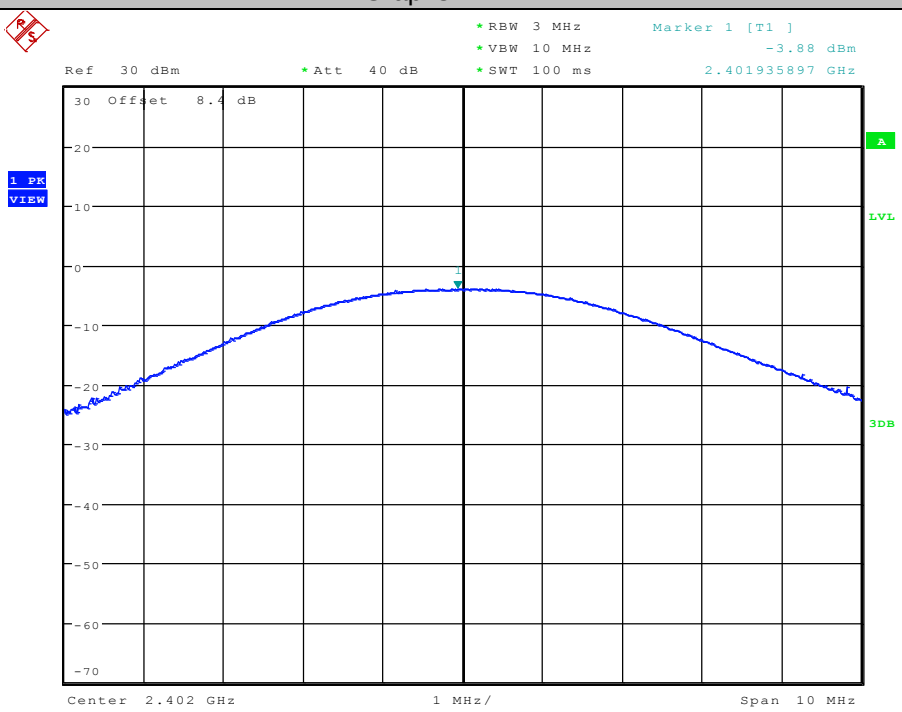
MCH	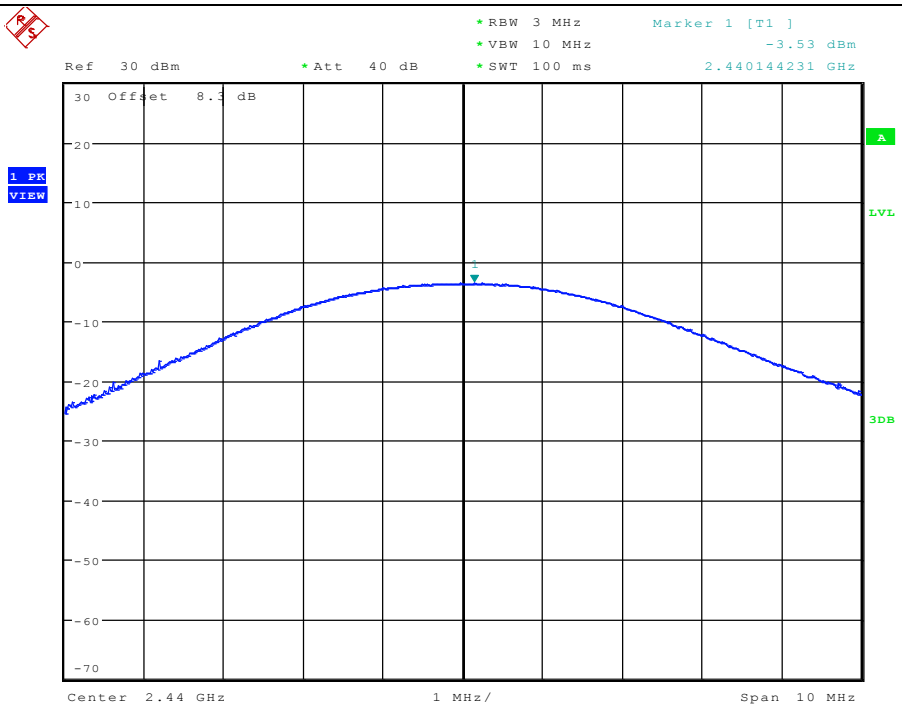

HCH	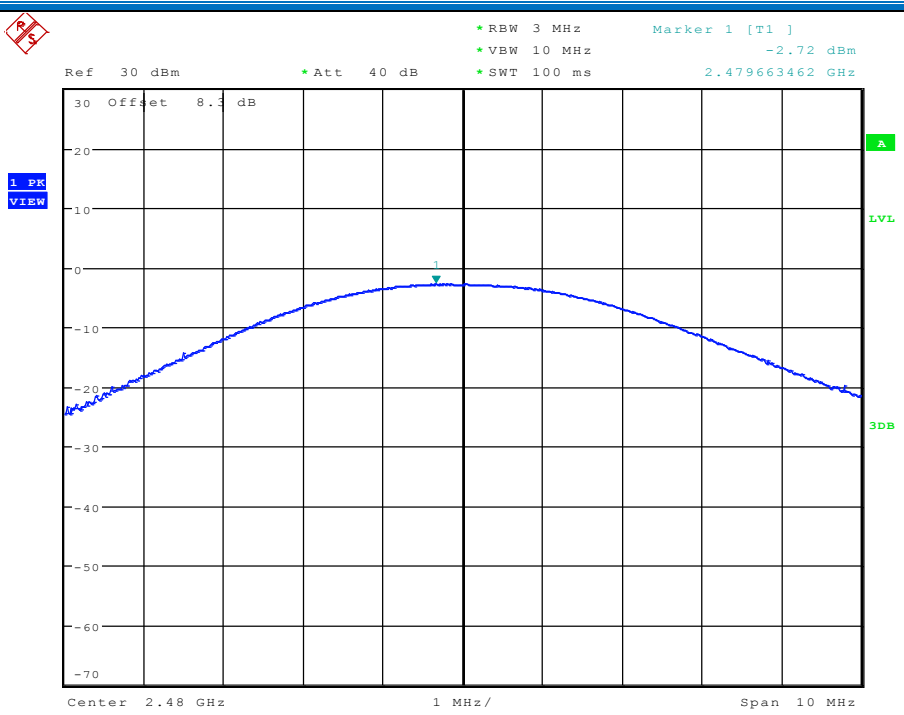 RBW 3 MHz VBW 10 MHz SWT 100 ms Marker 1 [T1] -2.72 dBm 2.479663462 GHz Ref 30 dBm Att 40 dB 30 Offset 8.3 dB 1 PK VIEW A LVL 3DB 20 10 0 -10 -20 -30 -40 -50 -60 -70 Center 2.48 GHz 1 MHz/ Span 10 MHz

6.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	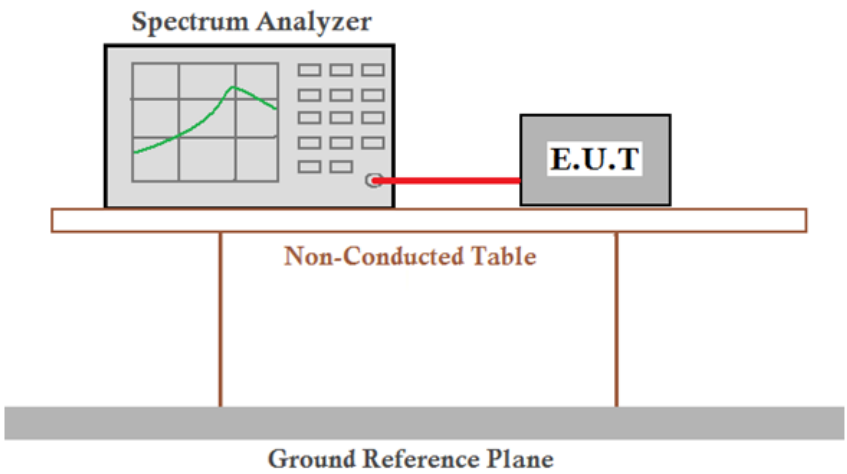 *Remark: Offset=Cable loss+ attenuation factor.*
Limit:	≥ 500 kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.705	≥500	Pass
Middle	0.692	≥500	Pass
Highest	0.699	≥500	Pass

Test plot as follows:

Graphs	
LCH	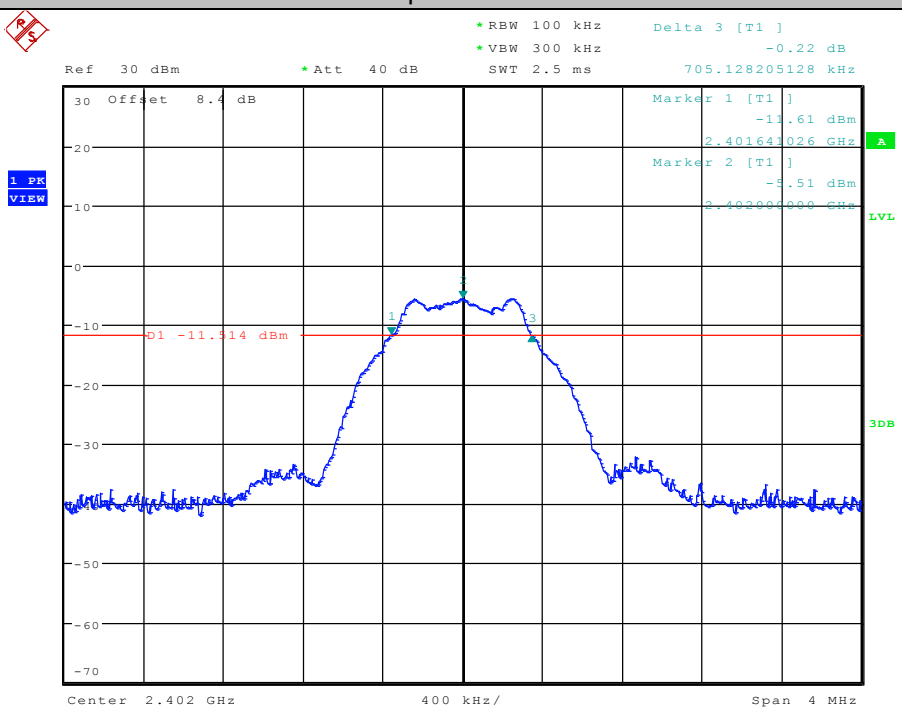
MCH	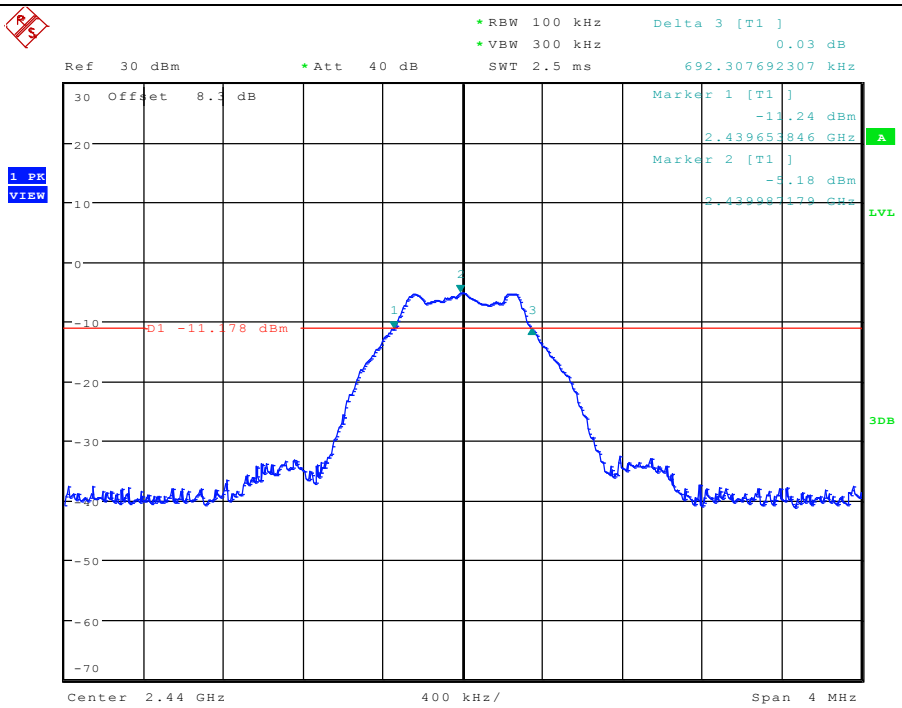

HCH	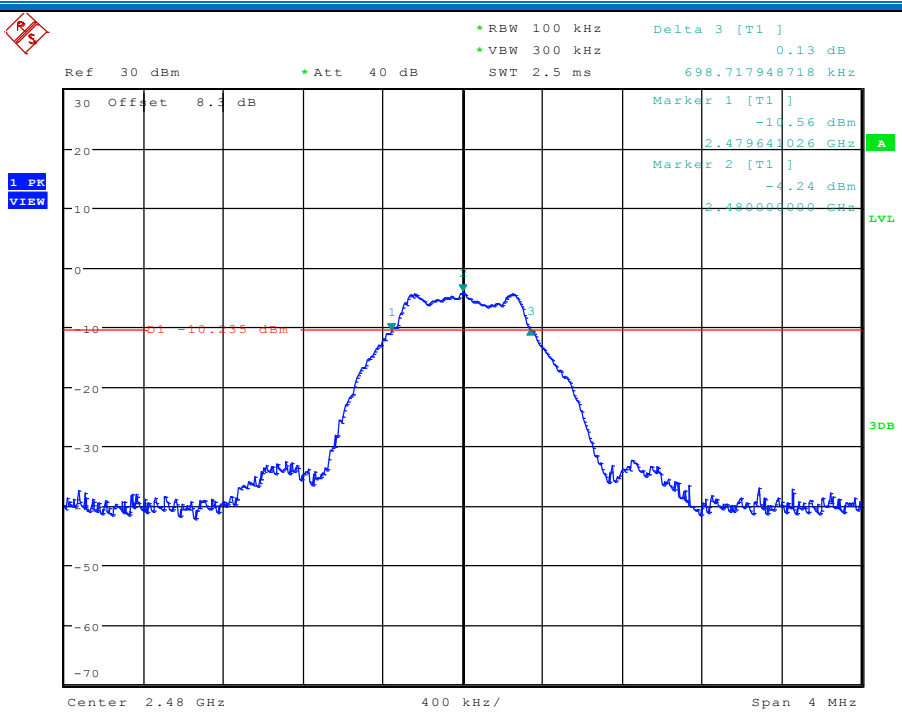 RBW 100 kHz VBW 300 kHz SWT 2.5 ms Delta 3 [T1] 0.13 dB 698.717948718 kHz Ref 30 dBm Att 40 dB Offset 8.3 dB Marker 1 [T1] -10.56 dBm 2.479643026 GHz Marker 2 [T1] -4.24 dBm 2.480000000 GHz 1 PK VIEW A LVL 3DB D1 -10.135 dBm Center 2.48 GHz 400 kHz/ Span 4 MHz

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	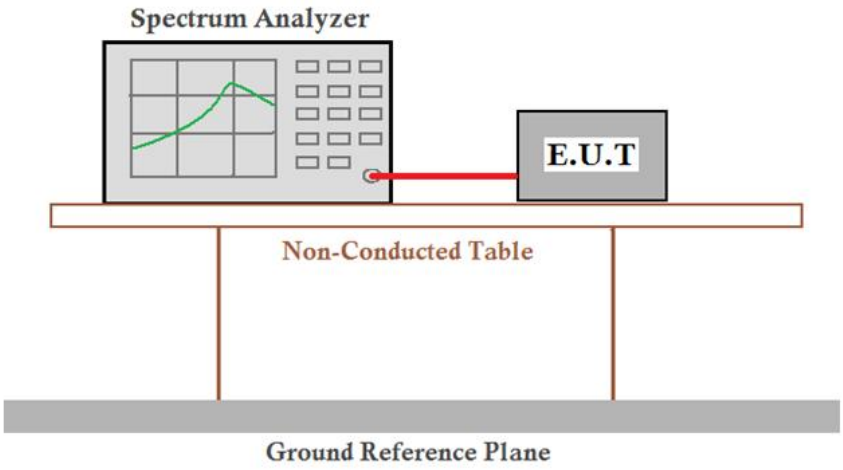 *Remark: Offset=Cable loss+ attenuation factor.*
Limit:	≤8.00dBm/3kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-20.12	≤8.00	Pass
Middle	-19.78	≤8.00	Pass
Highest	-18.87	≤8.00	Pass

Test plot as follows:

Graphs	
LCH	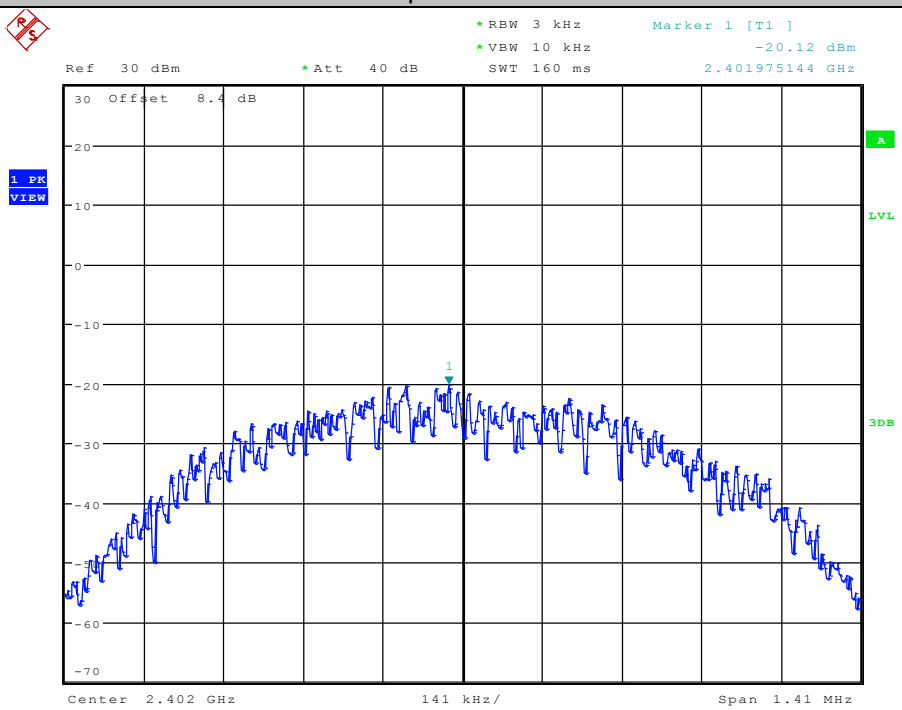
MCH	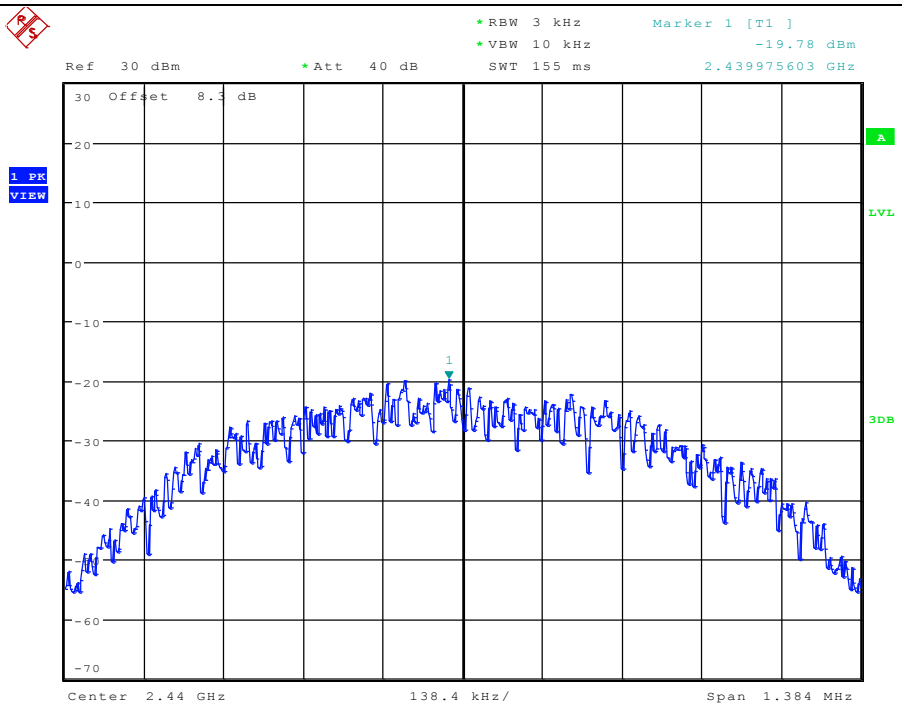

HCH	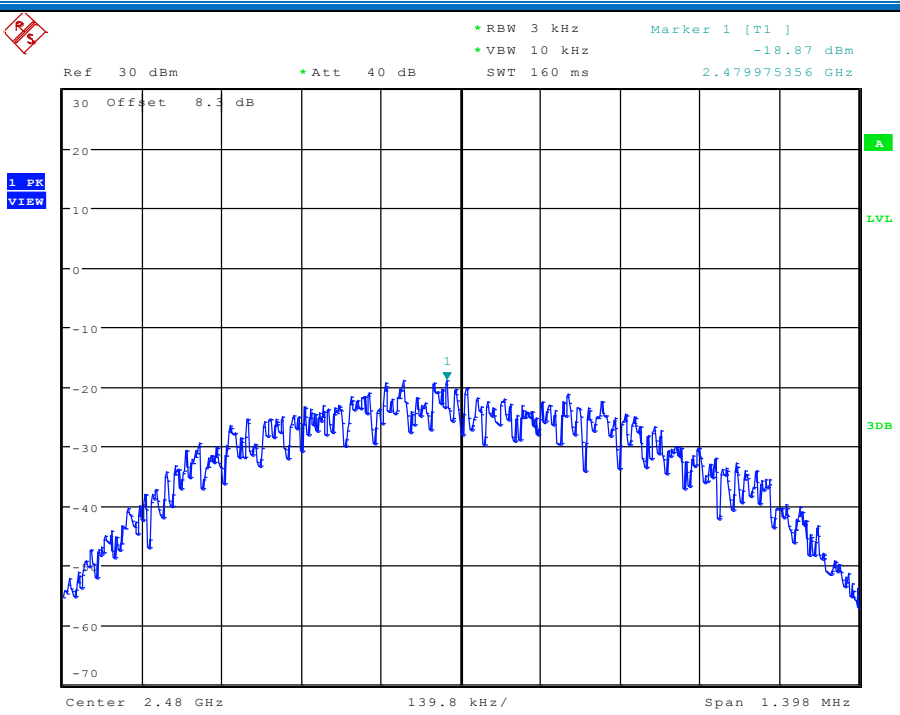 RBW 3 kHz VBW 10 kHz SWT 160 ms Marker 1 [T1] -18.87 dBm 2.479975356 GHz Ref 30 dBm Att 40 dB Offset 8.3 dB 1 PK VIEW A LVL 3DB Center 2.48 GHz 139.8 kHz/ Span 1.398 MHz

6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	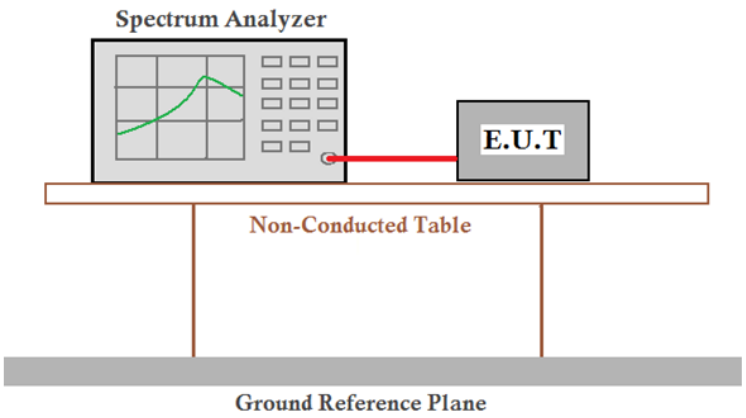 *Remark: Offset=Cable loss+ attenuation factor.*
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass

GFSK mode				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-37.60	-25.61	Pass
Highest	2483.5	-38.49	-24.30	Pass

Test plot as follows:

Graphs	
LCH	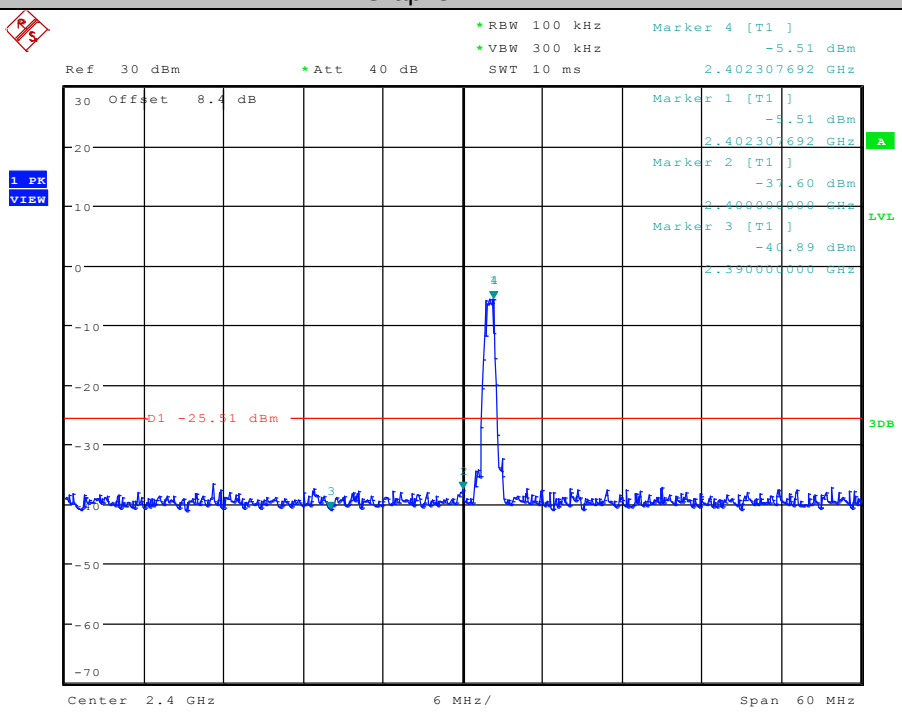
HCH	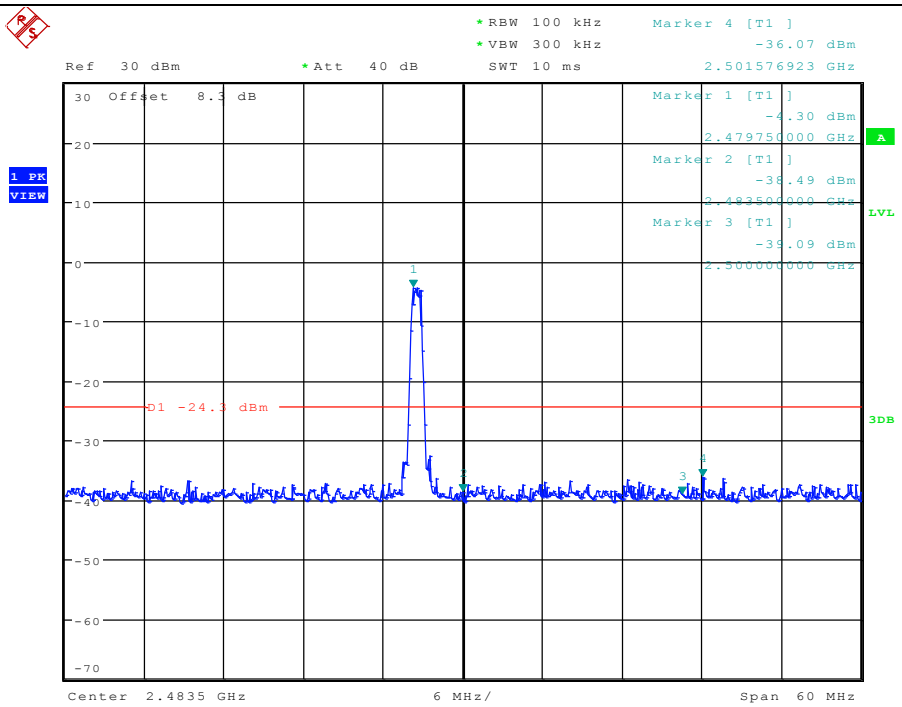

6.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	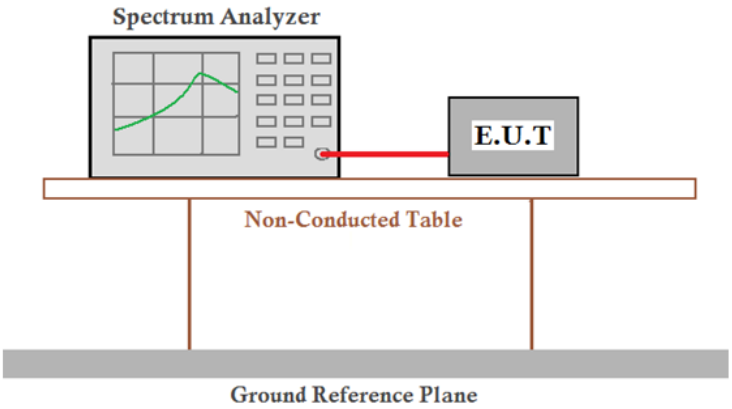 *Remark: Offset=Cable loss+ attenuation factor.*
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass

Test plot as follows:

BLE_LCH_Graphs	
Pref/BLE/LCH	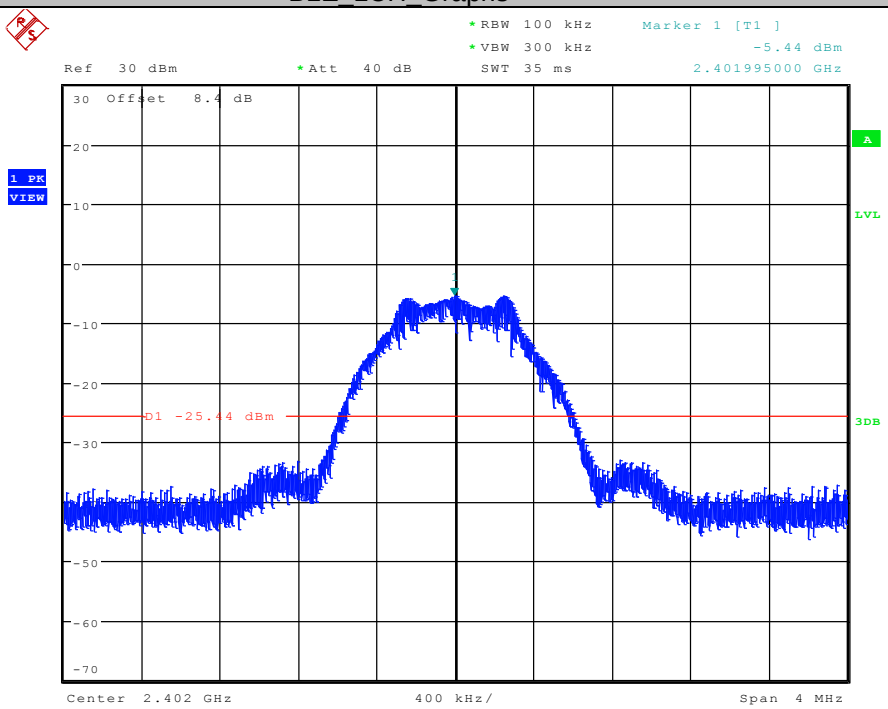
Puw/BLE/LCH	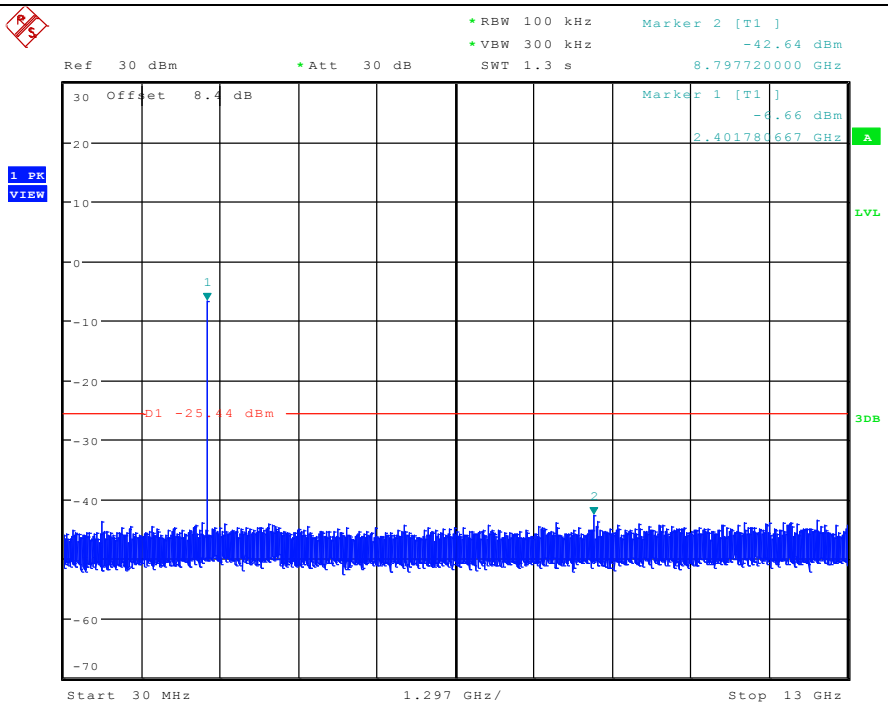

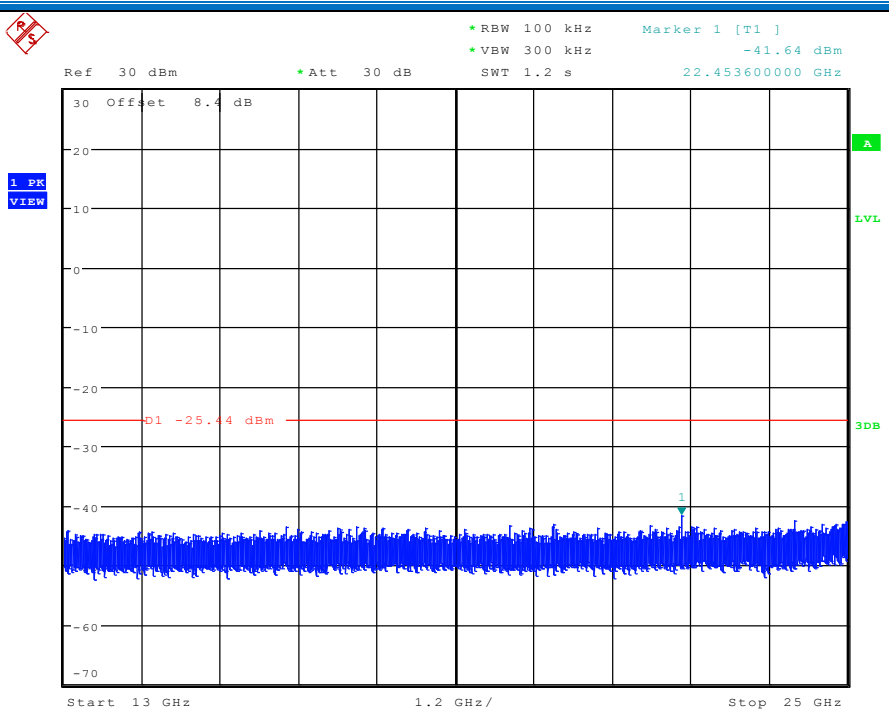

BLE_MCH_Graphs

Pref/BLE/MCH

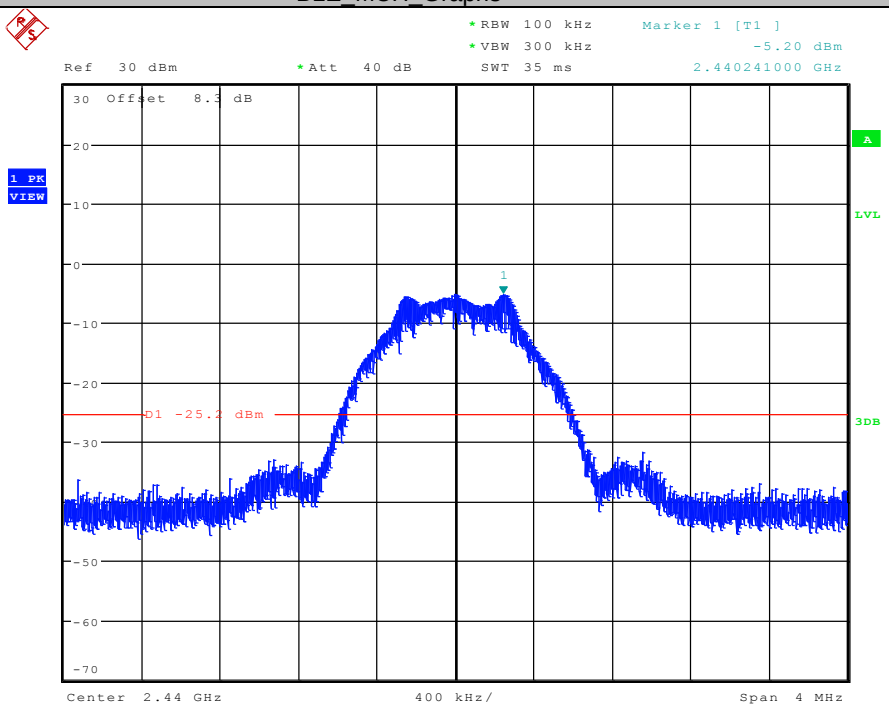

Puw/BLE/MCH	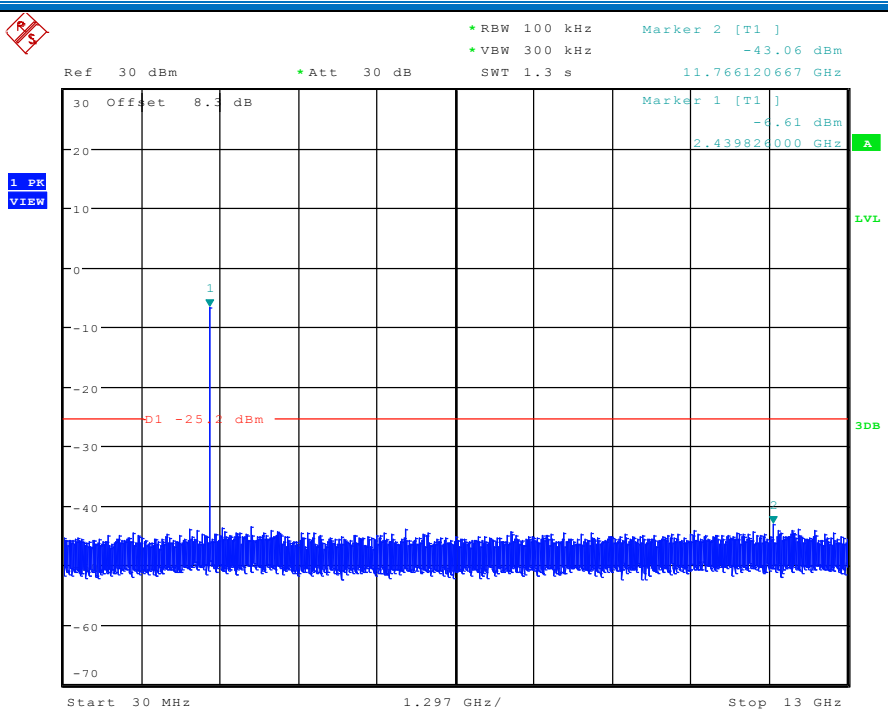 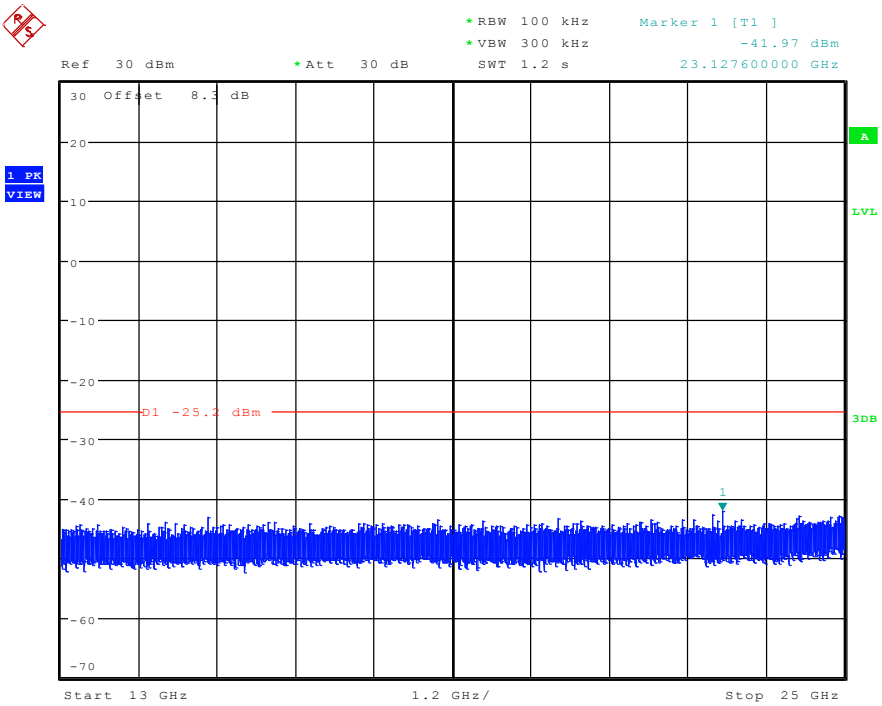

BLE_HCH_Graphs	
Pref/BLE/HCH	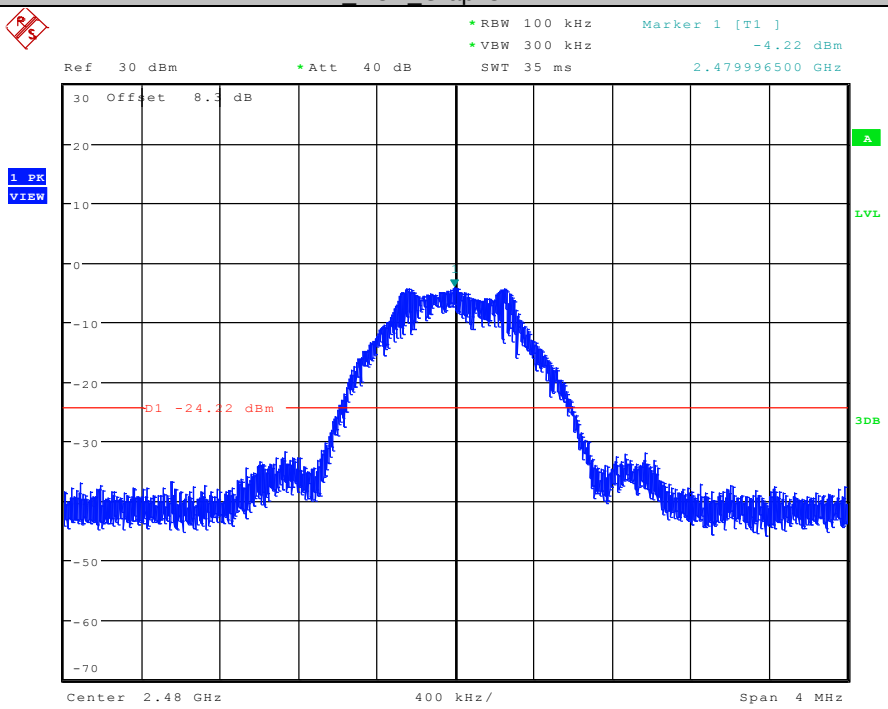
Puw/BLE/HCH	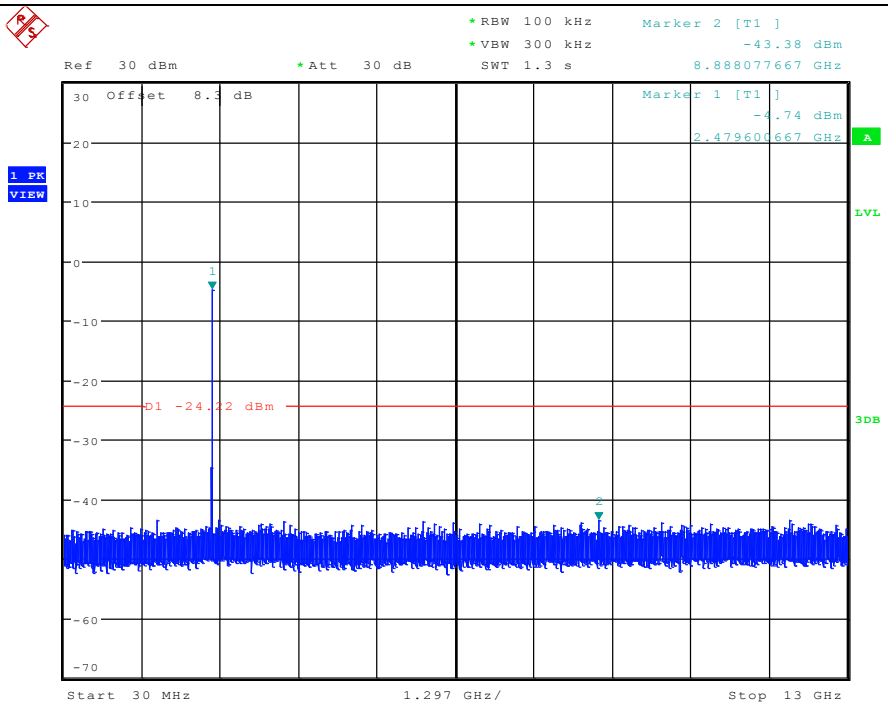

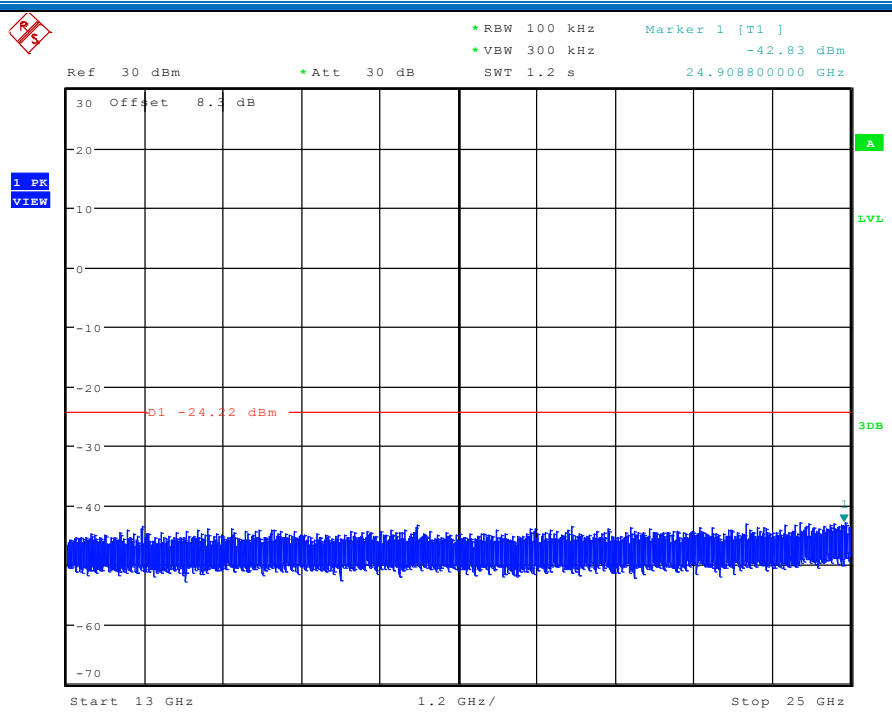

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

6.8 Radiated Spurious Emission & Restricted bands

6.8.1 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205
Test Method:	ANSI C63.10 2013
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Setup:	

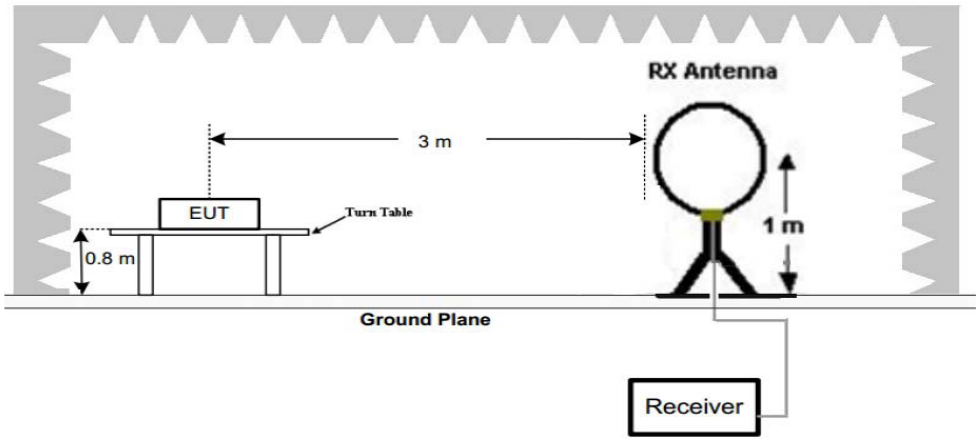

Figure 1. Below 30MHz

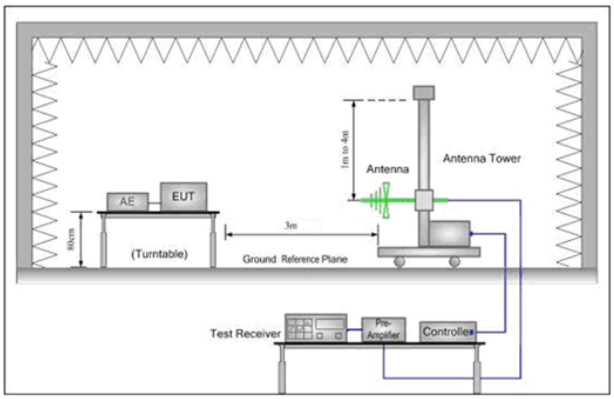

Figure 2. 30MHz to 1GHz

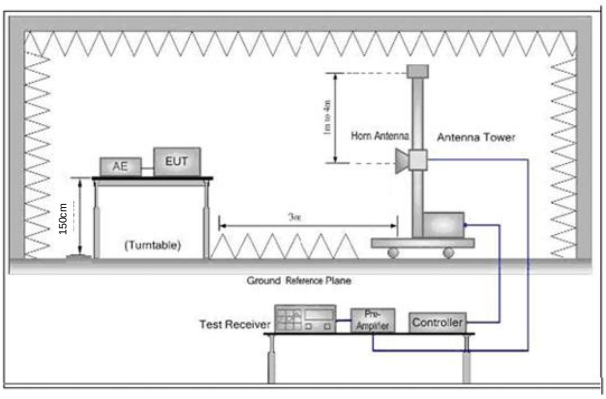

Figure 3. Above 1 GHz

Test Procedure:	a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass

Radiated Emission below 1GHz		
30MHz~1GHz, the worst case		
Test mode:	Transmitting mode(lowest channel)	Vertical

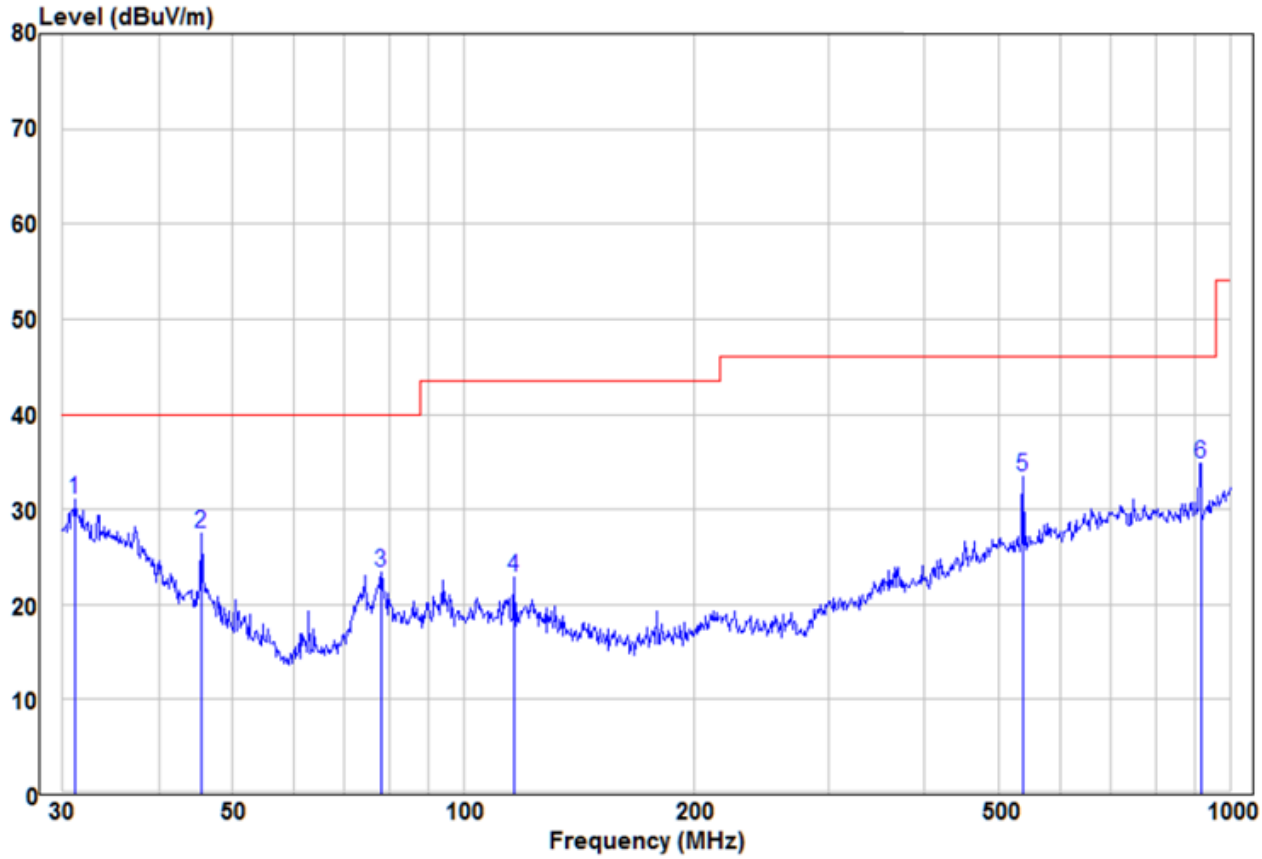

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	31.18	12.32	18.82	31.14	40.00	-8.86	Peak	VERTICAL
2	45.53	15.82	11.62	27.44	40.00	-12.56	Peak	VERTICAL
3	78.14	13.84	9.54	23.38	40.00	-16.62	Peak	VERTICAL
4	116.54	12.34	10.55	22.89	43.50	-20.61	Peak	VERTICAL
5	537.59	16.09	17.38	33.47	46.00	-12.53	Peak	VERTICAL
6	916.07	13.93	20.82	34.75	46.00	-11.25	Peak	VERTICAL

30MHz~1GHz, the worst case		
Test mode:	Transmitting mode (lowest channel)	Horizontal

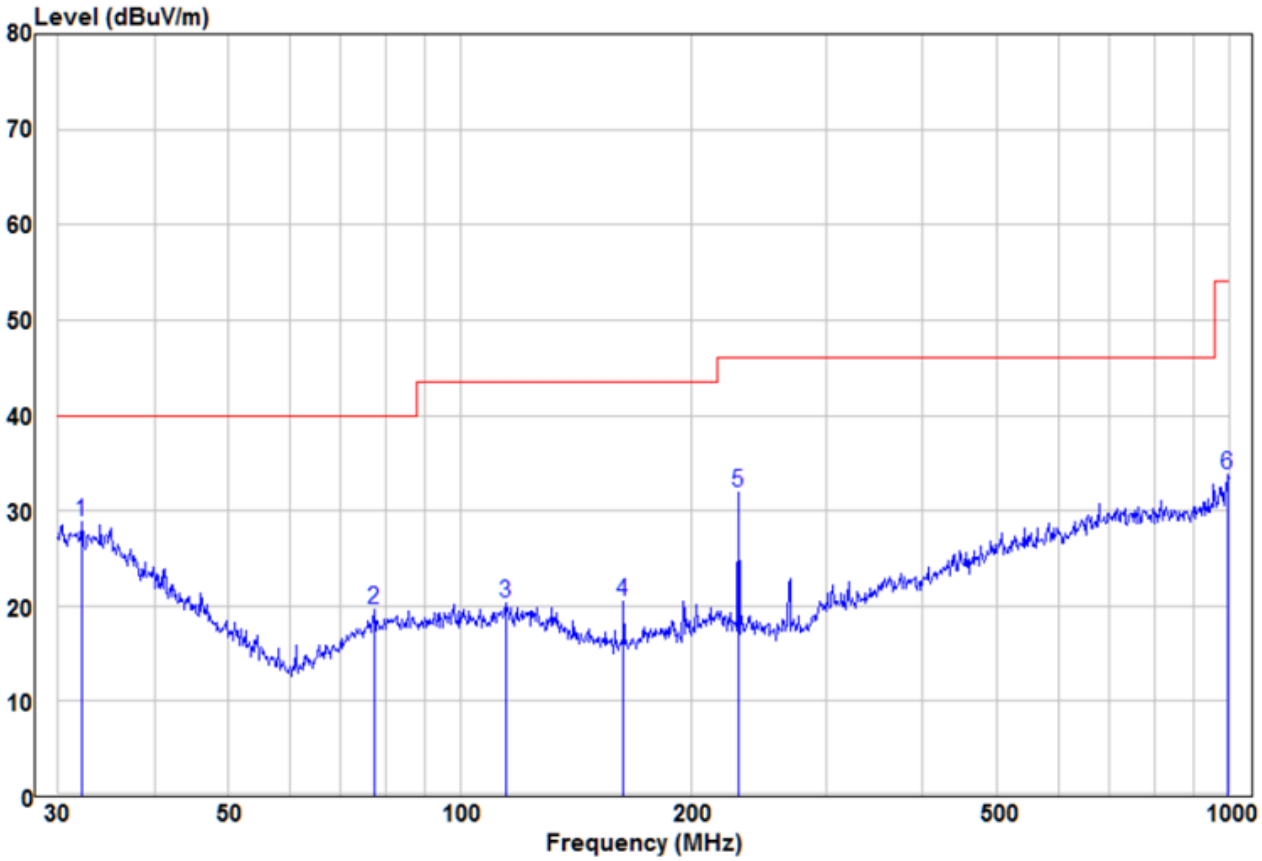

		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	pp	32.18	10.05	18.74	28.79	40.00	-11.21	Peak	HORIZONTAL
2		77.32	10.15	9.40	19.55	40.00	-20.45	Peak	HORIZONTAL
3		114.51	9.81	10.46	20.27	43.50	-23.23	Peak	HORIZONTAL
4		163.18	12.81	7.74	20.55	43.50	-22.95	Peak	HORIZONTAL
5		230.10	23.12	8.81	31.93	46.00	-14.07	Peak	HORIZONTAL
6		996.50	10.90	22.83	33.73	54.00	-20.27	Peak	HORIZONTAL

Transmitter Emission above 1GHz

Worse case mode:		GFSK		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V
2390	**55.38**	**-9.2**	**46.18**	**74**	**-27.82**	**Peak**	**H**
2400	54.93	-9.39	45.54	74	-28.46	Peak	H
4804	52.23	-4.33	47.90	74	-26.10	Peak	H
7206	48.31	1.01	49.32	74	-24.68	Peak	H
2390	**52.31**	**-9.2**	**43.11**	**74**	**-30.89**	**Peak**	**V**
2400	51.98	-9.39	42.59	74	-31.41	Peak	V
4804	54.52	-4.33	50.19	74	-23.81	Peak	V
7206	50.53	1.01	51.54	74	-22.46	Peak	V

Worse case mode:		GFSK		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V
4880	53.05	-4.11	48.94	74	-25.06	peak	H
7320	51.14	1.51	52.65	74	-21.35	peak	H
4880	52.75	-4.11	48.64	74	-25.36	peak	V
7320	48.98	1.51	50.49	74	-23.51	peak	V

Worse case mode:		GFSK		Test channel:		Highest	
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V
2483.5	**53.96**	**-9.29**	**44.67**	**74**	**-29.33**	**Peak**	**H**
4960	48.91	-4.04	44.87	74	-29.13	Peak	H
7440	49.45	1.57	51.02	74	-22.98	Peak	H
2483.5	**52.98**	**-9.29**	**43.69**	**74**	**-30.31**	**Peak**	**V**
4960	50.62	-4.04	46.58	74	-27.42	Peak	V
7440	49.63	1.57	51.20	74	-22.80	Peak	V

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

7 Photographs - EUT Test Setup

7.1 Radiated Spurious Emission

9kHz~30MHz:

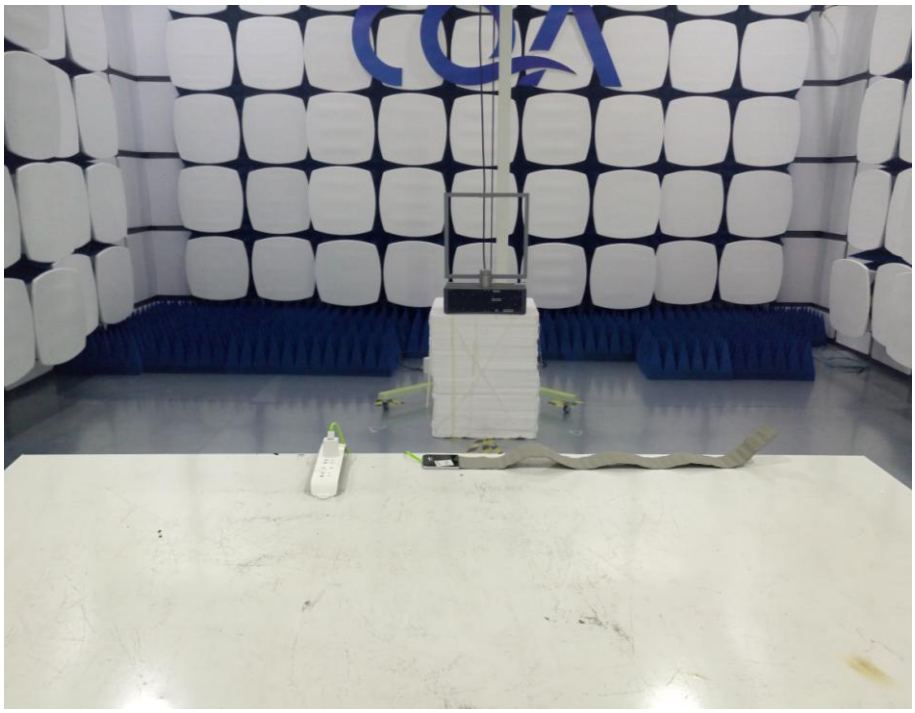

30MHz~1GHz:

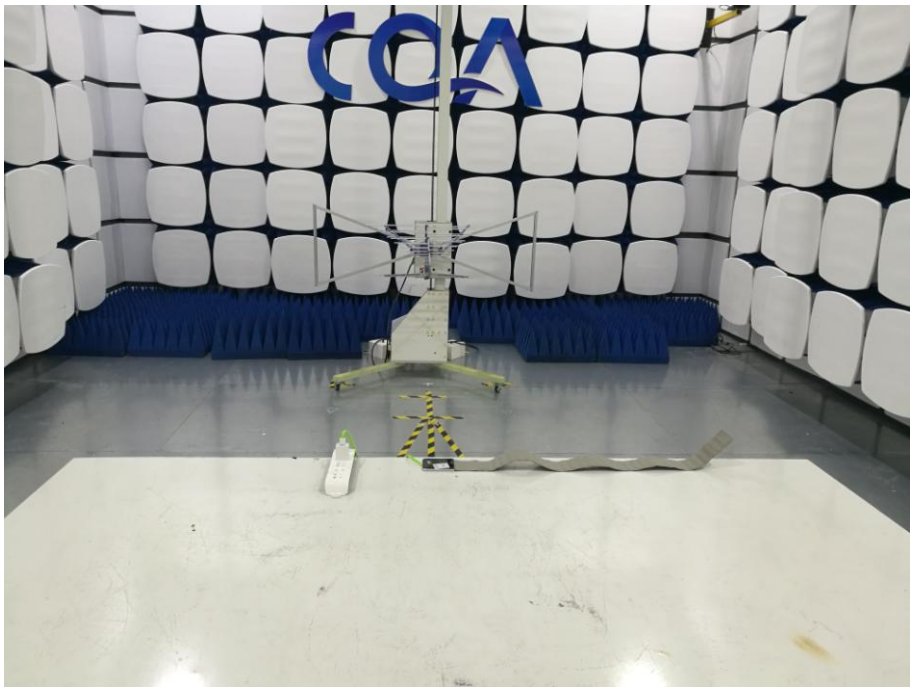

Above 1GHz:

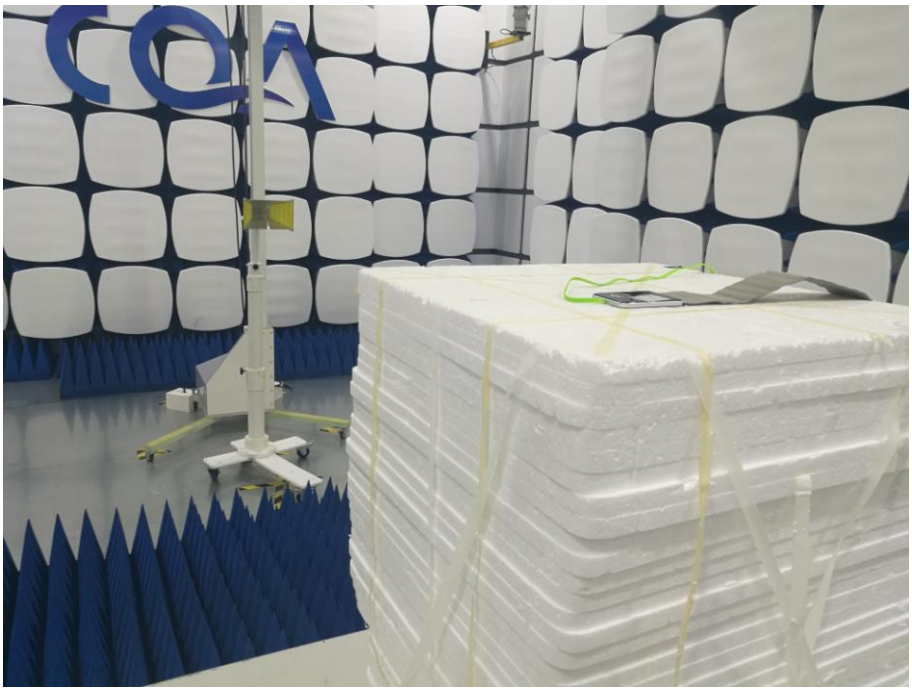

8 Photographs - EUT Constructional Details

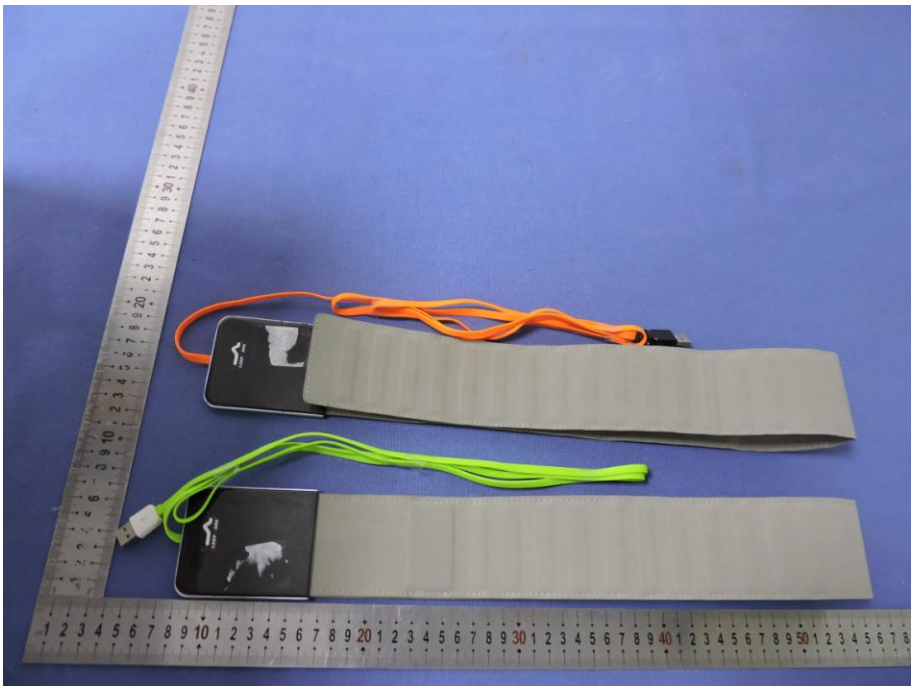

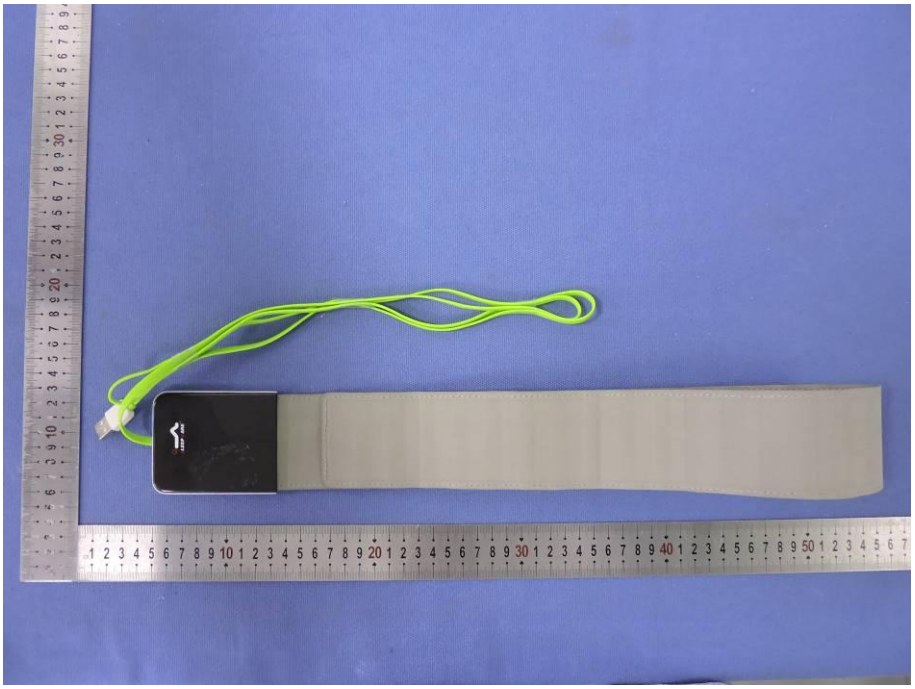

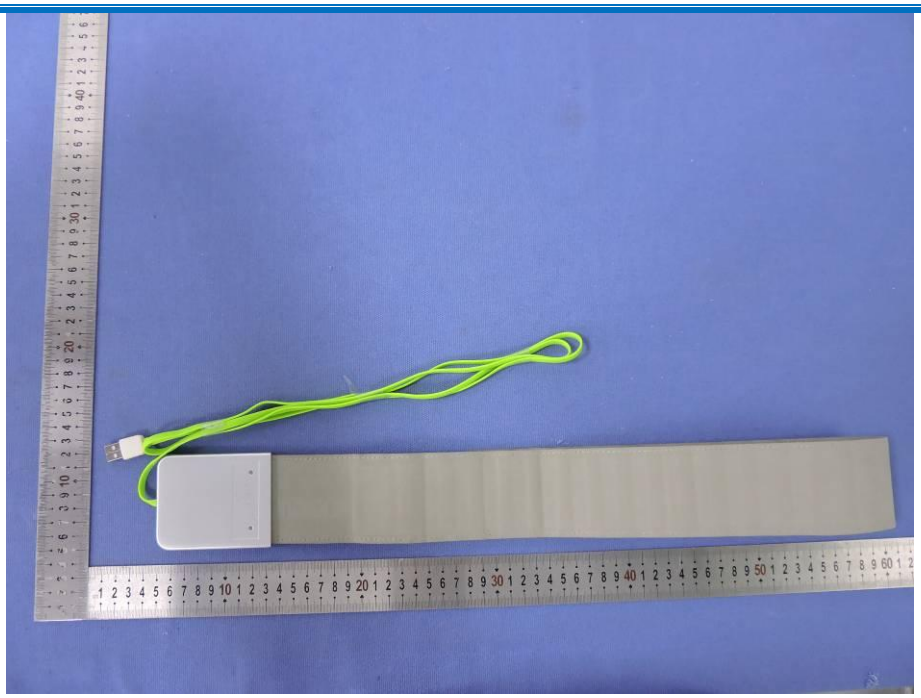

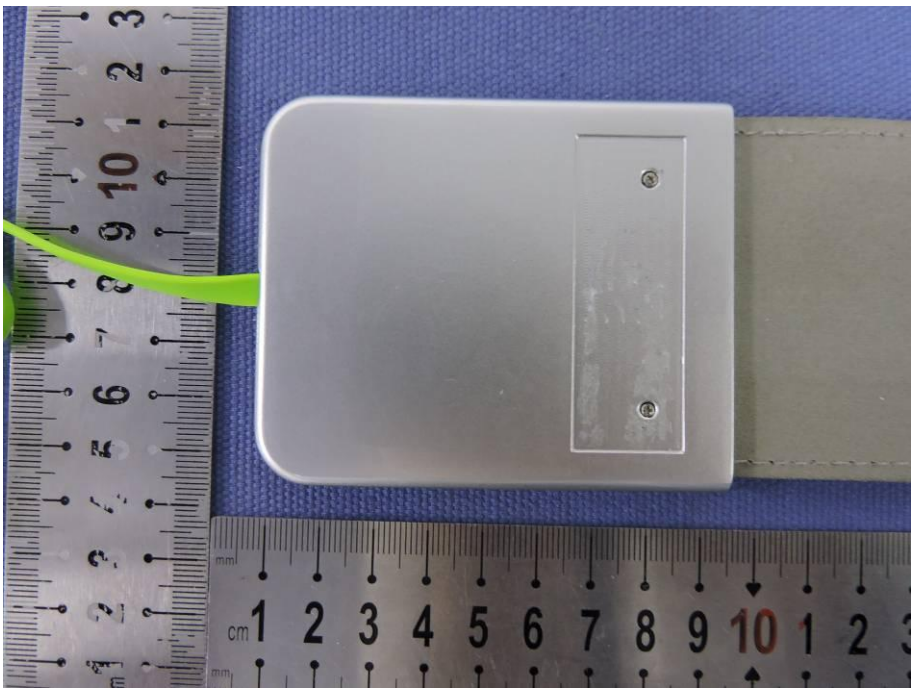

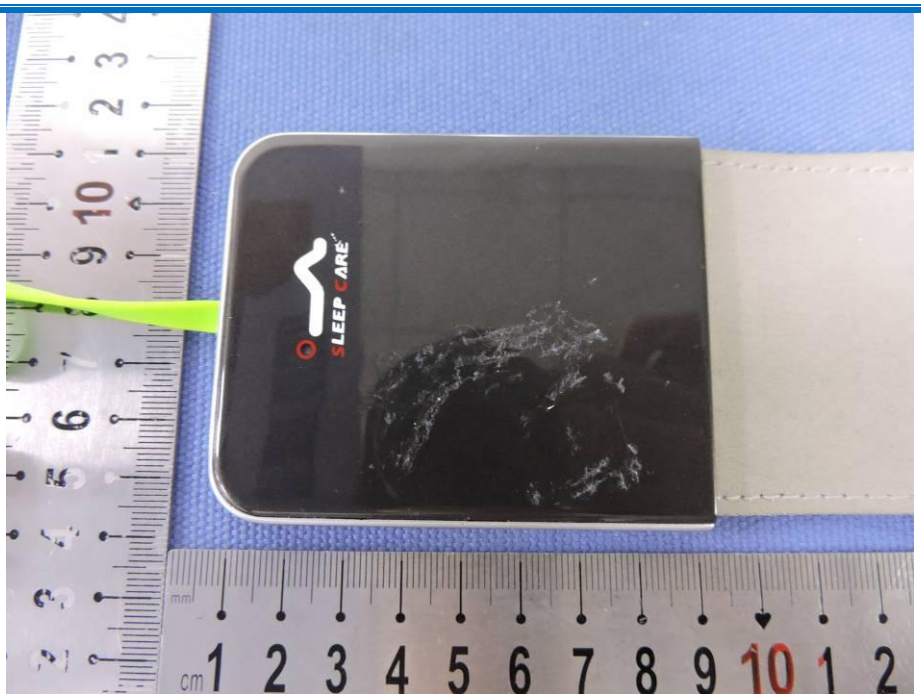
SLEEP CARE
cm 1 2 3 4 5 6 7 8 9 10 1 2

cm 1 2 3 4 5 6 7 8 9

SLEEP CARE
mm
cm 1 2 3 4 5 6 7

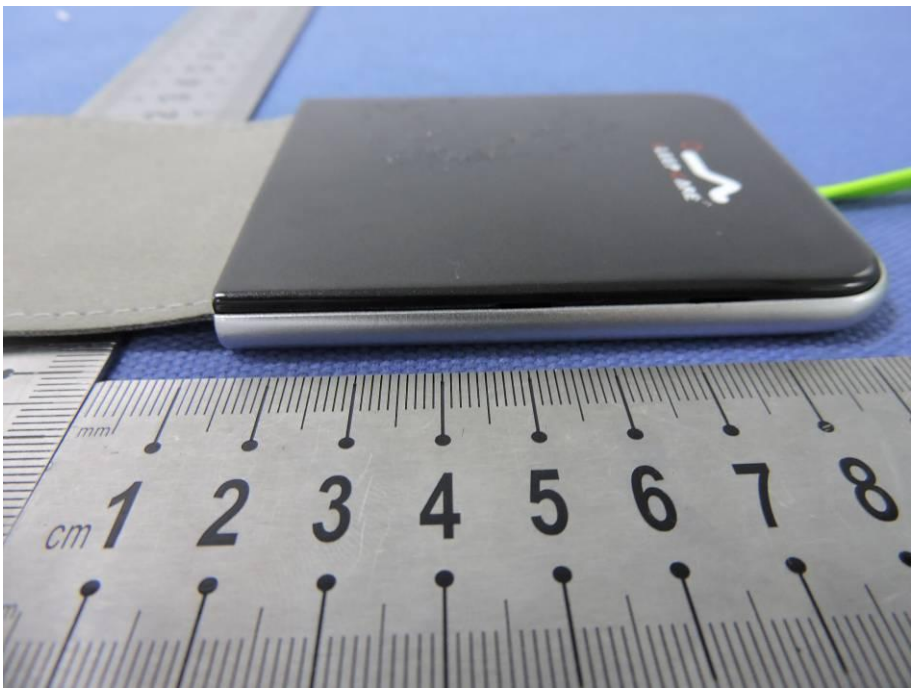
mm
cm 1 2 3 4 5 6 7 8

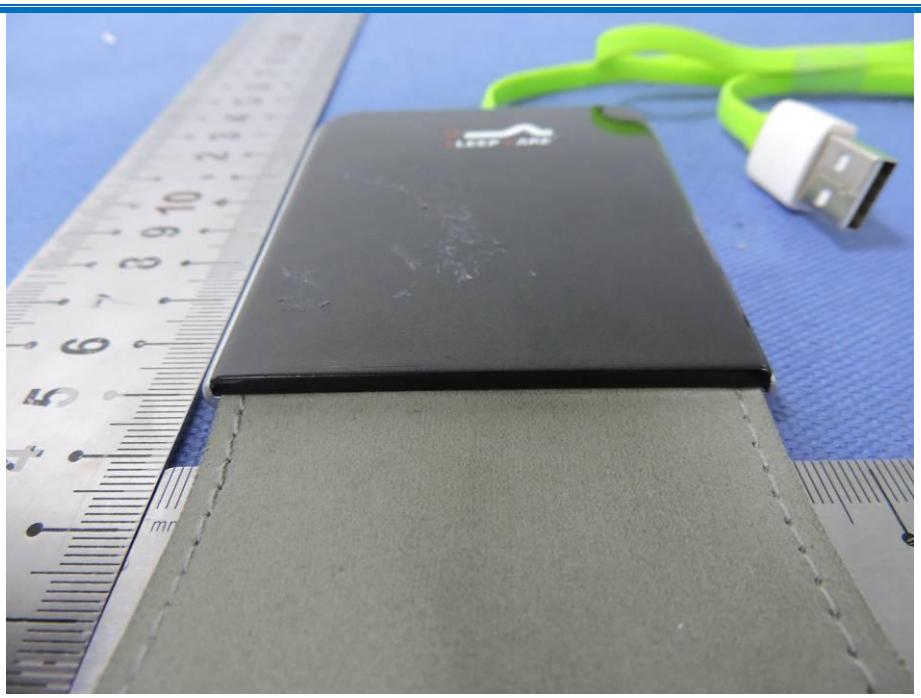

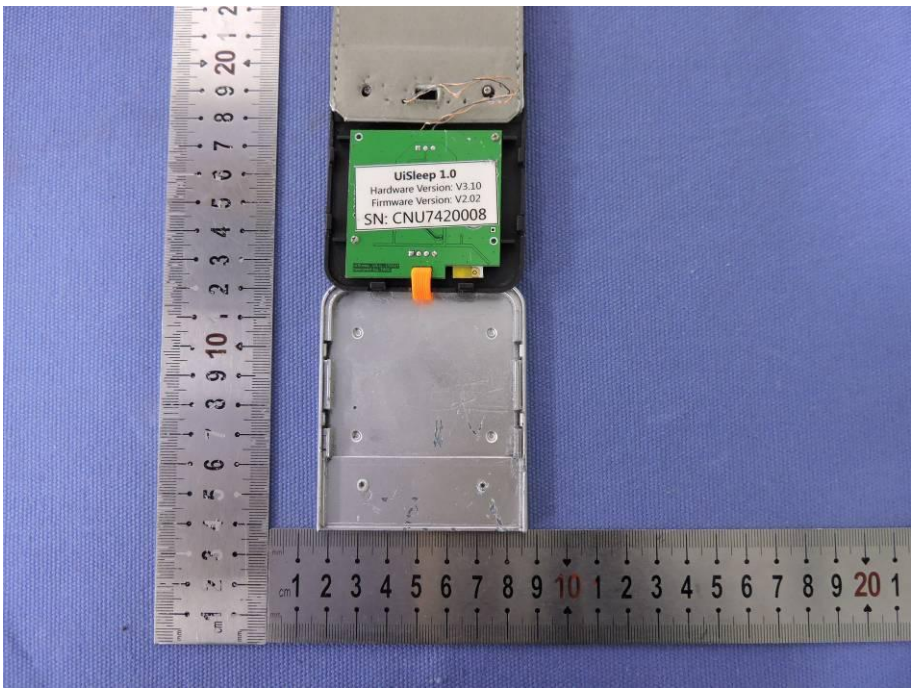
UiSleep 1.0
Hardware Version: V3.10
Firmware Version: V2.02
SN: CNU7420008

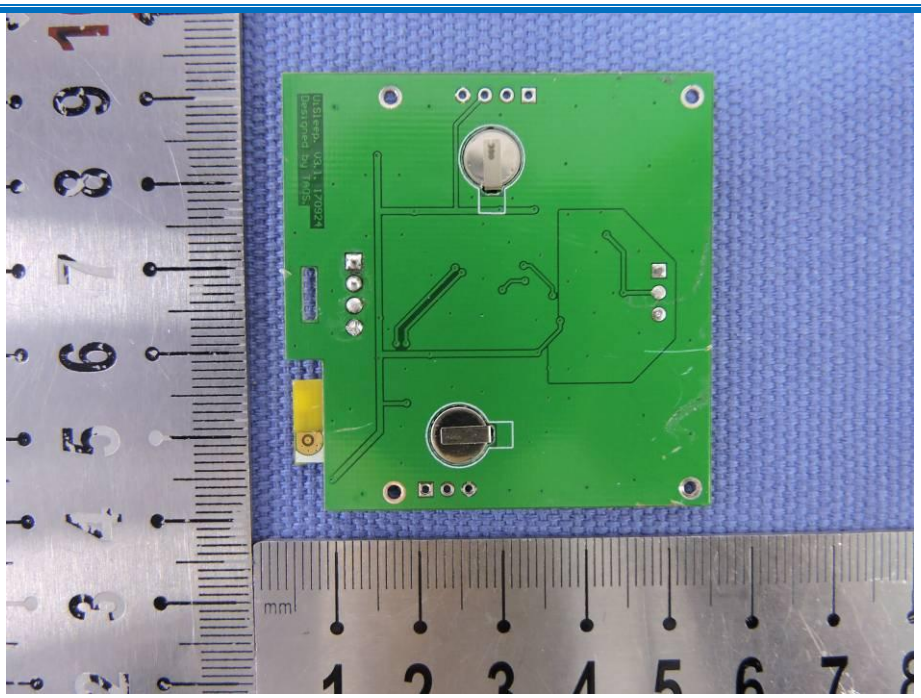

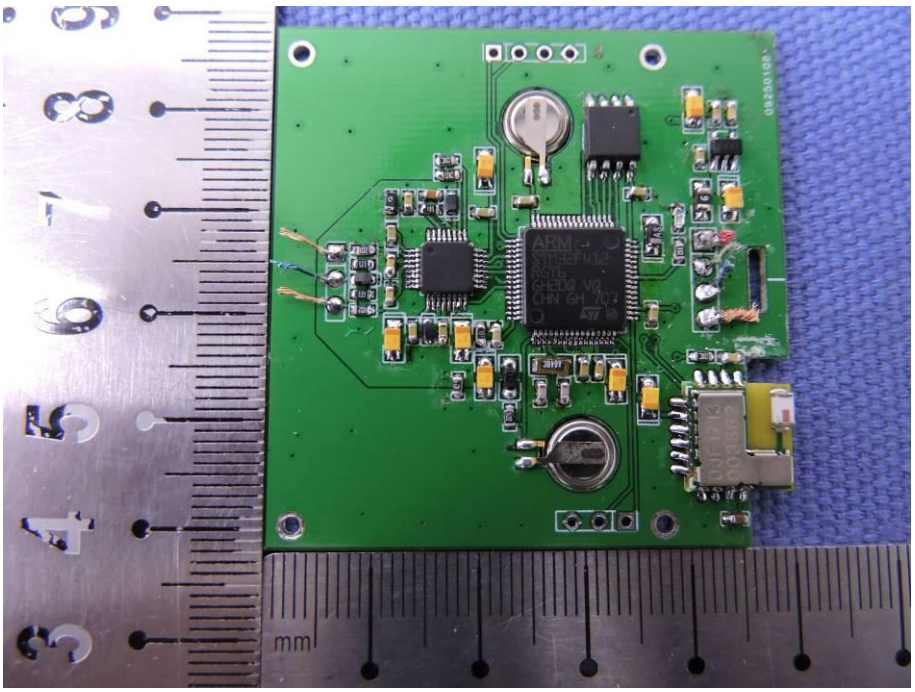

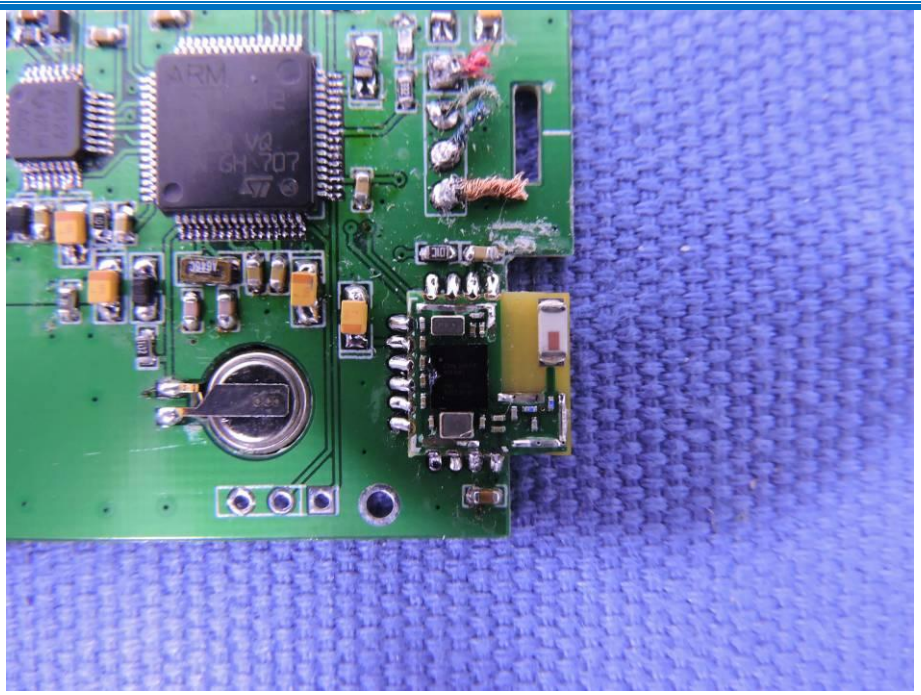

END OF THE REPORT