


Test Mode: 802.11ac VHT20





Test Mode:802.11ac VHT20 5260MHz Chain0





Test Mode:802.11ac VHT20 5280MHz Chain0



Test Mode:802.11ac VHT20 5320MHz Chain0

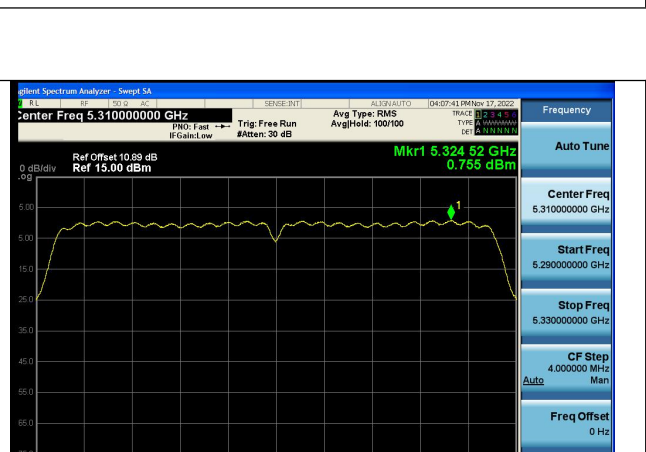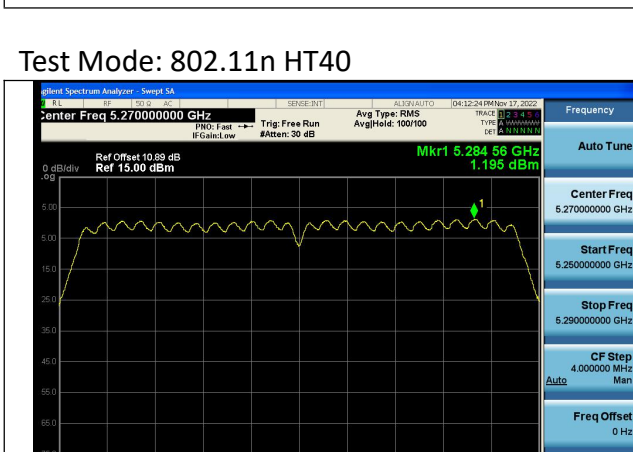


Test Mode: 802.11n HT40

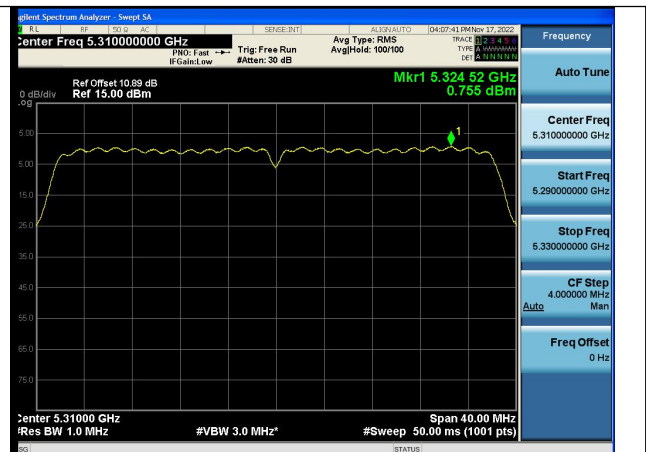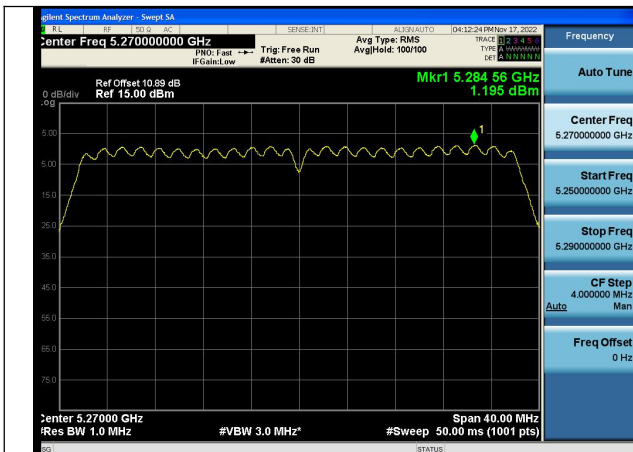


Test Mode:802.11n HT40 5270MHz Chain0

Test Mode:802.11n HT40 5310MHz Chain0

Test Mode: 802.11ac VHT40

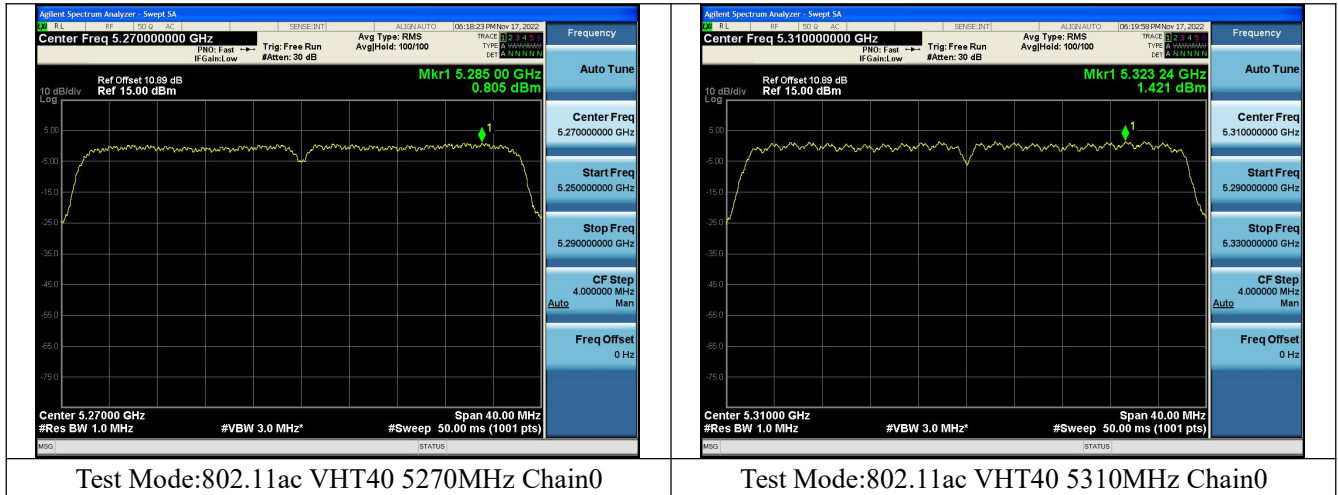

Test Mode: 802.11ac VHT80

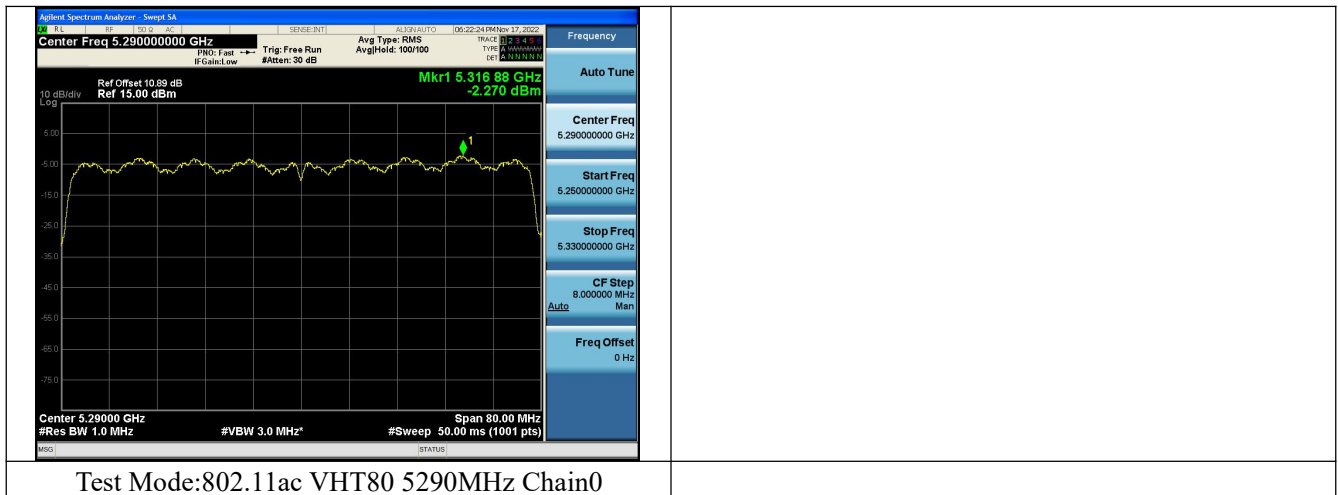


Dynamic Frequency Selection DESCRIPTION OF Master Device

The Master Device is a SKSpruce Technologies Co., Ltd., Indoor Access Point, FCC ID: 2AHKT-WIA3300-20. The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -60 dBm.

Radar Waveform Calibration Result


<20MHz / 5320 MHz> Radar Type 0

Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

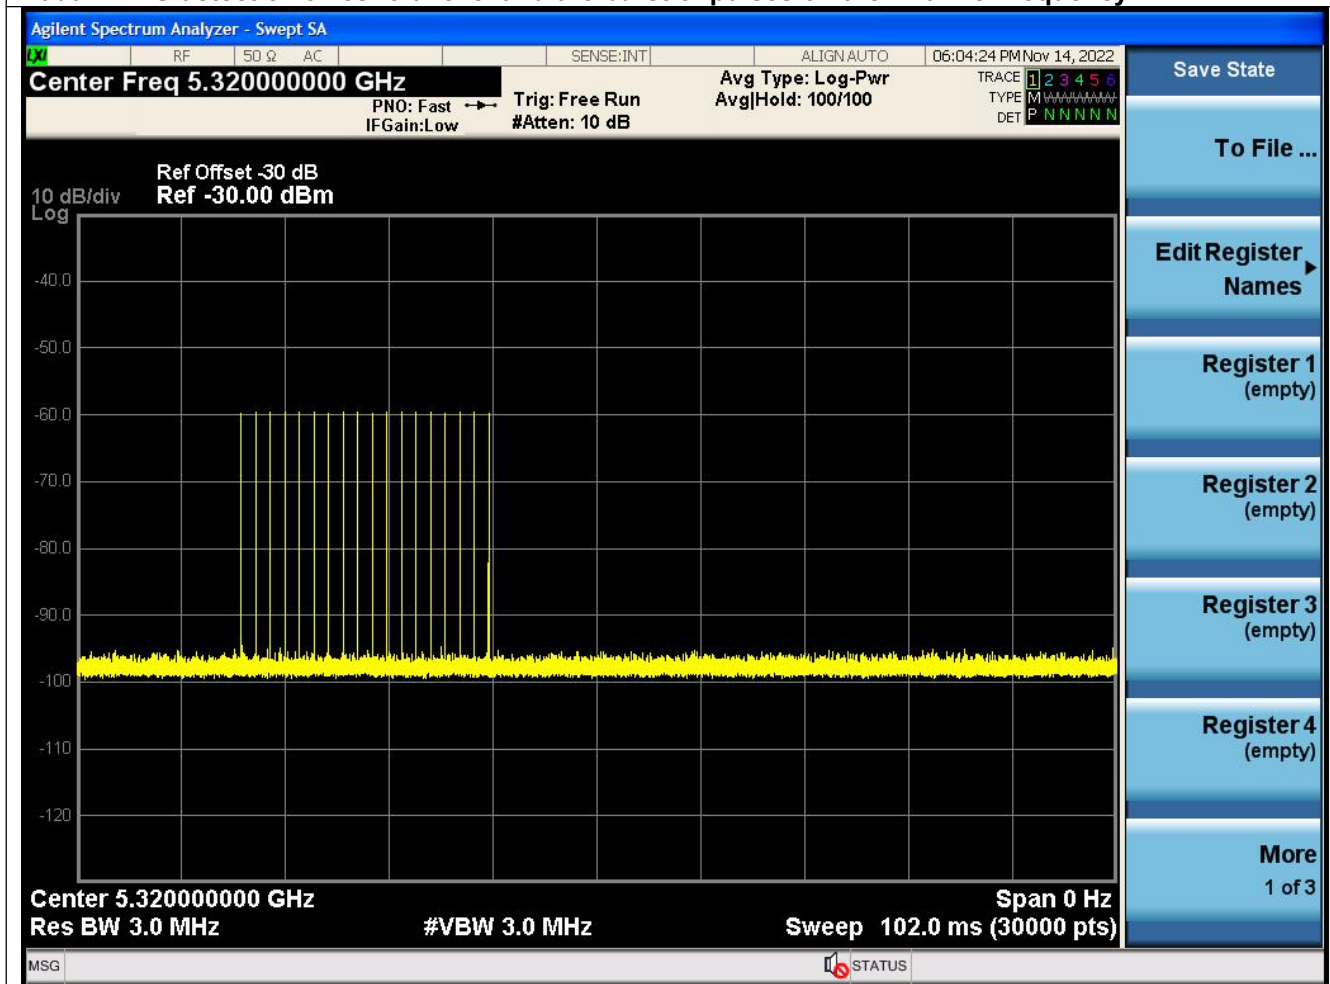


<80MHz / 5290 MHz> Radar Type 0

Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

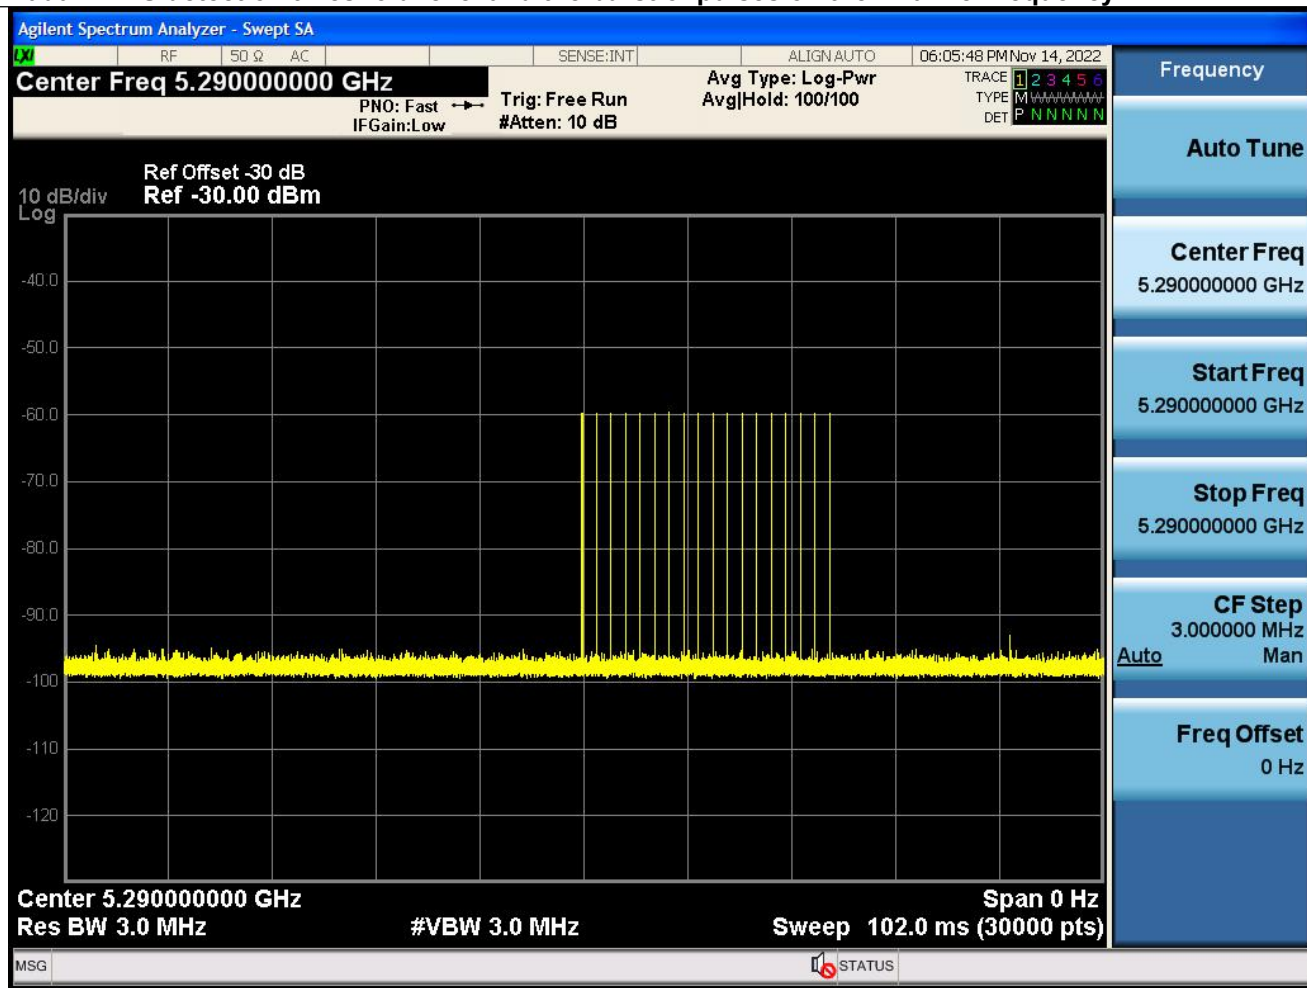

Data Traffic and Noise Floor Plots

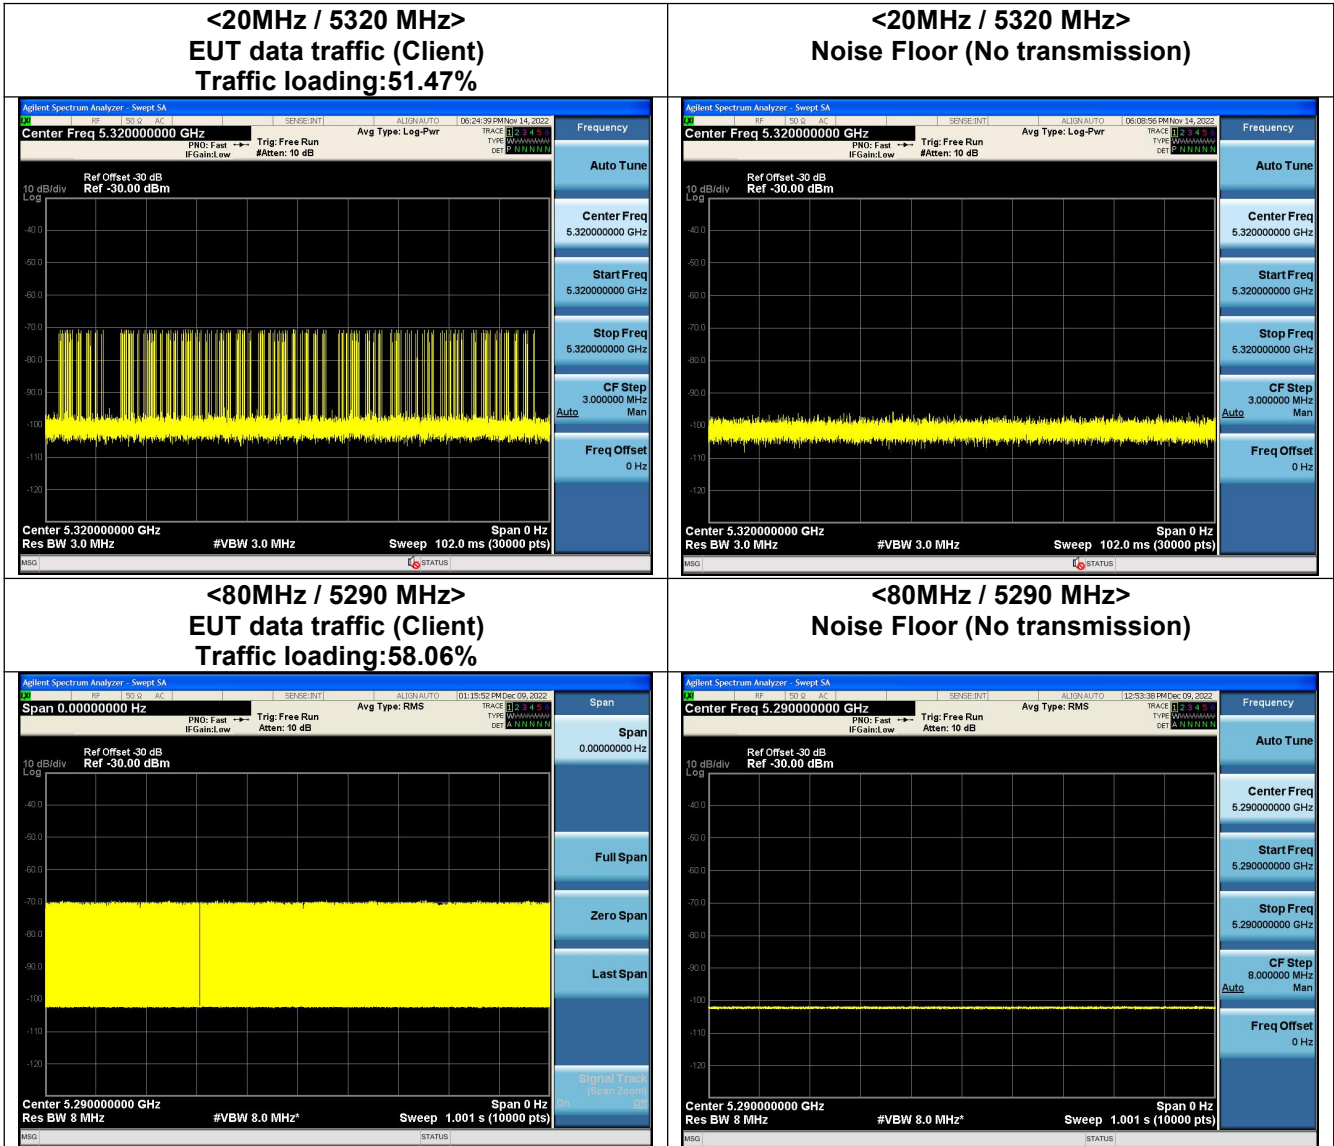

Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test


Frequency	Test Item	Test Result	Limit	Pass/Fail
5300MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	201.2ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass
5290MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	201.2ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass

Note*: We notice clearly that “Channel Move Time” is less than 10s from the figure. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test Plots

<20MHz / 5320 MHz>

Channel Move Time & Channel Closing Transmission Time

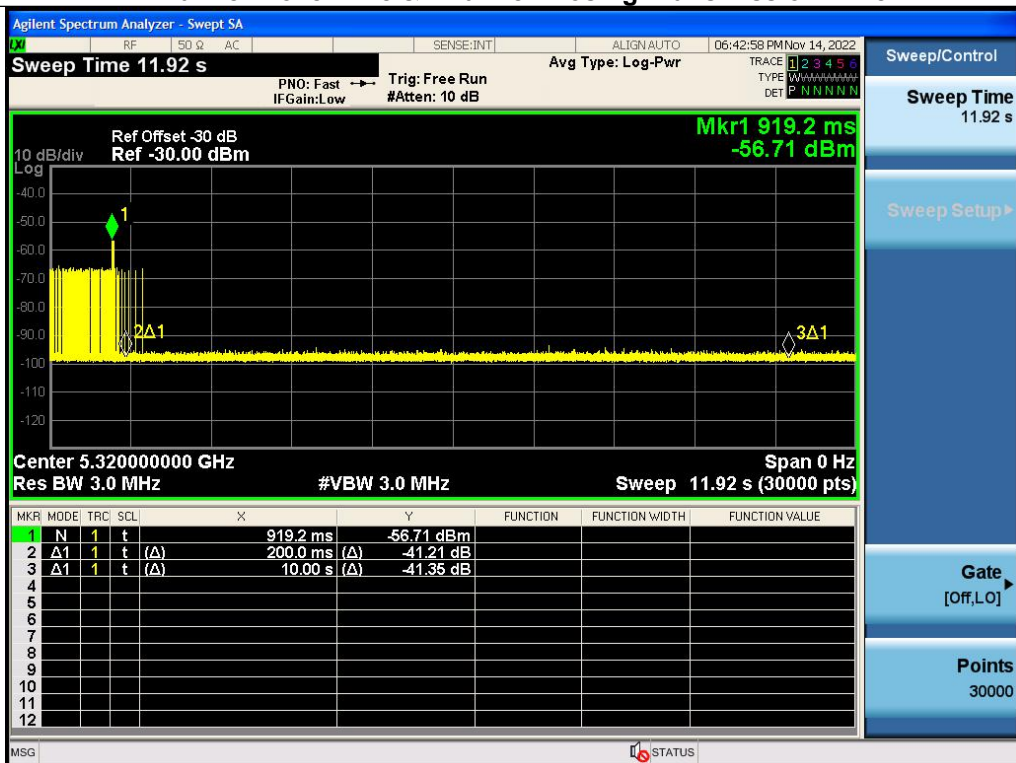



Non-Occupancy Period

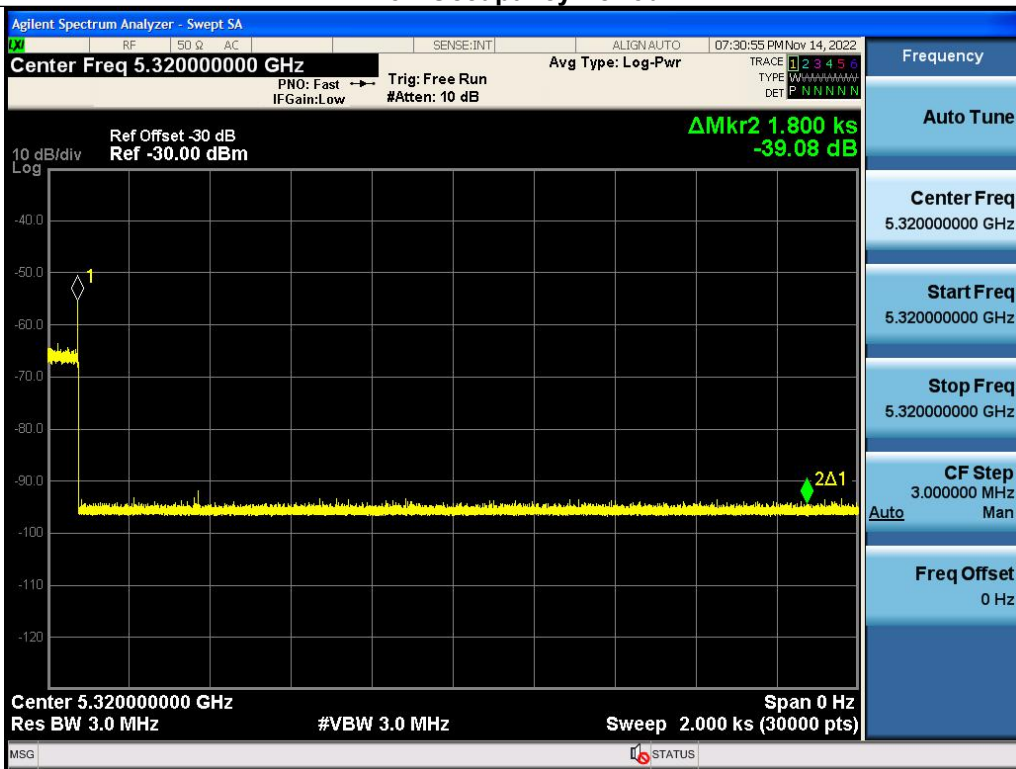

Note:

Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time (200 + 1.2 ms) = 200 + Number of beacon after 200ms(3) X Dwell (0.4 ms) < 260ms

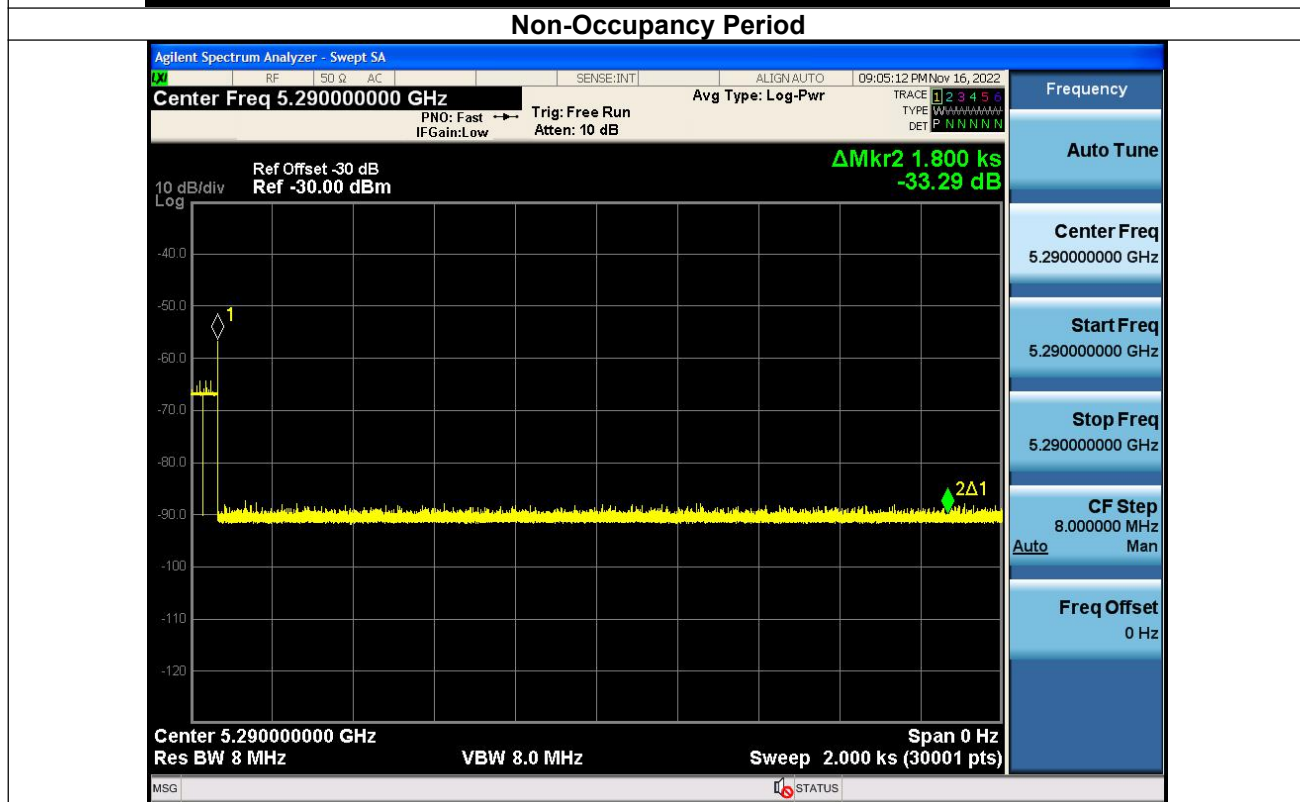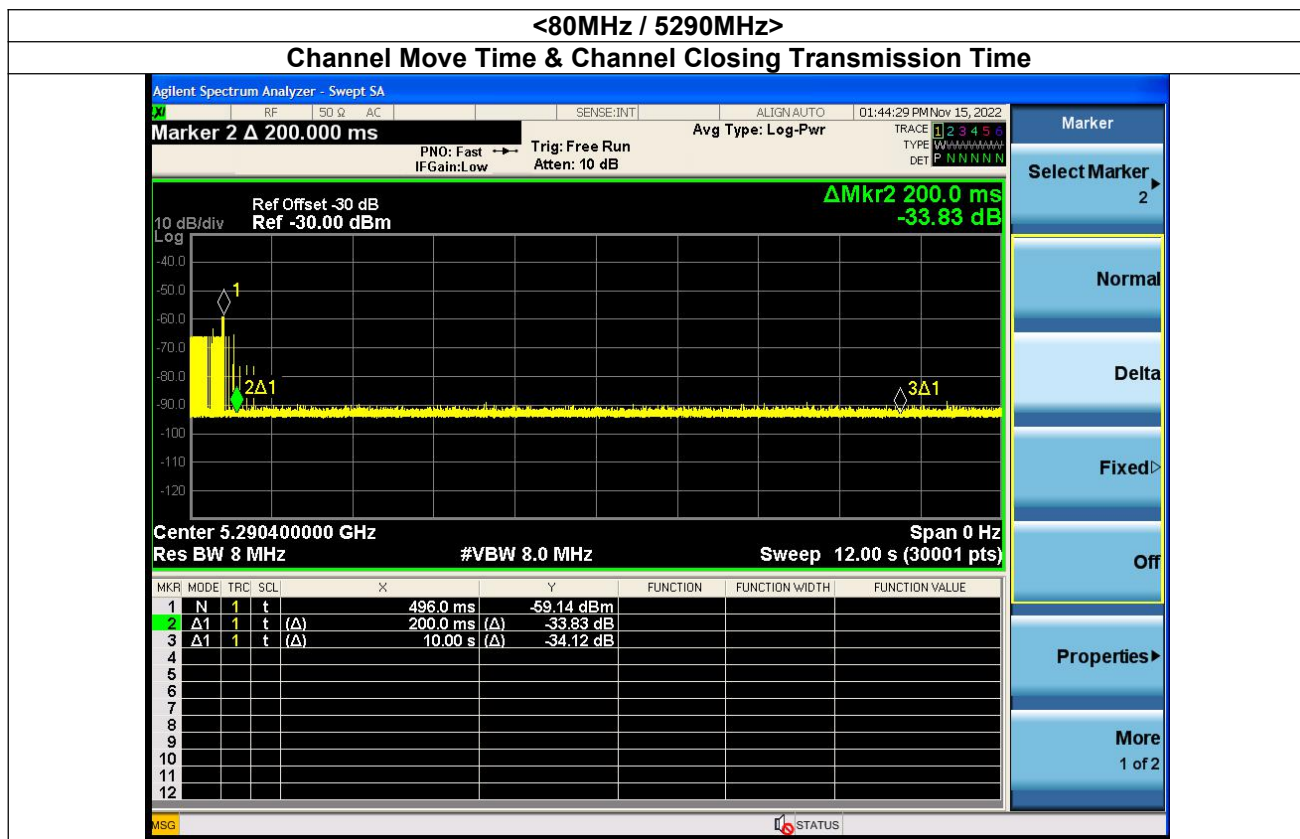

Note:

Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)
Channel Closing Transmission Time (200+1.2 ms) = 200 + Number of beacon after 200ms(3) X Dwell (0.4 ms) < 260ms