

RF TEST REPORT

For

Shenzhen KingAnDa Technology Development Co., Ltd.

Product Name: MX01

Test Model(s): MX01

Report Reference No. : DACE251209020RL001

FCC ID : 2AOZM-MX01

Applicant's Name : Shenzhen KingAnDa Technology Development Co., Ltd.

Address : East Block NO. 2, Shangxue Industrial Zone Bantian Street, Longgang District Shenzhen, China

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

Address : 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Test Specification Standard : 47 CFR Part 15.247


Date of Receipt : December 9, 2025

Date of Test : December 9, 2025 to December 18, 2025

Data of Issue : December 18, 2025

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample



Apply for company information

Applicant's Name	:	Shenzhen KingAnDa Technology Development Co., Ltd.
Address	:	East Block NO. 2, Shangxue Industrial Zone Bantian Street, Longgang District Shenzhen, China
Product Name	:	MX01
Test Model(s)	:	MX01
Test Specification Standard(s)	:	47 CFR Part 15.247

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Amy Zhu / Test Engineer

December 18, 2025

Supervised by:

Stone Yin / Project Engineer

December 18, 2025

Approved by:

Tom Chen / Manager

December 18, 2025

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE251209020RL001	December 18, 2025

CONTENTS

1	TEST SUMMARY	6
1.1	TEST STANDARDS	6
1.2	SUMMARY OF TEST RESULT	6
2	GENERAL INFORMATION.....	7
2.1	CLIENT INFORMATION	7
2.2	DESCRIPTION OF DEVICE (EUT).....	7
2.3	DESCRIPTION OF TEST MODES.....	7
2.4	DESCRIPTION OF SUPPORT UNITS	8
2.5	EQUIPMENTS USED DURING THE TEST	9
2.6	STATEMENT OF THE MEASUREMENT UNCERTAINTY	11
3	EVALUATION RESULTS (EVALUATION).....	12
3.1	ANTENNA REQUIREMENT.....	12
3.1.1	Conclusion:.....	12
4	RADIO SPECTRUM MATTER TEST RESULTS (RF).....	13
4.1	6DB BANDWIDTH.....	13
4.1.1	E.U.T. Operation:.....	13
4.1.2	Test Setup Diagram:.....	13
4.1.3	Test Data:	14
4.2	MAXIMUM CONDUCTED OUTPUT POWER	15
4.2.1	E.U.T. Operation:.....	15
4.2.2	Test Setup Diagram:.....	15
4.2.3	Test Data:	16
4.3	POWER SPECTRAL DENSITY	17
4.3.1	E.U.T. Operation:.....	17
4.3.2	Test Setup Diagram:.....	17
4.3.3	Test Data:	17
4.4	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	18
4.4.1	E.U.T. Operation:.....	18
4.4.2	Test Setup Diagram:.....	18
4.4.3	Test Data:	18
4.5	BAND EDGE EMISSIONS (RADIATED)	19
4.5.1	E.U.T. Operation:.....	19
4.5.2	Test Data:	20
4.6	EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz)	24
4.6.1	E.U.T. Operation:.....	25
4.6.2	Test Data:	26
4.7	EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz).....	28
4.7.1	E.U.T. Operation:.....	29
4.7.2	Test Data:	30
5	TEST SETUP PHOTOS	36
6	PHOTOS OF THE EUT	37
1.	-6DB BANDWIDTH	40
2.	DUTY CYCLE.....	44
3.	PEAK OUTPUT POWER	48

4. POWER SPECTRAL DENSITY	52
5. BANDEDGE.....	56
6. SPURIOUS EMISSION	60

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.247		47 CFR 15.203	Pass
6dB Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : Shenzhen KingAnDa Technology Development Co., Ltd.
Address : East Block NO. 2, Shangxue Industrial Zone Bantian Street, Longgang District Shenzhen, China

Manufacturer : Shenzhen KingAnDa Technology Development Co., Ltd.
Address : East Block NO. 2, Shangxue Industrial Zone Bantian Street, Longgang District Shenzhen, China

2.2 Description of Device (EUT)

Product Name:	MX01
Model/Type reference:	MX01
Trade Mark:	N/A
Power Supply:	DC 3V by battery
Operation Frequency:	2402MHz to 2480MHz
Number of Channels:	40
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	2.34dBi
Bluetooth Version:	V5.0
Hardware Version:	V1.0
Software Version:	V1.0

2.3 Description of Test Modes

No	Title	Description
TM1	TX mode	Keep the EUT in TX mode
Test Environment		Normal Voltage(DC): 3V

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the

middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	BLE(1Mbps, 2Mbps)
Lowest channel	2402MHz
Middle channel	2440MHz
Highest channel	2480MHz

2.4 Description of Support Units

The EUT was tested as an independent device.

2.5 Equipments Used During The Test

6dB Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information Technology(shenzhen) Co.,Ltd.	RTS-01	V1.0.0	/	/
RF Sensor Unit	Tachoy Information Technology(shenzhen) Co.,Ltd.	TR1029-2	000001	/	/
Wideband radio communication tester	R&S	CMW500	113410	2025-04-25	2026-04-24
Vector Signal Generator	Keysight	N5181A	MY50143455	2025-12-02	2026-12-01
Signal Generator	Keysight	N5182A	MY48180415	2025-12-02	2026-12-01
Spectrum Analyzer	Keysight	N9020A	MY53420323	2025-12-02	2026-12-01
Spectrum Analyzer	Keysight	N9020A	MY55338111	2025-09-16	2026-09-15

Emissions in frequency bands (above 1GHz)
Band edge emissions (Radiated)
Emissions in frequency bands (below 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	MF	MF-7802	/	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2024-04-26	2027-04-25
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2024-04-26	2027-04-25
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2025-04-28	2026-04-27
Cable(LF)#2	Schwarzbeck	/	/	2025-04-12	2026-04-11
Cable(LF)#1	Schwarzbeck	/	/	2025-04-17	2026-04-16
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2025-04-25	2026-04-24
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2025-04-25	2026-04-24
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2025-04-29	2026-04-28
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2025-04-29	2026-04-28
Wideband radio communication tester	R&S	CMW500	113410	2025-04-25	2026-04-24
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2025-04-18	2026-04-17
Test Receiver	R&S	ESCI 3	1166.5950K03-101431-Jq	2025-04-18	2026-04-17
Horn Antenna	Sunol Sciences	DRH-118	A091114	2025-04-21	2026-04-20
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2024-09-28	2026-09-27

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Occupied Bandwidth	±3.63%
RF conducted power	±0.733dB
RF power density	±0.234%
Conducted Spurious emissions	±1.98dB
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB


Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

3.1.1 Conclusion:

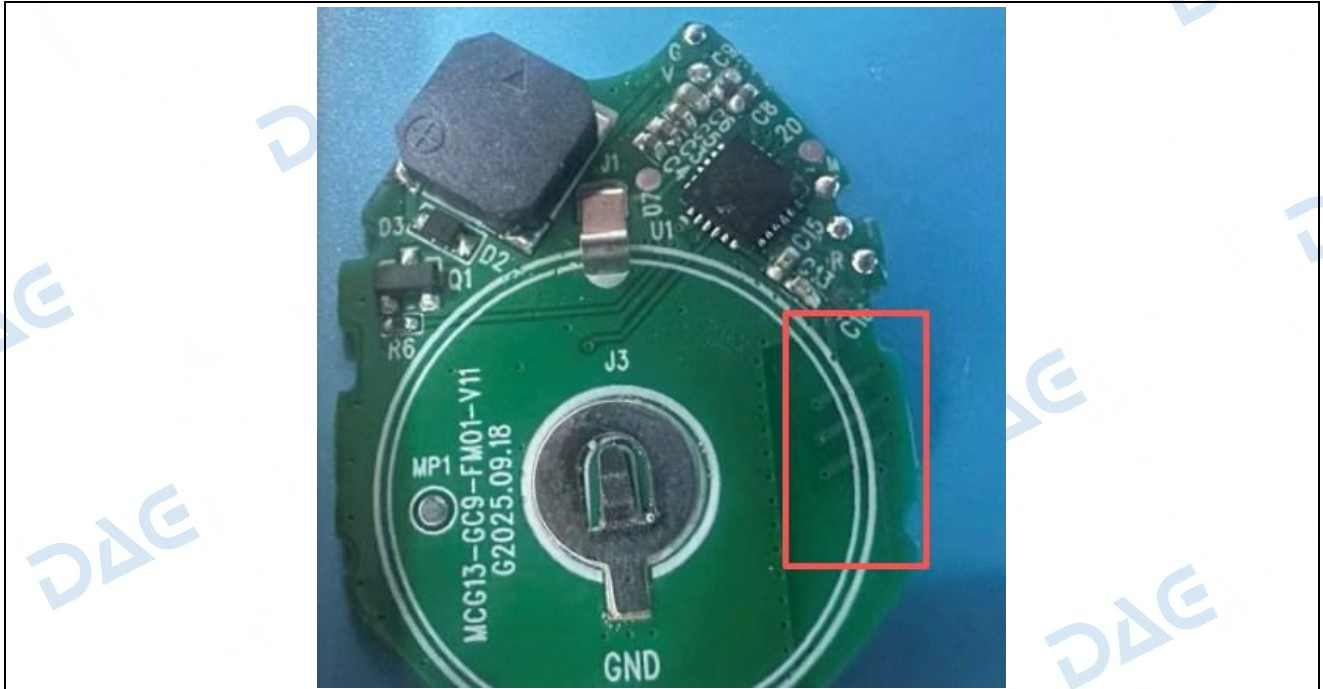

4 Radio Spectrum Matter Test Results (RF)

4.1 6dB Bandwidth


Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

4.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.3 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.1.2 Test Setup Diagram:

--

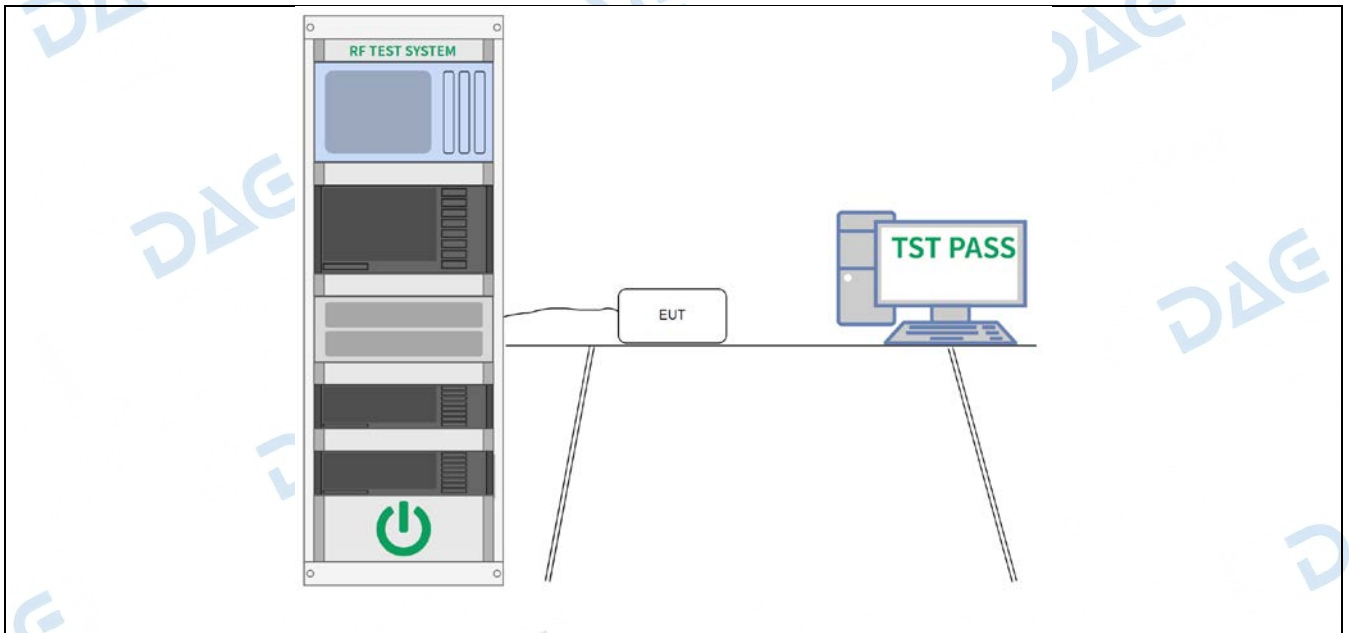

4.1.3 Test Data:

Please Refer to Appendix for Details.

4.2 Maximum Conducted Output Power


Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power Note: Per ANSI C63.10-2020, if there are two or more antennas, the conducted powers at Core 0, Core 1,..., Core i were first measured separately, as shown in the section above (this product only have one antenna). The measured values were then summed in linear power units then converted back to dBm. Per ANSI C63.10-2020 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used. For correlated unequal antenna gain Directional gain = $10 \cdot \log[(10G_1/20 + 10G_2/20 + \dots + 10G_N/20)^2 / NANT]$ dBi For completely uncorrelated unequal antenna gain Directional gain = $10 \cdot \log[(10G_1/10 + 10G_2/10 + \dots + 10G_N/10) / NANT]$ dBi Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i. = MIMO/CDD (i is the number of antennas) (#VALUE! mW + mW) = #VALUE! mW = dBm Sample e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi)

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.4 °C	Humidity:	46 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.2.2 Test Setup Diagram:

--

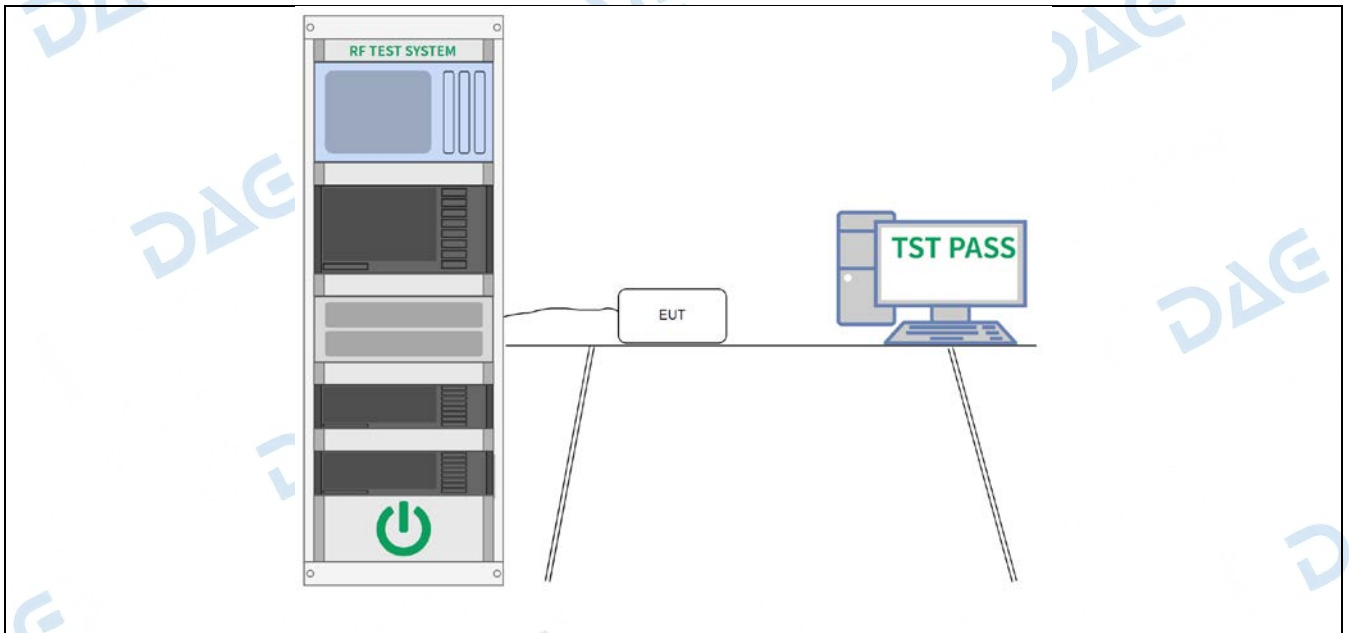

4.2.3 Test Data:

Please Refer to Appendix for Details.


4.3 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	46 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.3.2 Test Setup Diagram:

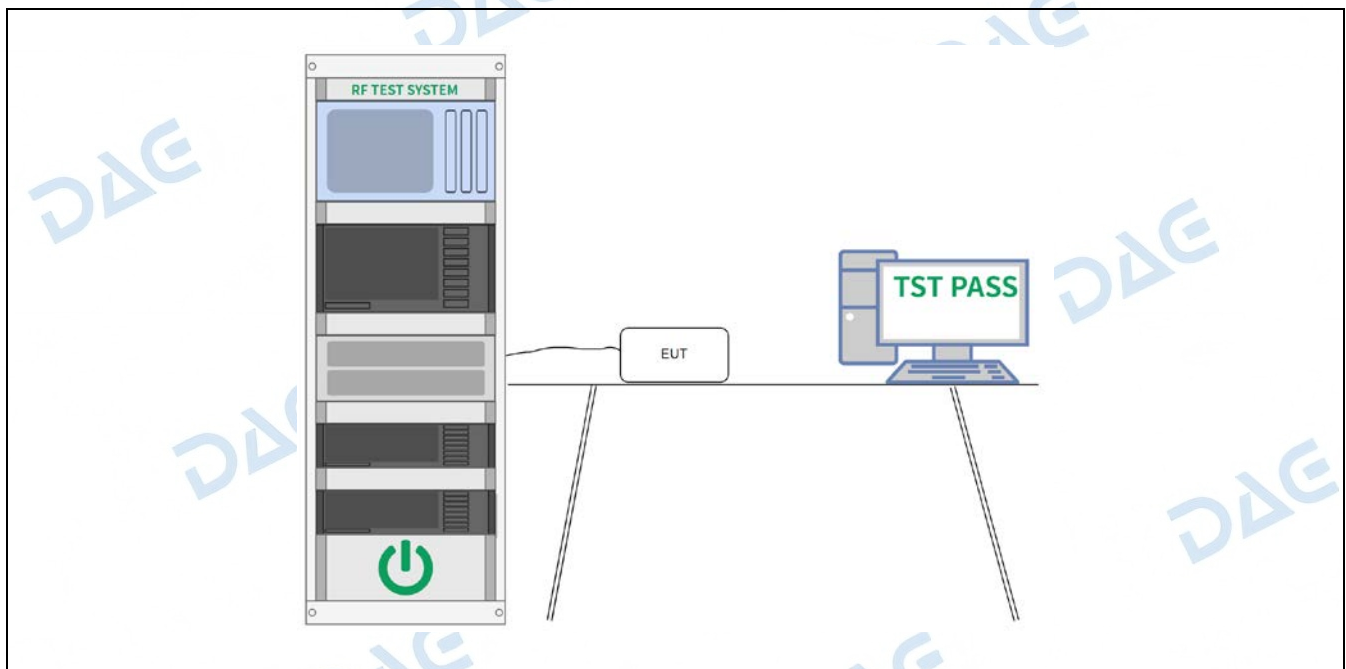

4.3.3 Test Data:

Please Refer to Appendix for Details.


4.4 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.7 °C	Humidity:	47 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.4.2 Test Setup Diagram:

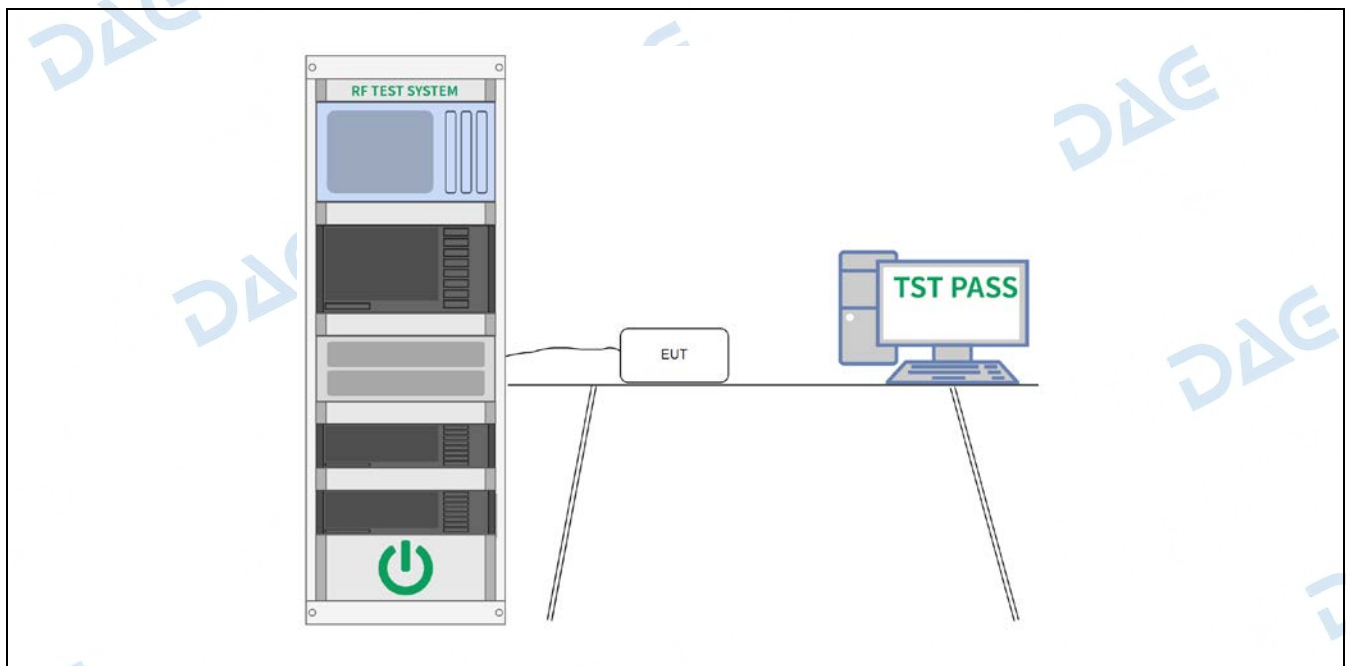

4.4.3 Test Data:

Please Refer to Appendix for Details.

4.5 Band edge emissions (Radiated)


Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.10.5.2		

4.5.1 E.U.T. Operation:

Operating Environment:			
Temperature:	23.9 °C	Humidity:	54 %
		Atmospheric Pressure:	102 kPa
Pretest mode:	TM1		
Final test mode:	TM1		


4.5.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

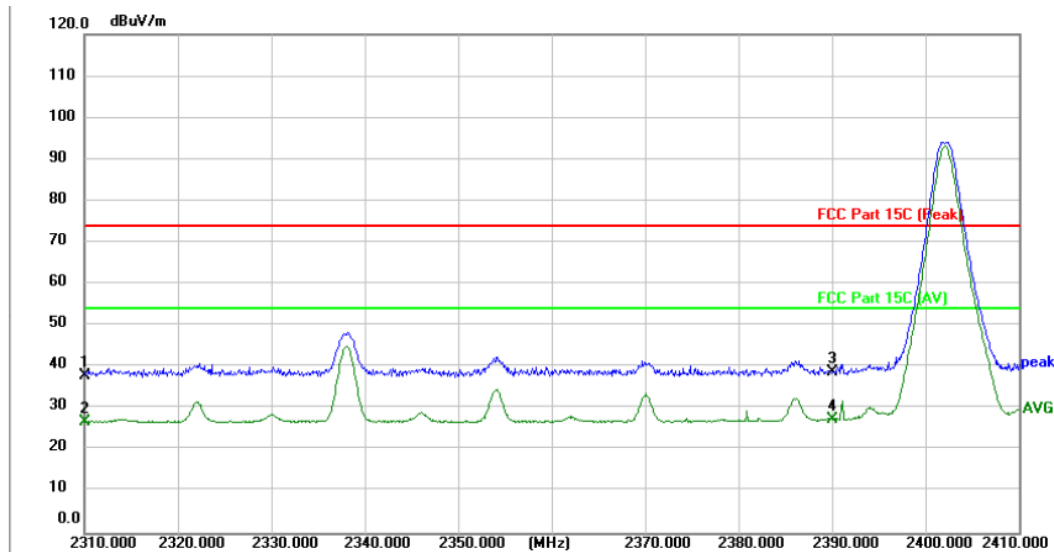


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector		P/F	Remark
1	2310.000	44.65	-6.63	38.02	74.00	-35.98	peak		P	
2	2310.000	33.56	-6.63	26.93	54.00	-27.07	AVG		P	
3	2390.000	45.14	-6.42	38.72	74.00	-35.28	peak		P	
4 *	2390.000	33.83	-6.42	27.41	54.00	-26.59	AVG		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

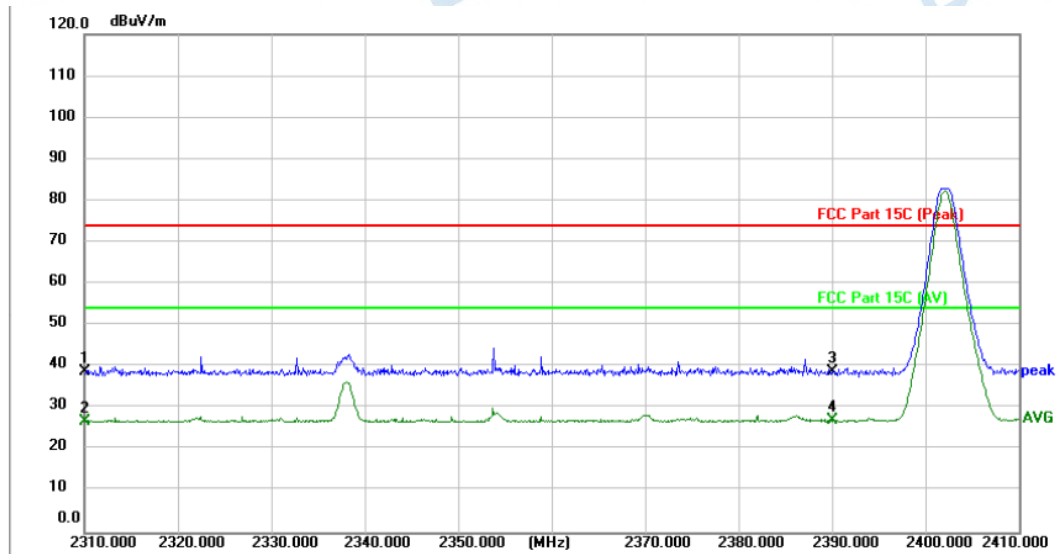


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	2310.000	45.38	-6.63	38.75	74.00	-35.25	peak			P	
2	2310.000	33.63	-6.63	27.00	54.00	-27.00	AVG			P	
3	2390.000	45.29	-6.42	38.87	74.00	-35.13	peak			P	
4 *	2390.000	33.45	-6.42	27.03	54.00	-26.97	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

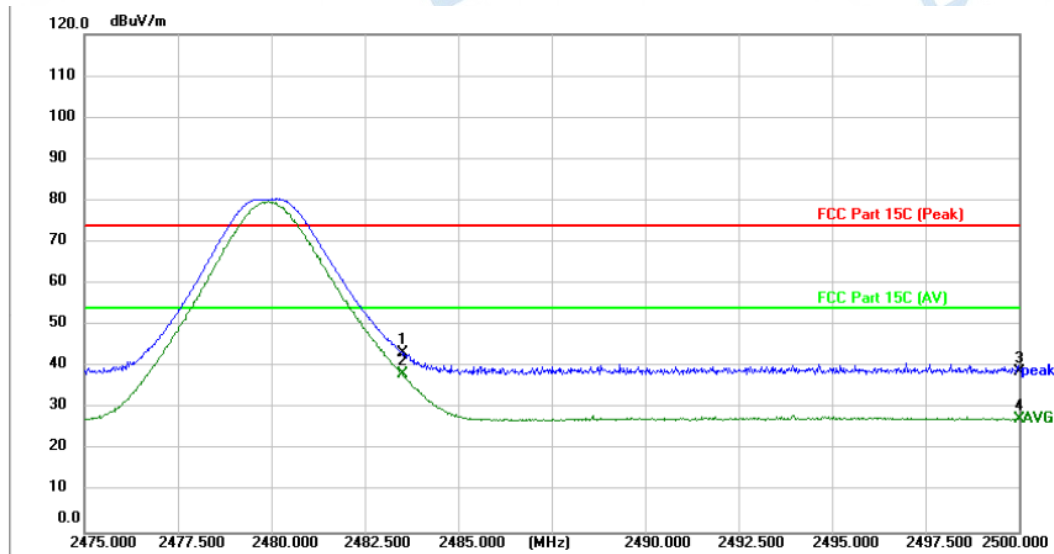

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	2483.500	49.47	-6.17	43.30	74.00	-30.70	peak			P	
2 *	2483.500	44.36	-6.17	38.19	54.00	-15.81	AVG			P	
3	2500.000	45.05	-6.13	38.92	74.00	-35.08	peak			P	
4	2500.000	33.48	-6.13	27.35	54.00	-26.65	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

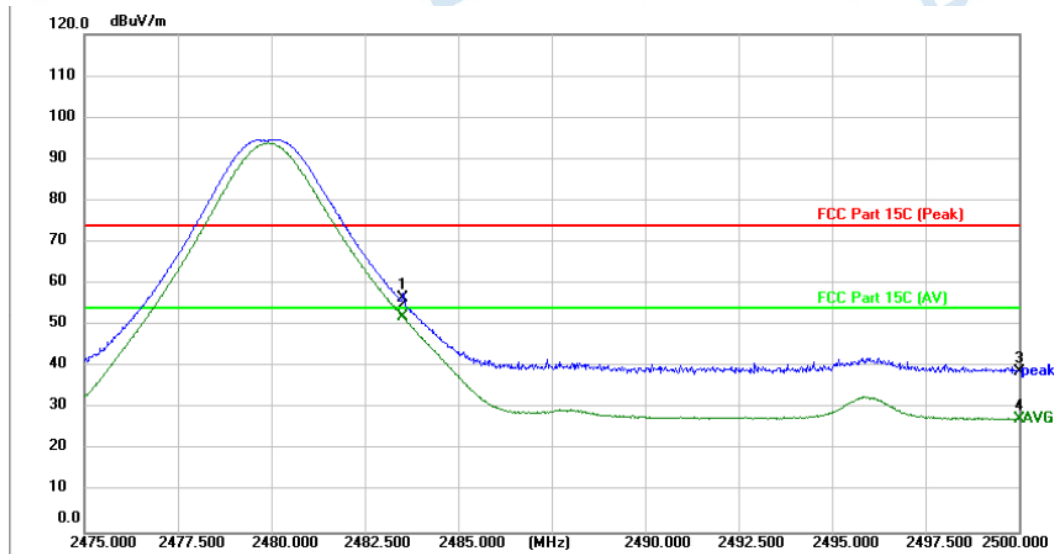

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	2483.500	62.81	-6.17	56.64	74.00	-17.36	peak			P	
2 *	2483.500	58.24	-6.17	52.07	54.00	-1.93	AVG			P	
3	2500.000	45.04	-6.13	38.91	74.00	-35.09	peak			P	
4	2500.000	33.54	-6.13	27.41	54.00	-26.59	AVG			P	

Remark: $\text{Margin} = \text{Level} - \text{Limit}$, $\text{Level} = \text{Test receiver reading} + \text{correction factor}$

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

4.6 Emissions in frequency bands (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. Remark: 1) For emission below 1GHz, through pre-scan found the worst case is the lowest		


	channel. Only the worst case is recorded in the report. 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
--	---

4.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	53 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1				
Final test mode:	TM1				


4.6.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

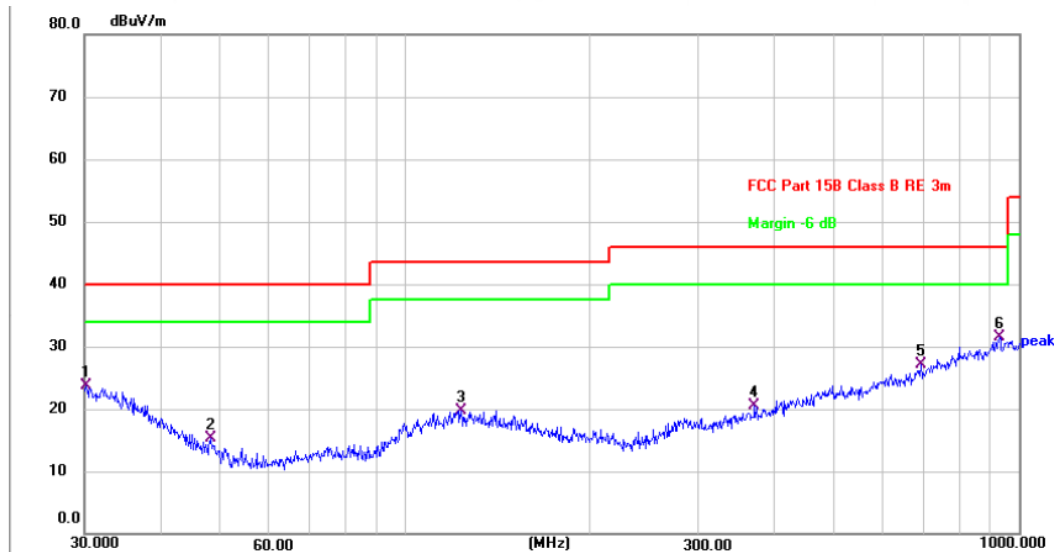

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	30.2111	27.84	-4.11	23.73	40.00	-16.27	QP			P	
2	48.1626	27.58	-12.20	15.38	40.00	-24.62	QP			P	
3	123.2655	26.64	-6.87	19.77	43.50	-23.73	QP			P	
4	370.7023	27.18	-6.71	20.47	46.00	-25.53	QP			P	
5	691.9867	27.05	0.01	27.06	46.00	-18.94	QP			P	
6 *	929.0082	27.13	4.31	31.44	46.00	-14.56	QP			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

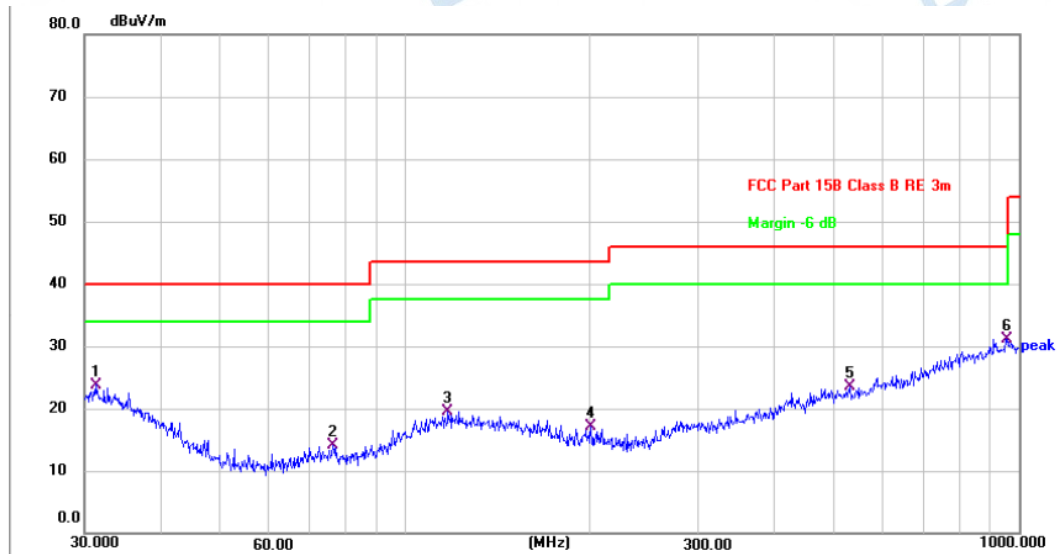

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	31.2893	26.42	-2.62	23.80	40.00	-16.20	QP			P	
2	76.2442	26.73	-12.69	14.04	40.00	-25.96	QP			P	
3	117.3603	26.23	-6.78	19.45	43.50	-24.05	QP			P	
4	200.6881	26.74	-9.66	17.08	43.50	-26.42	QP			P	
5	530.1014	26.48	-3.06	23.42	46.00	-22.58	QP			P	
6 *	955.4381	26.55	4.56	31.11	46.00	-14.89	QP			P	

Remark: Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

4.7 Emissions in frequency bands (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.		


	Remark: 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report. 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
--	---

4.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.6 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1				
Final test mode:	TM1				


4.7.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

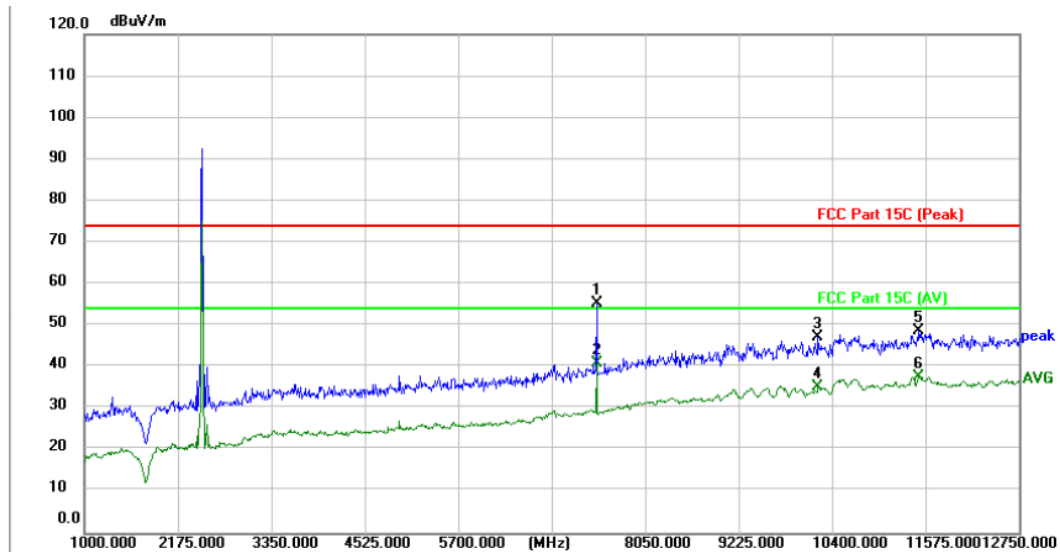


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector		P/F	Remark
1	7439.000	50.66	4.78	55.44	74.00	-18.56	peak		P	
2 *	7439.000	36.29	4.78	41.07	54.00	-12.93	AVG		P	
3	10223.750	38.74	8.50	47.24	74.00	-26.76	peak		P	
4	10223.750	26.90	8.50	35.40	54.00	-18.60	AVG		P	
5	11492.750	39.08	9.66	48.74	74.00	-25.26	peak		P	
6	11492.750	27.91	9.66	37.57	54.00	-16.43	AVG		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

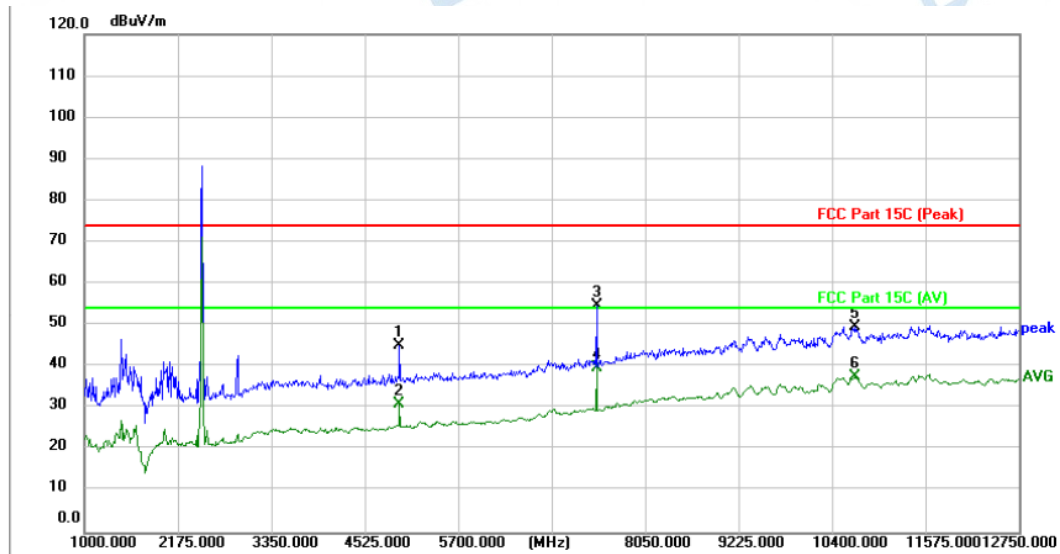


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	4959.750	45.24	-0.17	45.07	74.00	-28.93	peak			P	
2	4959.750	31.22	-0.17	31.05	54.00	-22.95	AVG			P	
3	7439.000	49.93	4.78	54.71	74.00	-19.29	peak			P	
4 *	7439.000	35.06	4.78	39.84	54.00	-14.16	AVG			P	
5	10693.750	40.58	9.15	49.73	74.00	-24.27	peak			P	
6	10693.750	28.39	9.15	37.54	54.00	-16.46	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: M

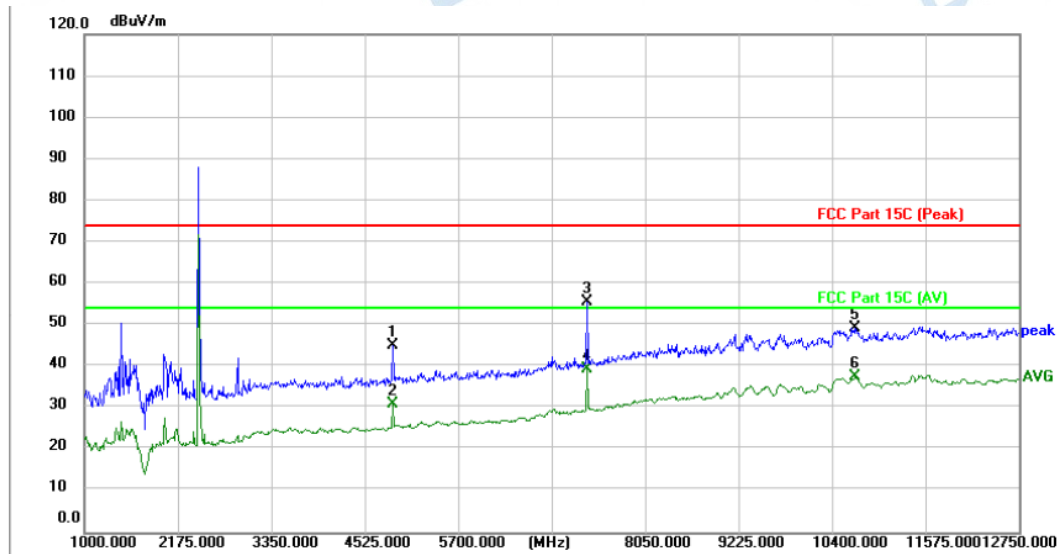


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	4877.500	45.64	-0.45	45.19	74.00	-28.81	peak			P	
2	4877.500	31.51	-0.45	31.06	54.00	-22.94	AVG			P	
3	7321.500	50.96	4.57	55.53	74.00	-18.47	peak			P	
4 *	7321.500	34.80	4.57	39.37	54.00	-14.63	AVG			P	
5	10693.750	40.25	9.15	49.40	74.00	-24.60	peak			P	
6	10693.750	28.37	9.15	37.52	54.00	-16.48	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: M

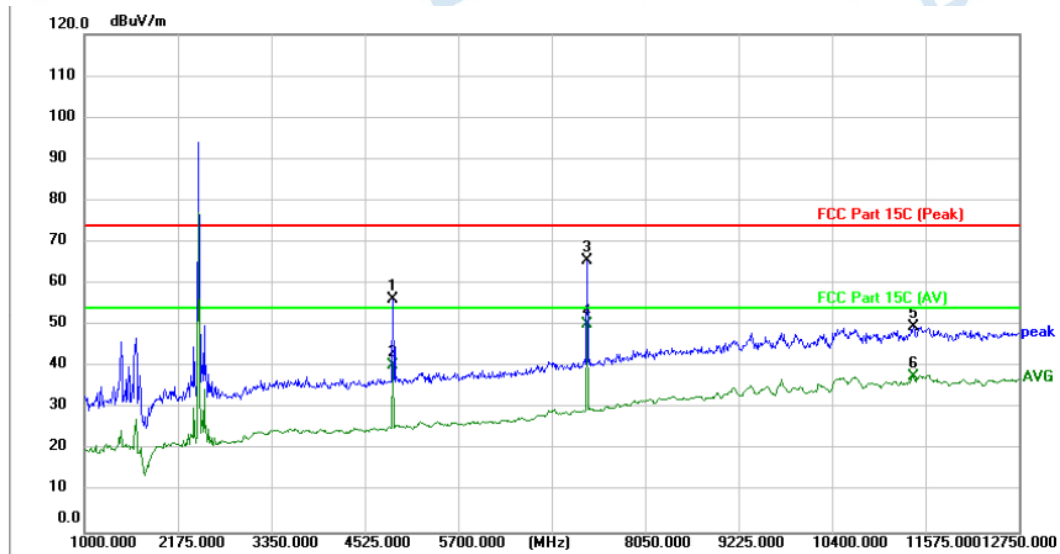


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	4877.500	56.72	-0.45	56.27	74.00	-17.73	peak			P	
2	4877.500	40.68	-0.45	40.23	54.00	-13.77	AVG			P	
3	7321.500	61.06	4.57	65.63	74.00	-8.37	peak			P	
4 *	7321.500	45.81	4.57	50.38	54.00	-3.62	AVG			P	
5	11422.250	40.13	9.62	49.75	74.00	-24.25	peak			P	
6	11422.250	27.92	9.62	37.54	54.00	-16.46	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

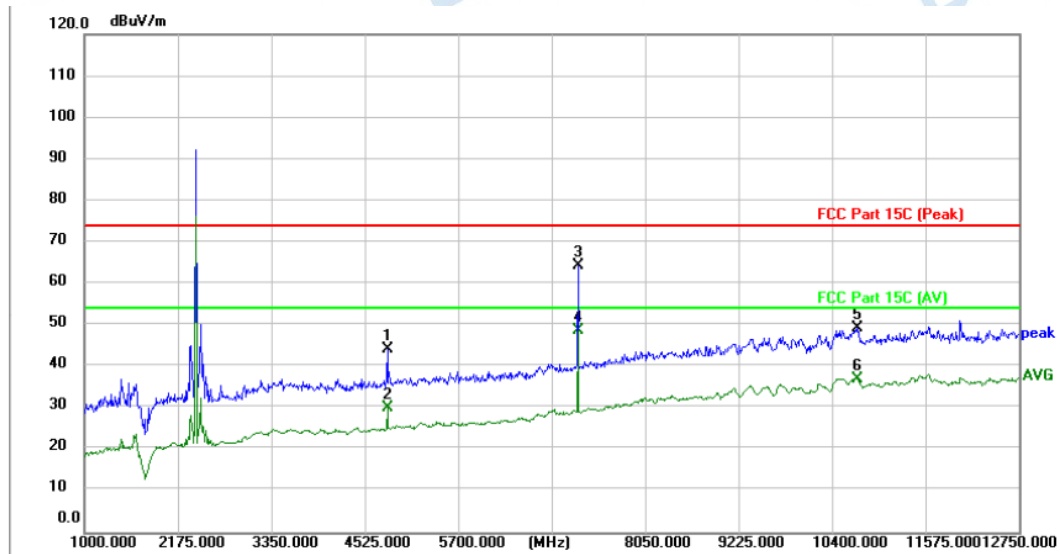

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	4807.000	45.03	-0.69	44.34	74.00	-29.66	peak			P	
2	4807.000	30.90	-0.69	30.21	54.00	-23.79	AVG			P	
3	7204.000	60.07	4.37	64.44	74.00	-9.56	peak			P	
4 *	7204.000	44.34	4.37	48.71	54.00	-5.29	AVG			P	
5	10717.250	40.13	9.17	49.30	74.00	-24.70	peak			P	
6	10717.250	27.74	9.17	36.91	54.00	-17.09	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

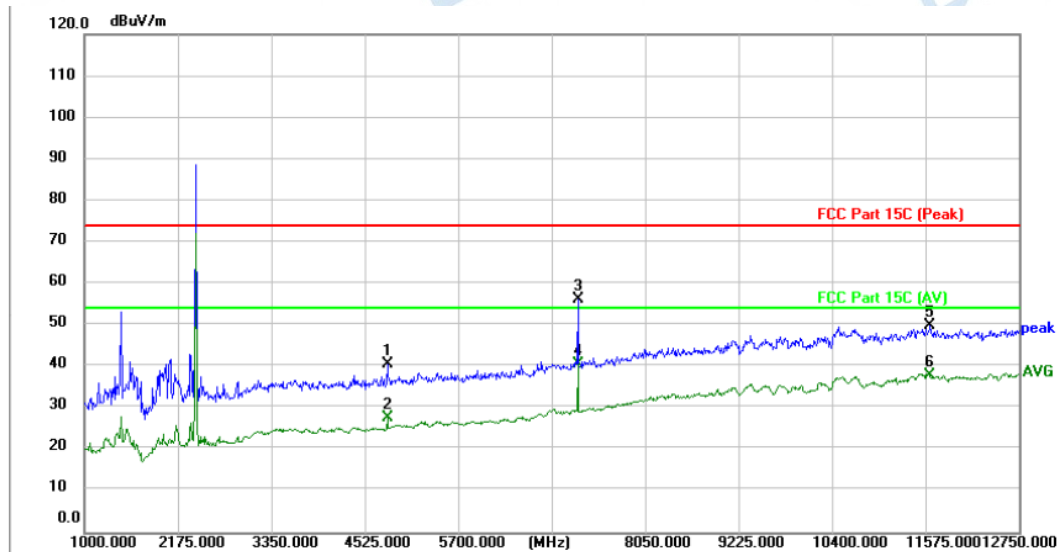


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	4807.000	41.46	-0.69	40.77	74.00	-33.23	peak			P	
2	4807.000	28.40	-0.69	27.71	54.00	-26.29	AVG			P	
3	7204.000	51.74	4.37	56.11	74.00	-17.89	peak			P	
4 *	7204.000	36.26	4.37	40.63	54.00	-13.37	AVG			P	
5	11633.750	40.27	9.75	50.02	74.00	-23.98	peak			P	
6	11633.750	28.09	9.75	37.84	54.00	-16.16	AVG			P	

Remark: Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

5 TEST SETUP PHOTOS

Emissions in frequency bands (below 1GHz)

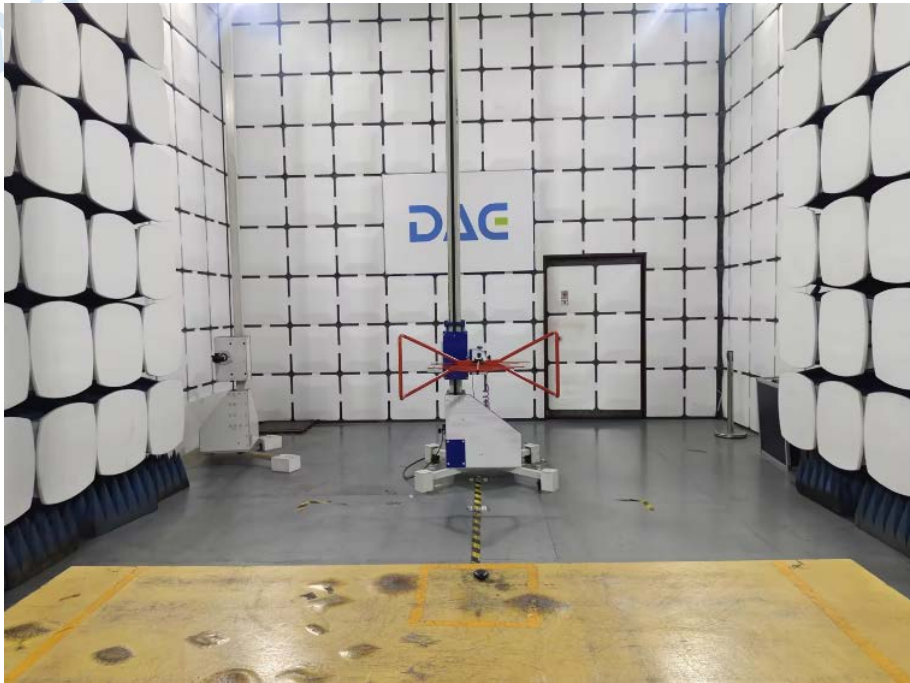

Band edge emissions (Radiated)
Emissions in frequency bands (above 1GHz)



6 PHOTOS OF THE EUT

Refer to Appendix - EUT Photos for EUT External Photo and Internal Photo.

Appendix


Table of Contents

1. -6DB BANDWIDTH	40
2. DUTY CYCLE.....	44
3. PEAK OUTPUT POWER	48
4. POWER SPECTRAL DENSITY	52
5. BANDEDGE	56
6. SPURIOUS EMISSION	60


1. -6dB Bandwidth

Condition	Antenna	Rate	Frequency (MHz)	-6dB BW(kHz)	limit(kHz)	Result
NVNT	ANT1	1Mbps	2402.00	702.08	500	Pass
NVNT	ANT1	1Mbps	2440.00	710.43	500	Pass
NVNT	ANT1	1Mbps	2480.00	706.82	500	Pass
NVNT	ANT1	2Mbps	2402.00	1188.08	500	Pass
NVNT	ANT1	2Mbps	2440.00	1200.43	500	Pass
NVNT	ANT1	2Mbps	2480.00	1205.21	500	Pass

-6dB Bandwidth_NVNT_ANT1_1Mbps_2402

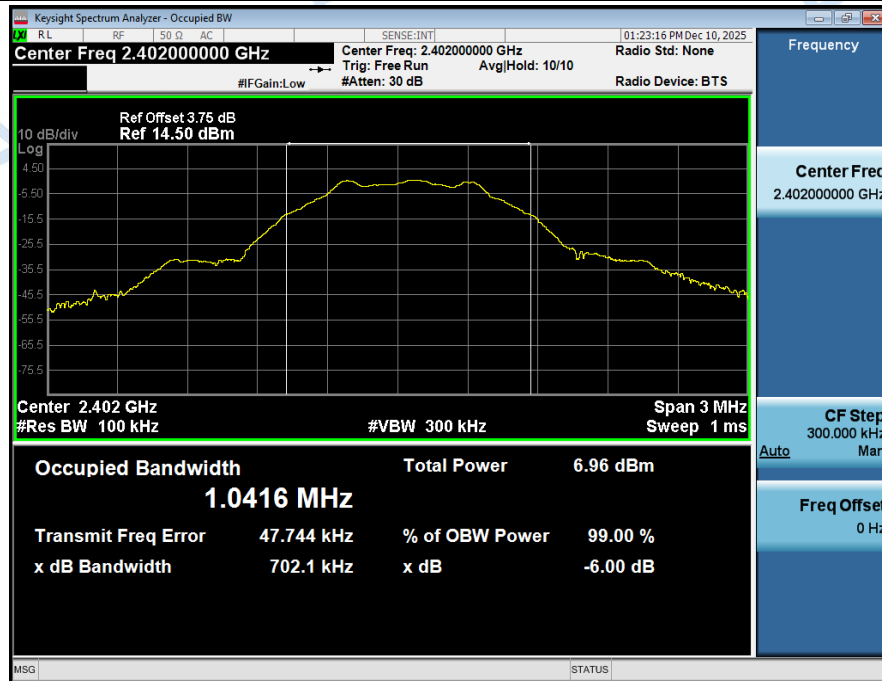


-6dB Bandwidth_NVNT_ANT1_1Mbps_2440

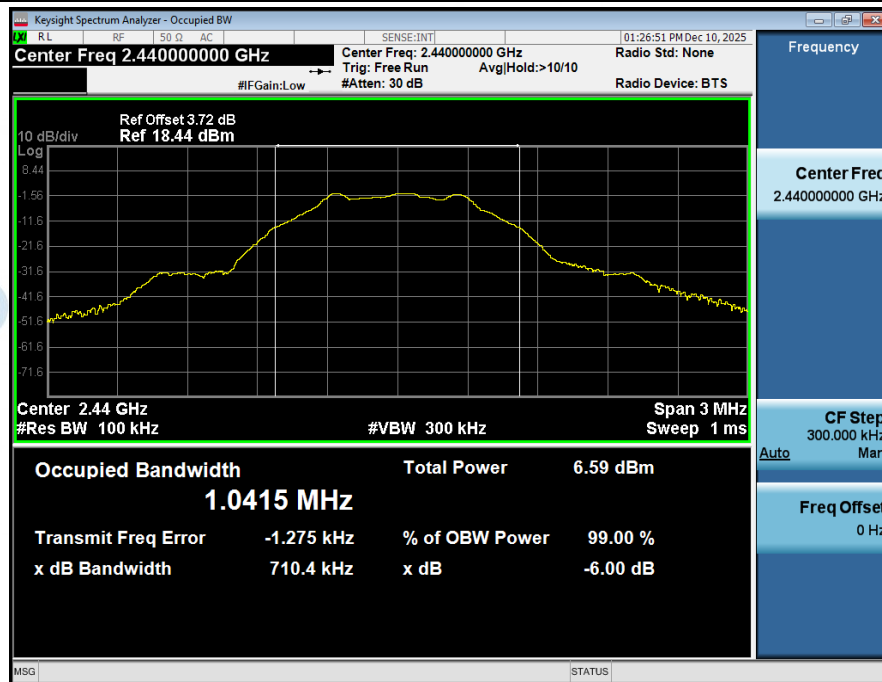


-6dB Bandwidth_NVNT_ANT1_1Mbps_2480




-6dB Bandwidth_NVNT_ANT1_2Mbps_2402

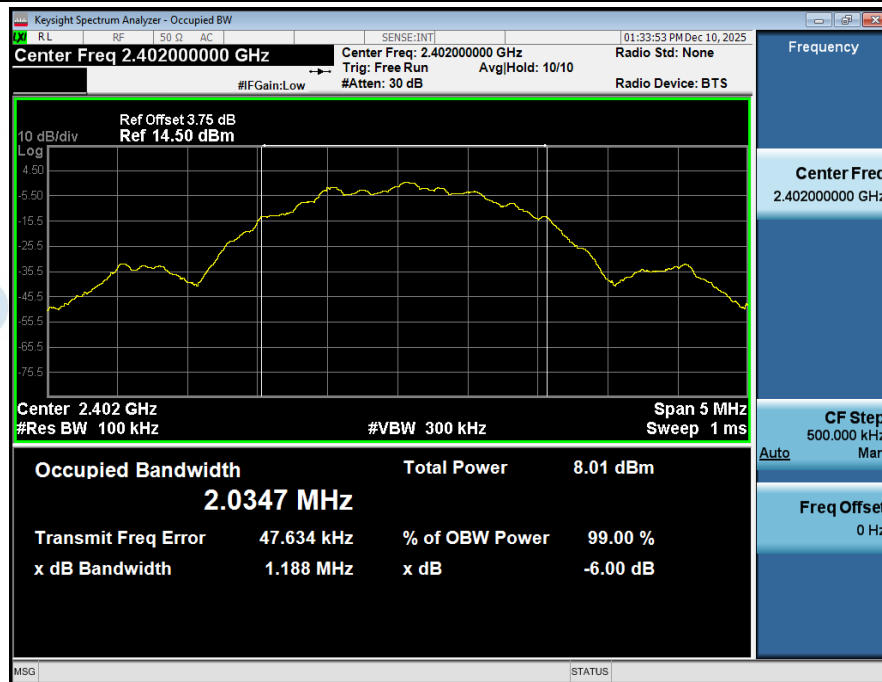

-6dB Bandwidth_NVNT_ANT1_2Mbps_2440

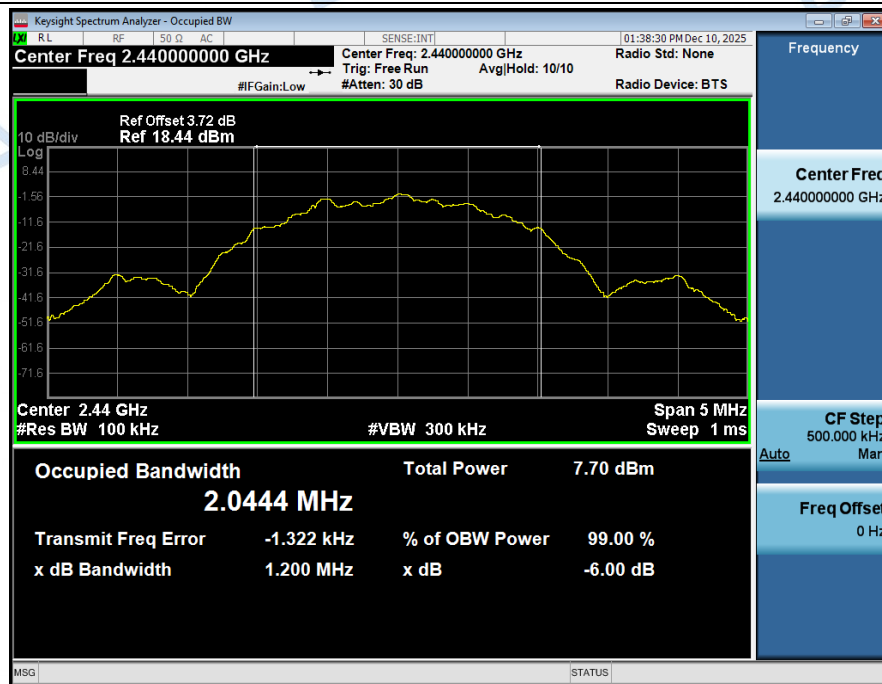


-6dB Bandwidth_NVNT_ANT1_2Mbps_2480

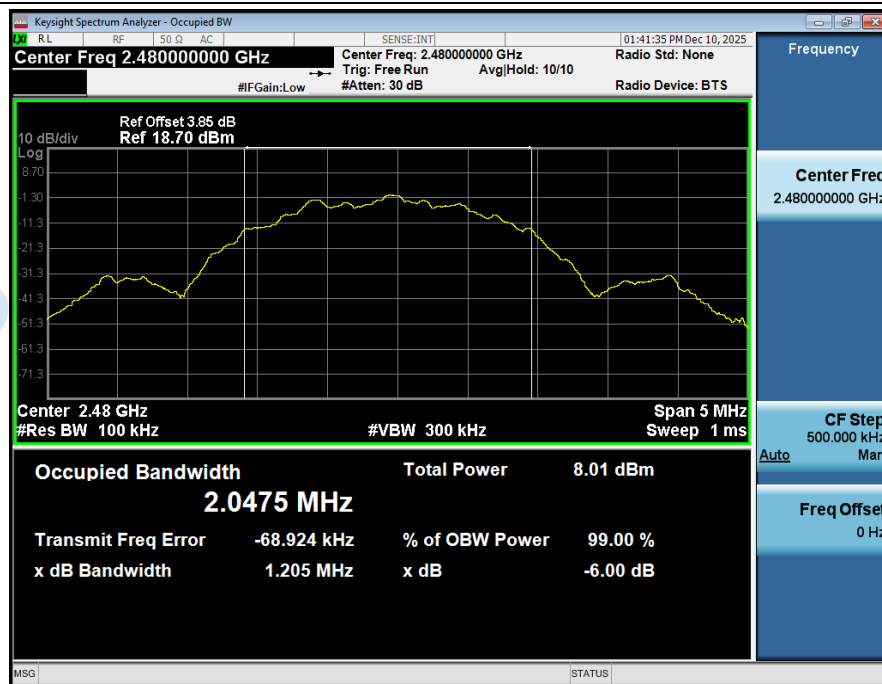


2. Duty Cycle

Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT1	1Mbps	2402.00	97.37	0.12
NVNT	ANT1	1Mbps	2440.00	96.49	0.16
NVNT	ANT1	1Mbps	2480.00	96.46	0.16
NVNT	ANT1	2Mbps	2402.00	95.00	0.22
NVNT	ANT1	2Mbps	2440.00	95.00	0.22
NVNT	ANT1	2Mbps	2480.00	95.00	0.22


Duty_Cycle_NVNT_ANT1_1Mbps_2402

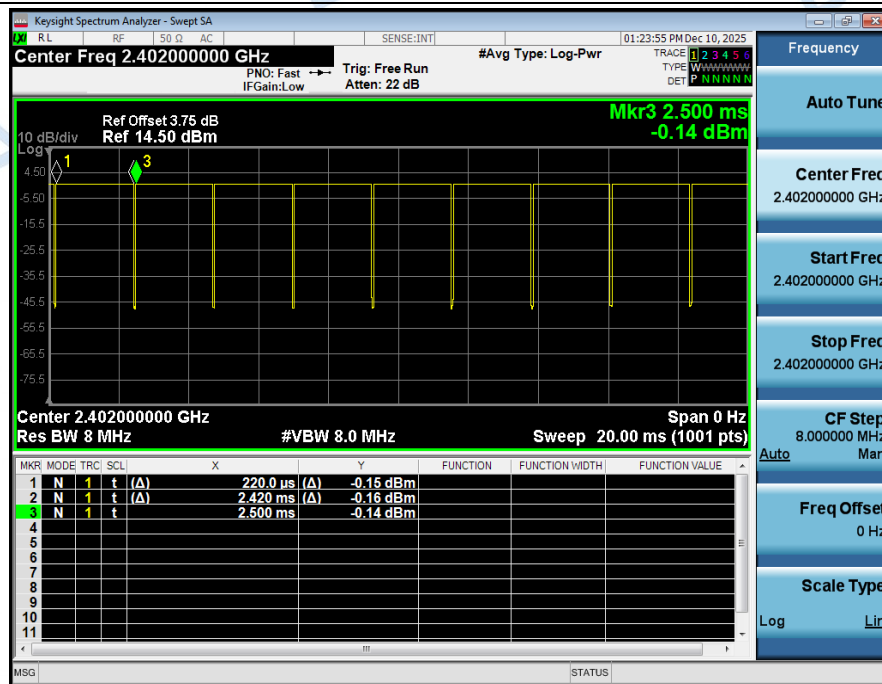


Duty_Cycle_NVNT_ANT1_1Mbps_2440

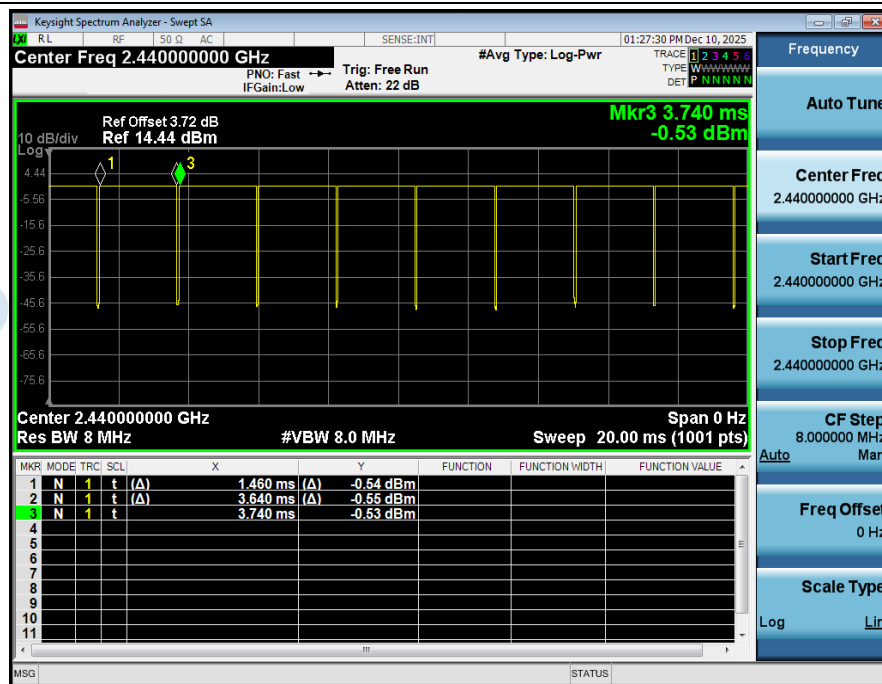


Duty Cycle NVNT_ANT1_1Mbps_2480

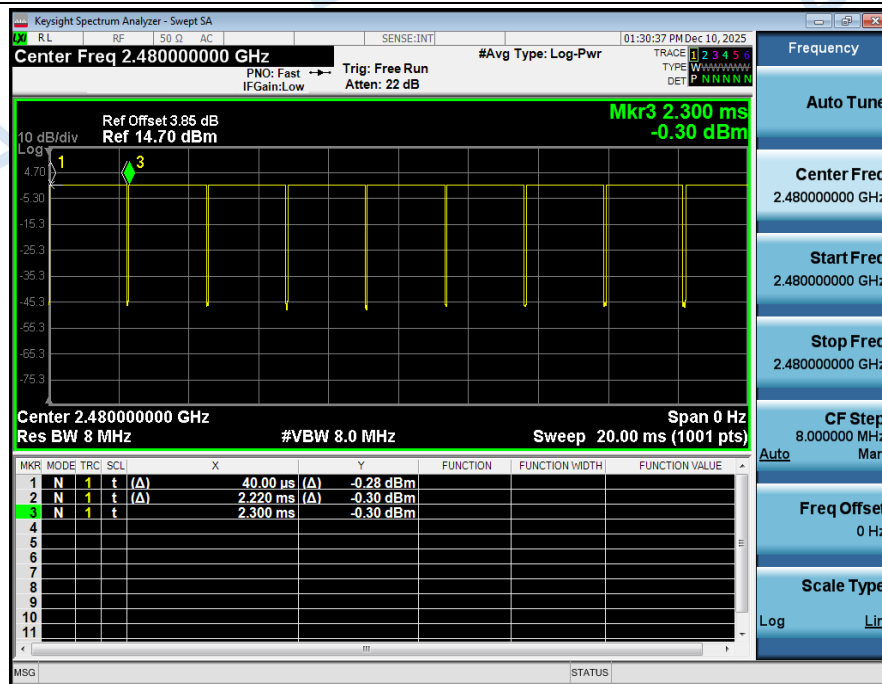


Duty Cycle NVNT_ANT1_2Mbps_2402

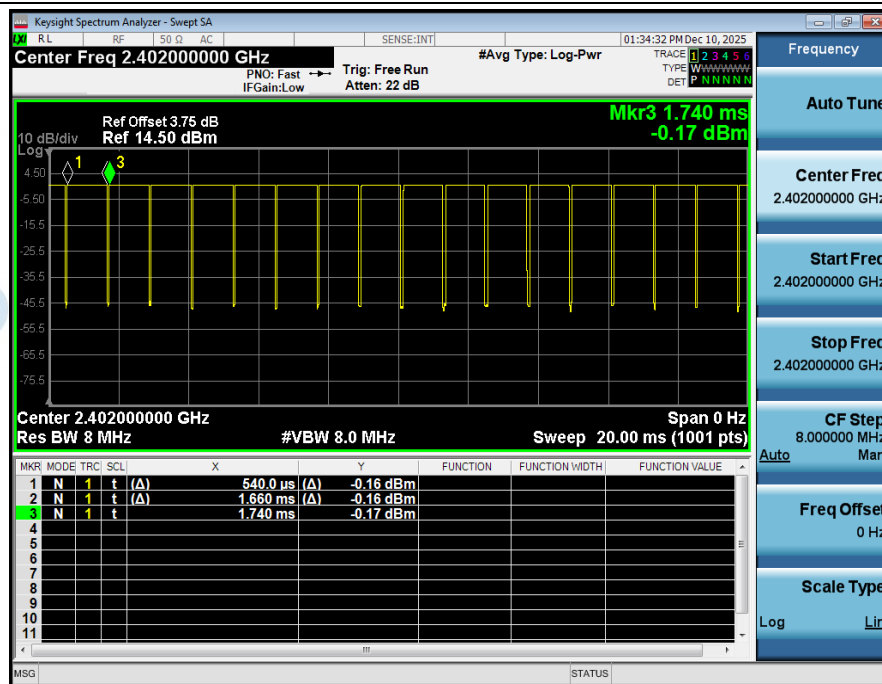

Duty_Cycle_NVNT_ANT1_2Mbps_2440

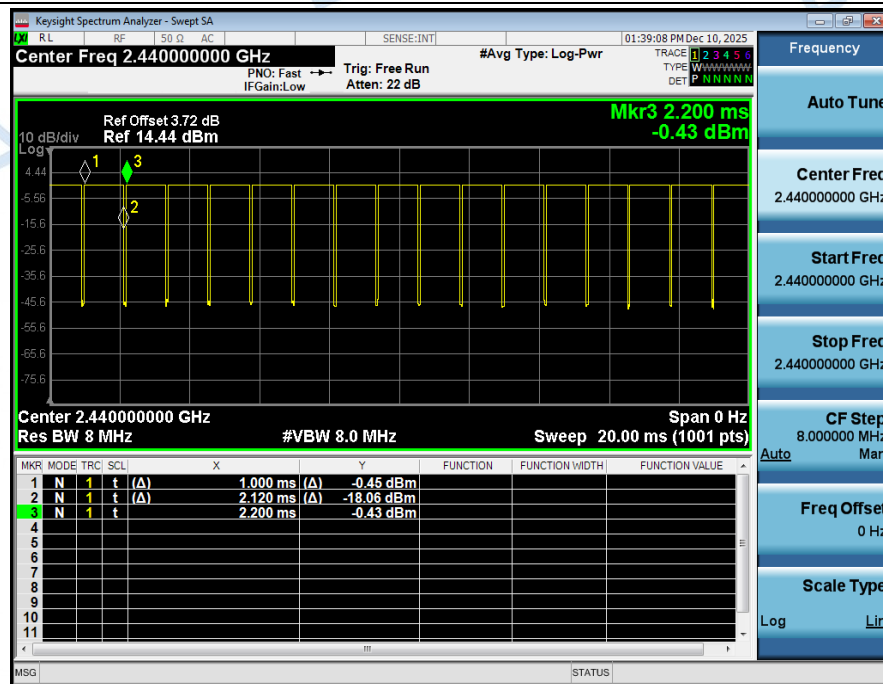


Duty_Cycle_NVNT_ANT1_2Mbps_2480

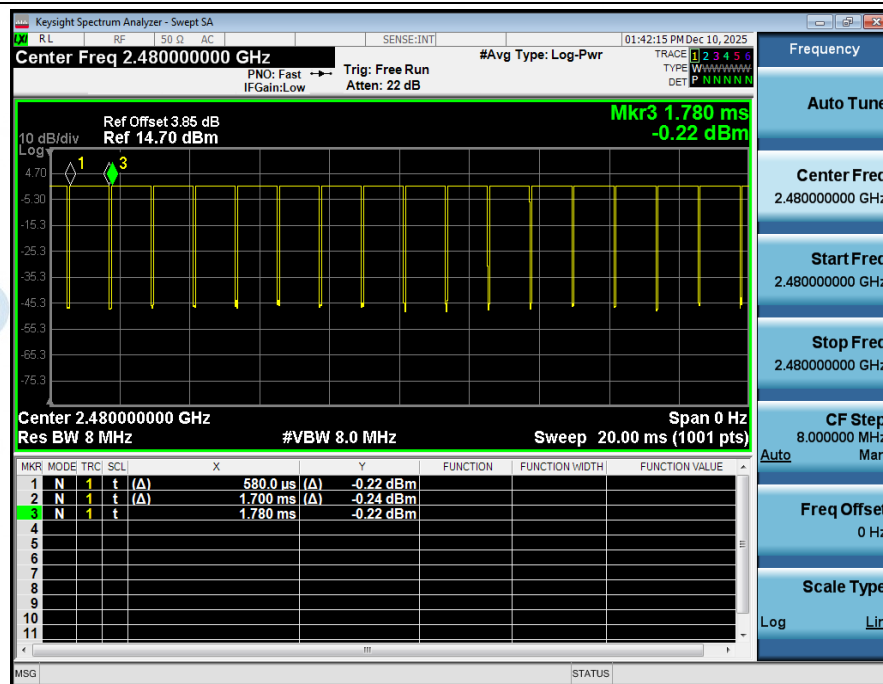


3. Peak Output Power

Condition	Antenna	Rate	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1Mbps	2402.00	4.95	3.12	1000	Pass
NVNT	ANT1	1Mbps	2440.00	4.44	2.78	1000	Pass
NVNT	ANT1	1Mbps	2480.00	4.37	2.73	1000	Pass
NVNT	ANT1	2Mbps	2402.00	5.09	3.23	1000	Pass
NVNT	ANT1	2Mbps	2440.00	4.47	2.80	1000	Pass
NVNT	ANT1	2Mbps	2480.00	5.24	3.34	1000	Pass



Peak_Output_Power_NVNT_ANT1_1Mbps_2402

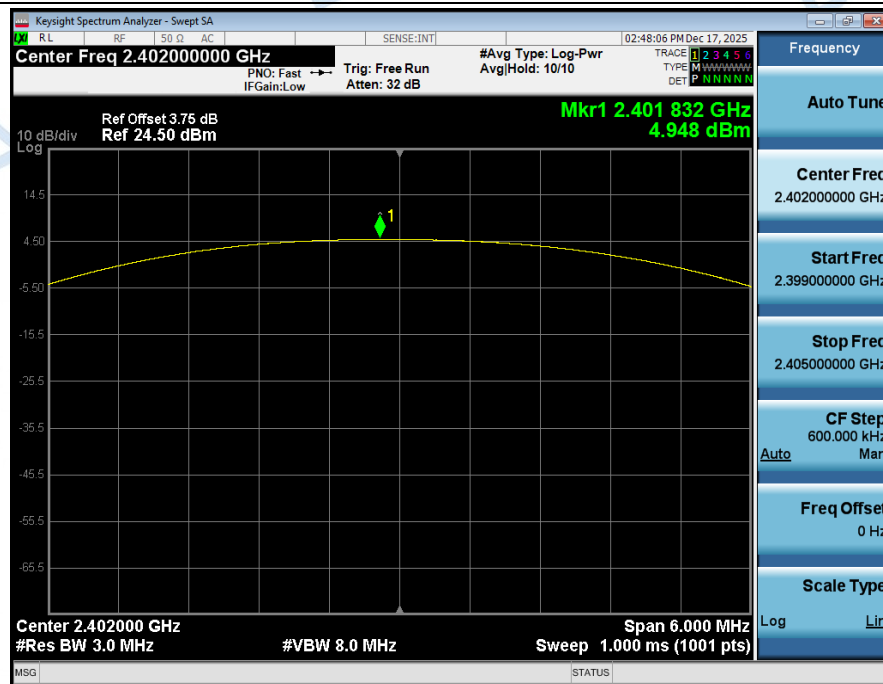



Peak_Output_Power_NVNT_ANT1_1Mbps_2440

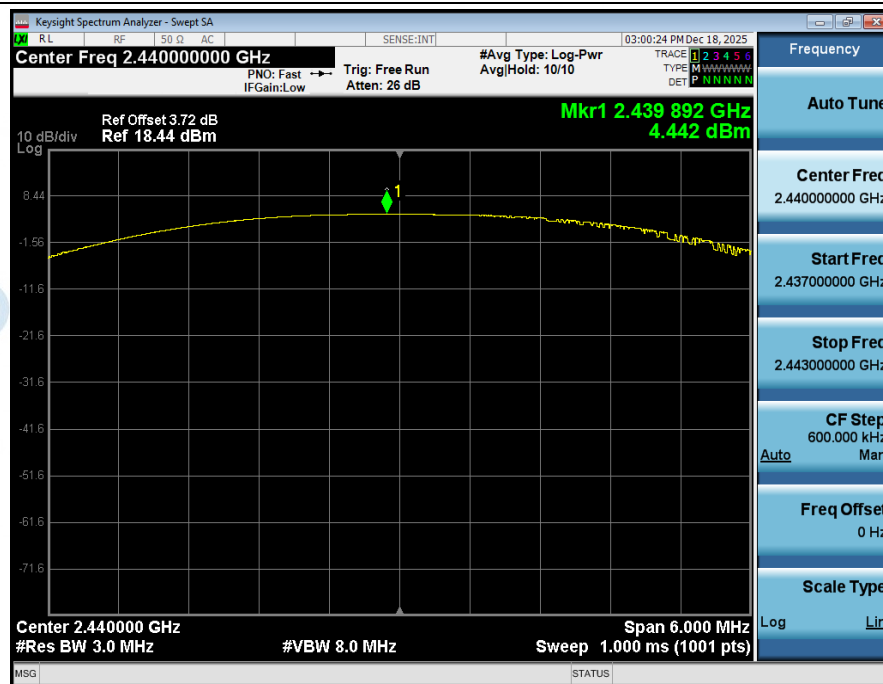

Peak_Output_Power_NVNT_ANT1_1Mbps_2480

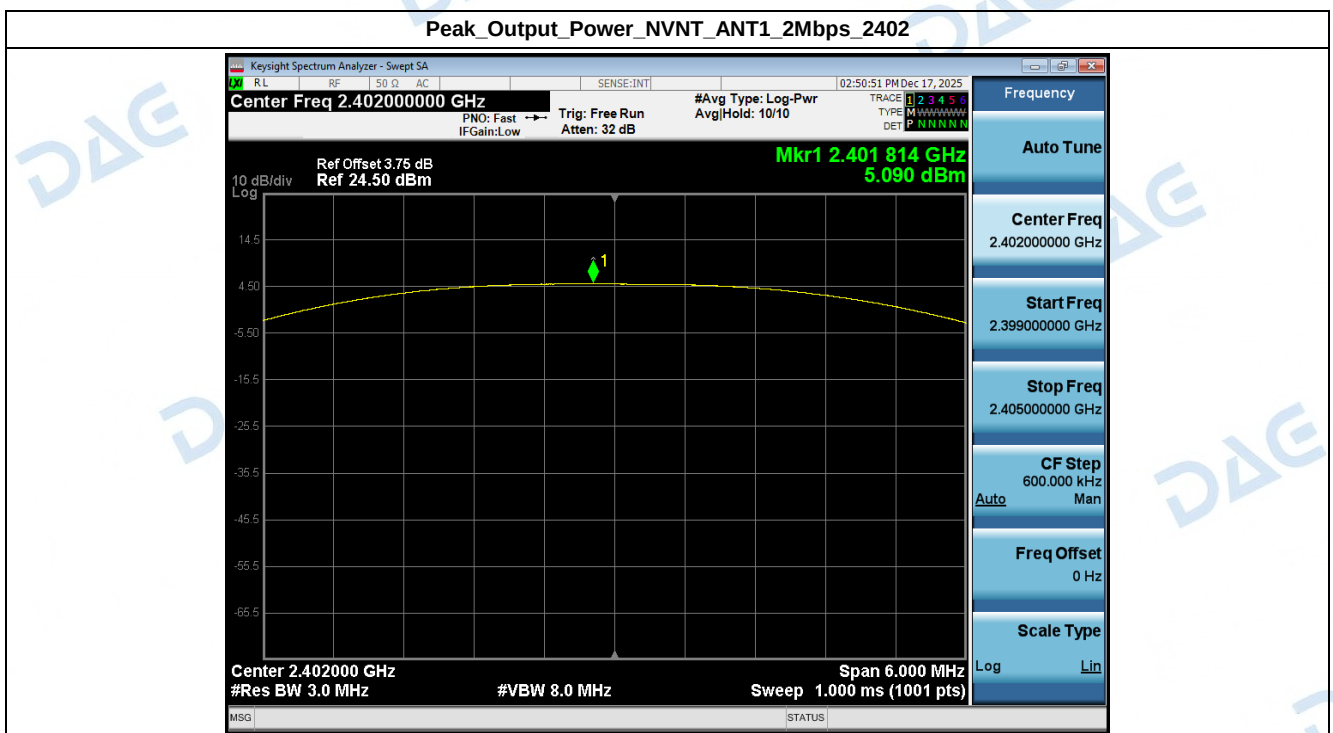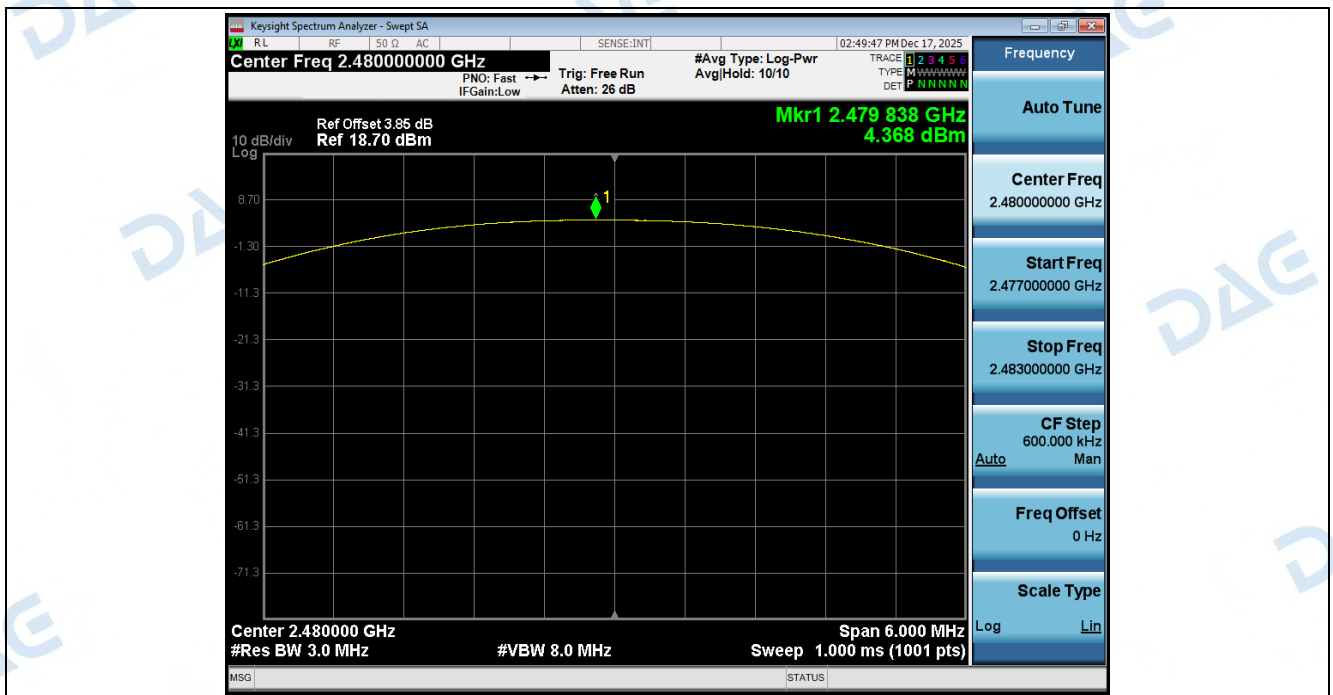


Peak_Output_Power_NVNT_ANT1_2Mbps_2440

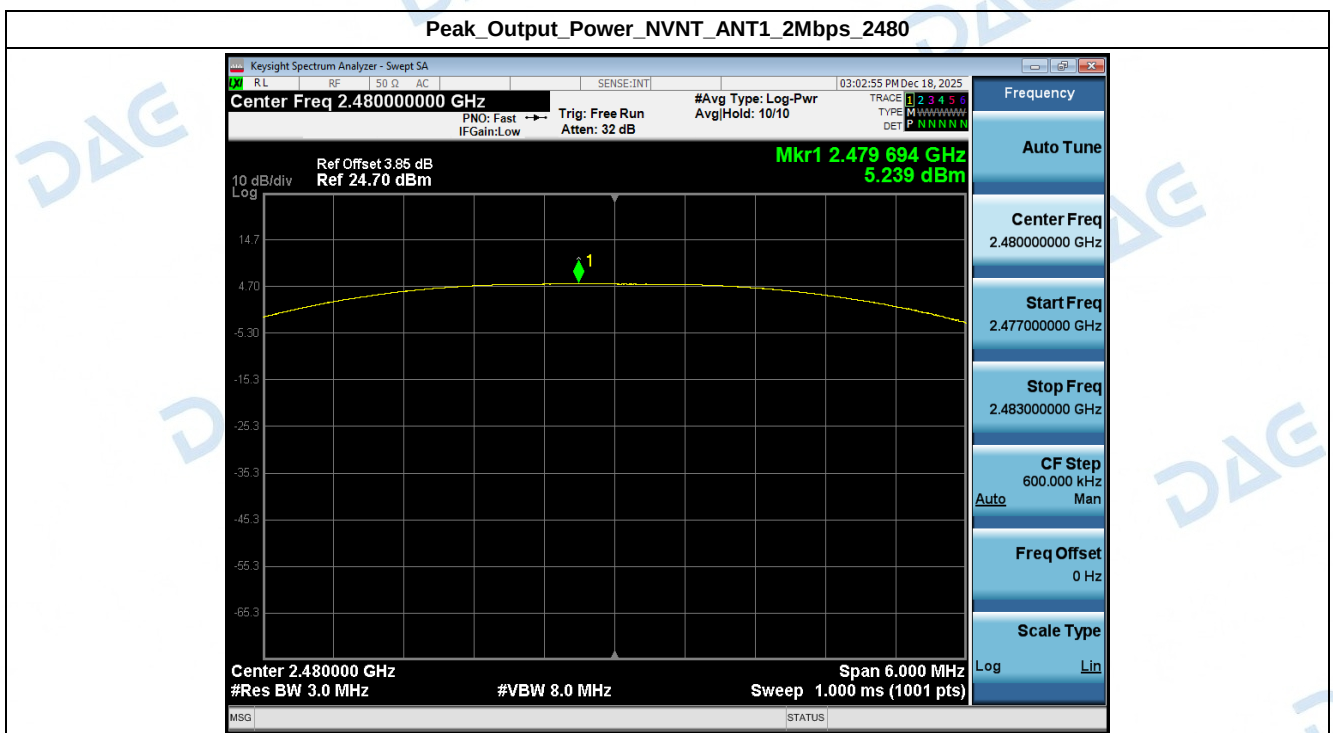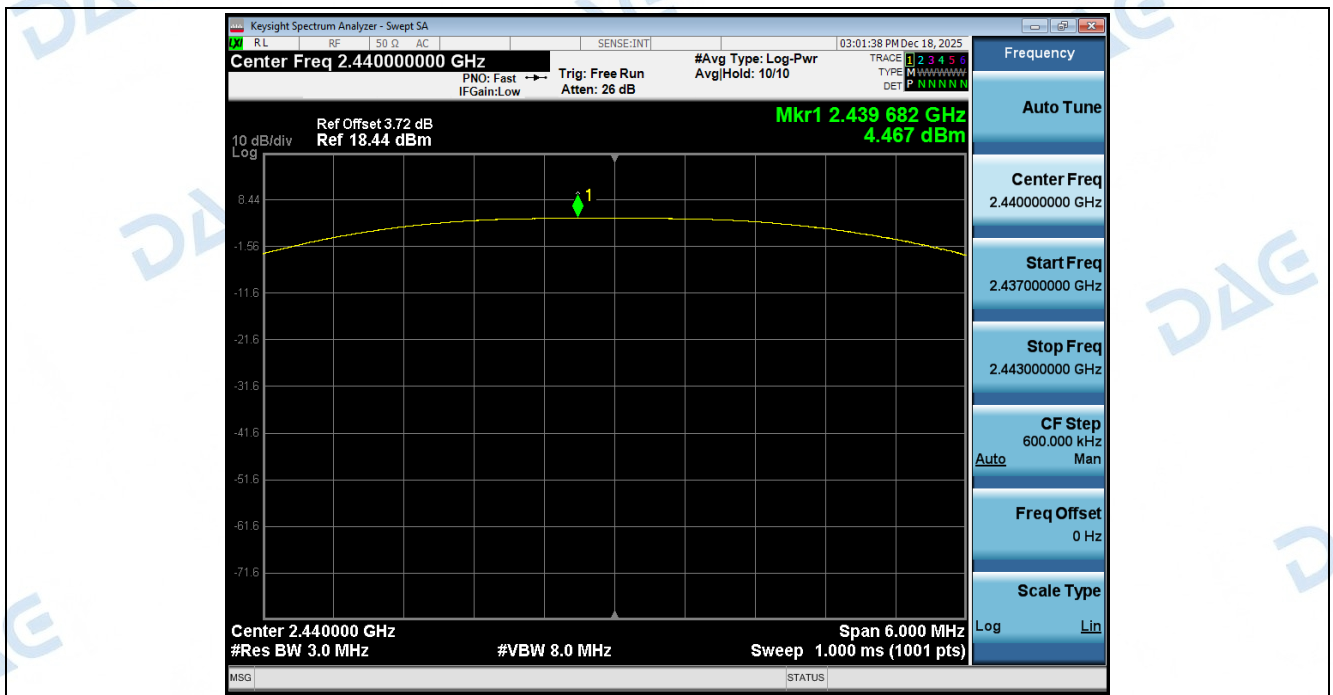


4. Power Spectral Density

Condition	Antenna	Rate	Frequency (MHz)	Power Spectral Density(dBm/3kHz)	Limit(dBm/3kHz)	Result
NVNT	ANT1	1Mbps	2402.00	-11.72	8	Pass
NVNT	ANT1	1Mbps	2440.00	-8.11	8	Pass
NVNT	ANT1	1Mbps	2480.00	-10.49	8	Pass
NVNT	ANT1	2Mbps	2402.00	-13.10	8	Pass
NVNT	ANT1	2Mbps	2440.00	-8.47	8	Pass
NVNT	ANT1	2Mbps	2480.00	-7.55	8	Pass



Power Spectral Density_NVNT_ANT1_1Mbps_2402

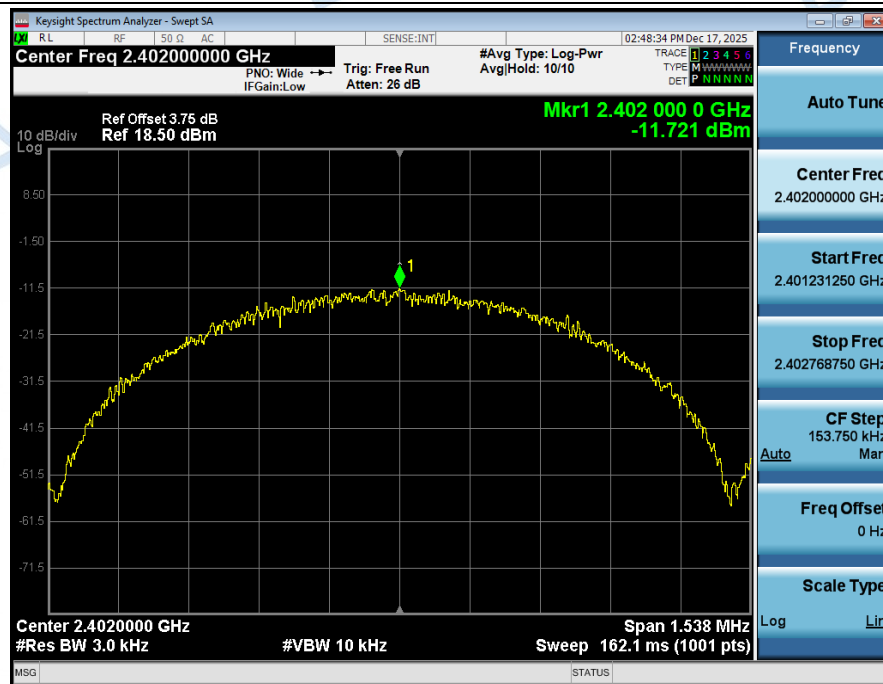



Power Spectral Density_NVNT_ANT1_1Mbps_2440

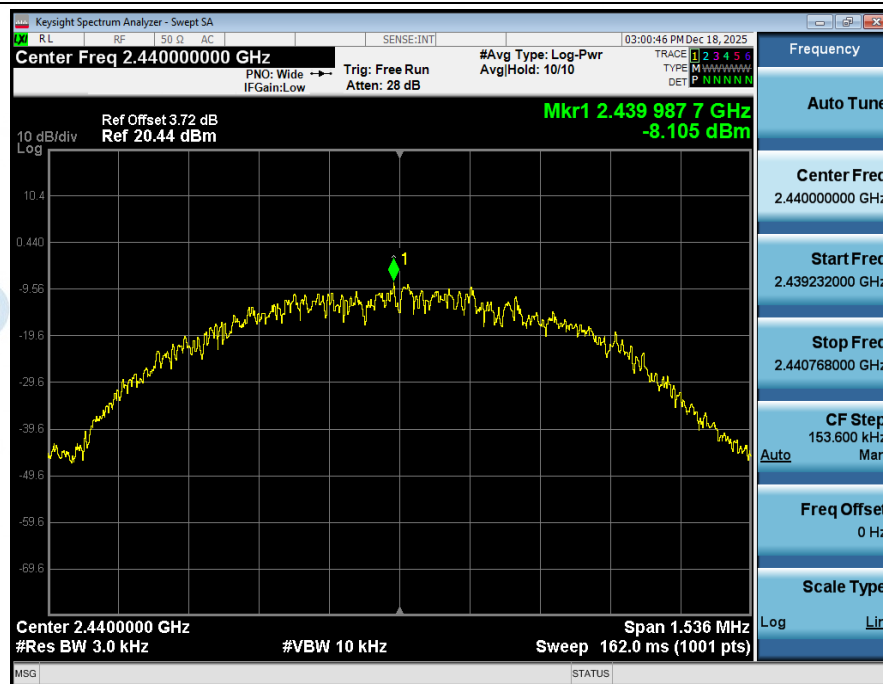

Power Spectral Density_NVNT_ANT1_1Mbps_2480

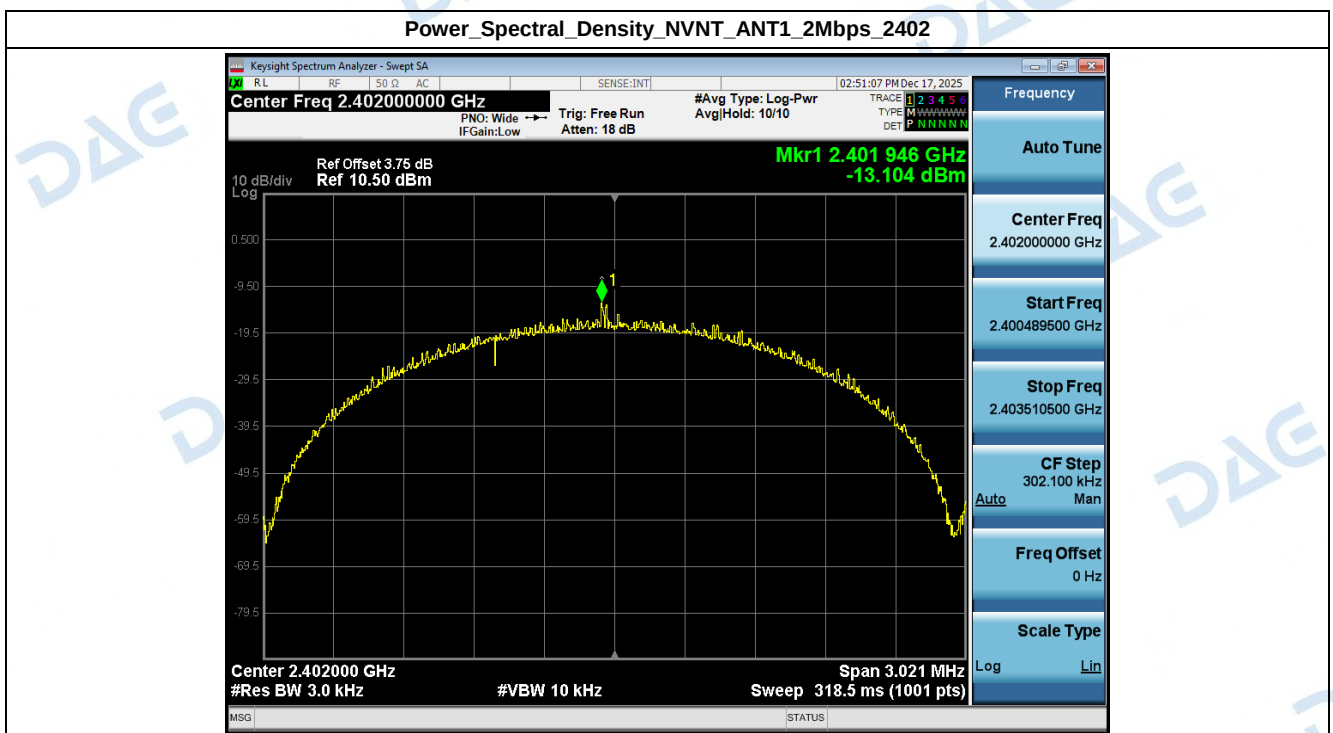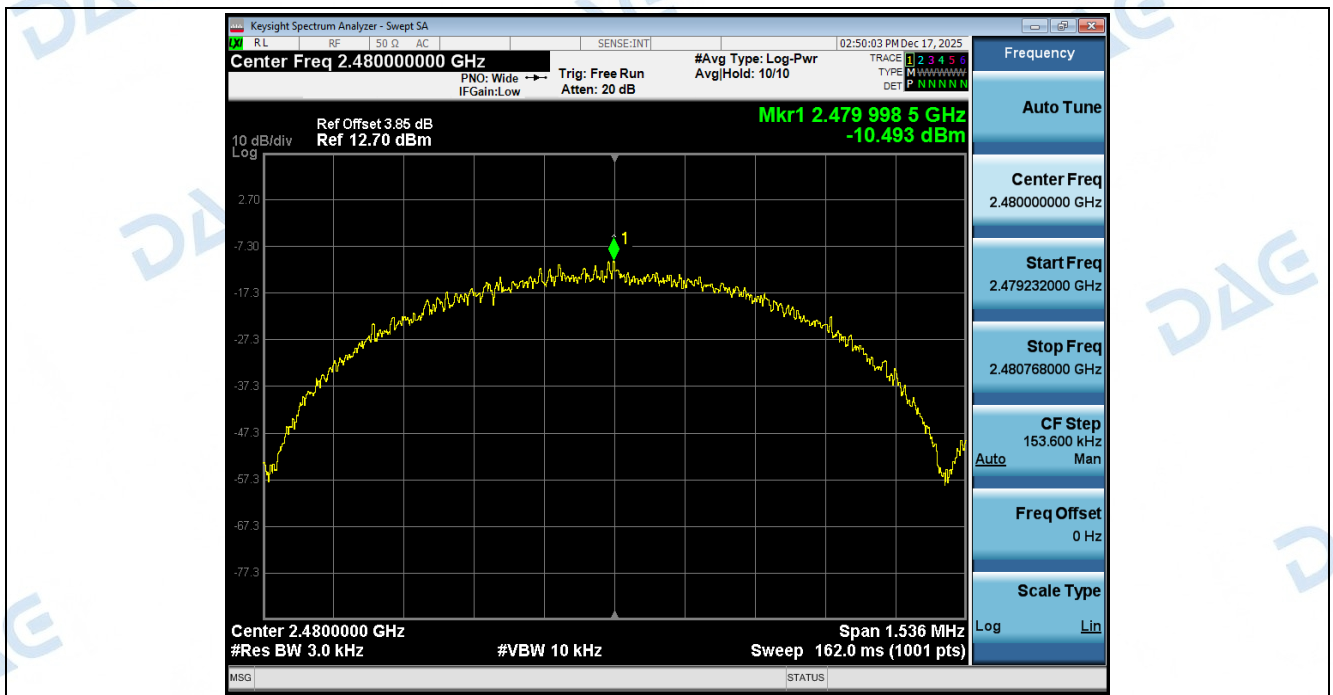


Power_Spectral_Density_NVNT_ANT1_2Mbps_2440

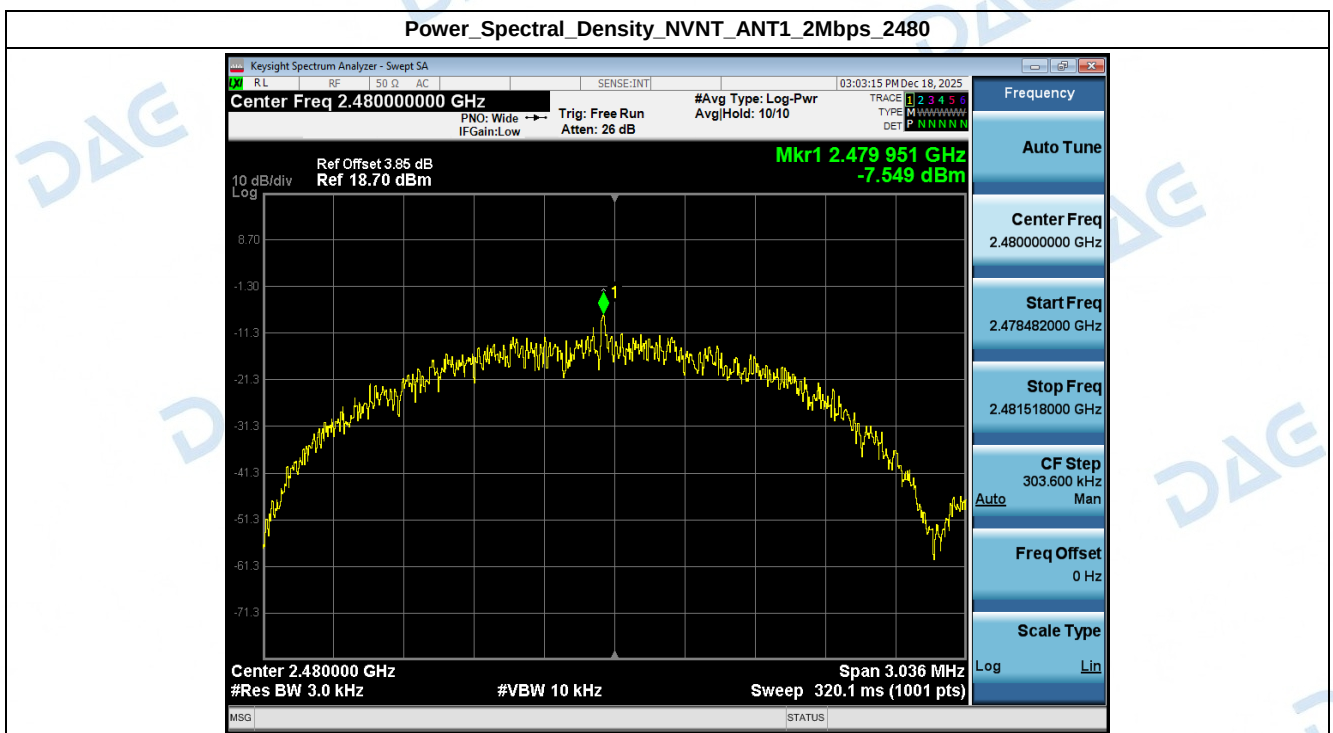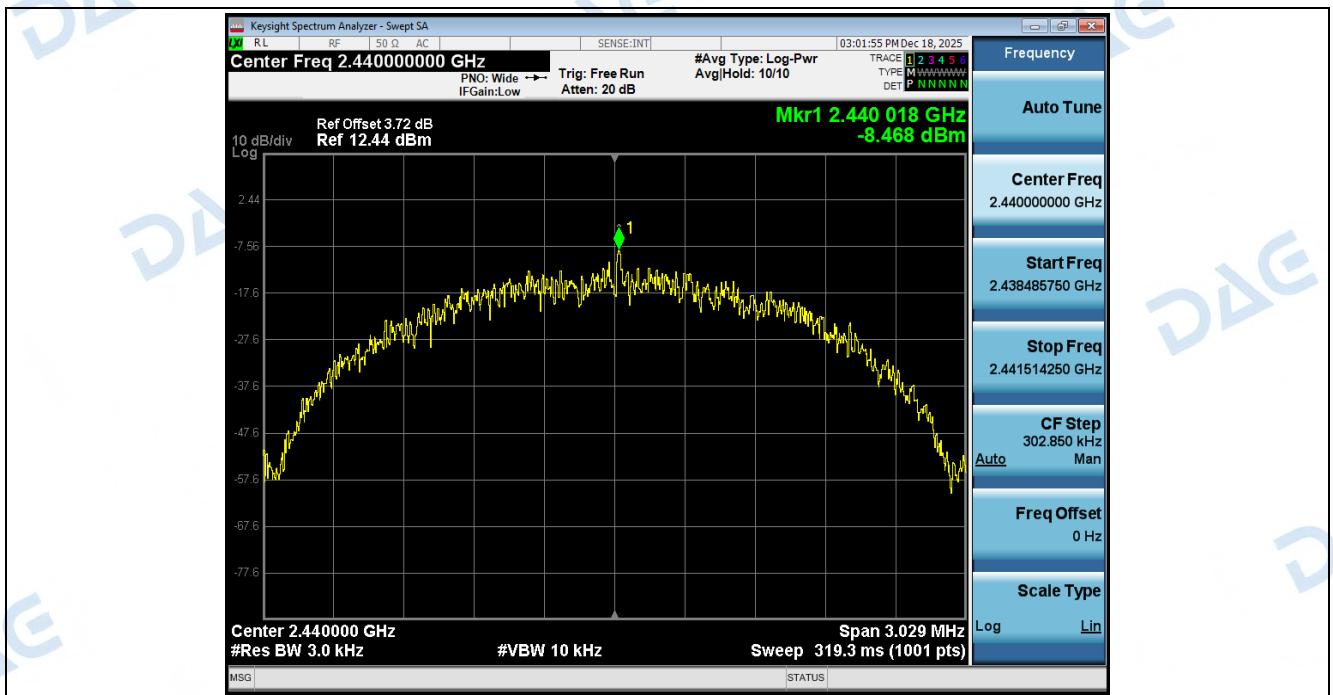


5. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	1Mbps	2402.00	2337.835	-0.179	-48.792	-20.179	Pass
NVNT	ANT1	1Mbps	2480.00	2495.975	-0.295	-56.913	-20.295	Pass
NVNT	ANT1	2Mbps	2402.00	2399.965	-0.215	-33.881	-20.215	Pass
NVNT	ANT1	2Mbps	2480.00	2495.925	-0.200	-57.548	-20.200	Pass


1 Reference_Level_NVNT_ANT1_1Mbps_2402

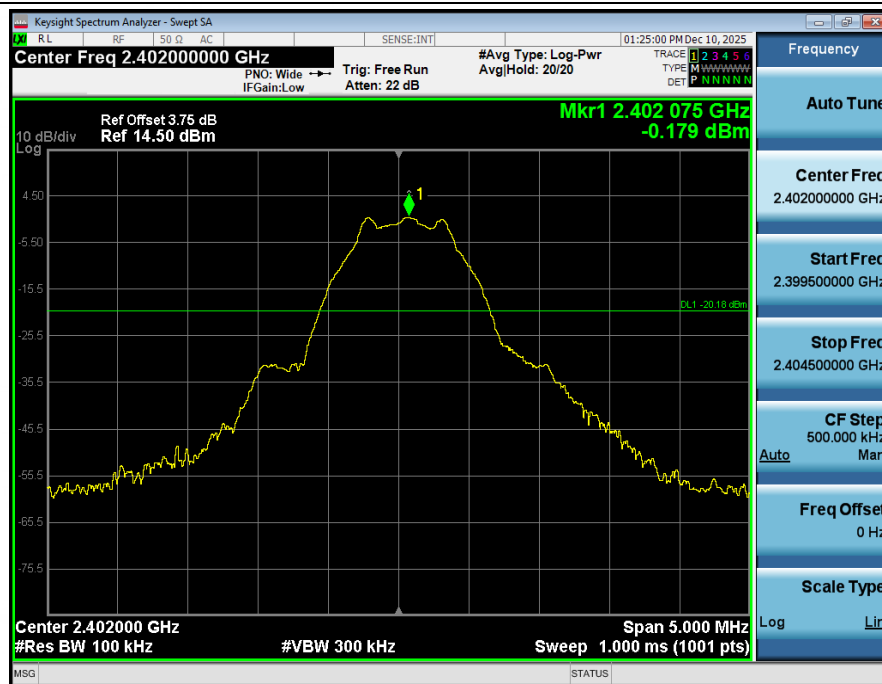


2 Bandedge_NVNT_ANT1_1Mbps_2402

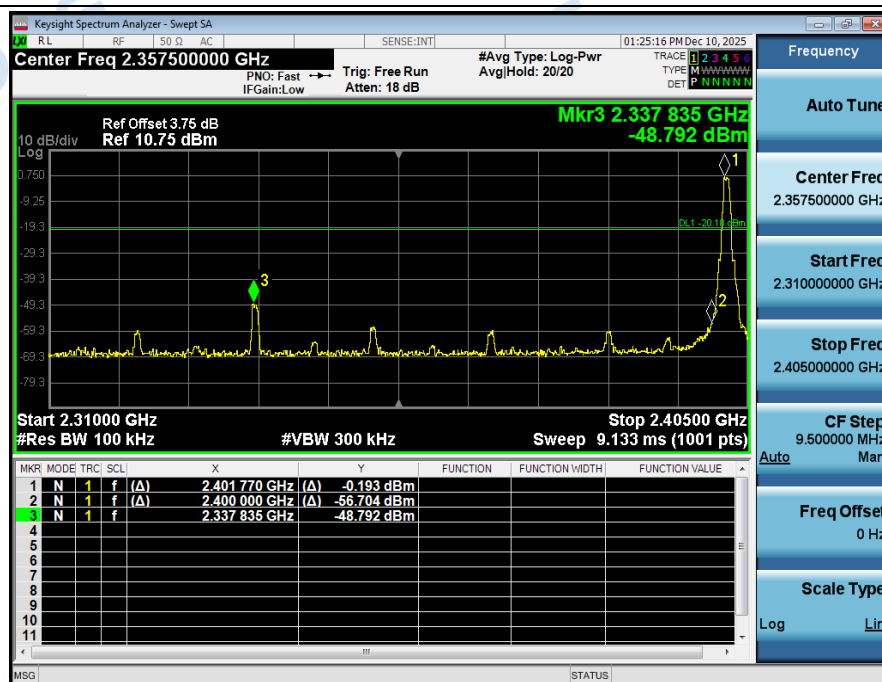

1 Reference_Level_NVNT_ANT1_1Mbps_2480

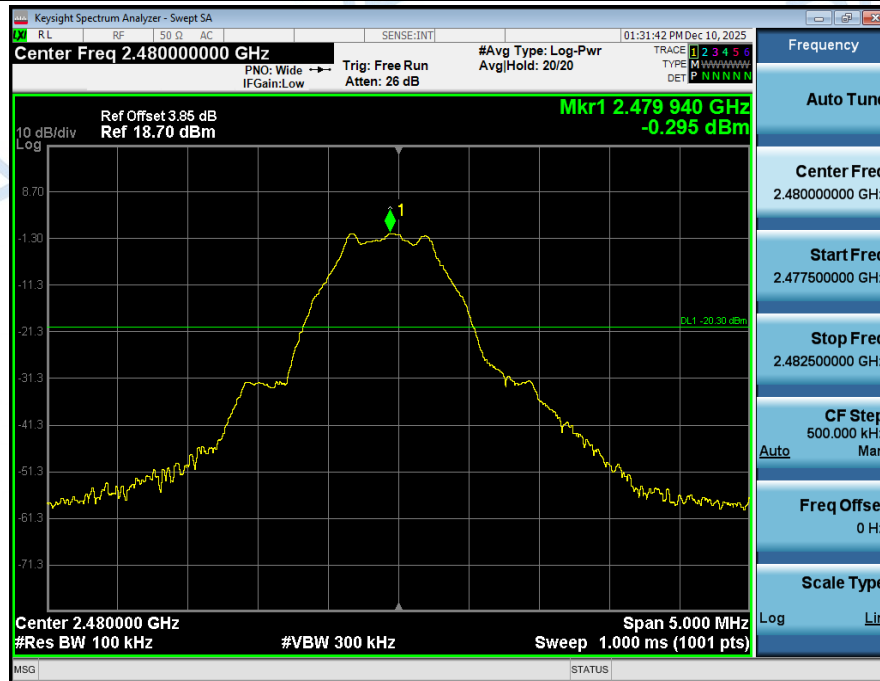


2 Bandedge_NVNT_ANT1_1Mbps_2480

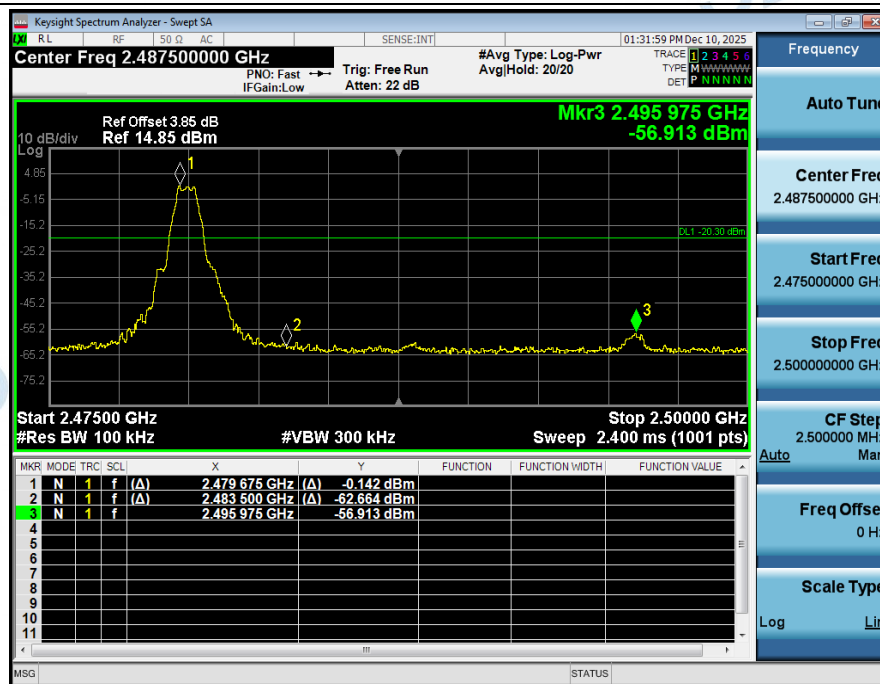

1 Reference_Level_NVNT_ANT1_2Mbps_2402




2 Bandedge_NVNT_ANT1_2Mbps_2402

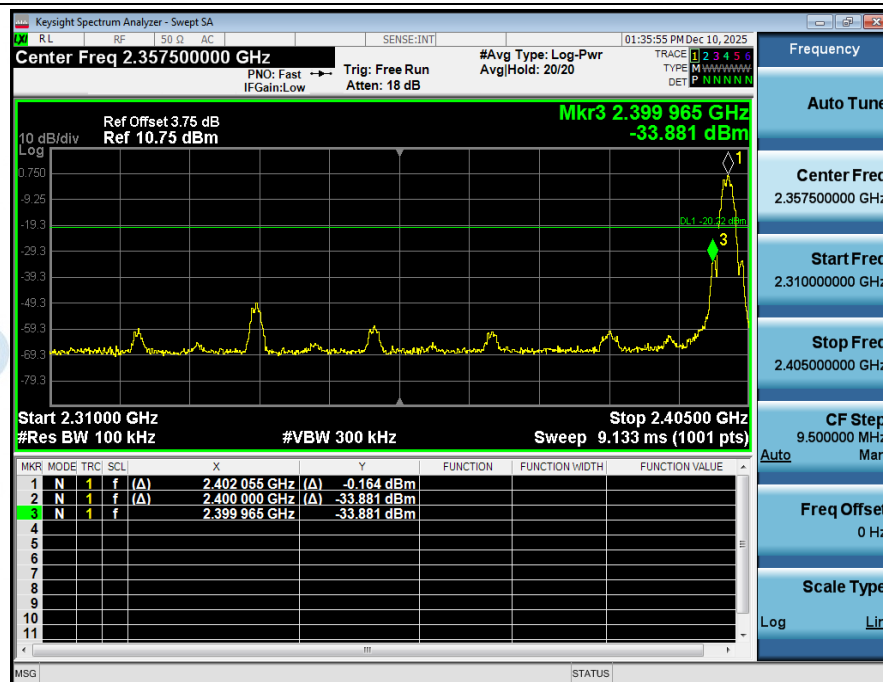

1 Reference_Level_NVNT_ANT1_2Mbps_2480



2 Bandedge_NVNT_ANT1_2Mbps_2480

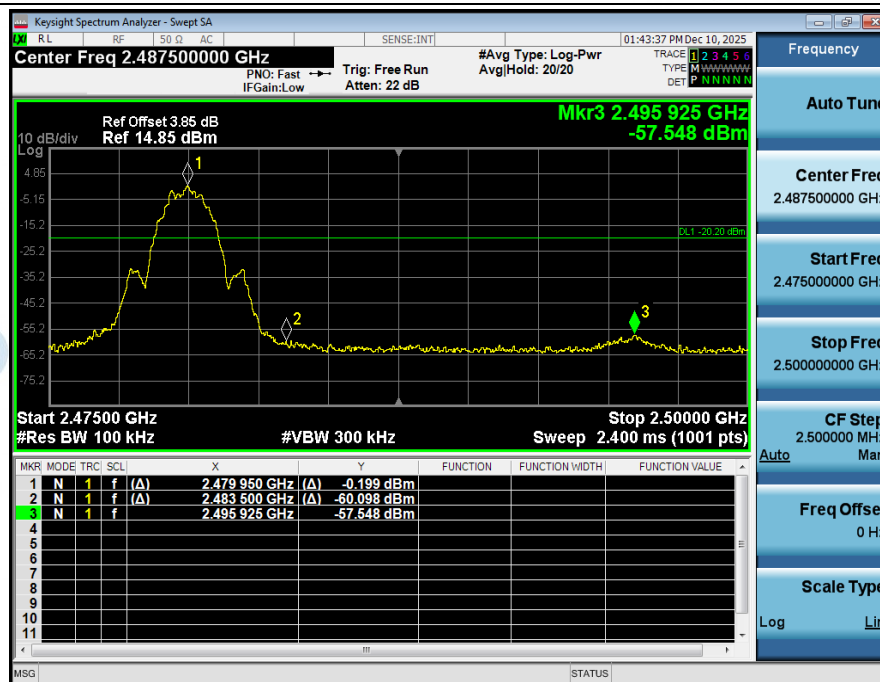


6. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	1Mbps	2402.00	-0.179	-28.219	-20.179	Pass
NVNT	ANT1	1Mbps	2440.00	-0.574	-30.568	-20.574	Pass
NVNT	ANT1	1Mbps	2480.00	-0.295	-28.941	-20.295	Pass
NVNT	ANT1	2Mbps	2402.00	-0.215	-31.937	-20.215	Pass
NVNT	ANT1	2Mbps	2440.00	-0.511	-29.769	-20.511	Pass
NVNT	ANT1	2Mbps	2480.00	-0.200	-28.293	-20.200	Pass

1 Reference_Level_NVNT_ANT1_1Mbps_2402




2 Spurious_Emission_NVNT_ANT1_1Mbps_2402

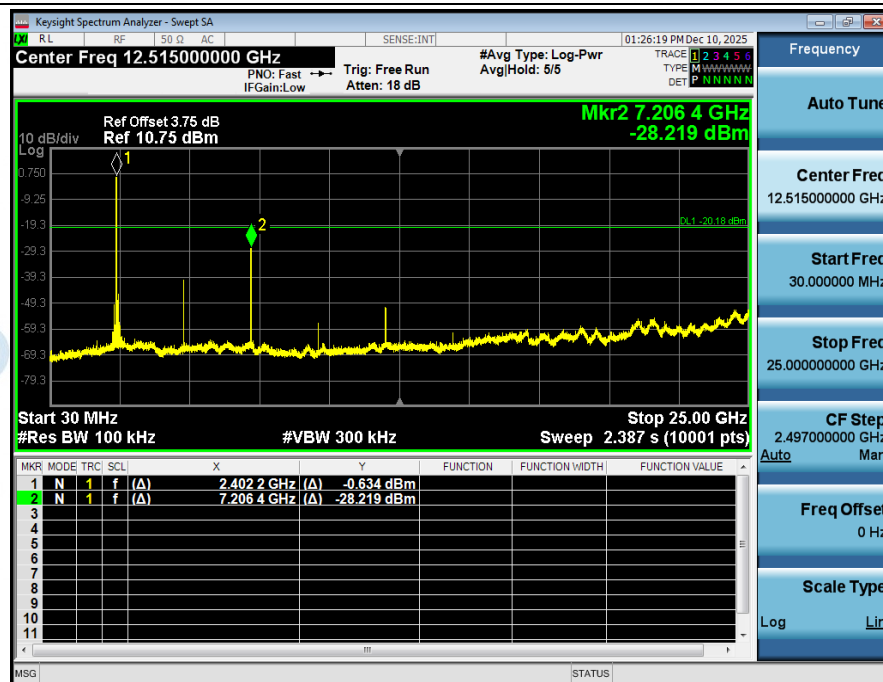


1 Reference_Level_NVNT_ANT1_1Mbps_2440




2 Spurious_Emission_NVNT_ANT1_1Mbps_2440

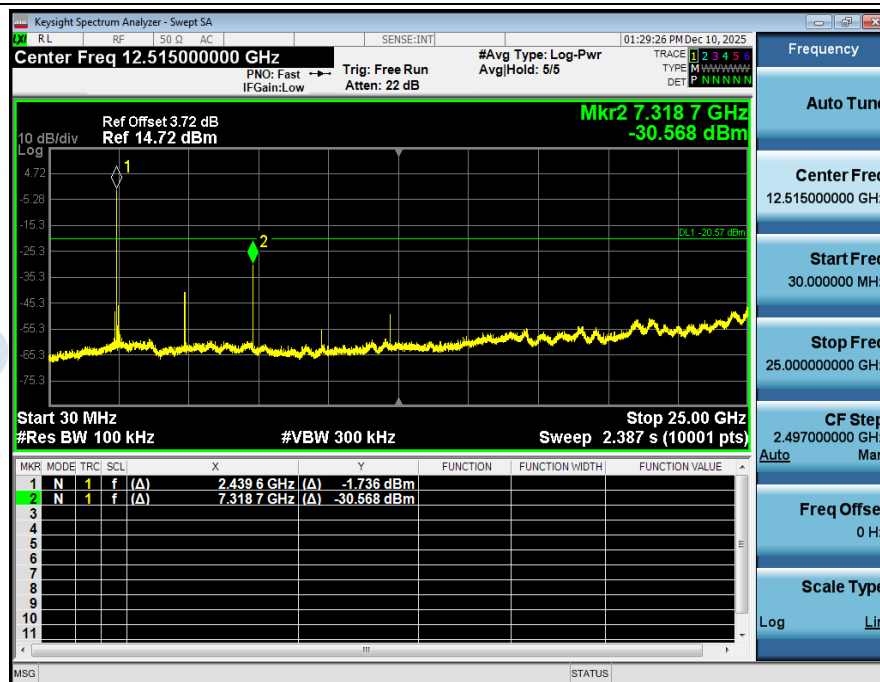

1 Reference_Level_NVNT_ANT1_1Mbps_2480

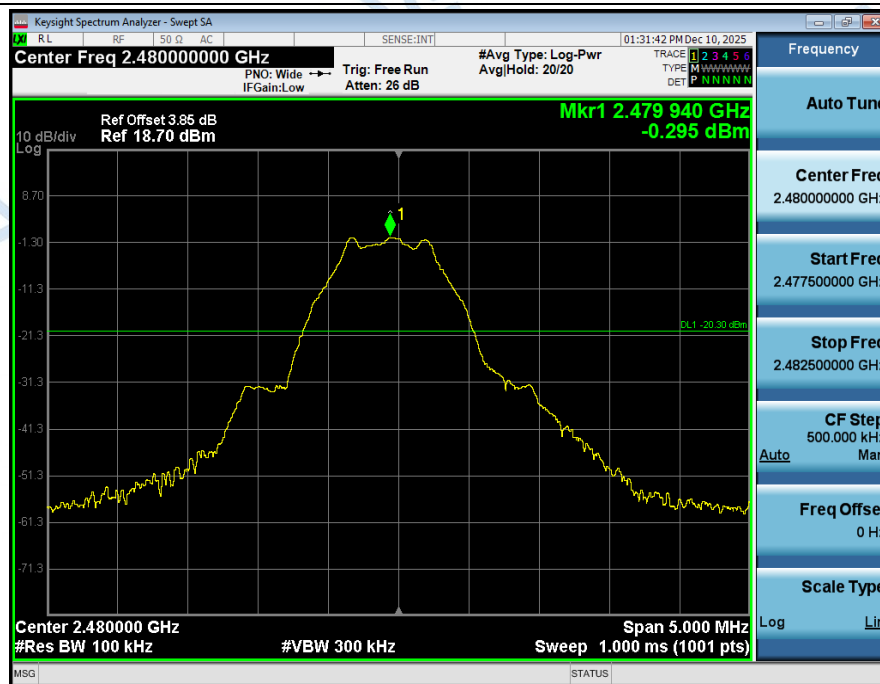


2 Spurious Emission NVNT_ANT1_1Mbps_2480

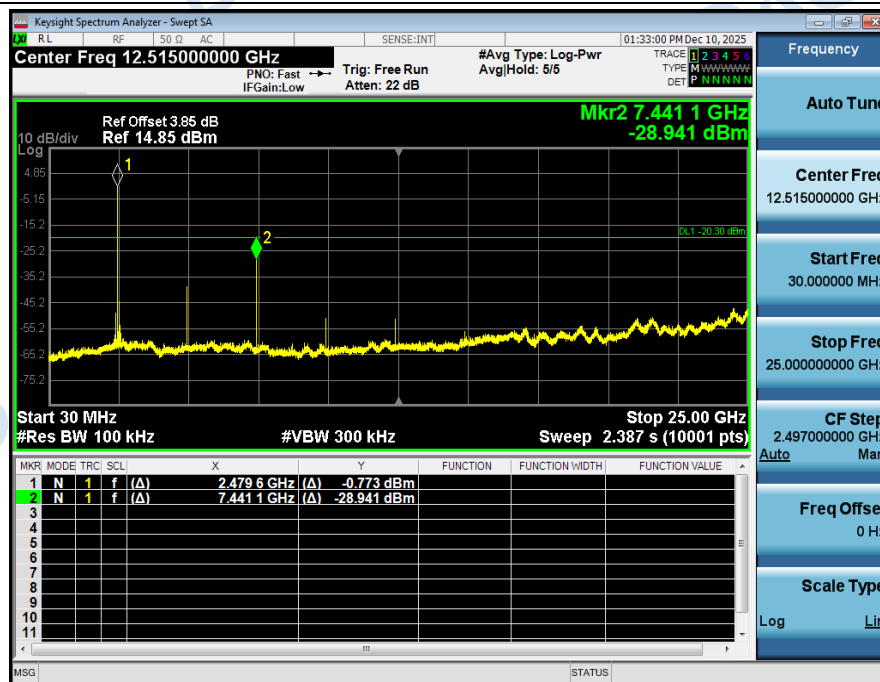

1_Reference_Level_NVNT_ANT1_2Mbps_2402




2_Spurious_Emission_NVNT_ANT1_2Mbps_2402

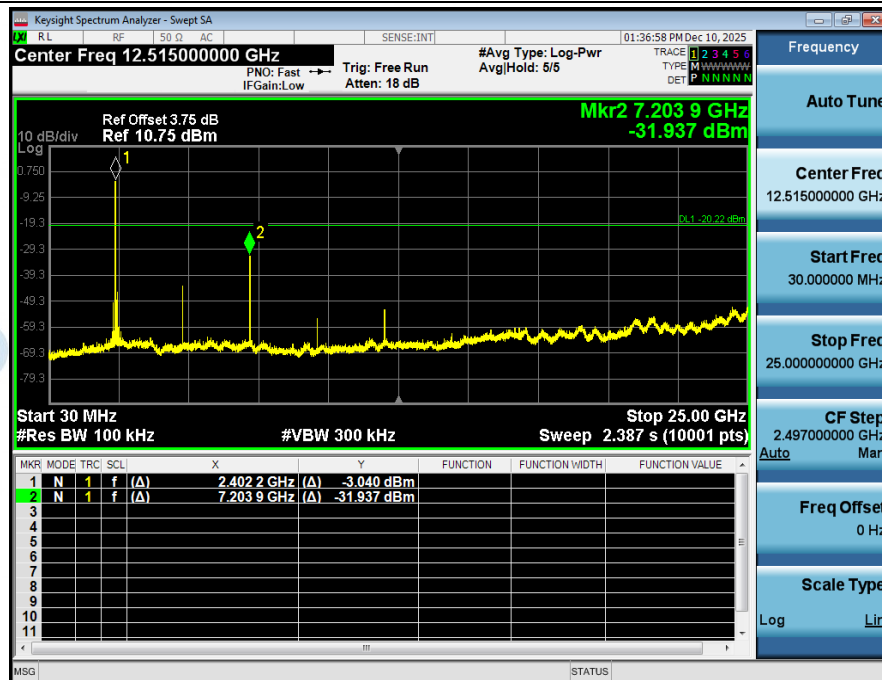

1 Reference_Level_NVNT_ANT1_2Mbps_2440




2 Spurious_Emission_NVNT_ANT1_2Mbps_2440

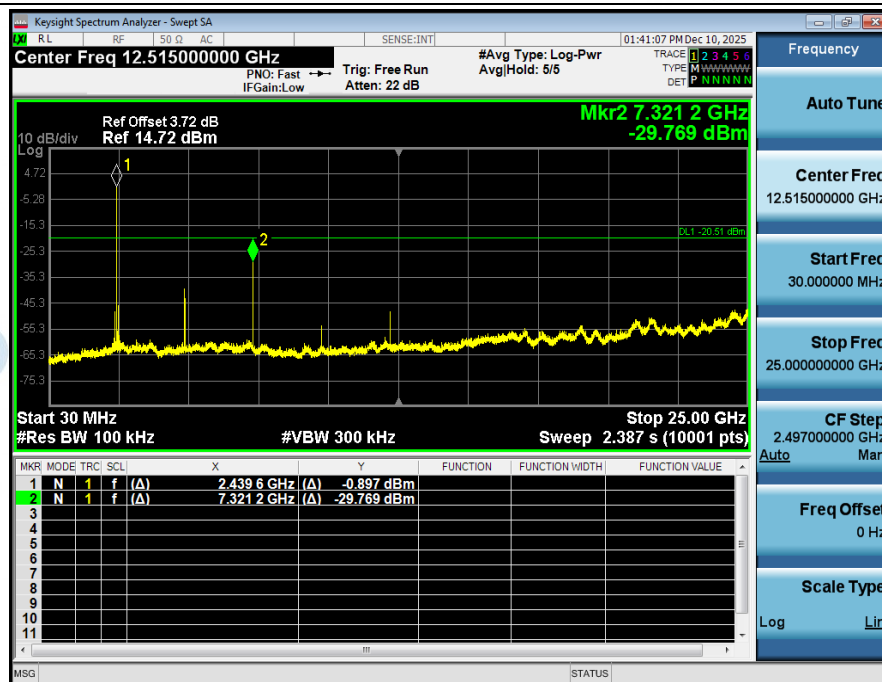

1 Reference_Level_NVNT_ANT1_2Mbps_2480



2 Spurious Emission NVNT_ANT1_2Mbps_2480

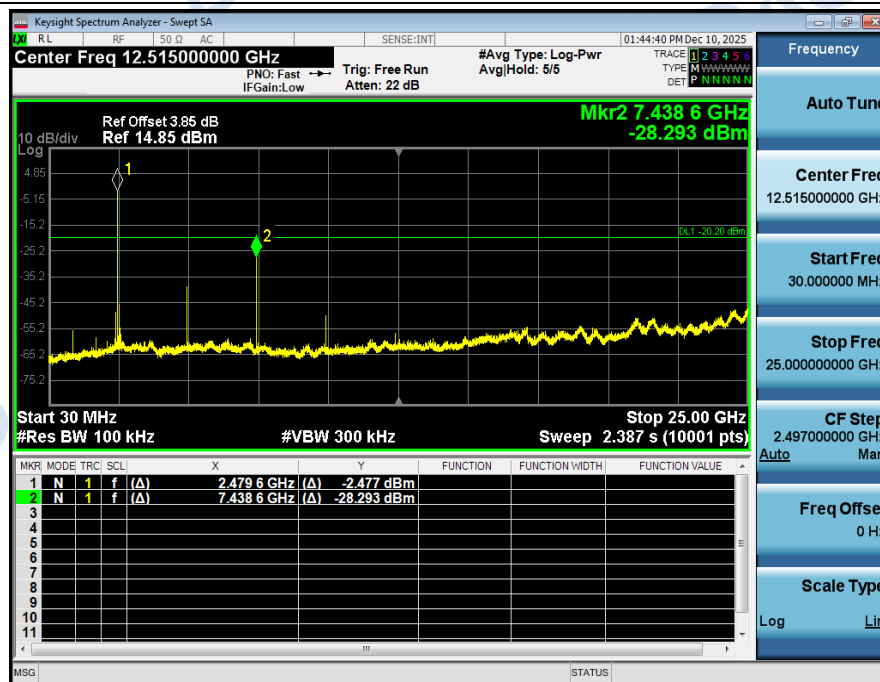

***** End of Report *****