FCC REPORT

Applicant:	SKY RICH STAR LIMITED
Address of Applicant:	Unit E, 10/F, Worldwide Centre, 123 Tung Chau Street, Tai Kok Tsui Kowloon, Hong Kong
Manufacturer/Factory:	Zhongshan Quanxin Lighting Electrical Co., Ltd.
Address of Manufacturer/Factory:	Hong Ji Street, Shalang, Long Ping Cun, West District, ZHONGSHAN Guangdong 528411 CHINA

Equipment Under Test (EUT)

Product Name:	LED Wall Light
Model No.:	BT0312AA0820, BT0312AA0819, BT0312AA####（Where “#” is used to denote numbers or blank for commercial purpose.)
Trade Mark:	Honeywell
FCC ID:	2AP2LBT0312AA0820
Applicable standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.249
Date of sample receipt:	May 30, 2018
Date of Test:	May 31, 2018-June 06, 2018
Date of report issued:	June 07, 2018
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	*June 07, 2018*	*Original*

Prepared By:		***Date:***	*June 07, 2018*
	Project Engineer		
Check By:		***Date:***	*June 07, 2018*
	Reviewer		

3 Contents

Page

1 COVER PAGE 1

2 VERSION 2

3 CONTENTS 3

4 TEST SUMMARY 4

4.1 MEASUREMENT UNCERTAINTY 4

5 GENERAL INFORMATION 5

5.1 GENERAL DESCRIPTION OF EUT 5
5.2 TEST MODE 7
5.3 DESCRIPTION OF SUPPORT UNITS 7
5.4 TEST FACILITY 7
5.5 TEST LOCATION 7

6 TEST INSTRUMENTS LIST 8

7 TEST RESULTS AND MEASUREMENT DATA 9

7.1 ANTENNA REQUIREMENT 9
7.2 CONDUCTED EMISSIONS 10
7.3 RADIATED EMISSION METHOD 13
7.3.1 Field Strength of The Fundamental Signal 16
7.3.2 Spurious emissions 17
7.3.3 Bandedge emissions 22
7.4 20DB OCCUPY BANDWIDTH 23

8 TEST SETUP PHOTO 25

9 EUT CONSTRUCTIONAL DETAILS 27

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Name:	LED Wall Light
Model No.:	BT0312AA0820, BT0312AA0819, BT0312AA####（Where “#” is used to denote numbers or blank for commercial purpose.)
Test Model No:	BT0312AA0820
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The difference is the model name for commercial purpose.	
Serial No.:	QXBT0312
Software version number	V1.27
Hardware version number	V02
Test sample(s) ID:	GTS201805000248-1
Sample(s) Status	Engineered sample
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40
Channel separation:	2MHz
Modulation type:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	0dBi(declare by applicant)
Power supply:	AC120V 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	92.85	95.12	93.27

5.3 Description of Support Units

None

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

● **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	Zhinan	ZN30900A	GTS215	June. 28 2017	June. 27 2018

Conducted Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is PCB antenna, the best case gain of the antenna is 0dBi

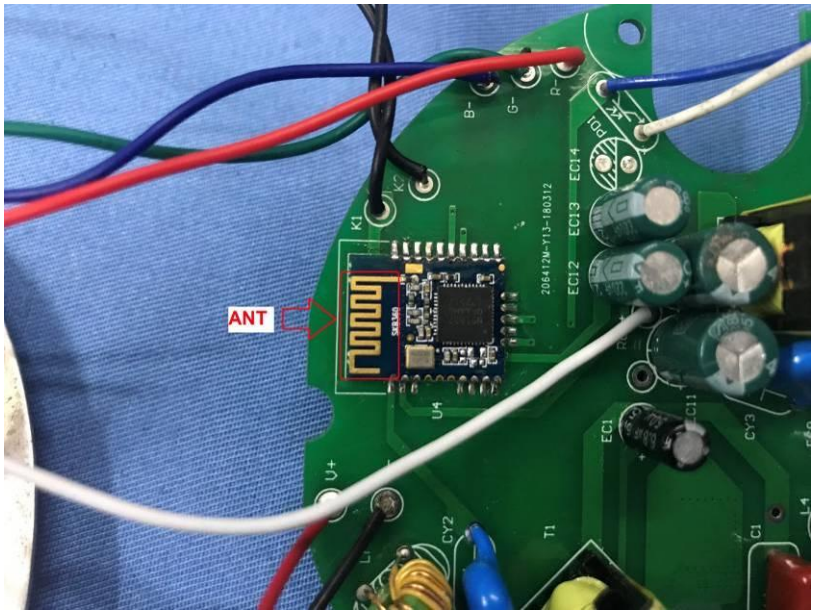

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto
Limit:	<table><tr><td rowspan="2">Frequency range (MHz)</td><td colspan="2">Limit (dBuV)</td></tr><tr><td>Quasi-peak</td><td>Average</td></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.
Test setup:	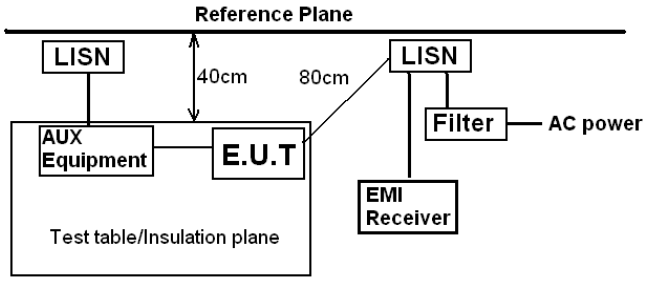 *Remark:* *E.U.T: Equipment Under Test* *LISN: Line Impedence Stabilization Network* *Test table height=0.8m*
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test voltage:	AC120V 60Hz
Test results:	Pass

Measurement data

Mode:	**Transmitting mode**	**Test by:**	**Jason**
Temp./Hum.(%H):	**26℃/56%RH**	**Probe:**	**Line**

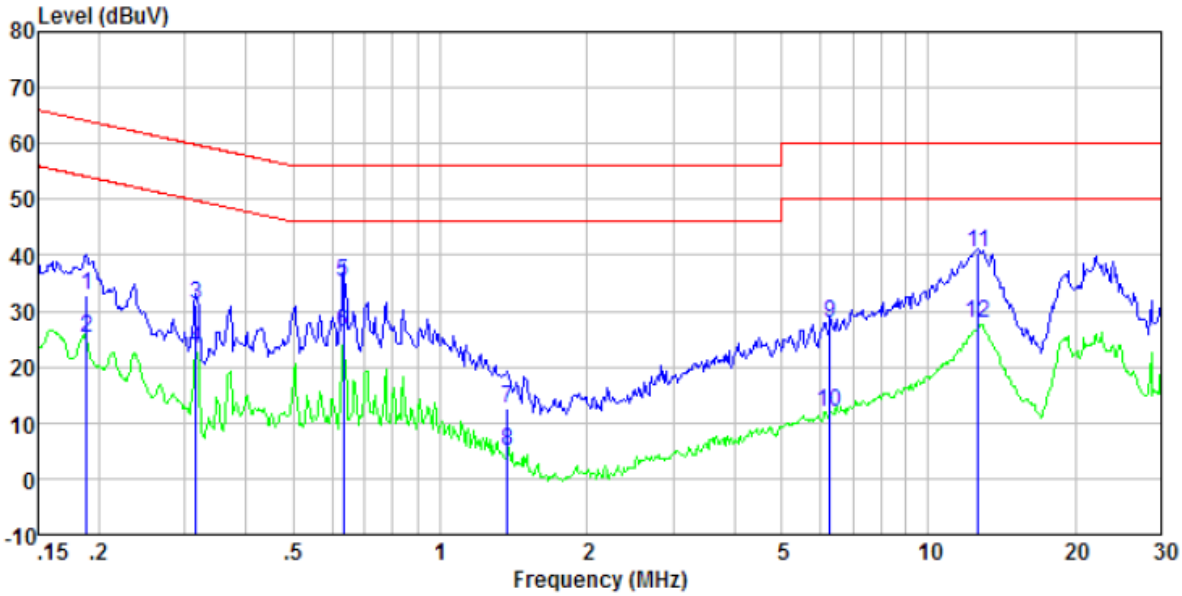

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.19	32.23	0.40	0.10	32.73	64.11	-31.38	QP
0.19	24.72	0.40	0.10	25.22	54.11	-28.89	Average
0.32	30.72	0.39	0.10	31.21	59.80	-28.59	QP
0.32	22.76	0.39	0.10	23.25	49.80	-26.55	Average
0.63	34.66	0.28	0.12	35.06	56.00	-20.94	QP
0.63	25.73	0.28	0.12	26.13	46.00	-19.87	Average
1.37	12.33	0.20	0.16	12.69	56.00	-43.31	QP
1.37	4.71	0.20	0.16	5.07	46.00	-40.93	Average
6.29	27.44	0.20	0.18	27.82	60.00	-32.18	QP
6.29	11.48	0.20	0.18	11.86	50.00	-38.14	Average
12.65	39.95	0.20	0.21	40.36	60.00	-19.64	QP
12.65	27.51	0.20	0.21	27.92	50.00	-22.08	Average

Mode:	**Transmitting mode**	**Test by:**	**Jason**
Temp./Hum.(%H):	**26℃/56%RH**	**Probe:**	**Neutral**

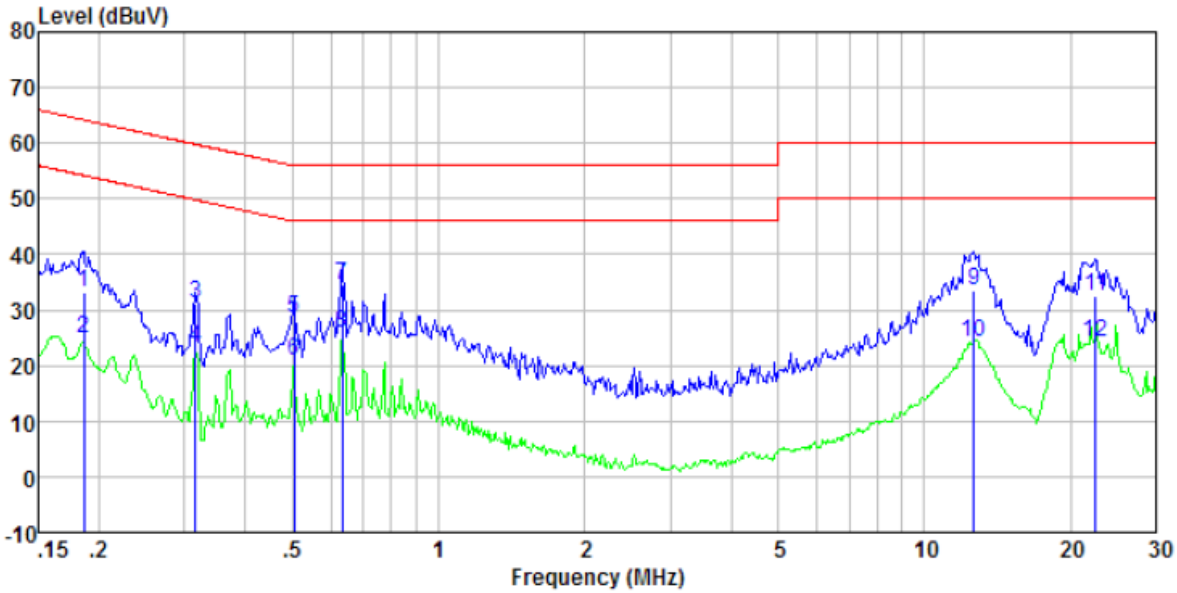

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.19	32.55	0.40	0.10	33.05	64.20	-31.15	QP
0.19	24.26	0.40	0.10	24.76	54.20	-29.44	Average
0.32	30.81	0.39	0.10	31.30	59.80	-28.50	QP
0.32	22.77	0.39	0.10	23.26	49.80	-26.54	Average
0.50	28.16	0.31	0.11	28.58	56.00	-27.42	QP
0.50	20.52	0.31	0.11	20.94	46.00	-25.06	Average
0.63	34.13	0.28	0.12	34.53	56.00	-21.47	QP
0.63	25.32	0.28	0.12	25.72	46.00	-20.28	Average
12.65	33.13	0.20	0.21	33.54	60.00	-26.46	QP
12.65	23.96	0.20	0.21	24.37	50.00	-25.63	Average
22.54	31.80	0.33	0.23	32.36	60.00	-27.64	QP
22.54	23.69	0.33	0.23	24.25	50.00	-25.75	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

7.3 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Remark
9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

Limit:
(Field strength of the fundamental signal)

Frequency	Limit (dBuV/m @3m)	Remark
2400MHz-2483.5MHz	94.00	Average Value
	114.00	Peak Value

Limit:
(Spurious Emissions)

Frequency	Limit (uV/m)	Remark
0.009MHz-0.490MHz	2400/F(kHz) @300m	Quasi-peak Value
0.490MHz-1.705MHz	24000/F(kHz) @30m	Quasi-peak Value
1.705MHz-30.0MHz	30 @30m	Quasi-peak Value
30MHz-88MHz	100 @3m	Quasi-peak Value
88MHz-216MHz	150 @3m	Quasi-peak Value
216MHz-960MHz	200 @3m	Quasi-peak Value
960MHz-1GHz	500 @3m	Quasi-peak Value
Above 1GHz	500 @3m	Average Value
	5000 @3m	Peak Value

Limit:
(band edge)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Test setup:

Below 1GHz

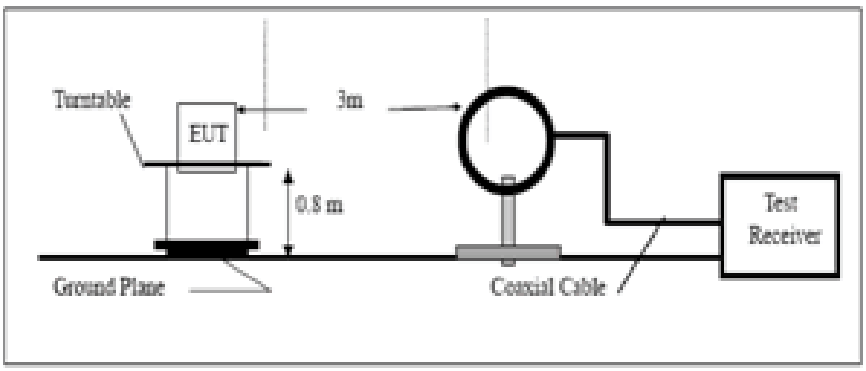

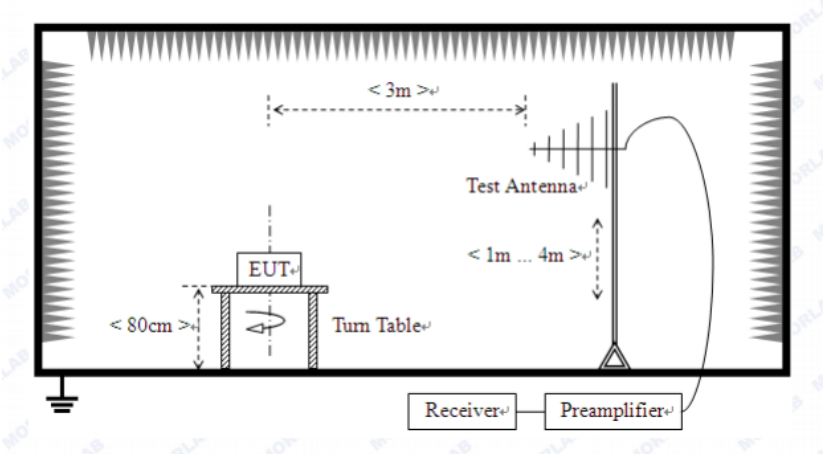

Above 1GHz

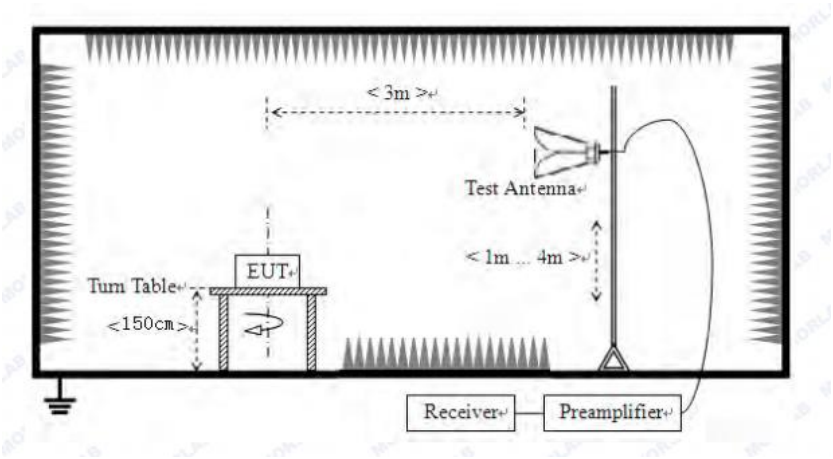

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or

	average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test voltage:	AC120V 60Hz
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	90.99	27.58	5.39	30.18	93.78	114.00	-20.22	Vertical
2402.00	88.59	27.58	5.39	30.18	91.38	114.00	-22.62	Horizontal
2440.00	89.40	27.55	5.43	30.06	92.32	114.00	-21.68	Vertical
2440.00	87.61	27.55	5.43	30.06	90.53	114.00	-23.47	Horizontal
2480.00	92.06	27.52	5.47	29.93	95.12	114.00	-18.88	Vertical
2480.00	89.04	27.52	5.47	29.93	92.10	114.00	-21.90	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	81.47	27.58	5.39	30.18	84.26	94.00	-9.74	Vertical
2402.00	78.89	27.58	5.39	30.18	81.68	94.00	-12.32	Horizontal
2440.00	79.58	27.55	5.43	30.06	82.50	94.00	-11.50	Vertical
2440.00	76.64	27.55	5.43	30.06	79.56	94.00	-14.44	Horizontal
2480.00	82.76	27.52	5.47	29.93	85.82	94.00	-8.18	Vertical
2480.00	79.46	27.52	5.47	29.93	82.52	94.00	-11.48	Horizontal

7.3.2 Spurious emissions

- Below 30MHz

  The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

- Below 1GHz

Mode:	**Transmitting mode**	**Test by:**	**Jason**
Temp./Hum.(%H):	**26℃/56%RH**	**Polarziation:**	**Horizontal**

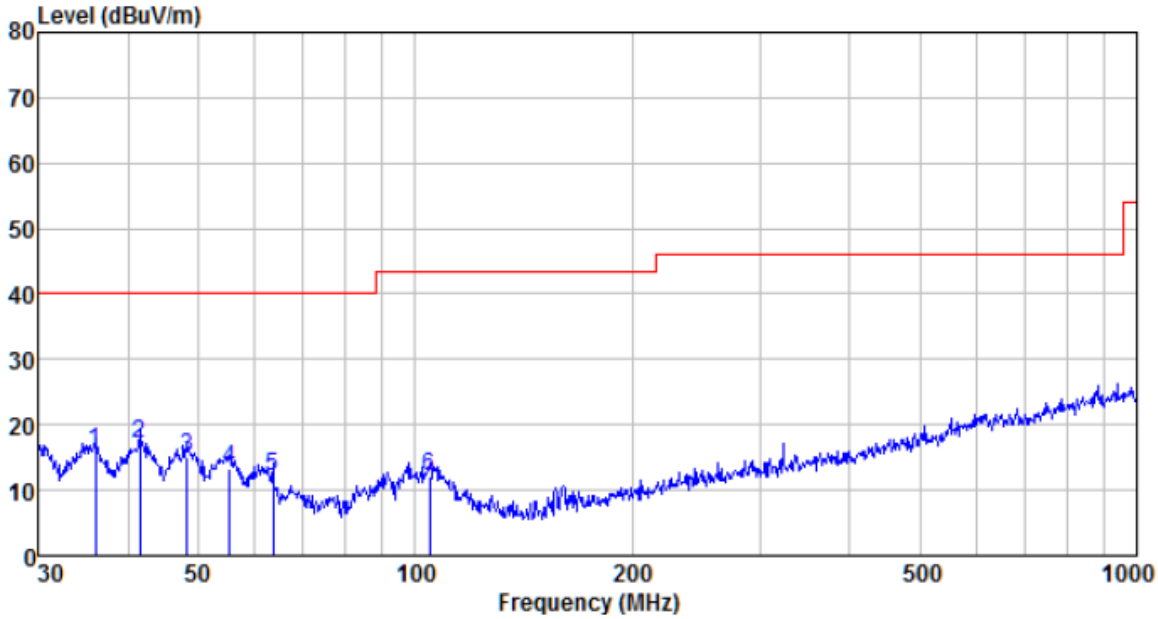

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
36.001	39.22	11.52	0.62	35.42	15.94	40.00	-24.06	QP
41.567	40.05	12.22	0.68	35.75	17.20	40.00	-22.80	QP
48.332	38.07	12.29	0.75	36.10	15.01	40.00	-24.99	QP
55.221	36.87	11.78	0.82	36.26	13.21	40.00	-26.79	QP
63.536	37.62	9.92	0.89	36.37	12.06	40.00	-27.94	QP
104.536	36.05	11.68	1.23	36.76	12.20	43.50	-31.30	QP

Mode:	**Transmitting mode**	**Test by:**	**Jason**
Temp./Hum.(%H):	**26℃/56%RH**	**Polarziation:**	**Vertical**

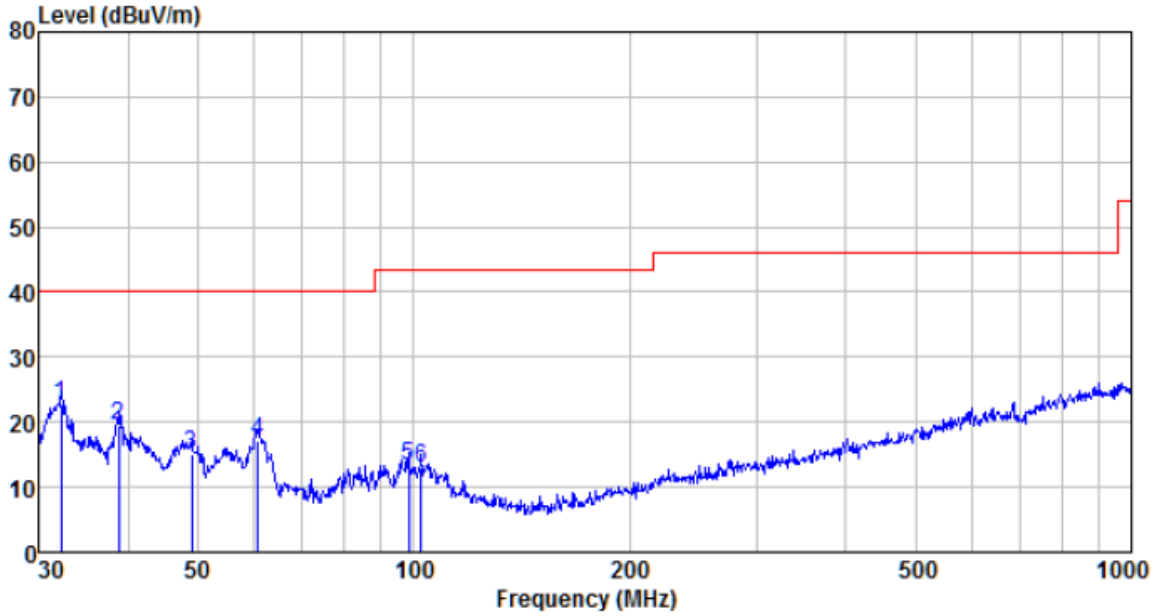

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
32.293	46.00	11.25	0.58	35.17	22.66	40.00	-17.34	QP
38.752	42.44	12.01	0.65	35.59	19.51	40.00	-20.49	QP
49.014	38.27	12.29	0.76	36.13	15.19	40.00	-24.81	QP
60.704	41.43	11.07	0.87	36.33	17.04	40.00	-22.96	QP
98.487	36.94	12.00	1.18	36.71	13.41	43.50	-30.09	QP
102.360	36.71	11.89	1.21	36.74	13.07	43.50	-30.43	QP

■ Above 1GHz

Test channel:	Lowest channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	34.97	31.78	8.60	32.09	43.26	74.00	-30.74	Vertical
7206.00	30.28	36.15	11.65	32.00	46.08	74.00	-27.92	Vertical
9608.00	30.09	37.95	14.14	31.62	50.56	74.00	-23.44	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	38.78	31.78	8.60	32.09	47.07	74.00	-26.93	Horizontal
7206.00	31.83	36.15	11.65	32.00	47.63	74.00	-26.37	Horizontal
9608.00	29.29	37.95	14.14	31.62	49.76	74.00	-24.24	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.23	31.78	8.60	32.09	32.52	54.00	-21.48	Vertical
7206.00	19.23	36.15	11.65	32.00	35.03	54.00	-18.97	Vertical
9608.00	18.45	37.95	14.14	31.62	38.92	54.00	-15.08	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.20	31.78	8.60	32.09	36.49	54.00	-17.51	Horizontal
7206.00	21.25	36.15	11.65	32.00	37.05	54.00	-16.95	Horizontal
9608.00	17.99	37.95	14.14	31.62	38.46	54.00	-15.54	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	34.84	31.85	8.67	32.12	43.24	74.00	-30.76	Vertical
7320.00	30.20	36.37	11.72	31.89	46.40	74.00	-27.60	Vertical
9760.00	30.01	38.35	14.25	31.62	50.99	74.00	-23.01	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	38.62	31.85	8.67	32.12	47.02	74.00	-26.98	Horizontal
7320.00	31.73	36.37	11.72	31.89	47.93	74.00	-26.07	Horizontal
9760.00	29.20	38.35	14.25	31.62	50.18	74.00	-23.82	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.12	31.85	8.67	32.12	32.52	54.00	-21.48	Vertical
7320.00	19.16	36.37	11.72	31.89	35.36	54.00	-18.64	Vertical
9760.00	18.39	38.35	14.25	31.62	39.37	54.00	-14.63	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	28.08	31.85	8.67	32.12	36.48	54.00	-17.52	Horizontal
7320.00	21.17	36.37	11.72	31.89	37.37	54.00	-16.63	Horizontal
9760.00	17.92	38.35	14.25	31.62	38.90	54.00	-15.10	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	34.57	31.93	8.73	32.16	43.07	74.00	-30.93	Vertical
7440.00	30.01	36.59	11.79	31.78	46.61	74.00	-27.39	Vertical
9920.00	29.85	38.81	14.38	31.88	51.16	74.00	-22.84	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.29	31.93	8.73	32.16	46.79	74.00	-27.21	Horizontal
7440.00	31.53	36.59	11.79	31.78	48.13	74.00	-25.87	Horizontal
9920.00	29.02	38.81	14.38	31.88	50.33	74.00	-23.67	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	23.90	31.93	8.73	32.16	32.40	54.00	-21.60	Vertical
7440.00	19.01	36.59	11.79	31.78	35.61	54.00	-18.39	Vertical
9920.00	18.26	38.81	14.38	31.88	39.57	54.00	-14.43	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	27.82	31.93	8.73	32.16	36.32	54.00	-17.68	Horizontal
7440.00	21.00	36.59	11.79	31.78	37.60	54.00	-16.40	Horizontal
9920.00	17.76	38.81	14.38	31.88	39.07	54.00	-14.93	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	38.39	27.59	5.38	30.18	41.18	74.00	-32.82	Horizontal
2390.00	54.53	27.58	5.39	30.18	57.32	74.00	-16.68	Horizontal
2310.00	38.51	27.59	5.38	30.18	41.30	74.00	-32.70	Vertical
2390.00	56.09	27.58	5.39	30.18	58.88	74.00	-15.12	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.95	27.59	5.38	30.18	32.74	54.00	-21.26	Horizontal
2390.00	40.92	27.58	5.39	30.18	43.71	54.00	-10.29	Horizontal
2310.00	29.58	27.59	5.38	30.18	32.37	54.00	-21.63	Vertical
2390.00	42.14	27.58	5.39	30.18	44.93	54.00	-9.07	Vertical

Test channel:	Highest channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	39.96	27.53	5.47	29.93	43.03	74.00	-30.97	Horizontal
2500.00	39.98	27.55	5.49	29.93	43.09	74.00	-30.91	Horizontal
2483.50	40.05	27.53	5.47	29.93	43.12	74.00	-30.88	Vertical
2500.00	40.56	27.55	5.49	29.93	43.67	74.00	-30.33	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	32.73	27.53	5.47	29.93	35.80	54.00	-18.20	Horizontal
2500.00	31.37	27.55	5.49	29.93	34.48	54.00	-19.52	Horizontal
2483.50	33.56	27.53	5.47	29.93	36.63	54.00	-17.37	Vertical
2500.00	30.92	27.55	5.49	29.93	34.03	54.00	-19.97	Vertical

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*

7.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	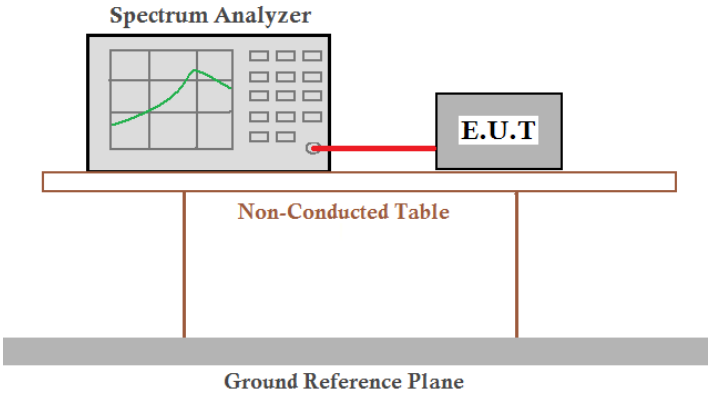
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.240	Pass
Middle	1.243	Pass
Highest	1.262	Pass

Test plot as follows:

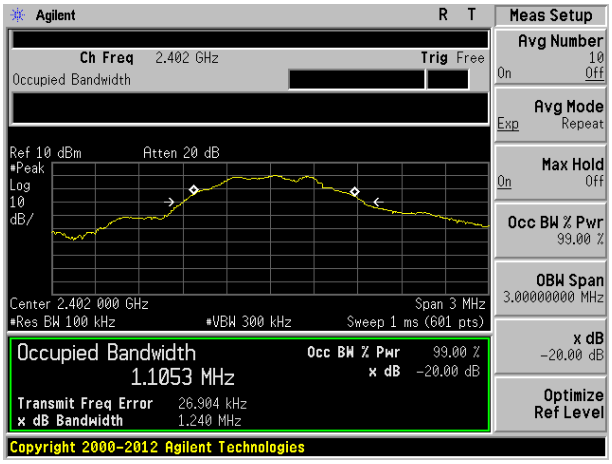

Lowest channel

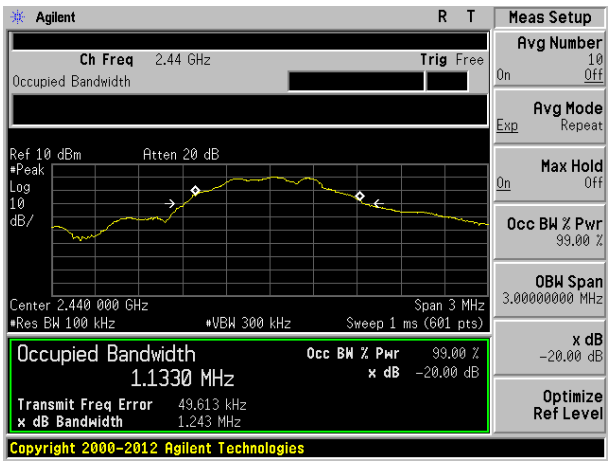

Middle channel

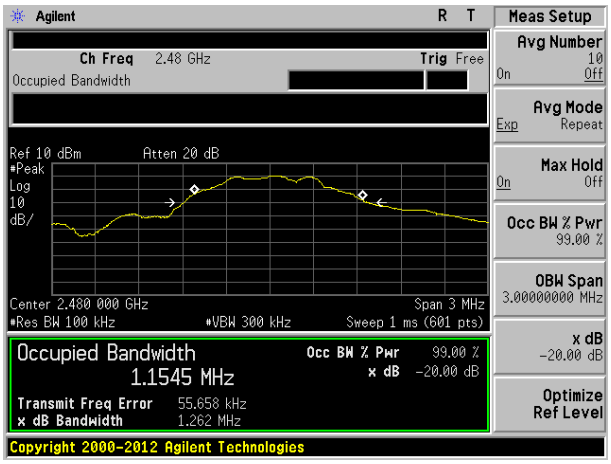

Highest channel

8 Test Setup Photo

Radiated Emission

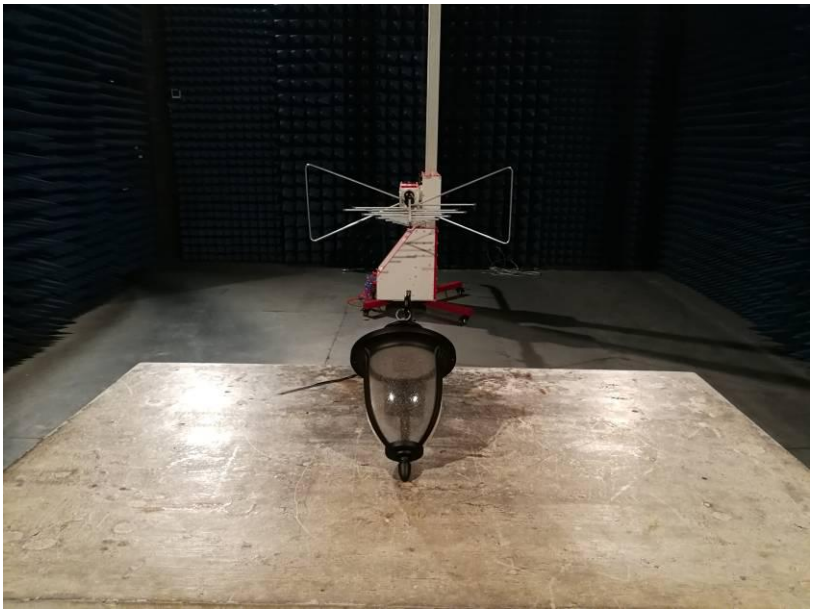

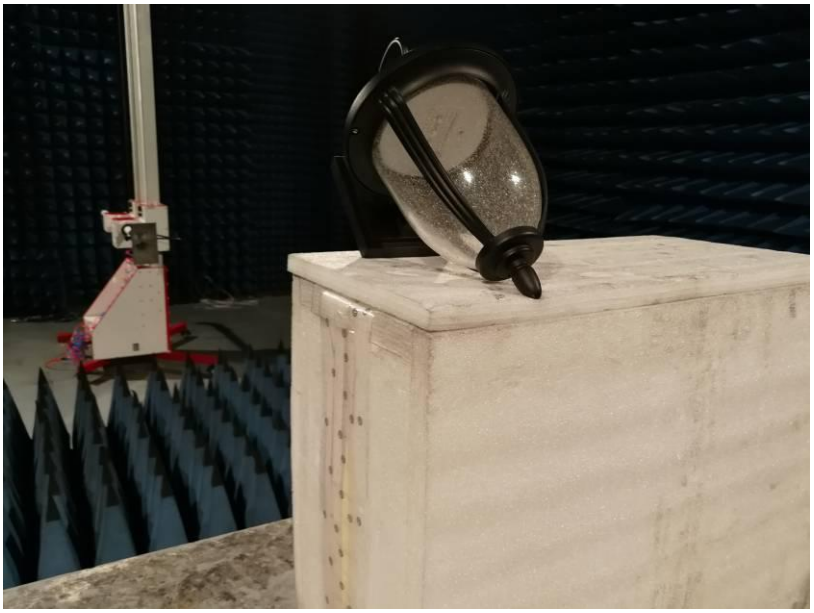

Conducted Emission

9 EUT Constructional Details

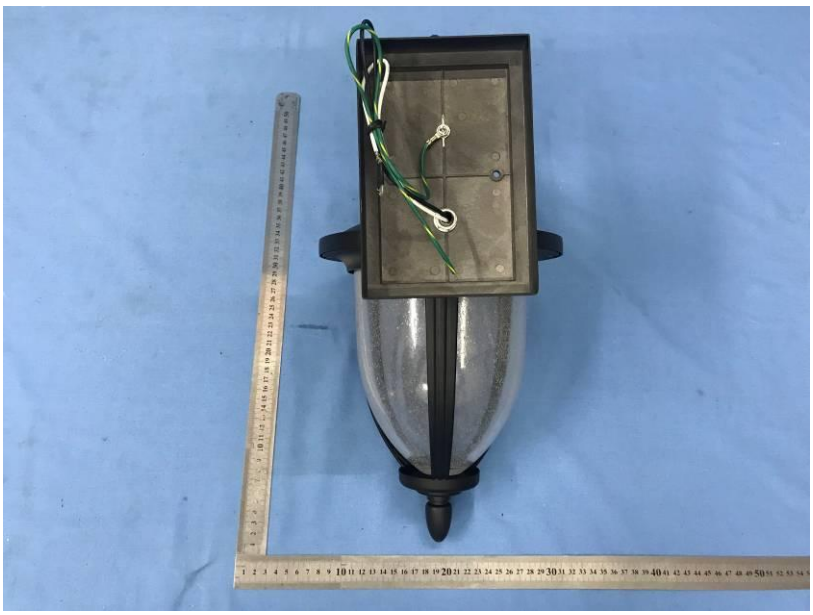

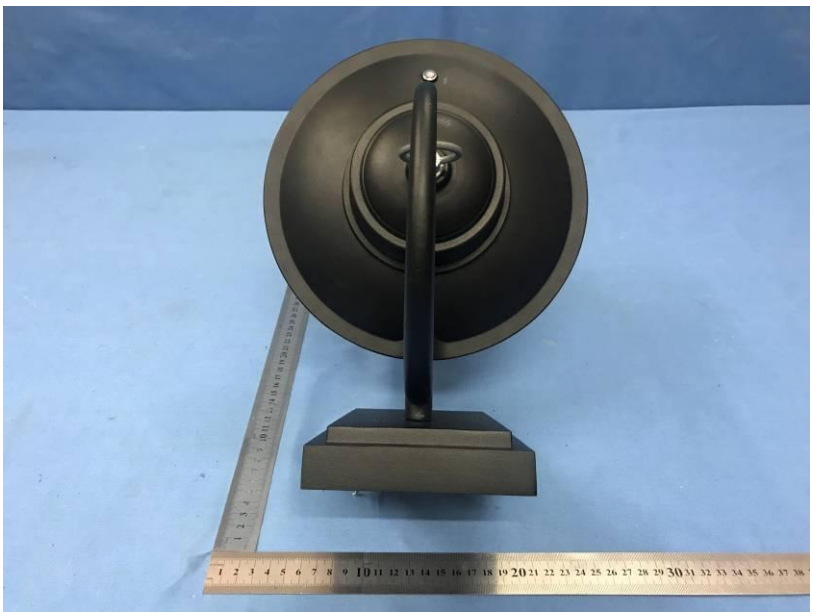

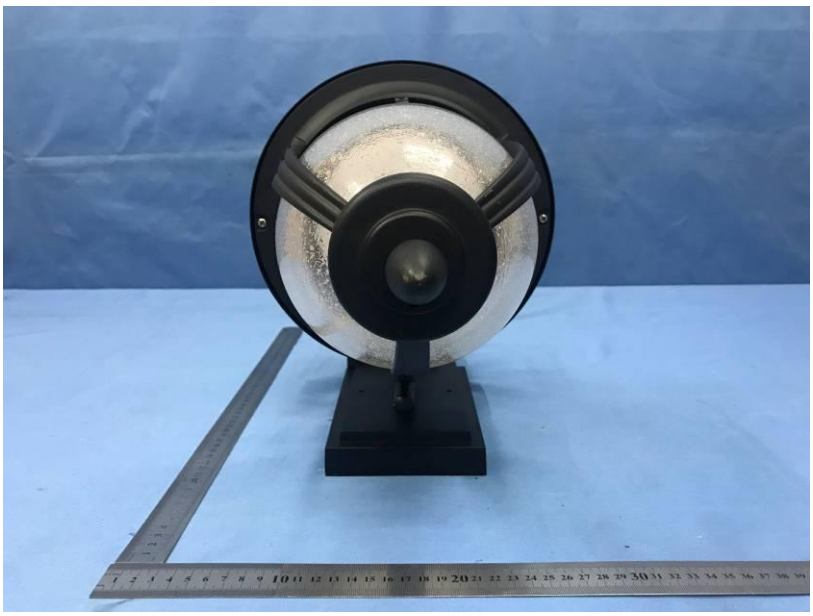

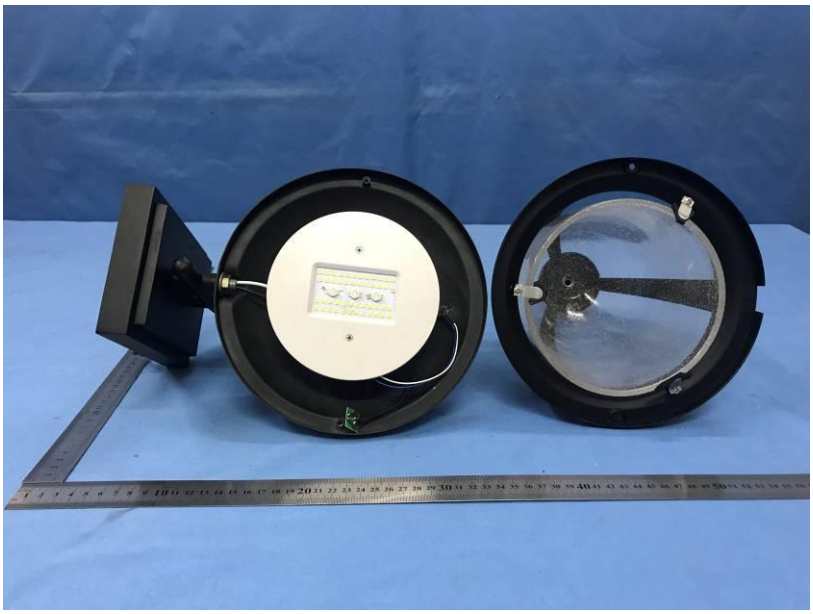

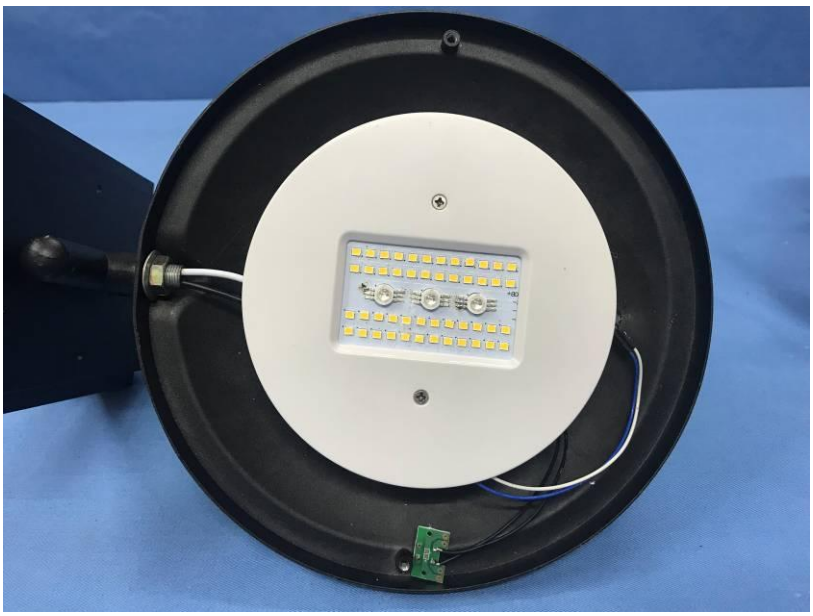

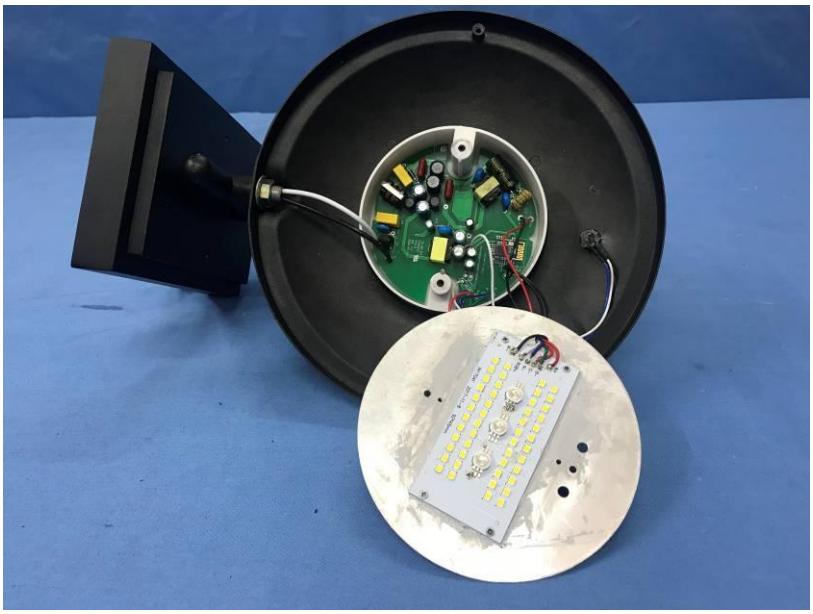

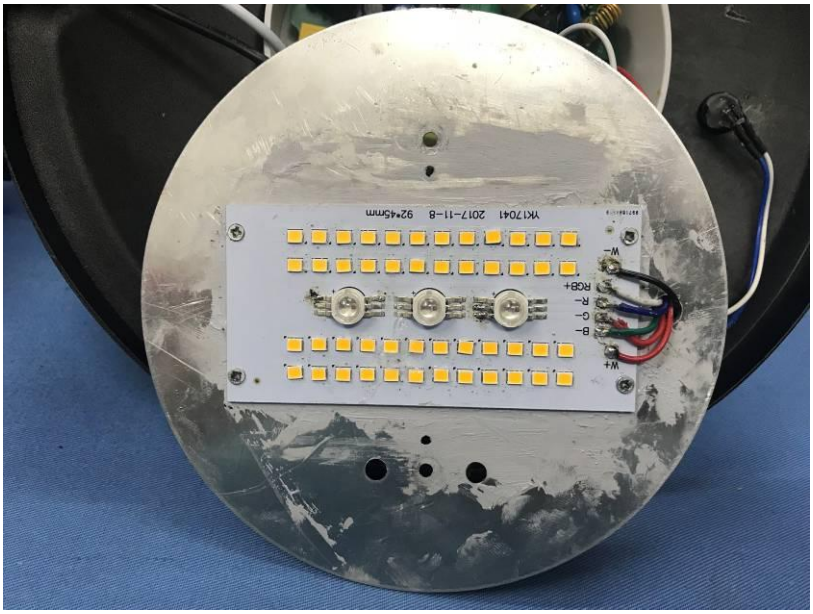
W+
B-
G-
R-
RGB+
W-
YK17041 2017-11-8 92*45mm

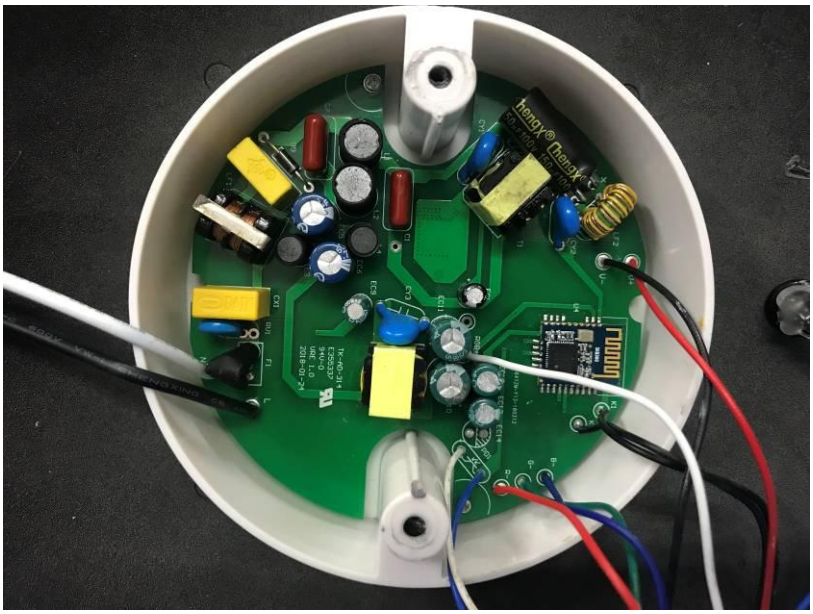
henry
CN1
CN2
CN3
CN4
CN5
CN6
CN7
CN8
CN9
CN10
CN11
CN12
CN13
CN14
CN15
CN16
CN17
CN18
CN19
CN20
CN21
CN22
CN23
CN24
CN25
CN26
CN27
CN28
CN29
CN30
CN31
CN32
CN33
CN34
CN35
CN36
CN37
CN38
CN39
CN40
CN41
CN42
CN43
CN44
CN45
CN46
CN47
CN48
CN49
CN50
CN51
CN52
CN53
CN54
CN55
CN56
CN57
CN58
CN59
CN60
CN61
CN62
CN63
CN64
CN65
CN66
CN67
CN68
CN69
CN70
CN71
CN72
CN73
CN74
CN75
CN76
CN77
CN78
CN79
CN80
CN81
CN82
CN83
CN84
CN85
CN86
CN87
CN88
CN89
CN90
CN91
CN92
CN93
CN94
CN95
CN96
CN97
CN98
CN99
CN100
CN101
CN102
CN103
CN104
CN105
CN106
CN107
CN108
CN109
CN110
CN111
CN112
CN113
CN114
CN115
CN116
CN117
CN118
CN119
CN120
CN121
CN122
CN123
CN124
CN125
CN126
CN127
CN128
CN129
CN130
CN131
CN132
CN133
CN134
CN135
CN136
CN137
CN138
CN139
CN140
CN141
CN142
CN143
CN144
CN145
CN146
CN147
CN148
CN149
CN150
CN151
CN152
CN153
CN154
CN155
CN156
CN157
CN158
CN159
CN160
CN161
CN162
CN163
CN164
CN165
CN166
CN167
CN168
CN169
CN170
CN171
CN172
CN173
CN174
CN175
CN176
CN177
CN178
CN179
CN180
CN181
CN182
CN183
CN184
CN185
CN186
CN187
CN188
CN189
CN190
CN191
CN192
CN193
CN194
CN195
CN196
CN197
CN198
CN199
CN200
CN201
CN202
CN203
CN204
CN205
CN206
CN207
CN208
CN209
CN210
CN211
CN212
CN213
CN214
CN215
CN216
CN217
CN218
CN219
CN220
CN221
CN222
CN223
CN224
CN225
CN226
CN227
CN228
CN229
CN230
CN231
CN232
CN233
CN234
CN235
CN236
CN237
CN238
CN239
CN240
CN241
CN242
CN243
CN244
CN245
CN246
CN247
CN248
CN249
CN250
CN251
CN252
CN253
CN254
CN255
CN256
CN257
CN258
CN259
CN260
CN261
CN262
CN263
CN264
CN265
CN266
CN267
CN268
CN269
CN270
CN271
CN272
CN273
CN274
CN275
CN276
CN277
CN278
CN279
CN280
CN281
CN282
CN283
CN284
CN285
CN286
CN287
CN288
CN289
CN290
CN291
CN292
CN293
CN294
CN295
CN296
CN297
CN298
CN299
CN300
CN301
CN302
CN303
CN304
CN305
CN306
CN307
CN308
CN309
CN310
CN311
CN312
CN313
CN314
CN315
CN316
CN317
CN318
CN319
CN320
CN321
CN322
CN323
CN324
CN325
CN326
CN327
CN328
CN329
CN330
CN331
CN332
CN333
CN334
CN335
CN336
CN337
CN338
CN339
CN340
CN341
CN342
CN343
CN344
CN345
CN346
CN347
CN348
CN349
CN350
CN351
CN352
CN353
CN354
CN355
CN356
CN357
CN358
CN359
CN360
CN361
CN362
CN363
CN364
CN365
CN366
CN367
CN368
CN369
CN370
CN371
CN372
CN373
CN374
CN375
CN376
CN377
CN378
CN379
CN380
CN381
CN382
CN383
CN384
CN385
CN386
CN387
CN388
CN389
CN390
CN391
CN392
CN393
CN394
CN395
CN396
CN397
CN398
CN399
CN400
CN401
CN402
CN403
CN404
CN405
CN406
CN407
CN408
CN409
CN410
CN411
CN412
CN413
CN414
CN415
CN416
CN417
CN418
CN419
CN420
CN421
CN422
CN423
CN424
CN425
CN426
CN427
CN428
CN429
CN430
CN431
CN432
CN433
CN434
CN435
CN436
CN437
CN438
CN439
CN440
CN441
CN442
CN443
CN444
CN445
CN446
CN447
CN448
CN449
CN450
CN451
CN452
CN453
CN454
CN455
CN456
CN457
CN458
CN459
CN460
CN461
CN462
CN463
CN464
CN465
CN466
CN467
CN468
CN469
CN470
CN471
CN472
CN473
CN474
CN475
CN476
CN477
CN478
CN479
CN480
CN481
CN482
CN483
CN484
CN485
CN486
CN487
CN488
CN489
CN490
CN491
CN492
CN493
CN494
CN495
CN496
CN497
CN498
CN499
CN500
CN501
CN502
CN503
CN504
CN505
CN506
CN507
CN508
CN509
CN510
CN511
CN512
CN513
CN514
CN515
CN516
CN517
CN518
CN519
CN520
CN521
CN522
CN523
CN524
CN525
CN526
CN527
CN528
CN529
CN530
CN531
CN532
CN533
CN534
CN535
CN536
CN537
CN538
CN539
CN540
CN541
CN542
CN543
CN544
CN545
CN546
CN547
CN548
CN549
CN550
CN551
CN552
CN553
CN554
CN555
CN556
CN557
CN558
CN559
CN560
CN561
CN562
CN563
CN564
CN565
CN566
CN567
CN568
CN569
CN570
CN571
CN572
CN573
CN574
CN575
CN576
CN577
CN578
CN579
CN580
CN581
CN582
CN583
CN584
CN585
CN586
CN587
CN588
CN589
CN590
CN591
CN592
CN593
CN594
CN595
CN596
CN597
CN598
CN599
CN600
CN601
CN602
CN603
CN604
CN605
CN606
CN607
CN608
CN609
CN610
CN611
CN612
CN613
CN614
CN615
CN616
CN617
CN618
CN619
CN620
CN621
CN622
CN623
CN624
CN625
CN626
CN627
CN628
CN629
CN630
CN631
CN632
CN633
CN634
CN635
CN636
CN637
CN638
CN639
CN640
CN641
CN642
CN643
CN644
CN645
CN646
CN647
CN648
CN649
CN650
CN651
CN652
CN653
CN654
CN655
CN656
CN657
CN658
CN659
CN660
CN661
CN662
CN663
CN664
CN665
CN666
CN667
CN668
CN669
CN670
CN671
CN672
CN673
CN674
CN675
CN676
CN677
CN678
CN679
CN680
CN681
CN682
CN683
CN684
CN685
CN686
CN687
CN688
CN689
CN690
CN691
CN692
CN693
CN694
CN695
CN696
CN697
CN698
CN699
CN700
CN701
CN702
CN703
CN704
CN705
CN706
CN707
CN708
CN709
CN710
CN711
CN712
CN713
CN714
CN715
CN716
CN717
CN718
CN719
CN720
CN721
CN722
CN723
CN724
CN725
CN726
CN727
CN728
CN729
CN730
CN731
CN732
CN733
CN734
CN735
CN736
CN737
CN738
CN739
CN740
CN741
CN742
CN743
CN744
CN745
CN746
CN747
CN748
CN749
CN750
CN751
CN752
CN753
CN754
CN755
CN756
CN757
CN758
CN759
CN760
CN761
CN762
CN763
CN764
CN765
CN766
CN767
CN768
CN769
CN770
CN771
CN772
CN773
CN774
CN775
CN776
CN777
CN778
CN779
CN780
CN781
CN782
CN783
CN784
CN785
CN786
CN787
CN788
CN789
CN790
CN791
CN792
CN793
CN794
CN795
CN796
CN797
CN798
CN799
CN800
CN801
CN802
CN803
CN804
CN805
CN806
CN807
CN808
CN809
CN810
CN811
CN812
CN813
CN814
CN815
CN816
CN817
CN818
CN819
CN820
CN821
CN822
CN823
CN824
CN825
CN826
CN827
CN828
CN829
CN830
CN831
CN832
CN833
CN834
CN835
CN836
CN837
CN838
CN839
CN840
CN841
CN842
CN843
CN844
CN845
CN846
CN847
CN848
CN849
CN850
CN851
CN852
CN853
CN854
CN855
CN856
CN857
CN858
CN859
CN860
CN861
CN862
CN863
CN864
CN865
CN866
CN867
CN868
CN869
CN870
CN871
CN872
CN873
CN874
CN875
CN876
CN877
CN878
CN879
CN880
CN881
CN882
CN883
CN884
CN885
CN886
CN887
CN888
CN889
CN890
CN891
CN892
CN893
CN894
CN895
CN896
CN897
CN898
CN899
CN900
CN901
CN902
CN903
CN904
CN905
CN906
CN907
CN908
CN909
CN910
CN911
CN912
CN913
CN914
CN915
CN916
CN917
CN918
CN919
CN920
CN921
CN922
CN923
CN924
CN925
CN926
CN927
CN928
CN929
CN930
CN931
CN932
CN933
CN934
CN935
CN936
CN937
CN938
CN939
CN940
CN941
CN942
CN943
CN944
CN945
CN946
CN947
CN948
CN949
CN950
CN951
CN952
CN953
CN954
CN955
CN956
CN957
CN958
CN959
CN960
CN961
CN962
CN963
CN964
CN965
CN966
CN967
CN968
CN969
CN970
CN971
CN972
CN973
CN974
CN975
CN976
CN977
CN978
CN979
CN980
CN981
CN982
CN983
CN984
CN985
CN986
CN987
CN988
CN989
CN990
CN991
CN992
CN993
CN994
CN995
CN996
CN997
CN998
CN999
CN1000

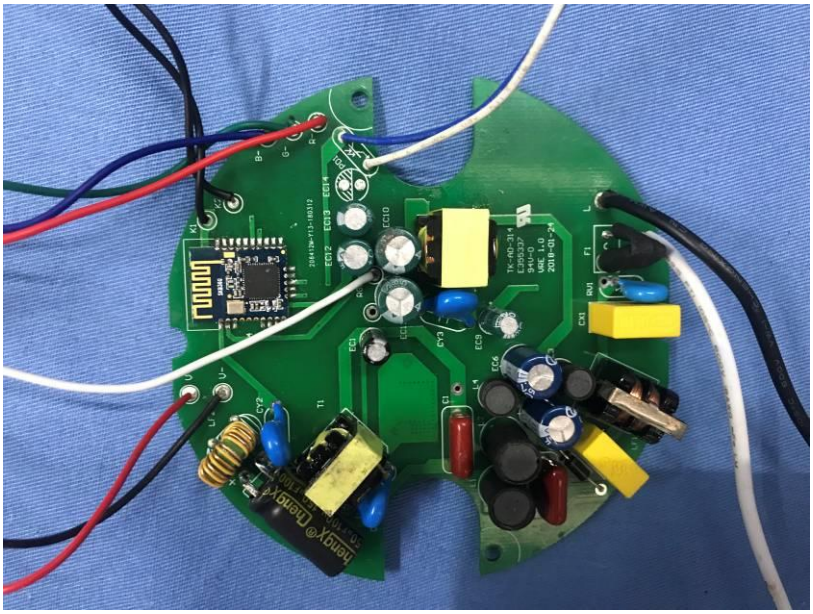

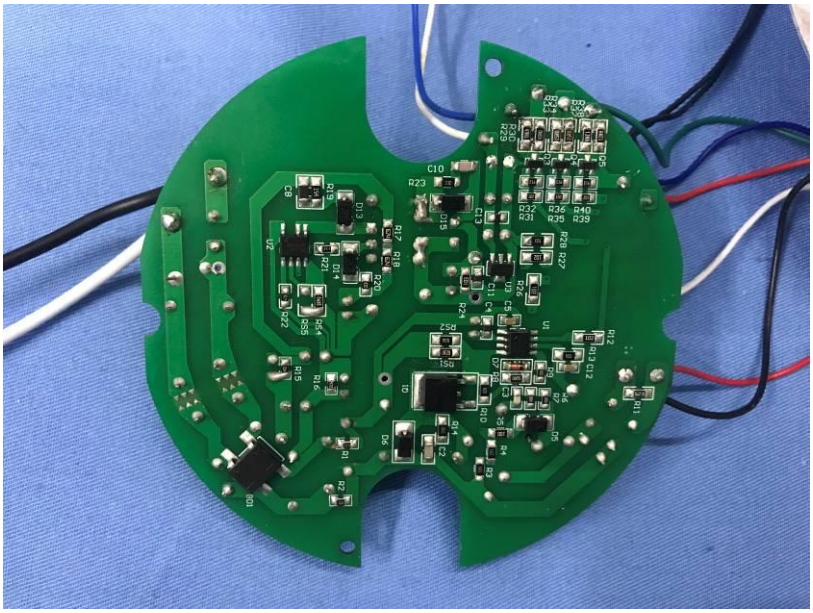

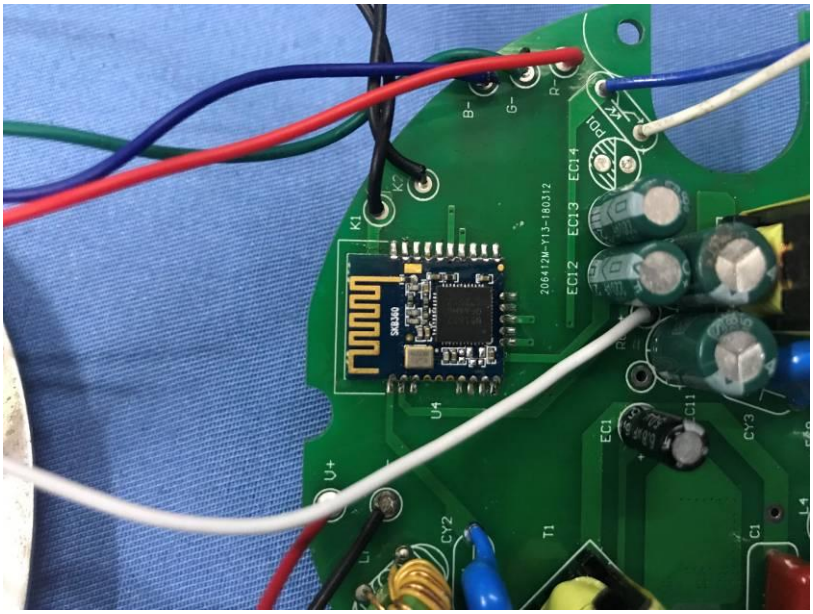

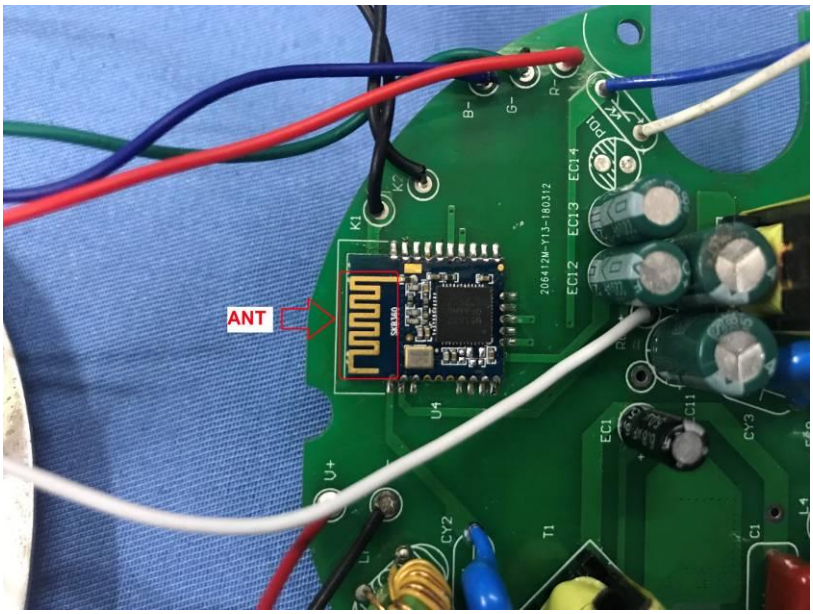

------End------