

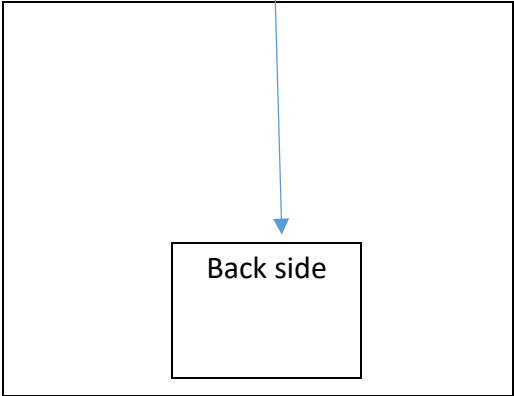


Label Location

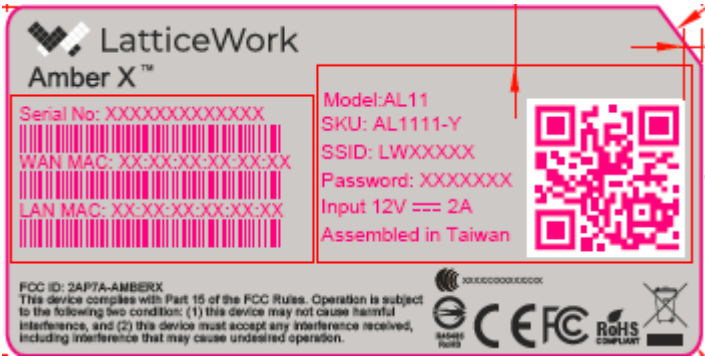


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVE
	A	NEW RELEASE	02/05/20	SAM SUN



A

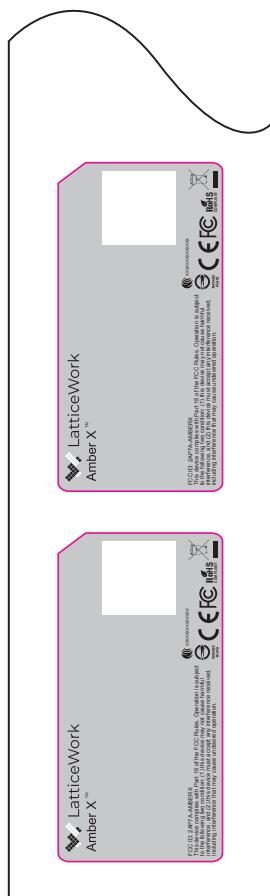

出標方向

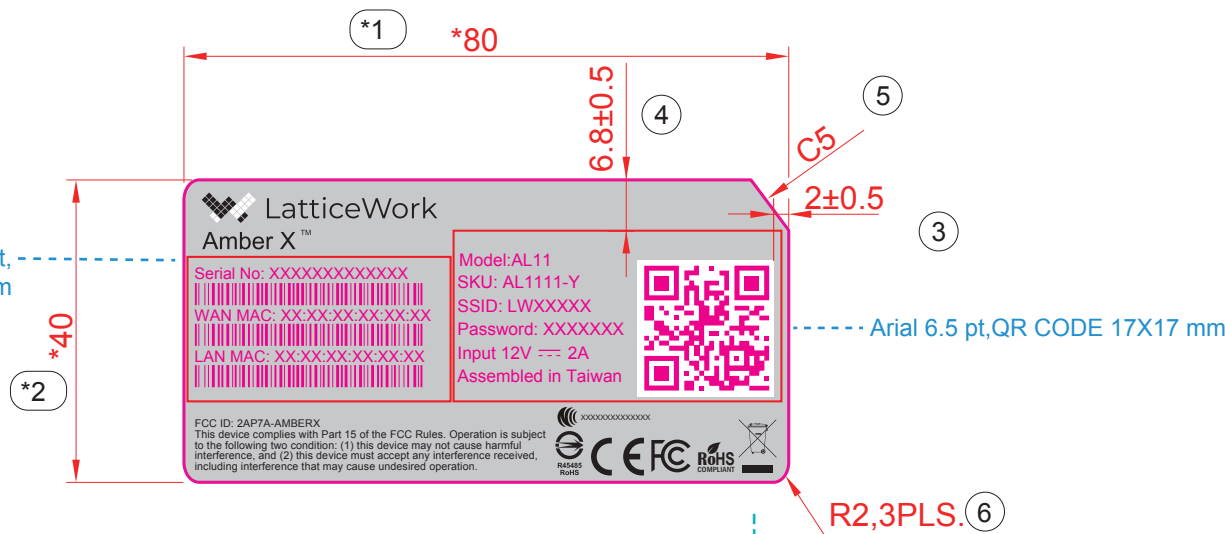Arial 6 pt,
BARCODE 高度2.9mm

為打印區域,打印請勿超過紅框區域
線上列印,打印內容參照LABEL FORM

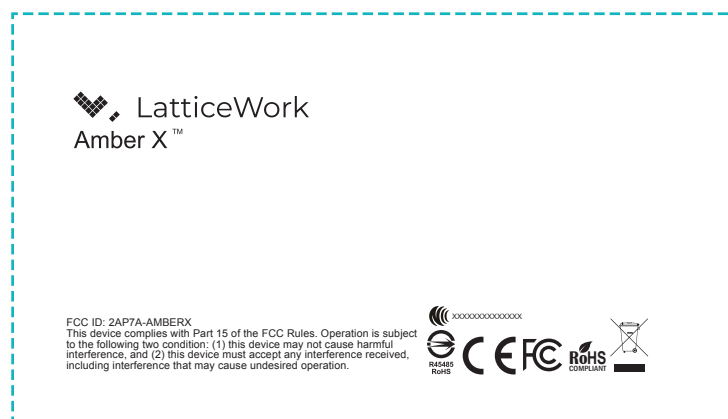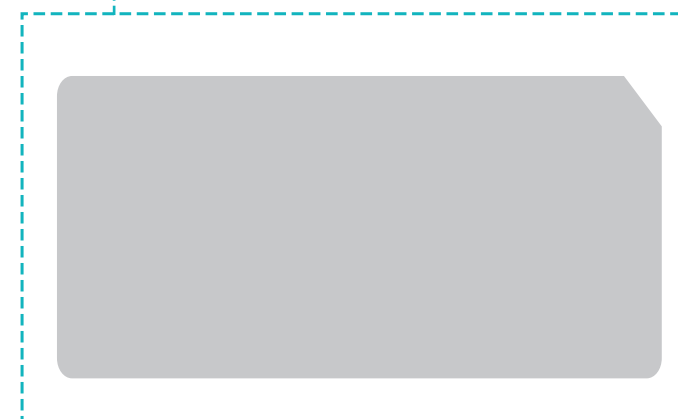COLOR1
BLACKCOLOR2
K 25

NOTES:

- MATERIAL: WHITE PET, t=0.05,金利寶HTYL50(EB)
ADHESIVE: 網紋背膠, t=0.033
FINISH: 上霧PET, t=0.025,金利宝TPATM(T)(30)J
- COLOR:
 - 底色白色
 - PRINT- a. BLACK
b. K 25,(參照2019 0712 正美樣品承認書)
- 刀模:

- 捲狀出貨
- 離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
- 被貼物:塑膠
- TEMPERATURE RESISTANT= 120° C
- 印刷公差:尺寸30mm以下~120mm為±0.4mm,120~315mm為±0.5mm,315以上±0.8mm
- TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

A

B

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 	 啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726 Wistron NeWeb Corp.		
			DWG TITLE LABEL,RATING LABEL,SOK1-LW1		
DRAWN	CATHY CHEN	02/05/20	SIZE	DWG NO.	REV
ENGR	CATHY CHEN	02/05/20	A3	4L.SOK1L.00101	A
APVD	SAM SUN	02/05/20	SCALE 1/1		SHEET 1 OF 1