

TEST REPORT

Report No.: 22060995HKG-005

Qmax Systems India Private Limited

Application For Original Grant of 47 CFR Part 15 Certification

FCC ID: 2APD6TEKCCD001

OB D Diagnostics Device

Transceiver – 5GHz WLAN WiFi

This report contains the data of 5GHz WiFi portion only.

Prepared and Checked by:

Approved by:

Signed on File
Wong Cheuk Ho, Herbert
Lead Engineer

 Digitally signed by
Kenneth Wong
Location: Intertek
Testing Services
Hong Kong Limited

Wong Kwok Yeung, Kenneth
Assistant Supervisor
Date: December 5, 2022

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	Qmax Systems India Private Limited
Grantee Address:	795, Trunk Road, Poonamallee, Chennai, India.
FCC Specification Standard:	FCC Part 15, October 1, 2021 Edition
FCC ID:	2APD6TEKCCD001
FCC Model(s):	CCD-V1
Type of EUT:	Unlicensed National Information Infrastructure Transmitter
Description of EUT:	OBD Diagnostics Device
Serial Number:	N/A
Sample Receipt Date:	June 29, 2022
Date of Test:	June 29, 2022 to November 03, 2022
Report Date:	December 5, 2022
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

TEST REPORT

TABLE OF CONTENTS

1.0	TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE	4
1.1	Summary of Test Results.....	4
1.2	Statement of Compliance	4
2.0	GENERAL DESCRIPTION.....	5
2.1	Product Description	5
2.1	Test Methodology	7
2.2	Test Facility.....	7
2.3	Related Submittal(s) Grants.....	7
3.0	SYSTEM TEST CONFIGURATION.....	8
3.1	Justification	8
3.2	EUT Exercising Software.....	9
3.3	Details of EUT and Description of Accessories	10
3.4	Measurement Uncertainty.....	10
4.0	TEST RESULTS	11
4.1	Maximum Conducted (Avg) Output Power at Antenna Terminals	11
4.2	Minimum 6dB RF Bandwidth	16
4.3	26 dB Bandwidth & Occupied Bandwidth	18
4.4	Maximum Power Spectral Density.....	20
4.5	Field Strength Calculation	25
4.6	Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	26
4.7	AC Power Line Conducted Emission	46
5.0	EQUIPMENT LIST	49

TEST REPORT

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details See Section
Antenna Requirement	15.407(a)	Pass	2.1
Max. Conducted Output Power (Peak)	15.407(a)	Pass	4.1
Transmit Power Control (TPC)	15.407(h)	N/A	See Remark
Min. 6dB RF Bandwidth	15.407(e)	Pass	4.2
Max. Power Density (average)	15.407(a)	Pass	4.3
Out of Band Antenna Conducted Emission	15.407(b)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.407(b), 15.209 & 15.109	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.7
Dynamic Frequency Selection(DFS)	15.407	N/A	4.10

Remark: Not Applicable if the EUT is <500mW (27dBm)

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2021 Edition

TEST REPORT

2.0 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) that is an On-Board Diagnostic system for Vehicle which enabled with IOT tracking and cloud connectivity via Bluetooth, BLE, 2.4GHz & 5GHz WiFi technology. The EUT is powered by vehicle's OBD port and/or 3.7VDC internal rechargeable battery. The EUT can support Bluetooth (FHSS) mode, Bluetooth 5.0 BLE mode, 2.4GHz WiFi mode and 5.1GHz & 5.8GHz WiFi mode.

For 2.4GHz ISM Band:

- For IEEE 802.11b mode, it operates at frequency range of 2.412GHz to 2.462GHz with 11 Channels. It transmits via DQPSK, DBPSK and CCK. Maximum bit rate can be up to 11Mbps.
- For IEEE 802.11g mode, it operates at frequency range of 2.412GHz to 2.462GHz with 11 Channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For IEEE 802.11n mode (With 20MHz Bandwidth), it operates at frequency range of 2.412GHz to 2.462GHz with 11 Channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.

For 5.15GHz to 5.25GHz Band:

The module operates at Frequency range of 5.18GHz to 5.24GHz with 4 channels.

- For IEEE 802.11a mode, it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For IEEE 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For IEEE 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.19GHz to 5.23GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For IEEE 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For IEEE 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162Mbps.
- For IEEE 802.11ac mode (80 MHz Bandwidth), it operates at 5.21GHz with 1 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390Mbps.

TEST REPORT

2.1 Product Description (Cont'd)

For 5.725GHz to 5.85GHz Band:

The module operates at Frequency range of 5.745GHz to 5.825GHz with 4 channels.

- For IEEE 802.11a mode, it operates at frequency range of 5.745GHz to 5.825GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For IEEE 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.745GHz to 5.825GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For IEEE 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.755GHz to 5.795GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For IEEE 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.745GHz to 5.825GHz with 4 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For IEEE 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.755GHz to 5.795GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162Mbps.
- For IEEE 802.11ac mode (80 MHz Bandwidth), it operates at 5775MHz with 1 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390Mbps.

Antenna Information:

- WLAN 802.11 a/b/g/n/ac
- For operating frequency of 2.4GHz, antenna has maximum gain of 3.0 dBi
- For operating frequency of 5GHz WiFi, antenna has maximum gain of 3.0 dBi

The circuit description is saved with filename: descri.pdf.

TEST REPORT

2.1 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No. 789033 D02 v02r01 (December 01, 2017) All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.2 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC.

2.3 Related Submittal(s) Grants

This is a single application for certification of a transceiver (5GHz WiFi portion only).

TEST REPORT

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The device was powered by vehicle's OBD port or 3.7V internal rechargeable battery and/or AC/DC USB adaptor Input: 100-240VAC 50/60Hz 0.5A; Output: 5.0VDC 2100mA.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

TEST REPORT

3.1 Justification (Cont'd)

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission.

3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

Details of EUT:

The EUT is powered by 120VAC.

Description of Accessories:

- (1) 1 X AC/DC USB adaptor (Input: 100-240VAC 50/60Hz 0.5A; Output: 5.0VDC 2100mA)
- (2) 1 X USB Type C cable with length of 0.42 meter long
- (3) 1 X OBD Emulator

All accessories are provided by Applicant.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty:

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted test, frequency stability and timing jitter are ± 5.3dB, ± 4.2dB, ±1dB, ±23Hz, 0.1µs respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


TEST REPORT

4.0 TEST RESULTS

4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure E.3.A(789033 D02 General UNII Test Procedures New Rules v02r01) was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11ac (20MHz) (MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt
5180	3.2	2.089
5200	2.3	1.698
5240	1.7	1.479
5745	1.3	1.349
5785	0.7	1.175
5825	0.8	1.202

IEEE 802.11ac (40MHz) (MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt
5190	2.9	1.950
5230	3.1	2.042
5755	1.2	1.318
5795	0.8	1.202

IEEE 802.11ac (80MHz) (MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt
5210	1.5	1.413
5775	1.0	1.259

TEST REPORT

4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals (Cont'd)

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt
5180	6.6	4.571
5200	6.0	3.981
5240	5.3	3.388
5745	3.2	2.089
5785	2.8	1.905
5825	2.5	1.778

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt
5180	3.5	2.239
5200	3.3	2.138
5240	3.4	2.188
5745	1.9	1.549
5785	1.8	1.514
5825	1.8	1.514

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt
5190	3.4	2.188
5230	2.2	1.660
5755	1.5	1.413
5795	1.1	1.288

TEST REPORT

4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals (Cont'd)

For Maximum e.i.r.p

IEEE 802.11ac (20MHz) (MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	EIRP in dBm	EIRP in mWatt
5180	3.2	6.2	4.169
5220	2.3	5.3	3.388
5240	1.7	4.7	2.951
5745	1.3	4.3	2.692
5785	0.7	3.7	2.344
5825	0.8	3.8	2.399

IEEE 802.11ac (40MHz) (MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	EIRP in dBm	EIRP in mWatt
5190	2.9	5.9	3.890
5230	3.1	6.1	4.074
5755	1.2	4.2	2.630
5795	0.8	3.8	2.399

IEEE 802.11ac (80MHz) (MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	EIRP in dBm	EIRP in mWatt
5210	1.5	4.5	2.818
5775	1.0	4.0	2.512

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	EIRP in dBm	EIRP in mWatt
5180	6.6	9.6	9.120
5220	6.0	9.0	7.943
5240	5.3	8.3	6.761
5745	3.2	6.2	4.169
5785	2.8	5.8	3.802
5825	2.5	5.5	3.548

TEST REPORT

4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals (Cont'd)

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	EIRP in dBm	EIRP in mWatt
5180	3.5	6.5	4.467
5220	3.3	6.3	4.266
5240	3.4	6.4	4.365
5745	1.9	4.9	3.090
5785	1.8	4.8	3.020
5825	1.8	4.8	3.020

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 3.0dBi

Frequency (MHz)	Conducted Output Power in dBm	EIRP in dBm	EIRP in mWatt
5190	3.4	6.4	4.365
5230	2.2	5.2	3.311
5755	1.5	4.5	2.818
5795	1.1	4.1	2.570

Cable loss: 1.02dB External Attenuation: 10dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11ac (20MHz) (OFDM, MCS0)
Max. Conducted Output Level = 3.2dBm

IEEE 802.11ac (40MHz) (OFDM, MCS0)
Max. Conducted Output Level = 3.1dBm

IEEE 802.11ac (80MHz) (OFDM, MCS0)
Max. Conducted Output Level = 1.5dBm

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)
Max. Conducted Output Level = 6.6dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)
Max. Conducted Output Level = 3.5dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)
Max. Conducted Output Level = 3.4dBm

TEST REPORT

4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals (Cont'd)

Remark:

1. Maximum e.i.r.p = Maximum conducted output power + Duty Cycle Factor + Antenna Gain
2. Maximum conducted output power = Conducted output power + Duty Cycle Factor
3. Duty cycle = On Time/ Period;
Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
Average factor = $20 \log_{10} \text{Duty Cycle}$.
4. Limits for FCC:
5150-5250MHz: 250mW (24dBm) for antennas with gains of 6dBi or less. (Client device)
5250-5350MHz: 250mW (24dBm)
5470-5725MHz: 250mW (24dBm)
5725-5850MHz: 1W (30dBm) for antennas with gains of 6dBi or less.

Limits for RSS:

- 5150-5250MHz: 200mW (23dBm) for antennas with gains of 6dBi or less.
5250-5350MHz: 250mW (24dBm)
5470-5725MHz: 250mW (24dBm)
5725-5850MHz: 1W (30dBm) for antennas with gains of 6dBi or less.

TEST REPORT

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	17.8	18.0
5200	17.9	17.8
5240	17.8	18.0
5745	17.9	17.8
5785	17.9	18.0
5825	17.9	17.8

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	36.7	36.6
5230	36.5	36.3
5755	36.6	36.6
5795	36.6	36.6

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5210	75.3	76.0
5775	75.6	76.0

IEEE 802.11a (20MHz) (OFDM, 6Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	16.3	16.8
5200	16.2	16.6
5240	16.3	16.6
5745	16.1	16.6
5785	15.9	16.6
5825	16.1	16.6

TEST REPORT

4.2 Minimum 6dB RF Bandwidth (Cont'd)

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	17.8	18.0
5200	17.9	17.8
5240	17.9	18.0
5745	16.1	16.6
5785	15.9	16.6
5825	16.1	16.6

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	36.6	36.3
5230	36.5	36.3
5755	36.5	36.6
5795	36.6	36.3

Limits:

For 5725-5850MHz: 6 dB bandwidth shall be at least 500kHz

The plots of 6 dB RF bandwidth and occupied bandwidth are saved with filename:
UNII-1&2 test data.pdf

TEST REPORT

4.3 26 dB Bandwidth & Occupied Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 26dB lower than PEAK level. The 26dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.0	18.0
5200	21.8	17.8
5240	21.6	18.0
5745	26.6	17.8
5785	24.2	18.0
5825	22.6	17.8

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	40.4	36.6
5230	39.6	36.3
5755	47.3	36.6
5795	43.4	36.6

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5210	83.0	76.0
5775	54.0	76.0

IEEE 802.11a (20MHz) (OFDM, 6Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	21.4	16.8
5200	21.2	16.6
5240	20.8	16.6
5745	26.0	16.6
5785	23.0	16.6
5825	22.0	16.6

TEST REPORT

4.3 26 dB Bandwidth & Occupied Bandwidth (Cont'd)

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.2	18.0
5200	22.0	17.8
5240	22.2	18.0
5745	26.6	16.6
5785	24.2	16.6
5825	22.6	16.6

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	39.9	36.3
5230	39.3	36.3
5755	52.7	36.6
5795	40.4	36.3

Limits:

For 5725-5850MHz: 6 dB bandwidth shall be at least 500kHz

The plots of 6 dB RF bandwidth and occupied bandwidth are saved with filename:
UNII-1&2 test data.pdf

TEST REPORT

4.4 Maximum Power Spectral Density

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyser according to the following Settings:

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

TEST REPORT

4.4 Maximum Power Spectral Density (Cont'd)

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	-7.971
5200	-9.259
5240	-8.706
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-11.618
5785	-10.450
5825	-10.445

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5190	-10.702
5230	-10.453
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5755	-12.861
5795	-12.318

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5210	-12.038
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5775	-12.327

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	-4.182
5200	-5.435
5240	-5.011
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-10.020
5785	-8.498
5825	-8.661

TEST REPORT

4.4 Maximum Power Spectral Density (Cont'd)

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	-7.630
5200	-8.980
5240	-8.565
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-13.104
5785	-13.317
5825	-13.507

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5190	-10.730
5230	-10.434
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5755	-14.468
5795	-12.606

TEST REPORT

4.4 Maximum Power Spectral Density (Cont'd)

For Maximum e.i.r.p.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	-4.971
5200	-6.259
5240	-5.706
5745	-8.618
5786	-7.450
5825	-7.445

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5190	-7.702
5230	-7.453
5755	-9.861
5795	-9.318

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5210	-9.038
5775	-9.327

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	-1.182
5200	-2.435
5240	-2.011
5745	-7.020
5786	-5.498
5825	-5.661

TEST REPORT

4.4 Maximum Power Spectral Density (Cont'd)

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	-4.630
5200	-5.980
5240	-5.565
5745	-10.104
5786	-10.317
5825	-10.507

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5190	-7.730
5230	-7.434
5755	-11.468
5795	-9.606

Remark:

- Cable Loss: 1.02dB
- e.i.r.p. spectral density = Power spectral density + Duty Cycle Factor + Antenna Gain
- Power spectral density = Conducted power spectral density + Duty Cycle Factor
- Duty cycle = On Time/ Period;
Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
Average factor = $20 \log_{10} \text{Duty Cycle}$.
- Limits:
For U-NII-1:
☒ FCC: 11dBm/MHz for mobile/portable device.
RSS: 10dBm/MHz E.I.R.P

For U-NII-2:

- ☒ FCC: 11dBm/MHz
RSS: 11dBm/MHz

For U-NII-3: in 3kHz

- ☒ FCC: 30dBm/500kHz
RSS: 30dBm/500kHz

The test data are saved with filename: UNII-1&2 test data.pdf

TEST REPORT

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where	FS	=	Field Strength in dBμV/m
	RA	=	Receiver Amplitude (including preamplifier) in dBμV
	CF	=	Cable Attenuation Factor in dB
	AF	=	Antenna Factor in dB
	AG	=	Amplifier Gain in dB
	PD	=	Pulse Desensitization in dB
	AV	=	Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dBμV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dBμV/m. This value in dBμV/m is converted to its corresponding level in μV/m.

RA	=	62.0 dBμV
AF	=	7.4 dB
CF	=	1.6 dB
AG	=	29 dB
PD	=	0.0 dB
AV	=	-10 dB
FS	=	$62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission

At 335.998 MHz and 335.998MHz

The worst case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.2 Radiated Emission Data

The data in below tables list the significant emission frequencies, the limit and the margin of compliance.


Judgement –

Passed by 1.7 dB margin


TEST REPORT

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

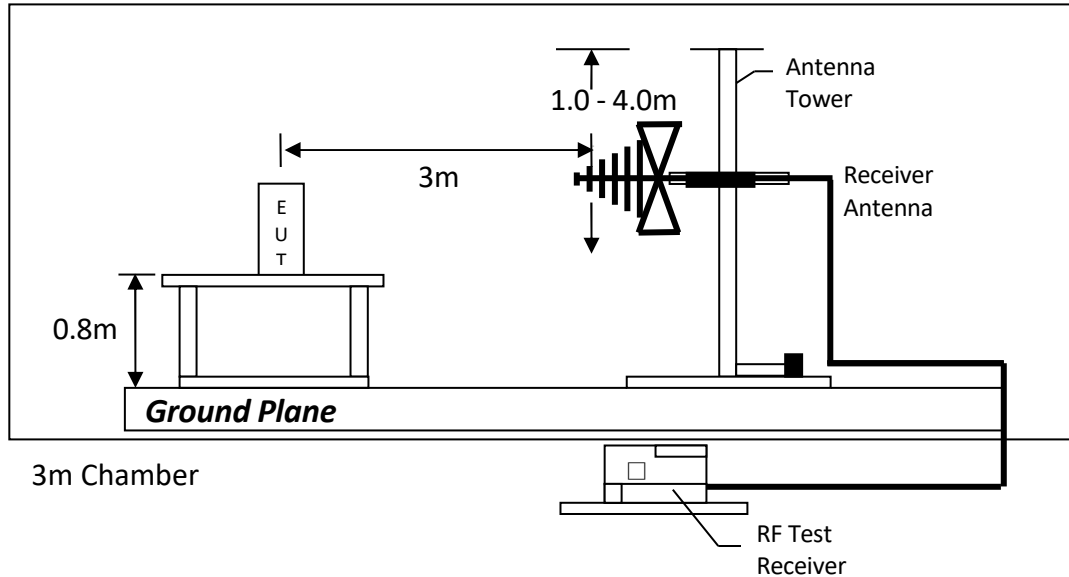

Test setup of radiated emissions up to 1GHz

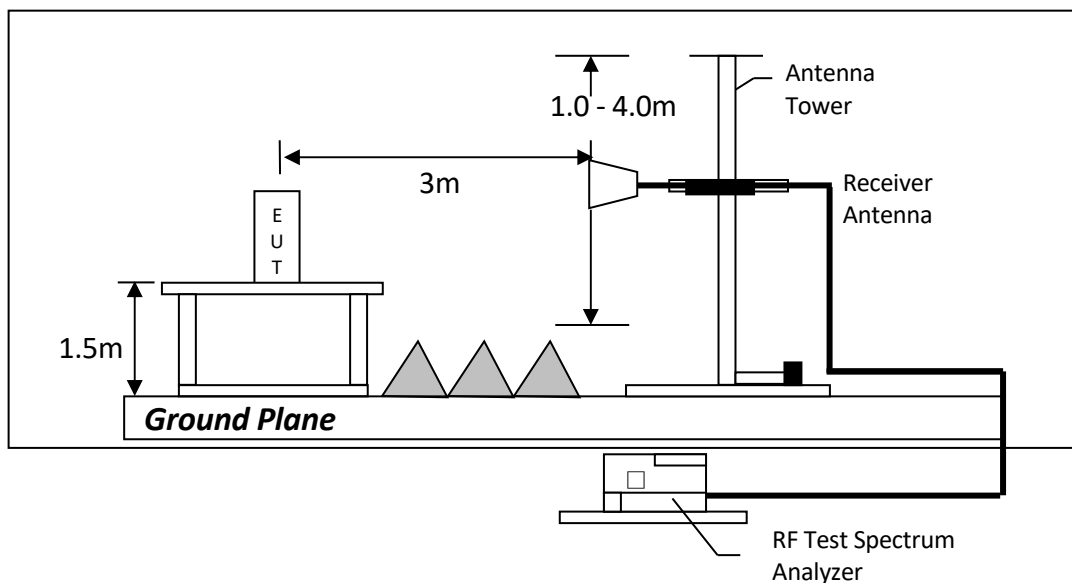

Test setup of radiated emissions above 1GHz

TEST REPORT

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM, 6MBs)

5180MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5148.400	33.5	33	35.7	36.2	0	51.1	54.0	-2.9
V	15540.000	26.8	33	37.7	31.5	0	37.6	54.0	-16.4
V	20720.000	32.3	33	37.7	37.0	0	37.5	54.0	-16.5
V	31080.000	34.4	33	42.1	43.5	0	42.0	54.0	-12.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5148.400	50.6	33	35.7	69.3	74.0	-4.7
V	15540.000	46.1	33	37.7	50.8	74.0	-23.2
V	20720.000	63.4	33	37.7	51.3	74.0	-22.7
V	31080.000	49.7	33	42.1	44.1	74.0	-29.9

5240MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	15720.000	26.8	33	37.7	31.5	0	38.5	54.0	-15.5
H	20960.000	32.3	33	37.7	37.0	0	39.6	54.0	-14.4
H	31440.000	34.4	33	42.1	43.5	0	41.5	54.0	-12.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	15720.000	45.8	33	37.7	50.5	74.0	-23.5
H	20960.000	63.4	33	37.7	51.3	74.0	-22.7
H	31440.000	44.3	33	42.1	49.8	74.0	-24.2

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11a (20MHz) (OFDM, 6MBs)

5200MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	15600.000	28.4	33	37.7	33.1	0	35.2	54.0	-18.8
V	20800.000	27.8	33	37.7	32.5	0	35.6	54.0	-18.4
V	31200.000	31.9	33	42.1	41.0	0	41.6	54.0	-12.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	15600.000	47.9	33	37.7	52.6	74.0	-21.4
V	20800.000	45.1	33	37.7	49.8	74.0	-24.2
V	31200.000	42.3	33	42.1	51.4	74.0	-22.6

5745MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5725.000	30.6	33	36.6	34.2	0	34.2	54.0	-19.8
H	11490.000	27.8	33	40.8	35.6	0	32.5	54.0	-21.5
H	22980.000	31.2	33	38.3	36.5	0	44.2	54.0	-9.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5725.000	49.0	33	36.6	52.6	74.0	-21.4
H	11490.000	42.5	33	40.8	50.3	74.0	-23.7
H	22980.000	47.3	33	38.3	52.6	74.0	-21.4

5785MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5725.000	30.6	33	36.6	34.2	0	36.5	54.0	-17.5
H	11570.000	28.1	33	40.5	35.6	0	34.6	54.0	-19.4
H	23140.000	30.9	33	38.6	36.5	0	38.4	54.0	-15.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5725.000	46.2	33	36.6	49.8	74.0	-24.2
H	11570.000	41.1	33	40.5	48.6	74.0	-25.4
H	23140.000	41.5	33	38.6	47.1	74.0	-26.9

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11a (20MHz) (OFDM, 6MBs)

5825MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5850.000	30.6	33	36.6	34.2	0	37.6	54.0	-16.4
H	11650.000	28.1	33	40.5	35.6	0	33.2	54.0	-20.8
V	17475.000	33.9	33	37.6	38.5	0	37.6	54.0	-16.4
V	23300.000	30.9	33	38.6	36.5	0	40.1	54.0	-13.9
H	29125.000	35.3	33	40.0	0.0	0	42.3	68.0	-25.7
H	34950.000	34.4	33	41.3	0.0	0	42.7	68.0	-25.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5850.000	46.2	33	36.6	49.8	74.0	-24.2
H	11650.000	41.0	33	40.5	48.5	74.0	-25.5
V	17475.000	44.6	33	37.6	49.2	74.0	-24.8
V	23300.000	43.1	33	38.6	48.7	74.0	-25.3
H	29125.000	41.9	33	40.0	48.9	74.0	-25.1
H	34950.000	42.5	33	41.3	50.8	74.0	-23.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (20MHz) (OFDM, MCS0)

5180MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5148.690	34.8	33	35.7	37.5	0	49.1	54.0	-4.9
H	10360.000	32.3	33	40.5	39.8	0	38.6	54.0	-15.4
H	15540.000	37.9	33	37.7	42.6	0	43.5	54.0	-10.5
H	20720.000	35.9	33	37.7	40.6	0	41.2	54.0	-12.8
H	25900.000	33.9	33	39.3	40.2	0	40.3	54.0	-13.7
V	31080.000	37.6	33	42.1	46.7	0	45.6	54.0	-8.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5148.690	61.9	33	35.7	64.6	74.0	-9.4
H	10360.000	37.6	33	40.5	45.1	74.0	-28.9
H	15540.000	43.9	33	37.7	48.6	74.0	-25.4
H	20720.000	40.5	33	37.7	45.2	74.0	-28.8
H	25900.000	41.6	33	39.3	47.9	74.0	-26.1
V	31080.000	40.7	33	42.1	49.8	74.0	-24.2

5240MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	10480.000	27.9	33	40.5	35.4	0	32.6	54.0	-21.4
V	15720.000	25.2	33	37.7	29.9	0	34.7	54.0	-19.3
H	20960.000	23.8	33	37.7	28.5	0	38.7	54.0	-15.3
H	26200.000	26.8	33	39.2	33.0	0	33.4	54.0	-20.6
V	31440.000	30.5	33	42.1	39.6	0	38.5	54.0	-15.5
H	36680.000	35.6	33	41.7	44.3	0	43.6	54.0	-10.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	10480.000	33.3	33	40.5	40.8	74.0	-33.2
V	15720.000	42.8	33	37.7	47.5	74.0	-26.5
H	20960.000	44.0	33	37.7	48.7	74.0	-25.3
H	26200.000	37.6	33	39.2	43.8	74.0	-30.2
V	31440.000	36.8	33	42.1	45.9	74.0	-28.1
H	36680.000	40.8	33	41.7	49.5	74.0	-24.5

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (20MHz) (OFDM, MCS0)

5200MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	32.8	33	40.5	40.3	0	40.3	54.0	-13.7
H	15600.000	31.7	33	37.7	36.4	0	36.4	54.0	-17.6
V	20800.000	31.3	33	37.7	36.0	0	36.0	54.0	-18.0
H	26000.000	33.1	33	39.2	39.3	0	39.3	54.0	-14.7
H	31200.000	30.3	33	42.1	39.4	0	39.4	54.0	-14.6
H	36400.000	38.8	33	41.7	47.5	0	47.5	54.0	-6.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	41.2	33	40.5	48.7	74.0	-25.3
H	15600.000	47.3	33	37.7	52.0	74.0	-22.0
V	20800.000	47.0	33	37.7	51.7	74.0	-22.3
H	26000.000	38.0	33	39.2	44.2	74.0	-29.8
H	31200.000	35.2	33	42.1	44.3	74.0	-29.7
H	36400.000	41.7	33	41.7	50.4	74.0	-23.6

5745MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	32.3	33	36.6	35.9	0	34.8	54.0	-19.2
H	11490.000	32.5	33	40.8	40.3	0	39.7	54.0	-14.3
H	17235.000	32.7	33	37.6	37.3	0	36.9	54.0	-17.1
H	22980.000	32.6	33	38.3	37.9	0	38.7	54.0	-15.3
H	28725.000	36.6	33	40.1	43.7	0	44.1	54.0	-9.9
H	34470.000	37.1	33	41.1	45.2	0	45.0	54.0	-9.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	37.2	33	36.6	40.8	74.0	-33.2
H	11490.000	38.0	33	40.8	45.8	74.0	-28.2
H	17235.000	35.6	33	37.6	40.2	74.0	-33.8
H	22980.000	42.1	33	38.3	47.4	74.0	-26.6
H	28725.000	42.7	33	40.1	49.8	74.0	-24.2
H	34470.000	42.6	33	41.1	50.7	74.0	-23.3

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (20MHz) (OFDM, MCS0)

5785MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5725.000	31.9	33	36.6	35.5	0	34.1	54.0	-19.9
H	11570.000	32.0	33	40.5	39.5	0	38.4	54.0	-15.6
V	17355.000	32.7	33	37.6	37.3	0	36.3	54.0	-17.7
V	23140.000	35.0	33	38.6	40.6	0	39.5	54.0	-14.5
H	28925.000	36.2	33	40.1	43.3	0	44.0	54.0	-10.0
H	34710.000	39.1	33	41.3	47.4	0	46.9	54.0	-7.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5725.000	41.6	33	36.6	45.2	74.0	-28.8
H	11570.000	36.8	33	40.5	44.3	74.0	-29.7
V	17355.000	42.3	33	37.6	46.9	74.0	-27.1
V	23140.000	36.5	33	38.6	42.1	74.0	-31.9
H	28925.000	38.8	33	40.1	45.9	74.0	-28.1
H	34710.000	42.4	33	41.3	50.7	74.0	-23.3

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (20MHz) (OFDM, MCS0)

5825MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5850.000	27.2	33	36.6	30.8	0	31.8	54.0	-22.2
H	11650.000	32.4	33	40.5	39.9	0	39.8	54.0	-14.2
V	17475.000	32.7	33	37.6	37.3	0	36.7	54.0	-17.3
H	23300.000	32.0	33	38.6	37.6	0	36.5	54.0	-17.5
H	29125.000	35.1	33	40.0	42.1	0	39.6	54.0	-14.4
H	34950.000	37.1	33	41.3	45.4	0	38.7	54.0	-15.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5850.000	44.4	33	36.6	48.0	74.0	-26.0
H	11650.000	37.8	33	40.5	45.3	74.0	-28.7
V	17475.000	44.1	33	37.6	48.7	74.0	-25.3
H	23300.000	39.6	33	38.6	45.2	74.0	-28.8
H	29125.000	42.7	33	40.0	49.7	74.0	-24.3
H	34950.000	42.6	33	41.3	50.9	74.0	-23.1

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (40MHz) (MCS0)

5190MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5149.935	29.9	33	35.7	32.6	0	49.5	54.0	-4.5
H	10380.000	31.1	33	40.5	38.6	0	38.7	54.0	-15.3
H	15570.000	32.0	33	37.7	36.7	0	37.8	54.0	-16.2
V	20760.000	33.5	33	37.7	38.2	0	38.6	54.0	-15.4
H	25950.000	35.2	33	39.3	41.5	0	40.8	54.0	-13.2
H	31140.000	36.8	33	42.1	45.9	0	46.0	54.0	-8.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5149.935	63.6	33	35.7	66.3	74.0	-7.7
H	10380.000	42.1	33	40.5	49.6	74.0	-24.4
H	15570.000	46.1	33	37.7	50.8	74.0	-23.2
V	20760.000	44.0	33	37.7	48.7	74.0	-25.3
H	25950.000	41.6	33	39.3	47.9	74.0	-26.1
H	31140.000	39.6	33	42.1	48.7	74.0	-25.3

5230MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10460.000	29.7	33	40.5	37.2	0	36.5	54.0	-17.5
H	15690.000	28.9	33	37.7	33.6	0	33.7	54.0	-20.3
H	20920.000	32.8	33	37.7	37.5	0	37.5	54.0	-16.5
V	26150.000	34.7	33	39.2	40.9	0	41.0	68.0	-27.0
H	31380.000	32.1	33	42.1	41.2	0	40.5	54.0	-13.5
H	36610.000	37.3	33	41.7	46.0	0	40.6	54.0	-13.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10460.000	42.1	33	40.5	49.6	74.0	-24.4
H	15690.000	45.1	33	37.7	49.8	74.0	-24.2
H	20920.000	42.8	33	37.7	47.5	74.0	-26.5
V	26150.000	36.3	33	39.2	42.5	68.0	-25.5
H	31380.000	34.5	33	42.1	43.6	74.0	-30.4
H	36610.000	39.9	33	41.7	48.6	74.0	-25.4

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (40MHz) (MCS0)

5755MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	31.0	33	36.6	34.6	0	35.2	54.0	-18.8
H	11510.000	27.3	33	40.5	34.8	0	36.4	54.0	-17.6
V	17265.000	31.1	33	37.6	35.7	0	36.7	54.0	-17.3
V	23020.000	34.5	33	38.6	40.1	0	39.8	54.0	-14.2
V	28775.000	36.6	33	40.1	43.7	0	42.8	54.0	-11.2
H	34530.000	40.8	33	41.3	49.1	0	48.7	54.0	-5.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	42.6	33	36.6	46.2	74.0	-27.8
H	11510.000	39.6	33	40.5	47.1	74.0	-26.9
V	17265.000	38.9	33	37.6	43.5	74.0	-30.5
V	23020.000	43.3	33	38.6	48.9	74.0	-25.1
V	28775.000	40.5	33	40.1	47.6	74.0	-26.4
H	34530.000	44.5	33	41.3	52.8	74.0	-21.2

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11n (40MHz) (MCS0)

5795MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5850.000	27.9	33	36.6	31.5	0	36.8	54.0	-17.2
H	11590.000	30.3	33	40.5	37.8	0	36.9	54.0	-17.1
H	17385.000	32.2	33	37.6	36.8	0	40.7	54.0	-13.3
V	23180.000	34.0	33	38.6	39.6	0	38.4	54.0	-15.6
H	28975.000	33.1	33	40.1	40.2	0	39.8	54.0	-14.2
H	34770.000	42.0	33	41.3	50.3	0	39.6	54.0	-14.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5850.000	46.0	33	36.6	49.6	74.0	-24.4
H	11590.000	39.7	33	40.5	47.2	74.0	-26.8
H	17385.000	42.2	33	37.6	46.8	74.0	-27.2
V	23180.000	38.7	33	38.6	44.3	74.0	-29.7
H	28975.000	37.8	33	40.1	44.9	74.0	-29.1
H	34770.000	43.0	33	41.3	51.3	74.0	-22.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (20MHz) (MCS0)

Mode: AC Mode 20MHz

5180MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	29.8	33	35.7	32.5	0	50.5	54.0	-3.5
V	10360.000	28.9	33	40.5	36.4	0	33.6	54.0	-20.4
V	15540.000	30.7	33	37.7	35.4	0	35.6	54.0	-18.4
H	20720.000	33.5	33	37.7	38.2	0	37.0	54.0	-17.0
V	25900.000	33.9	33	39.3	40.2	0	39.8	54.0	-14.2
H	31080.000	36.1	33	42.1	45.2	0	46.2	54.0	-7.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	67.5	33	35.7	70.2	74.0	-3.8
V	10360.000	39.5	33	40.5	47.0	74.0	-27.0
H	15540.000	43.8	33	37.7	48.5	74.0	-25.5
H	20720.000	41.4	33	37.7	46.1	74.0	-27.9
V	25900.000	42.6	33	39.3	48.9	74.0	-25.1
H	31080.000	39.9	33	42.1	49.0	74.0	-25.0

5240MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10480.000	25.1	33	40.5	32.6	0	35.8	54.0	-18.2
H	15720.000	33.8	33	37.7	38.5	0	36.8	54.0	-17.2
H	20960.000	32.2	33	37.7	36.9	0	35.1	54.0	-18.9
H	26200.000	32.2	33	39.2	38.4	0	38.5	54.0	-15.5
V	31440.000	32.5	33	42.1	41.6	0	42.8	54.0	-11.2
H	36680.000	37.4	33	41.7	46.1	0	46.7	54.0	-7.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10480.000	39.3	33	40.5	46.8	74.0	-27.2
H	15720.000	41.0	33	37.7	45.7	74.0	-28.3
H	20960.000	43.2	33	37.7	47.9	74.0	-26.1
H	26200.000	41.6	33	39.2	47.8	68.0	-20.2
V	31440.000	39.9	33	42.1	49.0	74.0	-25.0
H	36680.000	44.3	33	41.7	53.0	74.0	-21.0

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (20MHz) (MCS0)

Mode: AC Mode 20MHz

5200MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	30.7	33	40.5	38.2	0	36.4	54.0	-17.6
H	15600.000	29.9	33	37.7	34.6	0	35.8	54.0	-18.2
V	20800.000	32.9	33	37.7	37.6	0	36.4	54.0	-17.6
H	26000.000	31.8	33	39.2	38.0	0	37.4	54.0	-16.6
H	31200.000	22.5	33	42.1	31.6	0	36.8	54.0	-17.2
H	36400.000	40.5	33	41.7	49.2	0	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	42.3	33	40.5	49.8	74.0	-24.2
H	15600.000	42.5	33	37.7	47.2	74.0	-26.8
V	20800.000	41.5	33	37.7	46.2	74.0	-27.8
H	26000.000	39.1	33	39.2	45.3	74.0	-28.7
H	31200.000	39.6	33	42.1	48.7	74.0	-25.3
H	36400.000	44.4	33	41.7	53.1	74.0	-20.9

5745MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	30.1	33	36.6	33.7	0	35.3	54.0	-18.7
H	11490.000	29.8	33	40.8	37.6	0	36.8	54.0	-17.2
H	17235.000	31.1	33	37.6	35.7	0	37.1	54.0	-16.9
H	22980.000	32.1	33	38.3	37.4	0	35.8	54.0	-18.2
H	28725.000	33.9	33	40.1	41.0	0	39.4	54.0	-14.6
H	34470.000	38.7	33	41.1	46.8	0	40.8	54.0	-13.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	47.4	33	36.6	51.0	74.0	-23.0
H	11490.000	41.6	33	40.8	49.4	74.0	-24.6
H	17235.000	43.0	33	37.6	47.6	74.0	-26.4
H	22980.000	42.8	33	38.3	48.1	74.0	-25.9
H	28725.000	42.7	33	40.1	49.8	74.0	-24.2
H	34470.000	45.5	33	41.1	53.6	74.0	-20.4

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (20MHz) (MCS0)

Mode: AC Mode 20MHz

5785MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	29.7	33	36.6	33.3	0	36.4	54.0	-17.6
H	11570.000	31.2	33	40.5	38.7	0	37.6	54.0	-16.4
H	17355.000	30.8	33	37.6	35.4	0	38.9	54.0	-15.1
V	23140.000	31.5	33	38.6	37.1	0	36.1	54.0	-17.9
H	28925.000	34.9	33	40.1	42.0	0	39.8	54.0	-14.2
H	34710.000	36.1	33	41.3	44.4	0	41.5	54.0	-12.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	43.9	33	36.6	47.5	74.0	-26.5
H	11570.000	40.7	33	40.5	48.2	74.0	-25.8
H	17355.000	42.7	33	37.6	47.3	74.0	-26.7
V	23140.000	43.3	33	38.6	48.9	74.0	-25.1
H	28925.000	41.0	33	40.1	48.1	74.0	-25.9
H	34710.000	42.9	33	41.3	51.2	74.0	-22.8

5825MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5850.000	31.0	33	36.6	34.6	0	35.5	54.0	-18.5
H	11650.000	29.5	33	40.5	37.0	0	36.9	54.0	-17.1
H	17475.000	30.0	33	37.6	34.6	0	34.7	54.0	-19.3
H	23300.000	34.0	33	38.6	39.6	0	39.8	54.0	-14.2
V	29125.000	35.0	33	40.0	42.0	0	41.0	54.0	-13.0
H	34950.000	35.4	33	41.3	43.7	0	42.7	54.0	-11.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5850.000	43.9	33	36.6	47.5	74.0	-26.5
H	11650.000	40.1	33	40.5	47.6	74.0	-26.4
H	17475.000	41.1	33	37.6	45.7	74.0	-28.3
H	23300.000	39.0	33	38.6	44.6	74.0	-29.4
V	29125.000	39.1	33	40.0	46.1	74.0	-27.9
H	34950.000	44.4	33	41.3	52.7	74.0	-21.3

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (40MHz) (MCS0)

Mode: AC Mode 40MHz

5190MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5145.550	27.8	33	35.7	30.5	0	48.9	54.0	-5.1
H	10380.000	31.0	33	40.5	38.5	0	37.8	54.0	-16.2
V	15570.000	29.4	33	37.7	34.1	0	36.8	54.0	-17.2
H	20760.000	30.9	33	37.7	35.6	0	37.4	54.0	-16.6
H	25950.000	34.7	33	39.3	41.0	0	39.8	54.0	-14.2
H	31140.000	37.2	33	42.1	46.3	0	40.5	54.0	-13.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5145.500	66.2	33	35.7	68.9	74.0	-5.1
H	10380.000	38.7	33	40.5	46.2	74.0	-27.8
V	15570.000	46.7	33	37.7	51.4	74.0	-22.6
H	20760.000	39.9	33	37.7	44.6	74.0	-29.4
H	25950.000	39.9	33	39.3	46.2	74.0	-27.8
H	31140.000	42.2	33	42.1	51.3	74.0	-22.7

5230MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10460.000	27.1	33	40.5	34.6	0	33.6	54.0	-20.4
H	15690.000	30.5	33	37.7	35.2	0	34.8	54.0	-19.2
H	20920.000	30.0	33	37.7	34.7	0	35.9	54.0	-18.1
V	26150.000	30.6	33	39.2	36.8	0	36.7	54.0	-17.3
H	31380.000	30.4	33	42.1	39.5	0	38.4	54.0	-15.6
H	36610.000	35.9	33	41.7	44.6	0	43.8	54.0	-10.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10460.000	39.9	33	40.5	47.4	74.0	-26.6
H	15690.000	42.8	33	37.7	47.5	74.0	-26.5
H	20920.000	42.8	33	37.7	47.5	74.0	-26.5
V	26150.000	41.9	33	39.2	48.1	74.0	-25.9
H	31380.000	35.6	33	42.1	44.7	74.0	-29.3
H	36610.000	41.0	33	41.7	49.7	74.0	-24.3

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (40MHz) (MCS0)

Mode: AC Mode 40MHz

5755MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	32.8	33	36.6	36.4	0	35.1	54.0	-18.9
H	11510.000	30.9	33	40.5	38.4	0	37.4	54.0	-16.6
V	17265.000	32.8	33	37.6	37.4	0	37.6	54.0	-16.4
V	23020.000	30.5	33	38.6	36.1	0	35.2	54.0	-18.8
V	28775.000	33.5	33	40.1	40.6	0	41.8	54.0	-12.2
H	34530.000	39.2	33	41.3	47.5	0	42.7	54.0	-11.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	46.2	33	36.6	49.8	74.0	-24.2
H	11510.000	40.6	33	40.5	48.1	74.0	-25.9
V	17265.000	43.3	33	37.6	47.9	74.0	-26.1
V	23020.000	44.0	33	38.6	49.6	74.0	-24.4
V	28775.000	42.7	33	40.1	49.8	74.0	-24.2
H	34530.000	45.3	33	41.3	53.6	74.0	-20.4

5795MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5850.000	30.9	33	36.6	34.5	0	36.4	54.0	-17.6
H	11590.000	30.1	33	40.5	37.6	0	36.8	54.0	-17.2
V	17385.000	31.8	33	37.6	36.4	0	38.9	54.0	-15.1
H	23180.000	33.6	33	38.6	39.2	0	37.4	54.0	-16.6
H	28975.000	34.4	33	40.1	41.5	0	38.4	54.0	-15.6
V	34770.000	38.9	33	41.3	47.2	0	39.6	54.0	-14.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5850.000	43.6	33	36.6	47.2	74.0	-26.8
H	11590.000	40.6	33	40.5	48.1	74.0	-25.9
V	17385.000	42.9	33	37.6	47.5	74.0	-26.5
H	23180.000	44.0	33	38.6	49.6	74.0	-24.4
H	28975.000	40.9	33	40.1	48.0	74.0	-26.0
V	34770.000	43.1	33	41.3	51.4	74.0	-22.6

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (80MHz) (MCS0)

Mode: AC Mode 80MHz

5210MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	29.9	33	35.7	32.6	0	50.3	54.0	-3.7
V	10420.000	28.9	33	40.5	36.4	0	33.6	54.0	-20.4
V	15630.000	29.4	33	37.7	34.1	0	34.5	54.0	-19.5
H	20840.000	32.0	33	37.7	36.7	0	36.8	54.0	-17.2
V	26050.000	32.0	33	39.2	38.2	0	39.7	54.0	-14.3
H	31260.000	31.4	33	42.1	40.5	0	40.1	54.0	-13.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	67.4	33	35.7	70.1	74.0	-3.9
V	10420.000	42.3	33	40.5	49.8	74.0	-24.2
V	15630.000	43.5	33	37.7	48.2	74.0	-25.8
H	20840.000	44.0	33	37.7	48.7	74.0	-25.3
V	26050.000	43.4	33	39.2	49.6	74.0	-24.4
H	31260.000	44.3	33	42.1	53.4	74.0	-20.6

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

IEEE 802.11ac (80MHz) (MCS0)

Mode: AC Mode 80MHz

5775MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	28.7	33	36.6	32.3	0	32.6	54.0	-21.4
V	5850.000	31.1	33	36.6	34.7	0	35.9	54.0	-18.1
V	11550.000	26.7	33	40.5	34.2	0	33.4	54.0	-20.6
V	17325.000	34.0	33	37.6	38.6	0	37.4	54.0	-16.6
H	23100.000	37.1	33	38.6	42.7	0	42.3	54.0	-11.7
H	28875.000	41.0	33	40.1	48.1	0	42.7	54.0	-11.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5725.000	45.3	33	36.6	48.9	74.0	-25.1
V	5850.000	43.8	33	36.6	47.4	74.0	-26.6
V	11550.000	37.7	33	40.5	45.2	74.0	-28.8
V	17325.000	40.7	33	37.6	45.3	74.0	-28.7
H	23100.000	44.0	33	38.6	49.6	74.0	-24.4
H	28875.000	45.3	33	40.1	52.4	74.0	-21.6

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

RADIATED EMISSION DATA (CONT'D)

Worst Case: Transmitting

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
H	320.030	30.9	16	23.0	37.9	46.0	-8.1
H	335.998	36.3	16	24.0	44.3	46.0	-1.7
H	479.997	34.0	16	26.0	44.0	46.0	-2.0
H	656.256	26.9	16	29.0	39.9	46.0	-6.1
H	718.821	24.9	16	30.0	38.9	46.0	-7.1
H	840.071	24.3	16	31.0	39.3	46.0	-6.7

- NOTES: 1. Peak detector is used unless otherwise stated.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

4.7 AC Power Line Conducted Emission

- ☐ Not Applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration

at 0.5325 MHz


The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf.

4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 14.53 dB margin compare with Quasi-peak limit

4.7.3 Conducted Emission Test Setup

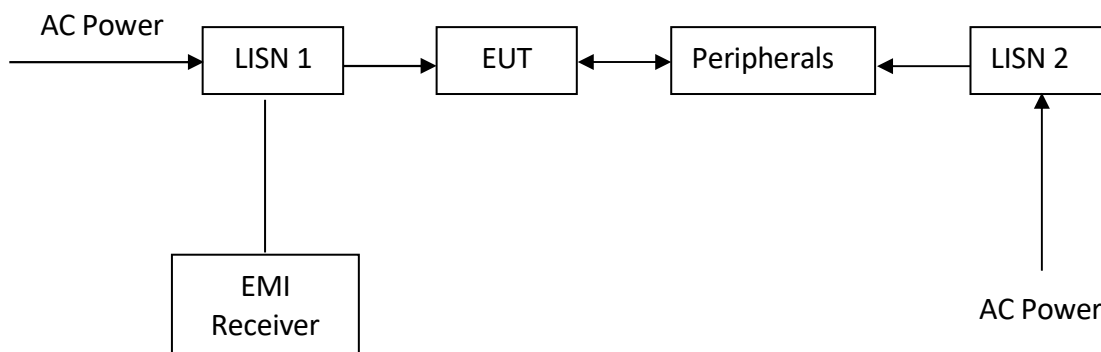


The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

TEST REPORT

AC POWER LINE CONDUCTED EMISSION

Worst Case: Transmitting + Charging Internal Battery

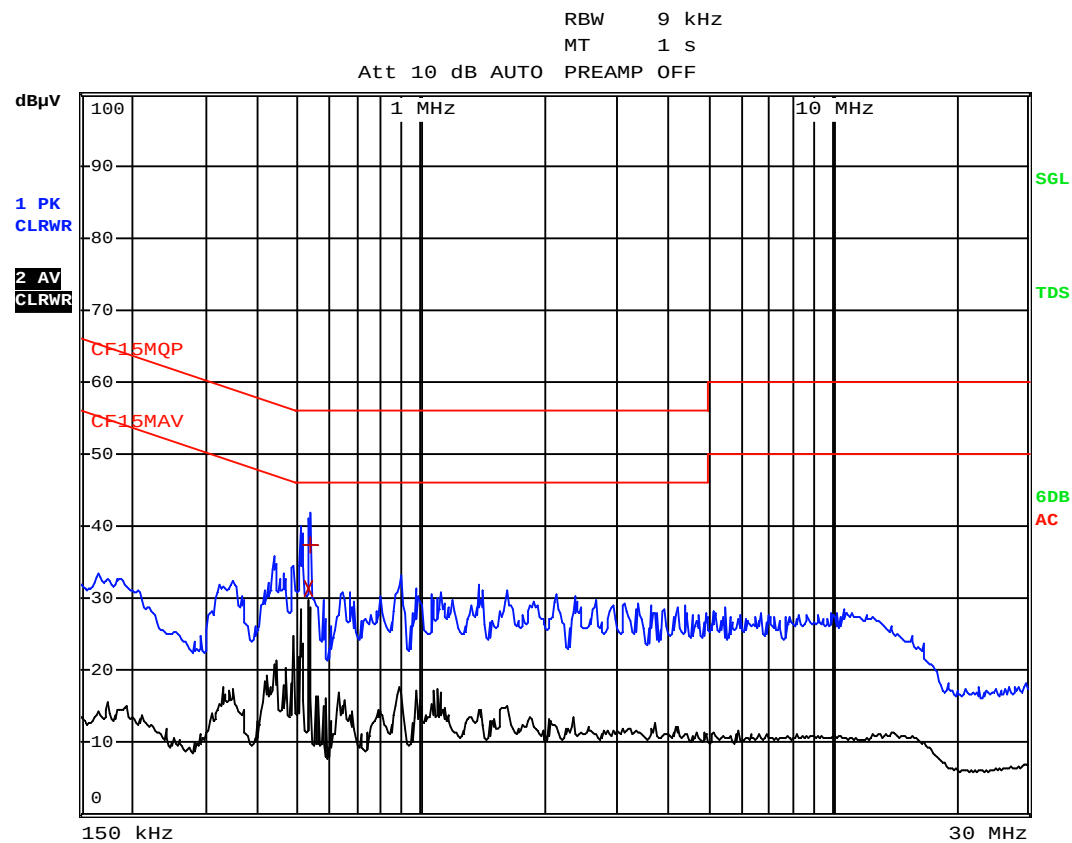

TEST REPORT

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3156	EW-3241	EW-3481
Manufacturer	ROHDESCHWARZ	EMCO	ROHDESCHWARZ
Model No.	ESR26	3110C	ESR7
Calibration Date	September 26, 2022	May 26, 2021	December 21, 2021
Calibration Due Date	September 26, 2023	May 26, 2023	December 21, 2022

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 26, 2021	December 13, 2021
Calibration Due Date	December 30, 2022	November 26, 2022	June 13, 2023

Equipment	RF Preamplifier (9kHz to 6000MHz)	2.4GHz Notch Filter	14m Double Shield RF Cable (20MHz to 6GHz)
Registration No.	EW-3006b	EW-3435	EW-2074
Manufacturer	SCHWARZBECK	MICROWAVE	RADIALL
Model No.	BBV9718	N0324413	N(m)-RG142-BNC(m) L=14M
Calibration Date	February 15, 2022	June 16, 2022	December 10, 2021
Calibration Due Date	February 15, 2023	June 16, 2023	December 10, 2022

Equipment	Pyramidal Horn Antenna	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-0905	EW-2781
Manufacturer	EMCO	GREATBILLION
Model No.	3160-09	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	July 20, 2021	November 24, 2020
Calibration Due Date	January 20, 2023	November 24, 2022

TEST REPORT

5.0 EQUIPMENT LIST (CONT'D)

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2454	EW-2501	EW-3156
Manufacturer	RADIAL	ROHDESCHWARZ	R&S
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI7
Calibration Date	January 26, 2022	November 09, 2021	December 21, 2021
Calibration Due Date	January 26, 2023	November 09, 2022	December 21, 2022

3) Bandedge Measurement

Equipment	EMI Test Receiver 7GHz	5m RF Cable (40GHz)
Registration No.	EW-3481	EW-2107
Manufacturer	ROHDESCHWARZ	N/A
Model No.	ESR7	SMA-M to SMA-M
Calibration Date	December 21, 2021	December 11, 2021
Calibration Due Date	December 21, 2022	December 11, 2022

4) Conductive Measurement Test

Equipment	RF Cable (40GHz)	RF Power Meter with Power Sensor (NRP-Z81)	Signal and Spectrum Analyzer (10Hz to 40GHz)
Registration No.	EW-3271	EW-3309	EW-3016
Manufacturer	GREATBILLION	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	sma m-m 5m 40G	NRP-Z81	FSV40
Calibration Date	November 24, 2021	December 01, 2021	October 29, 2021
Calibration Due Date	February 24, 2023	December 01, 2022	January 29, 2023

5) Bandedge & Bandwidth Measurement

Equipment	5m RF Cable (40GHz)	EMI Test Receiver (9kHz to 26.5GHz)
Registration No.	EW-2701	EW-3156
Manufacturer	RADIAL	ROHDESCHWARZ
Model No.	sma m-m 5m 40G	ESR26
Calibration Date	November 24, 2021	September 26, 2022
Calibration Due Date	November 24, 2022	September 26, 2023

6) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40