




Shenzhen Hurryup Technology Co., Ltd.

Room 15F, Block B, Huaqiang Plaza, Huaqiang North Road, Futian District, Shenzhen 518031, Guangdong, China

Model	Date	Page
JZC-FPC-WIFI-M3-04066-V01	2017-09-05	1 / 3
Whatsapp: +8618820289097 Skype: szhurryup@hotmail.com Email: sales02@hurryupgps.com http://www.hurryup.en.alibaba.com		

1. Picture

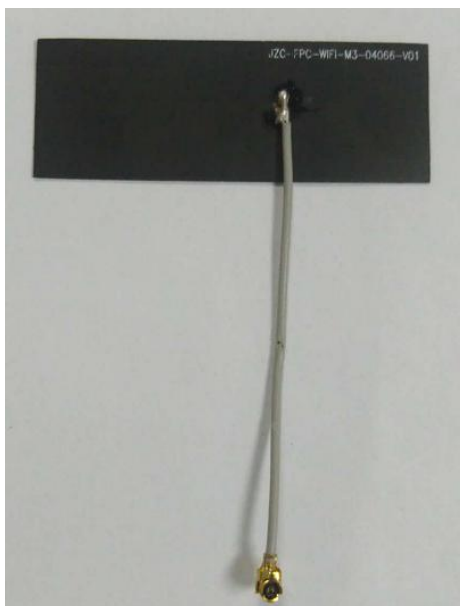

2. Product parameters

(1) physical properties

Size (mm)	50×17.8	Cable Length (mm)	70
Connector	IPEX First Generation	Cable Type	RG1.13 Gray Cable
Antenna material	FPC	Antenna solder mask	black oil
Operating temperature	-40℃~80℃	Working humidity	10%~95%
Storage temperature	-45℃~85℃	Storage humidity	10%~95%

(2) Electrical parameters


Working frequency (MHZ)	2400-2500/5150-5250MHz/5725-5850		
Gain (maximum direction)	3dBi	Impedance	50 Ω
Polarization	Linear polarization	Standing wave ratio	≤2.0
Bandwidth (MHZ)	100/125		



Model	Date	Page
JZC-FPC-WIFI-M3-04066-V01	2017-09-05	2 / 3

Whatsapp: +8618820289097 | Skype: szhurryup@hotmail.com | Email: sales02@hurryupgps.com | <http://www.hurryup.en.alibaba.com>

3. Return Loss

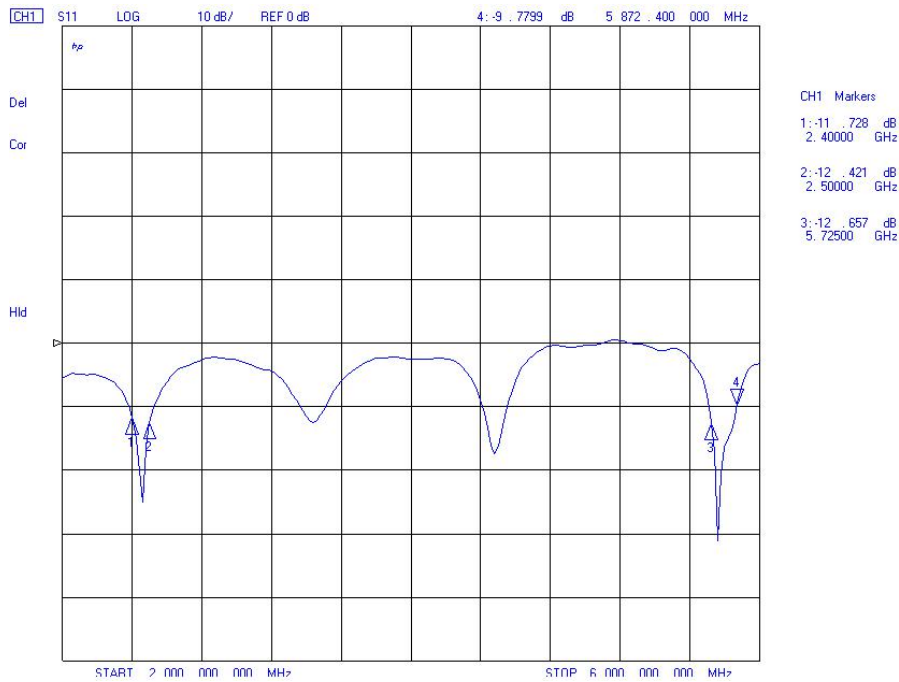

Model	Date	Page
JZC-FPC-WIFI-M3-04066-V01	2017-09-05	3 / 3

Whatsapp: +8618820289097 | Skype: szhurryup@hotmail.com | Email: sales02@hurryupgps.com | <http://www.hurryup.en.alibaba.com>

4. Drawing

铜全区域

线路区域

J2C-PPC-WIFI-M3-04066-V01

49,946 ± 0.3

17,796 ± 0.3

I-PEX First Generation, Cable Length:70mm

尺寸	公差	材料	表面处理	备注
0~10	±0.10	0.02		
10~20	±0.15	0.03		
20~40	±0.20	0.02		
> 40	±0.25	0.04		

Shenzhen Hurrayup Technology Co., Ltd.

机种

品名

料号

材质

PI (亚光黑色)

日期

2017.09.05

页码

1 of 1

绘图

刘赞

设计

审核

叶学

确认

单位

mm

比例

版本

R:A