

Test Report

Product: 3-in-1 Wireless Charging Stand

Trade Mark: N/A

Model Number: X85Q22

FCC ID: 2APDM-X85Q22

Prepared for

ShangXing Technology(ShenZhen) Co.,Ltd.
Room 408, 4th Floor, Building 30.Wisdomland Business Park, Guankou 2nd
road, Nantou, Nanshan, Shenzhen China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	5
1.3	TEST SETUP	6
1.4	POWER SETTING CONFIGURATION PARAMETERS	6
1.5	ANCILLARY EQUIPMENT	6
2	SUMMARY OF TEST RESULT	7
3	TEST FACILITIES AND ACCREDITATIONS	8
3.1	TEST LABORATORY	8
3.2	ENVIRONMENTAL CONDITIONS	8
3.3	MEASUREMENT UNCERTAINTY	8
3.4	TEST SOFTWARE	8
4	LIST OF TEST EQUIPMENT	10
5	TEST ITEM AND RESULTS.....	12
5.1	ANTENNA REQUIREMENT	12
5.2	CONDUCTED EMISSION.....	13
5.3	RADIATED EMISSION	17
5.4	OCCUPIED BANDWIDTH	22
6	PHOTOGRAPHS OF THE TEST SETUP.....	25
7	PHOTOGRAPHS OF THE EUT.....	27

TEST RESULT CERTIFICATION

Applicant's Name..... : ShangXing Technology(ShenZhen) Co.,Ltd.
Address : Room 408, 4th Floor, Building 30.Wisdomland Business Park,
Guankou 2nd road, Nantou, Nanshan, Shenzhen China
Manufacturer's Name : ShangXing Technology(ShenZhen) Co.,Ltd.
Address : Room 408, 4th Floor, Building 30.Wisdomland Business Park,
Guankou 2nd road, Nantou, Nanshan, Shenzhen China

Product description


Product name : 3-in-1 Wireless Charging Stand
Model Number : X85Q22

Standards : FCC Part 15C
Test procedure..... : IEEE/ANSI C63.10-2020

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test..... :
Date (s) of performance of tests..... : Mar. 10, 2026~Apr. 09, 2026
Test Result..... : **Pass**


Testing Engineer :


(Z o e S u)

Technical Manager :


(G a r y L u)

Authorized Signatory :


(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	3-in-1 Wireless Charging Stand
Model name:	X85Q22
Series Model:	X85, X85S, X85Q, X83, X83S, X83SQ22, X83Q22, X80S, X80SQ22, X80SQ
Different of series model:	All the models are the same circuit and module, except the appearance, colour and model No..
Operation frequency:	Phone: 110.5-205kHz, 360kHz Earbuds: 110.5-205kHz Watch: 326.5kHz, 1765kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna
Hardware version:	V1.0
Software version:	V1.0
Battery:	N/A
Power supply:	USB-C Input: 9V=3A, 12V=3A, 15V=3A Wireless Output (Phone): 5W, 7.5W, 10W, 15W, 25W Wireless Output (Earbuds): 5W Wireless Output (Watch): 5W
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	AC/DC adapter + Wireless Output (Phone: 5W + Earbuds: 5W + Watch: 3W)
2	AC/DC adapter + Wireless Output (Phone: 7.5W + Earbuds: 5W + Watch: 3W)
3	AC/DC adapter + Wireless Output (Phone: 10W + Earbuds: 5W + Watch: 3W)
4	AC/DC adapter + Wireless Output (Phone: 15W + Earbuds: 5W + Watch: 3W)
5	AC/DC adapter + Wireless Output (Phone: 25W + Earbuds: 5W + Watch: 3W)
6	AC/DC adapter + Wireless Output (Phone: 5W + Earbuds: 5W + Watch: 5W)
7	AC/DC adapter + Wireless Output (Phone: 7.5W + Earbuds: 5W + Watch: 5W)
8	AC/DC adapter + Wireless Output

	(Phone: 10W + Earbuds: 5W + Watch: 5W)
9	AC/DC adapter + Wireless Output (Phone: 15W + Earbuds: 5W + Watch: 5W)
10	AC/DC adapter + Wireless Output (Phone: 25W + Earbuds: 5W + Watch: 5W)

Test Item	Final Test Mode
Conducted Emissions	7
Radiated Emissions	8/10
20dB bandwidth	3/5/10

Note: All modes have been tested, and the report only reflects the test results of the worst mode.

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Power setting configuration parameters

Test Software Version		N/A	
Frequency		Phone: 110.5-205kHz, 360kHz Earbuds: 110.5-205kHz Watch: 326.5kHz, 1765kHz	
Parameters		Default	
RF cable			
Description	Connector	Length	Supplied by
Antenna Cable	SMA	10cm	Applicant

Note: Disclaimer: the loss of RF cable is too small and can be ignored.

1.5 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Load	YBZ	/	Shenzhen Leaper Technology Co., Ltd.
Load	YBZ	/	Shenzhen Leaper Technology Co., Ltd.
Watch	A2859	M69PQQ7J2T	Apple Inc.
Adapter	A2674	AGDAEQ0F466 26590	Anke Innovation Technology Co., Ltd

2 Summary of Test Result

Test procedures according to the technical standards:

FCC Part 15C				
No.	Standard Section	Test Item	Result	Remark
1	FCC Part 15.203	Antenna Requirement	Pass	
2	FCC Part 15.207	Conducted Emission	Pass	
3	FCC Part 15.209	Radiated Emission	Pass	
4	FCC Part 15.215	20dB Bandwidth	Pass	

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	
Humidity	$\pm 5 \%$	

3.4 Test Software

Software name	Manufacturer	Model	Version
Conducted Emission test Software	Farad	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission test Software	Farad	EZ-EMC	FA-03A2
RF Test System	MWRF	MTS 8310	2.0.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-05-18	2026-05-17
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-05-18	2026-05-17
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 9170	01193	2024-05-18	2026-05-17
4	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2025-05-07	2026-05-06
5	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2025-05-07	2026-05-06
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2025-05-07	2026-05-06
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2025-05-13	2026-05-12
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2024-05-18	2026-05-17
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A02278	2025-05-07	2026-05-06
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2025-05-07	2026-05-06
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2025-05-07	2026-05-06
3	HB-E016	Absorb clamp	ZHINAN	ZN23201	N/A	2025-05-10	2026-05-09
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2025-05-10	2026-05-09
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2025-05-07	2026-05-06
RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG AnaioG Signal Generator	Agilent	N5181A	MY47070421	2025-05-07	2026-05-06
2	HB-E042	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	132108	2025-05-08	2026-05-07

3	HB-E043	MXG Anaio Signal Generator	Agilent	N5182A	US46240335	2025-05-08	2026-05-07
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2025-05-07	2026-05-06
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	2025-05-08	2026-05-07
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1S	N/A	2025-05-09	2026-05-08

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission


5.2.1 Limits

Limits – Class A		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	79	66
0.5 to 30	73	60
Limits – Class B		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		

5.2.2 Test Procedures


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test setup

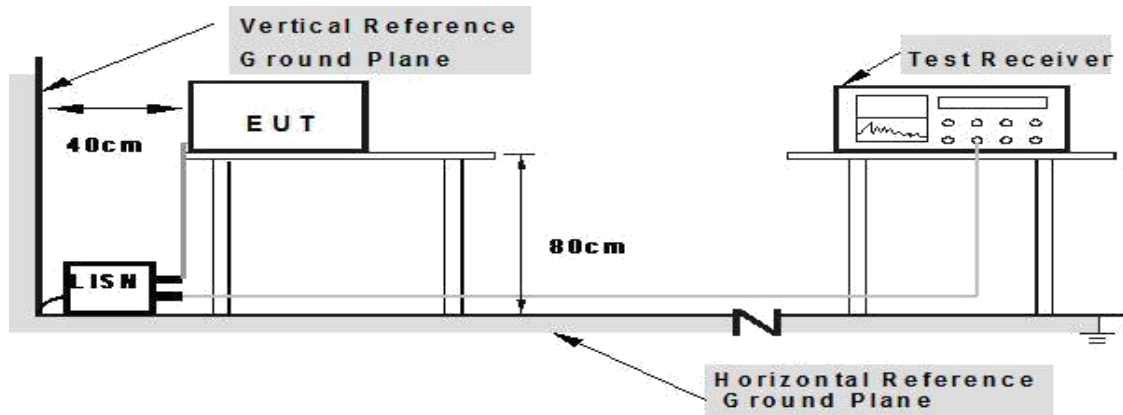


5.2.4 Test Result

EUT:	3-in-1 Wireless Charging Stand	Model Name:	X85Q22
Test Mode:	Mode 7	Phase:	L
Test Voltage:	DC 15V from adapter AC 120V/60Hz		

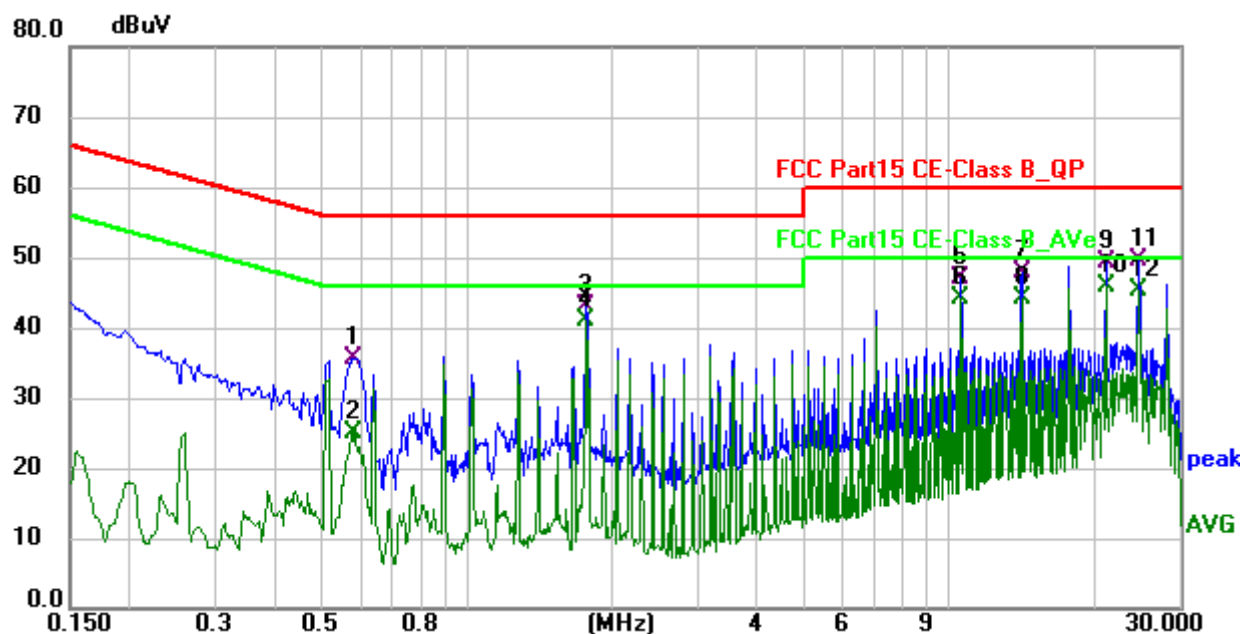

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.582	25.52	10.11	35.63	56.00	-20.37	QP
2	0.582	14.84	10.11	24.95	46.00	-21.05	AVG
3	1.770	32.78	10.30	43.08	56.00	-12.92	QP
4	1.770	30.65	10.30	40.95	46.00	-5.05	AVG
5	10.613	33.42	13.63	47.05	60.00	-12.95	QP
6	10.613	30.62	13.63	44.25	50.00	-5.75	AVG
7	14.154	33.76	14.01	47.77	60.00	-12.23	QP
8	14.154	30.21	14.01	44.22	50.00	-5.78	AVG
9	21.233	34.51	14.81	49.32	60.00	-10.68	QP
10 *	21.233	31.06	14.81	45.87	50.00	-4.13	AVG
11	24.770	34.18	15.31	49.49	60.00	-10.51	QP
12	24.770	29.94	15.31	45.25	50.00	-4.75	AVG

EUT:	3-in-1 Wireless Charging Stand	Model Name:	X85Q22
Test Mode:	Mode 7	Phase:	N
Test Voltage:	DC 15V from adapter AC 120V/60Hz		

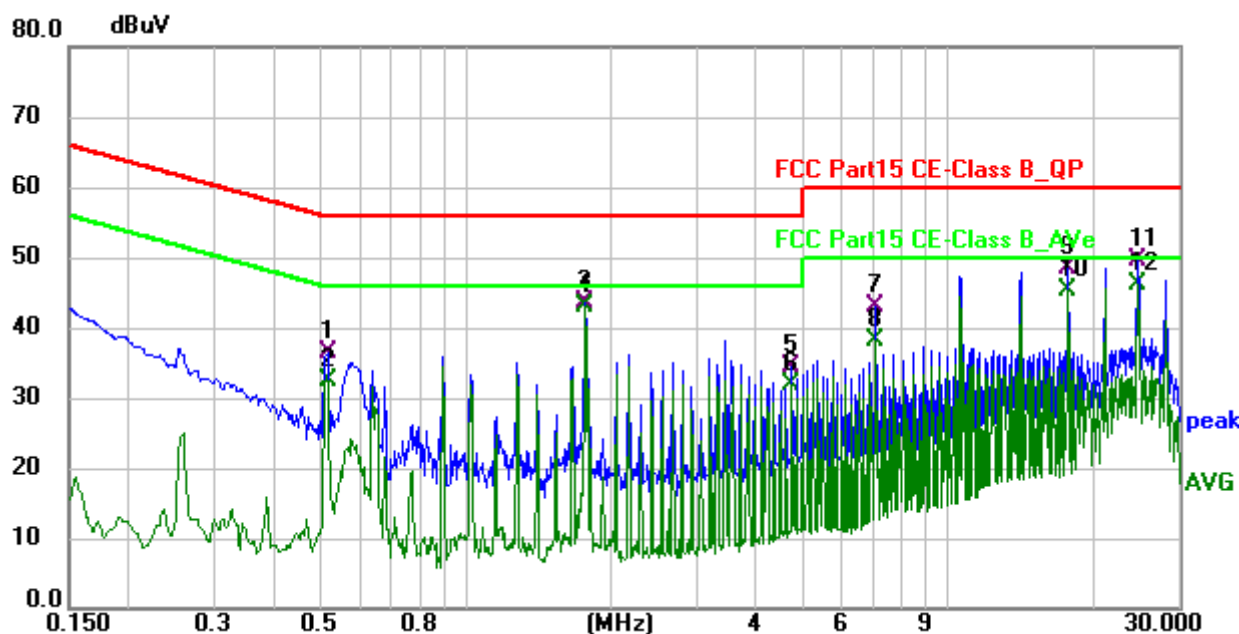

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.514	26.34	10.12	36.46	56.00	-19.54	QP
2	0.514	22.22	10.12	32.34	46.00	-13.66	AVG
3	1.770	33.32	10.30	43.62	56.00	-12.38	QP
4 *	1.770	32.63	10.30	42.93	46.00	-3.07	AVG
5	4.736	23.05	11.28	34.33	56.00	-21.67	QP
6	4.736	20.59	11.28	31.87	46.00	-14.13	AVG
7	7.080	30.63	12.35	42.98	60.00	-17.02	QP
8	7.080	25.86	12.35	38.21	50.00	-11.79	AVG
9	17.695	34.16	14.40	48.56	60.00	-11.44	QP
10	17.695	30.80	14.40	45.20	50.00	-4.80	AVG
11	24.770	34.19	15.32	49.51	60.00	-10.49	QP
12	24.770	30.91	15.32	46.23	50.00	-3.77	AVG

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- The radiated emission tests were performed in the 3 meters.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

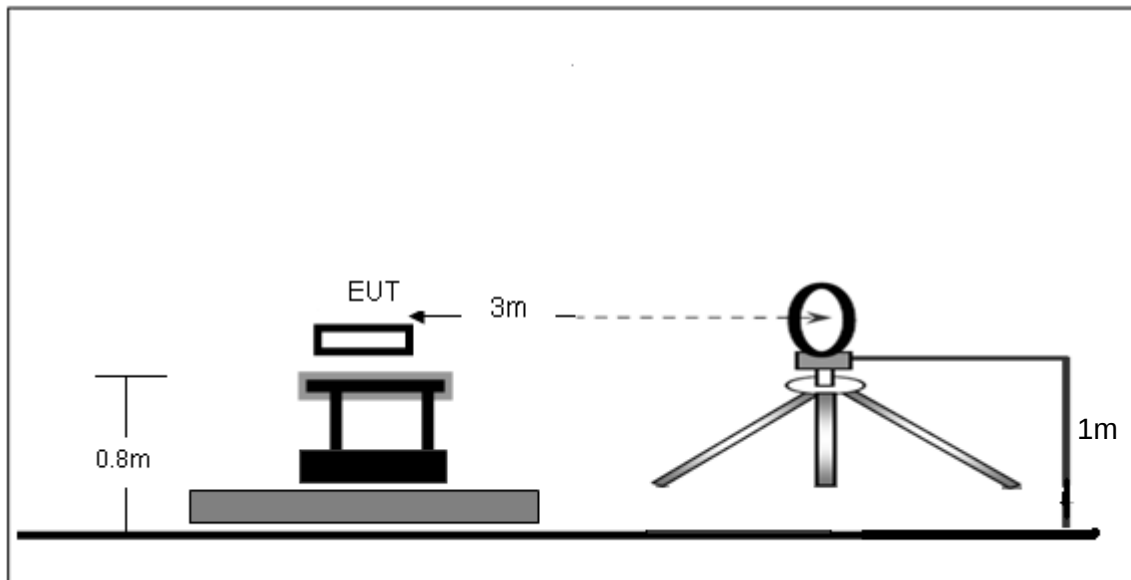

Radiated Emission Test-Up Frequency 30MHz~1GHz

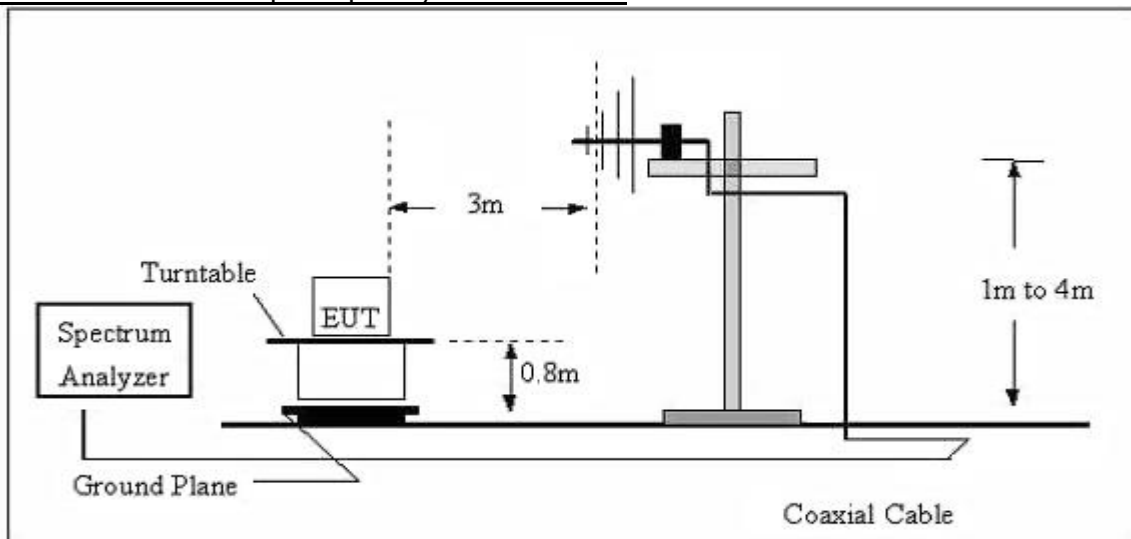

5.3.4 Test Result

Frequency range (9kHz – 30MHz)


EUT:	3-in-1 Wireless Charging Stand	Model Name:	X85Q22
Test Mode:	Mode 10	Phase:	Coaxial
Test Voltage:	DC 15V from adapter AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1246	41.18	20.47	61.65	105.72	-44.07	AVG
2	0.2094	32.01	20.13	52.14	101.20	-49.06	AVG
3	0.2483	30.90	20.12	51.02	99.72	-48.70	AVG
4	0.3141	33.08	20.09	53.17	97.67	-44.50	AVG
5	0.3607	43.37	20.07	63.44	96.47	-33.03	AVG
6 *	1.7686	27.07	20.31	47.38	69.50	-22.12	QP


Frequency range (30MHz – 1GHz)

EUT:	3-in-1 Wireless Charging Stand	Model Name:	X85Q22
Test Mode:	Mode 8	Phase:	Vertical
Test Voltage:	DC 15V from adapter AC 120V/60Hz		

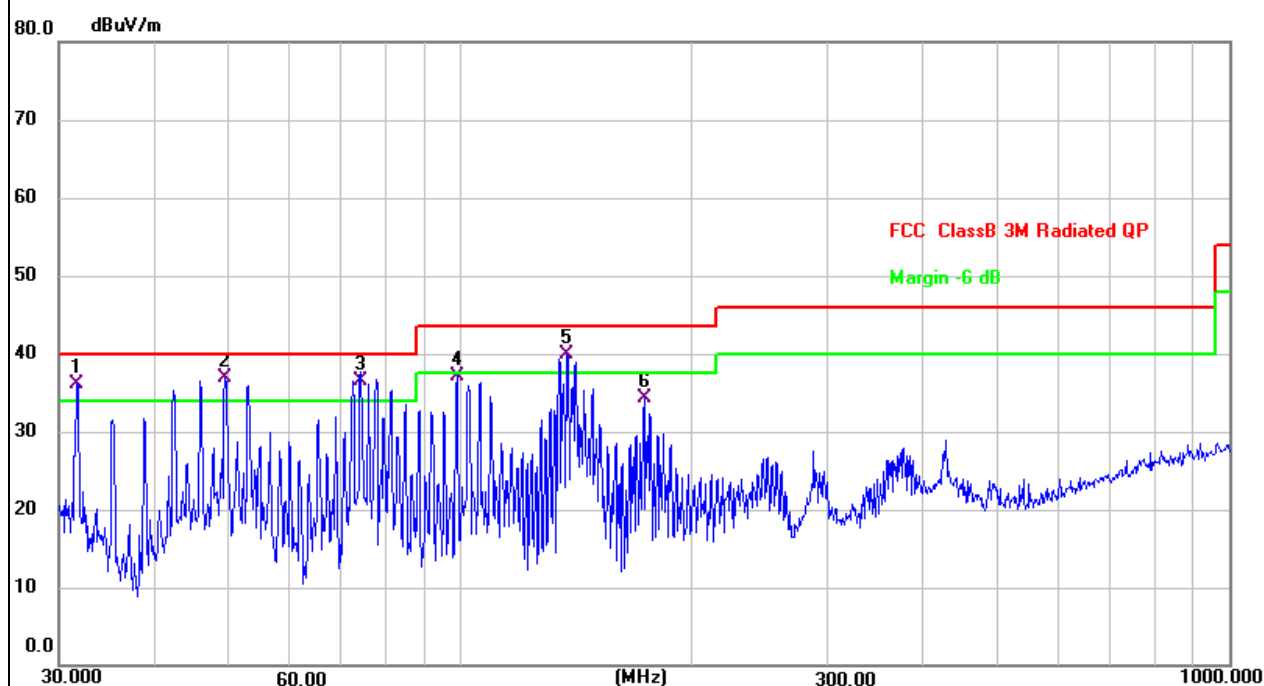

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	31.6201	51.14	-15.08	36.06	40.00	-3.94	QP
2 *	49.3594	50.81	-13.99	36.82	40.00	-3.18	QP
3 !	74.1351	53.28	-16.68	36.60	40.00	-3.40	QP
4	98.8324	54.61	-17.55	37.06	43.50	-6.44	QP
5 !	137.4202	54.05	-14.13	39.92	43.50	-3.58	QP
6	173.2050	48.09	-13.84	34.25	43.50	-9.25	QP

EUT:	3-in-1 Wireless Charging Stand	Model Name:	X85Q22
Test Mode:	Mode 8	Phase:	Horizontal
Test Voltage:	DC 15V from adapter AC 120V/60Hz		

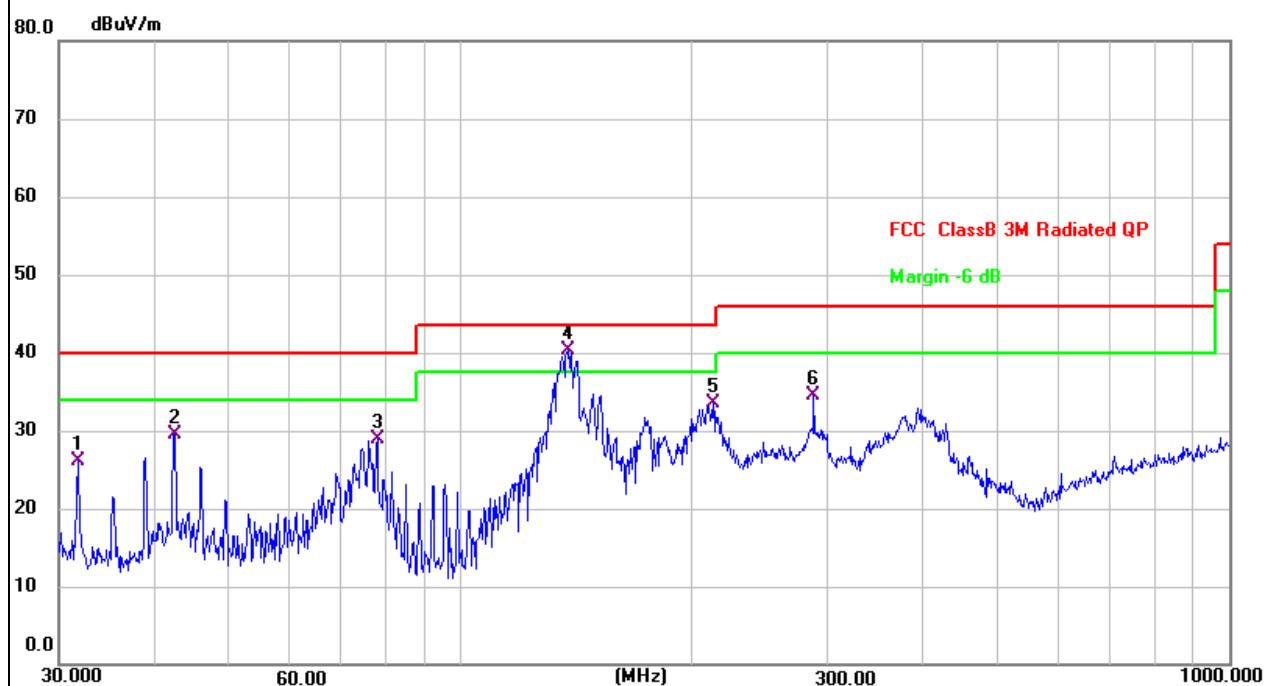

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.7312	41.22	-15.07	26.15	40.00	-13.85	QP
2	42.4508	43.41	-13.93	29.48	40.00	-10.52	QP
3	77.8653	46.25	-17.43	28.82	40.00	-11.18	QP
4 *	137.9028	54.48	-14.11	40.37	43.50	-3.13	QP
5	213.0151	50.22	-16.72	33.50	43.50	-10.00	QP
6	287.9904	47.43	-12.91	34.52	46.00	-11.48	QP

5.4 Occupied Bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

5.4.2 Test result


Frequency (kHz)	20dB emission bandwidth (Hz)
130.25	749.30

Phone Test plots as below:

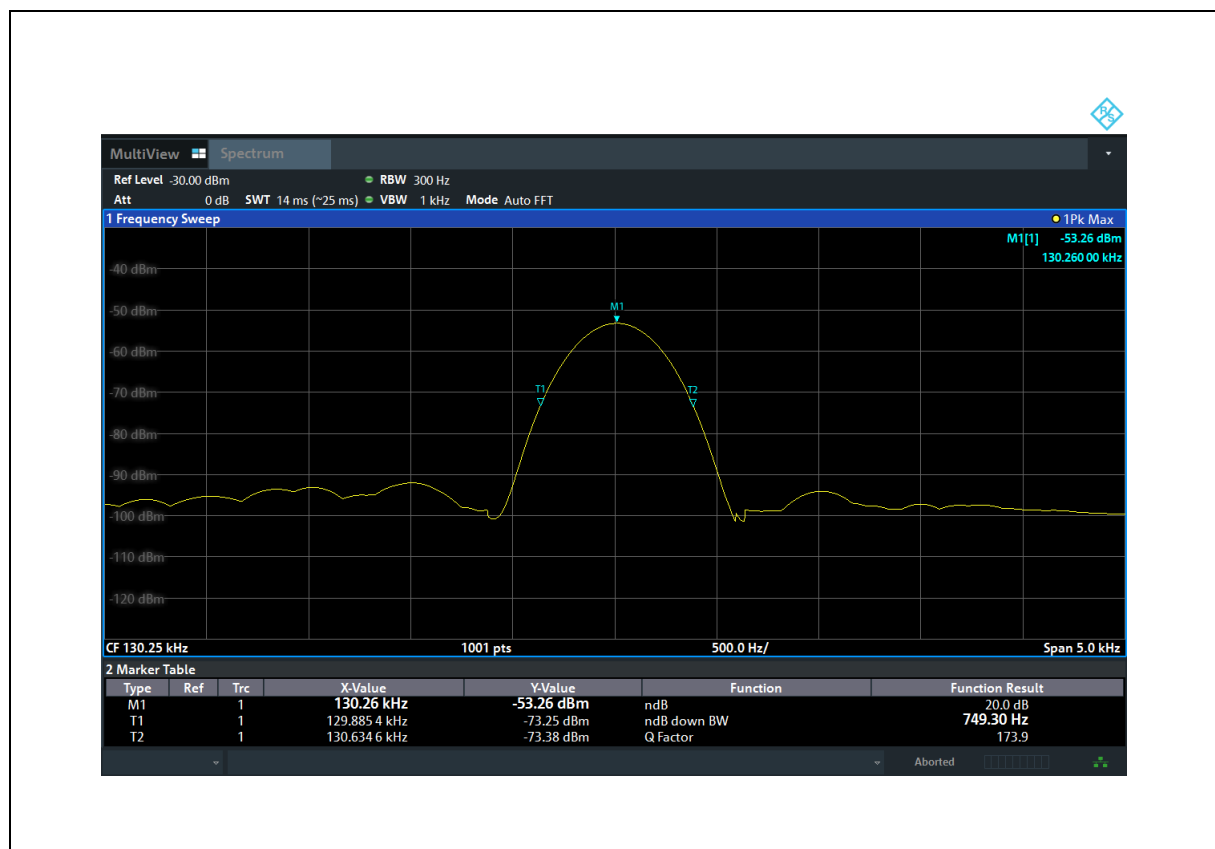


Frequency (kHz)	20dB emission bandwidth (Hz)
360	749.30

Phone Test plots as below:

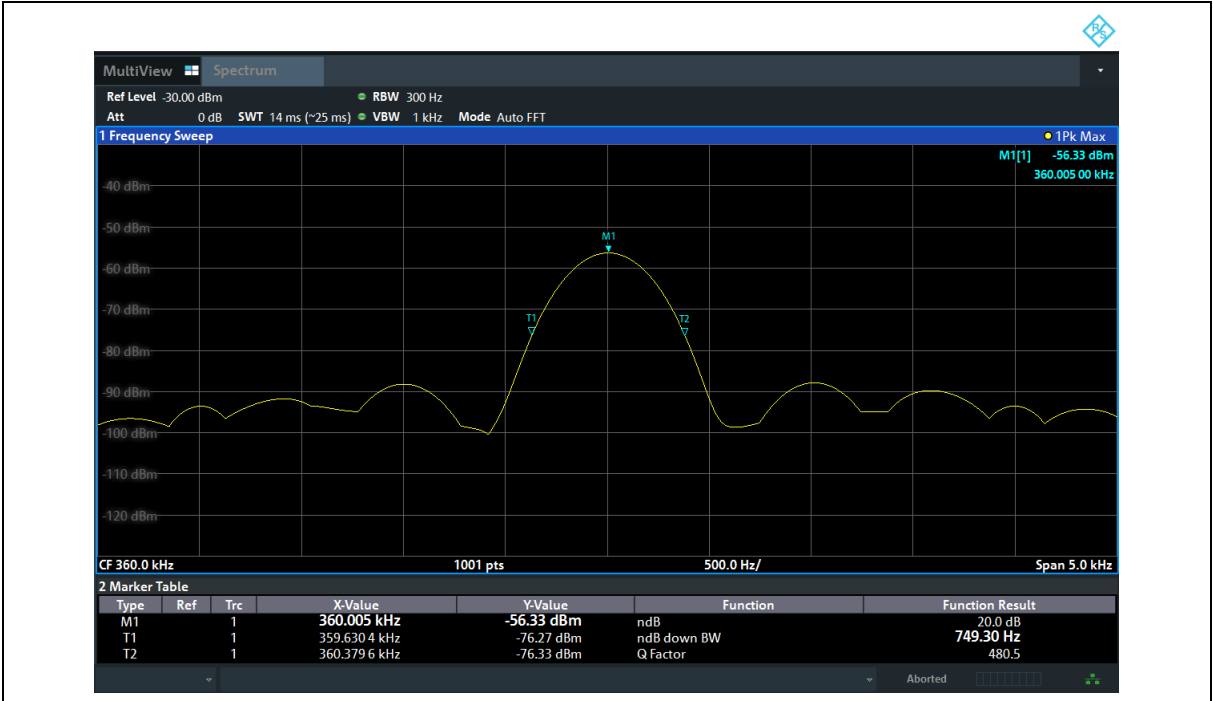


Frequency (kHz)	20dB emission bandwidth (Hz)
160.7	759.20

Earbuds Test plots as below:

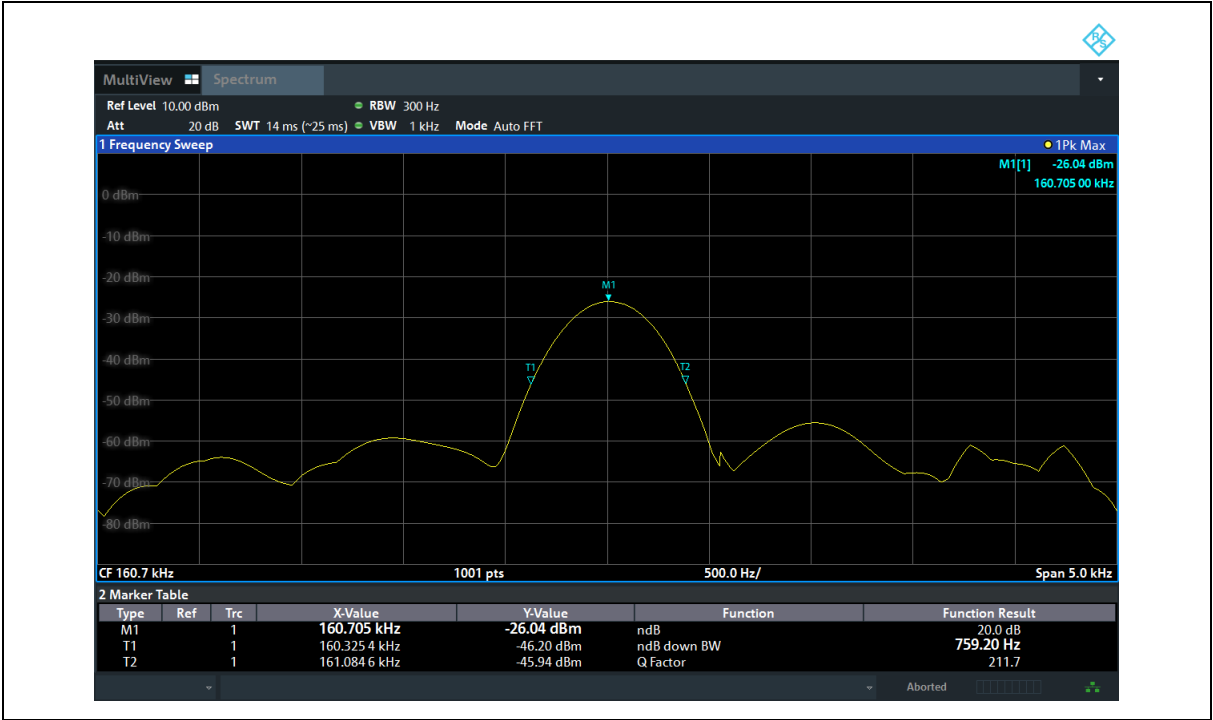

Frequency (kHz)	20dB emission bandwidth (Hz)
326.5	779.20

Watch Test plots as below:

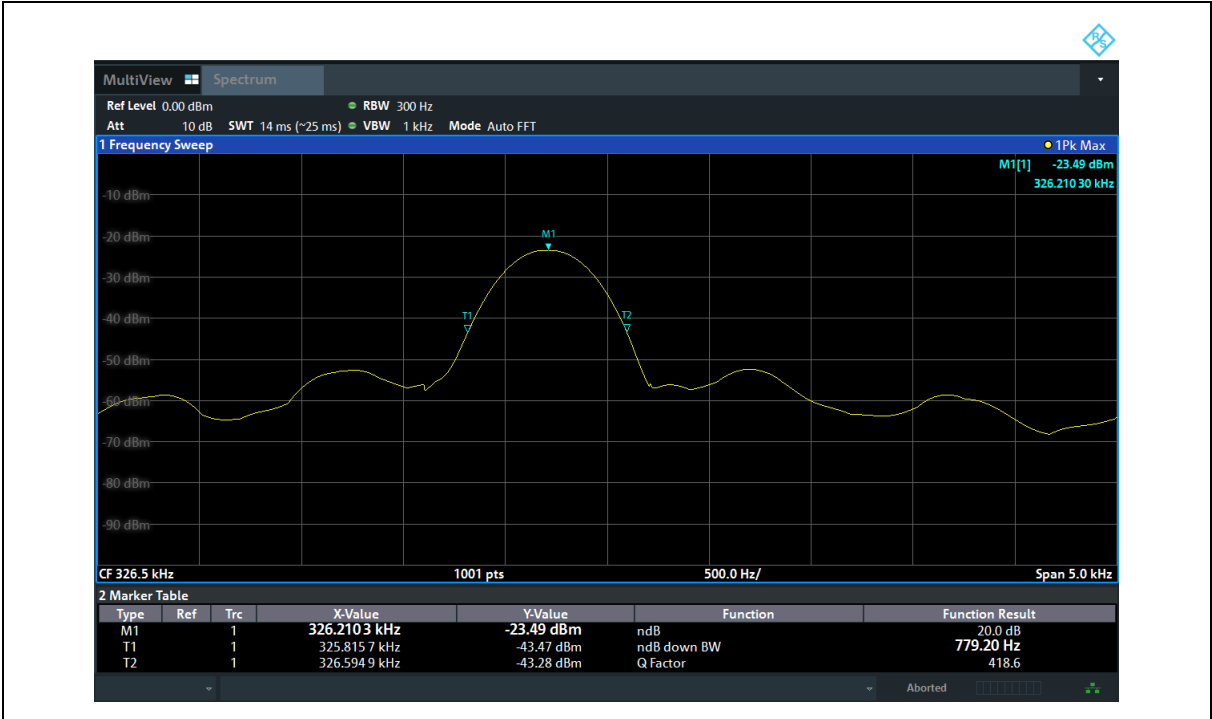

Frequency (kHz)	20dB emission bandwidth (Hz)
1765	2850

Watch Test plots as below:




6 Photographs of the Test Setup


Radiated Emission Below 30MHz



Radiated Emission Above 30MHz

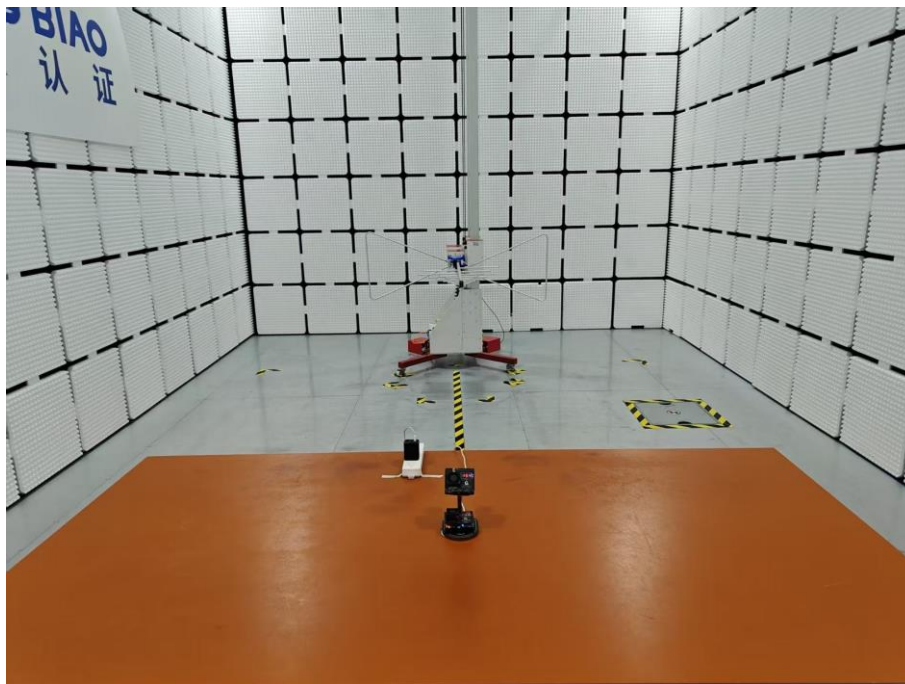

Conducted Emission

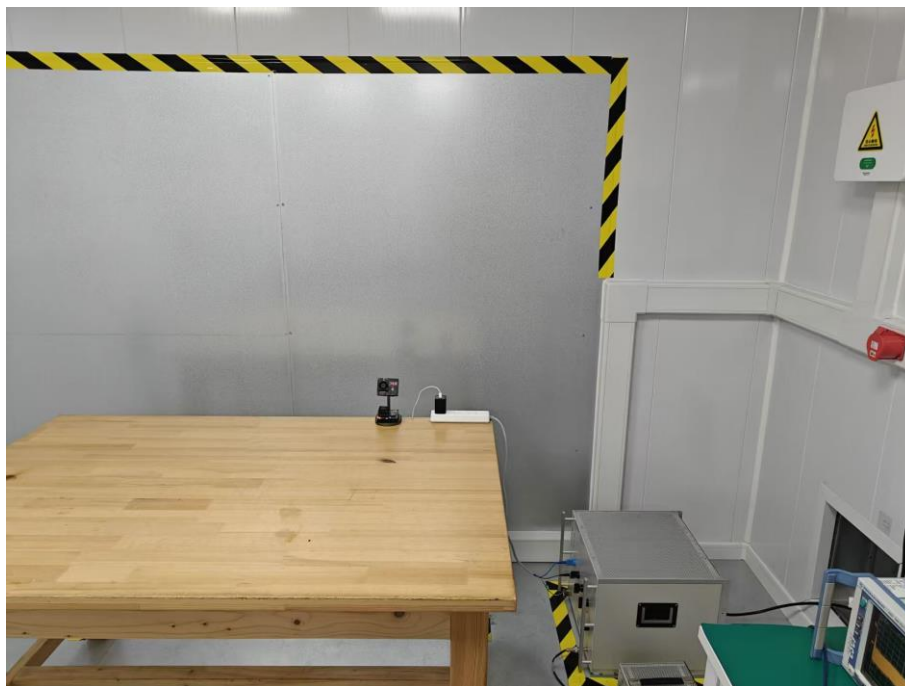

7 Photographs of the EUT

Photo 1

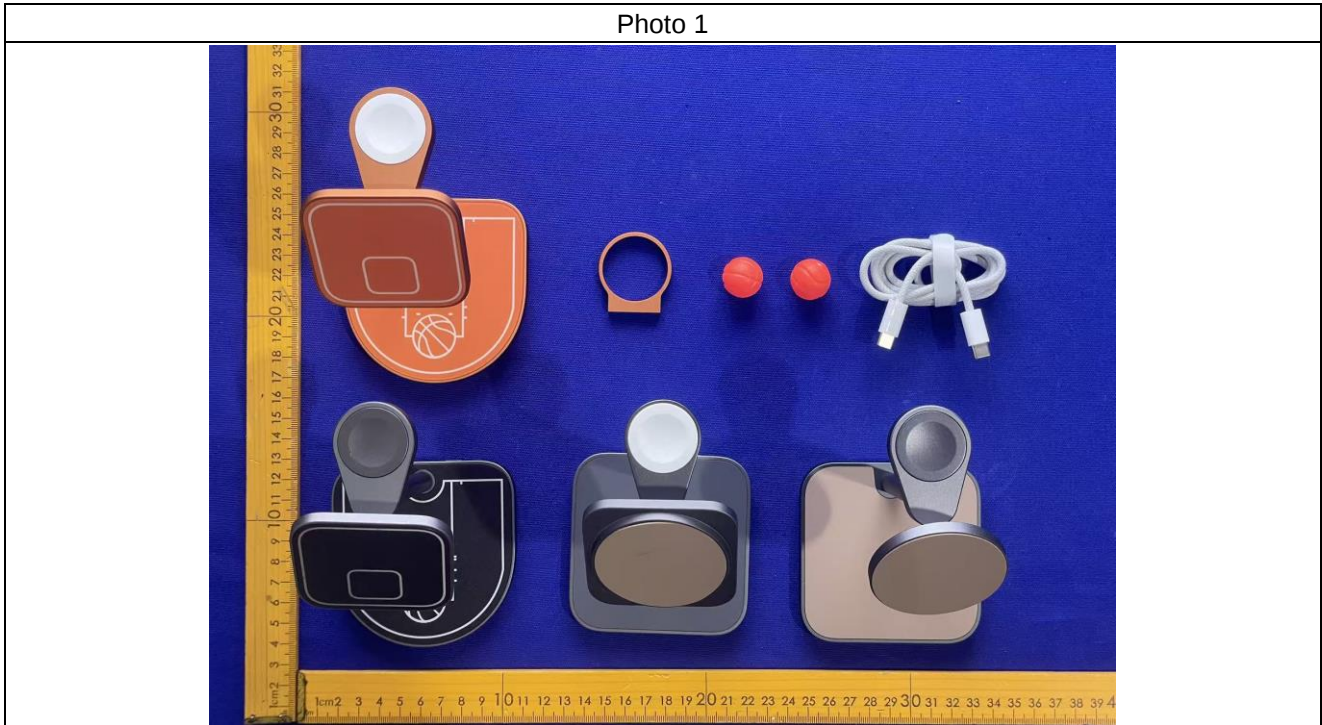


Photo 2



Photo 3



Photo 4

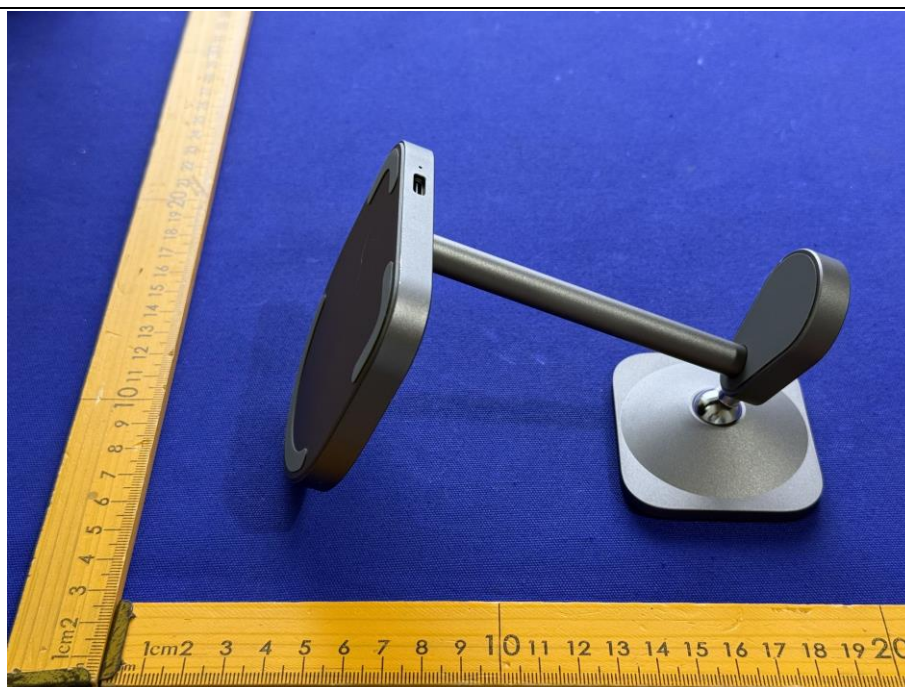


Photo 5



Photo 6



Photo 7



Photo 8

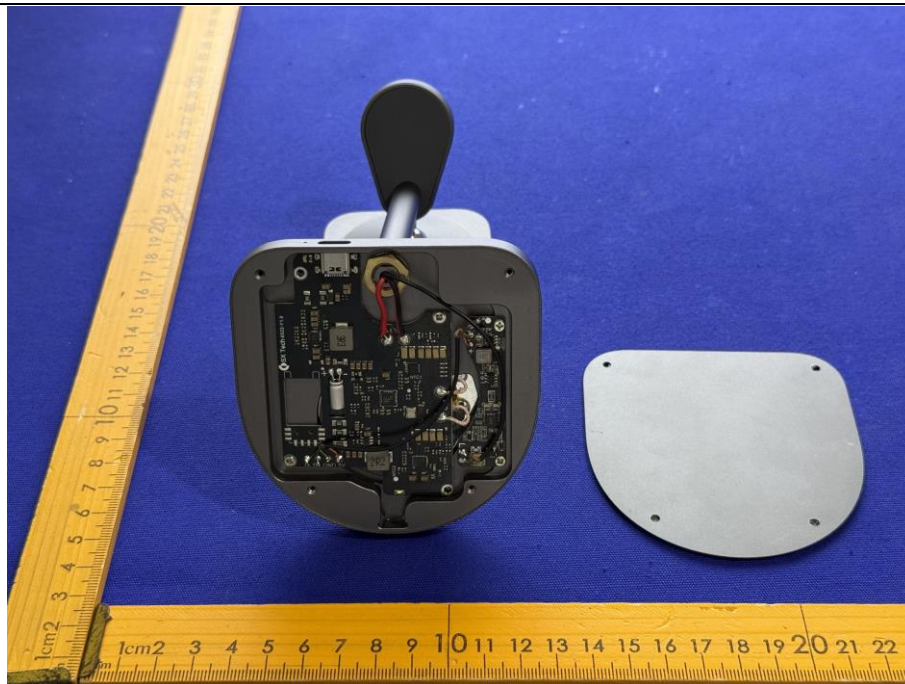


Photo 9



Photo 10

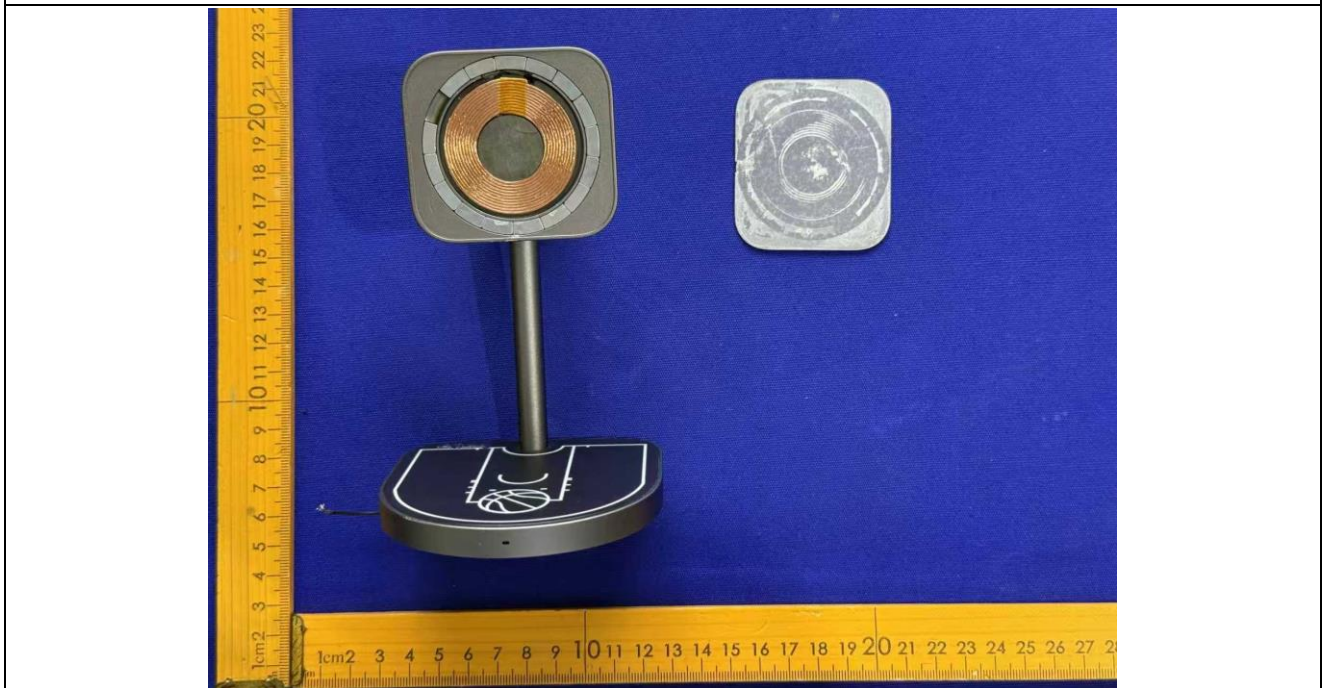


Photo 11



Photo 12

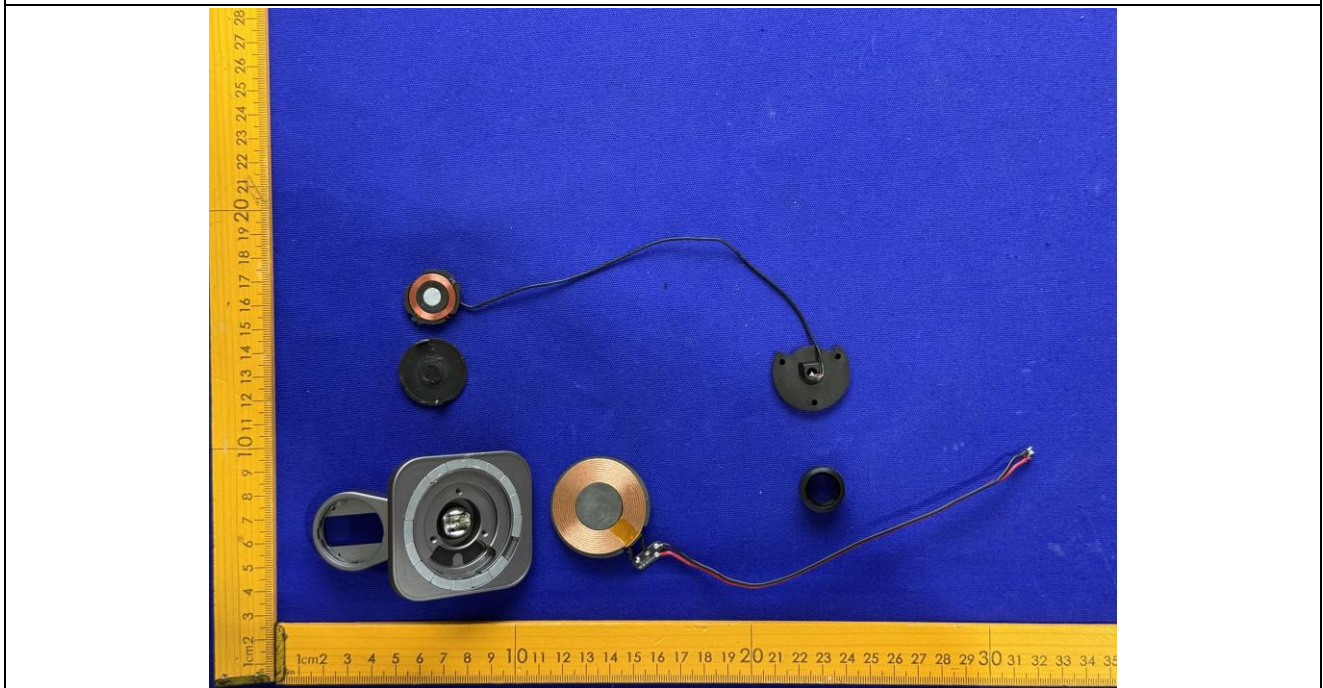


Photo 13

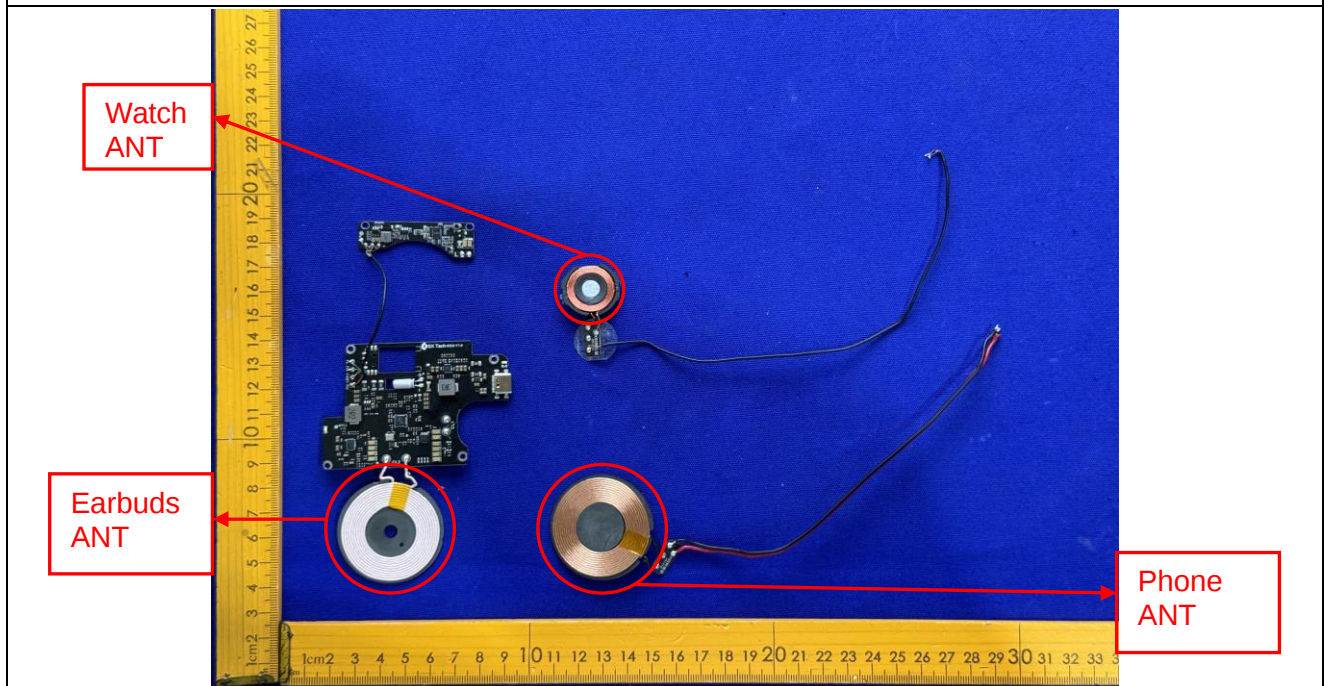


Photo 14

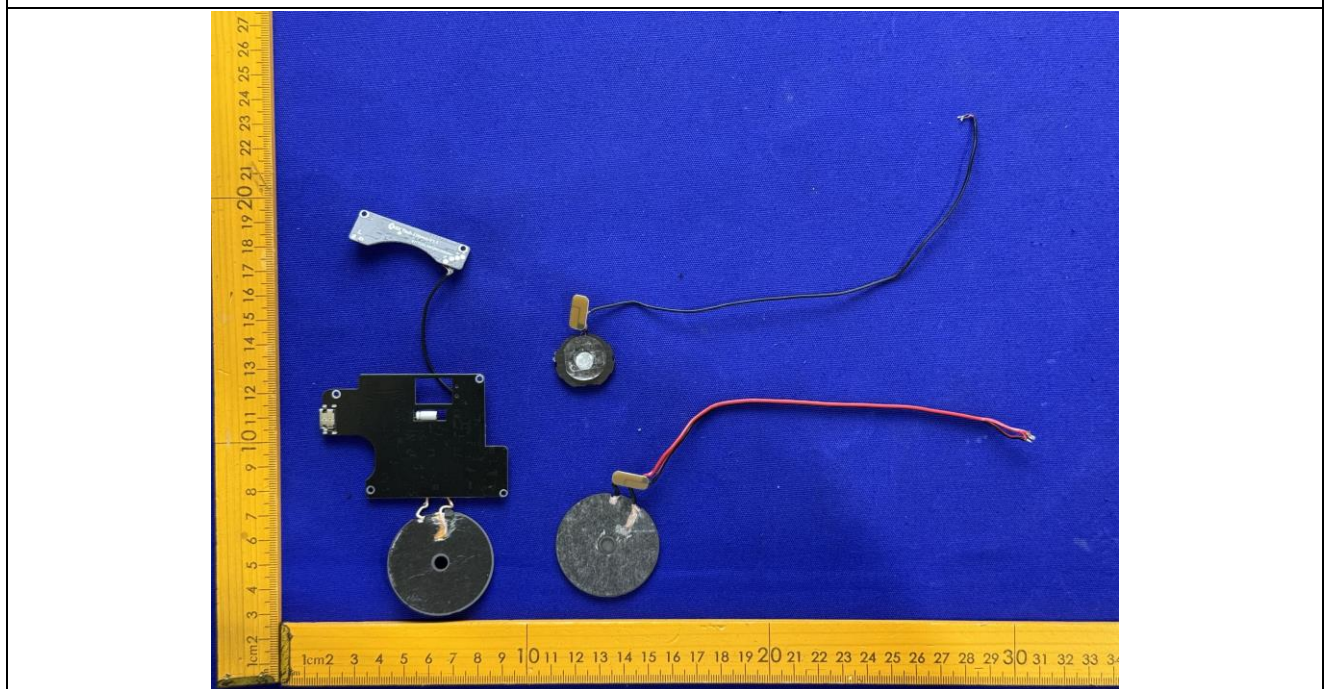


Photo 15


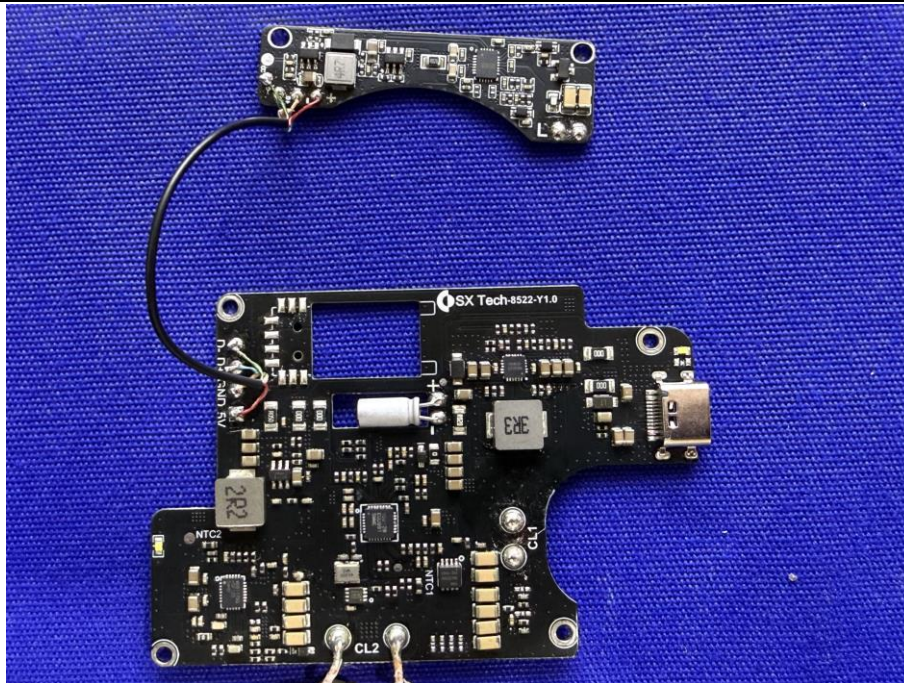


Photo 16

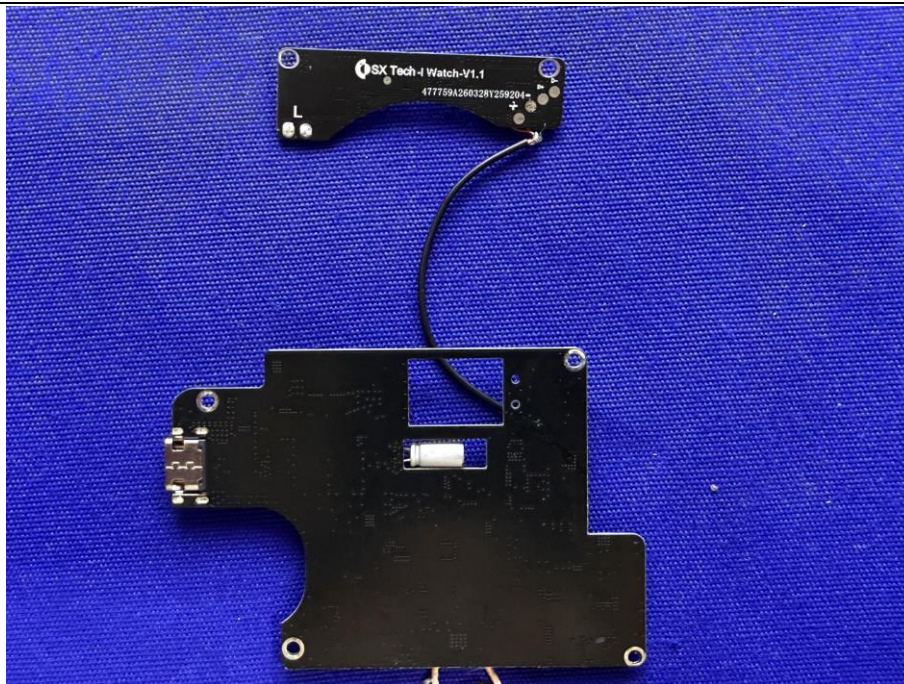

***** END OF REPORT *****