




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 110 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500
------------	----------------	-----------------	------

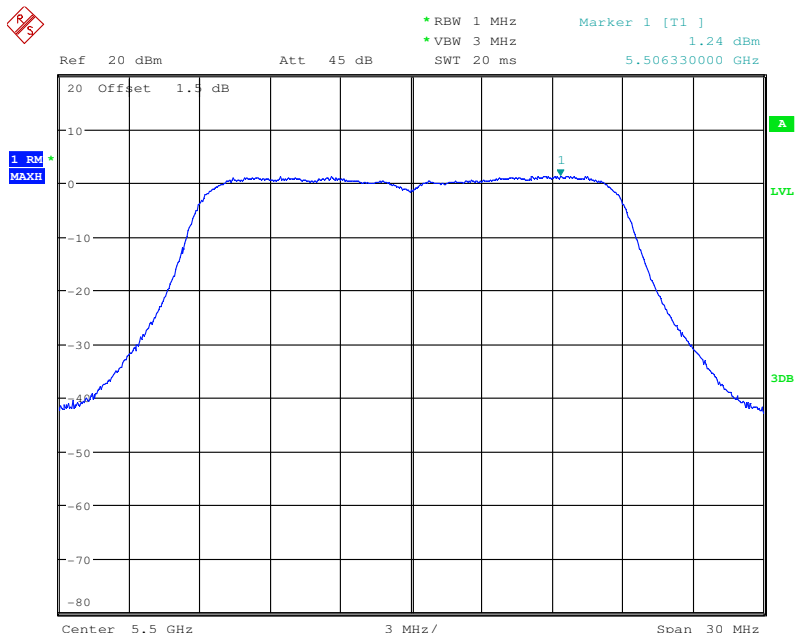

Test mode:	802.11ac(HT20)	Frequency(MHz):	5580
------------	----------------	-----------------	------

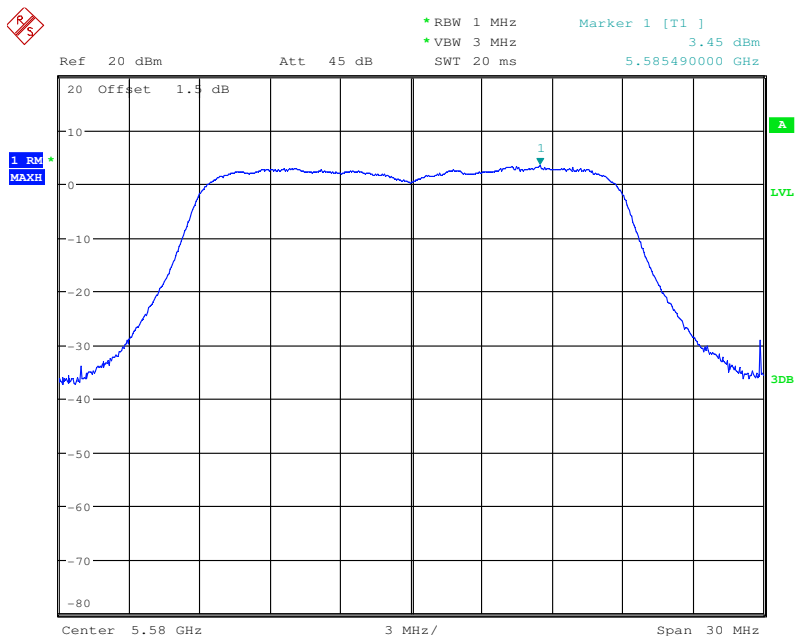




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 111 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700
------------	----------------	-----------------	------

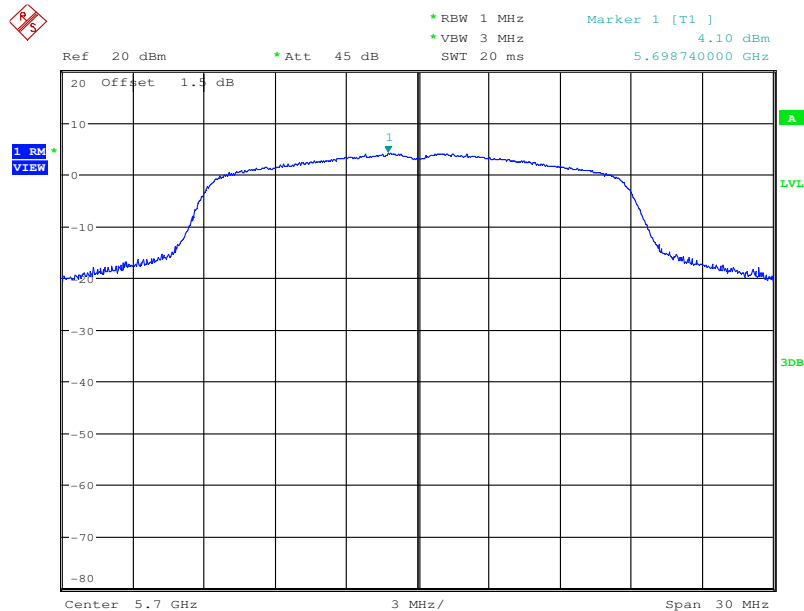

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745
------------	----------------	-----------------	------

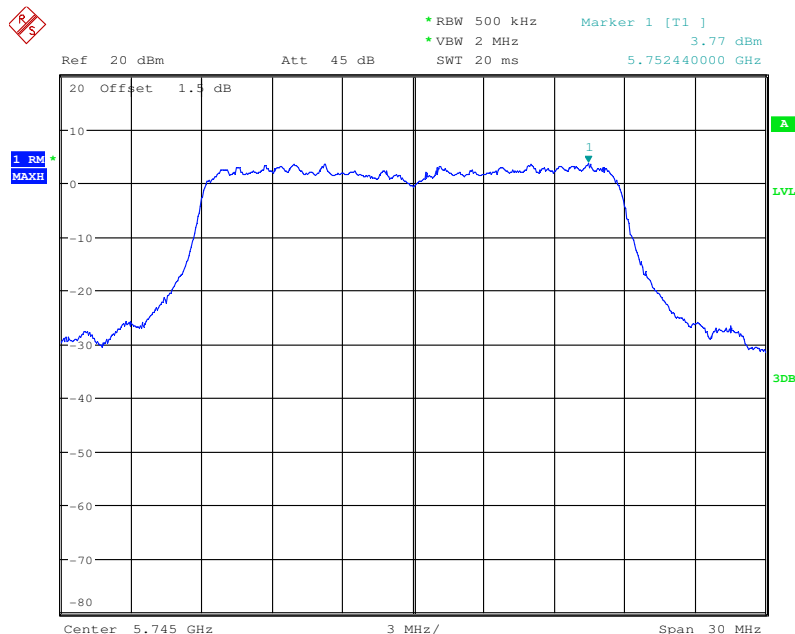





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 112 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785
------------	----------------	-----------------	------

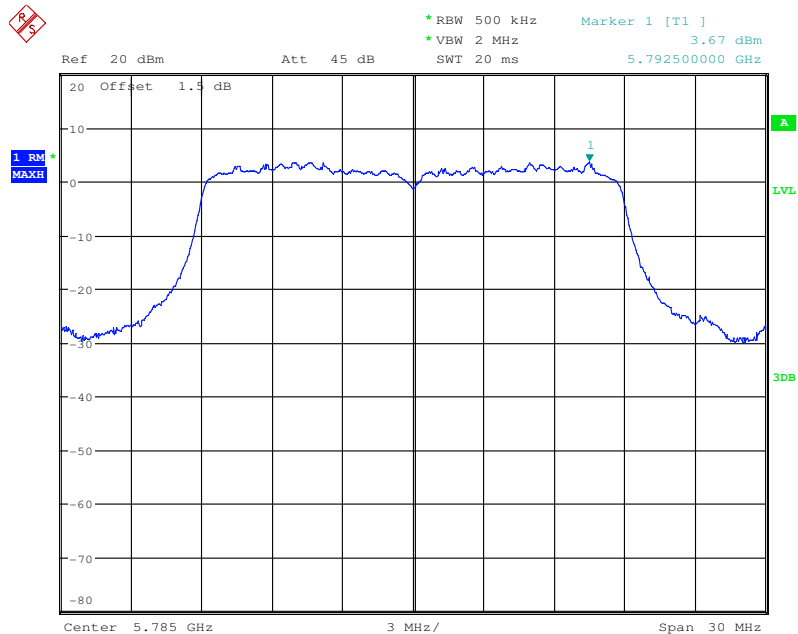

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825
------------	----------------	-----------------	------

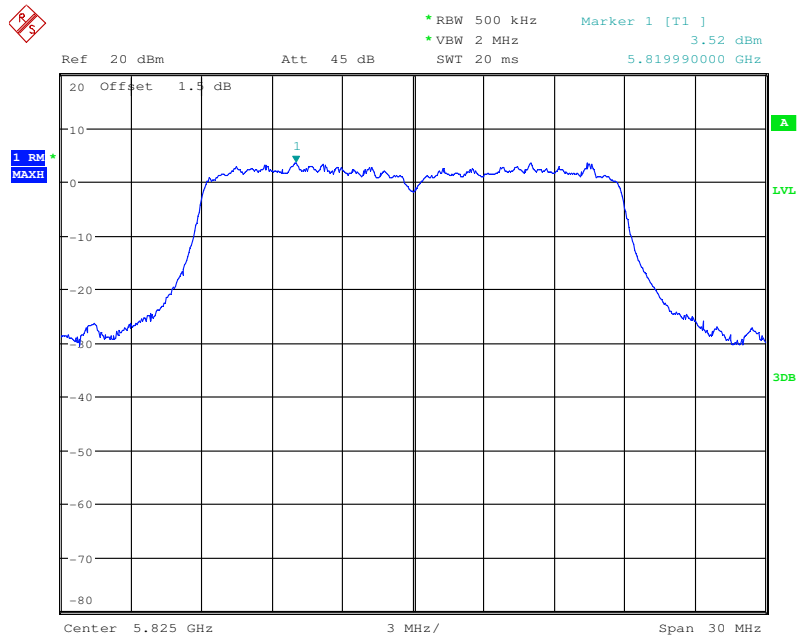




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 113 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5190
------------	---------------	-----------------	------

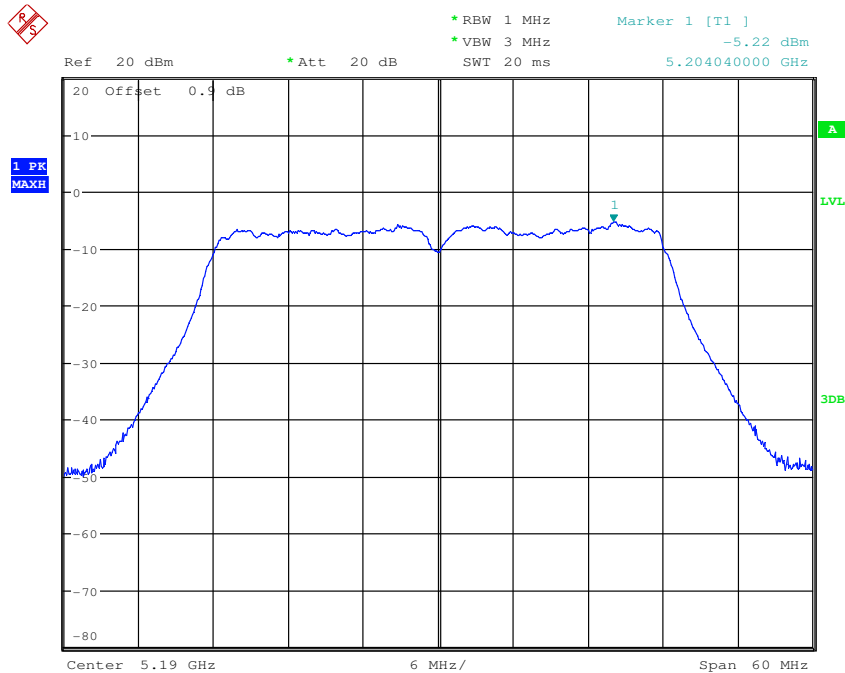

Test mode:	802.11n(HT40)	Frequency(MHz):	5230
------------	---------------	-----------------	------

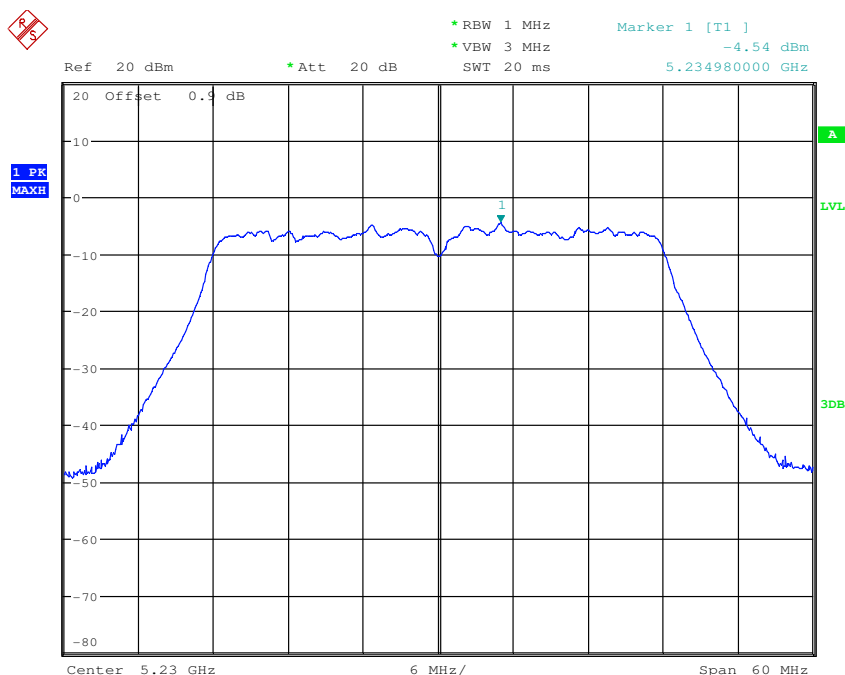




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 114 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5270
------------	---------------	-----------------	------

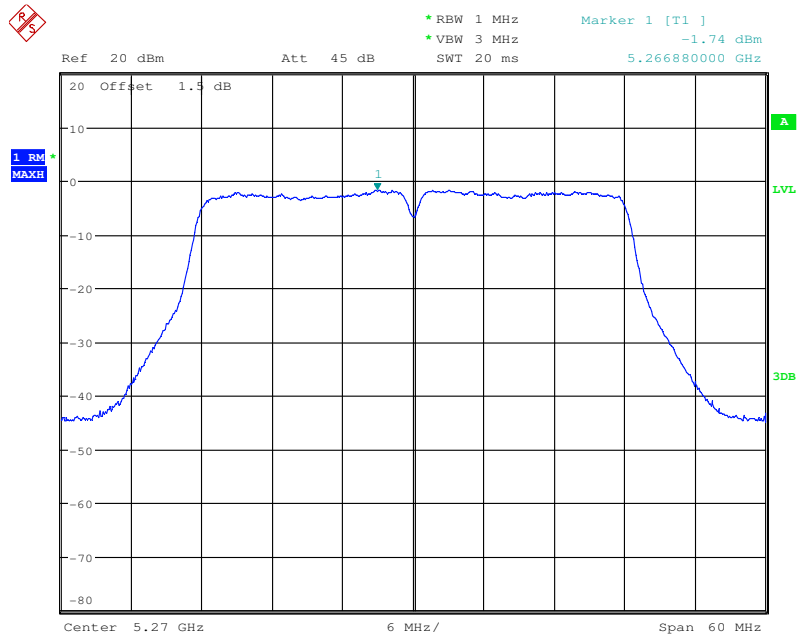

Test mode:	802.11n(HT40)	Frequency(MHz):	5310
------------	---------------	-----------------	------

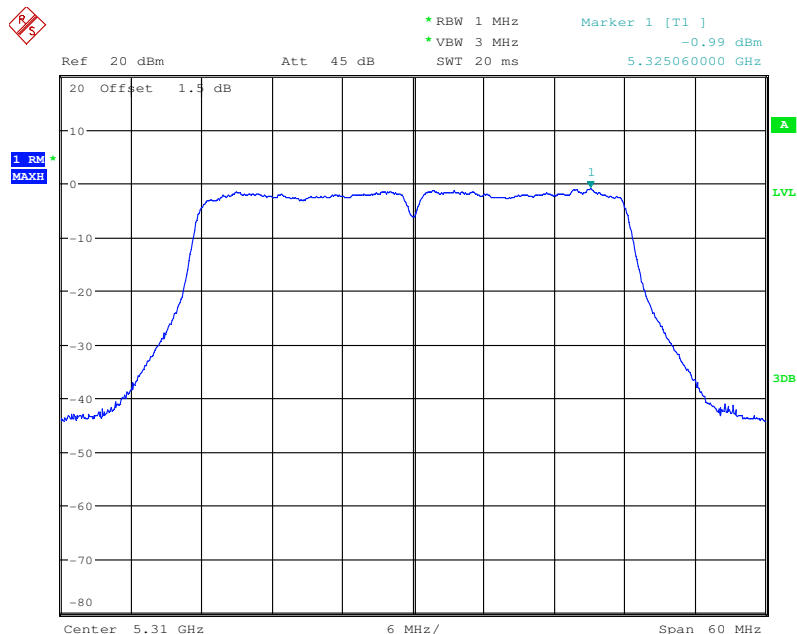




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 115 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5510
------------	---------------	-----------------	------

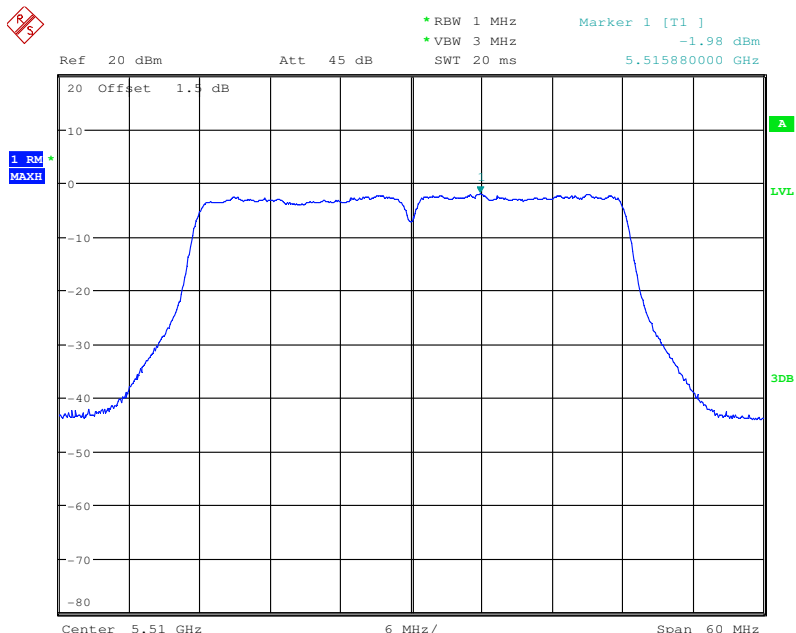

Test mode:	802.11n(HT40)	Frequency(MHz):	5550
------------	---------------	-----------------	------

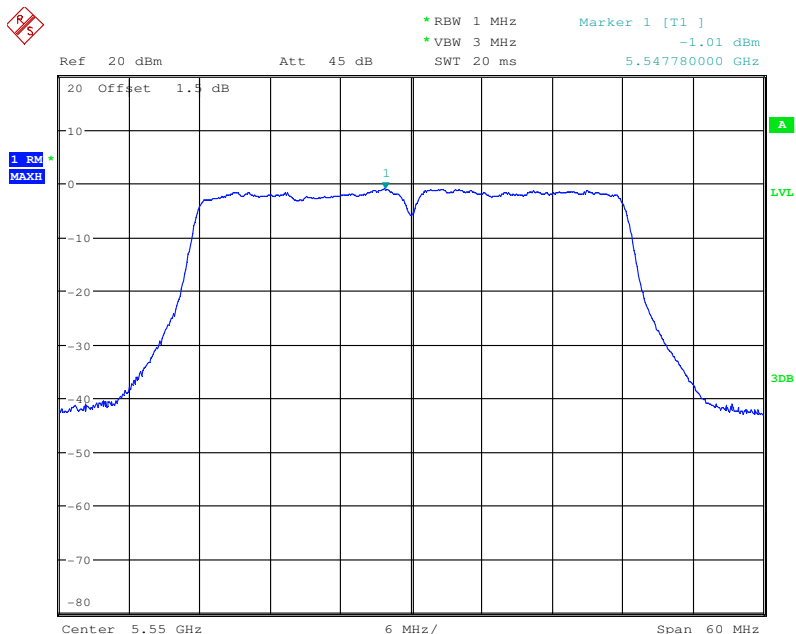




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 116 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5670
------------	---------------	-----------------	------

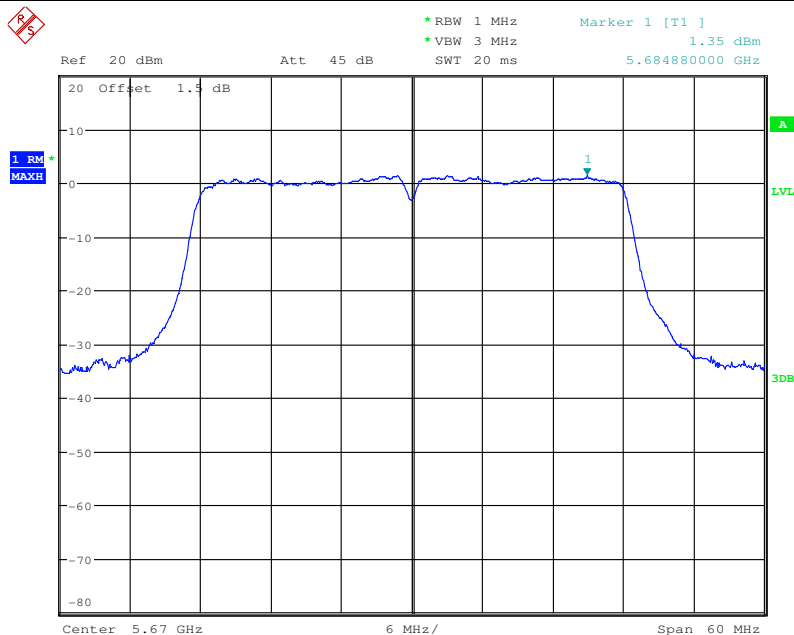

Test mode:	802.11n(HT40)	Frequency(MHz):	5755
------------	---------------	-----------------	------

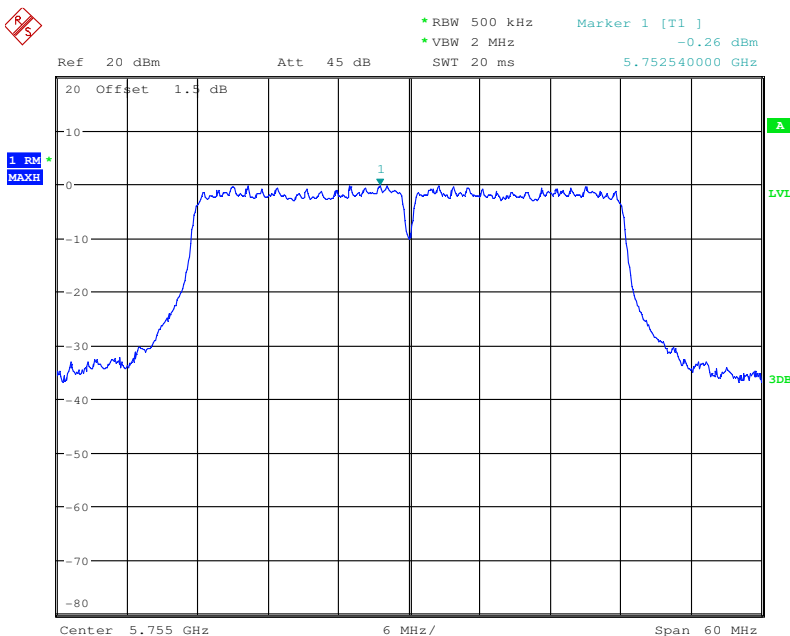




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 117 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5795
------------	---------------	-----------------	------

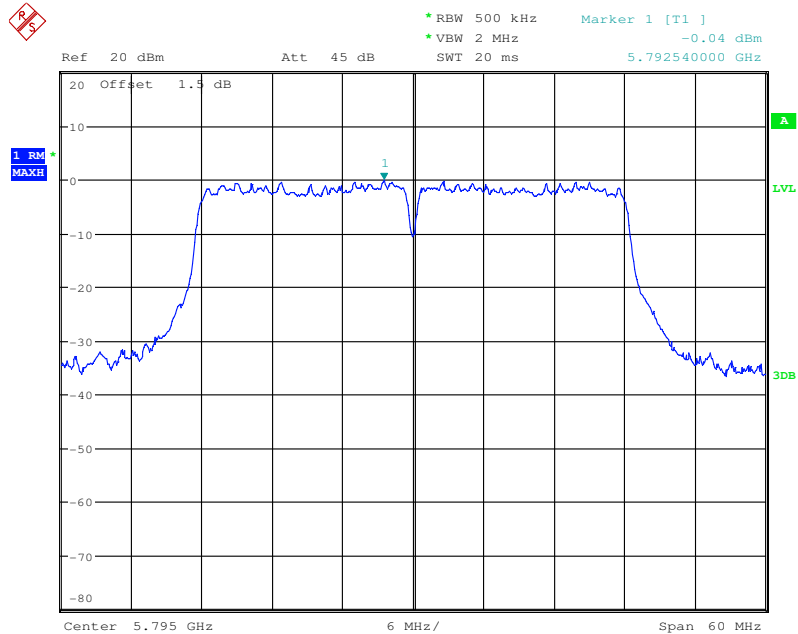

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190
------------	----------------	-----------------	------

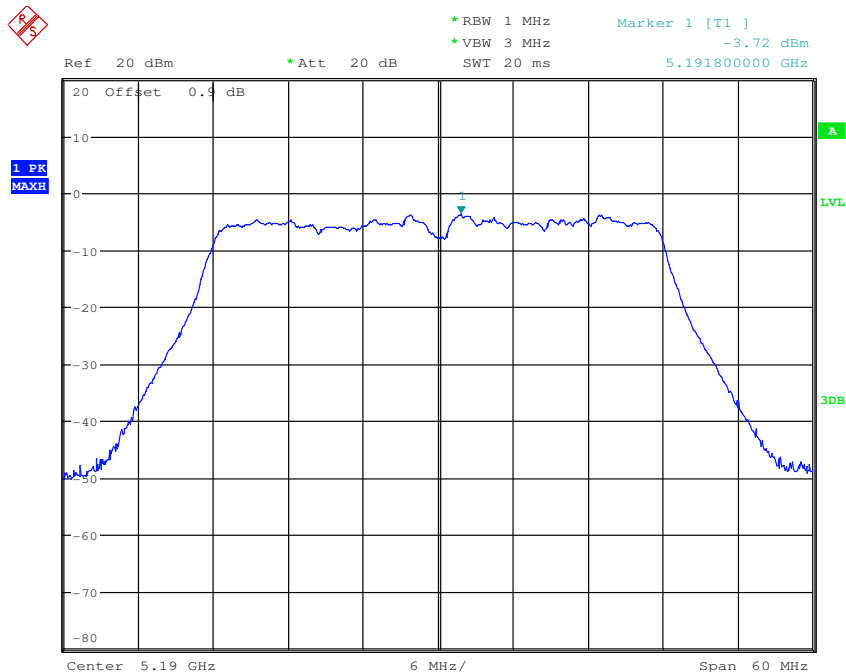





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 118 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230
------------	----------------	-----------------	------

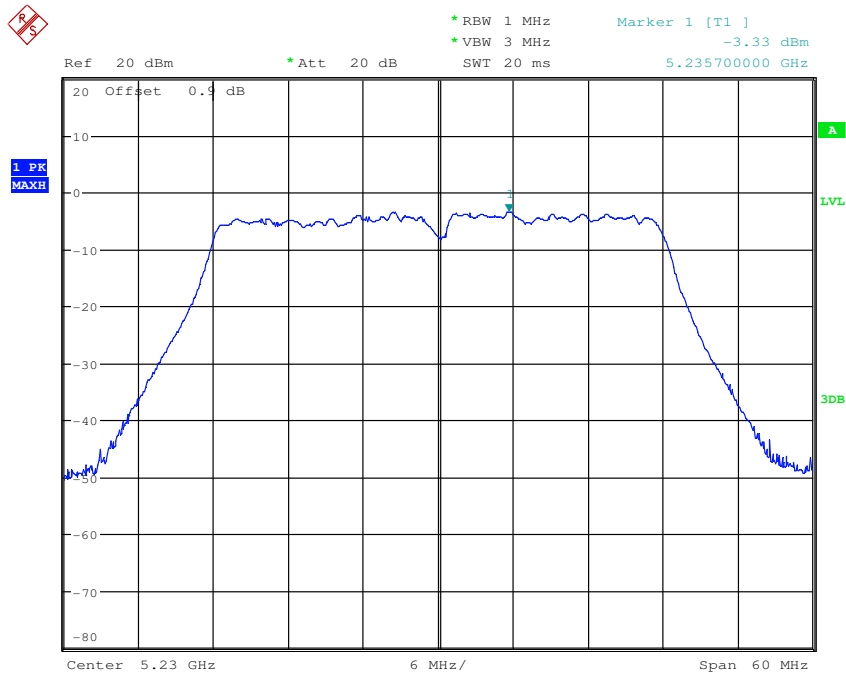

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270
------------	----------------	-----------------	------

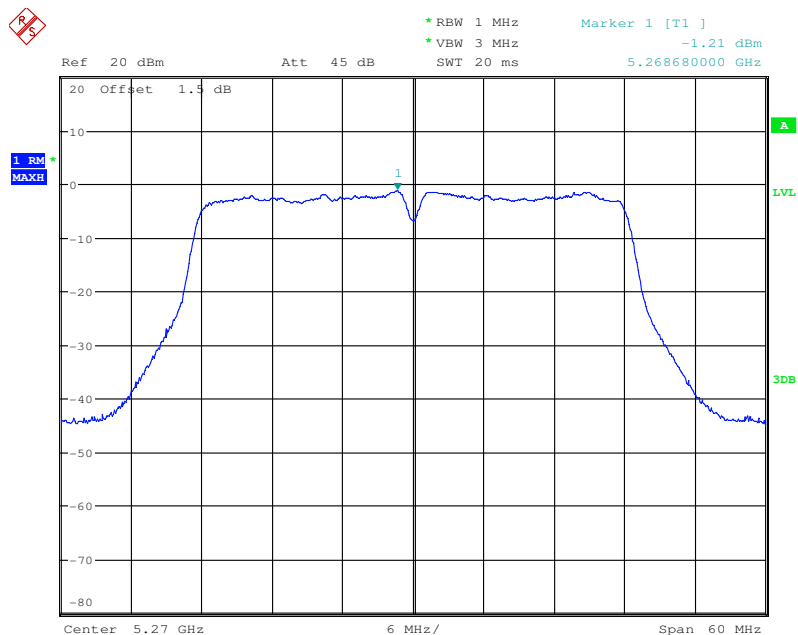





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 119 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310
------------	----------------	-----------------	------

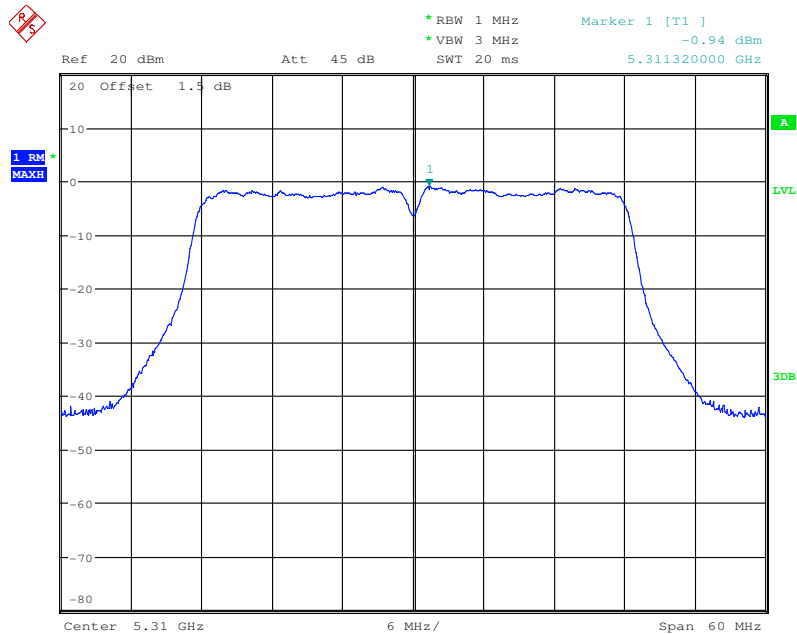

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510
------------	----------------	-----------------	------

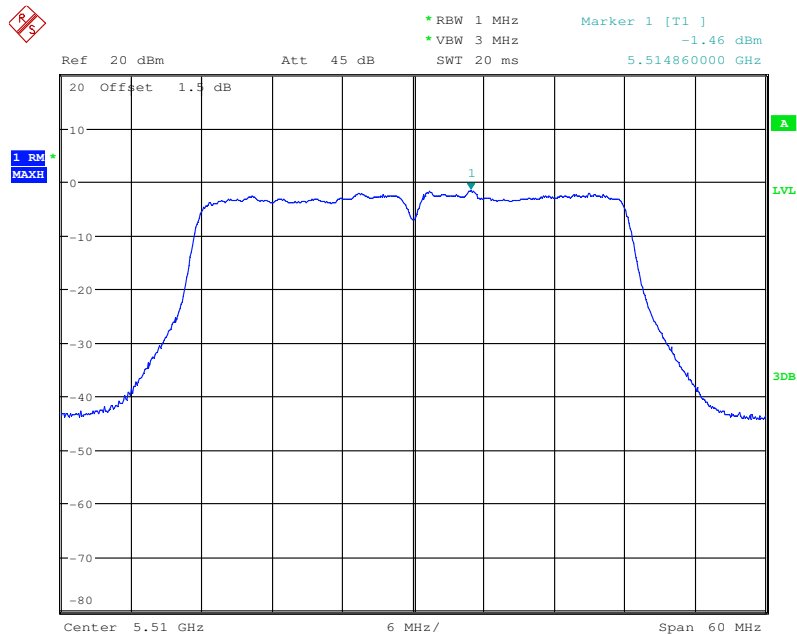





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 120 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5550
------------	----------------	-----------------	------

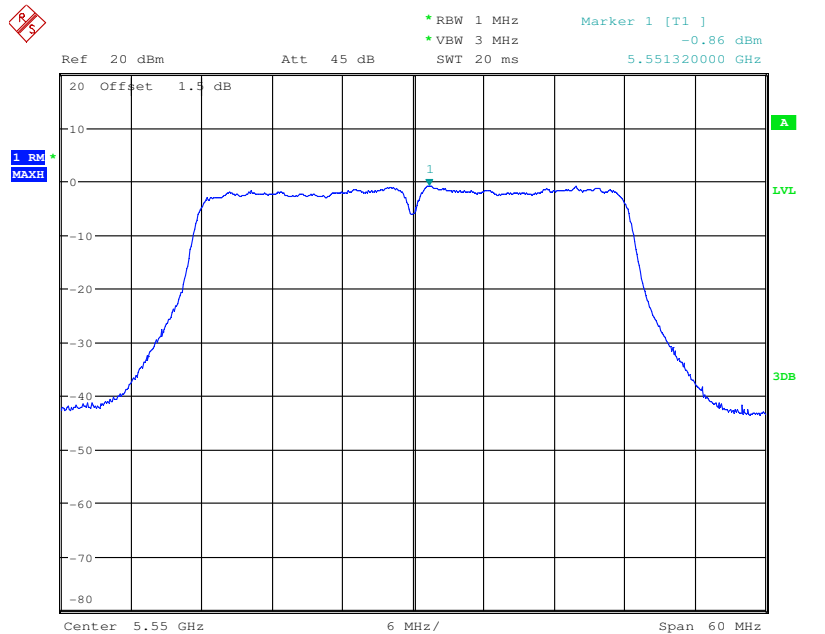

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670
------------	----------------	-----------------	------

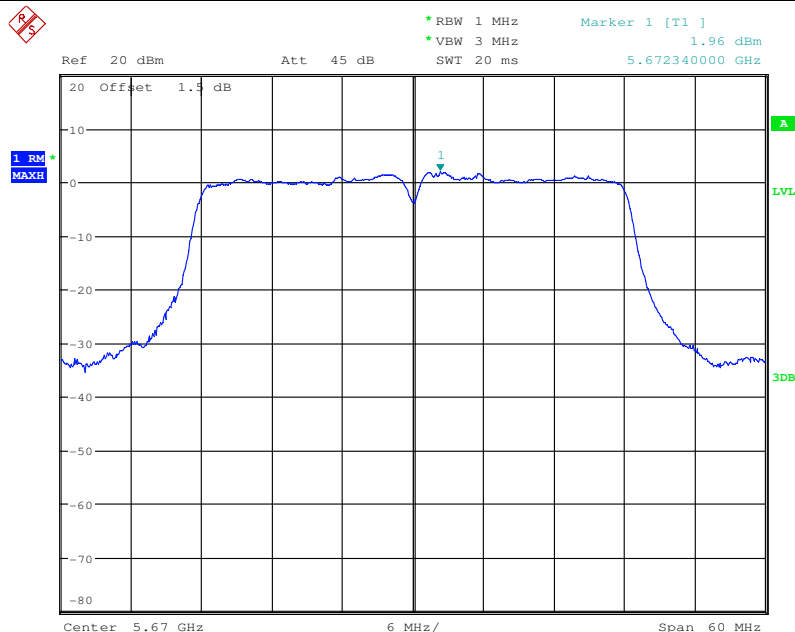





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 121 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755
------------	----------------	-----------------	------

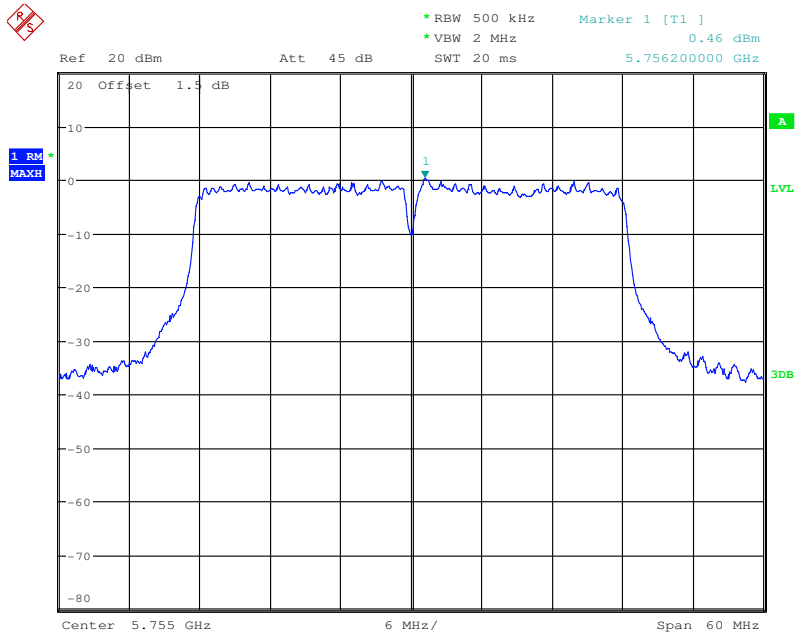

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795
------------	----------------	-----------------	------

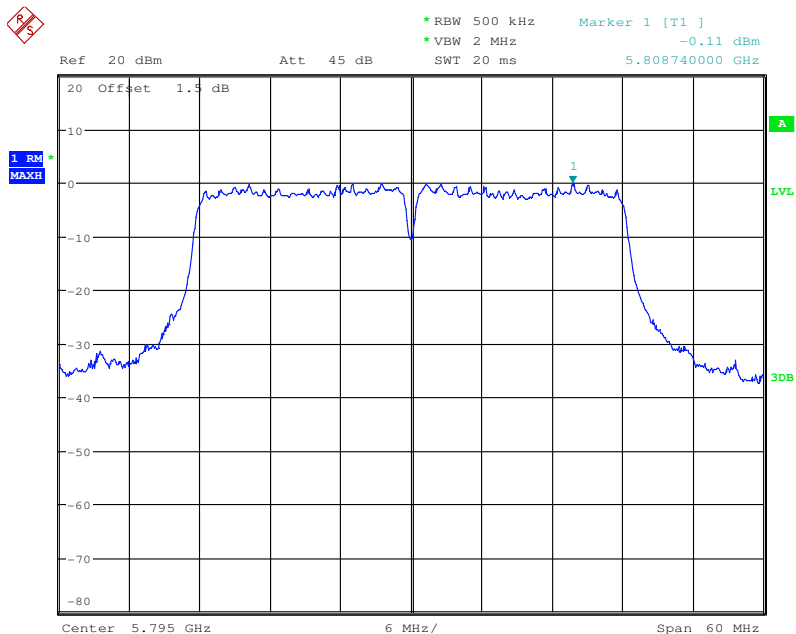




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 122 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210
------------	----------------	-----------------	------

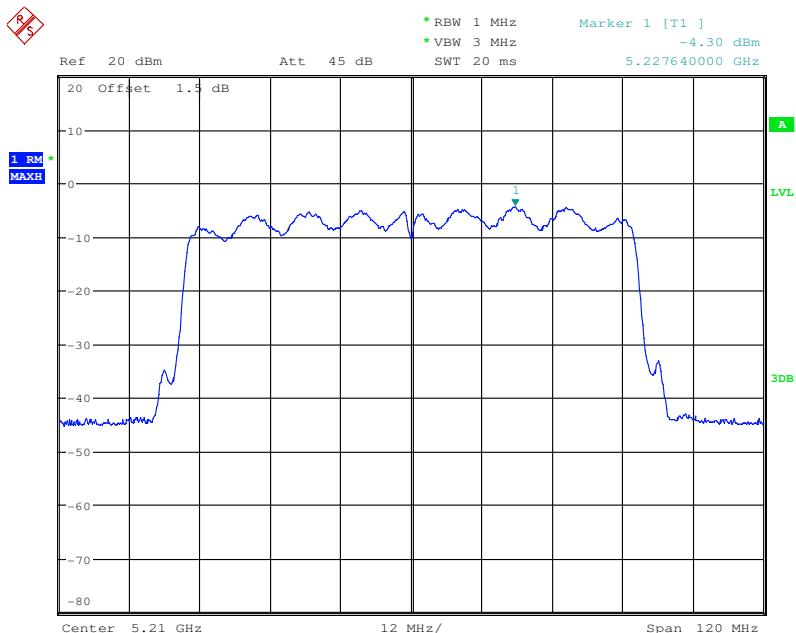

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290
------------	----------------	-----------------	------

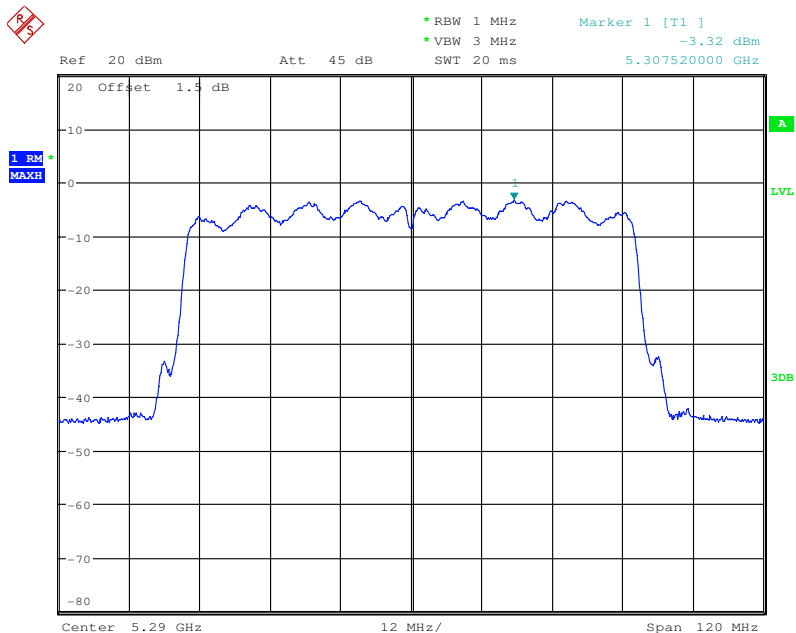




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 123 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530
------------	----------------	-----------------	------

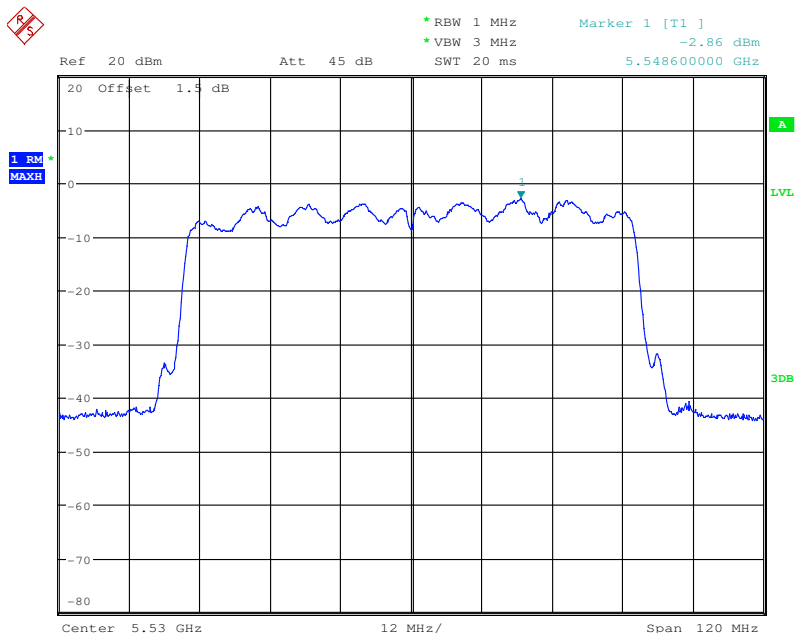

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775
------------	----------------	-----------------	------

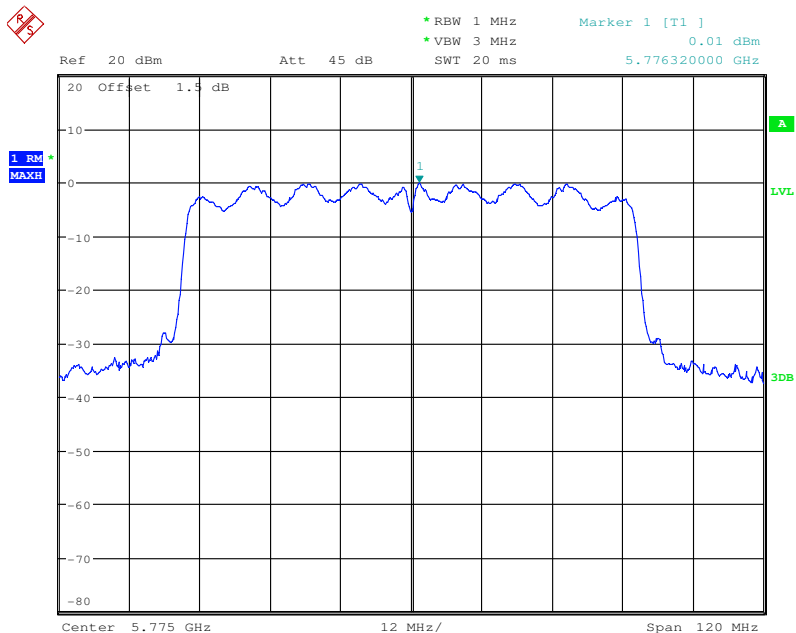




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803


Page: 124 of 283

Ant b:

Test mode:	802.11a	Frequency(MHz):	5180
------------	---------	-----------------	------

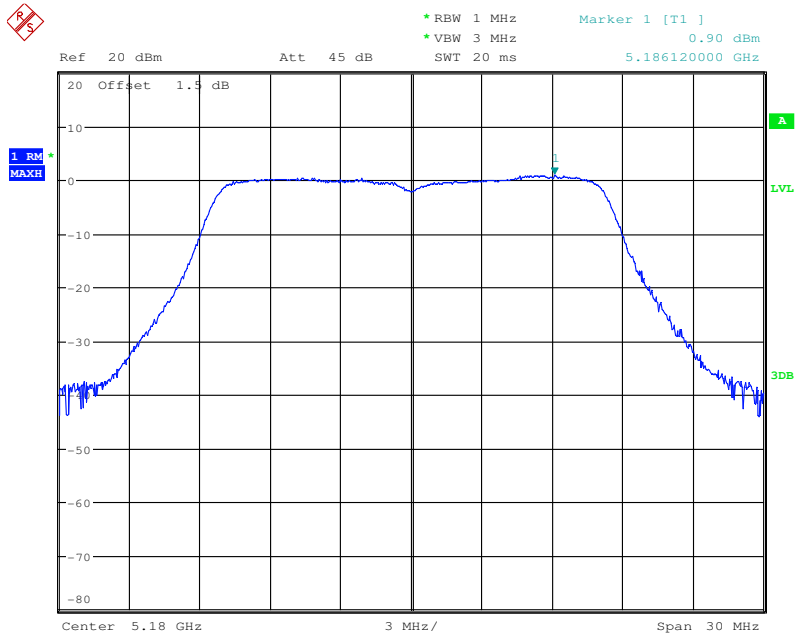

Test mode:	802.11a	Frequency(MHz):	5200
------------	---------	-----------------	------

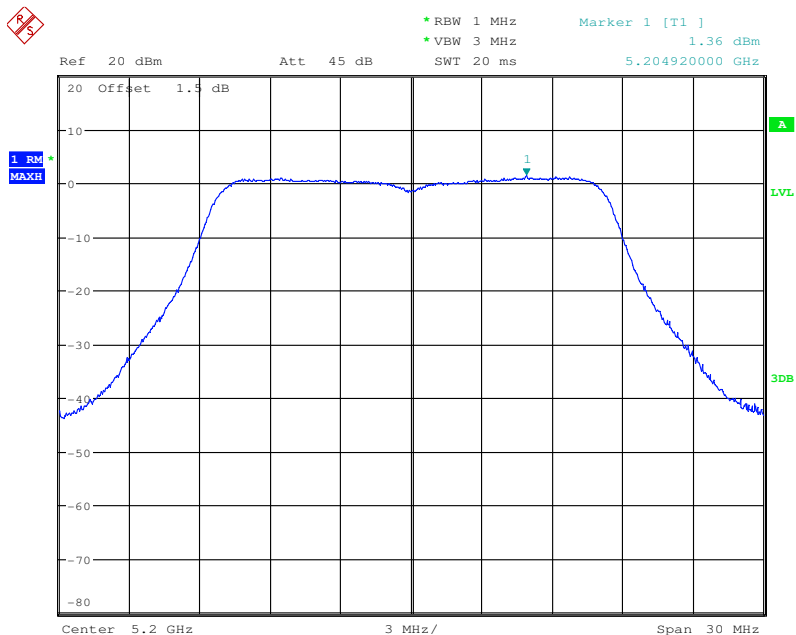




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 125 of 283

Test mode:	802.11a	Frequency(MHz):	5240
------------	---------	-----------------	------

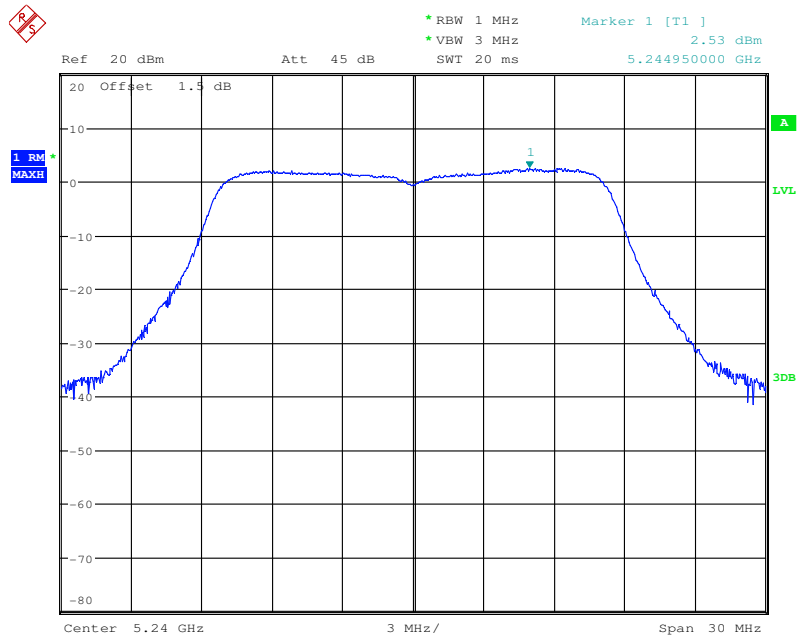

Test mode:	802.11a	Frequency(MHz):	5260
------------	---------	-----------------	------

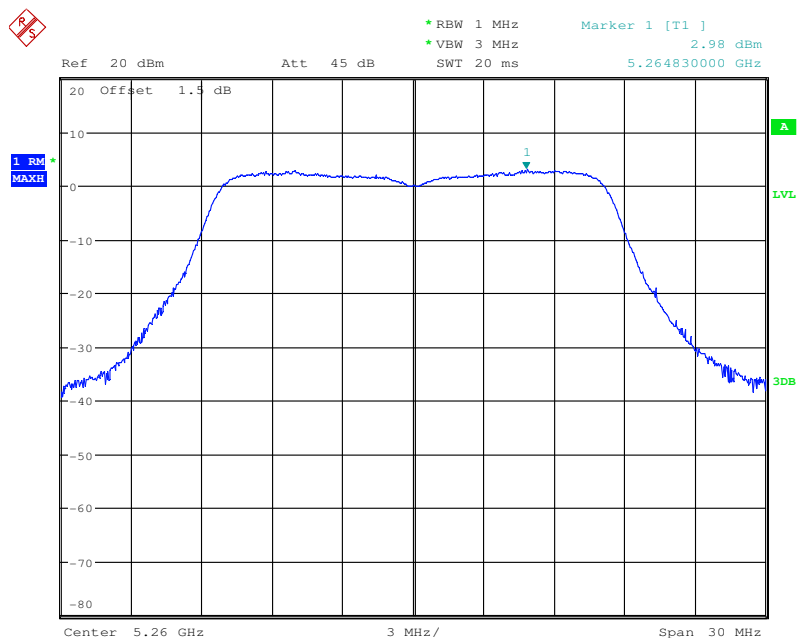




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 126 of 283

Test mode:	802.11a	Frequency(MHz):	5300
------------	---------	-----------------	------

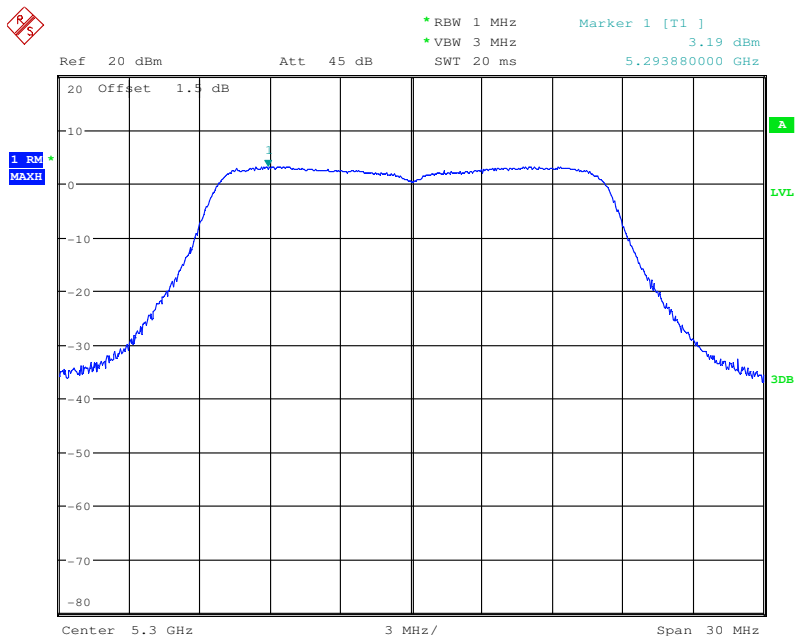

Test mode:	802.11a	Frequency(MHz):	5320
------------	---------	-----------------	------

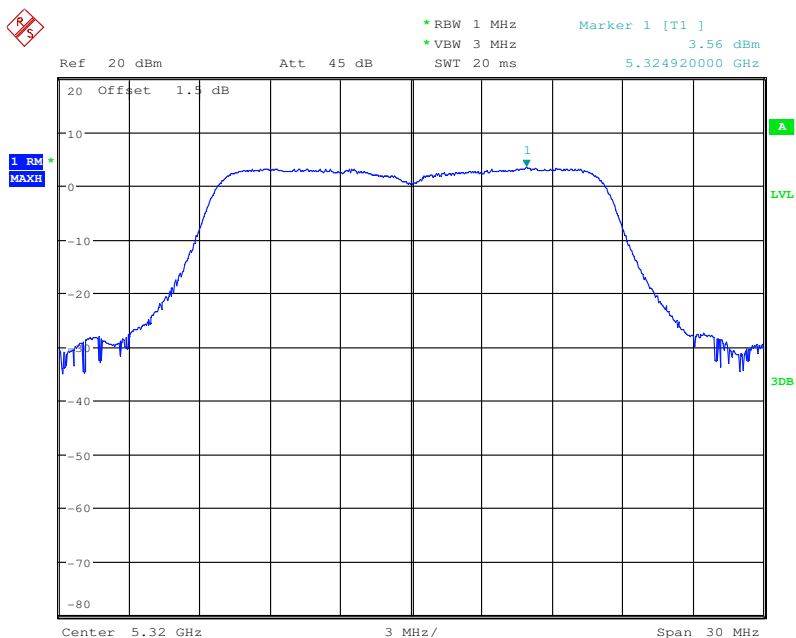




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 127 of 283

Test mode:	802.11a	Frequency(MHz):	5500
------------	---------	-----------------	------

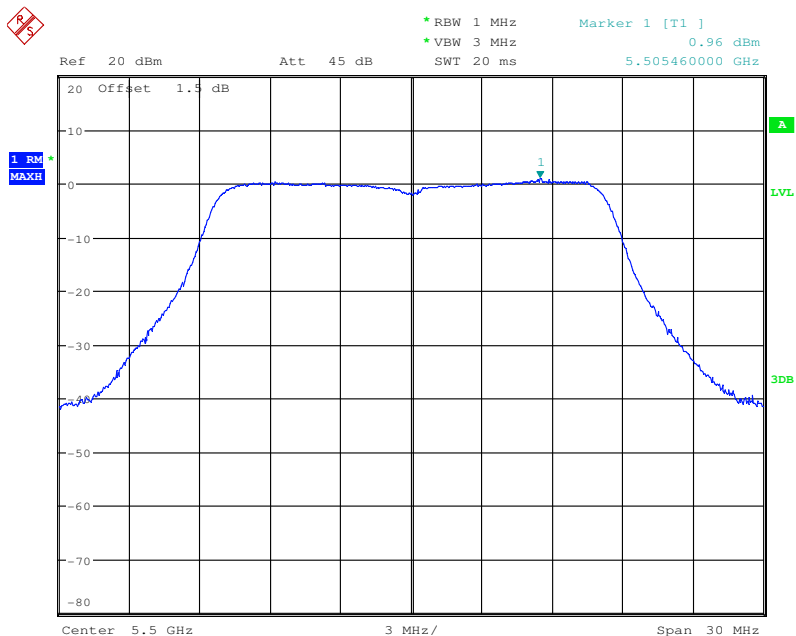

Test mode:	802.11a	Frequency(MHz):	5580
------------	---------	-----------------	------

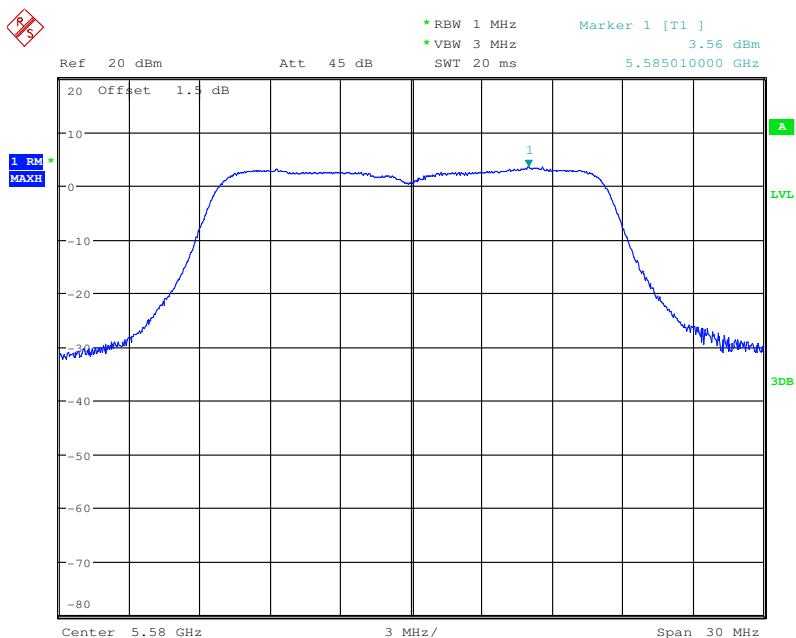




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 128 of 283

Test mode:	802.11a	Frequency(MHz):	5700
------------	---------	-----------------	------

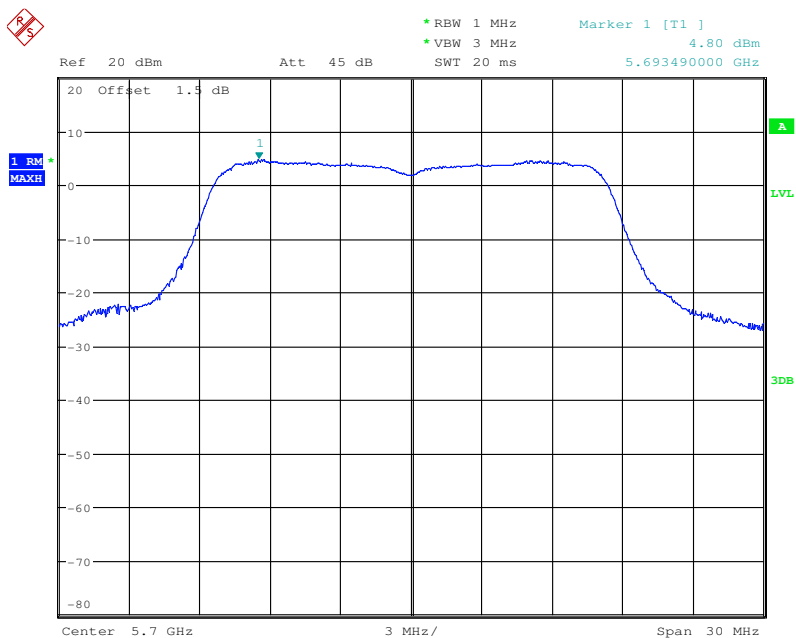

Test mode:	802.11a	Frequency(MHz):	5745
------------	---------	-----------------	------

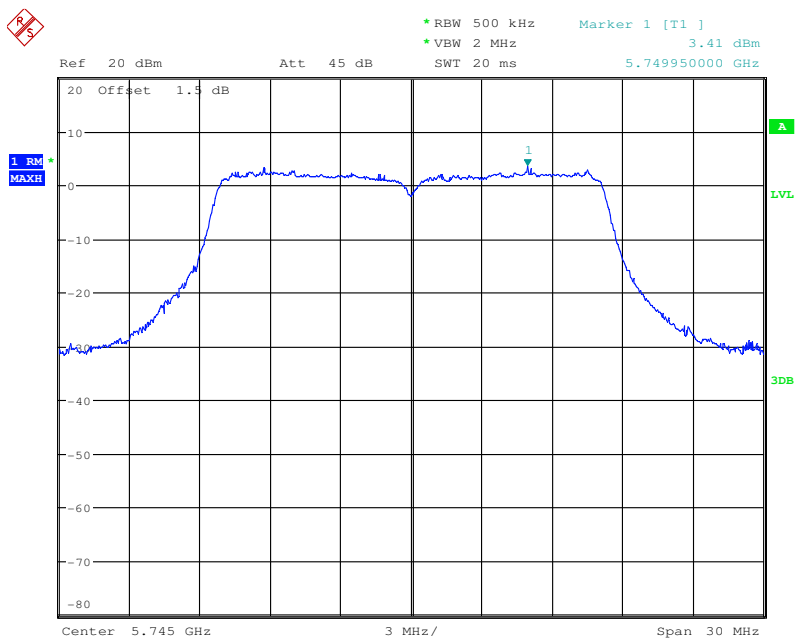





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 129 of 283

Test mode:	802.11a	Frequency(MHz):	5785
------------	---------	-----------------	------

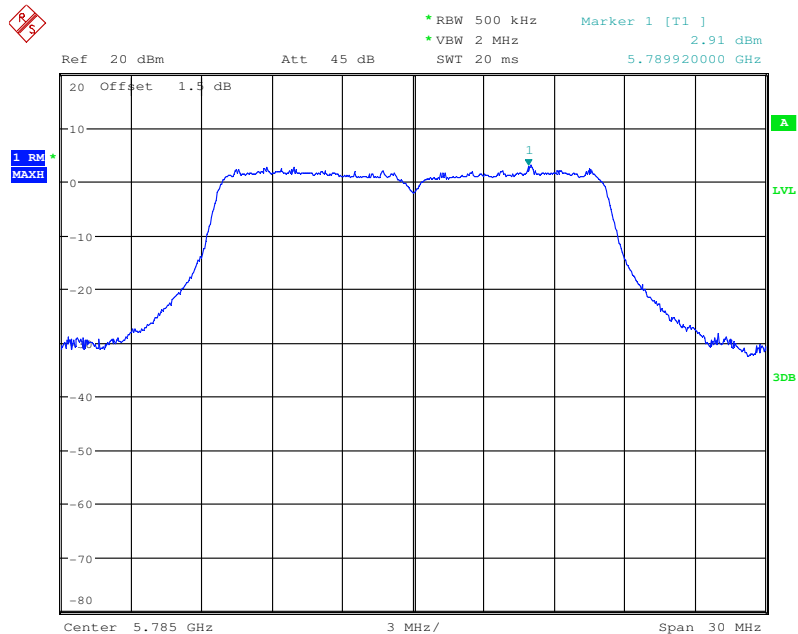

Test mode:	802.11a	Frequency(MHz):	5825
------------	---------	-----------------	------

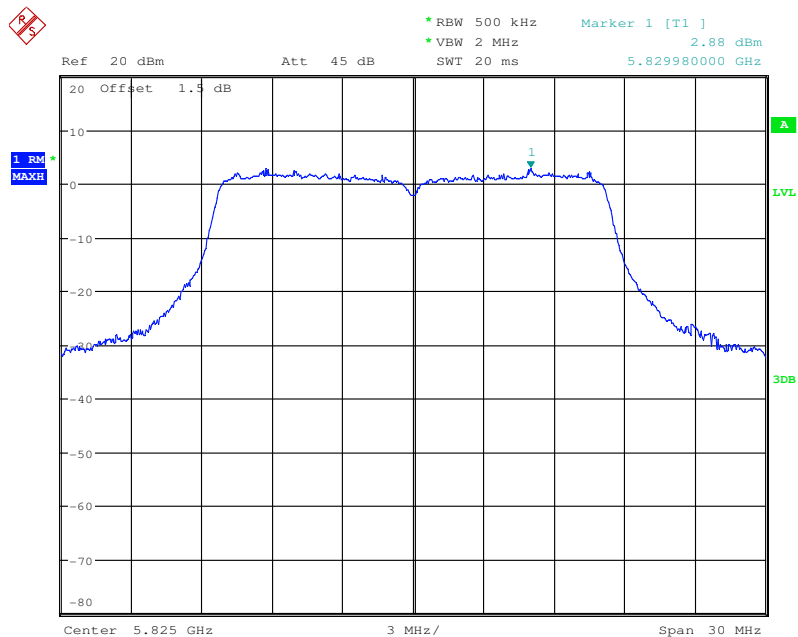





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 130 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5180
------------	---------------	-----------------	------

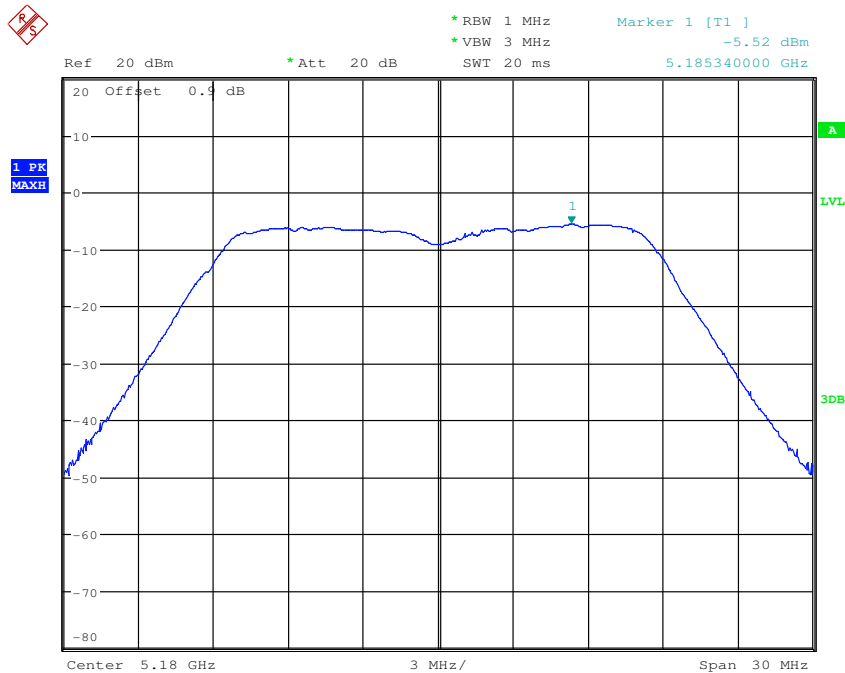

Test mode:	802.11n(HT20)	Frequency(MHz):	5200
------------	---------------	-----------------	------

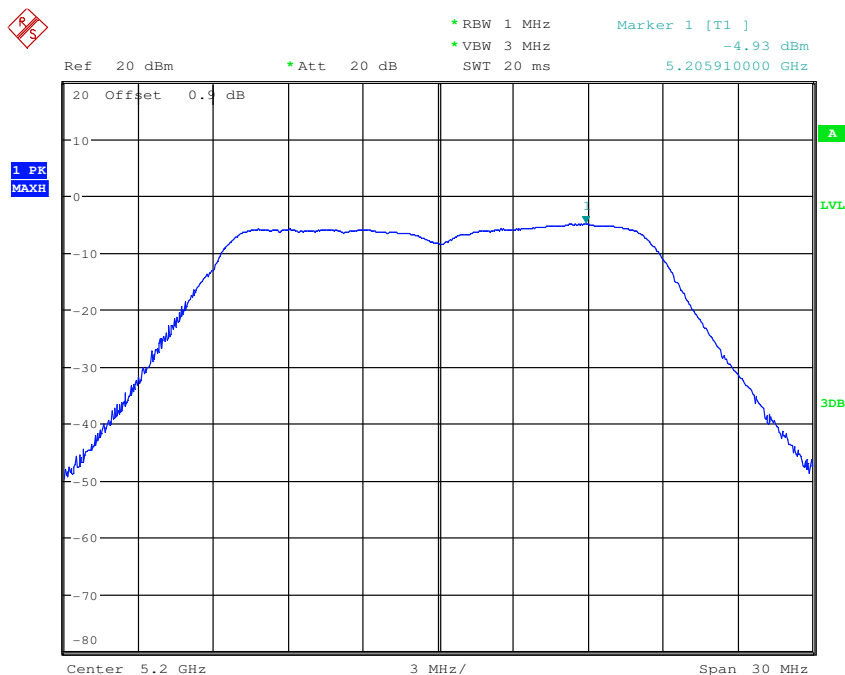




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 131 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5240
------------	---------------	-----------------	------

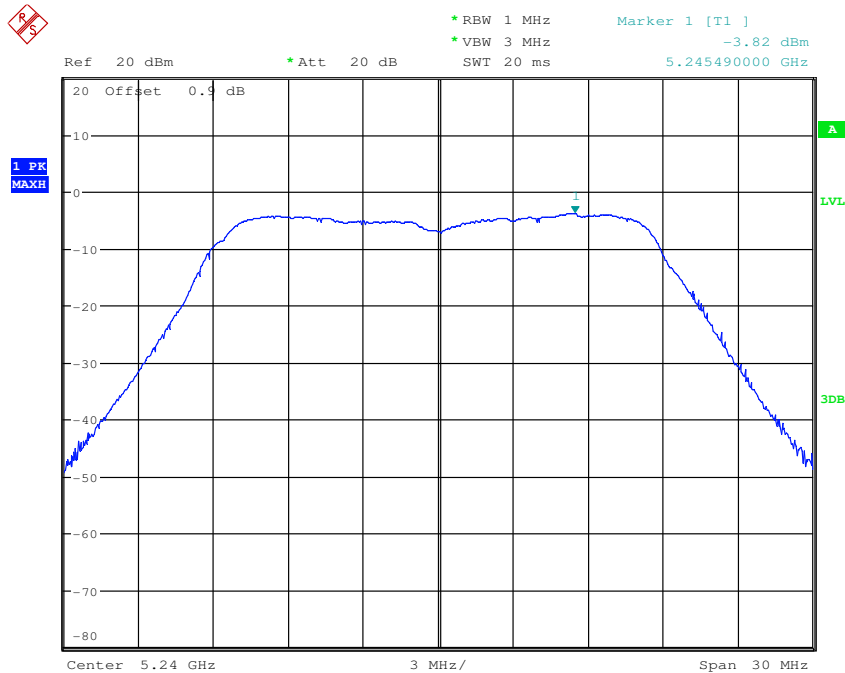

Test mode:	802.11n(HT20)	Frequency(MHz):	5260
------------	---------------	-----------------	------

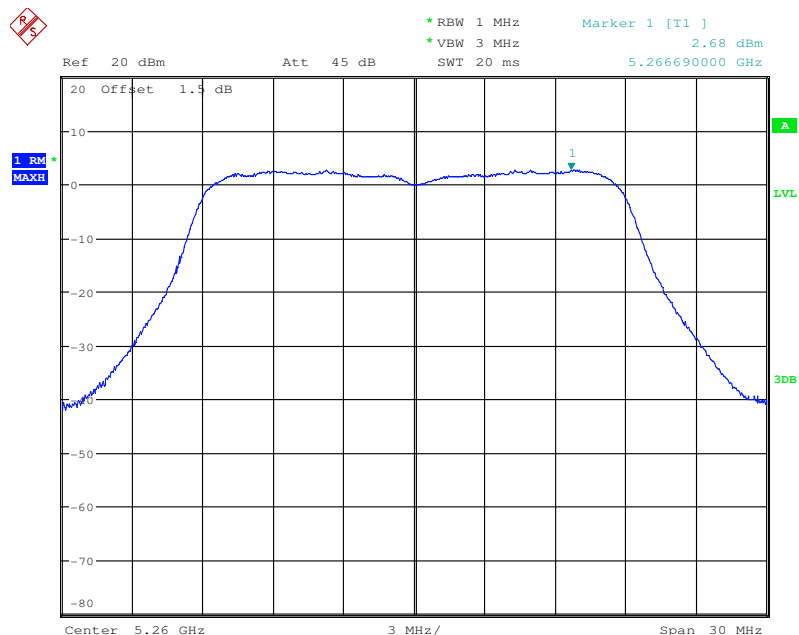





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 132 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5300
------------	---------------	-----------------	------

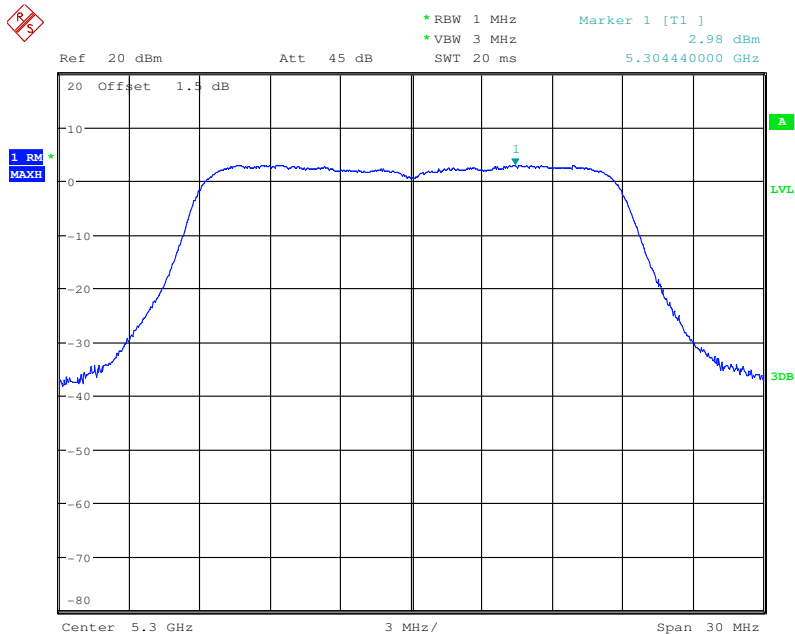

Test mode:	802.11n(HT20)	Frequency(MHz):	5320
------------	---------------	-----------------	------

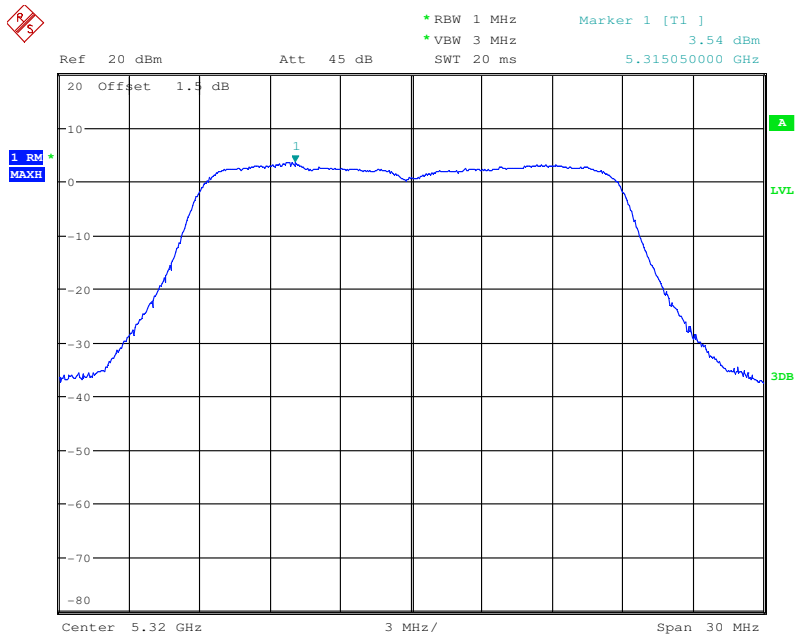





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 133 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5500
------------	---------------	-----------------	------

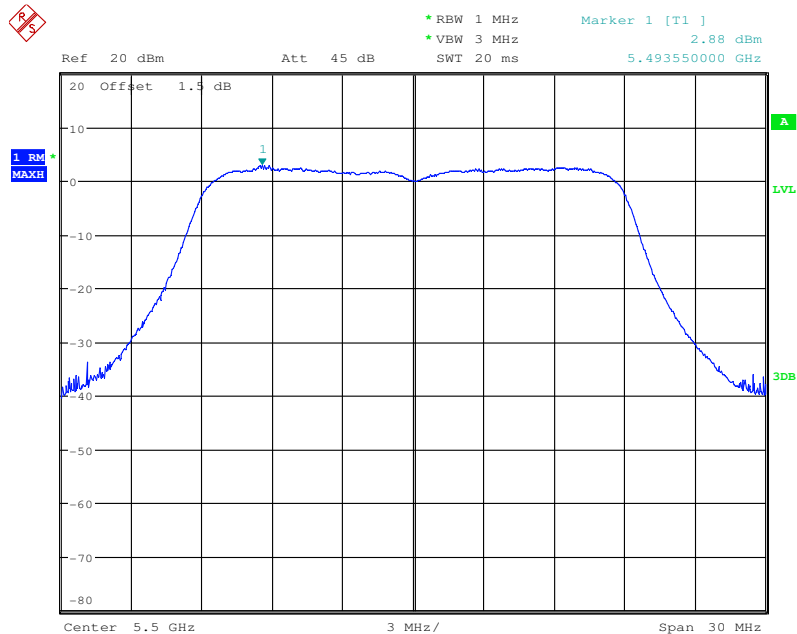

Test mode:	802.11n(HT20)	Frequency(MHz):	5580
------------	---------------	-----------------	------

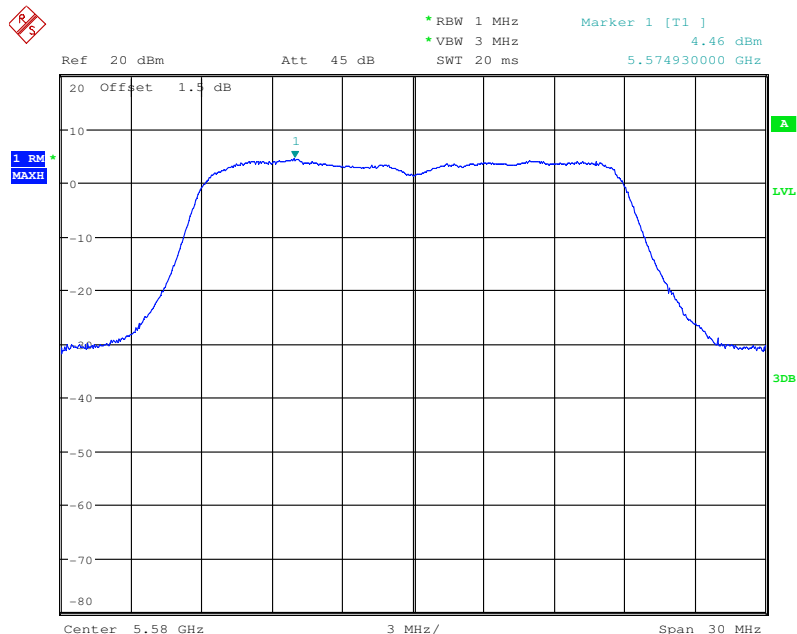





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 134 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5700
------------	---------------	-----------------	------

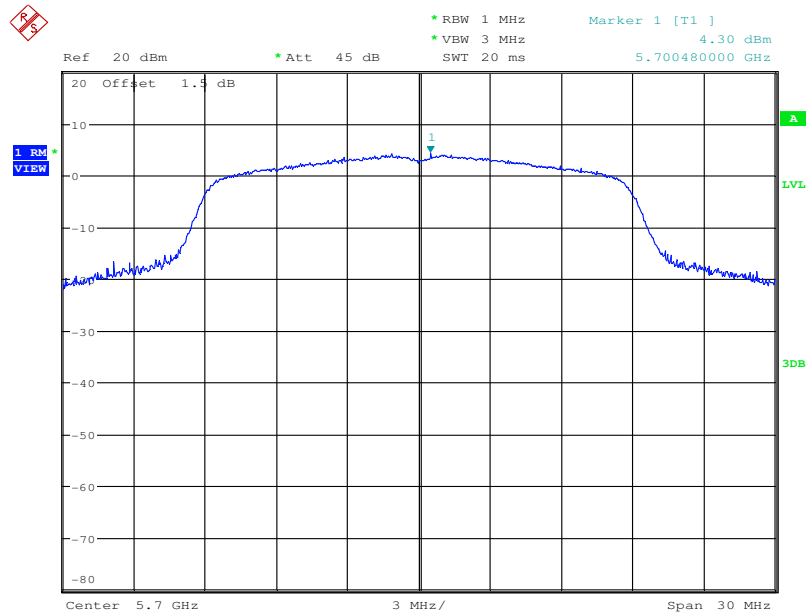

Test mode:	802.11n(HT20)	Frequency(MHz):	5745
------------	---------------	-----------------	------

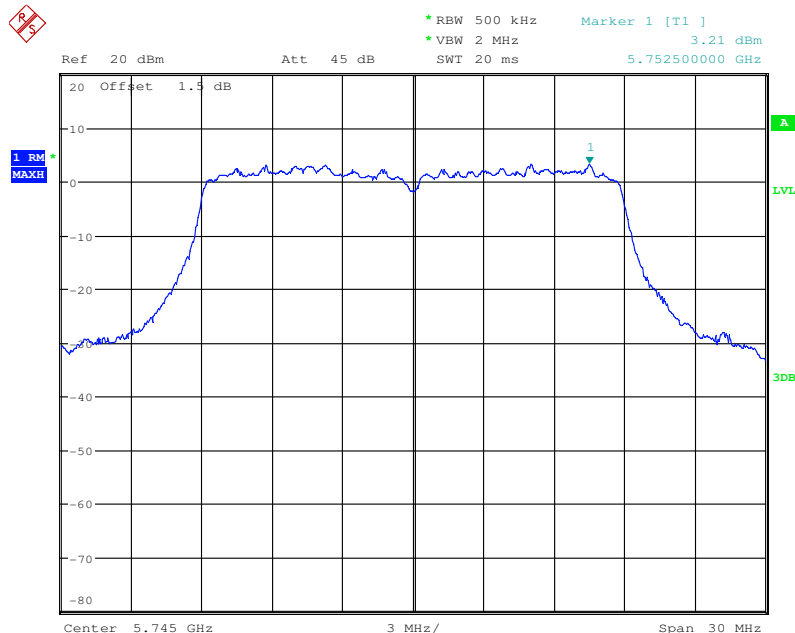




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 135 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5785
------------	---------------	-----------------	------

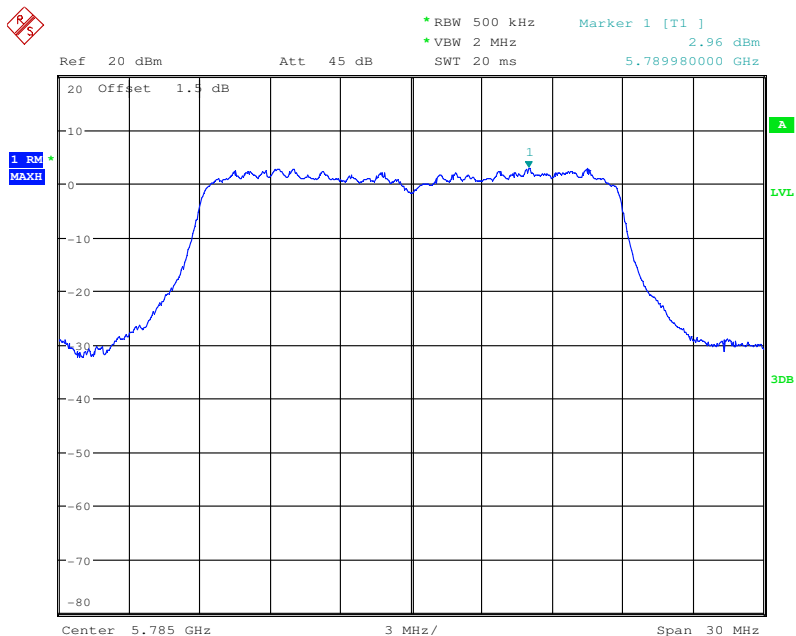

Test mode:	802.11n(HT20)	Frequency(MHz):	5825
------------	---------------	-----------------	------

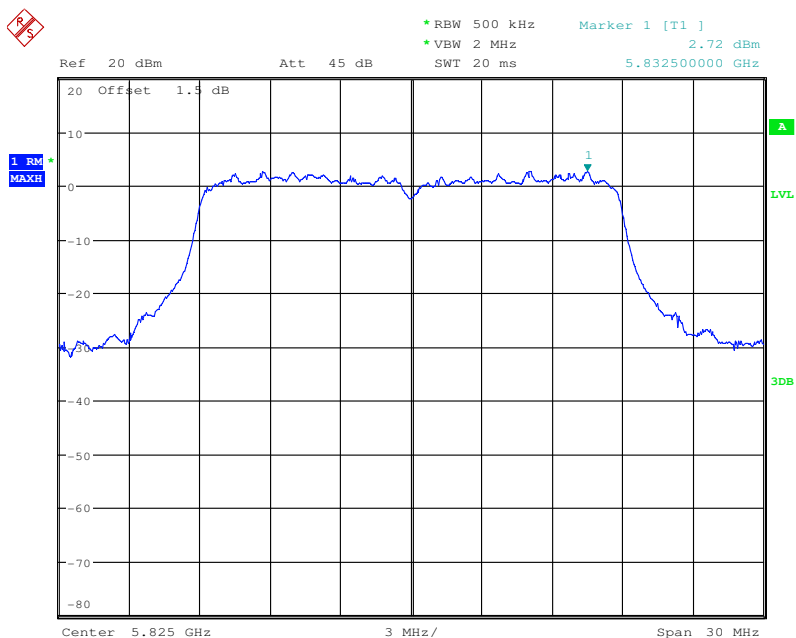




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 136 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180
------------	----------------	-----------------	------

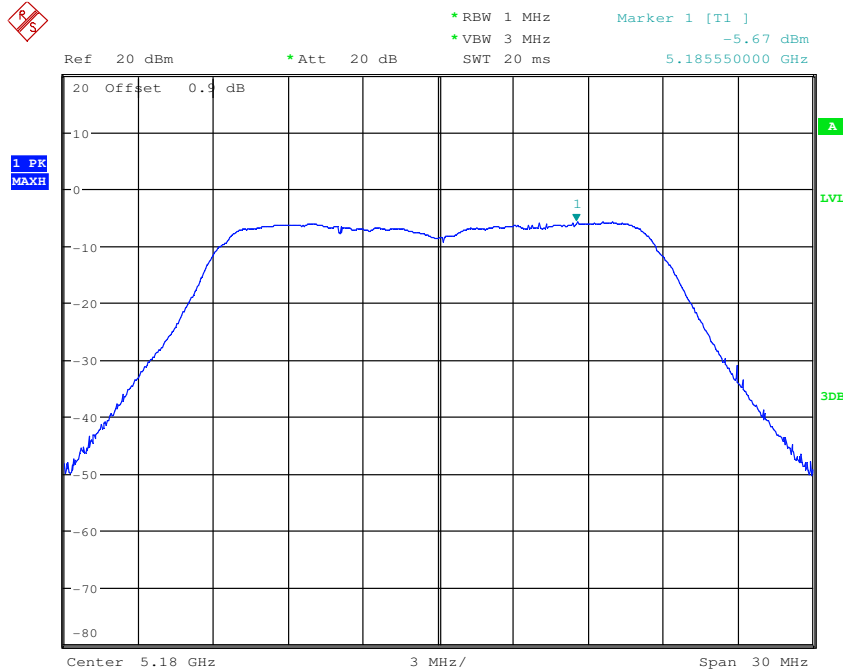

Test mode:	802.11ac(HT20)	Frequency(MHz):	5200
------------	----------------	-----------------	------

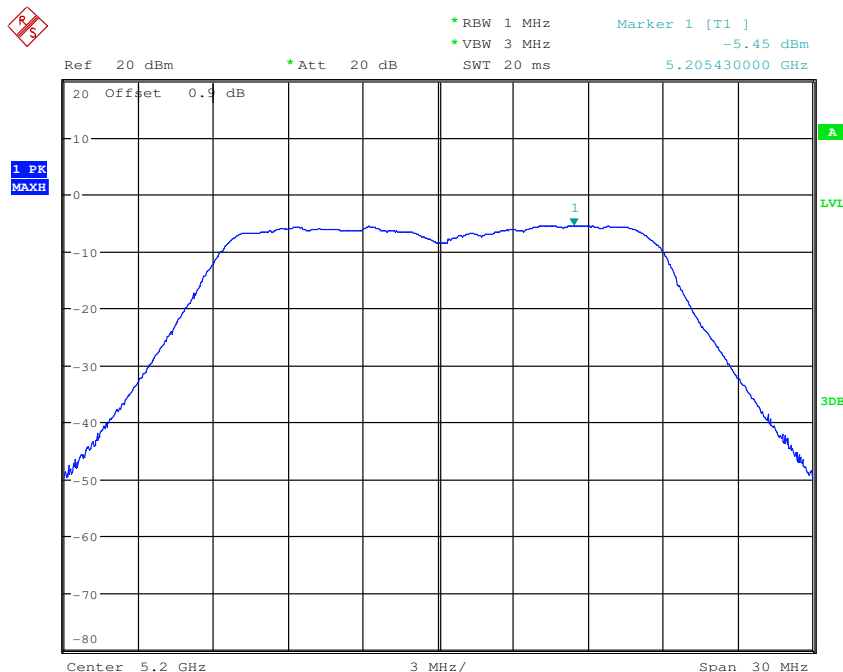




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 137 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240
------------	----------------	-----------------	------

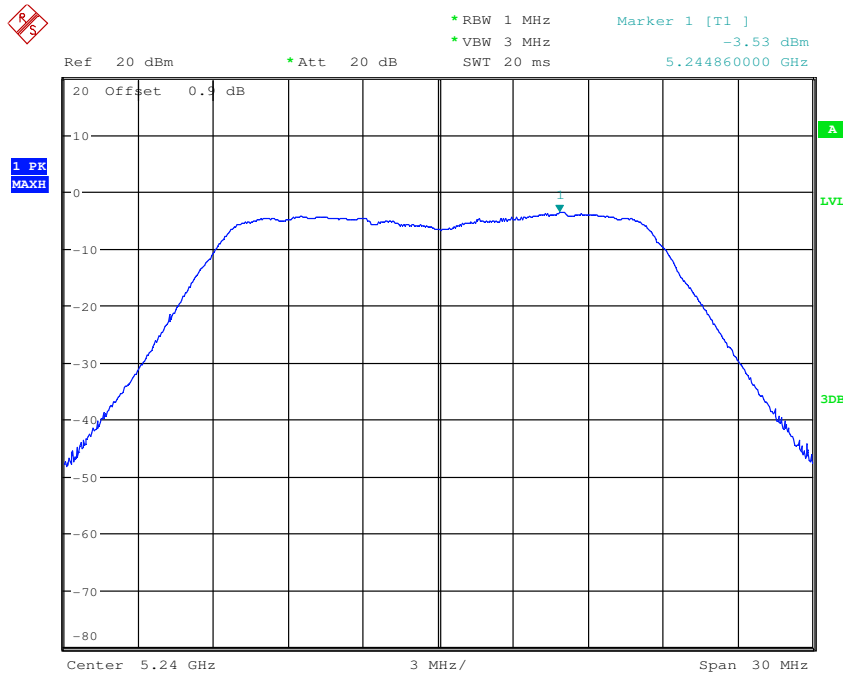

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260
------------	----------------	-----------------	------

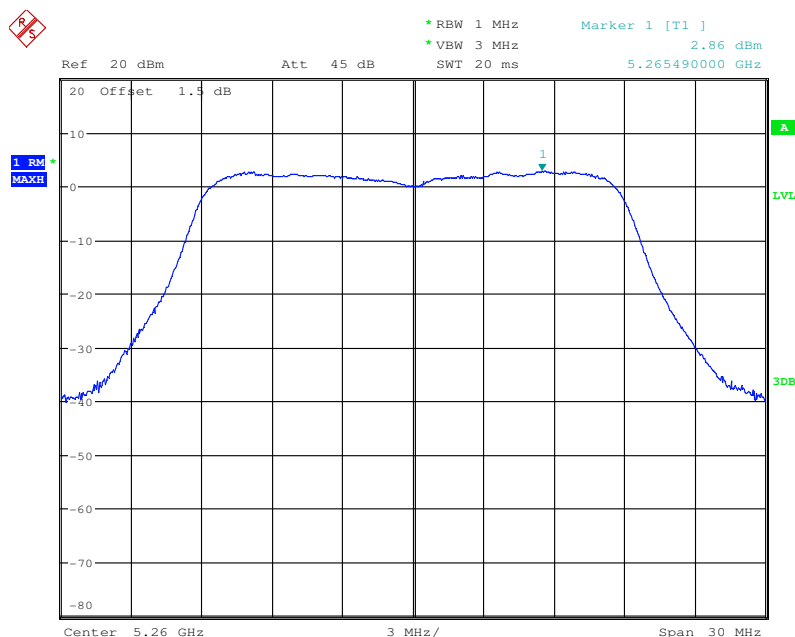




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 138 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5300
------------	----------------	-----------------	------

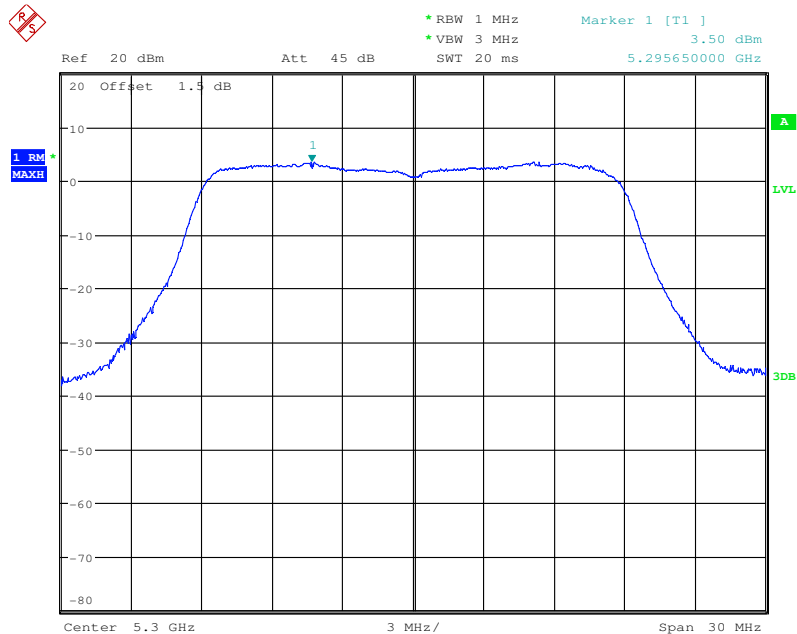

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320
------------	----------------	-----------------	------

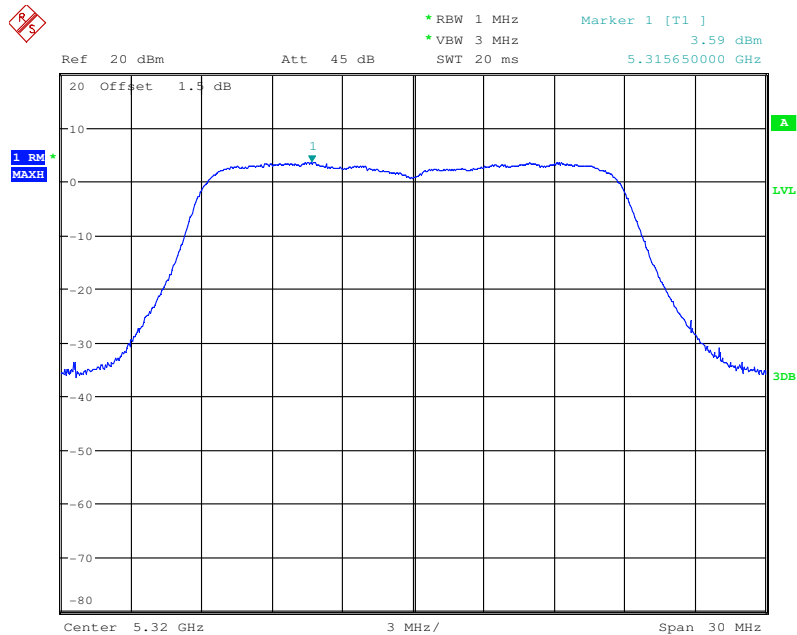




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 139 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500
------------	----------------	-----------------	------

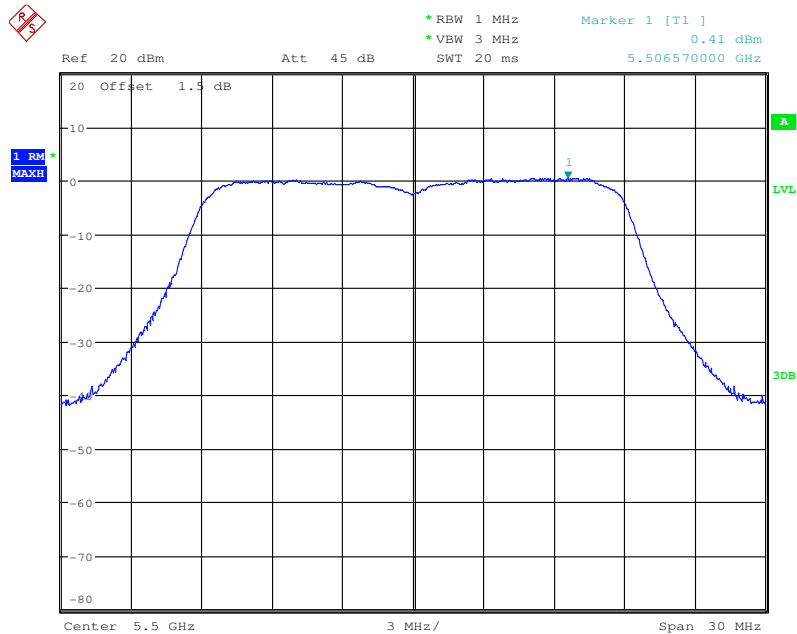

Test mode:	802.11ac(HT20)	Frequency(MHz):	5580
------------	----------------	-----------------	------

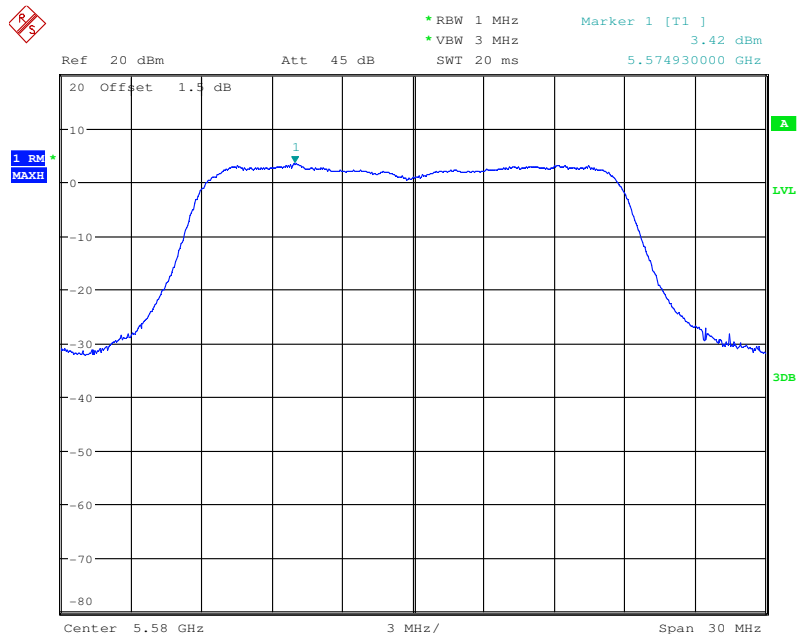




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 140 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700
------------	----------------	-----------------	------

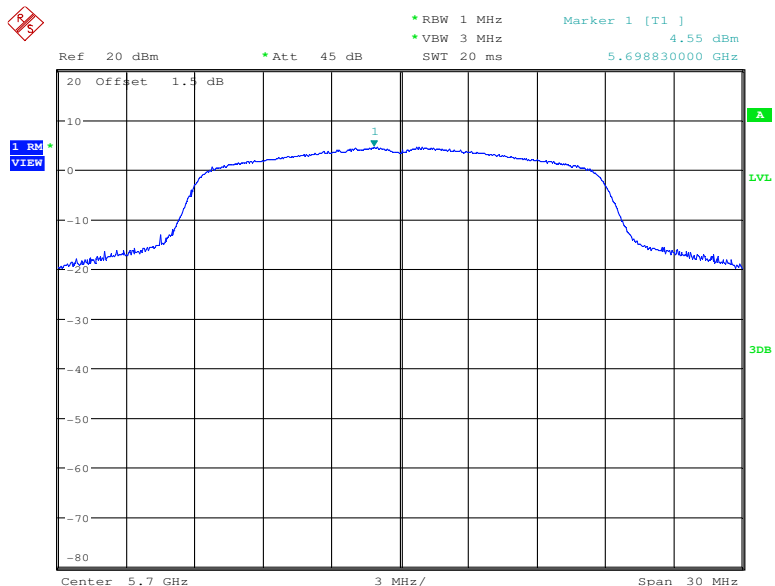

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745
------------	----------------	-----------------	------

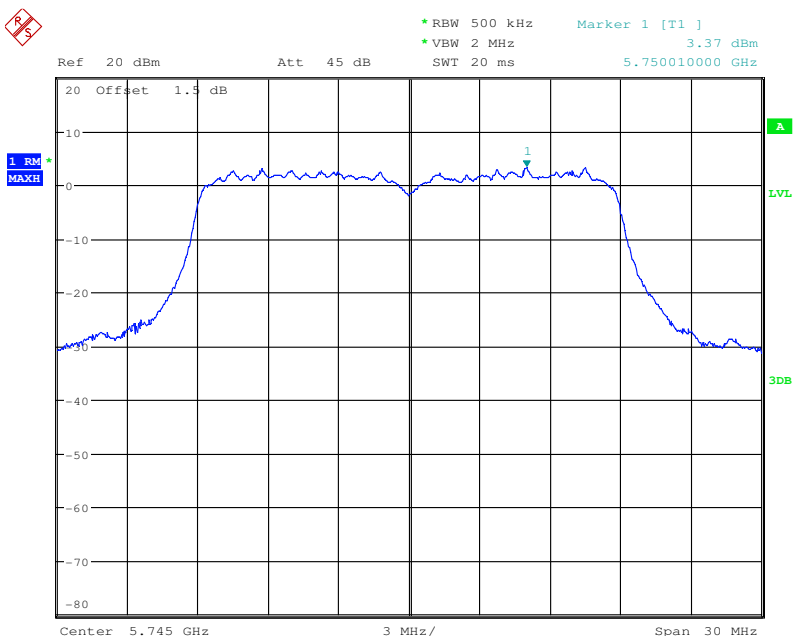





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 141 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785
------------	----------------	-----------------	------

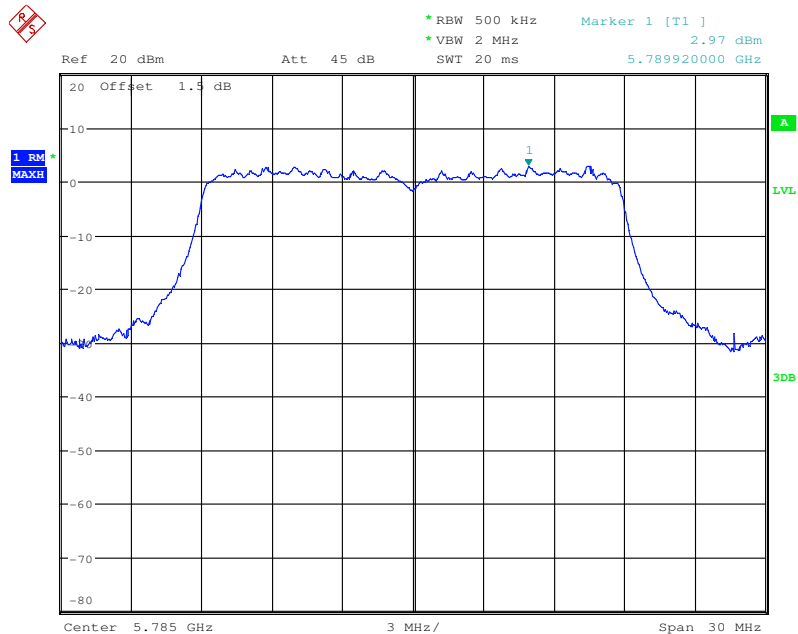

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825
------------	----------------	-----------------	------

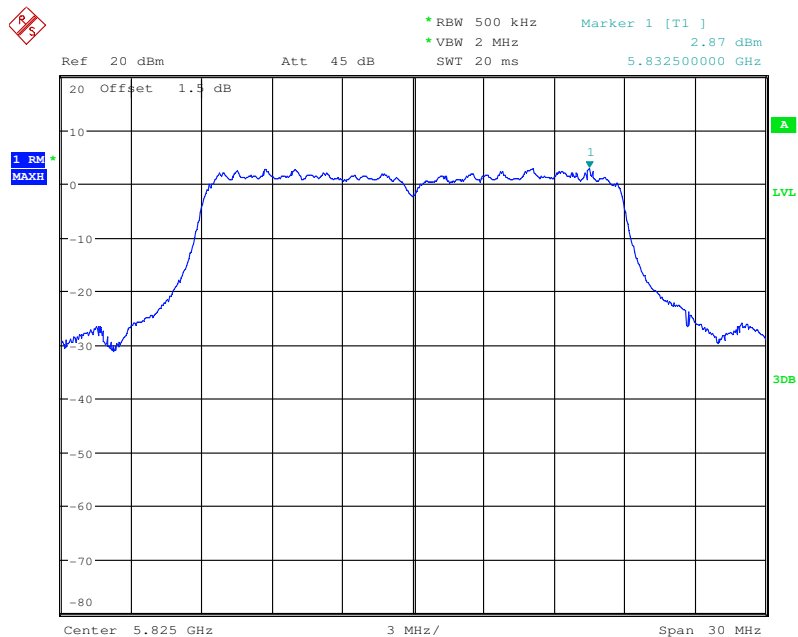




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 142 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5190
------------	---------------	-----------------	------

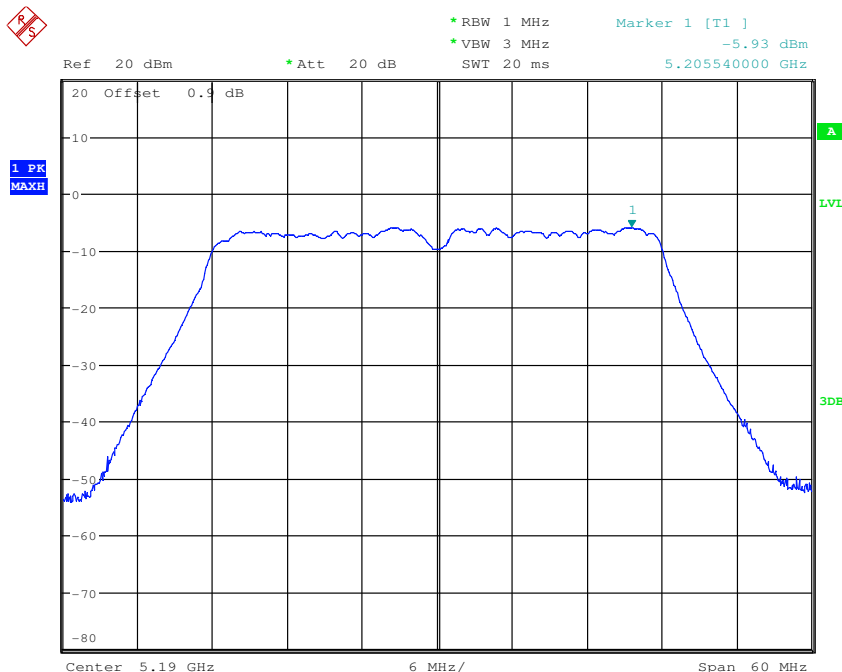

Test mode:	802.11n(HT40)	Frequency(MHz):	5230
------------	---------------	-----------------	------

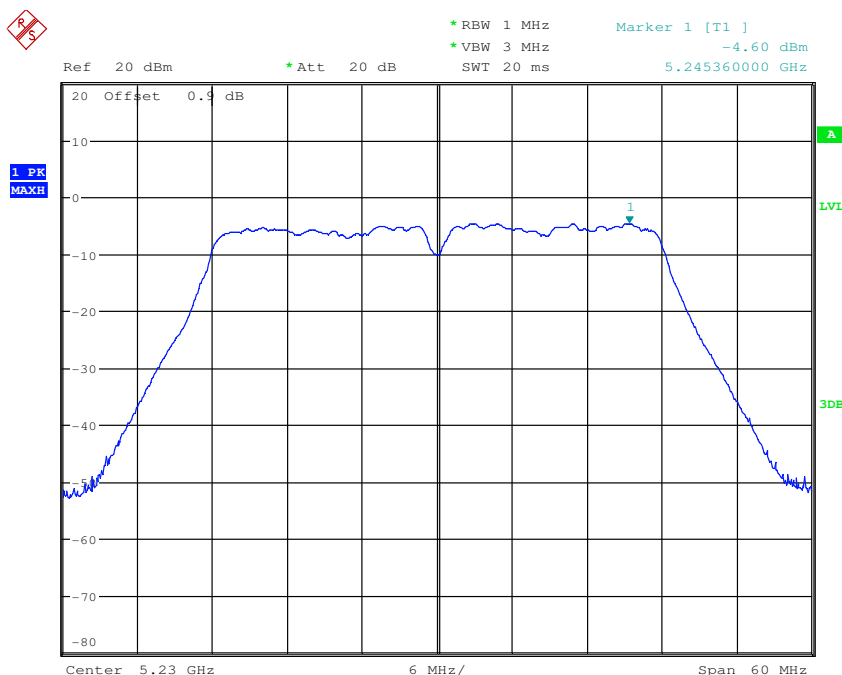





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 143 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5270
------------	---------------	-----------------	------

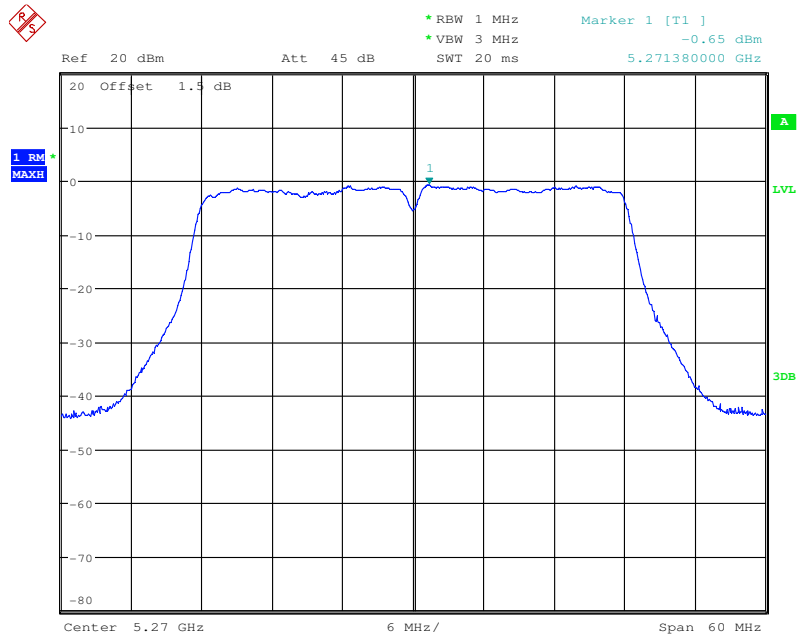

Test mode:	802.11n(HT40)	Frequency(MHz):	5310
------------	---------------	-----------------	------

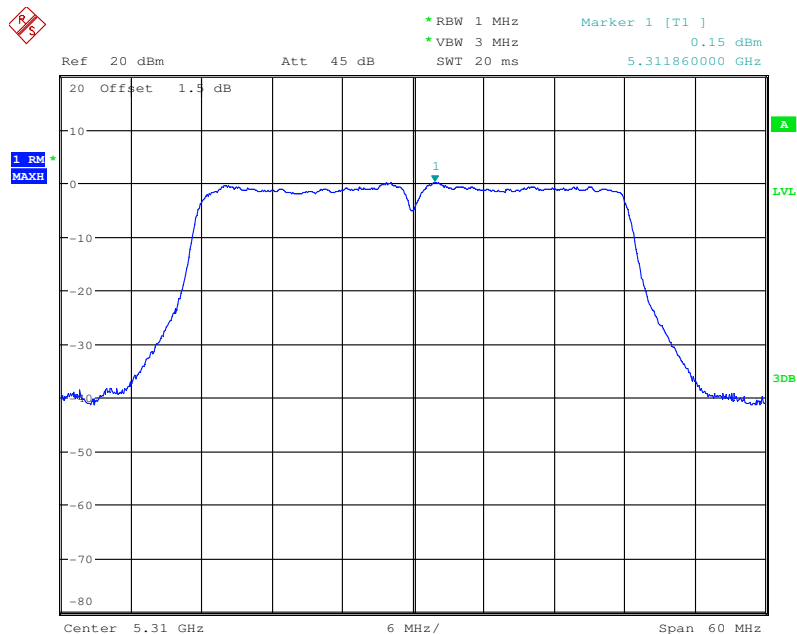




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 144 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5510
------------	---------------	-----------------	------

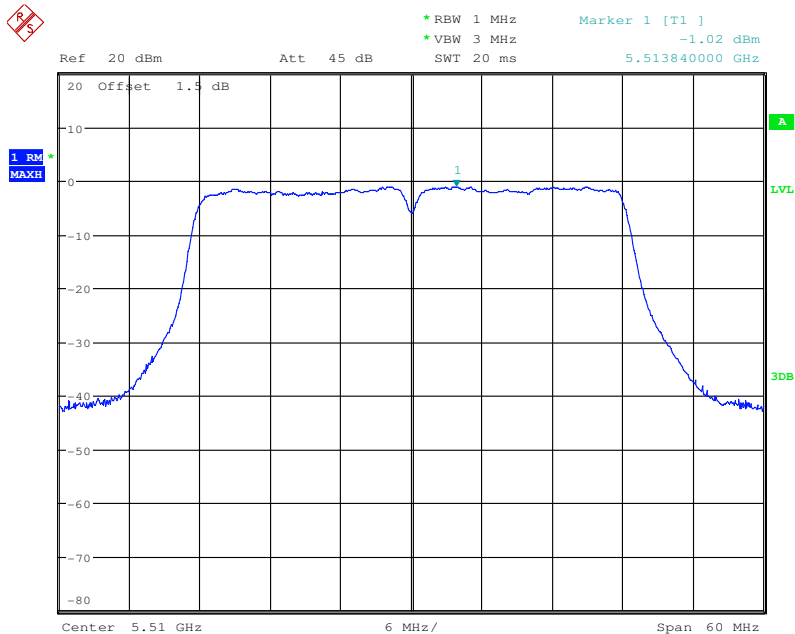

Test mode:	802.11n(HT40)	Frequency(MHz):	5550
------------	---------------	-----------------	------

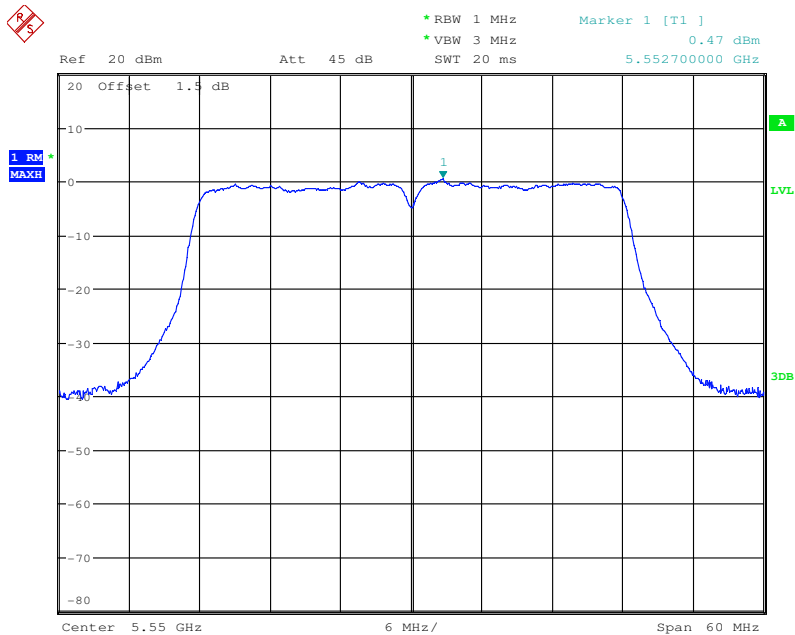




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 145 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5670
------------	---------------	-----------------	------

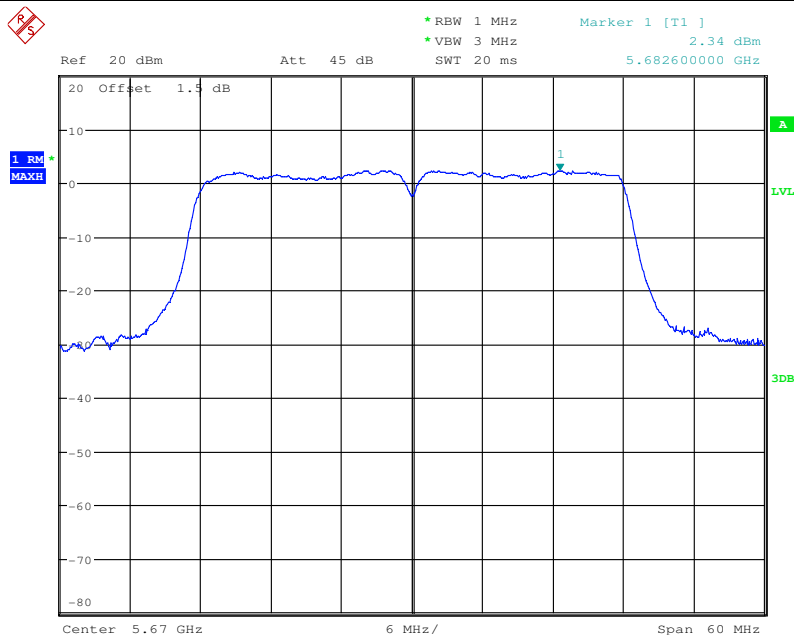

Test mode:	802.11n(HT40)	Frequency(MHz):	5755
------------	---------------	-----------------	------

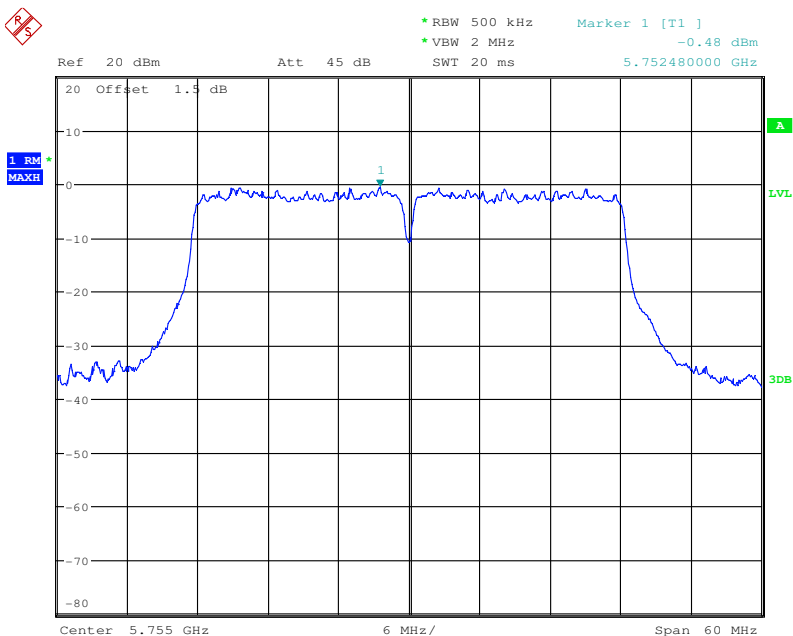




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 146 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5795
------------	---------------	-----------------	------

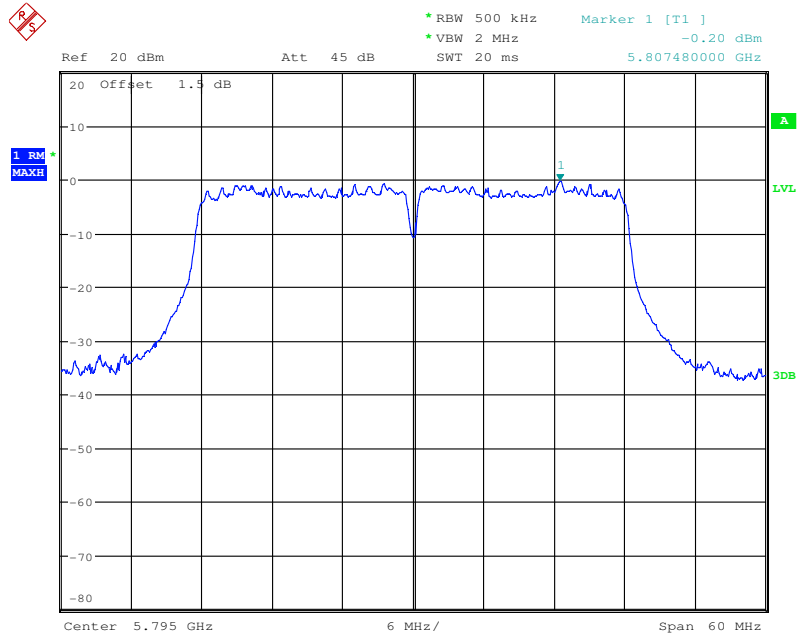

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190
------------	----------------	-----------------	------

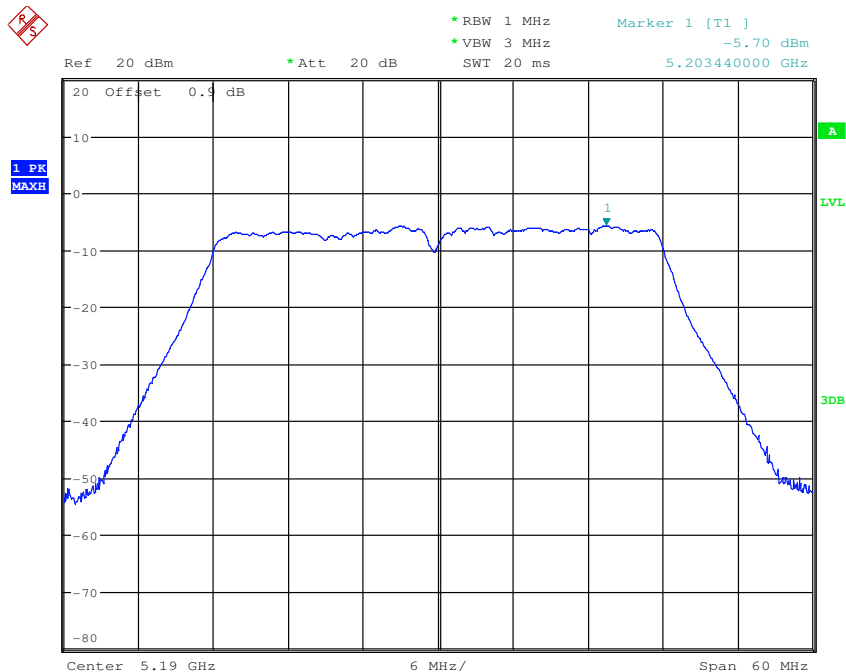





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 147 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230
------------	----------------	-----------------	------

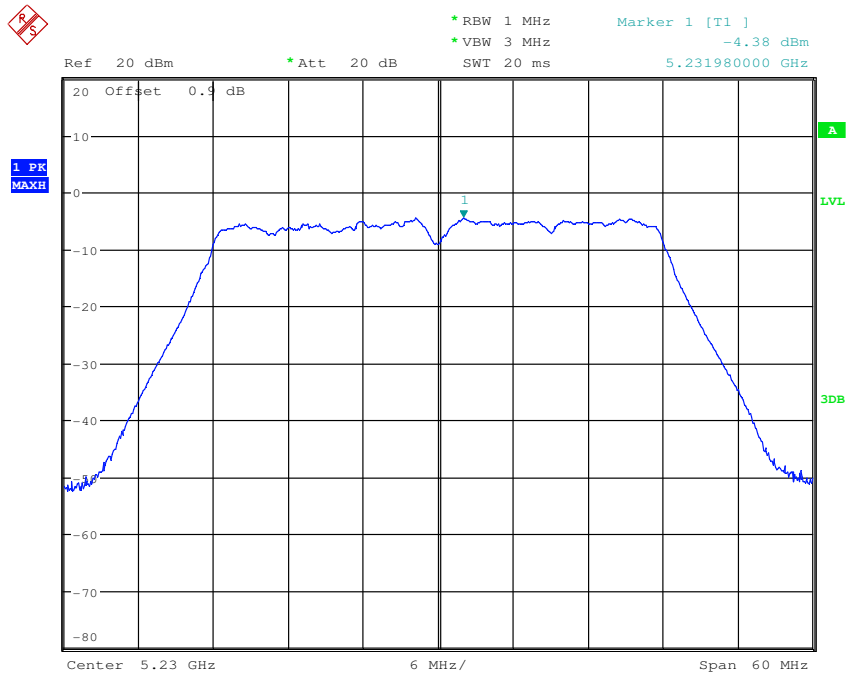

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270
------------	----------------	-----------------	------

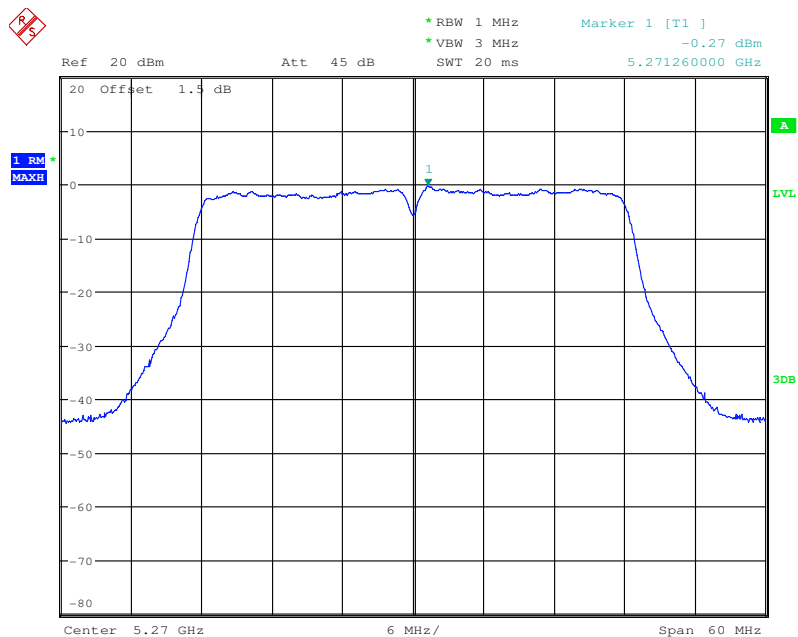





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 148 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310
------------	----------------	-----------------	------

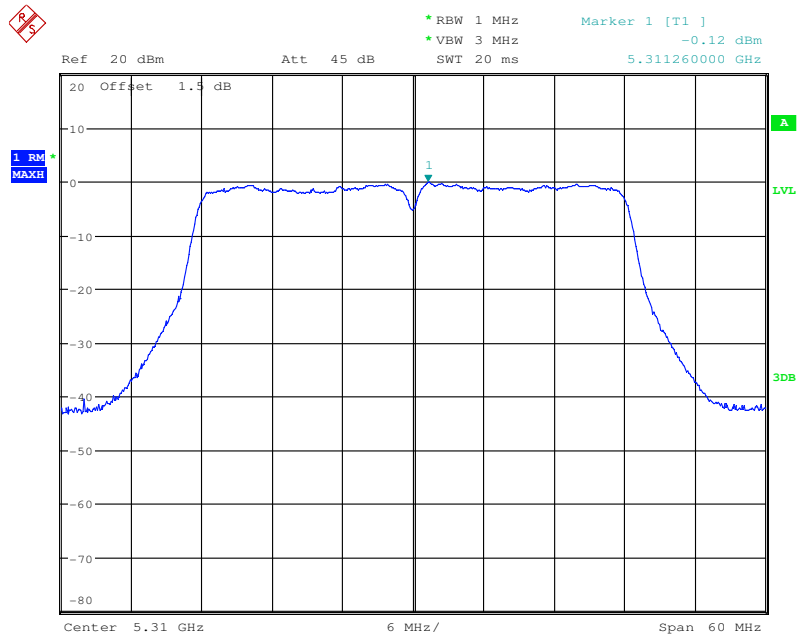

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510
------------	----------------	-----------------	------

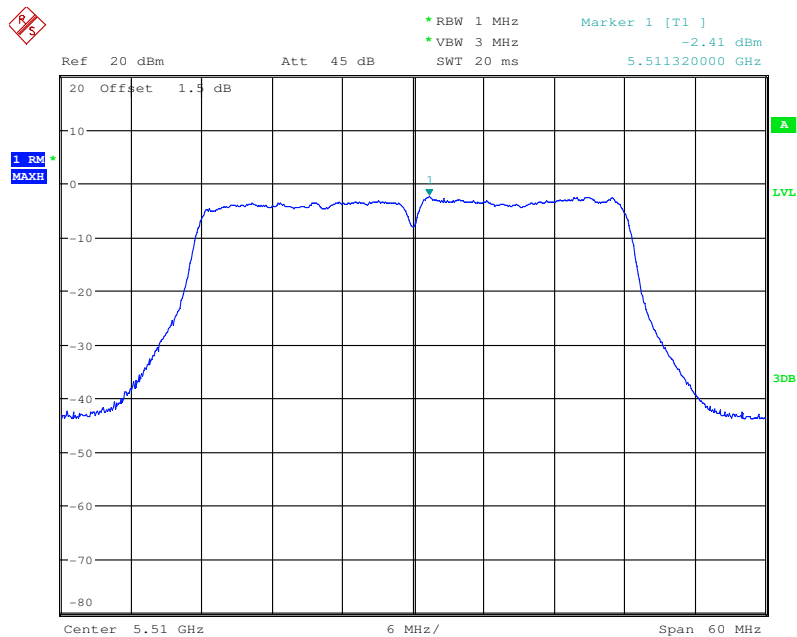




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 149 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5550
------------	----------------	-----------------	------

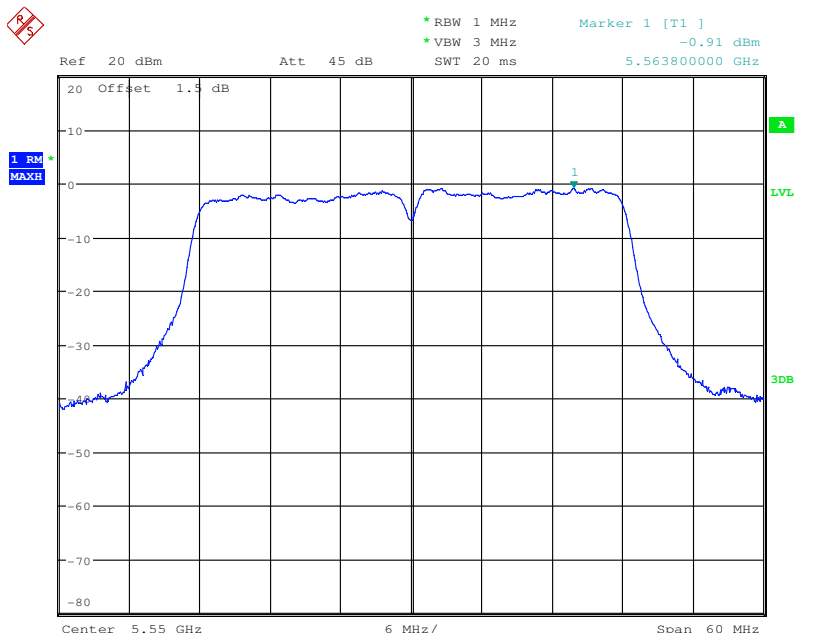

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670
------------	----------------	-----------------	------

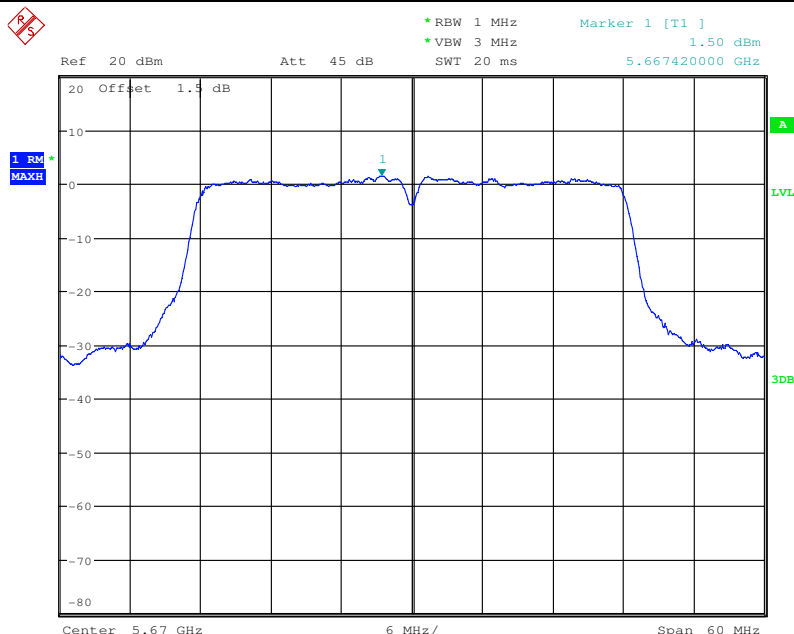




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 150 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755
------------	----------------	-----------------	------

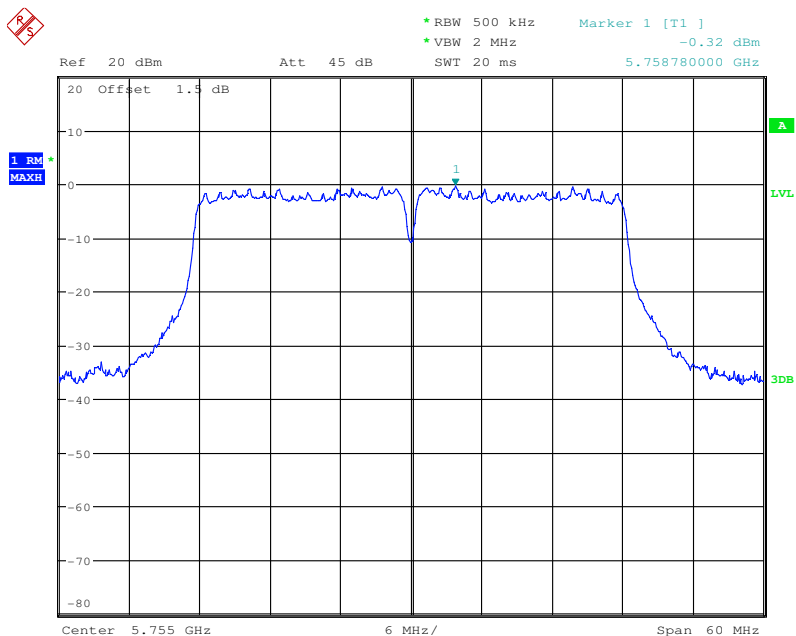

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795
------------	----------------	-----------------	------

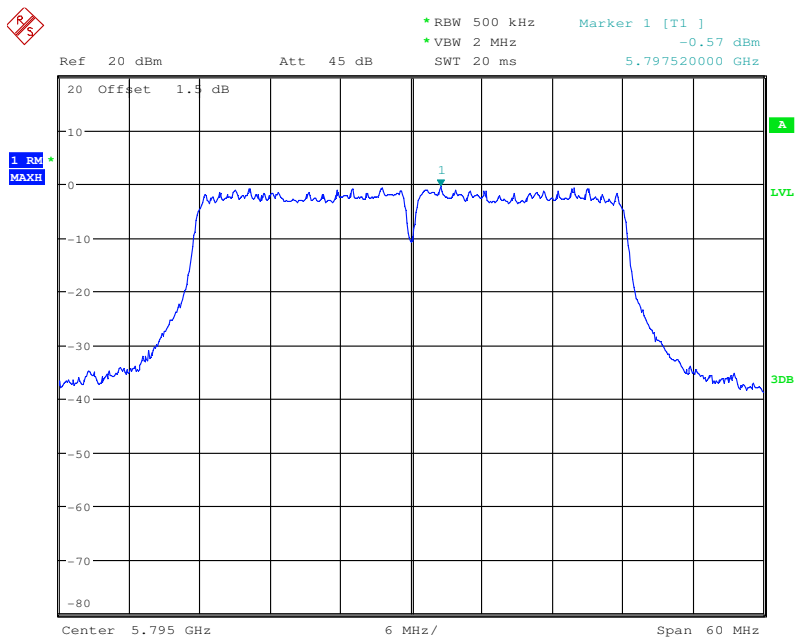




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 152 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530
------------	----------------	-----------------	------

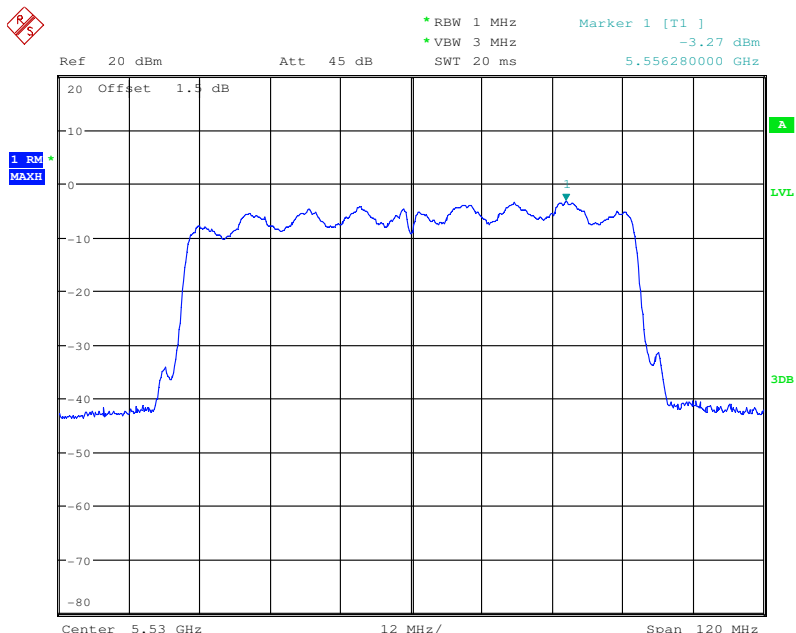


Test mode:	802.11ac(HT80)	Frequency(MHz):	5775
------------	----------------	-----------------	------

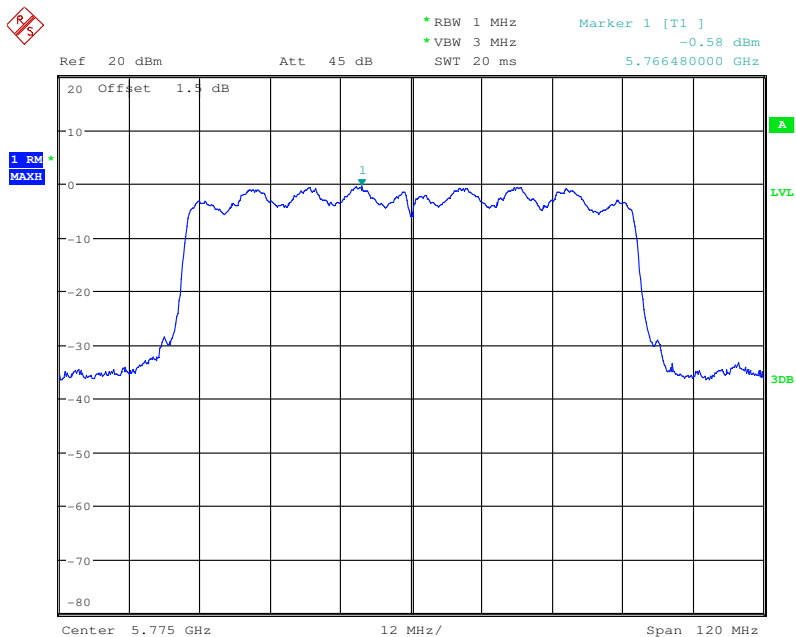

6.7 Frequency Stability

As required in section 15.407(g), the U-NII devices are required to ensure frequency stability. It is required that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The client ensure that the EUT meets the requirements of section 15.407(g).

6.8 Duty cycle

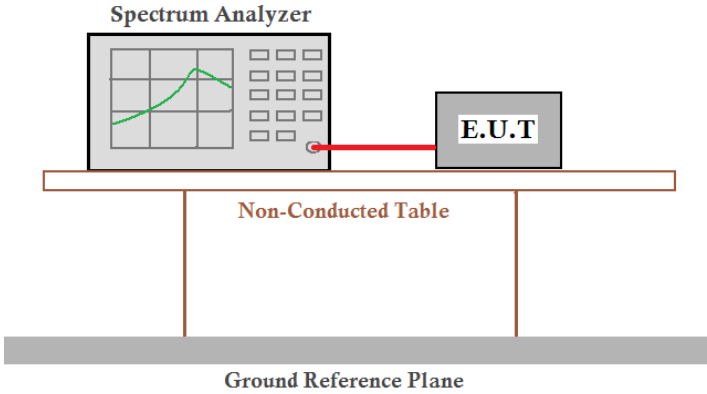Test Requirement:	47 CFR Part 15, Subpart E 15.407
Test Method:	ANSI C63.10
Test Setup:	 <i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Test Instruments:	Refer to clause 11.6
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; MCS0 of rate is the worst case of 802.11n(HT20); MCS0 of rate is the worst case of 802.11n(HT40); MCS0 of rate is the worst case of 802.11ac(HT20); MCS0 of rate is the worst case of 802.11ac(HT40); MCS0 of rate is the worst case of 802.11ac(HT80) Only the worst case is recorded in the report.
Limit :	Duty cycle of greater than or equal to 98%).
Test Results:	Pass



Measurement Data

7.Duty Cycle (x)

Test Mode	Test Channel	Ant	Duty Cycle[%]	10log(1/x) Factor[dB]
11A	5180	Ant1	100	0
11N20	5180	Ant1	100	0
11AC20	5180	Ant1	100	0
11N40	5190	Ant1	100	0
11AC40	5190	Ant1	100	0
11AC80	5210	Ant1	100	0




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 155 of 283

Duty Cycle_11A_5180

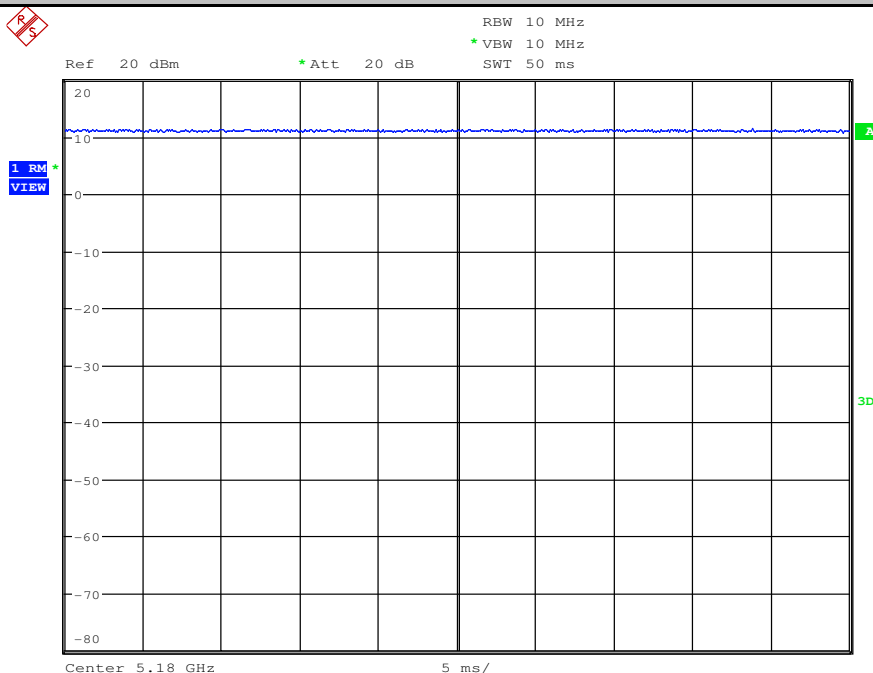

Duty Cycle_11N20_5180

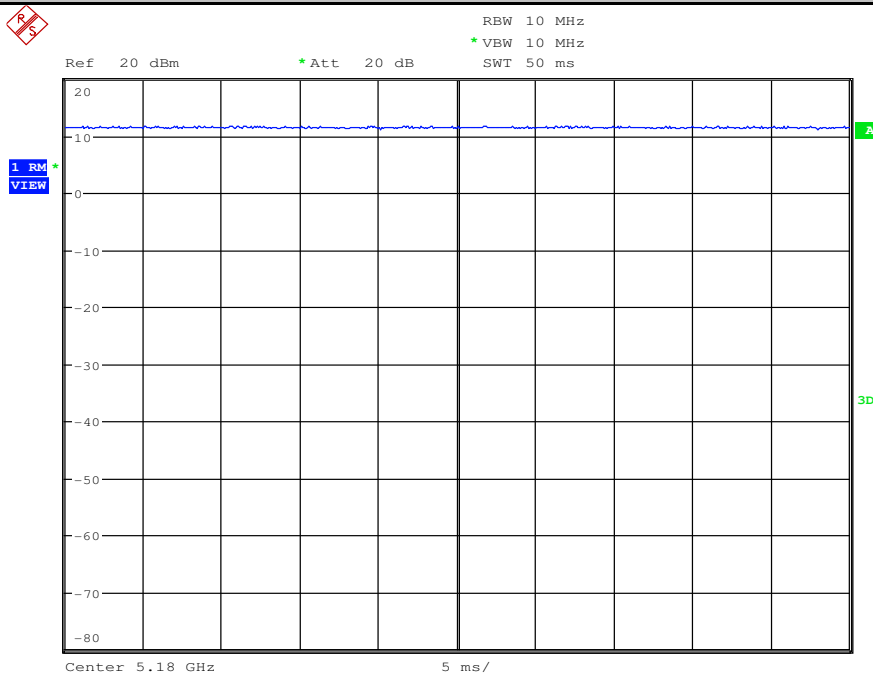




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 156 of 283

Duty Cycle_11AC20_5180

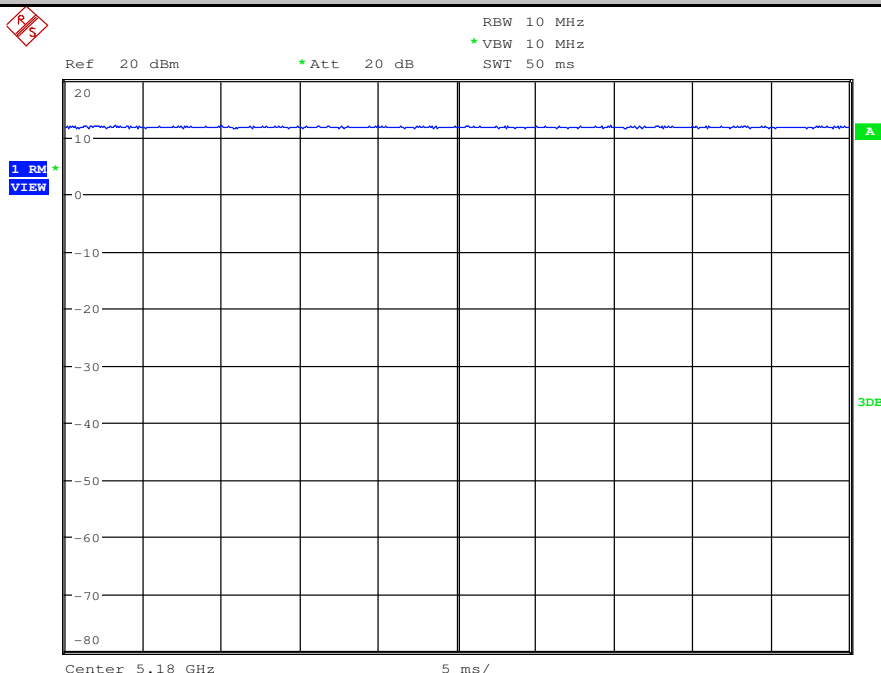

Duty Cycle_11N40_5190

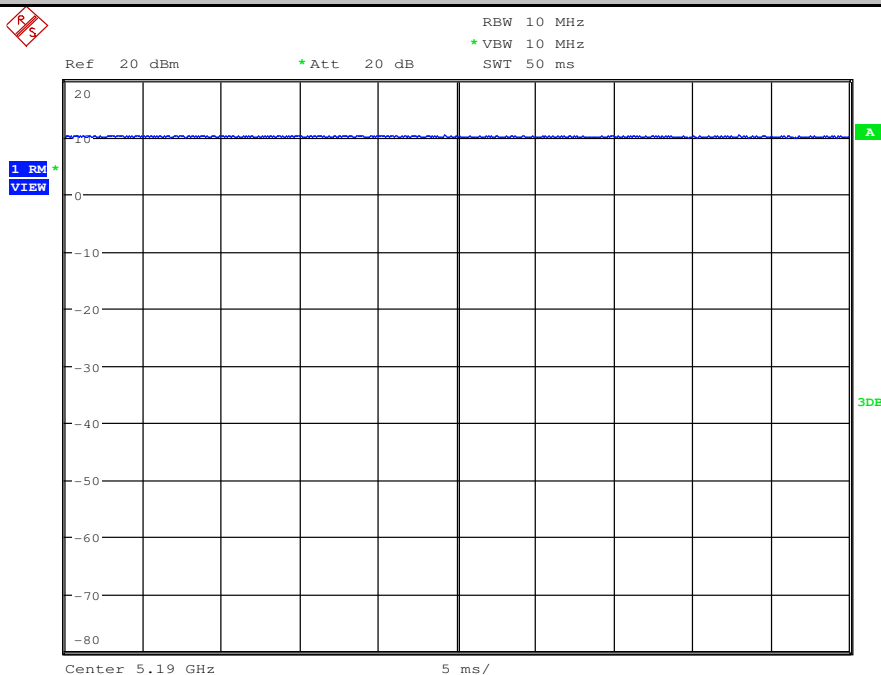




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM180400245803

Page: 157 of 283

Duty Cycle_11AC40_5190

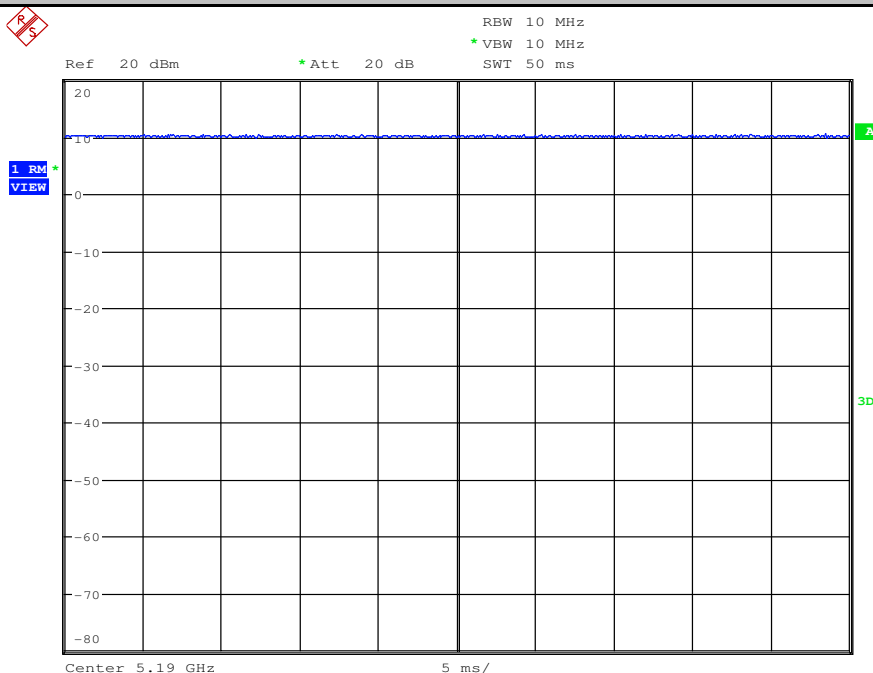

Duty Cycle_11AC80_5210

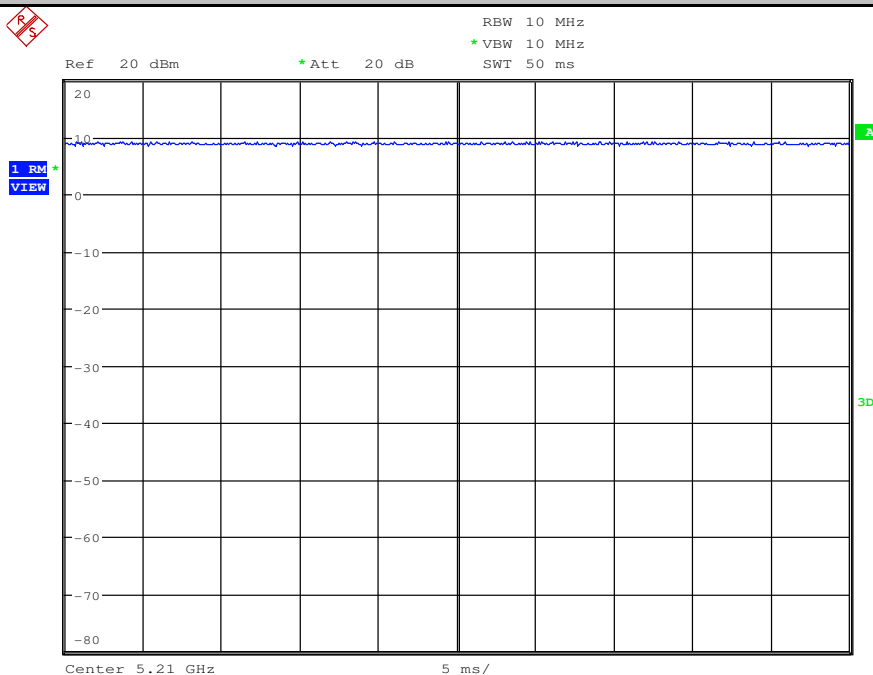

6.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15, Subpart C 15.209 & 15.407(b)
Test Method:	KDB 789033 D02 II G
Test Site:	Measurement Distance: 3m
Test Setup:	

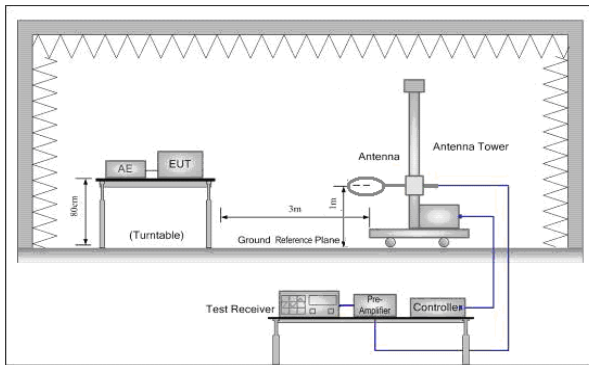


Figure 1. Below 30MHz

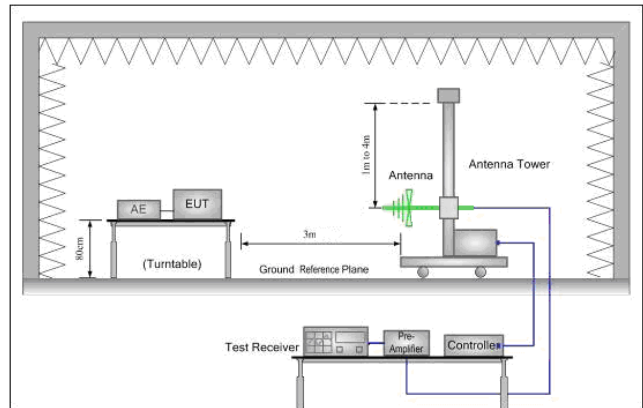


Figure 2. 30MHz to 1GHz

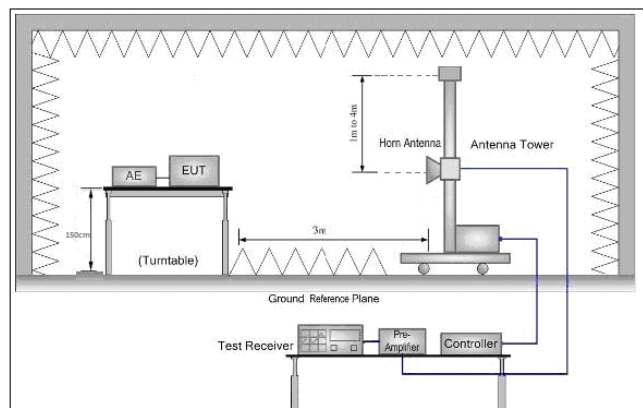


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803


Page: 159 of 283

	the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.																					
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates and both antennas.																					
Final Test Mode:	Through Pre-scan, find the worst case for each modulation type is below: <table><tr><td>Modulation Type</td><td>Data Rate</td><td>Antenna</td></tr><tr><td>802.11a</td><td>6Mbps</td><td>SISO: Antenna a</td></tr><tr><td>802.11n(HT20)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11n(HT40)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11ac(HT20)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11ac(HT40)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11ac(HT80)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr></table> For below 1GHz, through Pre-scan, find the 6Mbps of rate of 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.	Modulation Type	Data Rate	Antenna	802.11a	6Mbps	SISO: Antenna a	802.11n(HT20)	MCS0	MIMO: Antenna a+b	802.11n(HT40)	MCS0	MIMO: Antenna a+b	802.11ac(HT20)	MCS0	MIMO: Antenna a+b	802.11ac(HT40)	MCS0	MIMO: Antenna a+b	802.11ac(HT80)	MCS0	MIMO: Antenna a+b
Modulation Type	Data Rate	Antenna																				
802.11a	6Mbps	SISO: Antenna a																				
802.11n(HT20)	MCS0	MIMO: Antenna a+b																				
802.11n(HT40)	MCS0	MIMO: Antenna a+b																				
802.11ac(HT20)	MCS0	MIMO: Antenna a+b																				
802.11ac(HT40)	MCS0	MIMO: Antenna a+b																				
802.11ac(HT80)	MCS0	MIMO: Antenna a+b																				
Instruments Used:	Refer to section 5.10 for details																					
Test Results:	Pass																					



6.9.1 Radiated emission below 1GHz

Test mode:	Transmitting mode	Polarization:	Vertical
------------	-------------------	---------------	----------

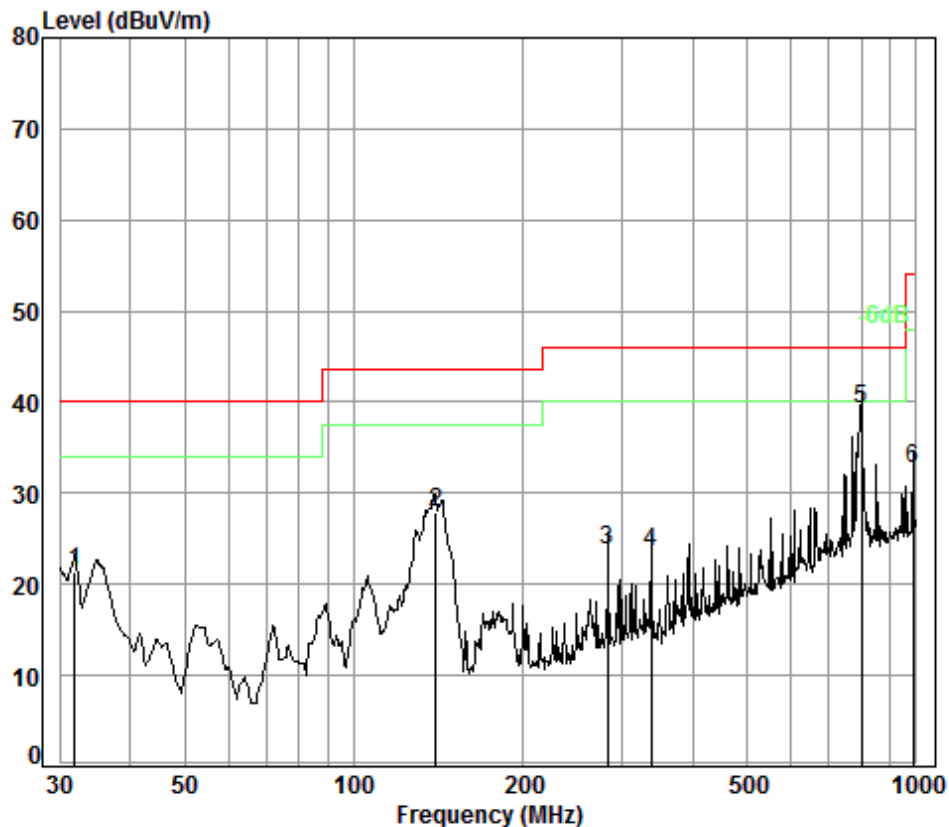

Condition: 3m VERTICAL

Job No. : 11090CR

Test mode: TX

: WIFI

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	30.55	21.41	40.00	-18.59
2	139.85	1.30	8.09	26.96	45.40	27.83	43.50	-15.67
3	282.99	1.83	13.15	26.45	35.26	23.79	46.00	-22.21
4	338.40	2.02	14.32	26.70	33.82	23.46	46.00	-22.54
5 pp	798.98	3.20	22.10	27.30	41.15	39.15	46.00	-6.85
6	986.07	3.69	23.74	26.37	31.59	32.65	54.00	-21.35




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803

Page: 161 of 283

Test mode:	Transmitting mode	Polarization:	Horizontal
------------	-------------------	---------------	------------

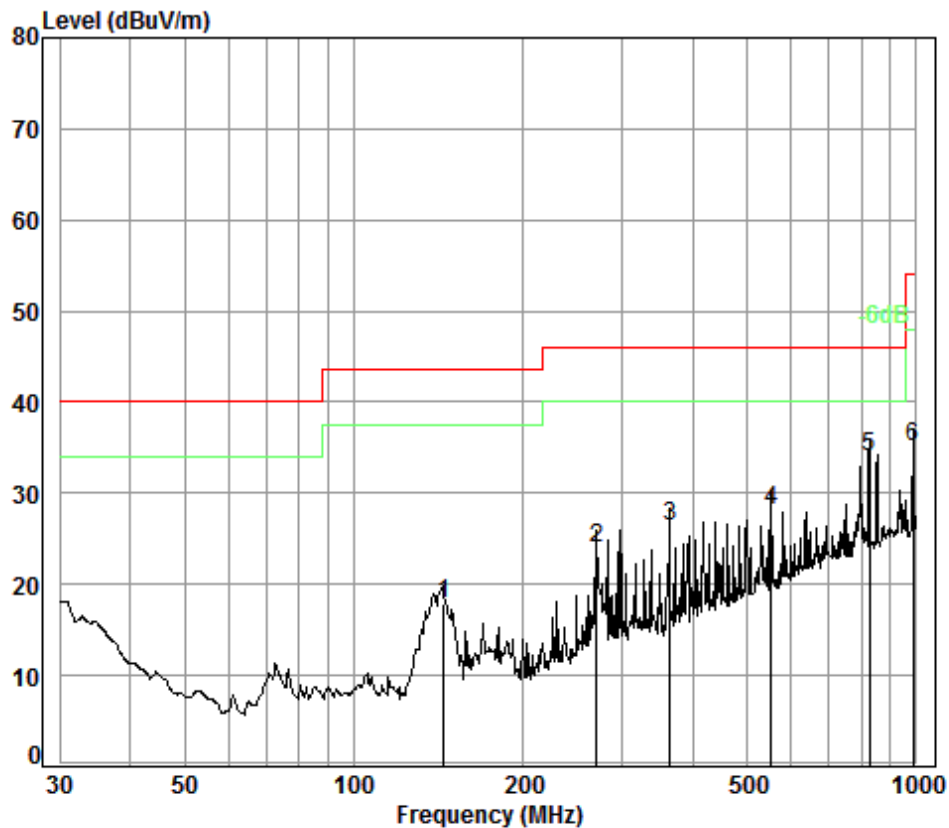

Condition: 3m HORIZONTAL

Job No. : 11090CR

Test mode: TX

: WIFI

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	144.33	1.31	8.49	26.94	35.08	17.94	43.50	-25.56
2	270.37	1.77	12.71	26.48	36.01	24.01	46.00	-21.99
3	364.26	2.10	15.10	26.89	36.06	26.37	46.00	-19.63
4	552.88	2.66	18.92	27.61	34.26	28.23	46.00	-17.77
5 pp	824.60	3.31	22.40	27.16	35.37	33.92	46.00	-12.08
6	986.07	3.69	23.74	26.37	34.01	35.07	54.00	-18.93



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 162 of 283

6.9.2 Transmitter emission above 1GHz

Test plot as follows:

Test mode:		802.11a		Frequency(MHz):		5180		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
8328.564	11.58	36.2	37.37	41.79	52.2	74		-21.8	Vertical
10360	12.98	37.24	36.99	35.97	49.2	68.2		-24.8	Vertical
11756.66	14.3	38.36	38.06	36.91	51.51	68.2		-22.49	Vertical
13217.38	15.61	38.71	39.57	36	50.75	68.2		-23.25	Vertical
15540	17.07	41.38	39.95	34.59	53.09	74		-20.91	Vertical
17830.8	21.55	44	37.45	24.79	52.89	74		-21.11	Vertical
7678.832	10.89	36.41	37.71	41.46	51.05	74		-22.95	Horizontal
8328.564	11.58	36.2	37.37	42.3	52.71	74		-21.29	Horizontal
10360	12.98	37.24	36.99	35.99	49.22	68.2		-24.78	Horizontal
12775.54	14.93	38.84	39.08	36.56	51.25	68.2		-22.75	Horizontal
15540	17.07	41.38	39.95	34.1	52.6	74		-21.4	Horizontal
17830.8	21.55	44	37.45	24.52	52.62	74		-21.38	Horizontal

Test mode:		802.11a		Frequency(MHz):		5200		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	40.6	50.19	74		-23.81	Vertical
9007.715	11.8	36.61	37.3	38.83	49.94	74		-24.06	Vertical
10440	13.04	37.16	37.03	33.12	46.29	68.2		-27.71	Vertical
13192.44	15.6	38.72	39.54	35.68	50.46	68.2		-23.54	Vertical
15660	17.18	41.34	39.83	34.1	52.79	74		-21.21	Vertical
17864.51	21.66	44.06	37.42	24.65	52.95	74		-21.05	Vertical
7693.35	10.9	36.42	37.69	40.52	50.15	74		-23.85	Horizontal
10440	13.04	37.16	37.03	33.5	46.67	68.2		-27.33	Horizontal
11734.47	14.27	38.34	38.04	36.22	50.79	68.2		-23.21	Horizontal
13804.27	16.03	38.97	40.27	38.31	53.04	68.2		-20.96	Horizontal
15660	17.18	41.34	39.83	34.21	52.9	74		-21.1	Horizontal
17830.8	21.55	44	37.45	25.26	53.36	74		-20.64	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 163 of 283

Test mode:		802.11a		Frequency(MHz):		5240		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	41.18	50.77	74		-23.23	Vertical
10480	13.07	37.12	37.05	34.6	47.74	68.2		-26.26	Vertical
11823.47	14.37	38.43	38.13	37.68	52.35	68.2		-21.65	Vertical
13804.27	16.03	38.97	40.27	36.78	51.51	68.2		-22.49	Vertical
15720	17.24	41.31	39.77	34.24	53.02	74		-20.98	Vertical
17830.8	21.55	44	37.45	25.22	53.32	74		-20.68	Vertical
8328.564	11.58	36.2	37.37	42.56	52.97	74		-21.03	Horizontal
10480	13.07	37.12	37.05	34.35	47.49	68.2		-26.51	Horizontal
11734.47	14.27	38.34	38.04	37.78	52.35	68.2		-21.65	Horizontal
13093.14	15.57	38.76	39.42	35.28	50.19	68.2		-23.81	Horizontal
15720	17.24	41.31	39.77	34.24	53.02	74		-20.98	Horizontal
17830.8	21.55	44	37.45	24.72	52.82	74		-21.18	Horizontal

Test mode:		802.11a		Frequency(MHz):		5260		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7106.583	10.64	36.46	38.29	41.62	50.43	68.2		-23.57	Vertical
10520	13.1	37.12	37.07	33.78	46.93	68.2		-27.07	Vertical
11734.47	14.27	38.34	38.04	38.13	52.7	68.2		-21.3	Vertical
13804.27	16.03	38.97	40.27	37.17	51.9	68.2		-22.1	Vertical
15780	17.29	41.29	39.71	33.56	52.43	74		-21.57	Vertical
17830.8	21.55	44	37.45	25.36	53.46	74		-20.54	Vertical
9007.715	11.8	36.61	37.3	40.37	51.48	74		-22.52	Horizontal
10520	13.1	37.12	37.07	33.06	46.21	68.2		-27.79	Horizontal
11734.47	14.27	38.34	38.04	36.95	51.52	68.2		-22.48	Horizontal
13804.27	16.03	38.97	40.27	37.79	52.52	68.2		-21.48	Horizontal
15780	17.29	41.29	39.71	34.47	53.34	74		-20.66	Horizontal
17898.29	21.78	44.12	37.39	24.9	53.41	74		-20.59	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 164 of 283

Test mode:		802.11a		Frequency(MHz):		5300		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	41.33	50.92	74		-23.08	Vertical
9937.399	12.68	37.59	36.83	40.04	53.48	68.2		-20.52	Vertical
10600	13.16	37.22	37.11	34.06	47.33	68.2		-26.67	Vertical
13192.44	15.6	38.72	39.54	35.8	50.58	68.2		-23.42	Vertical
15900	17.41	41.24	39.6	33.47	52.52	74		-21.48	Vertical
17202.21	19.38	43.04	38.01	28.42	52.83	68.2		-21.17	Vertical
7106.583	10.64	36.46	38.29	41.18	49.99	68.2		-24.01	Horizontal
8328.564	11.58	36.2	37.37	42.14	52.55	74		-21.45	Horizontal
10600	13.16	37.22	37.11	33.52	46.79	68.2		-27.21	Horizontal
12775.54	14.93	38.84	39.08	35.98	50.67	68.2		-23.33	Horizontal
15900	17.41	41.24	39.6	32.22	51.27	74		-22.73	Horizontal
17864.51	21.66	44.06	37.42	25	53.3	74		-20.7	Horizontal

Test mode:		802.11a		Frequency(MHz):		5320		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7066.425	10.63	36.47	38.33	42.48	51.25	68.2		-22.75	Vertical
9007.715	11.8	36.61	37.3	40.33	51.44	74		-22.56	Vertical
10640	13.19	37.27	37.13	34.05	47.38	68.2		-26.62	Vertical
12751.43	14.86	38.85	39.06	35.9	50.55	68.2		-23.45	Vertical
15960	17.46	41.22	39.54	33.5	52.64	74		-21.36	Vertical
17898.29	21.78	44.12	37.39	24.18	52.69	74		-21.31	Vertical
7678.832	10.89	36.41	37.71	39.85	49.44	74		-24.56	Horizontal
9659.786	12.53	37.53	36.96	38.97	52.07	68.2		-21.93	Horizontal
10640	13.19	37.27	37.13	34.3	47.63	68.2		-26.37	Horizontal
11734.47	14.27	38.34	38.04	36.17	50.74	68.2		-23.26	Horizontal
14485.46	16.39	40.37	40.5	36.85	53.11	74		-20.89	Horizontal
15960	17.46	41.22	39.54	33.68	52.82	74		-21.18	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 165 of 283

Test mode:		802.11a		Frequency(MHz):		5500		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7664.34	10.88	36.4	37.72	41.38	50.94	74		-23.06	Vertical
9007.715	11.8	36.61	37.3	40.22	51.33	74		-22.67	Vertical
11000	13.45	37.7	37.3	34.61	48.46	68.2		-25.54	Vertical
13217.38	15.61	38.71	39.57	35.89	50.64	68.2		-23.36	Vertical
16500	17.59	42.7	38.84	31.39	52.84	68.2		-21.16	Vertical
17864.51	21.66	44.06	37.42	24.43	52.73	74		-21.27	Vertical
7093.172	10.64	36.46	38.3	40.86	49.66	68.2		-24.34	Horizontal
9659.786	12.53	37.53	36.96	40.26	53.36	68.2		-20.64	Horizontal
11000	13.45	37.7	37.3	33.48	47.33	68.2		-26.67	Horizontal
11823.47	14.37	38.43	38.13	36.52	51.19	68.2		-22.81	Horizontal
14485.46	16.39	40.37	40.5	37.1	53.36	74		-20.64	Horizontal
16500	17.59	42.7	38.84	31.31	52.76	68.2		-21.24	Horizontal

Test mode:		802.11a		Frequency(MHz):		5580		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7093.172	10.64	36.46	38.3	41.5	50.3	68.2		-23.7	Vertical
9659.786	12.53	37.53	36.96	39.99	53.09	68.2		-20.91	Vertical
11160	13.68	37.86	37.51	34.49	48.52	68.2		-25.48	Vertical
13804.27	16.03	38.97	40.27	36.84	51.57	68.2		-22.43	Vertical
15800.41	17.31	41.28	39.69	34.05	52.95	74		-21.05	Vertical
16740	18.24	42.76	38.45	30.53	53.08	68.2		-20.92	Vertical
8328.564	11.58	36.2	37.37	41.96	52.37	74		-21.63	Horizontal
9918.646	12.67	37.58	36.84	39.03	52.44	68.2		-21.56	Horizontal
11160	13.68	37.86	37.51	33.75	47.78	68.2		-26.22	Horizontal
12751.43	14.86	38.85	39.06	37.14	51.79	68.2		-22.21	Horizontal
14485.46	16.39	40.37	40.5	36.96	53.22	74		-20.78	Horizontal
16740	18.24	42.76	38.45	30.58	53.13	68.2		-20.87	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 166 of 283

Test mode:		802.11a		Frequency(MHz):		5700		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	42.68	52.27	74		-21.73	Vertical
9007.715	11.8	36.61	37.3	39.55	50.66	74		-23.34	Vertical
11400	13.91	38.02	37.71	34.74	48.96	68.2		-25.04	Vertical
12775.54	14.93	38.84	39.08	36.38	51.07	68.2		-22.93	Vertical
15157.26	16.7	41.33	40.34	34.85	52.54	68.2		-21.46	Vertical
17100	19.02	42.92	38.11	29.31	53.14	68.2		-20.86	Vertical
7664.34	10.88	36.4	37.72	41.79	51.35	74		-22.65	Horizontal
9007.715	11.8	36.61	37.3	39.21	50.32	74		-23.68	Horizontal
11400	13.91	38.02	37.71	35.33	49.55	68.2		-24.45	Horizontal
13142.69	15.59	38.74	39.48	36.07	50.92	68.2		-23.08	Horizontal
15800.41	17.31	41.28	39.69	34.58	53.48	74		-20.52	Horizontal
17100	19.02	42.92	38.11	29.14	52.97	68.2		-21.03	Horizontal

Test mode:		802.11a		Frequency(MHz):		5745		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7079.786	10.63	36.47	38.32	42.55	51.33	68.2		-22.67	Vertical
8990.716	11.79	36.59	37.3	40.22	51.3	68.2		-22.7	Vertical
11490	14.01	38.09	37.8	33.54	47.84	68.2		-26.16	Vertical
13804.27	16.03	38.97	40.27	36.5	51.23	68.2		-22.77	Vertical
16010.72	17.5	41.23	39.49	33.8	53.04	74		-20.96	Vertical
17235	19.5	43.08	37.98	28.46	53.06	68.2		-20.94	Vertical
7678.832	10.89	36.41	37.71	40.95	50.54	74		-23.46	Horizontal
9659.786	12.53	37.53	36.96	39.68	52.78	68.2		-21.22	Horizontal
11490	14.01	38.09	37.8	34.2	48.5	68.2		-25.5	Horizontal
13217.38	15.61	38.71	39.57	35.94	50.69	68.2		-23.31	Horizontal
14650.57	16.44	40.67	40.5	35.36	51.97	68.2		-22.03	Horizontal
17235	19.5	43.08	37.98	28.37	52.97	68.2		-21.03	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 167 of 283

Test mode:		802.11a		Frequency(MHz):		5785		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	41.1	50.69	74		-23.31	Vertical
9678.051	12.54	37.54	36.96	40.43	53.55	68.2		-20.45	Vertical
11570	14.09	38.17	37.88	33.81	48.19	68.2		-25.81	Vertical
13117.89	15.58	38.75	39.45	35.77	50.65	68.2		-23.35	Vertical
15157.26	16.7	41.33	40.34	34.8	52.49	68.2		-21.51	Vertical
17355	19.92	43.23	37.87	27.87	53.15	68.2		-20.85	Vertical
7106.583	10.64	36.46	38.29	41.67	50.48	68.2		-23.52	Horizontal
8328.564	11.58	36.2	37.37	41.19	51.6	74		-22.4	Horizontal
11570	14.09	38.17	37.88	33.45	47.83	68.2		-26.17	Horizontal
13167.54	15.59	38.73	39.51	36.35	51.16	68.2		-22.84	Horizontal
14512.85	16.4	40.42	40.5	36.92	53.24	68.2		-20.76	Horizontal
17355	19.92	43.23	37.87	27.47	52.75	68.2		-21.25	Horizontal

Test mode:		802.11a		Frequency(MHz):		5825		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7086.476	10.63	36.46	38.31	41.42	50.2	68.2		-23.8	Vertical
8344.312	11.61	36.18	37.36	41.36	51.79	74		-22.21	Vertical
11650	14.18	38.25	37.96	33.83	48.3	68.2		-25.7	Vertical
13093.14	15.57	38.76	39.42	35.49	50.4	68.2		-23.6	Vertical
15800.41	17.31	41.28	39.69	33.86	52.76	74		-21.24	Vertical
17475	20.33	43.37	37.77	27.24	53.17	68.2		-20.83	Vertical
7678.832	10.89	36.41	37.71	40.25	49.84	74		-24.16	Horizontal
9862.599	12.64	37.57	36.87	39.6	52.94	68.2		-21.06	Horizontal
11650	14.18	38.25	37.96	33.29	47.76	68.2		-26.24	Horizontal
13804.27	16.03	38.97	40.27	36.62	51.35	68.2		-22.65	Horizontal
16010.72	17.5	41.23	39.49	34.09	53.33	74		-20.67	Horizontal
17475	20.33	43.37	37.77	26.77	52.7	68.2		-21.3	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 168 of 283

Test mode:		802.11n(HT20)		Frequency(MHz):		5180		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7093.172	10.64	36.46	38.3	42.28	51.08	68.2	-22.92	Vertical	
9007.715	11.8	36.61	37.3	39.84	50.95	74	-23.05	Vertical	
10360	12.98	37.24	36.99	36.42	49.65	68.2	-24.35	Vertical	
13217.38	15.61	38.71	39.57	35.55	50.3	68.2	-23.7	Vertical	
15540	17.07	41.38	39.95	33.34	51.84	74	-22.16	Vertical	
17830.8	21.55	44	37.45	24.82	52.92	74	-21.08	Vertical	
7678.832	10.89	36.41	37.71	41.13	50.72	74	-23.28	Horizontal	
9007.715	11.8	36.61	37.3	39.44	50.55	74	-23.45	Horizontal	
10360	12.98	37.24	36.99	35.2	48.43	68.2	-25.57	Horizontal	
12775.54	14.93	38.84	39.08	36.96	51.65	68.2	-22.35	Horizontal	
15540	17.07	41.38	39.95	33.92	52.42	74	-21.58	Horizontal	
17629.85	20.87	43.64	37.63	26.3	53.18	68.2	-20.82	Horizontal	

Test mode:		802.11n(HT20)		Frequency(MHz):		5200		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7079.786	10.63	36.47	38.32	41.68	50.46	68.2	-23.54	Vertical	
8344.312	11.61	36.18	37.36	41.52	51.95	74	-22.05	Vertical	
10440	13.04	37.16	37.03	33.25	46.42	68.2	-27.58	Vertical	
12775.54	14.93	38.84	39.08	35.69	50.38	68.2	-23.62	Vertical	
15660	17.18	41.34	39.83	34	52.69	74	-21.31	Vertical	
17464.13	20.3	43.36	37.78	26.97	52.85	68.2	-21.15	Vertical	
7678.832	10.89	36.41	37.71	41.23	50.82	74	-23.18	Horizontal	
10440	13.04	37.16	37.03	34.23	47.4	68.2	-26.6	Horizontal	
11756.66	14.3	38.36	38.06	37.17	51.77	68.2	-22.23	Horizontal	
13778.22	16	38.94	40.24	37.57	52.27	68.2	-21.73	Horizontal	
15660	17.18	41.34	39.83	33.96	52.65	74	-21.35	Horizontal	
17830.8	21.55	44	37.45	25.52	53.62	74	-20.38	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 169 of 283

Test mode:		802.11n(HT20)		Frequency(MHz):		5240		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7160.481	10.66	36.43	38.23	39.51	48.37	68.2	-25.63	Vertical	
9007.715	11.8	36.61	37.3	38.12	49.23	74	-24.77	Vertical	
10480	13.07	37.12	37.05	33.29	46.43	68.2	-27.57	Vertical	
12775.54	14.93	38.84	39.08	35.86	50.55	68.2	-23.45	Vertical	
15720	17.24	41.31	39.77	32.83	51.61	74	-22.39	Vertical	
17530.23	20.52	43.46	37.72	27.14	53.4	68.2	-20.6	Vertical	
7678.832	10.89	36.41	37.71	39.93	49.52	74	-24.48	Horizontal	
9678.051	12.54	37.54	36.96	39.68	52.8	68.2	-21.2	Horizontal	
10480	13.07	37.12	37.05	33.66	46.8	68.2	-27.2	Horizontal	
13242.37	15.61	38.7	39.6	35.33	50.04	68.2	-23.96	Horizontal	
15720	17.24	41.31	39.77	33.76	52.54	74	-21.46	Horizontal	
17464.13	20.3	43.36	37.78	27.51	53.39	68.2	-20.61	Horizontal	

Test mode:		802.11n(HT20)		Frequency(MHz):		5260		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
8344.312	11.61	36.18	37.36	40.35	50.78	74	-23.22	Vertical	
10520	13.1	37.12	37.07	32.47	45.62	68.2	-28.38	Vertical	
11734.47	14.27	38.34	38.04	38.05	52.62	68.2	-21.38	Vertical	
14845.57	16.5	41.03	40.5	34.74	51.77	68.2	-22.23	Vertical	
15780	17.29	41.29	39.71	32.52	51.39	74	-22.61	Vertical	
17763.56	21.32	43.88	37.51	24.88	52.57	74	-21.43	Vertical	
7678.832	10.89	36.41	37.71	40.43	50.02	74	-23.98	Horizontal	
10520	13.1	37.12	37.07	32.52	45.67	68.2	-28.33	Horizontal	
11734.47	14.27	38.34	38.04	37.38	51.95	68.2	-22.05	Horizontal	
13778.22	16	38.94	40.24	36.19	50.89	68.2	-23.11	Horizontal	
15780	17.29	41.29	39.71	33.25	52.12	74	-21.88	Horizontal	
17830.8	21.55	44	37.45	25.33	53.43	74	-20.57	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 170 of 283

Test mode:		802.11n(HT20)		Frequency(MHz):		5300		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7079.786	10.63	36.47	38.32	41.94	50.72	68.2	-23.28	Vertical	
8990.716	11.79	36.59	37.3	39.71	50.79	68.2	-23.21	Vertical	
10600	13.16	37.22	37.11	33.68	46.95	68.2	-27.05	Vertical	
13217.38	15.61	38.71	39.57	36.03	50.78	68.2	-23.22	Vertical	
15900	17.41	41.24	39.6	33.4	52.45	74	-21.55	Vertical	
17797.15	21.44	43.94	37.48	25.48	53.38	74	-20.62	Vertical	
7678.832	10.89	36.41	37.71	40.41	50	74	-24	Horizontal	
10600	13.16	37.22	37.11	32.85	46.12	68.2	-27.88	Horizontal	
11734.47	14.27	38.34	38.04	36.66	51.23	68.2	-22.77	Horizontal	
14485.46	16.39	40.37	40.5	35.7	51.96	74	-22.04	Horizontal	
15900	17.41	41.24	39.6	33.38	52.43	74	-21.57	Horizontal	
17932.13	21.89	44.18	37.36	24.73	53.44	74	-20.56	Horizontal	

Test mode:		802.11n(HT20)		Frequency(MHz):		5320		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7106.583	10.64	36.46	38.29	41.38	50.19	68.2	-23.81	Vertical	
8990.716	11.79	36.59	37.3	38.57	49.65	68.2	-24.35	Vertical	
10640	13.19	37.27	37.13	32.74	46.07	68.2	-27.93	Vertical	
12751.43	14.86	38.85	39.06	36.26	50.91	68.2	-23.09	Vertical	
15960	17.46	41.22	39.54	33.2	52.34	74	-21.66	Vertical	
17464.13	20.3	43.36	37.78	26.71	52.59	68.2	-21.41	Vertical	
8344.312	11.61	36.18	37.36	42.13	52.56	74	-21.44	Horizontal	
9918.646	12.67	37.58	36.84	39.29	52.7	68.2	-21.3	Horizontal	
10640	13.19	37.27	37.13	33.21	46.54	68.2	-27.46	Horizontal	
13242.37	15.61	38.7	39.6	36.05	50.76	68.2	-23.24	Horizontal	
15960	17.46	41.22	39.54	33.61	52.75	74	-21.25	Horizontal	
17797.15	21.44	43.94	37.48	25.06	52.96	74	-21.04	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 171 of 283

Test mode:		802.11n(HT20)		Frequency(MHz):		5500		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	40.36	49.95	74		-24.05	Vertical
9659.786	12.53	37.53	36.96	39.77	52.87	68.2		-21.13	Vertical
11000	13.45	37.7	37.3	32.7	46.55	68.2		-27.45	Vertical
13778.22	16	38.94	40.24	36.57	51.27	68.2		-22.73	Vertical
16500	17.59	42.7	38.84	30.9	52.35	68.2		-21.65	Vertical
17966.03	22.01	44.24	37.33	24.6	53.52	74		-20.48	Vertical
7093.172	10.64	36.46	38.3	41.57	50.37	68.2		-23.63	Horizontal
9007.715	11.8	36.61	37.3	38.46	49.57	74		-24.43	Horizontal
11000	13.45	37.7	37.3	32.7	46.55	68.2		-27.45	Horizontal
13117.89	15.58	38.75	39.45	35.84	50.72	68.2		-23.28	Horizontal
15185.92	16.72	41.34	40.31	34.31	52.06	68.2		-21.94	Horizontal
16500	17.59	42.7	38.84	30.65	52.1	68.2		-21.9	Horizontal

Test mode:		802.11n(HT20)		Frequency(MHz):		5580		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line	Over Limit (dB)	Polarization
7093.172	10.64	36.46	38.3	40.77	49.57	68.2		-24.43	Vertical
9007.715	11.8	36.61	37.3	40.34	51.45	74		-22.55	Vertical
11160	13.68	37.86	37.51	34.59	48.62	68.2		-25.38	Vertical
13217.38	15.61	38.71	39.57	37.19	51.94	68.2		-22.06	Vertical
15800.41	17.31	41.28	39.69	33.79	52.69	74		-21.31	Vertical
16740	18.24	42.76	38.45	30.99	53.54	68.2		-20.46	Vertical
8328.564	11.58	36.2	37.37	41.28	51.69	74		-22.31	Horizontal
9659.786	12.53	37.53	36.96	40.02	53.12	68.2		-20.88	Horizontal
11160	13.68	37.86	37.51	33.65	47.68	68.2		-26.32	Horizontal
13192.44	15.6	38.72	39.54	38.06	52.84	68.2		-21.16	Horizontal
15214.63	16.75	41.34	40.28	32.13	49.94	68.2		-24.06	Horizontal
16740	18.24	42.76	38.45	29.84	52.39	68.2		-21.61	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 172 of 283

Test mode:		802.11n(HT20)		Frequency(MHz):		5700		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7678.832	10.89	36.41	37.71	40.41	50	74	-24	Vertical	
9659.786	12.53	37.53	36.96	39.57	52.67	68.2	-21.33	Vertical	
11400	13.91	38.02	37.71	34.59	48.81	68.2	-25.19	Vertical	
13192.44	15.6	38.72	39.54	36.45	51.23	68.2	-22.77	Vertical	
15185.92	16.72	41.34	40.31	33.6	51.35	68.2	-22.65	Vertical	
17100	19.02	42.92	38.11	29.18	53.01	68.2	-20.99	Vertical	
8328.564	11.58	36.2	37.37	40.66	51.07	74	-22.93	Horizontal	
9881.246	12.65	37.58	36.86	39.53	52.9	68.2	-21.1	Horizontal	
11400	13.91	38.02	37.71	34.22	48.44	68.2	-25.56	Horizontal	
13804.27	16.03	38.97	40.27	36.47	51.2	68.2	-22.8	Horizontal	
16040.99	17.51	41.32	39.45	33.94	53.32	74	-20.68	Horizontal	
17100	19.02	42.92	38.11	28.97	52.8	68.2	-21.2	Horizontal	

Test mode:		802.11n(HT20)		Frequency(MHz):		5745		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7093.172	10.64	36.46	38.3	41.09	49.89	68.2	-24.11	Vertical	
9007.715	11.8	36.61	37.3	38.92	50.03	74	-23.97	Vertical	
11490	14.01	38.09	37.8	32.75	47.05	68.2	-26.95	Vertical	
12775.54	14.93	38.84	39.08	35.07	49.76	68.2	-24.24	Vertical	
16010.72	17.5	41.23	39.49	32.73	51.97	74	-22.03	Vertical	
17235	19.5	43.08	37.98	28.01	52.61	68.2	-21.39	Vertical	
7664.34	10.88	36.4	37.72	40.3	49.86	74	-24.14	Horizontal	
9937.399	12.68	37.59	36.83	39.27	52.71	68.2	-21.29	Horizontal	
11490	14.01	38.09	37.8	33.17	47.47	68.2	-26.53	Horizontal	
13804.27	16.03	38.97	40.27	36.74	51.47	68.2	-22.53	Horizontal	
16010.72	17.5	41.23	39.49	34.33	53.57	74	-20.43	Horizontal	
17235	19.5	43.08	37.98	28.61	53.21	68.2	-20.79	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 173 of 283

Test mode:		802.11n(HT20)		Frequency(MHz):		5785		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7120.02	10.65	36.45	38.27	41.13	49.96	68.2		-24.04	Vertical
9007.715	11.8	36.61	37.3	38.83	49.94	74		-24.06	Vertical
11570	14.09	38.17	37.88	32.8	47.18	68.2		-26.82	Vertical
12751.43	14.86	38.85	39.06	35.86	50.51	68.2		-23.49	Vertical
15830.29	17.34	41.27	39.67	33.93	52.87	74		-21.13	Vertical
17355	19.92	43.23	37.87	27.29	52.57	68.2		-21.43	Vertical
7678.832	10.89	36.41	37.71	41.71	51.3	74		-22.7	Horizontal
9659.786	12.53	37.53	36.96	39.37	52.47	68.2		-21.53	Horizontal
11570	14.09	38.17	37.88	32.78	47.16	68.2		-26.84	Horizontal
13217.38	15.61	38.71	39.57	36.71	51.46	68.2		-22.54	Horizontal
15800.41	17.31	41.28	39.69	34.21	53.11	74		-20.89	Horizontal
17355	19.92	43.23	37.87	27.59	52.87	68.2		-21.13	Horizontal

Test mode:		802.11n(HT20)		Frequency(MHz):		5825		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7106.583	10.64	36.46	38.29	41.94	50.75	68.2		-23.25	Vertical
8328.564	11.58	36.2	37.37	40.53	50.94	74		-23.06	Vertical
11650	14.18	38.25	37.96	32.54	47.01	68.2		-26.99	Vertical
13830.37	16.06	39	40.3	36.98	51.74	68.2		-22.26	Vertical
16627.15	17.87	42.73	38.68	30.88	52.8	68.2		-21.2	Vertical
17475	20.33	43.37	37.77	27.4	53.33	68.2		-20.67	Vertical
7106.583	10.64	36.46	38.29	41.34	50.15	68.2		-23.85	Horizontal
8990.716	11.79	36.59	37.3	39.16	50.24	68.2		-23.76	Horizontal
11650	14.18	38.25	37.96	34.13	48.6	68.2		-25.4	Horizontal
13778.22	16	38.94	40.24	37.09	51.79	68.2		-22.21	Horizontal
16010.72	17.5	41.23	39.49	32.37	51.61	74		-22.39	Horizontal
17475	20.33	43.37	37.77	27.72	53.65	68.2		-20.35	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 174 of 283

Test mode:		802.11ac(HT20)		Frequency(MHz):		5180		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7093.172	10.64	36.46	38.3	41.79	50.59	68.2		-23.41	Vertical
8990.716	11.79	36.59	37.3	39.61	50.69	68.2		-23.31	Vertical
10360	12.98	37.24	36.99	35.14	48.37	68.2		-25.63	Vertical
11734.47	14.27	38.34	38.04	36.25	50.82	68.2		-23.18	Vertical
15540	17.07	41.38	39.95	33.53	52.03	74		-21.97	Vertical
17596.58	20.75	43.58	37.66	26.28	52.95	68.2		-21.05	Vertical
7678.832	10.89	36.41	37.71	41.25	50.84	74		-23.16	Horizontal
8990.716	11.79	36.59	37.3	39.29	50.37	68.2		-23.63	Horizontal
10360	12.98	37.24	36.99	35.58	48.81	68.2		-25.19	Horizontal
12751.43	14.86	38.85	39.06	37.01	51.66	68.2		-22.34	Horizontal
15540	17.07	41.38	39.95	32.76	51.26	74		-22.74	Horizontal
17830.8	21.55	44	37.45	24.79	52.89	74		-21.11	Horizontal

Test mode:		802.11ac(HT20)		Frequency(MHz):		5200		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7664.34	10.88	36.4	37.72	40.5	50.06	74		-23.94	Vertical
8328.564	11.58	36.2	37.37	41.15	51.56	74		-22.44	Vertical
10440	13.04	37.16	37.03	34.11	47.28	68.2		-26.72	Vertical
12751.43	14.86	38.85	39.06	36.64	51.29	68.2		-22.71	Vertical
15660	17.18	41.34	39.83	34.04	52.73	74		-21.27	Vertical
17464.13	20.3	43.36	37.78	27.12	53	68.2		-21	Vertical
7678.832	10.89	36.41	37.71	42.22	51.81	74		-22.19	Horizontal
9659.786	12.53	37.53	36.96	40.03	53.13	68.2		-20.87	Horizontal
10440	13.04	37.16	37.03	33.42	46.59	68.2		-27.41	Horizontal
12751.43	14.86	38.85	39.06	37.35	52	68.2		-22	Horizontal
15660	17.18	41.34	39.83	33.14	51.83	74		-22.17	Horizontal
17830.8	21.55	44	37.45	25.28	53.38	74		-20.62	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 175 of 283

Test mode:		802.11ac(HT20)		Frequency(MHz):		5240		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7120.02	10.65	36.45	38.27	41.57	50.4	68.2		-23.6	Vertical
8990.716	11.79	36.59	37.3	39.55	50.63	68.2		-23.37	Vertical
10480	13.07	37.12	37.05	33.25	46.39	68.2		-27.61	Vertical
13192.44	15.6	38.72	39.54	35.41	50.19	68.2		-23.81	Vertical
15720	17.24	41.31	39.77	33.48	52.26	74		-21.74	Vertical
17864.51	21.66	44.06	37.42	25.34	53.64	74		-20.36	Vertical
7079.786	10.63	36.47	38.32	41.38	50.16	68.2		-23.84	Horizontal
8328.564	11.58	36.2	37.37	42.93	53.34	74		-20.66	Horizontal
10480	13.07	37.12	37.05	34.08	47.22	68.2		-26.78	Horizontal
12775.54	14.93	38.84	39.08	38.23	52.92	68.2		-21.08	Horizontal
15720	17.24	41.31	39.77	33.89	52.67	74		-21.33	Horizontal
17830.8	21.55	44	37.45	25.35	53.45	74		-20.55	Horizontal

Test mode:		802.11ac(HT20)		Frequency(MHz):		5260		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
8328.564	11.58	36.2	37.37	41.19	51.6	74		-22.4	Vertical
10520	13.1	37.12	37.07	32.71	45.86	68.2		-28.14	Vertical
11756.66	14.3	38.36	38.06	35.56	50.16	68.2		-23.84	Vertical
13804.27	16.03	38.97	40.27	36.46	51.19	68.2		-22.81	Vertical
15780	17.29	41.29	39.71	34.64	53.51	74		-20.49	Vertical
17830.8	21.55	44	37.45	24.88	52.98	74		-21.02	Vertical
7678.832	10.89	36.41	37.71	40.94	50.53	74		-23.47	Horizontal
10520	13.1	37.12	37.07	32.37	45.52	68.2		-28.48	Horizontal
11734.47	14.27	38.34	38.04	37.04	51.61	68.2		-22.39	Horizontal
13192.44	15.6	38.72	39.54	36.16	50.94	68.2		-23.06	Horizontal
15780	17.29	41.29	39.71	33.61	52.48	74		-21.52	Horizontal
17898.29	21.78	44.12	37.39	24.75	53.26	74		-20.74	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 176 of 283

Test mode:		802.11ac(HT20)		Frequency(MHz):		5300		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
8328.564	11.58	36.2	37.37	40.29	50.7	74	-23.3	Vertical	
10600	13.16	37.22	37.11	33.09	46.36	68.2	-27.64	Vertical	
11756.66	14.3	38.36	38.06	36.85	51.45	68.2	-22.55	Vertical	
13804.27	16.03	38.97	40.27	37.47	52.2	68.2	-21.8	Vertical	
15900	17.41	41.24	39.6	33.7	52.75	74	-21.25	Vertical	
17864.51	21.66	44.06	37.42	25.02	53.32	74	-20.68	Vertical	
7133.481	10.65	36.45	38.26	41.06	49.9	68.2	-24.1	Horizontal	
9007.715	11.8	36.61	37.3	39.27	50.38	74	-23.62	Horizontal	
10600	13.16	37.22	37.11	33.47	46.74	68.2	-27.26	Horizontal	
13217.38	15.61	38.71	39.57	37.33	52.08	68.2	-21.92	Horizontal	
15900	17.41	41.24	39.6	32.81	51.86	74	-22.14	Horizontal	
17830.8	21.55	44	37.45	25.23	53.33	74	-20.67	Horizontal	

Test mode:		802.11ac(HT20)		Frequency(MHz):		5320		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7106.583	10.64	36.46	38.29	41.42	50.23	68.2	-23.77	Vertical	
8328.564	11.58	36.2	37.37	40.98	51.39	74	-22.61	Vertical	
10640	13.19	37.27	37.13	34.42	47.75	68.2	-26.25	Vertical	
12775.54	14.93	38.84	39.08	36.93	51.62	68.2	-22.38	Vertical	
14512.85	16.4	40.42	40.5	35.17	51.49	68.2	-22.51	Vertical	
15960	17.46	41.22	39.54	33.57	52.71	74	-21.29	Vertical	
8328.564	11.58	36.2	37.37	41.1	51.51	74	-22.49	Horizontal	
10640	13.19	37.27	37.13	33.75	47.08	68.2	-26.92	Horizontal	
11734.47	14.27	38.34	38.04	37.47	52.04	68.2	-21.96	Horizontal	
13192.44	15.6	38.72	39.54	35.58	50.36	68.2	-23.64	Horizontal	
15960	17.46	41.22	39.54	33.85	52.99	74	-21.01	Horizontal	
17932.13	21.89	44.18	37.36	24.5	53.21	74	-20.79	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 177 of 283

Test mode:		802.11ac(HT20)		Frequency(MHz):		5500		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
7664.34	10.88	36.4	37.72	41.19	50.75	74	-23.25	Vertical	
9659.786	12.53	37.53	36.96	39.8	52.9	68.2	-21.1	Vertical	
11000	13.45	37.7	37.3	32.48	46.33	68.2	-27.67	Vertical	
12775.54	14.93	38.84	39.08	37.24	51.93	68.2	-22.07	Vertical	
14512.85	16.4	40.42	40.5	36.54	52.86	68.2	-21.14	Vertical	
16500	17.59	42.7	38.84	31.35	52.8	68.2	-21.2	Vertical	
7039.78	10.62	36.48	38.36	41.39	50.13	68.2	-23.87	Horizontal	
8990.716	11.79	36.59	37.3	39.1	50.18	68.2	-23.82	Horizontal	
11000	13.45	37.7	37.3	32.9	46.75	68.2	-27.25	Horizontal	
12751.43	14.86	38.85	39.06	36.3	50.95	68.2	-23.05	Horizontal	
14485.46	16.39	40.37	40.5	36.82	53.08	74	-20.92	Horizontal	
16500	17.59	42.7	38.84	30.66	52.11	68.2	-21.89	Horizontal	

Test mode:		802.11ac(HT20)		Frequency(MHz):		5580		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
7026.495	10.61	36.49	38.37	43.34	52.07	68.2	-21.93	Vertical	
8344.312	11.61	36.18	37.36	40.41	50.84	74	-23.16	Vertical	
11160	13.68	37.86	37.51	34.16	48.19	68.2	-25.81	Vertical	
12751.43	14.86	38.85	39.06	35.57	50.22	68.2	-23.78	Vertical	
14512.85	16.4	40.42	40.5	36.5	52.82	68.2	-21.18	Vertical	
16740	18.24	42.76	38.45	30.56	53.11	68.2	-20.89	Vertical	
7678.832	10.89	36.41	37.71	42.13	51.72	74	-22.28	Horizontal	
9659.786	12.53	37.53	36.96	39.42	52.52	68.2	-21.48	Horizontal	
11160	13.68	37.86	37.51	34	48.03	68.2	-25.97	Horizontal	
13217.38	15.61	38.71	39.57	35.73	50.48	68.2	-23.52	Horizontal	
15014.78	16.55	41.3	40.48	35.22	52.59	68.2	-21.41	Horizontal	
16740	18.24	42.76	38.45	30.14	52.69	68.2	-21.31	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 178 of 283

Test mode:		802.11ac(HT20)		Frequency(MHz):		5700		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
7678.832	10.89	36.41	37.71	40.47	50.06	74	-23.94	Vertical	
9659.786	12.53	37.53	36.96	39.92	53.02	68.2	-20.98	Vertical	
11400	13.91	38.02	37.71	34.25	48.47	68.2	-25.53	Vertical	
13167.54	15.59	38.73	39.51	36.98	51.79	68.2	-22.21	Vertical	
15214.63	16.75	41.34	40.28	35.18	52.99	68.2	-21.01	Vertical	
17100	19.02	42.92	38.11	29.41	53.24	68.2	-20.76	Vertical	
7026.495	10.61	36.49	38.37	43.28	52.01	68.2	-21.99	Horizontal	
9862.599	12.64	37.57	36.87	39.42	52.76	68.2	-21.24	Horizontal	
11400	13.91	38.02	37.71	35.09	49.31	68.2	-24.69	Horizontal	
13804.27	16.03	38.97	40.27	37.04	51.77	68.2	-22.23	Horizontal	
15800.41	17.31	41.28	39.69	34.03	52.93	74	-21.07	Horizontal	
17100	19.02	42.92	38.11	29.5	53.33	68.2	-20.67	Horizontal	

Test mode:		802.11ac(HT20)		Frequency(MHz):		5745		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
7079.786	10.63	36.47	38.32	41.98	50.76	68.2	-23.24	Vertical	
9007.715	11.8	36.61	37.3	39.37	50.48	74	-23.52	Vertical	
11490	14.01	38.09	37.8	34.65	48.95	68.2	-25.05	Vertical	
13882.72	16.12	39.06	40.36	36.24	51.06	68.2	-22.94	Vertical	
15800.41	17.31	41.28	39.69	33.75	52.65	74	-21.35	Vertical	
17235	19.5	43.08	37.98	28.15	52.75	68.2	-21.25	Vertical	
7678.832	10.89	36.41	37.71	40.66	50.25	74	-23.75	Horizontal	
8990.716	11.79	36.59	37.3	38.98	50.06	68.2	-23.94	Horizontal	
11490	14.01	38.09	37.8	32.43	46.73	68.2	-27.27	Horizontal	
13167.54	15.59	38.73	39.51	34.77	49.58	68.2	-24.42	Horizontal	
14512.85	16.4	40.42	40.5	36.72	53.04	68.2	-20.96	Horizontal	
17235	19.5	43.08	37.98	28.35	52.95	68.2	-21.05	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 179 of 283

Test mode:		802.11ac(HT20)		Frequency(MHz):		5785		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
8328.564	11.58	36.2	37.37	41.47	51.88	74		-22.12	Vertical
10069.67	12.76	37.53	36.84	39.61	53.06	68.2		-20.94	Vertical
11570	14.09	38.17	37.88	33.53	47.91	68.2		-26.09	Vertical
13804.27	16.03	38.97	40.27	37.42	52.15	68.2		-21.85	Vertical
16010.72	17.5	41.23	39.49	33.44	52.68	74		-21.32	Vertical
17355	19.92	43.23	37.87	28.03	53.31	68.2		-20.69	Vertical
7106.583	10.64	36.46	38.29	41.04	49.85	68.2		-24.15	Horizontal
8344.312	11.61	36.18	37.36	42.02	52.45	74		-21.55	Horizontal
11570	14.09	38.17	37.88	33.35	47.73	68.2		-26.27	Horizontal
12775.54	14.93	38.84	39.08	36.69	51.38	68.2		-22.62	Horizontal
14929.94	16.52	41.18	40.5	36.08	53.28	68.2		-20.72	Horizontal
17355	19.92	43.23	37.87	28.26	53.54	68.2		-20.46	Horizontal

Test mode:		802.11ac(HT20)		Frequency(MHz):		5825		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7093.172	10.64	36.46	38.3	40.81	49.61	68.2		-24.39	Vertical
9659.786	12.53	37.53	36.96	39.39	52.49	68.2		-21.51	Vertical
11650	14.18	38.25	37.96	32.75	47.22	68.2		-26.78	Vertical
13830.37	16.06	39	40.3	35.78	50.54	68.2		-23.46	Vertical
16040.99	17.51	41.32	39.45	33.82	53.2	74		-20.8	Vertical
17475	20.33	43.37	37.77	27.45	53.38	68.2		-20.62	Vertical
7093.172	10.64	36.46	38.3	41.47	50.27	68.2		-23.73	Horizontal
8328.564	11.58	36.2	37.37	41.5	51.91	74		-22.09	Horizontal
9993.873	12.71	37.6	36.8	39	52.51	68.2		-21.49	Horizontal
11650	14.18	38.25	37.96	33.25	47.72	68.2		-26.28	Horizontal
14845.57	16.5	41.03	40.5	36.17	53.2	68.2		-20.8	Horizontal
17475	20.33	43.37	37.77	26.71	52.64	68.2		-21.36	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 180 of 283

Test mode:		802.11n(HT40)		Frequency(MHz):		5190		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7664.34	10.88	36.4	37.72	40.98	50.54	74	-23.46	Vertical	
10380	13	37.22	37	36.66	49.88	68.2	-24.12	Vertical	
11734.47	14.27	38.34	38.04	36.22	50.79	68.2	-23.21	Vertical	
13830.37	16.06	39	40.3	36.76	51.52	68.2	-22.48	Vertical	
15570	17.09	41.37	39.92	34.31	52.85	74	-21.15	Vertical	
17830.8	21.55	44	37.45	24.53	52.63	74	-21.37	Vertical	
7678.832	10.89	36.41	37.71	41.5	51.09	74	-22.91	Horizontal	
10380	13	37.22	37	36.75	49.97	68.2	-24.03	Horizontal	
11734.47	14.27	38.34	38.04	37.19	51.76	68.2	-22.24	Horizontal	
13167.54	15.59	38.73	39.51	34.51	49.32	68.2	-24.68	Horizontal	
15570	17.09	41.37	39.92	33.43	51.97	74	-22.03	Horizontal	
17830.8	21.55	44	37.45	24.95	53.05	74	-20.95	Horizontal	

Test mode:		802.11n(HT40)		Frequency(MHz):		5230		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7079.786	10.63	36.47	38.32	42.81	51.59	68.2	-22.41	Vertical	
8344.312	11.61	36.18	37.36	42.29	52.72	74	-21.28	Vertical	
10460	13.06	37.14	37.04	34.77	47.93	68.2	-26.07	Vertical	
12751.43	14.86	38.85	39.06	37.51	52.16	68.2	-21.84	Vertical	
15690	17.21	41.32	39.8	33.97	52.7	74	-21.3	Vertical	
17830.8	21.55	44	37.45	25.24	53.34	74	-20.66	Vertical	
7693.35	10.9	36.42	37.69	40.74	50.37	74	-23.63	Horizontal	
8328.564	11.58	36.2	37.37	41.7	52.11	74	-21.89	Horizontal	
10460	13.06	37.14	37.04	34.21	47.37	68.2	-26.63	Horizontal	
13242.37	15.61	38.7	39.6	35.38	50.09	68.2	-23.91	Horizontal	
15690	17.21	41.32	39.8	34.28	53.01	74	-20.99	Horizontal	
17830.8	21.55	44	37.45	24.96	53.06	74	-20.94	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 181 of 283

Test mode:		802.11n(HT40)		Frequency(MHz):		5270		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7106.583	10.64	36.46	38.29	41.08	49.89	68.2	-24.11	Vertical	
9659.786	12.53	37.53	36.96	39.73	52.83	68.2	-21.17	Vertical	
10540	13.12	37.15	37.08	32.64	45.83	68.2	-28.17	Vertical	
13167.54	15.59	38.73	39.51	35.46	50.27	68.2	-23.73	Vertical	
15810	17.32	41.28	39.69	33.88	52.79	74	-21.21	Vertical	
17797.15	21.44	43.94	37.48	25.34	53.24	74	-20.76	Vertical	
7678.832	10.89	36.41	37.71	41.35	50.94	74	-23.06	Horizontal	
9659.786	12.53	37.53	36.96	39.84	52.94	68.2	-21.06	Horizontal	
10540	13.12	37.15	37.08	32.88	46.07	68.2	-27.93	Horizontal	
13830.37	16.06	39	40.3	36.97	51.73	68.2	-22.27	Horizontal	
15810	17.32	41.28	39.69	34.54	53.45	74	-20.55	Horizontal	
17966.03	22.01	44.24	37.33	24.23	53.15	74	-20.85	Horizontal	

Test mode:		802.11n(HT40)		Frequency(MHz):		5310		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7678.832	10.89	36.41	37.71	40.81	50.4	74	-23.6	Vertical	
9007.715	11.8	36.61	37.3	39.08	50.19	74	-23.81	Vertical	
10620	13.18	37.25	37.12	34.9	48.21	68.2	-25.79	Vertical	
13167.54	15.59	38.73	39.51	36.12	50.93	68.2	-23.07	Vertical	
15930	17.43	41.23	39.57	32.64	51.73	74	-22.27	Vertical	
17730.04	21.21	43.82	37.54	25.95	53.44	74	-20.56	Vertical	
8344.312	11.61	36.18	37.36	41.82	52.25	74	-21.75	Horizontal	
10620	13.18	37.25	37.12	33.63	46.94	68.2	-27.06	Horizontal	
11734.47	14.27	38.34	38.04	35.99	50.56	68.2	-23.44	Horizontal	
13804.27	16.03	38.97	40.27	36.91	51.64	68.2	-22.36	Horizontal	
15930	17.43	41.23	39.57	34.49	53.58	74	-20.42	Horizontal	
17830.8	21.55	44	37.45	24.43	52.53	74	-21.47	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 182 of 283

Test mode:		802.11n(HT40)		Frequency(MHz):		5510		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
8344.312	11.61	36.18	37.36	42.29	52.72	74		-21.28	Vertical
9659.786	12.53	37.53	36.96	40.15	53.25	68.2		-20.75	Vertical
11020	13.47	37.72	37.32	35.43	49.3	68.2		-24.7	Vertical
12751.43	14.86	38.85	39.06	35.55	50.2	68.2		-23.8	Vertical
14485.46	16.39	40.37	40.5	36.05	52.31	74		-21.69	Vertical
16530	17.66	42.71	38.8	31.77	53.34	68.2		-20.66	Vertical
7093.172	10.64	36.46	38.3	40.92	49.72	68.2		-24.28	Horizontal
9007.715	11.8	36.61	37.3	39.34	50.45	74		-23.55	Horizontal
11020	13.47	37.72	37.32	34.33	48.2	68.2		-25.8	Horizontal
12775.54	14.93	38.84	39.08	35.43	50.12	68.2		-23.88	Horizontal
14512.85	16.4	40.42	40.5	36.16	52.48	68.2		-21.52	Horizontal
16530	17.66	42.71	38.8	31	52.57	68.2		-21.43	Horizontal

Test mode:		802.11n(HT40)		Frequency(MHz):		5550		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7006.614	10.6	36.5	38.39	41.98	50.69	68.2		-23.31	Vertical
8344.312	11.61	36.18	37.36	40.82	51.25	74		-22.75	Vertical
11100	13.66	37.85	37.49	34.53	48.55	68.2		-25.45	Vertical
12751.43	14.86	38.85	39.06	36.16	50.81	68.2		-23.19	Vertical
14650.57	16.44	40.67	40.5	35.47	52.08	68.2		-21.92	Vertical
16650	18.18	42.75	38.49	30.64	53.08	68.2		-20.92	Vertical
7079.786	10.63	36.47	38.32	40.95	49.73	68.2		-24.27	Horizontal
8990.716	11.79	36.59	37.3	38.67	49.75	68.2		-24.25	Horizontal
11100	13.66	37.85	37.49	33.92	47.94	68.2		-26.06	Horizontal
13804.27	16.03	38.97	40.27	37.04	51.77	68.2		-22.23	Horizontal
15534.07	17.06	41.39	39.96	34.46	52.95	74		-21.05	Horizontal
16650	18.18	42.75	38.49	29.93	52.37	68.2		-21.63	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 183 of 283

Test mode:		802.11n(HT40)		Frequency(MHz):		5670		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7120.02	10.65	36.45	38.27	41.05	49.88	68.2		-24.12	Vertical
8328.564	11.58	36.2	37.37	41.77	52.18	74		-21.82	Vertical
11340	13.84	37.97	37.65	35.17	49.33	68.2		-24.67	Vertical
13217.38	15.61	38.71	39.57	35.45	50.2	68.2		-23.8	Vertical
15157.26	16.7	41.33	40.34	35.84	53.53	68.2		-20.47	Vertical
17010	18.71	42.81	38.19	28.97	52.3	68.2		-21.7	Vertical
7678.832	10.89	36.41	37.71	41.19	50.78	74		-23.22	Horizontal
9659.786	12.53	37.53	36.96	40.05	53.15	68.2		-20.85	Horizontal
11340	13.84	37.97	37.65	35.42	49.58	68.2		-24.42	Horizontal
12775.54	14.93	38.84	39.08	35.97	50.66	68.2		-23.34	Horizontal
14512.85	16.4	40.42	40.5	36.36	52.68	68.2		-21.32	Horizontal
17010	18.71	42.81	38.19	29.79	53.12	68.2		-20.88	Horizontal

Test mode:		802.11n(HT40)		Frequency(MHz):		5755		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	41.88	51.47	74		-22.53	Vertical
9993.873	12.71	37.6	36.8	38.66	52.17	68.2		-21.83	Vertical
11510	14.03	38.11	37.82	33.98	48.3	68.2		-25.7	Vertical
13217.38	15.61	38.71	39.57	35.23	49.98	68.2		-24.02	Vertical
15417.14	16.95	41.38	40.07	35.04	53.3	74		-20.7	Vertical
17265	19.6	43.12	37.96	28.75	53.51	68.2		-20.49	Vertical
7160.481	10.66	36.43	38.23	40.74	49.6	68.2		-24.4	Horizontal
9007.715	11.8	36.61	37.3	38.23	49.34	74		-24.66	Horizontal
11510	14.03	38.11	37.82	33.07	47.39	68.2		-26.61	Horizontal
13217.38	15.61	38.71	39.57	34.47	49.22	68.2		-24.78	Horizontal
15157.26	16.7	41.33	40.34	35.23	52.92	68.2		-21.08	Horizontal
17265	19.6	43.12	37.96	28.5	53.26	68.2		-20.74	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 184 of 283

Test mode:		802.11n(HT40)		Frequency(MHz):		5795		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7093.172	10.64	36.46	38.3	41.02	49.82	68.2	-24.18	Vertical	
8328.564	11.58	36.2	37.37	41.09	51.5	74	-22.5	Vertical	
11590	14.12	38.19	37.9	32.87	47.28	68.2	-26.72	Vertical	
12751.43	14.86	38.85	39.06	35.52	50.17	68.2	-23.83	Vertical	
15214.63	16.75	41.34	40.28	35.22	53.03	68.2	-20.97	Vertical	
17385	20.02	43.26	37.85	27.95	53.38	68.2	-20.62	Vertical	
7093.172	10.64	36.46	38.3	41.99	50.79	68.2	-23.21	Horizontal	
9659.786	12.53	37.53	36.96	39.7	52.8	68.2	-21.2	Horizontal	
11590	14.12	38.19	37.9	33.52	47.93	68.2	-26.07	Horizontal	
13830.37	16.06	39	40.3	36.37	51.13	68.2	-22.87	Horizontal	
15740.83	17.26	41.3	39.75	34.4	53.21	74	-20.79	Horizontal	
17385	20.02	43.26	37.85	28.02	53.45	68.2	-20.55	Horizontal	

Test mode:		802.11ac(HT40)		Frequency(MHz):		5190		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
9007.715	11.8	36.61	37.3	39.06	50.17	74	-23.83	Vertical	
10380	13	37.22	37	36.89	50.11	68.2	-23.89	Vertical	
11712.33	14.25	38.31	38.02	37.1	51.64	68.2	-22.36	Vertical	
13778.22	16	38.94	40.24	38.02	52.72	68.2	-21.28	Vertical	
15570	17.09	41.37	39.92	33.94	52.48	74	-21.52	Vertical	
17763.56	21.32	43.88	37.51	25.56	53.25	74	-20.75	Vertical	
7678.832	10.89	36.41	37.71	41.57	51.16	74	-22.84	Horizontal	
10380	13	37.22	37	36.22	49.44	68.2	-24.56	Horizontal	
11067.07	13.53	37.75	37.37	37.39	51.3	68.2	-22.7	Horizontal	
12751.43	14.86	38.85	39.06	36.69	51.34	68.2	-22.66	Horizontal	
15570	17.09	41.37	39.92	33.09	51.63	74	-22.37	Horizontal	
17830.8	21.55	44	37.45	25.5	53.6	74	-20.4	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 185 of 283

Test mode:		802.11ac(HT40)		Frequency(MHz):		5230		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7678.832	10.89	36.41	37.71	41.29	50.88	74	-23.12	Vertical	
10460	13.06	37.14	37.04	35.09	48.25	68.2	-25.75	Vertical	
11734.47	14.27	38.34	38.04	36.15	50.72	68.2	-23.28	Vertical	
13804.27	16.03	38.97	40.27	37.59	52.32	68.2	-21.68	Vertical	
15690	17.21	41.32	39.8	33.97	52.7	74	-21.3	Vertical	
17797.15	21.44	43.94	37.48	25.48	53.38	74	-20.62	Vertical	
7093.172	10.64	36.46	38.3	41.87	50.67	68.2	-23.33	Horizontal	
10460	13.06	37.14	37.04	34.08	47.24	68.2	-26.76	Horizontal	
11734.47	14.27	38.34	38.04	37.15	51.72	68.2	-22.28	Horizontal	
13217.38	15.61	38.71	39.57	34.54	49.29	68.2	-24.71	Horizontal	
15690	17.21	41.32	39.8	33.89	52.62	74	-21.38	Horizontal	
17797.15	21.44	43.94	37.48	25.48	53.38	74	-20.62	Horizontal	

Test mode:		802.11ac(HT40)		Frequency(MHz):		5270		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
9007.715	11.8	36.61	37.3	38.2	49.31	74	-24.69	Vertical	
10540	13.12	37.15	37.08	33.23	46.42	68.2	-27.58	Vertical	
11756.66	14.3	38.36	38.06	35.88	50.48	68.2	-23.52	Vertical	
13804.27	16.03	38.97	40.27	37.91	52.64	68.2	-21.36	Vertical	
15810	17.32	41.28	39.69	33.99	52.9	74	-21.1	Vertical	
17797.15	21.44	43.94	37.48	25.37	53.27	74	-20.73	Vertical	
7678.832	10.89	36.41	37.71	40.89	50.48	74	-23.52	Horizontal	
10540	13.12	37.15	37.08	32.74	45.93	68.2	-28.07	Horizontal	
11734.47	14.27	38.34	38.04	37.28	51.85	68.2	-22.15	Horizontal	
13778.22	16	38.94	40.24	35.76	50.46	68.2	-23.54	Horizontal	
15810	17.32	41.28	39.69	34.35	53.26	74	-20.74	Horizontal	
17629.85	20.87	43.64	37.63	26.23	53.11	68.2	-20.89	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 186 of 283

Test mode:		802.11ac(HT40)		Frequency(MHz):		5310		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7106.583	10.64	36.46	38.29	41.13	49.94	68.2		-24.06	Vertical
9659.786	12.53	37.53	36.96	39.67	52.77	68.2		-21.23	Vertical
10620	13.18	37.25	37.12	34.63	47.94	68.2		-26.06	Vertical
12751.43	14.86	38.85	39.06	36.81	51.46	68.2		-22.54	Vertical
15930	17.43	41.23	39.57	34.25	53.34	74		-20.66	Vertical
17932.13	21.89	44.18	37.36	24.27	52.98	74		-21.02	Vertical
7106.583	10.64	36.46	38.29	41.93	50.74	68.2		-23.26	Horizontal
8328.564	11.58	36.2	37.37	42.2	52.61	74		-21.39	Horizontal
10620	13.18	37.25	37.12	34.09	47.4	68.2		-26.6	Horizontal
13778.22	16	38.94	40.24	36.04	50.74	68.2		-23.26	Horizontal
15930	17.43	41.23	39.57	33.92	53.01	74		-20.99	Horizontal
17797.15	21.44	43.94	37.48	24.37	52.27	74		-21.73	Horizontal

Test mode:		802.11ac(HT40)		Frequency(MHz):		5510		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
8344.312	11.61	36.18	37.36	40.69	51.12	74		-22.88	Vertical
9659.786	12.53	37.53	36.96	39.57	52.67	68.2		-21.33	Vertical
11020	13.47	37.72	37.32	35.28	49.15	68.2		-24.85	Vertical
12775.54	14.93	38.84	39.08	37.31	52	68.2		-22	Vertical
14485.46	16.39	40.37	40.5	36.57	52.83	74		-21.17	Vertical
16530	17.66	42.71	38.8	31.81	53.38	68.2		-20.62	Vertical
8328.564	11.58	36.2	37.37	40.84	51.25	74		-22.75	Horizontal
10012.77	12.72	37.59	36.81	39.98	53.48	68.2		-20.52	Horizontal
11020	13.47	37.72	37.32	35.51	49.38	68.2		-24.62	Horizontal
12751.43	14.86	38.85	39.06	36.72	51.37	68.2		-22.63	Horizontal
14901.76	16.51	41.13	40.5	35.56	52.7	68.2		-21.3	Horizontal
16530	17.66	42.71	38.8	30.66	52.23	68.2		-21.77	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 187 of 283

Test mode:		802.11ac(HT40)		Frequency(MHz):		5550		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7093.172	10.64	36.46	38.3	41.1	49.9	68.2	-24.1	Vertical	
8328.564	11.58	36.2	37.37	40.66	51.07	74	-22.93	Vertical	
11100	13.66	37.85	37.49	34.94	48.96	68.2	-25.04	Vertical	
13217.38	15.61	38.71	39.57	37.25	52	68.2	-22	Vertical	
14929.94	16.52	41.18	40.5	35.96	53.16	68.2	-20.84	Vertical	
16650	18.18	42.75	38.49	30.43	52.87	68.2	-21.13	Vertical	
7053.09	10.62	36.48	38.34	42.81	51.57	68.2	-22.43	Horizontal	
8344.312	11.61	36.18	37.36	42.27	52.7	74	-21.3	Horizontal	
11100	13.66	37.85	37.49	34.7	48.72	68.2	-25.28	Horizontal	
13117.89	15.58	38.75	39.45	35.43	50.31	68.2	-23.69	Horizontal	
15800.41	17.31	41.28	39.69	33.96	52.86	74	-21.14	Horizontal	
16650	18.18	42.75	38.49	30.15	52.59	68.2	-21.41	Horizontal	

Test mode:		802.11ac(HT40)		Frequency(MHz):		5670		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line Over Limit (dB)	Polarization	
7678.832	10.89	36.41	37.71	41.28	50.87	74	-23.13	Vertical	
9007.715	11.8	36.61	37.3	39.68	50.79	74	-23.21	Vertical	
11340	13.84	37.97	37.65	34.68	48.84	68.2	-25.16	Vertical	
13804.27	16.03	38.97	40.27	37.72	52.45	68.2	-21.55	Vertical	
16010.72	17.5	41.23	39.49	33.69	52.93	74	-21.07	Vertical	
17010	18.71	42.81	38.19	29.37	52.7	68.2	-21.3	Vertical	
7013.235	10.61	36.49	38.39	42.32	51.03	68.2	-22.97	Horizontal	
9007.715	11.8	36.61	37.3	39.1	50.21	74	-23.79	Horizontal	
11340	13.84	37.97	37.65	34.93	49.09	68.2	-24.91	Horizontal	
12751.43	14.86	38.85	39.06	35.84	50.49	68.2	-23.51	Horizontal	
14929.94	16.52	41.18	40.5	36.33	53.53	68.2	-20.47	Horizontal	
17010	18.71	42.81	38.19	29.3	52.63	68.2	-21.37	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 188 of 283

Test mode:		802.11ac(HT40)		Frequency(MHz):		5755		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
7019.862	10.61	36.49	38.38	41.82	50.54	68.2	-23.46	Vertical	
8344.312	11.61	36.18	37.36	41.89	52.32	74	-21.68	Vertical	
11510	14.03	38.11	37.82	33.7	48.02	68.2	-25.98	Vertical	
14567.78	16.42	40.52	40.5	36.34	52.78	68.2	-21.22	Vertical	
16223.83	17.54	41.88	39.2	32.5	52.72	68.2	-21.28	Vertical	
17265	19.6	43.12	37.96	28.59	53.35	68.2	-20.65	Vertical	
7678.832	10.89	36.41	37.71	41.1	50.69	74	-23.31	Horizontal	
9659.786	12.53	37.53	36.96	39.98	53.08	68.2	-20.92	Horizontal	
11510	14.03	38.11	37.82	34.22	48.54	68.2	-25.46	Horizontal	
12751.43	14.86	38.85	39.06	35.73	50.38	68.2	-23.62	Horizontal	
14485.46	16.39	40.37	40.5	36.37	52.63	74	-21.37	Horizontal	
17265	19.6	43.12	37.96	28.62	53.38	68.2	-20.62	Horizontal	

Test mode:		802.11ac(HT40)		Frequency(MHz):		5795		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
7678.832	10.89	36.41	37.71	41.16	50.75	74	-23.25	Vertical	
9881.246	12.65	37.58	36.86	39.68	53.05	68.2	-20.95	Vertical	
11590	14.12	38.19	37.9	33.91	48.32	68.2	-25.68	Vertical	
12775.54	14.93	38.84	39.08	35.65	50.34	68.2	-23.66	Vertical	
14512.85	16.4	40.42	40.5	36.43	52.75	68.2	-21.25	Vertical	
17385	20.02	43.26	37.85	27.64	53.07	68.2	-20.93	Vertical	
7664.34	10.88	36.4	37.72	40.29	49.85	74	-24.15	Horizontal	
9659.786	12.53	37.53	36.96	39.7	52.8	68.2	-21.2	Horizontal	
11590	14.12	38.19	37.9	32.96	47.37	68.2	-26.63	Horizontal	
13778.22	16	38.94	40.24	37.13	51.83	68.2	-22.17	Horizontal	
16040.99	17.51	41.32	39.45	33.5	52.88	74	-21.12	Horizontal	
17385	20.02	43.26	37.85	27.33	52.76	68.2	-21.24	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 189 of 283

Test mode:		802.11ac(HT80)		Frequency(MHz):		5210		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7678.832	10.89	36.41	37.71	40.38	49.97	74		-24.03	Vertical
9659.786	12.53	37.53	36.96	39.91	53.01	68.2		-20.99	Vertical
10420	13.03	37.18	37.02	36.47	49.66	68.2		-24.34	Vertical
12751.43	14.86	38.85	39.06	36.72	51.37	68.2		-22.63	Vertical
15630	17.15	41.35	39.86	34.23	52.87	74		-21.13	Vertical
17830.8	21.55	44	37.45	24.67	52.77	74		-21.23	Vertical
7093.172	10.64	36.46	38.3	41.77	50.57	68.2		-23.43	Horizontal
8990.716	11.79	36.59	37.3	39.78	50.86	68.2		-23.14	Horizontal
10420	13.03	37.18	37.02	36.25	49.44	68.2		-24.56	Horizontal
12775.54	14.93	38.84	39.08	38.31	53	68.2		-21	Horizontal
15630	17.15	41.35	39.86	34.14	52.78	74		-21.22	Horizontal
17797.15	21.44	43.94	37.48	25.45	53.35	74		-20.65	Horizontal

Test mode:		802.11ac(HT80)		Frequency(MHz):		5290		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
8328.564	11.58	36.2	37.37	41.37	51.78	74		-22.22	Vertical
10580	13.15	37.2	37.1	34.29	47.54	68.2		-26.46	Vertical
11734.47	14.27	38.34	38.04	37.32	51.89	68.2		-22.11	Vertical
13778.22	16	38.94	40.24	36.75	51.45	68.2		-22.55	Vertical
15870	17.38	41.25	39.63	33.11	52.11	74		-21.89	Vertical
17830.8	21.55	44	37.45	25.31	53.41	74		-20.59	Vertical
7160.481	10.66	36.43	38.23	40.94	49.8	68.2		-24.2	Horizontal
8990.716	11.79	36.59	37.3	39.08	50.16	68.2		-23.84	Horizontal
10580	13.15	37.2	37.1	39.63	52.88	68.2		-21.12	Horizontal
13804.27	16.03	38.97	40.27	38.19	52.92	68.2		-21.08	Horizontal
15870	17.38	41.25	39.63	32.11	51.11	74		-22.89	Horizontal
17830.8	21.55	44	37.45	24.66	52.76	74		-21.24	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 190 of 283

Test mode:		802.11ac(HT80)		Frequency(MHz):		5530		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7093.172	10.64	36.46	38.3	41.34	50.14	68.2		-23.86	Vertical
8328.564	11.58	36.2	37.37	41.01	51.42	74		-22.58	Vertical
11060	13.52	37.75	37.36	35.22	49.13	68.2		-24.87	Vertical
12751.43	14.86	38.85	39.06	35.85	50.5	68.2		-23.5	Vertical
14567.78	16.42	40.52	40.5	36.24	52.68	68.2		-21.32	Vertical
16590	17.79	42.72	38.72	29.53	51.32	68.2		-22.68	Vertical
7678.832	10.89	36.41	37.71	40.81	50.4	74		-23.6	Horizontal
9956.188	12.69	37.59	36.82	39.23	52.69	68.2		-21.31	Horizontal
11060	13.52	37.75	37.36	38.21	52.12	68.2		-21.88	Horizontal
13804.27	16.03	38.97	40.27	37.22	51.95	68.2		-22.05	Horizontal
16590	17.79	42.72	38.72	31.1	52.89	68.2		-21.11	Horizontal
17932.13	21.89	44.18	37.36	24.5	53.21	74		-20.79	Horizontal

Test mode:		802.11ac(HT80)		Frequency(MHz):		5775		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Line (dBuV/m)	Over Limit (dB)	Polarization
7664.34	10.88	36.4	37.72	41.74	51.3	74		-22.7	Vertical
8990.716	11.79	36.59	37.3	39.03	50.11	68.2		-23.89	Vertical
11550	14.07	38.15	37.86	35.11	49.47	68.2		-24.53	Vertical
13117.89	15.58	38.75	39.45	36.17	51.05	68.2		-22.95	Vertical
14929.94	16.52	41.18	40.5	35.98	53.18	68.2		-20.82	Vertical
17325	19.81	43.19	37.9	27.51	52.61	68.2		-21.39	Vertical
7106.583	10.64	36.46	38.29	41.36	50.17	68.2		-23.83	Horizontal
9007.715	11.8	36.61	37.3	38.81	49.92	74		-24.08	Horizontal
11550	14.07	38.15	37.86	34.85	49.21	68.2		-24.79	Horizontal
13192.44	15.6	38.72	39.54	35.97	50.75	68.2		-23.25	Horizontal
14929.94	16.52	41.18	40.5	35.92	53.12	68.2		-20.88	Horizontal
17325	19.81	43.19	37.9	26.54	51.64	68.2		-22.36	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803


Page: 191 of 283

Remark:


- 1) The disturbance below 1GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15, Subpart C 15.209 & 15.407(b)		
Test Method:	KDB 789033 D02 II G		
Test Site:	Measurement Distance: 3m		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

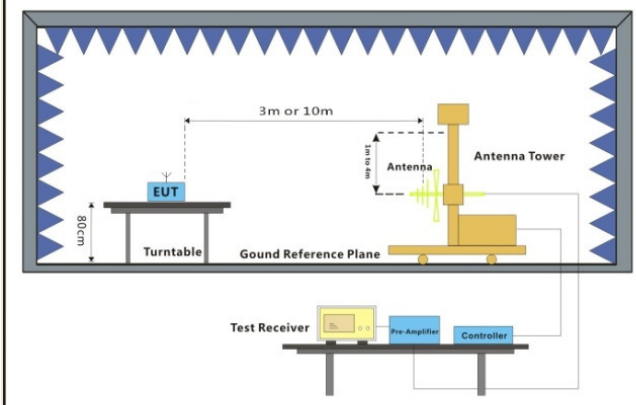

30MHz-1GHz

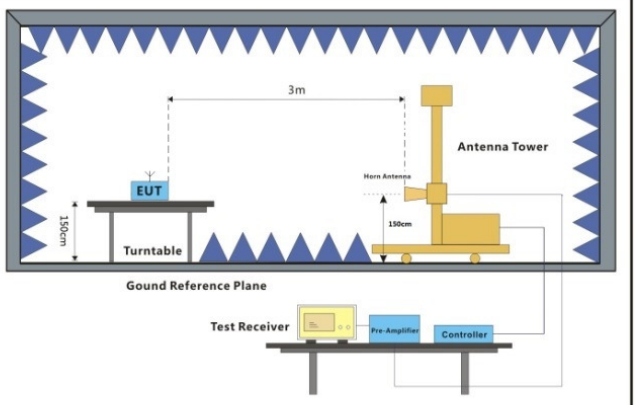

Above 1GHz



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803

Page: 193 of 283

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 3 meter semi-anechoic/full-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.																							
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates and both antennas.																							
Final Test Mode:	Through Pre-scan, find the worst case for each modulation type is below: <table><tr><td>Modulation Type</td><td>Data Rate</td><td>Antenna</td></tr><tr><td>802.11a</td><td>6Mbps</td><td>SISO: Antenna a</td></tr><tr><td>802.11n(HT20)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11n(HT40)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11ac(HT20)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11ac(HT40)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr><tr><td>802.11ac(HT80)</td><td>MCS0</td><td>MIMO: Antenna a+b</td></tr></table> For below 1GHz, through Pre-scan, find the 6Mbps of rate of 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.			Modulation Type	Data Rate	Antenna	802.11a	6Mbps	SISO: Antenna a	802.11n(HT20)	MCS0	MIMO: Antenna a+b	802.11n(HT40)	MCS0	MIMO: Antenna a+b	802.11ac(HT20)	MCS0	MIMO: Antenna a+b	802.11ac(HT40)	MCS0	MIMO: Antenna a+b	802.11ac(HT80)	MCS0	MIMO: Antenna a+b
Modulation Type	Data Rate	Antenna																						
802.11a	6Mbps	SISO: Antenna a																						
802.11n(HT20)	MCS0	MIMO: Antenna a+b																						
802.11n(HT40)	MCS0	MIMO: Antenna a+b																						
802.11ac(HT20)	MCS0	MIMO: Antenna a+b																						
802.11ac(HT40)	MCS0	MIMO: Antenna a+b																						
802.11ac(HT80)	MCS0	MIMO: Antenna a+b																						
Instruments Used:	Refer to section 5.10 for details																							
Test Results:	Pass																							




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 194 of 283

Test plot as follows:

Test mode:	802.11a	Frequency(MHz):	5180	Vertical
------------	---------	-----------------	------	----------

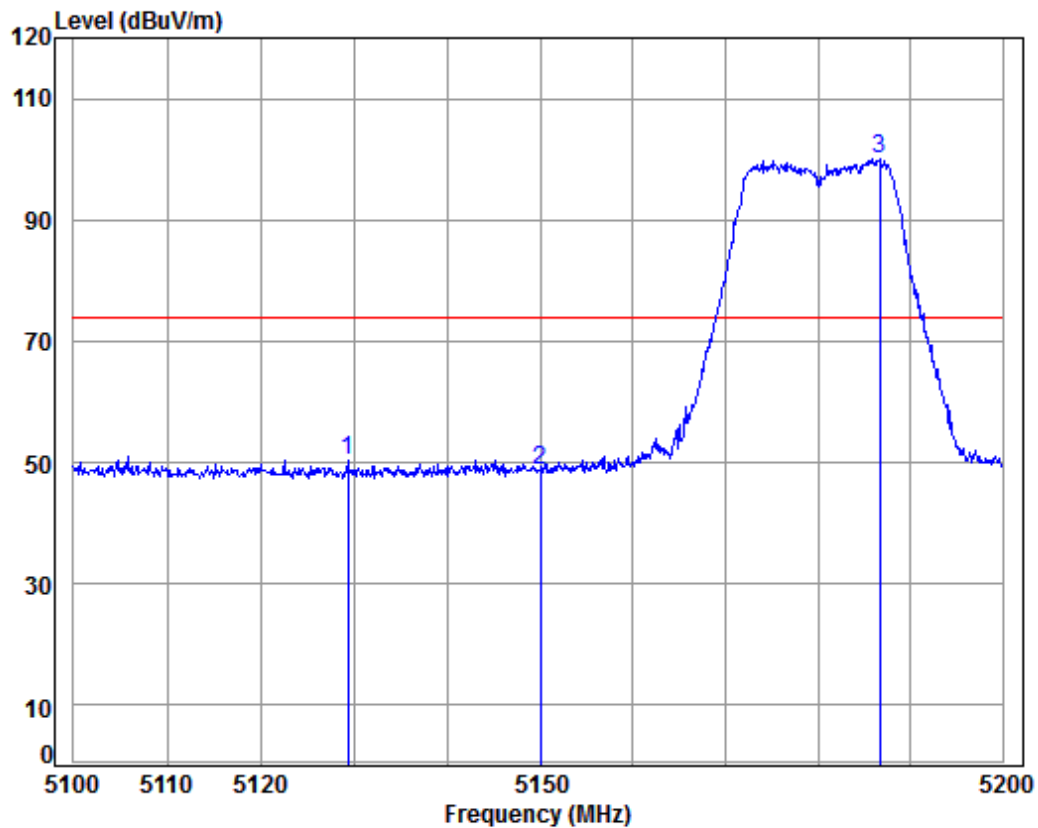

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5180 Bandedge
: WIFI-A20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5129.298	8.07	34.47	38.47	46.26	50.33	74.00	-23.67	
2	5150.000	8.08	34.47	38.47	44.50	48.58	74.00	-25.42	
3 pp	5186.688	8.10	34.46	38.46	95.92	100.02	74.00	26.02	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 195 of 283

Test mode:	802.11a	Frequency(MHz):	5180	Horizontal
------------	---------	-----------------	------	------------

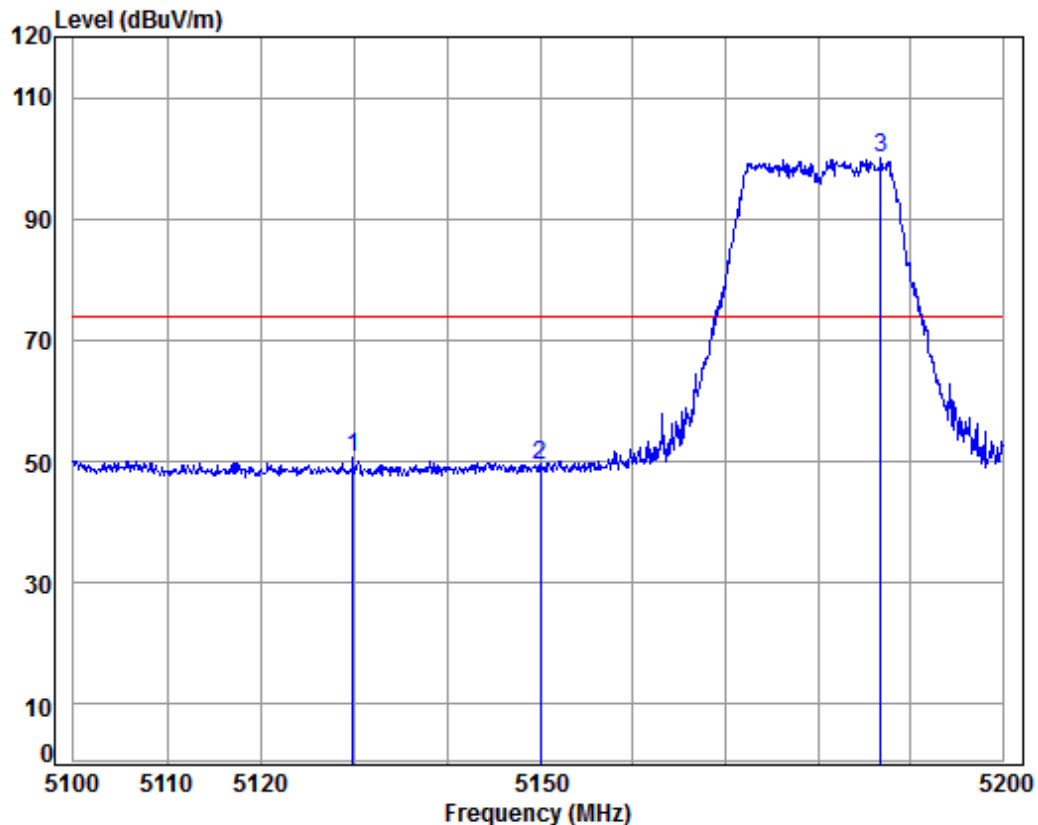

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5180 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5129.896	8.07	34.47	38.47	46.53	50.60	74.00	-23.40	
2	5150.000	8.08	34.47	38.47	45.20	49.28	74.00	-24.72	
3 pp	5186.789	8.10	34.46	38.46	95.80	99.90	74.00	25.90	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 196 of 283

Test mode:	802.11a	Frequency(MHz):	5240	Vertical
------------	---------	-----------------	------	----------

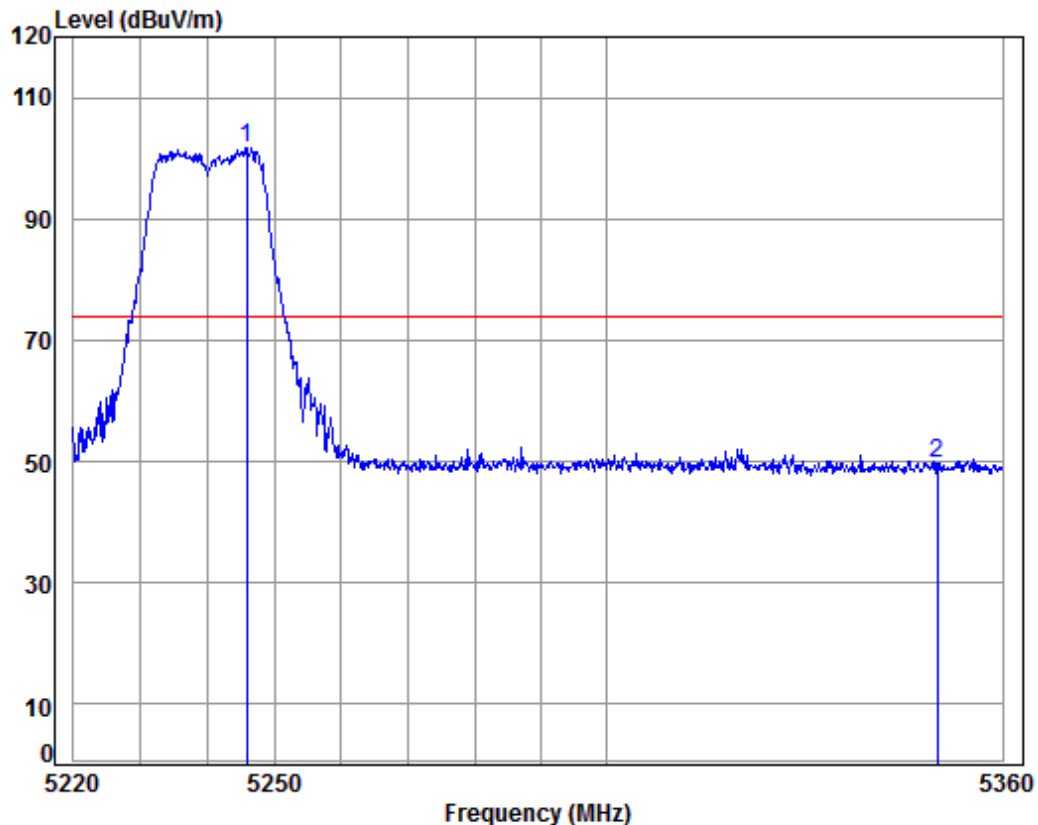

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5240 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5245.899	8.13	34.45	38.45	97.68	101.81	74.00	27.81	
2	5350.000	8.18	34.43	38.43	45.36	49.54	74.00	-24.46	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 197 of 283

Test mode:	802.11a	Frequency(MHz):	5240	Horizontal
------------	---------	-----------------	------	------------

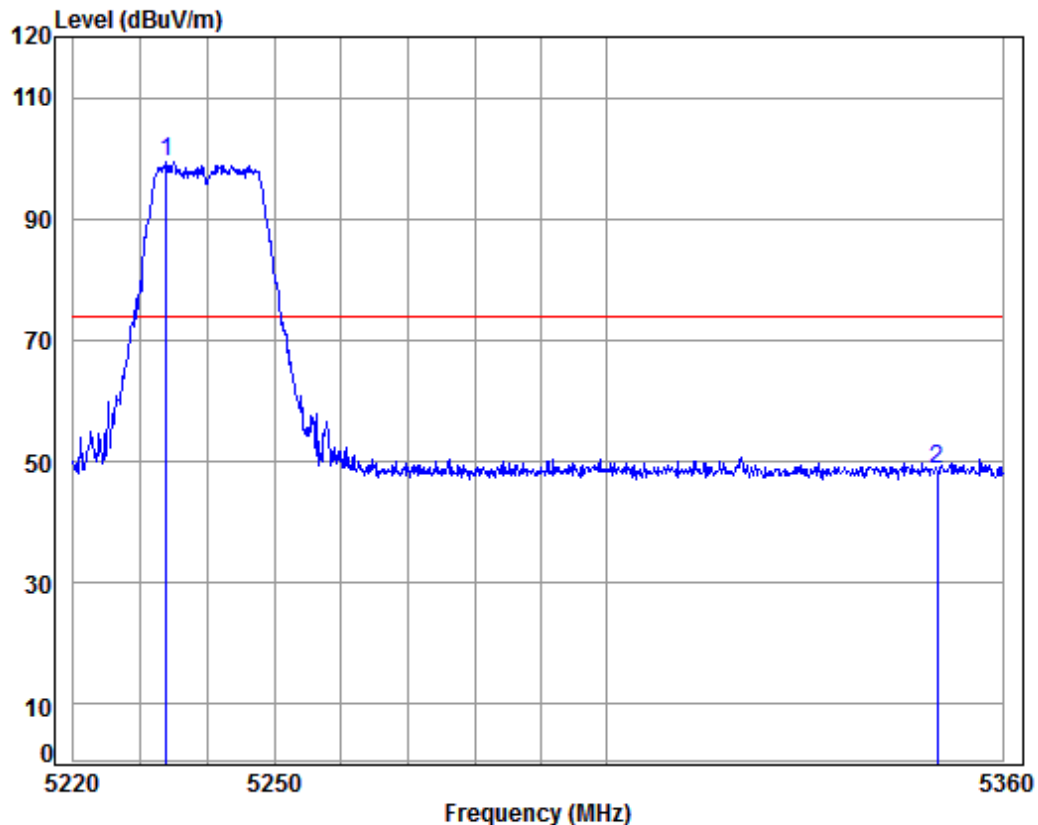

Condition: 3m HORIZONTAL
Job No: : 11090CR
Mode: : 5240 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5233.834	8.12	34.45	38.45	95.25	99.37	74.00	25.37	
2	5350.000	8.18	34.43	38.43	44.42	48.60	74.00	-25.40	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 198 of 283

Test mode:	802.11a	Frequency(MHz):	5260	Vertical
------------	---------	-----------------	------	----------

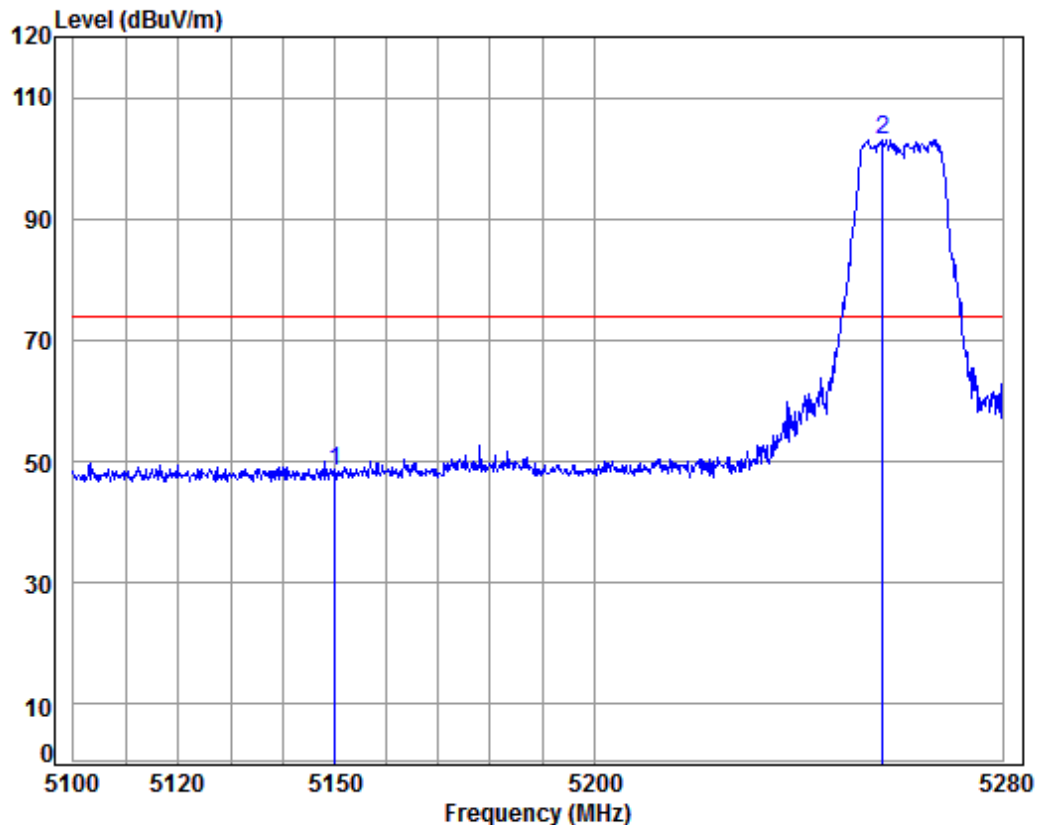

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5260 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.16	48.24	74.00	-25.76	
2 pp	5256.428	8.13	34.45	38.45	98.93	103.06	74.00	29.06	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 199 of 283

Test mode:	802.11a	Frequency(MHz):	5260	Horizontal
------------	---------	-----------------	------	------------

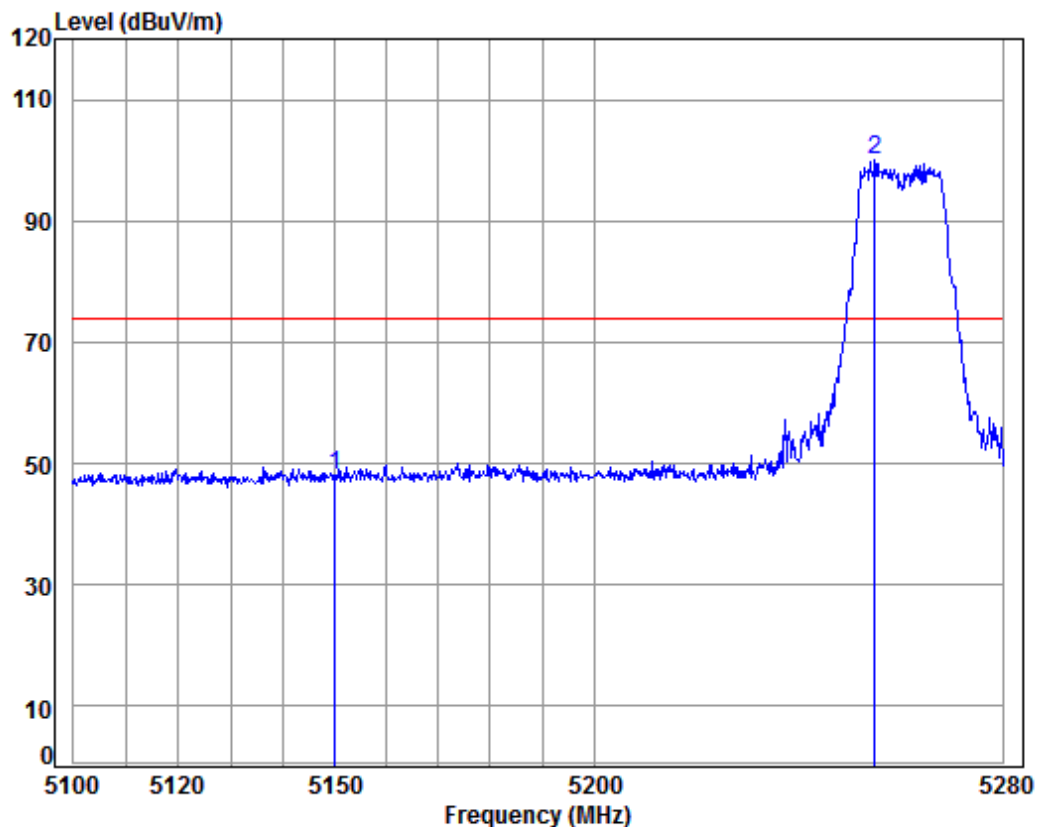

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5260 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.09	48.17	74.00	-25.83	
2 pp	5254.787	8.13	34.45	38.45	95.79	99.92	74.00	25.92	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 200 of 283

Test mode:	802.11a	Frequency(MHz):	5320	Vertical
------------	---------	-----------------	------	----------

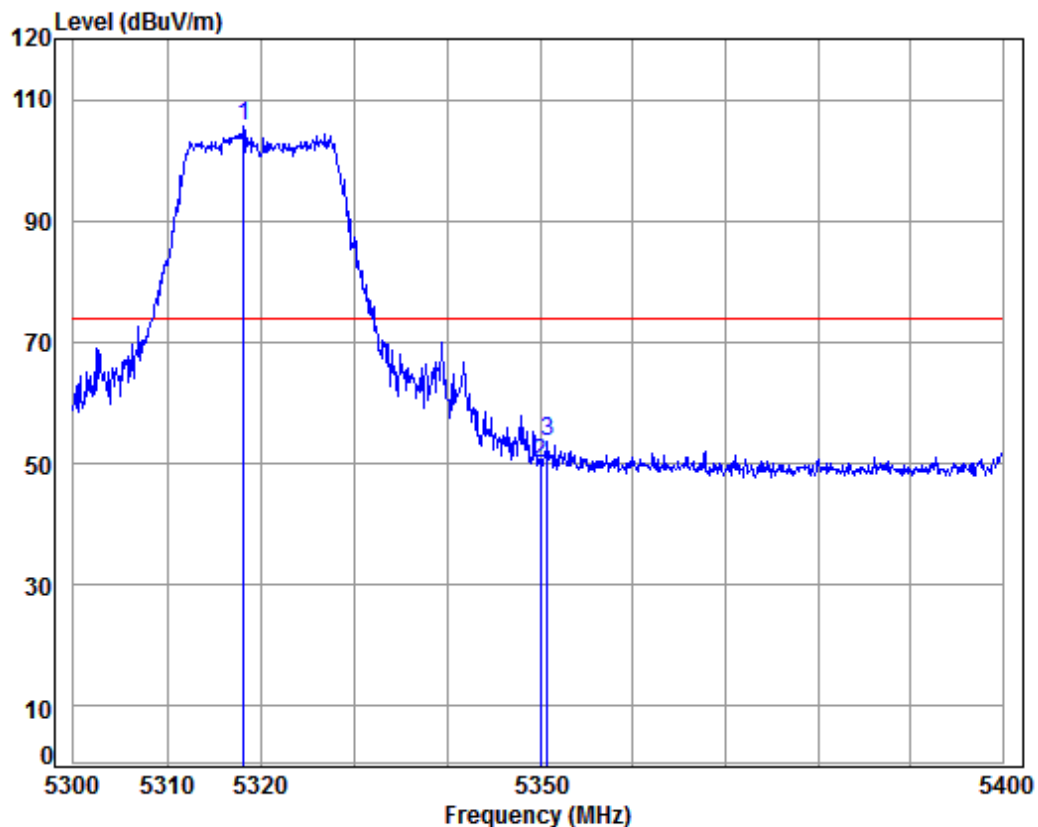

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5320 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5318.161	8.16	34.44	38.44	101.39	105.55	74.00	31.55	
2	5350.000	8.18	34.43	38.43	45.85	50.03	74.00	-23.97	
3	5350.767	8.18	34.43	38.43	49.35	53.53	74.00	-20.47	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 202 of 283

Test mode:	802.11a	Frequency(MHz):	5500	Vertical
------------	---------	-----------------	------	----------

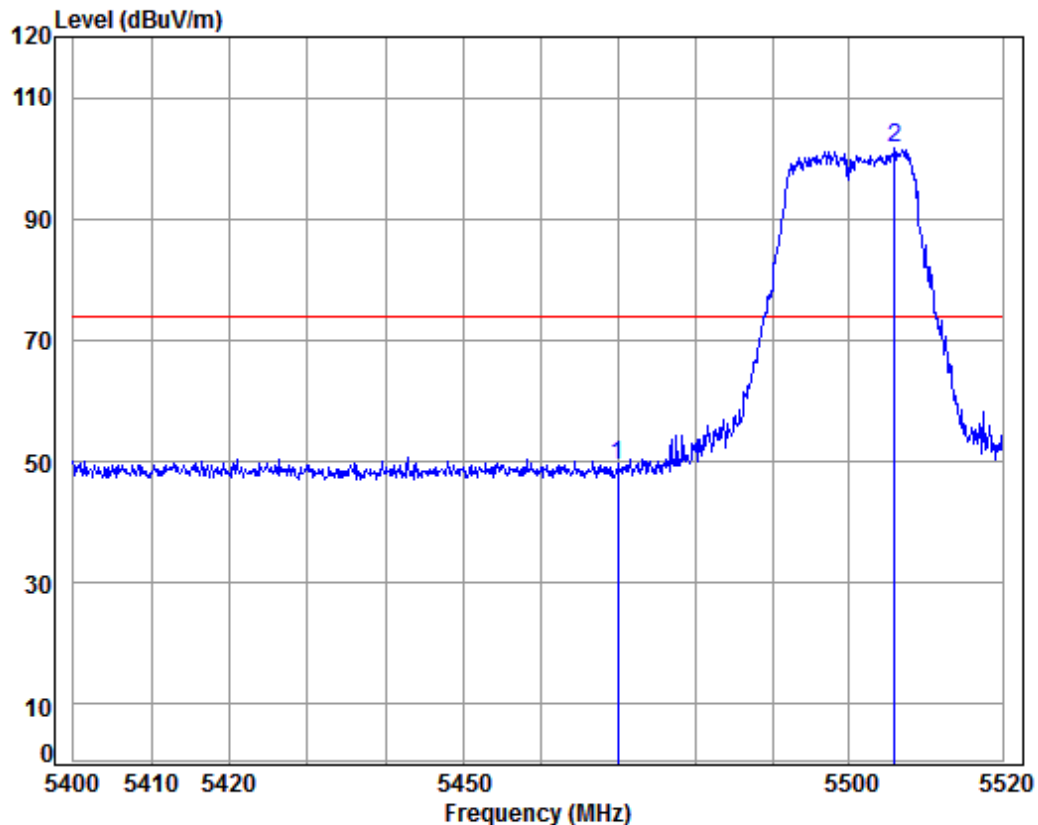

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5500 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5470.000	8.24	34.41	38.41	45.21	49.45	74.00	-24.55	
2 pp	5505.944	8.26	34.40	38.40	97.39	101.65	74.00	27.65	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 203 of 283

Test mode:	802.11a	Frequency(MHz):	5500	Horizontal
------------	---------	-----------------	------	------------

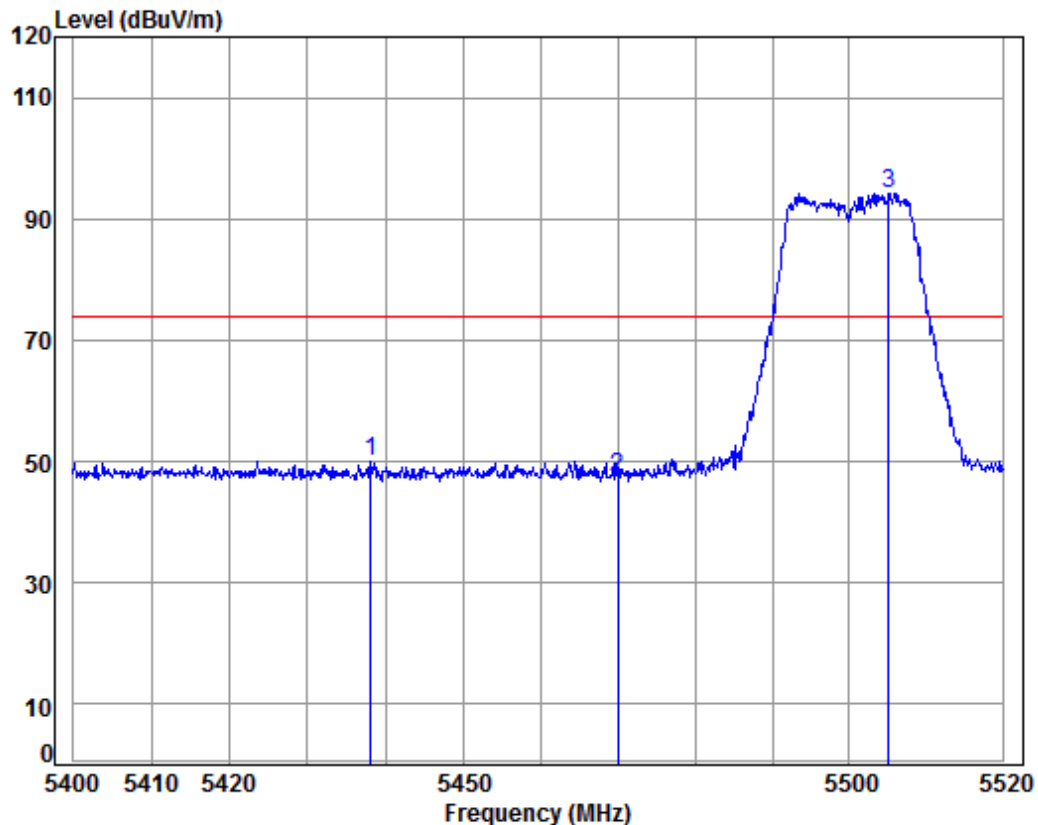

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5500 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5438.113	8.22	34.41	38.41	45.80	50.02	74.00	-23.98	
2	5470.000	8.24	34.41	38.41	43.23	47.47	74.00	-26.53	
3 pp	5505.097	8.26	34.40	38.40	89.95	94.21	74.00	20.21	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 204 of 283

Test mode:	802.11a	Frequency(MHz):	5700	Vertical
------------	---------	-----------------	------	----------

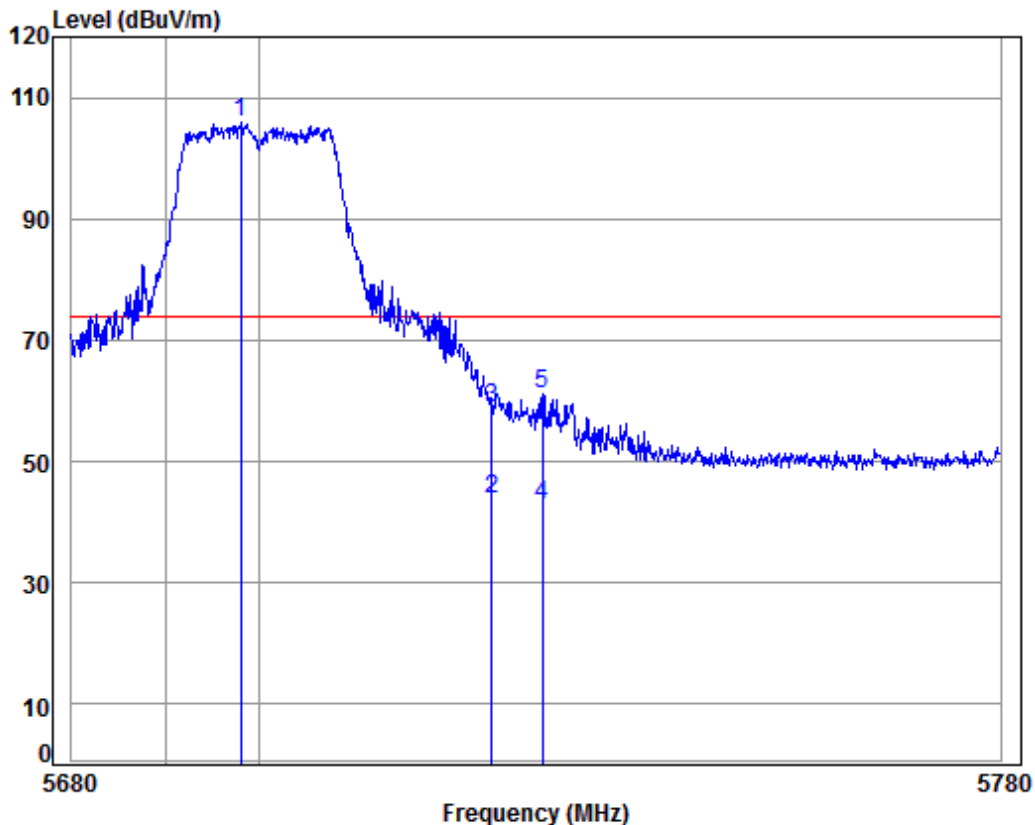

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5700 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5698.070	8.45	34.52	38.36	101.40	106.01	74.00	32.01	
2 av	5725.000	8.48	34.54	38.35	39.18	43.85	54.00	-10.15	Average
3	5725.000	8.48	34.54	38.35	54.30	58.97	74.00	-15.03	Peak
4	5730.482	8.49	34.54	38.35	38.30	42.98	54.00	-11.02	Average
5 pk	5730.482	8.49	34.54	38.35	56.44	61.12	74.00	-12.88	Peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 205 of 283

Test mode:	802.11a	Frequency(MHz):	5700	Horizontal
------------	---------	-----------------	------	------------

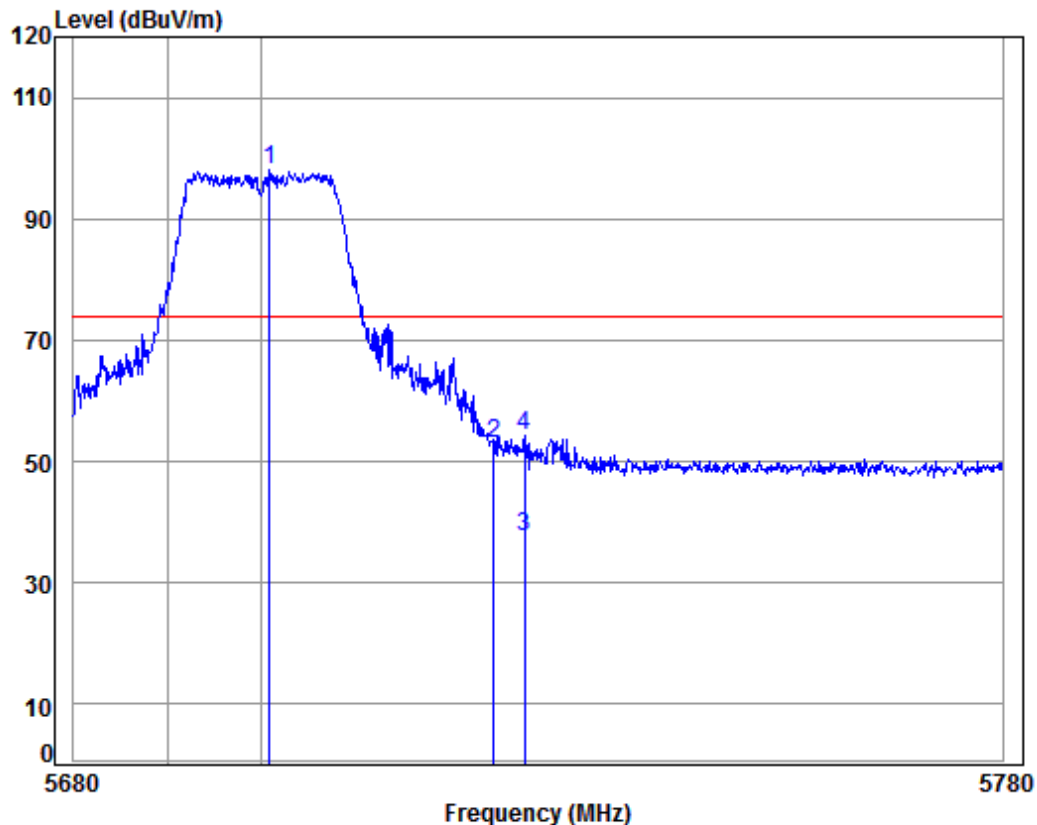

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5700 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.955	8.46	34.52	38.36	93.32	97.94	74.00	23.94	
2	5725.000	8.48	34.54	38.35	48.29	52.96	74.00	-21.04	
3 av	5728.382	8.48	34.54	38.35	32.95	37.62	54.00	-16.38	Average
4 pk	5728.382	8.48	34.54	38.35	49.69	54.36	74.00	-19.64	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 206 of 283

Test mode:	802.11a	Frequency(MHz):	5745	Vertical
------------	---------	-----------------	------	----------

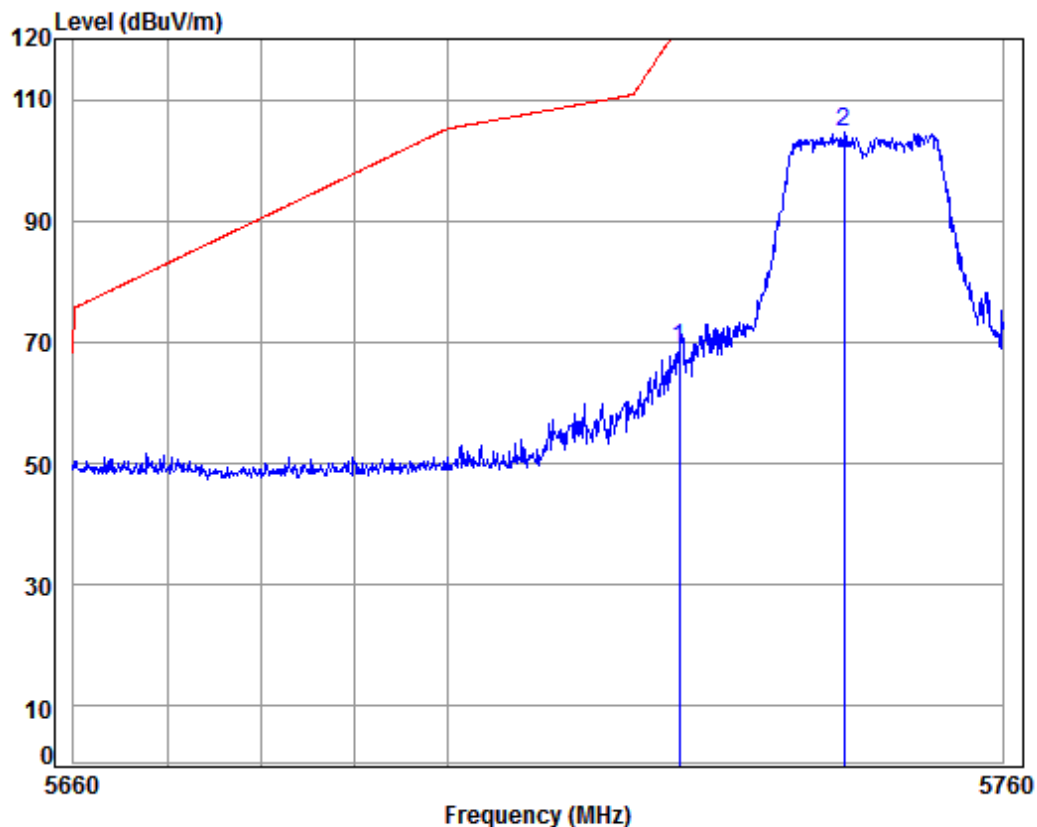

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5745 Bandedge
: WIFI-A20


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pk 5725.000	8.48	34.54	38.35	64.41	69.08	122.20	-53.12	Peak
2 pp 5742.775	8.50	34.55	38.35	100.05	104.75	125.20	-20.45	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 207 of 283

Test mode:	802.11a	Frequency(MHz):	5745	Horizontal
------------	---------	-----------------	------	------------

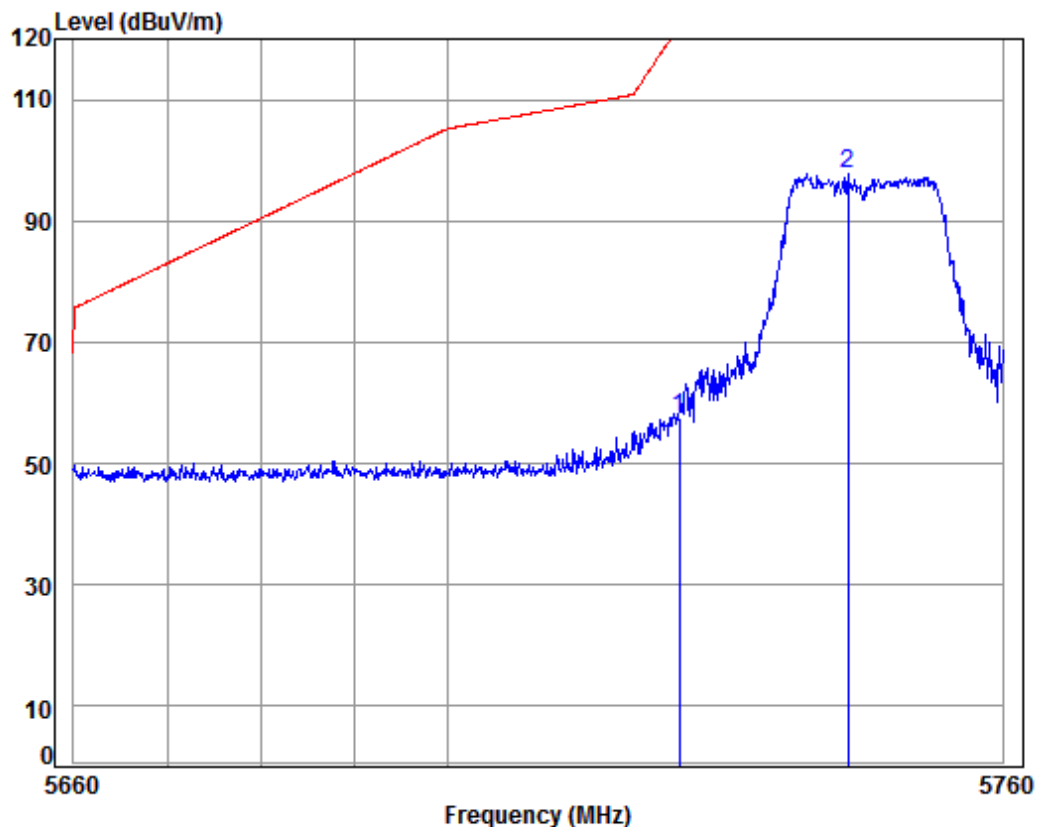

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5745 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	8.48	34.54	38.35	52.74	57.41	122.20	-64.79	
2 pp	5743.278	8.50	34.55	38.35	93.09	97.79	125.20	-27.41	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 208 of 283

Test mode:	802.11a	Frequency(MHz):	5825	Vertical
------------	---------	-----------------	------	----------

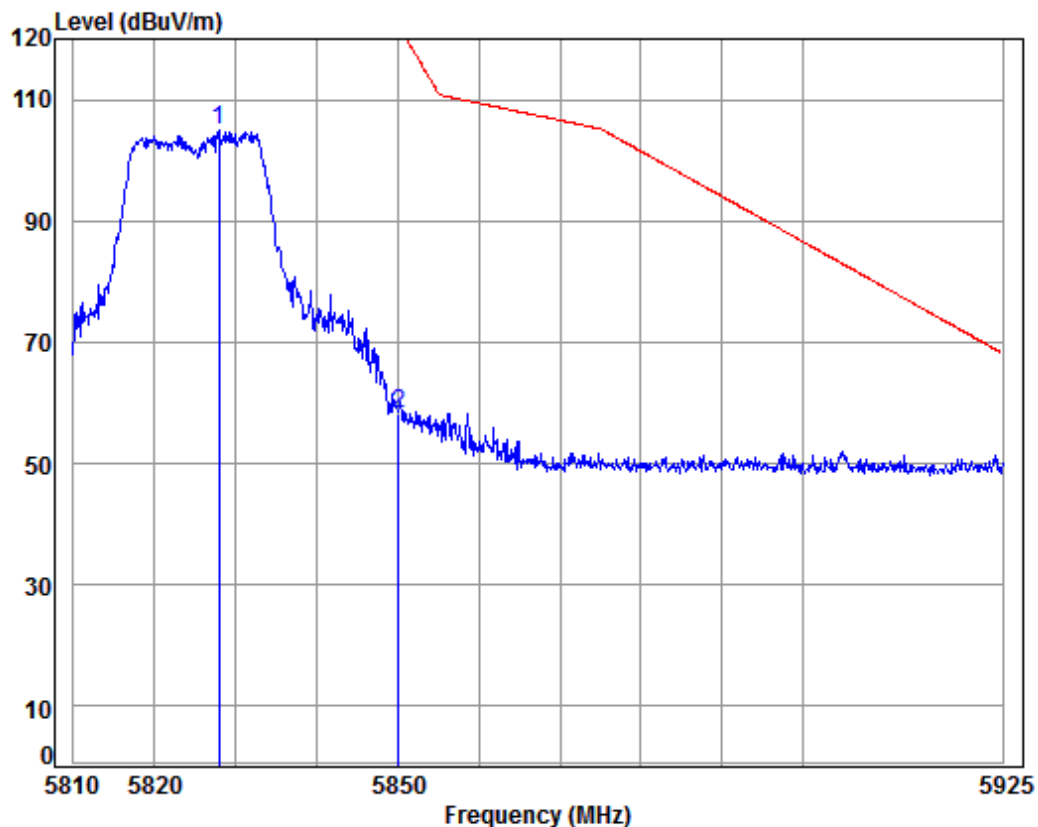

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5825 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5827.906	8.58	34.60	38.33	100.04	104.89	125.20	-20.31	
2	5850.000	8.60	34.61	38.33	53.19	58.07	122.20	-64.13	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 209 of 283

Test mode:	802.11a	Frequency(MHz):	5825	Horizontal
------------	---------	-----------------	------	------------

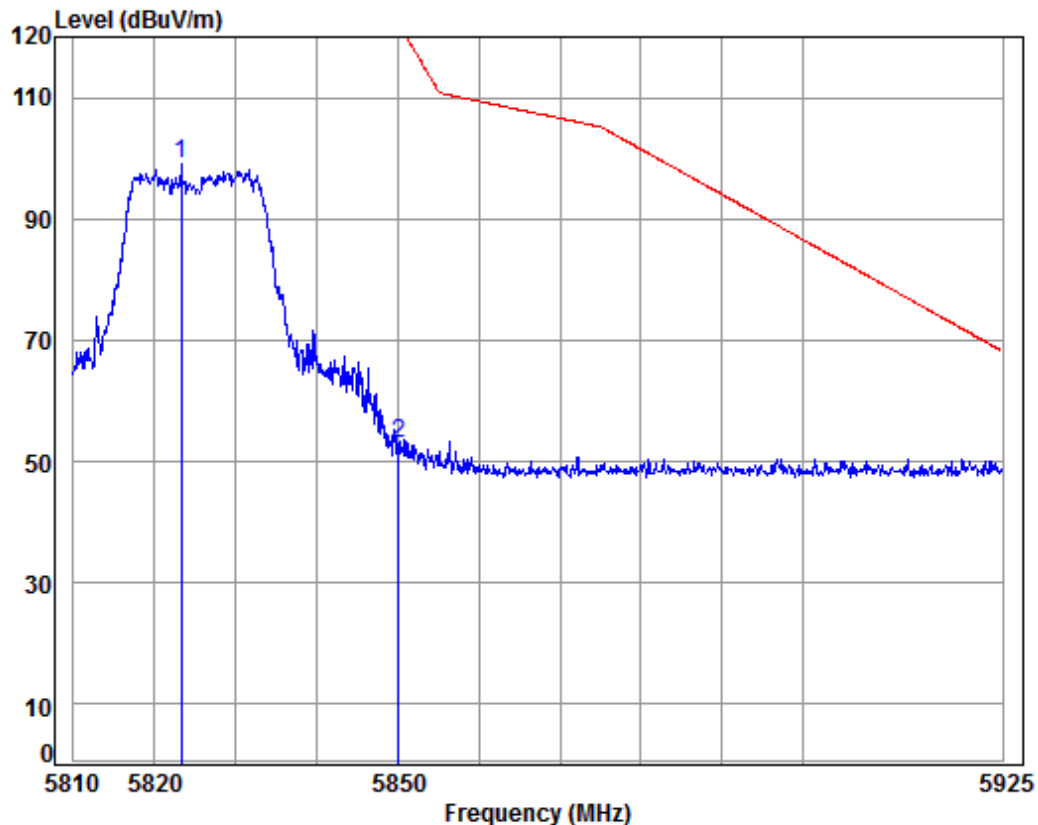

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5825 Bandedge
: WIFI-A20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5823.225	8.58	34.60	38.34	94.18	99.02	125.20	-26.18	
2	5850.000	8.60	34.61	38.33	48.04	52.92	122.20	-69.28	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 210 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Vertical
------------	---------------	-----------------	------	----------

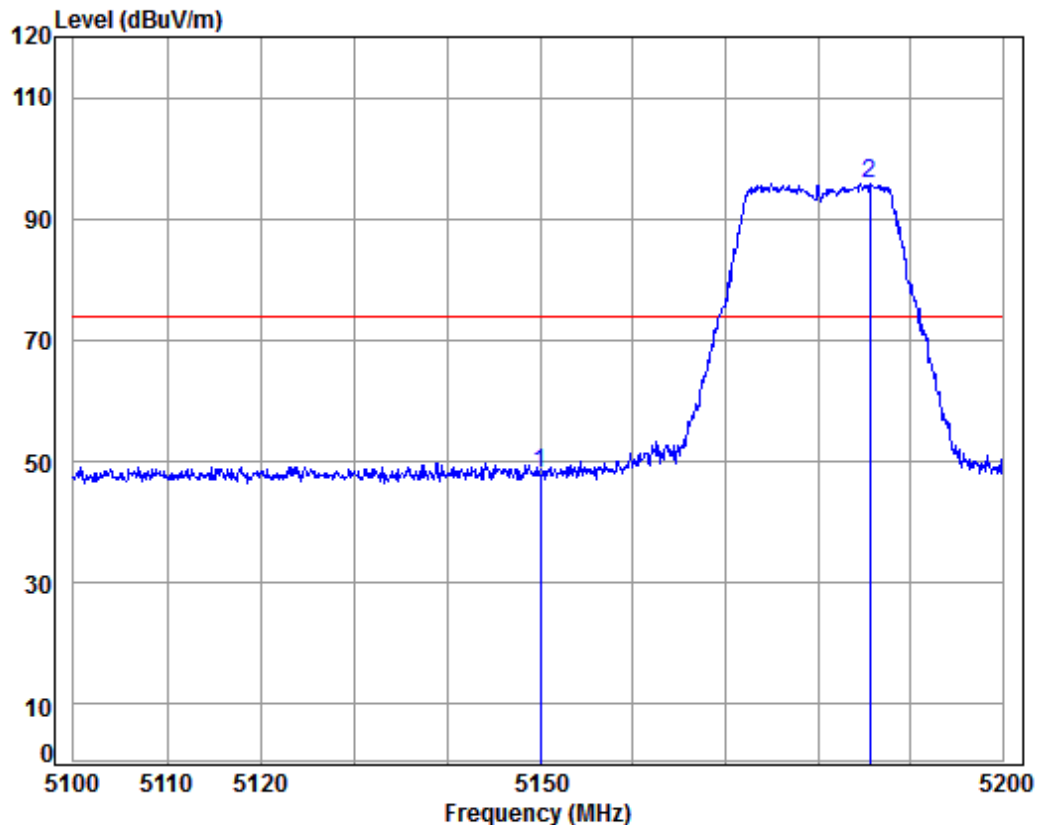

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5180 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	43.88	47.96	74.00	-26.04	
2 pp	5185.581	8.10	34.46	38.46	91.68	95.78	74.00	21.78	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 211 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Horizontal
------------	---------------	-----------------	------	------------

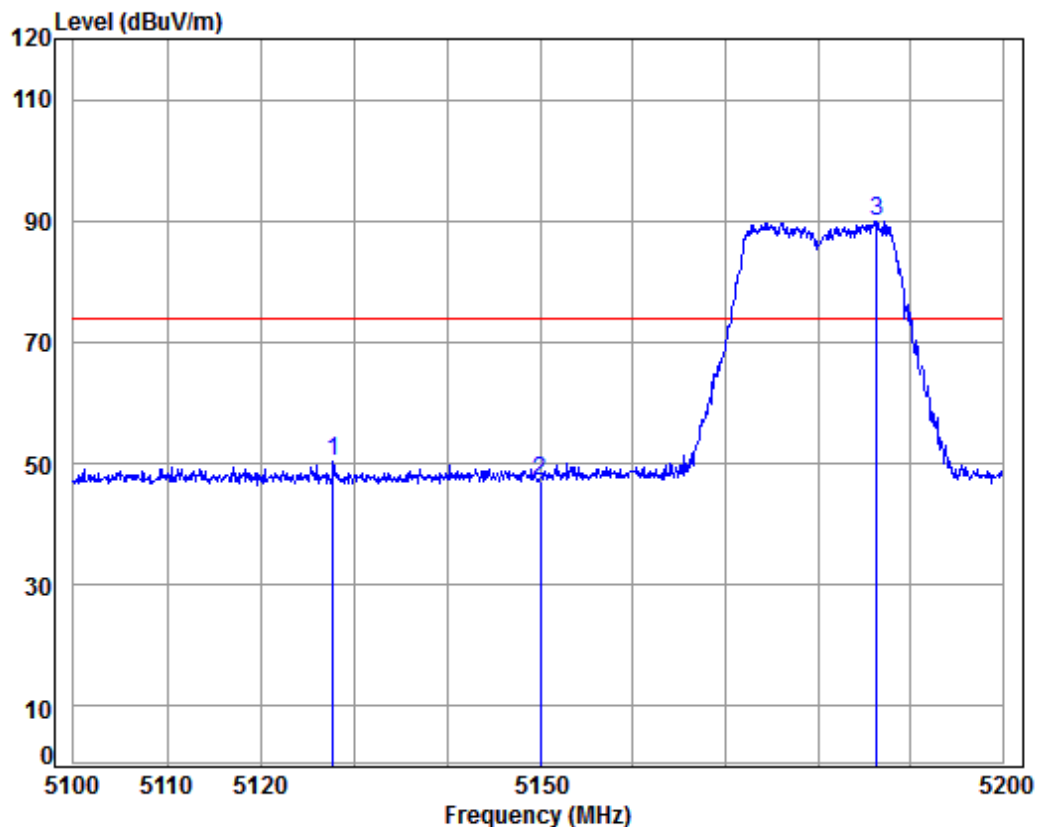

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5180 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5127.805	8.07	34.47	38.47	46.18	50.25	74.00	-23.75	
2	5150.000	8.08	34.47	38.47	43.11	47.19	74.00	-26.81	
3 pp	5186.386	8.10	34.46	38.46	85.86	89.96	74.00	15.96	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 212 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Vertical
------------	---------------	-----------------	------	----------

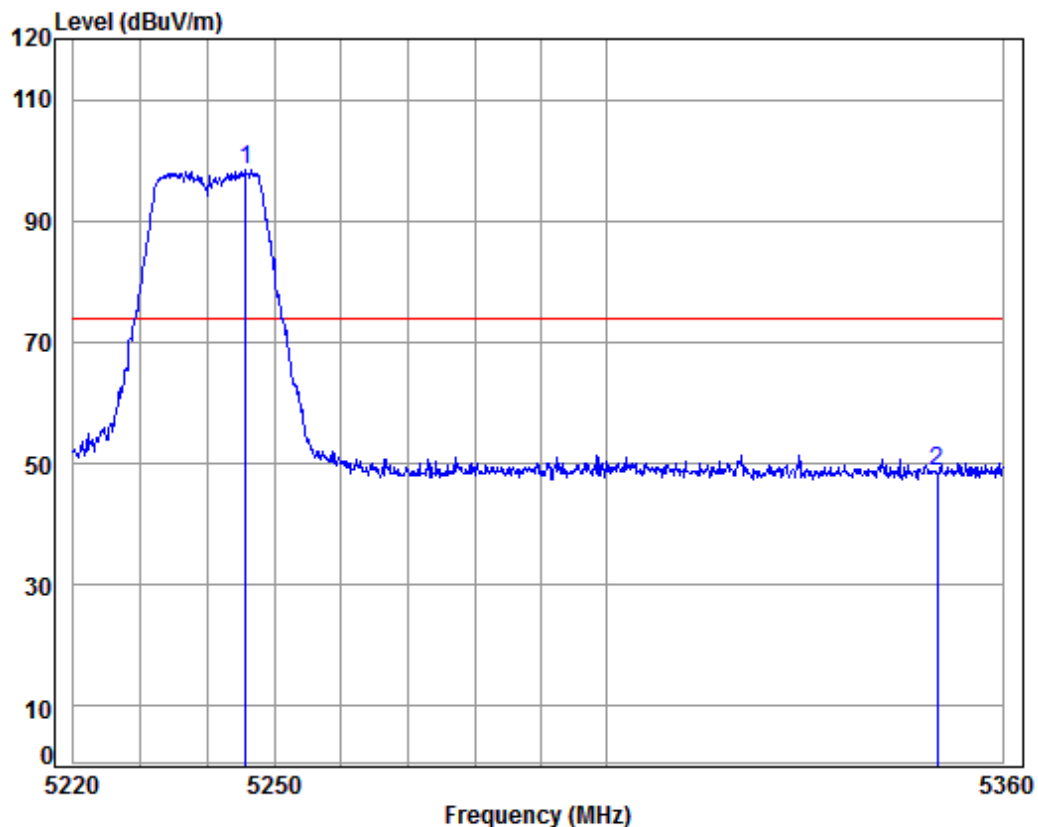

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5240 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5245.760	8.13	34.45	38.45	94.36	98.49	74.00	24.49	
2	5350.000	8.18	34.43	38.43	44.51	48.69	74.00	-25.31	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 213 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Horizontal
------------	---------------	-----------------	------	------------

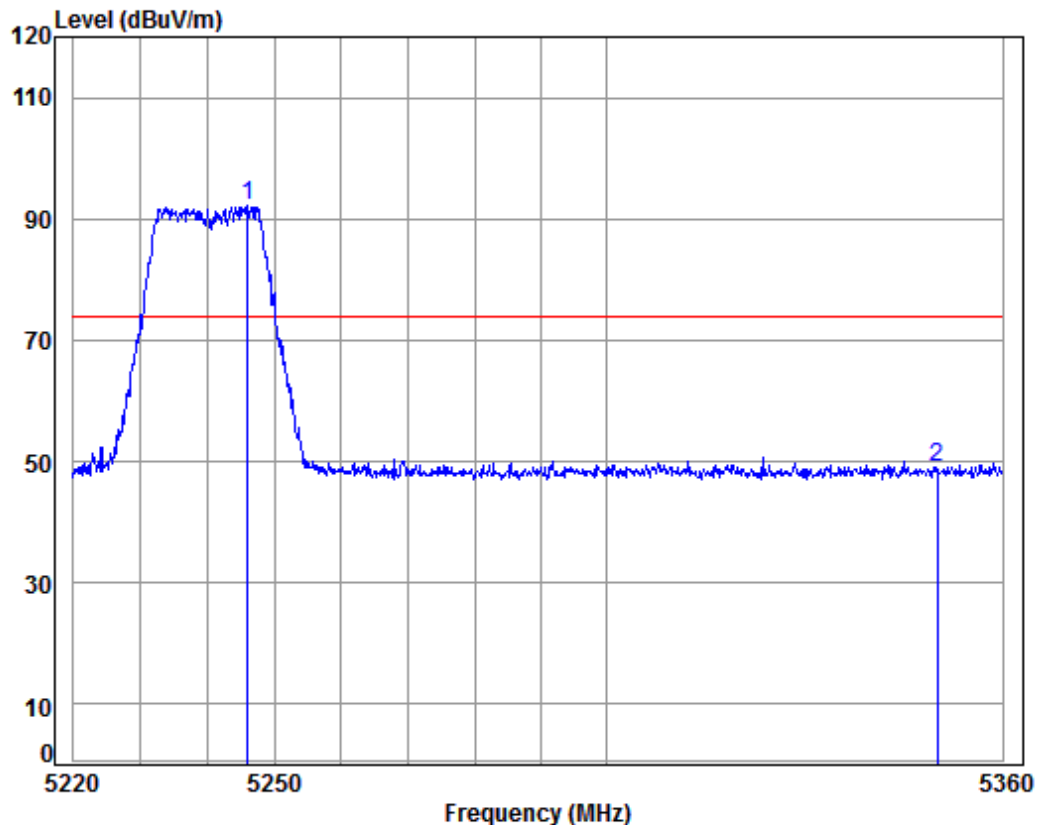

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5240 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5246.038	8.13	34.45	38.45	88.00	92.13	74.00	18.13	
2	5350.000	8.18	34.43	38.43	44.72	48.90	74.00	-25.10	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 214 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Vertical
------------	---------------	-----------------	------	----------

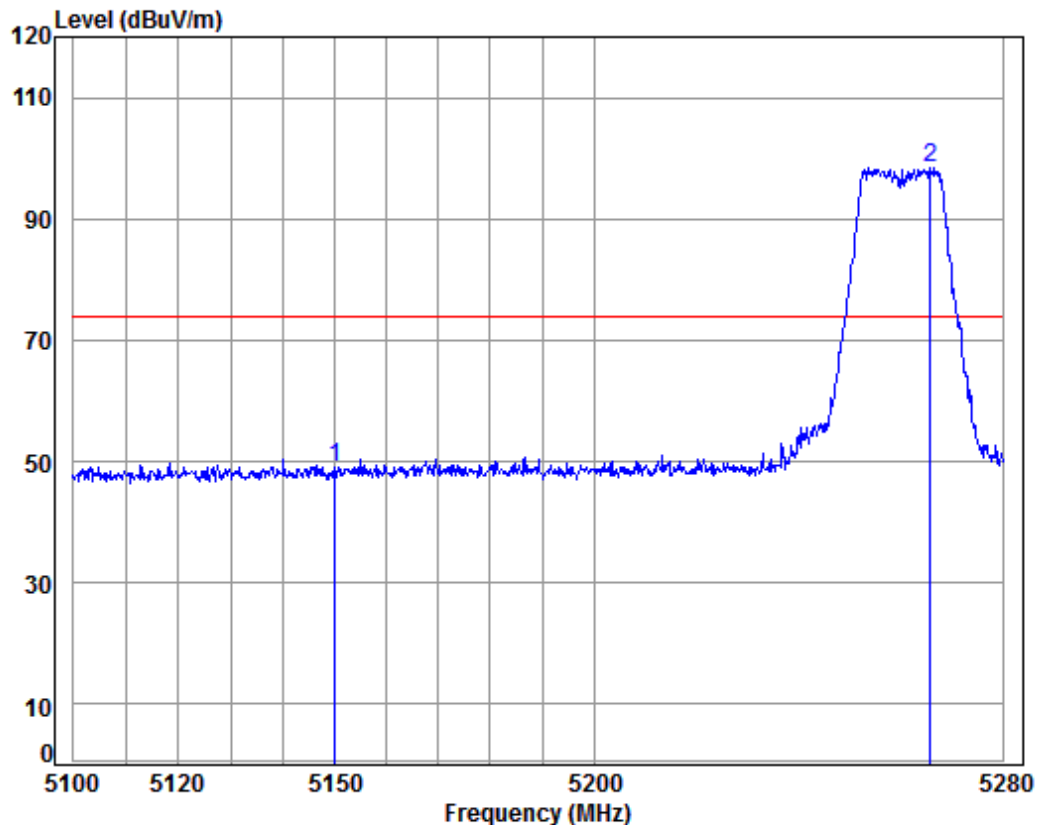

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5260 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.93	49.01	74.00	-24.99	
2 pp	5265.734	8.14	34.45	38.45	94.29	98.43	74.00	24.43	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 215 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Horizontal
------------	---------------	-----------------	------	------------

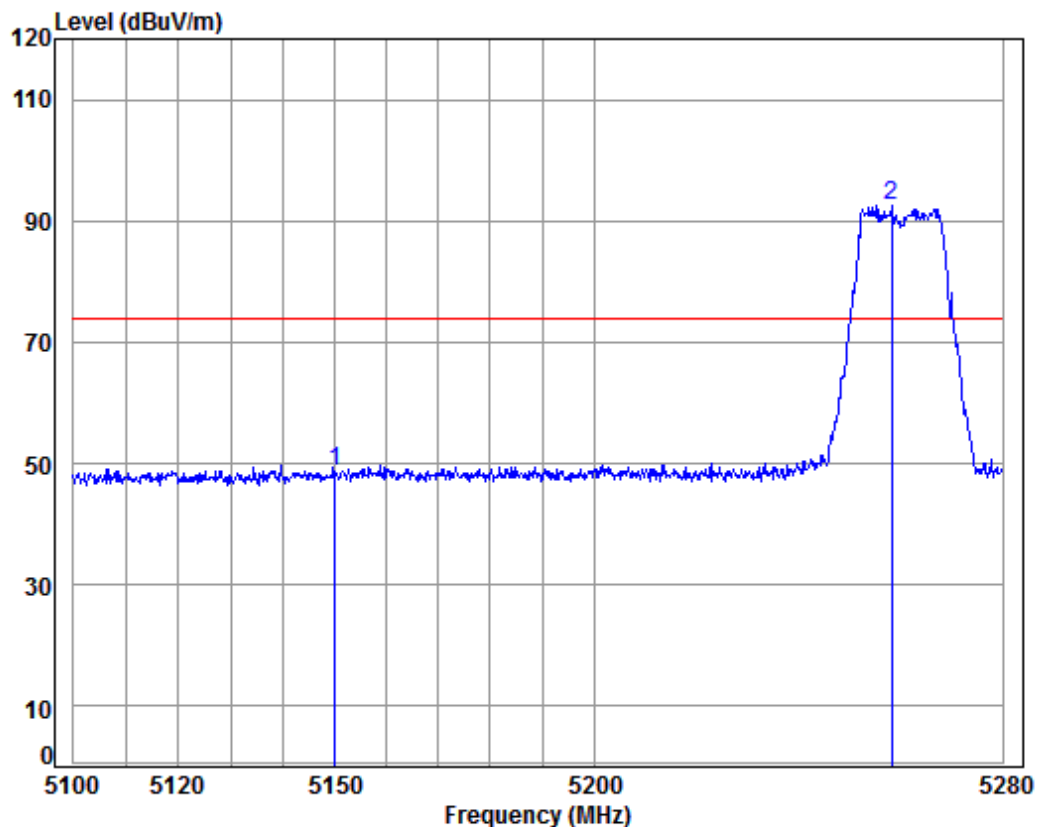

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5260 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.75	48.83	74.00	-25.17	
2 pp	5258.251	8.13	34.45	38.45	88.39	92.52	74.00	18.52	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 216 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Vertical
------------	---------------	-----------------	------	----------

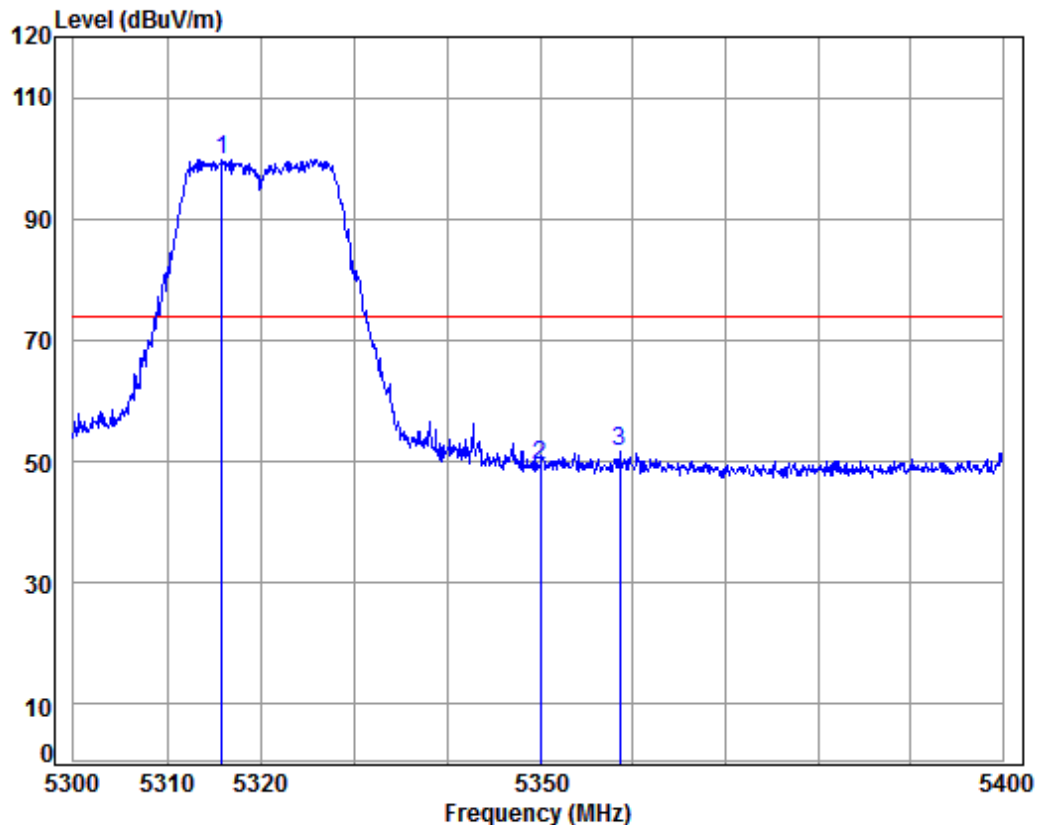

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5320 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5315.875	8.16	34.44	38.44	95.68	99.84	74.00	25.84	
2	5350.000	8.18	34.43	38.43	45.28	49.46	74.00	-24.54	
3	5358.573	8.18	34.43	38.43	47.33	51.51	74.00	-22.49	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 217 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Horizontal
------------	---------------	-----------------	------	------------

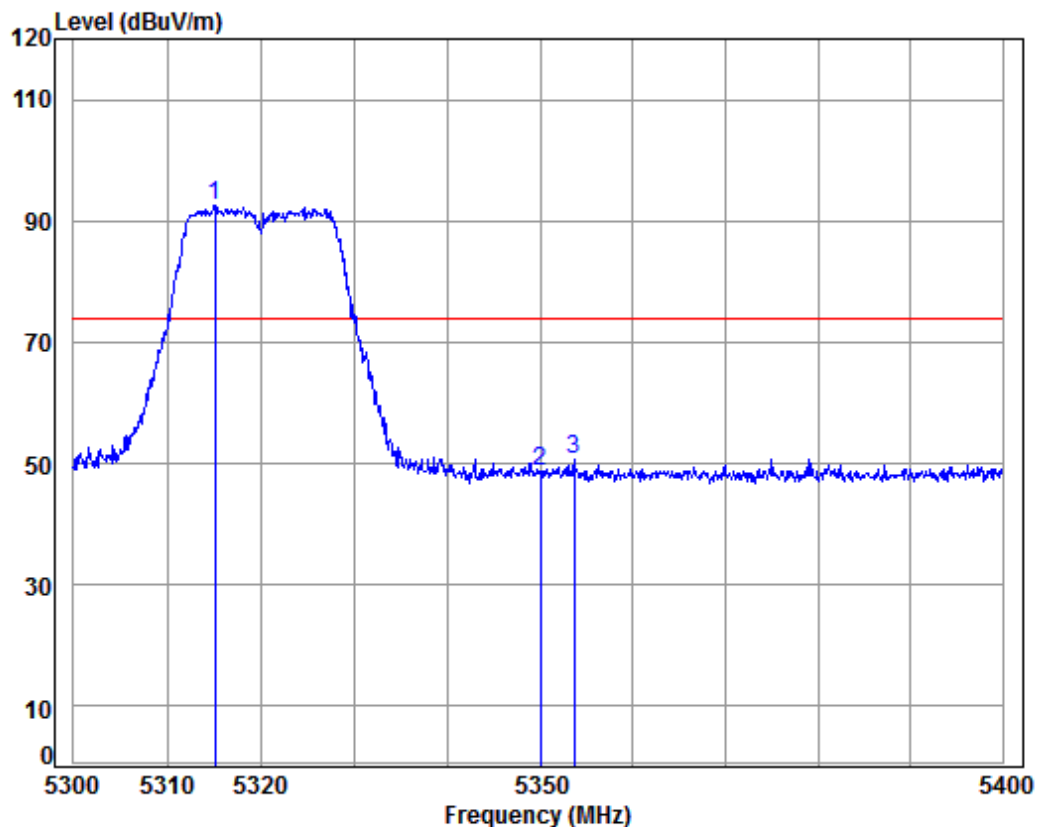

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5320 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5315.080	8.16	34.44	38.44	88.49	92.65	74.00	18.65	
2	5350.000	8.18	34.43	38.43	44.42	48.60	74.00	-25.40	
3	5353.667	8.18	34.43	38.43	46.47	50.65	74.00	-23.35	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 218 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Vertical
------------	---------------	-----------------	------	----------

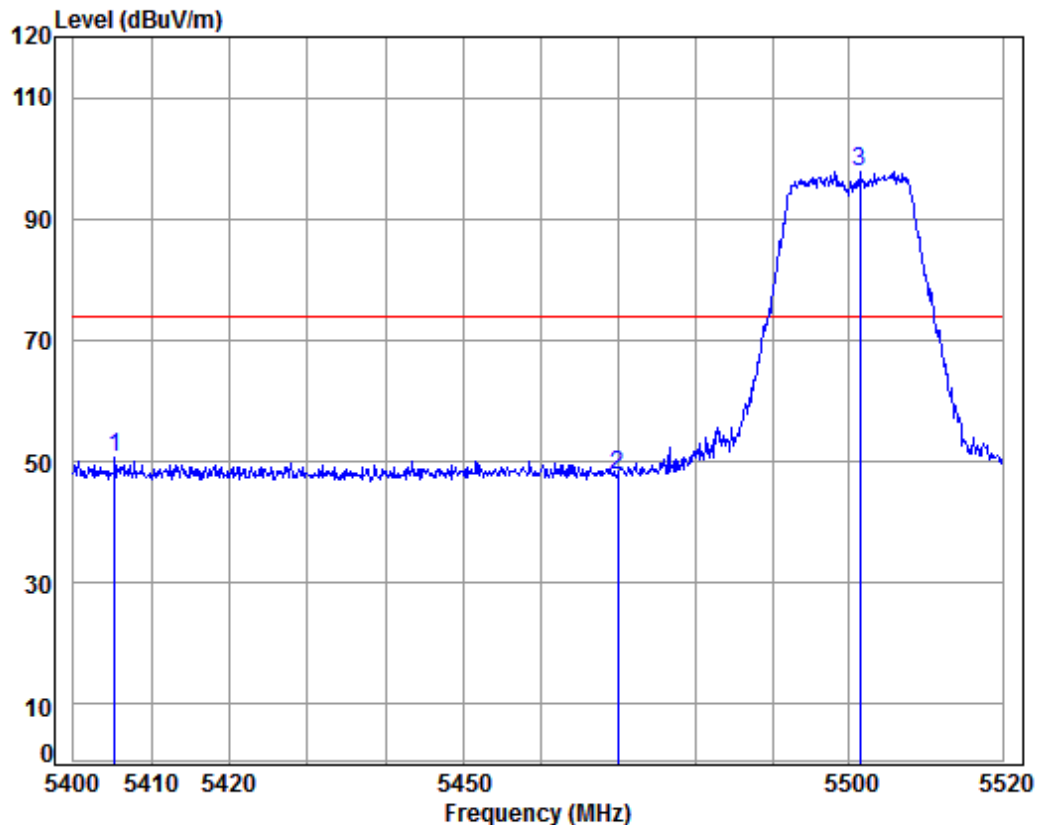

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5500 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5405.344	8.20	34.42	38.42	46.63	50.83	74.00	-23.17	
2	5470.000	8.24	34.41	38.41	43.64	47.88	74.00	-26.12	
3 pp	5501.469	8.25	34.40	38.40	93.52	97.77	74.00	23.77	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 219 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Horizontal
------------	---------------	-----------------	------	------------

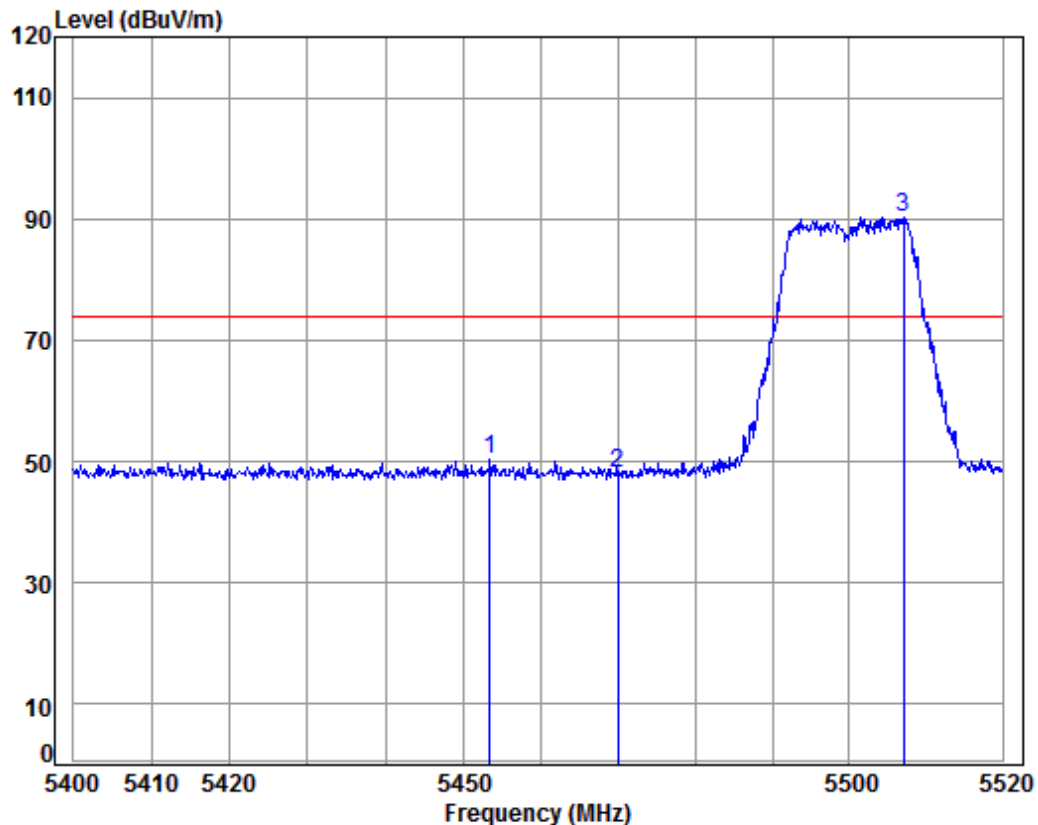

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5500 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.434	8.23	34.41	38.41	46.01	50.24	74.00	-23.76	
2	5470.000	8.24	34.41	38.41	43.81	48.05	74.00	-25.95	
3 pp	5507.034	8.26	34.40	38.40	85.95	90.21	74.00	16.21	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 220 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Vertical
------------	---------------	-----------------	------	----------

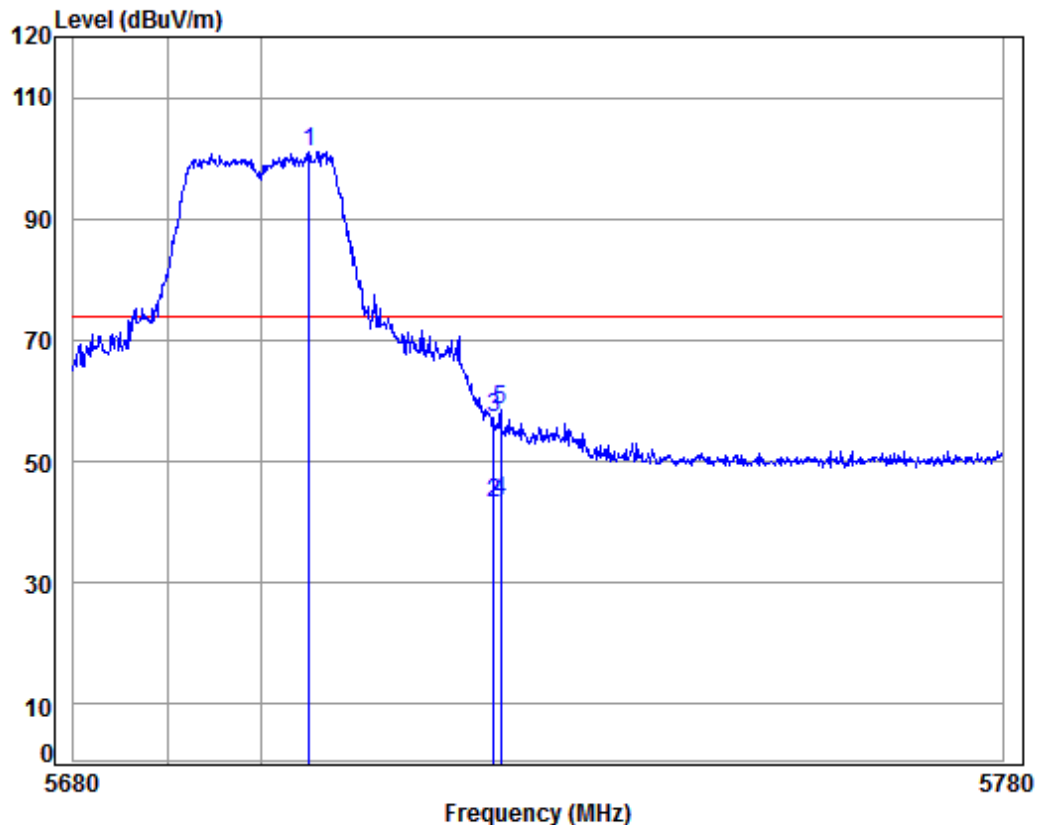

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5700 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5705.235	8.46	34.53	38.36	96.37	101.00	74.00	27.00	
2	5724.984	8.48	34.54	38.35	38.50	43.17	54.00	-10.83	Average
3	5724.984	8.48	34.54	38.36	52.43	57.09	74.00	-16.91	Peak
4 av	5725.783	8.48	34.54	38.35	38.67	43.34	54.00	-10.66	Average
5 pk	5725.783	8.48	34.54	38.35	53.71	58.38	74.00	-15.62	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 221 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Horizontal
------------	---------------	-----------------	------	------------

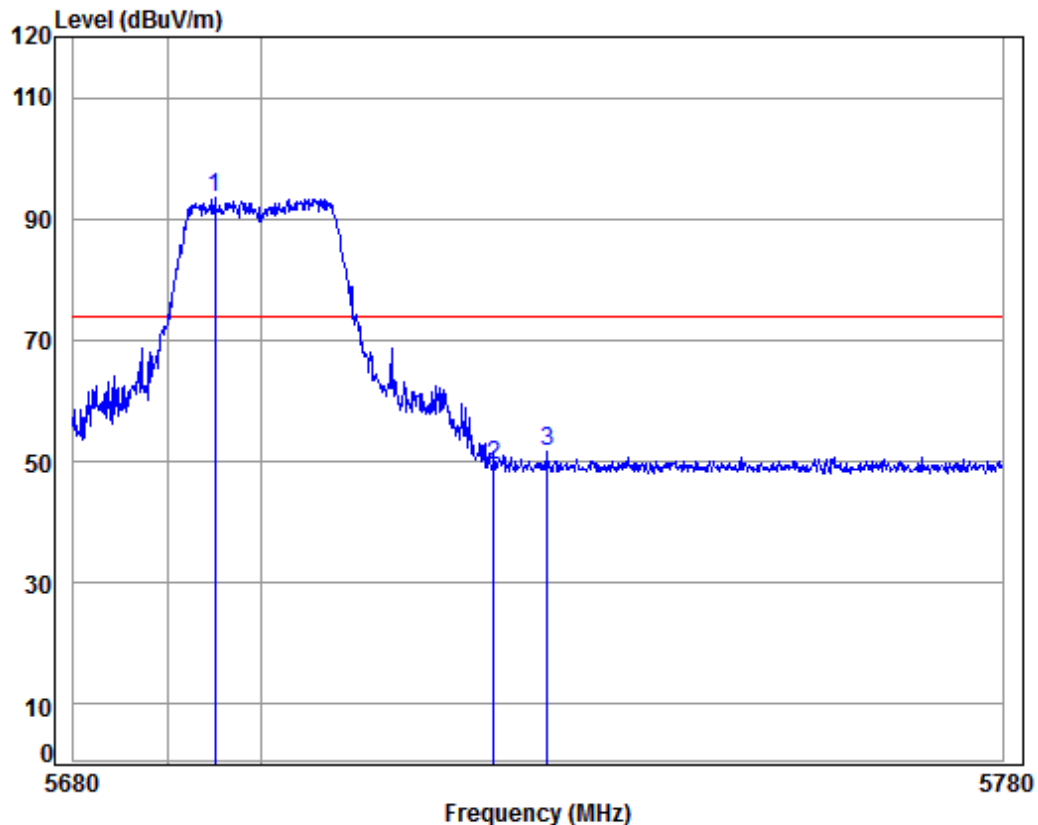

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5700 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5695.088	8.45	34.52	38.36	88.94	93.55	74.00	19.55	
2	5725.000	8.48	34.54	38.35	44.74	49.41	74.00	-24.59	
3	5730.782	8.49	34.54	38.35	47.05	51.73	74.00	-22.27	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 222 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Vertical
------------	---------------	-----------------	------	----------

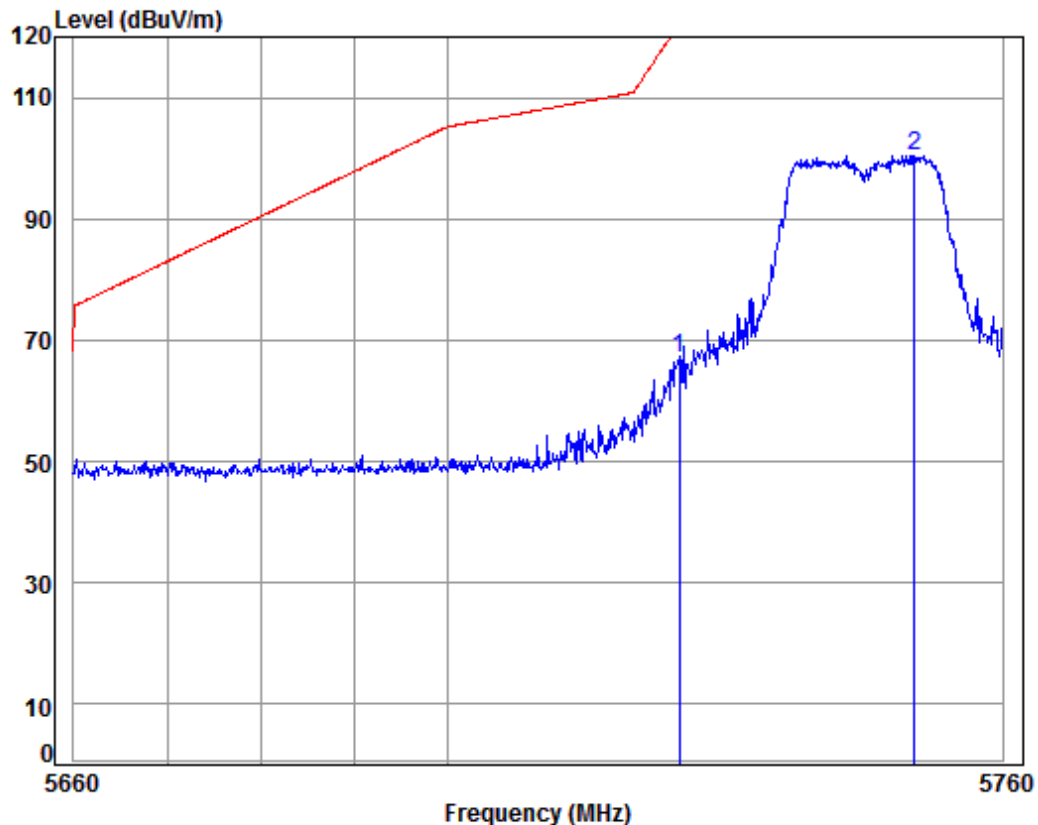

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5745 Bandedge
: WIFI-N20


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pk 5725.000	8.48	34.54	38.35	62.28	66.95	122.20	-55.25	Peak
2 pp 5750.424	8.51	34.55	38.35	95.77	100.48	125.20	-24.72	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 223 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Horizontal
------------	---------------	-----------------	------	------------

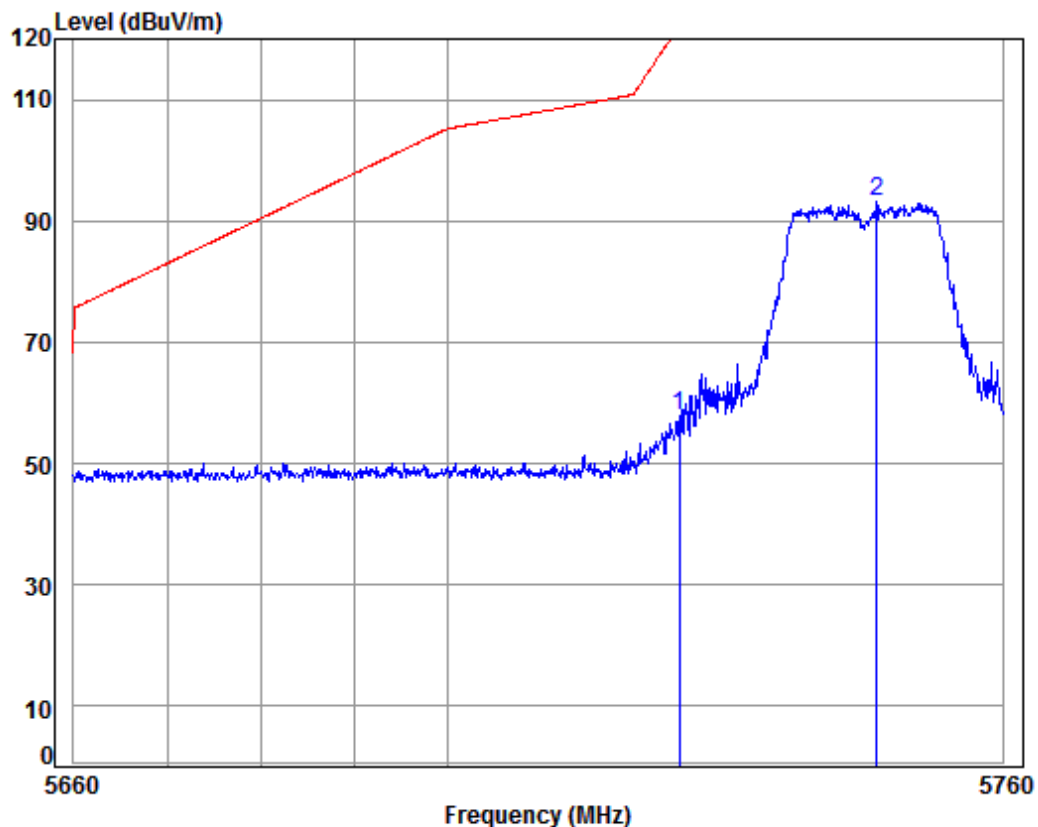

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5745 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	8.48	34.54	38.35	53.22	57.89	122.20	-64.31	
2 pp	5746.397	8.50	34.55	38.35	88.51	93.21	125.20	-31.99	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 224 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Vertical
------------	---------------	-----------------	------	----------

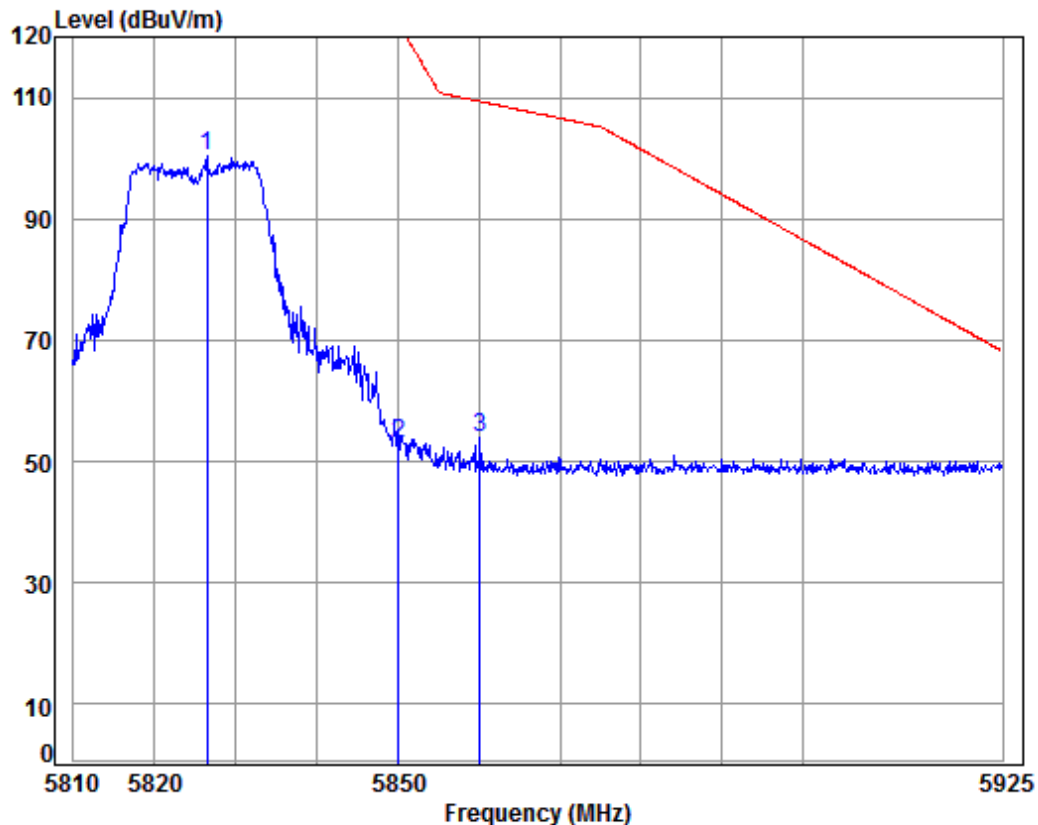

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5825 Bandedge
: WIFI-N20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5826.421	8.58	34.60	38.33	95.51	100.36	125.20	-24.84	
2	5850.000	8.60	34.61	38.33	47.99	52.87	122.20	-69.33	
3	5860.093	8.61	34.62	38.33	48.98	53.88	109.37	-55.49	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 225 of 283

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Horizontal
------------	---------------	-----------------	------	------------

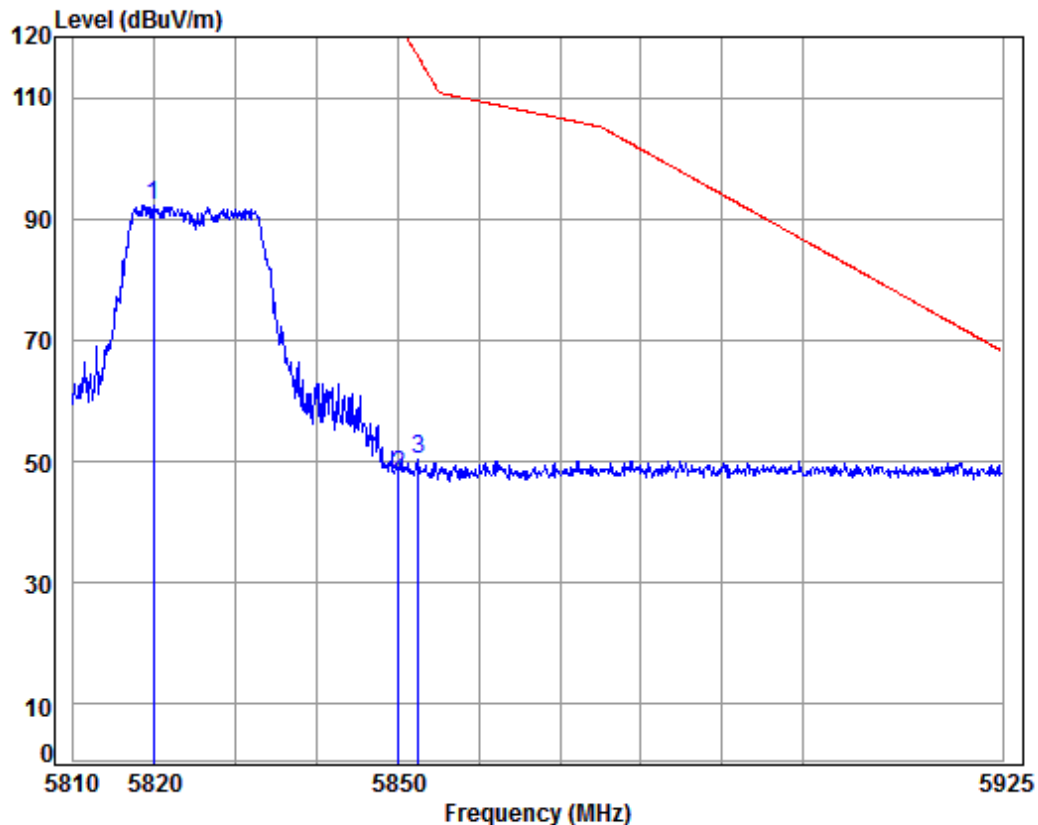

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5825 Bandedge
: WIFI-N20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5819.802	8.57	34.59	38.34	87.47	92.29	125.20	-32.91	
2	5850.000	8.60	34.61	38.33	42.97	47.85	122.20	-74.35	
3	5852.402	8.61	34.61	38.33	45.51	50.40	116.72	-66.32	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 226 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Vertical
------------	----------------	-----------------	------	----------

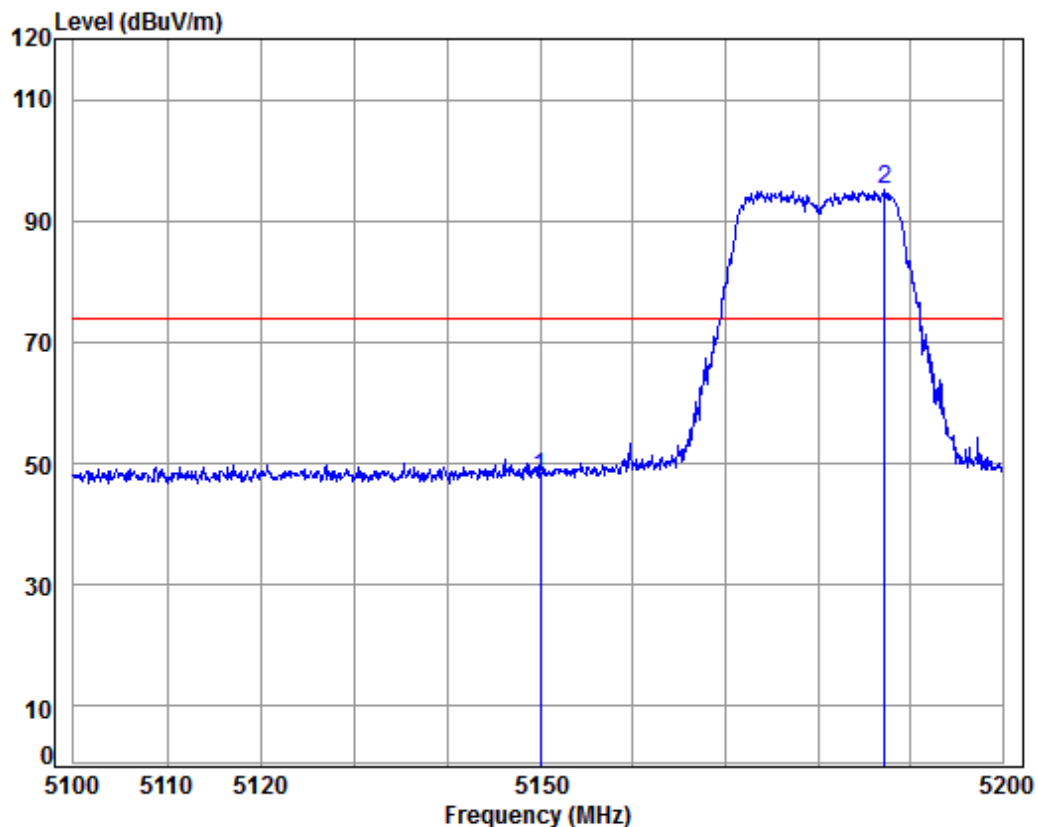

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5180 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	43.71	47.79	74.00	-26.21	
2 pp	5187.192	8.10	34.46	38.46	90.92	95.02	74.00	21.02	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 227 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Horizontal
------------	----------------	-----------------	------	------------

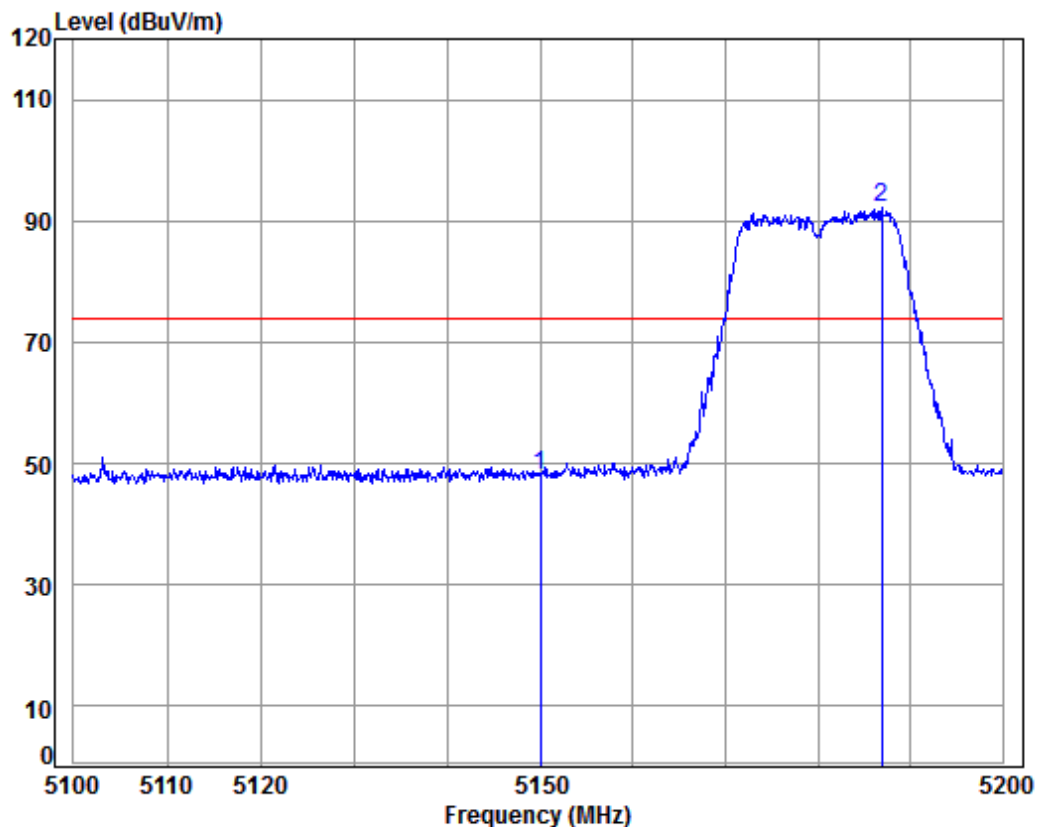

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5180 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.05	48.13	74.00	-25.87	
2 pp	5186.890	8.10	34.46	38.46	87.95	92.05	74.00	18.05	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 228 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Vertical
------------	----------------	-----------------	------	----------

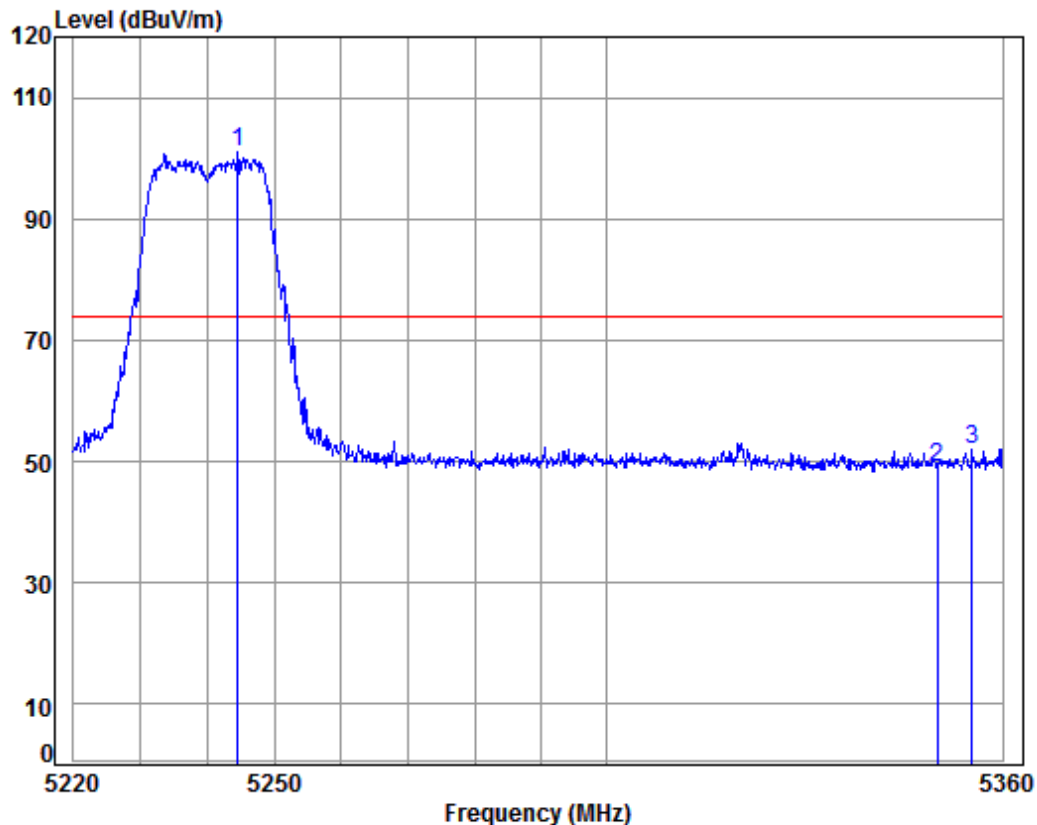

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5240 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5244.511	8.13	34.45	38.45	96.77	100.90	74.00	26.90	
2	5350.000	8.18	34.43	38.43	44.85	49.03	74.00	-24.97	
3	5355.321	8.18	34.43	38.43	47.71	51.89	74.00	-22.11	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 229 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Horizontal
------------	----------------	-----------------	------	------------

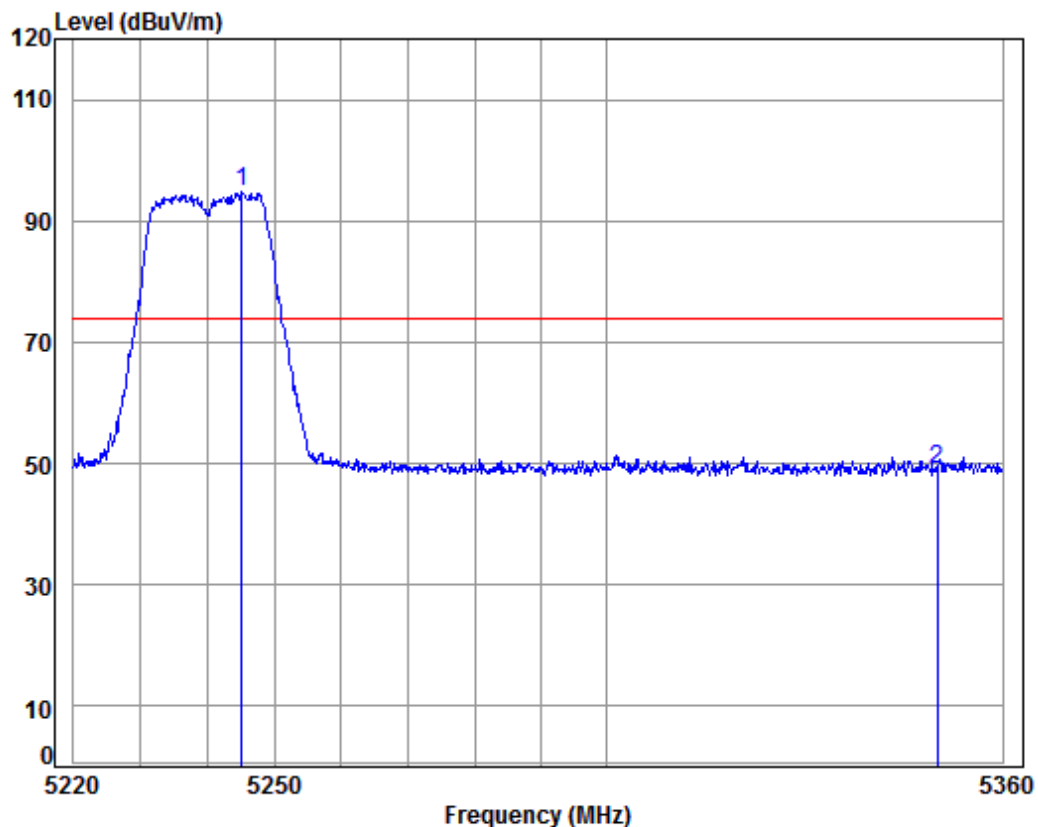

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5240 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5245.066	8.13	34.45	38.45	90.57	94.70	74.00	20.70	
2	5350.000	8.18	34.43	38.43	44.99	49.17	74.00	-24.83	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 230 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Vertical
------------	----------------	-----------------	------	----------

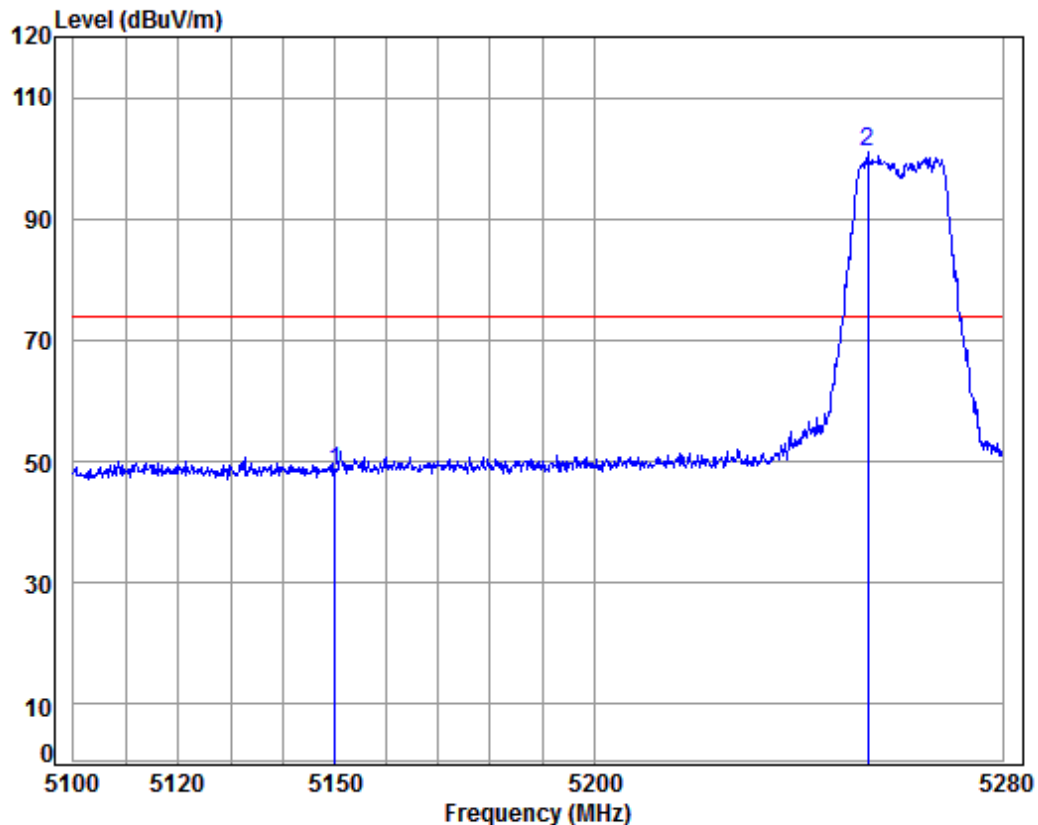

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5260 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.37	48.45	74.00	-25.55	
2 pp	5253.511	8.13	34.45	38.45	96.83	100.96	74.00	26.96	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 231 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Horizontal
------------	----------------	-----------------	------	------------

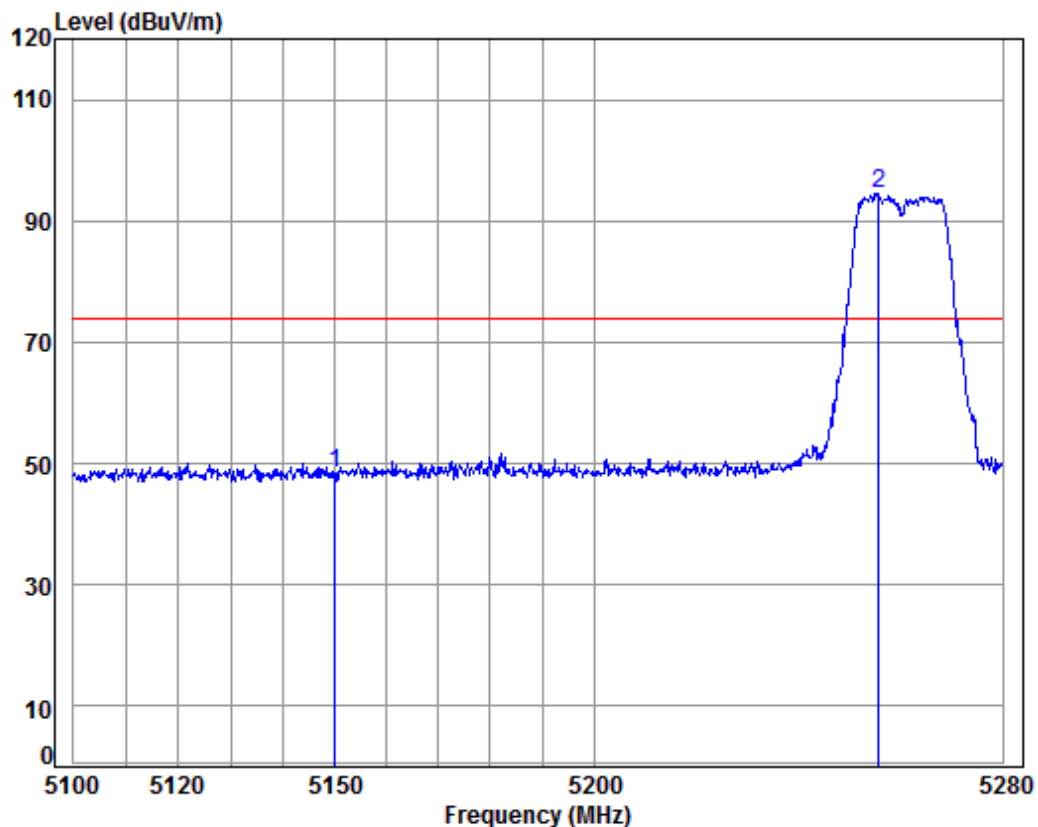

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5260 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.41	48.49	74.00	-25.51	
2 pp	5255.699	8.13	34.45	38.45	90.52	94.65	74.00	20.65	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 232 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Vertical
------------	----------------	-----------------	------	----------

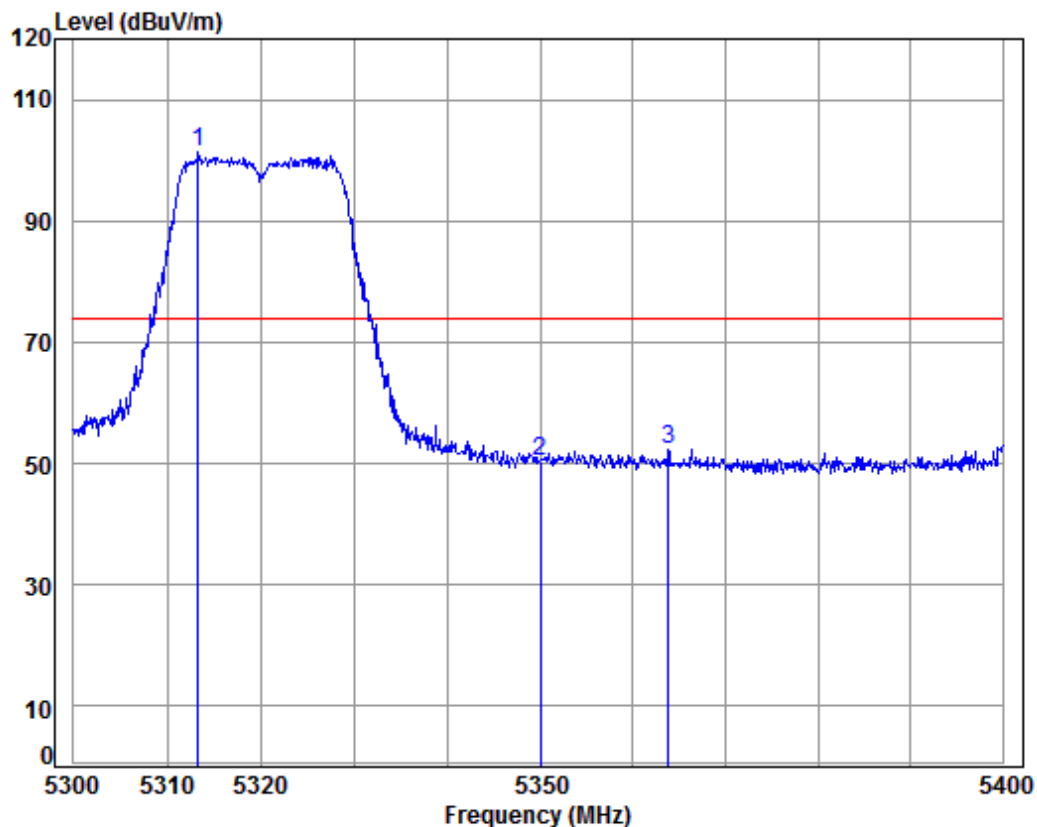

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5320 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5313.292	8.16	34.44	38.44	97.25	101.41	74.00	27.41	
2	5350.000	8.18	34.43	38.43	46.16	50.34	74.00	-23.66	
3	5363.785	8.18	34.43	38.43	48.17	52.35	74.00	-21.65	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 233 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Horizontal
------------	----------------	-----------------	------	------------

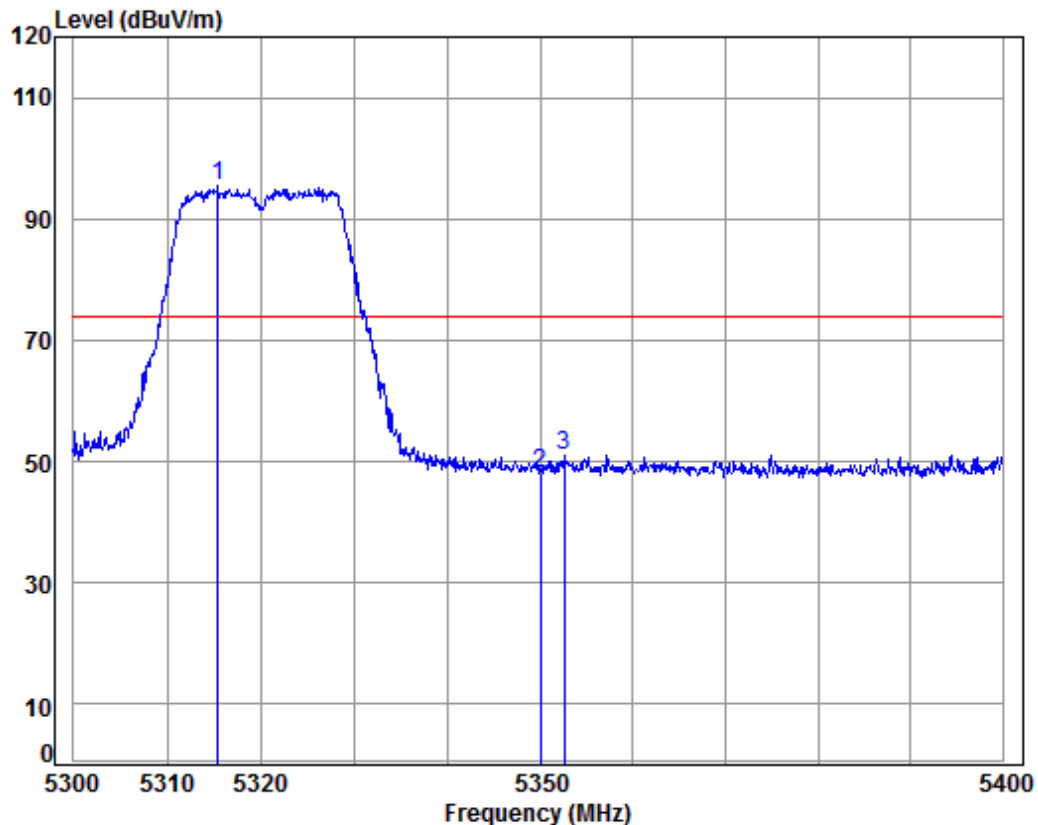

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5320 Bandedge
: WIFI-AC20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5315.477	8.16	34.44	38.44	91.36	95.52	74.00	21.52	
2	5350.000	8.18	34.43	38.43	44.04	48.22	74.00	-25.78	
3	5352.567	8.18	34.43	38.43	46.94	51.12	74.00	-22.88	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 234 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Vertical
------------	----------------	-----------------	------	----------

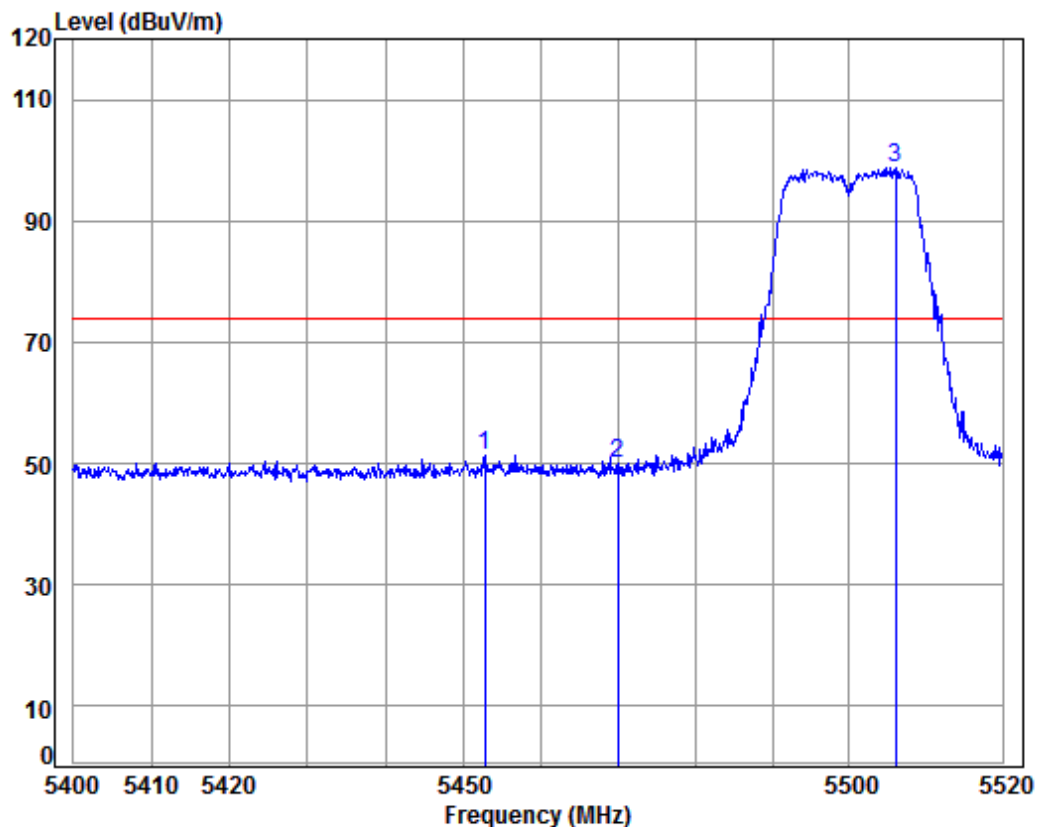

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5500 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5452.835	8.23	34.41	38.41	47.21	51.44	74.00	-22.56	
2	5470.000	8.24	34.41	38.41	45.76	50.00	74.00	-24.00	
3 pp	5506.065	8.26	34.40	38.40	94.53	98.79	74.00	24.79	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 235 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Horizontal
------------	----------------	-----------------	------	------------

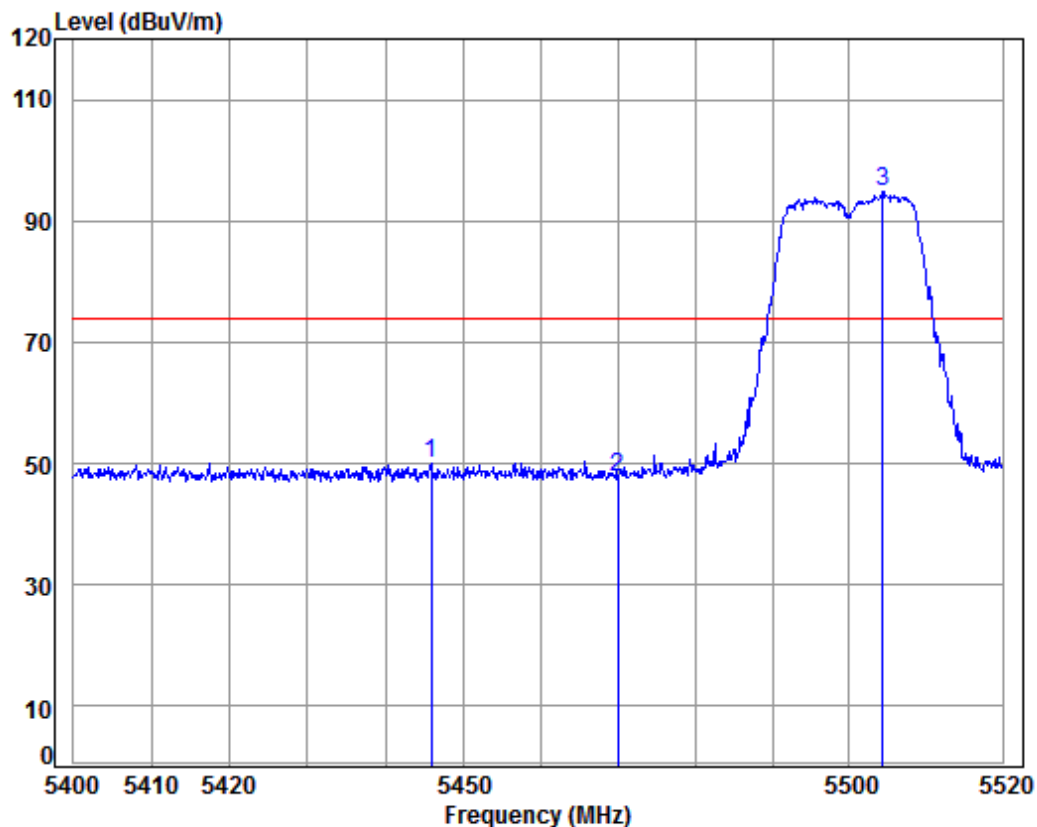

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5500 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5445.888	8.22	34.41	38.41	45.88	50.10	74.00	-23.90	
2	5470.000	8.24	34.41	38.41	43.53	47.77	74.00	-26.23	
3 pp	5504.372	8.25	34.40	38.40	90.67	94.92	74.00	20.92	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 236 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Vertical
------------	----------------	-----------------	------	----------

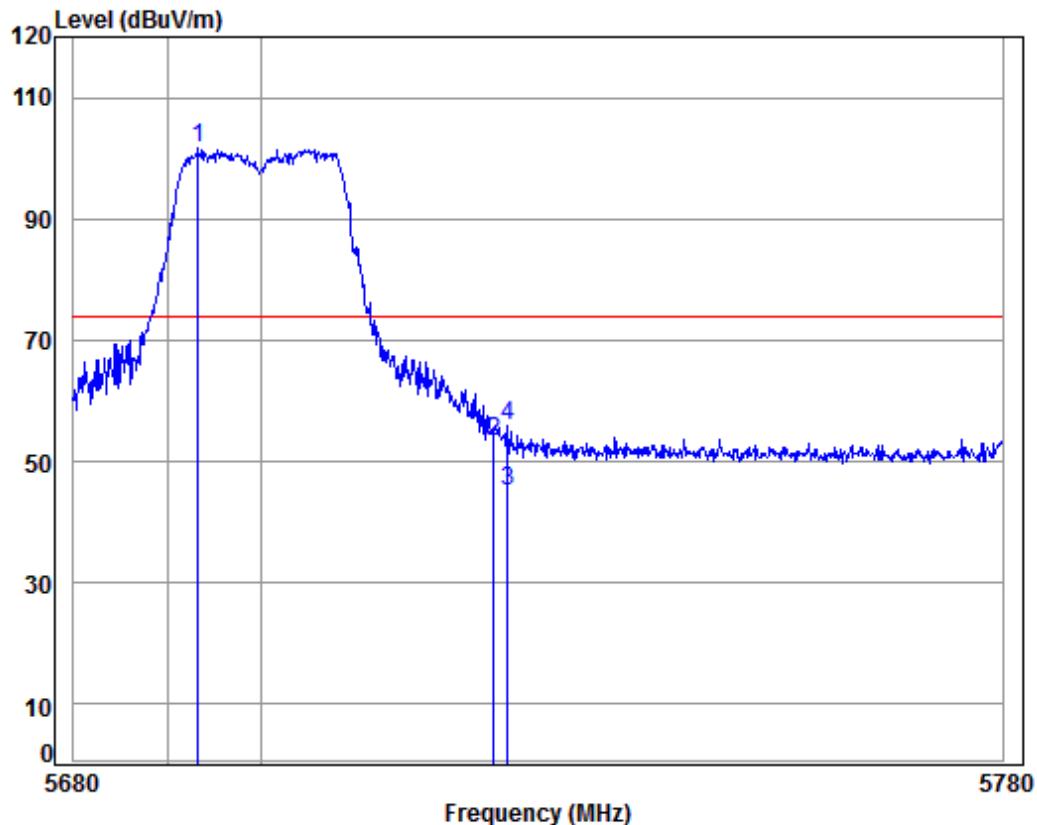

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5700 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5693.299	8.45	34.52	38.36	97.05	101.66	74.00	27.66	
2	5725.000	8.48	34.54	38.35	48.70	53.37	74.00	-20.63	
3 av	5726.483	8.48	34.54	38.35	40.44	45.11	54.00	-8.89	Average
4 pk	5726.483	8.48	34.54	38.35	51.08	55.75	74.00	-18.25	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 237 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Horizontal
------------	----------------	-----------------	------	------------

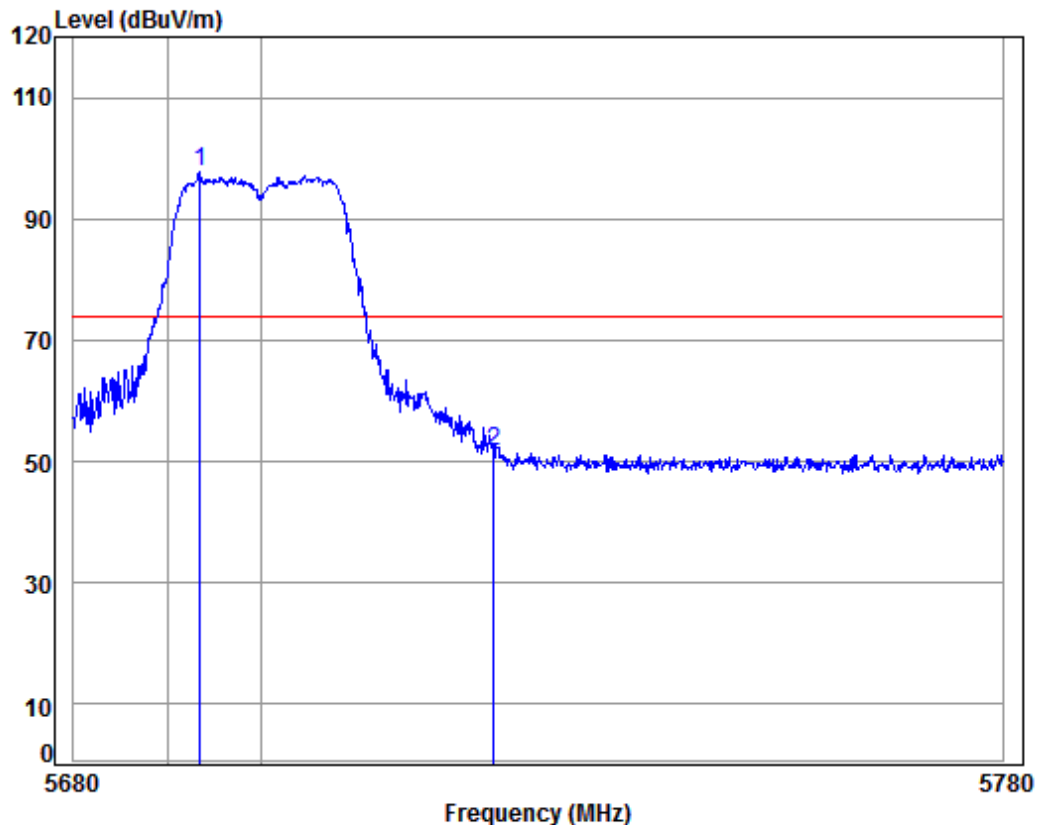

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5700 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5693.498	8.45	34.52	38.36	93.21	97.82	74.00	23.82	
2	5725.000	8.48	34.54	38.35	47.15	51.82	74.00	-22.18	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 238 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Vertical
------------	----------------	-----------------	------	----------

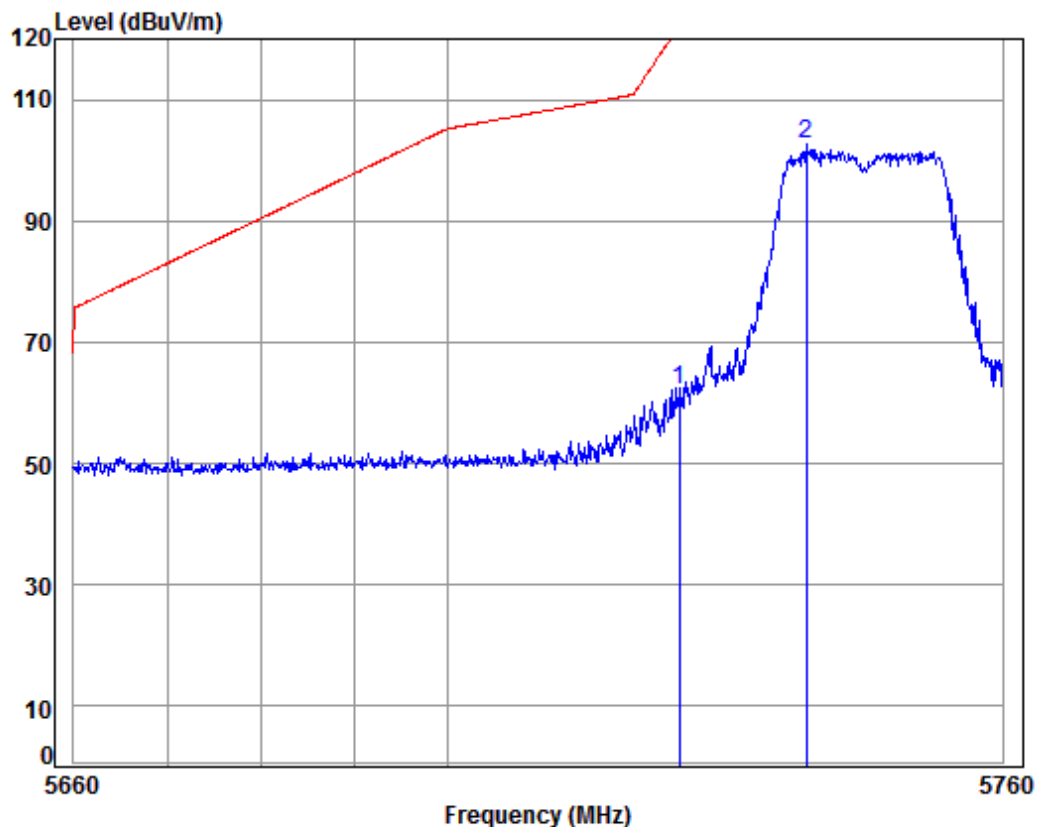

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5745 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	8.48	34.54	38.35	57.48	62.15	122.20	-60.05	
2 pp	5738.754	8.49	34.55	38.35	97.92	102.61	125.20	-22.59	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 239 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Horizontal
------------	----------------	-----------------	------	------------

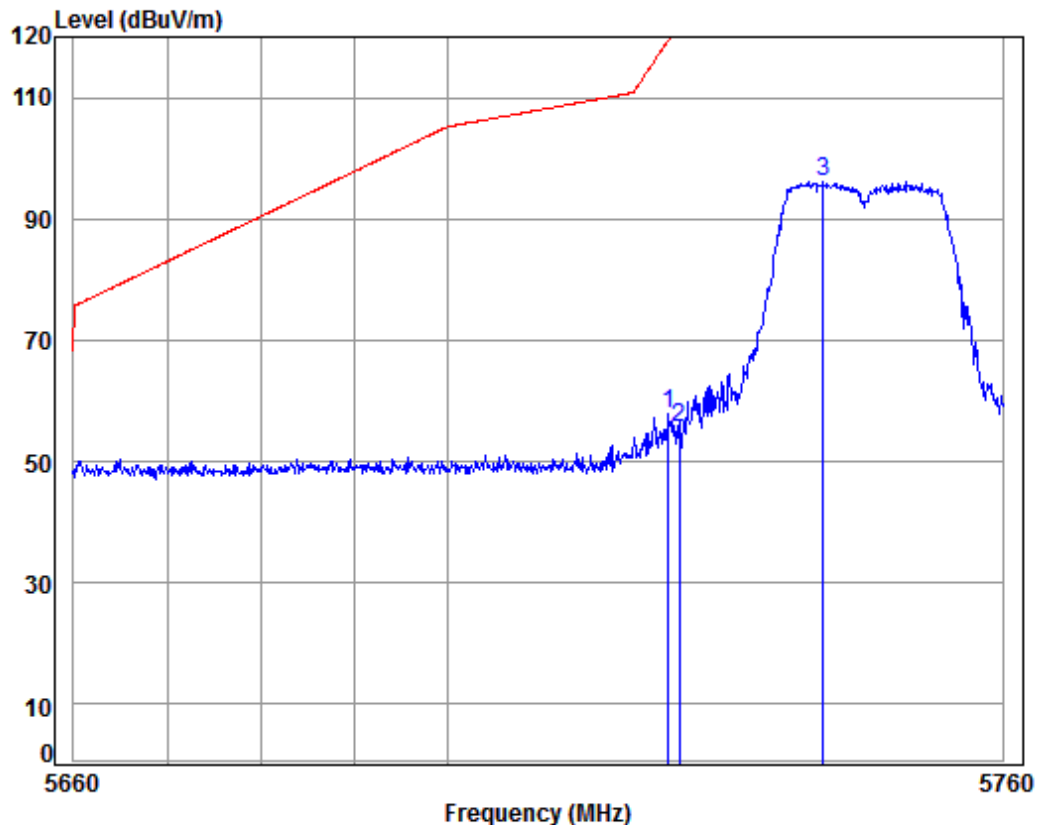

Condition: 3m HORIZONTAL
Job No: : 11090CR
Mode: : 5745 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5723.798	8.48	34.54	38.36	53.15	57.81	119.46	-61.65	
2	5725.000	8.48	34.54	38.35	50.87	55.54	122.20	-66.66	
3 pp	5740.563	8.50	34.55	38.35	91.49	96.19	125.20	-29.01	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 240 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Vertical
------------	----------------	-----------------	------	----------

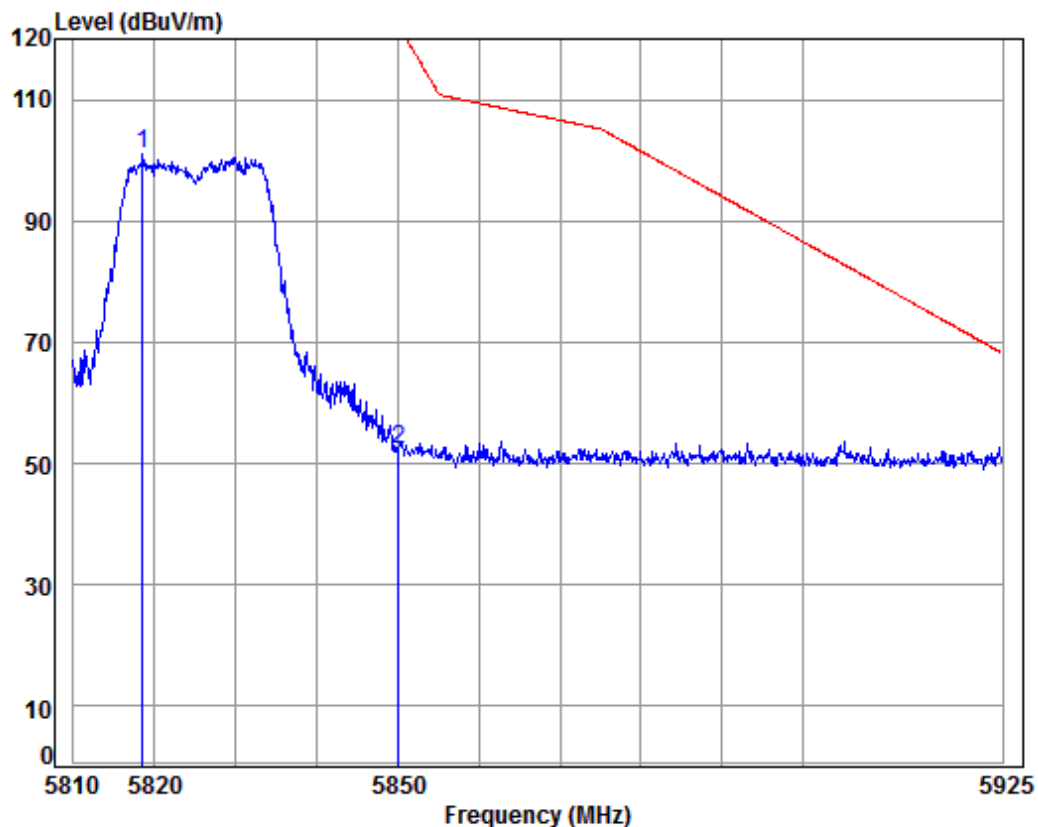

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5825 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5818.547	8.57	34.59	38.34	96.29	101.11	125.20	-24.09	
2	5850.000	8.60	34.61	38.33	47.39	52.27	122.20	-69.93	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 241 of 283

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Horizontal
------------	----------------	-----------------	------	------------

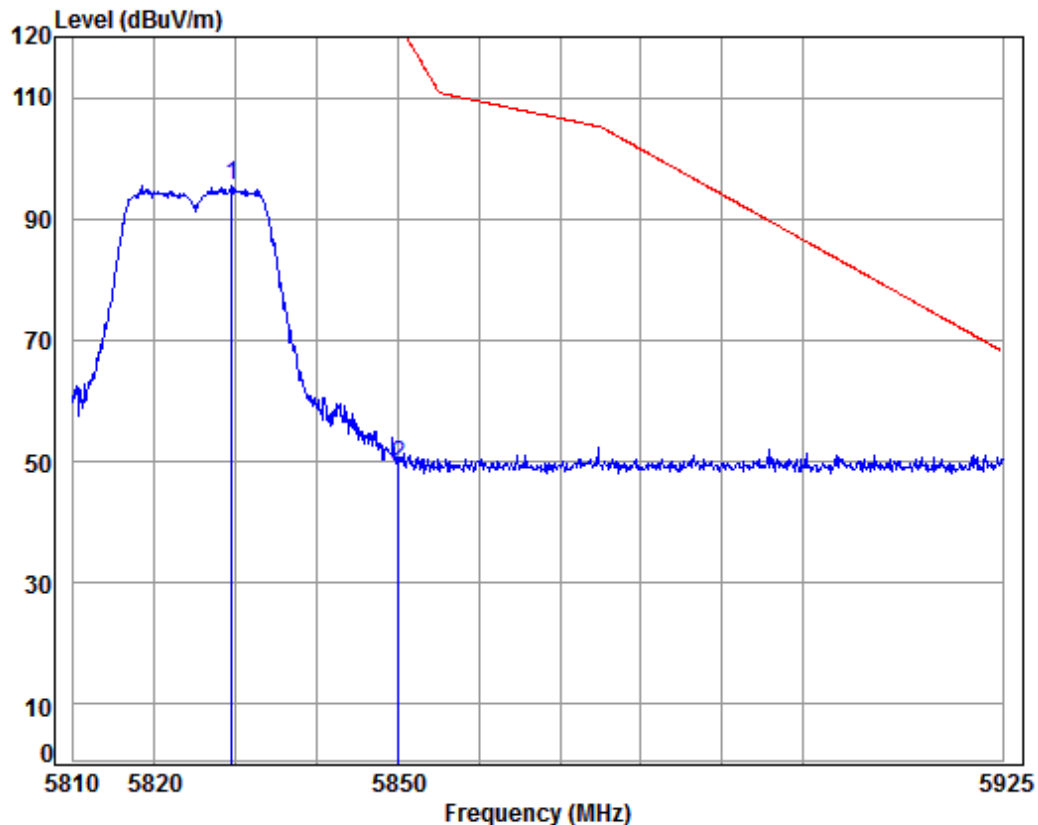

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5825 Bandedge
: WIFI-AC20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5829.505	8.58	34.60	38.33	90.77	95.62	125.20	-29.58	
2	5850.000	8.60	34.61	38.33	44.57	49.45	122.20	-72.75	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 242 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Vertical
------------	---------------	-----------------	------	----------

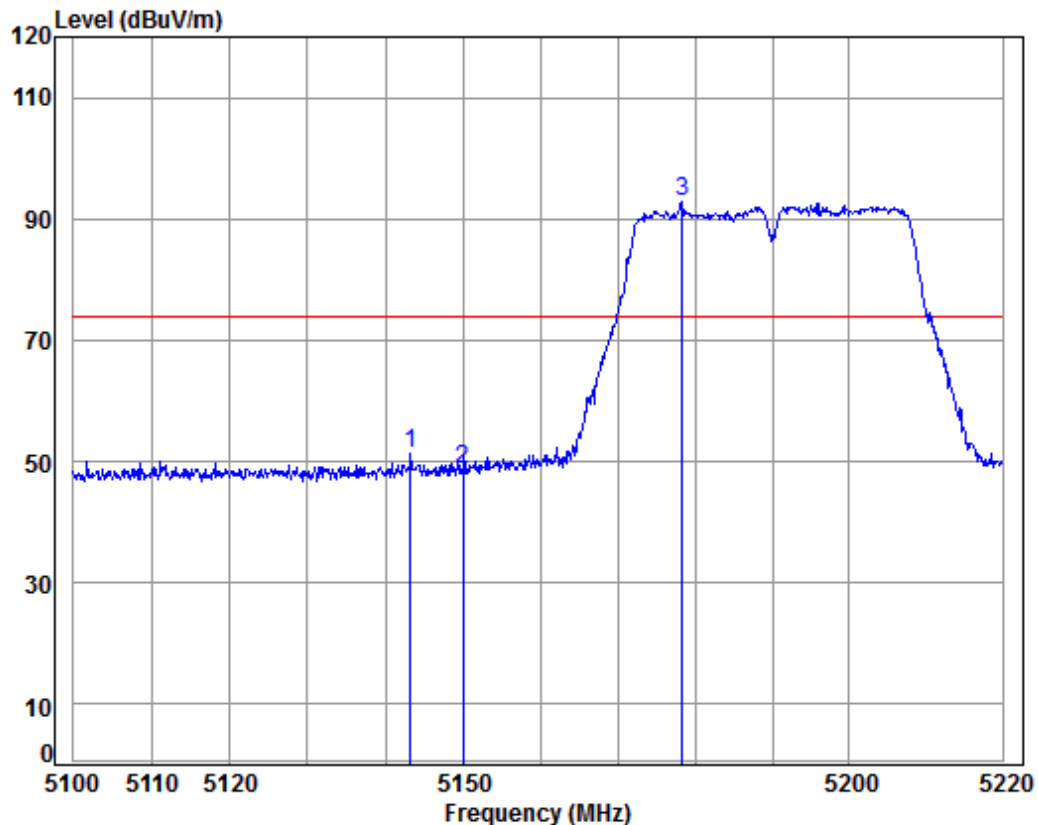

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5190 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.238	8.07	34.47	38.47	47.22	51.29	74.00	-22.71	
2	5150.000	8.08	34.47	38.47	44.60	48.68	74.00	-25.32	
3 pp	5178.284	8.09	34.46	38.46	88.72	92.81	74.00	18.81	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 243 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Horizontal
------------	---------------	-----------------	------	------------

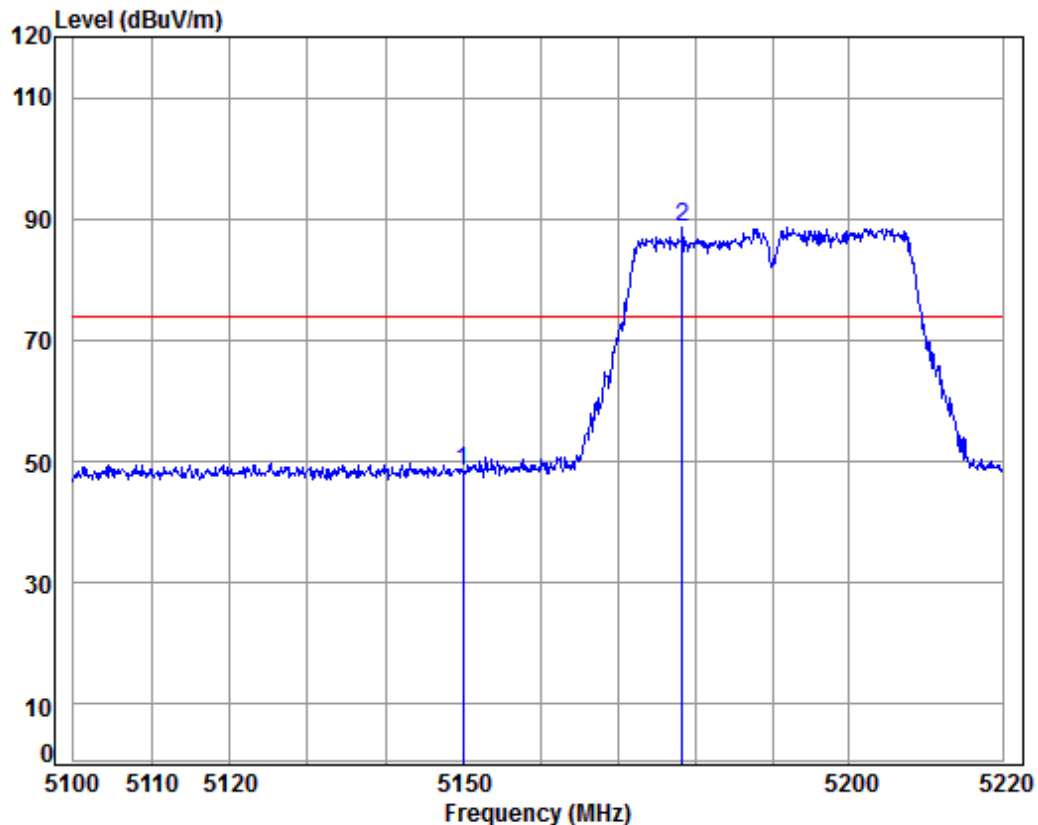

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5190 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.16	48.24	74.00	-25.76	
2 pp	5178.284	8.09	34.46	38.46	84.64	88.73	74.00	14.73	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 244 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Vertical
------------	---------------	-----------------	------	----------

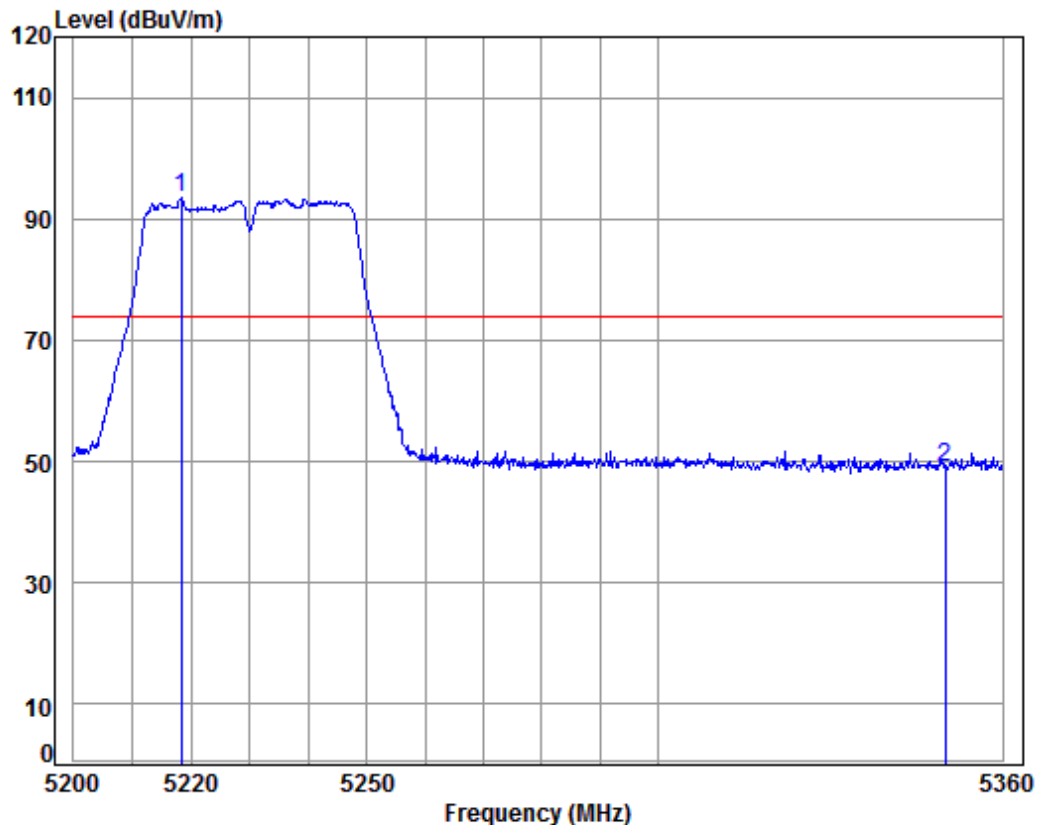

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5230 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5218.313	8.11	34.46	38.46	89.46	93.57	74.00	19.57	
2	5350.000	8.18	34.43	38.43	44.81	48.99	74.00	-25.01	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 245 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Horizontal
------------	---------------	-----------------	------	------------

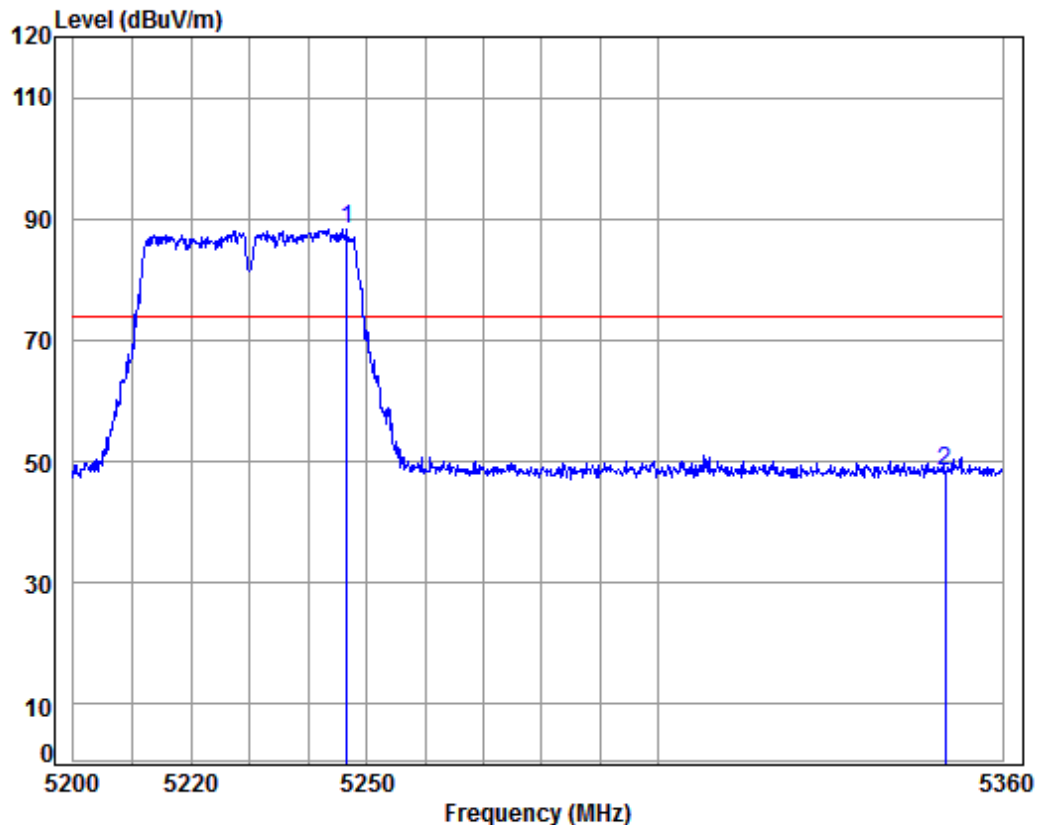

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5230 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5246.538	8.13	34.45	38.45	84.15	88.28	74.00	14.28	
2	5350.000	8.18	34.43	38.43	44.16	48.34	74.00	-25.66	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 246 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Vertical
------------	---------------	-----------------	------	----------

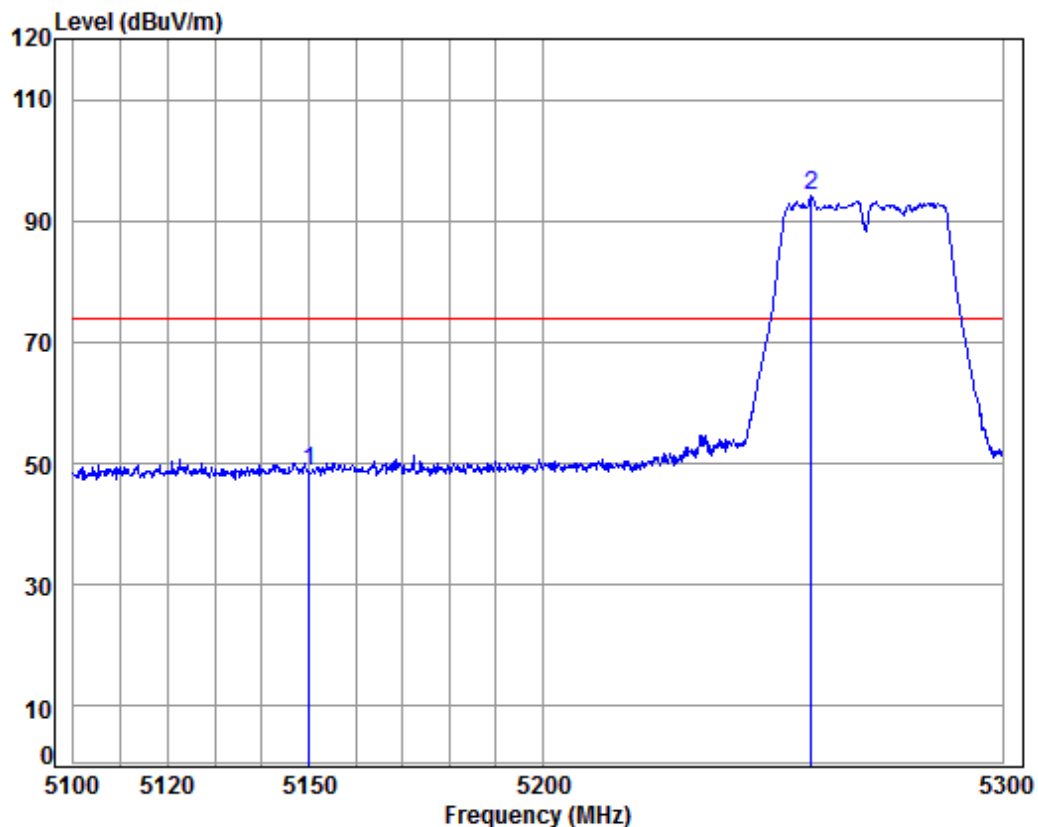

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5270 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.64	48.72	74.00	-25.28	
2 pp	5258.168	8.13	34.45	38.45	89.89	94.02	74.00	20.02	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 247 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Horizontal
------------	---------------	-----------------	------	------------

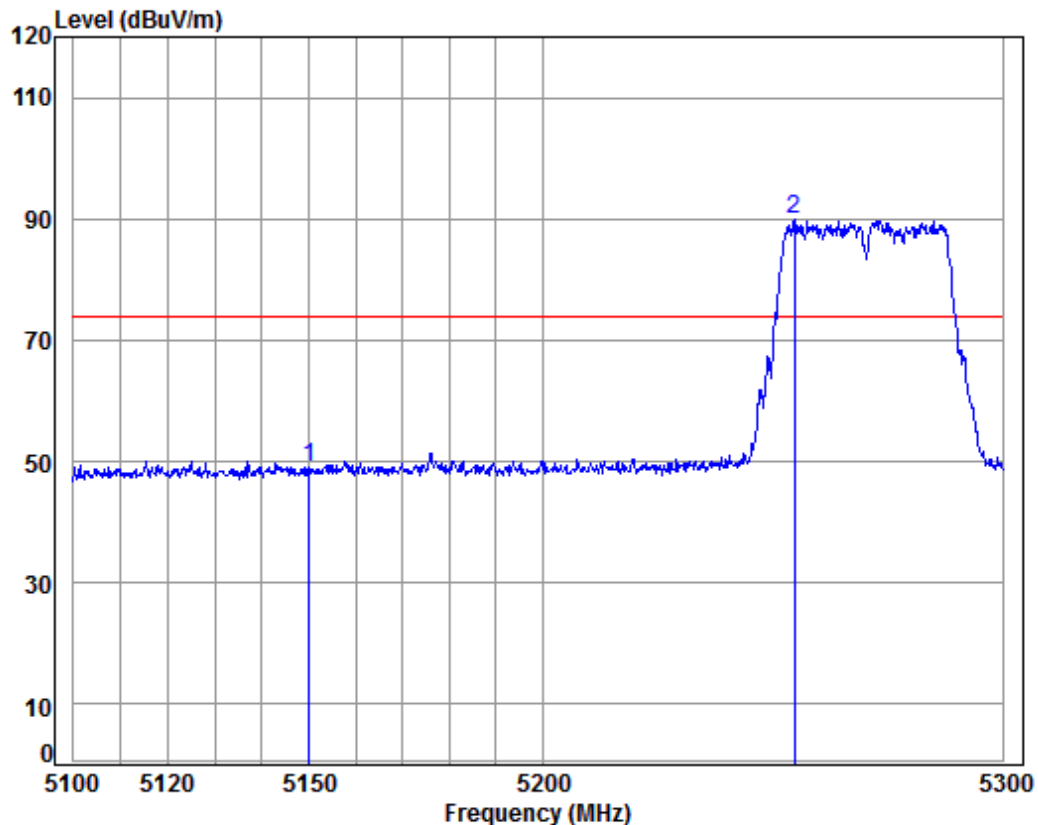

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5270 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	44.90	48.98	74.00	-25.02	
2 pp	5254.529	8.13	34.45	38.45	85.87	90.00	74.00	16.00	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 248 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Vertical
------------	---------------	-----------------	------	----------

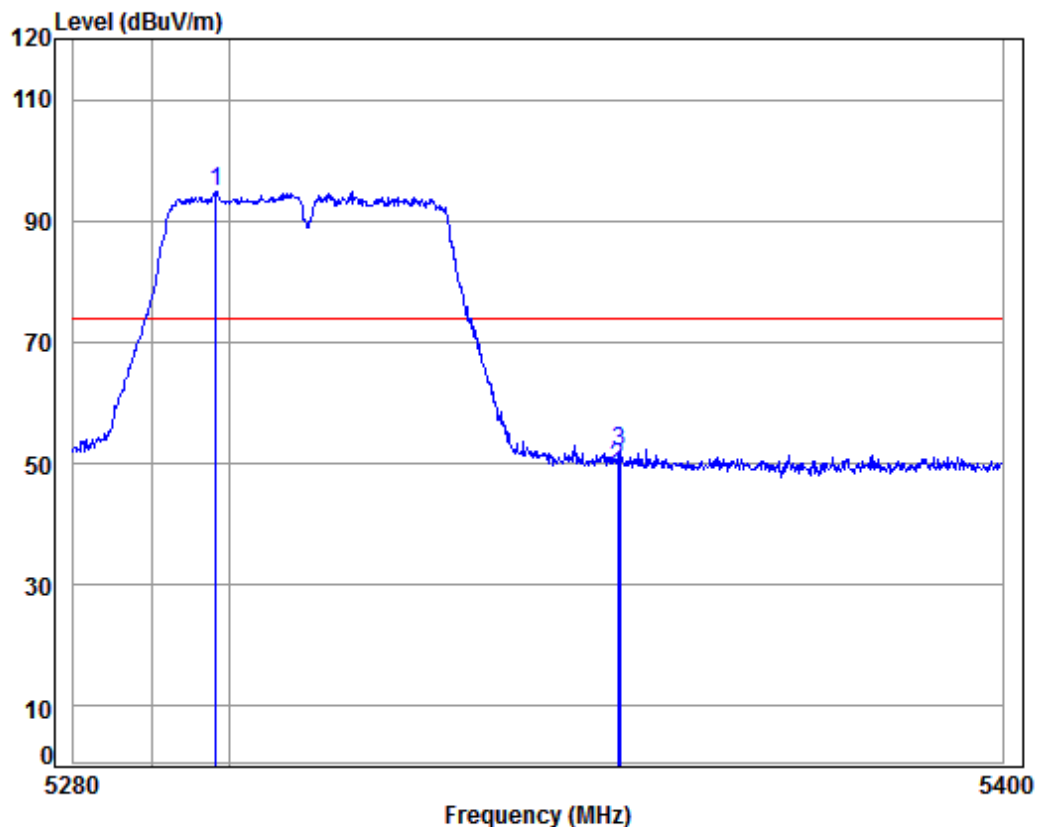

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5310 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5298.305	8.15	34.44	38.44	90.74	94.89	74.00	20.89	
2	5350.000	8.18	34.43	38.43	45.07	49.25	74.00	-24.75	
3	5350.233	8.18	34.43	38.43	47.73	51.91	74.00	-22.09	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 249 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Horizontal
------------	---------------	-----------------	------	------------

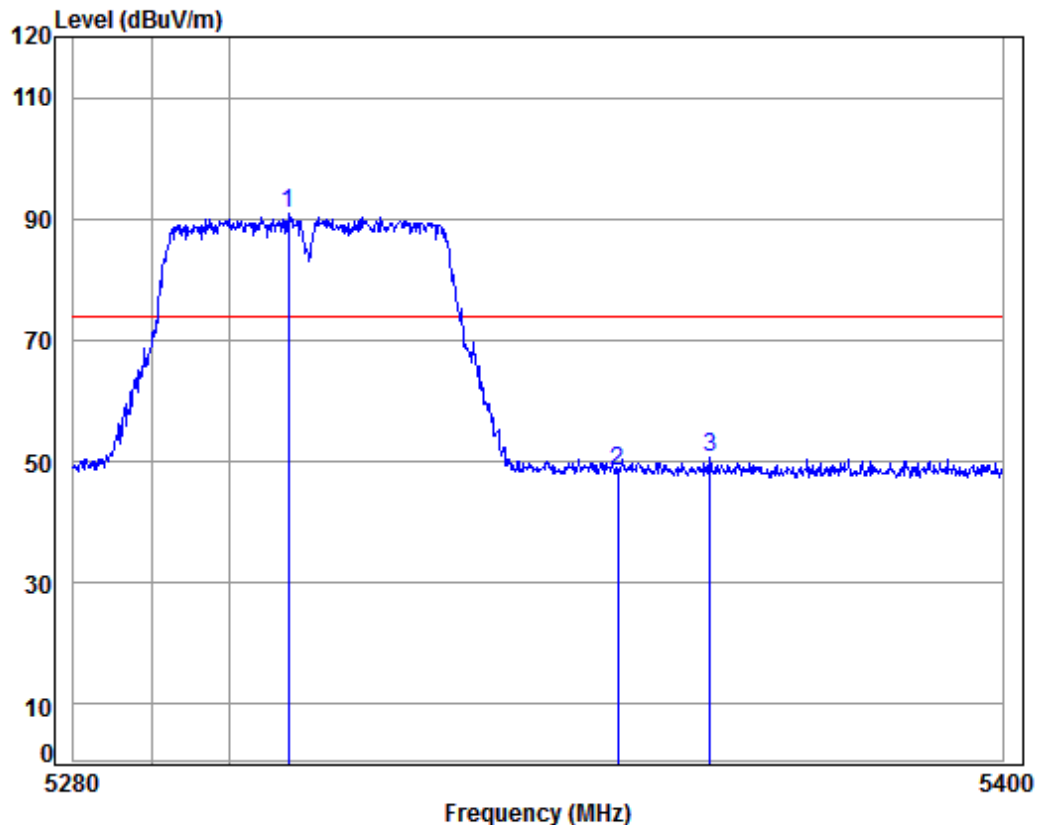

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5310 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5307.481	8.16	34.44	38.44	86.68	90.84	74.00	16.84	
2	5350.000	8.18	34.43	38.43	44.23	48.41	74.00	-25.59	
3	5361.909	8.18	34.43	38.43	46.34	50.52	74.00	-23.48	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 250 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Vertical
------------	---------------	-----------------	------	----------

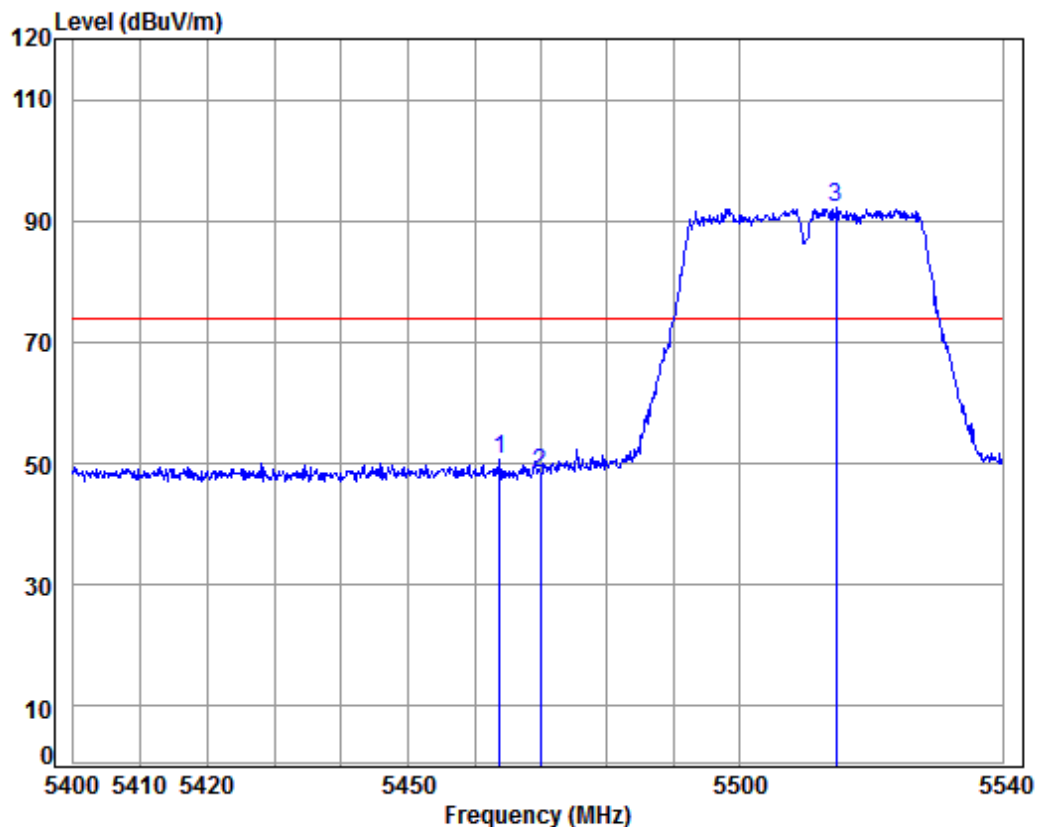

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5510 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5463.815	8.23	34.41	38.41	46.35	50.58	74.00	-23.42	
2	5470.000	8.24	34.41	38.41	44.16	48.40	74.00	-25.60	
3 pp	5514.676	8.27	34.41	38.40	87.88	92.16	74.00	18.16	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 251 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Horizontal
------------	---------------	-----------------	------	------------

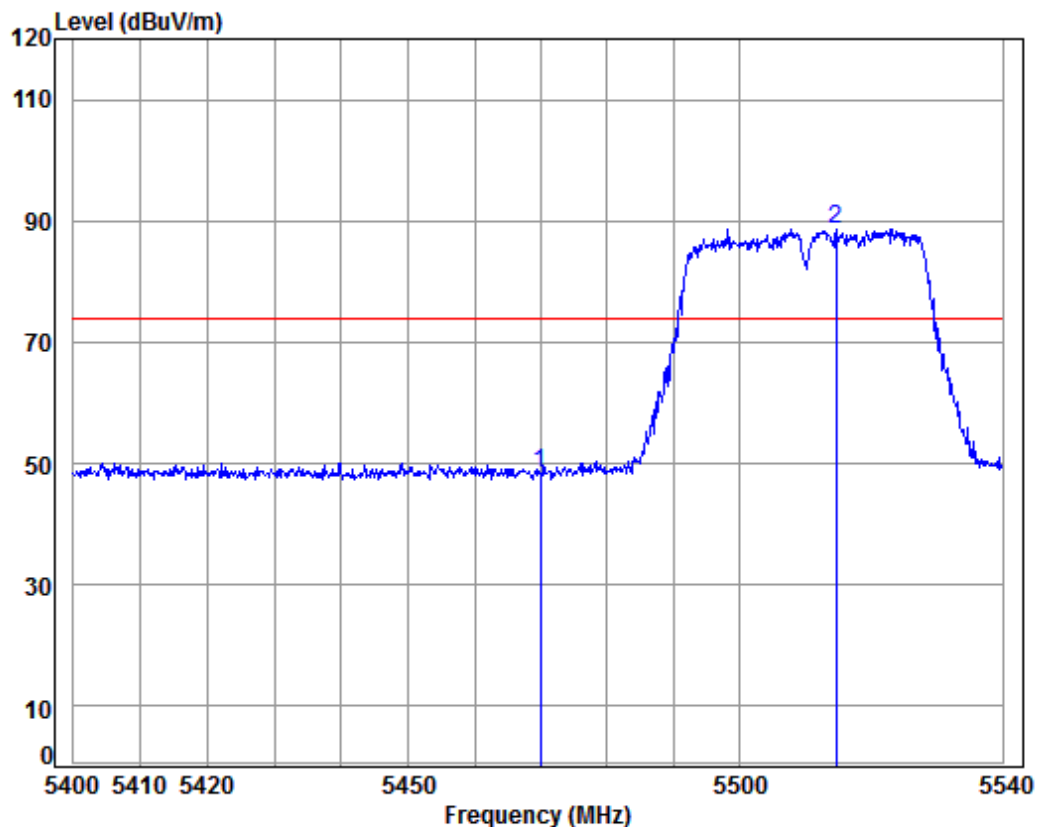

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5510 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5470.000	8.24	34.41	38.41	44.24	48.48	74.00	-25.52	
2 pp	5514.676	8.27	34.41	38.40	84.26	88.54	74.00	14.54	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 252 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Vertical
------------	---------------	-----------------	------	----------

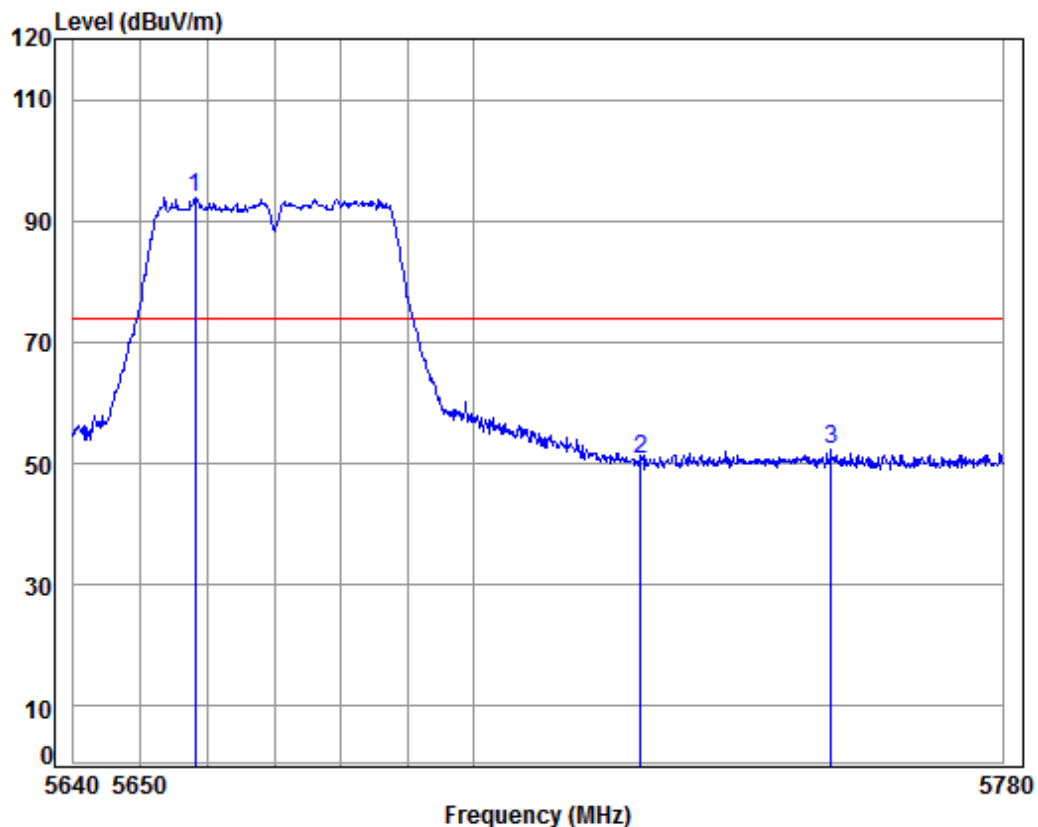

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5670 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5658.145	8.41	34.50	38.37	89.39	93.93	74.00	19.93	
2	5725.000	8.48	34.54	38.35	46.15	50.82	74.00	-23.18	
3	5753.840	8.51	34.56	38.35	47.52	52.24	74.00	-21.76	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 253 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Horizontal
------------	---------------	-----------------	------	------------

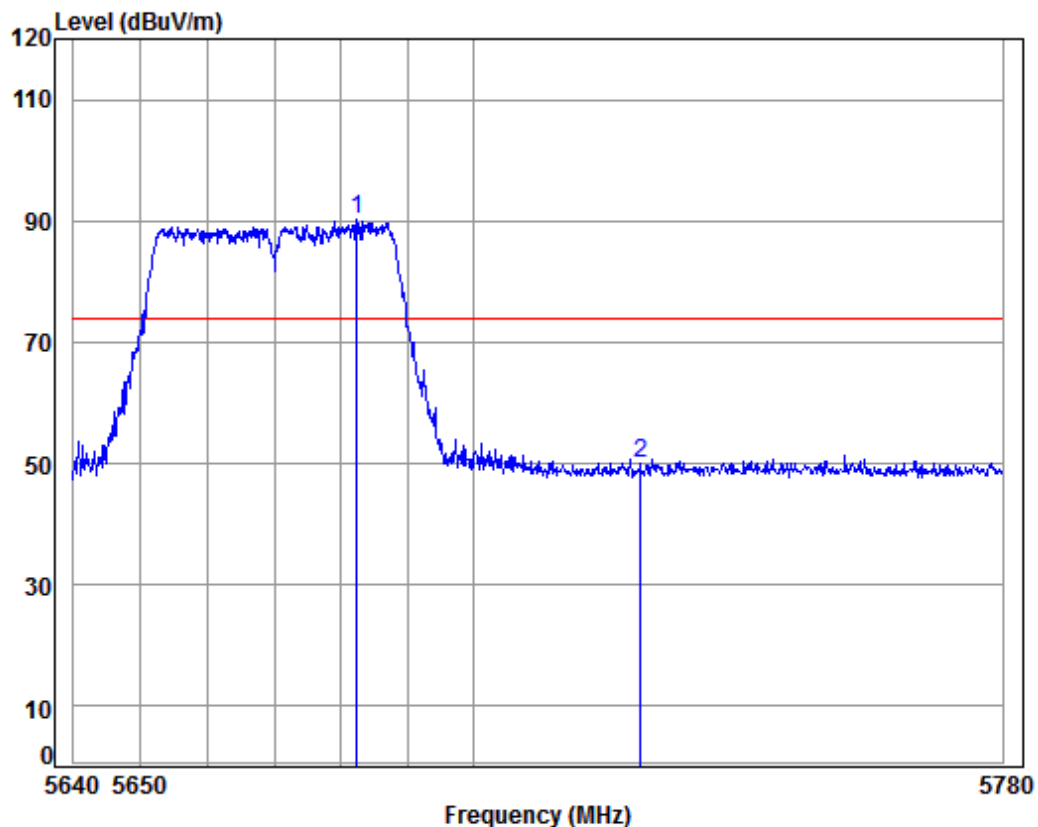

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5670 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5682.337	8.44	34.51	38.36	85.52	90.11	74.00	16.11	
2	5725.000	8.48	34.54	38.35	45.42	50.09	74.00	-23.91	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 254 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5745	Vertical
------------	---------------	-----------------	------	----------

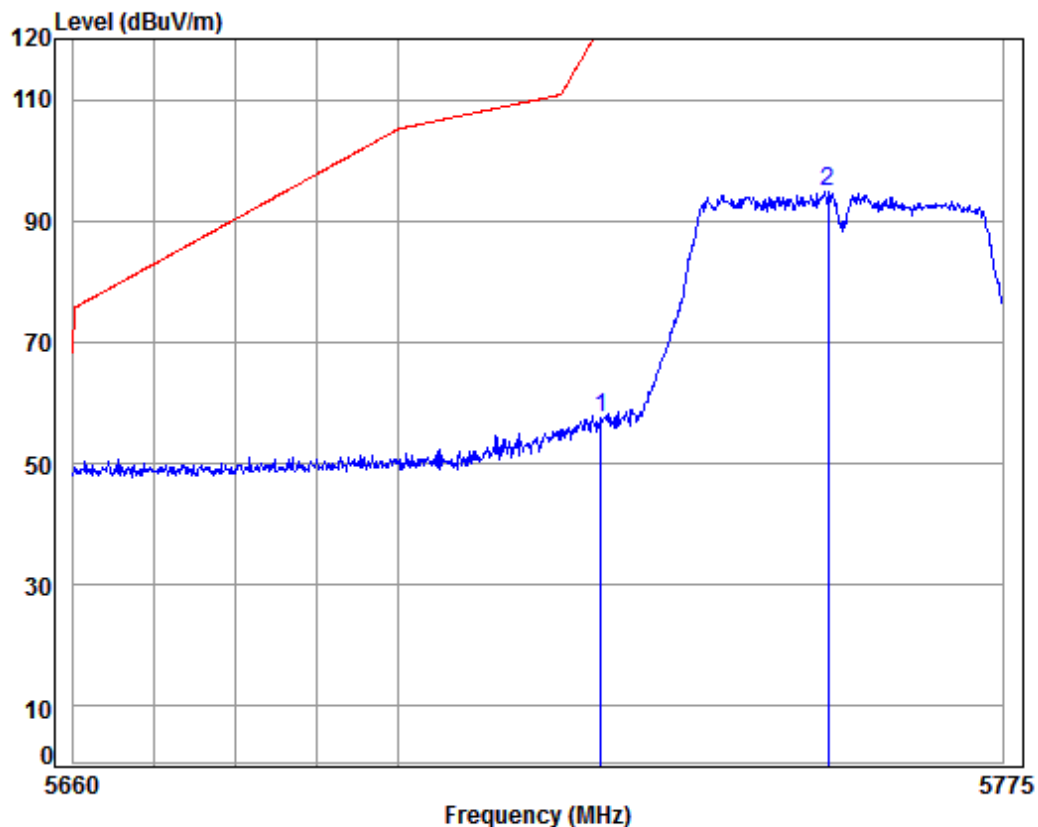

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5745 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	8.48	34.54	38.35	52.86	57.53	122.20	-64.67	
2 pp	5753.203	8.51	34.56	38.35	90.26	94.98	125.20	-30.22	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 255 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5745	Horizontal
------------	---------------	-----------------	------	------------

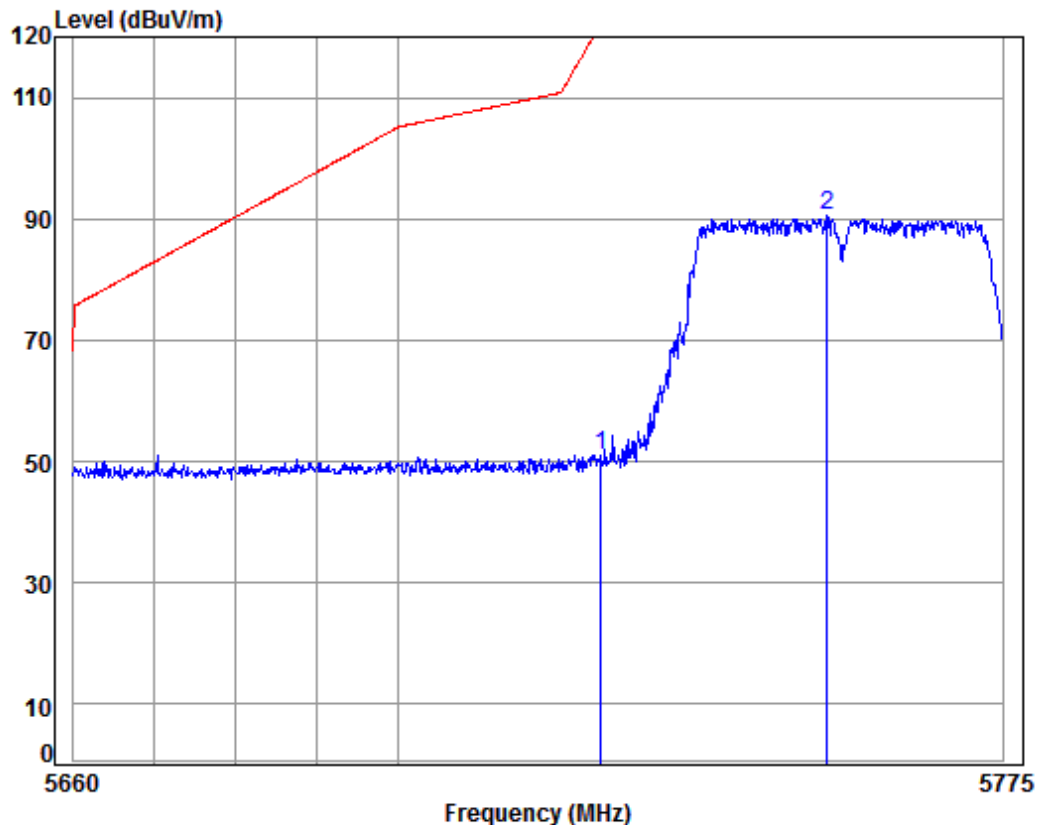

Condition: 3m HORIZONTAL
Job No: : 11090CR
Mode: : 5745 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	8.48	34.54	38.35	46.44	51.11	122.20	-71.09	
2 pp	5753.087	8.51	34.56	38.35	85.83	90.55	125.20	-34.65	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 256 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Vertical
------------	---------------	-----------------	------	----------

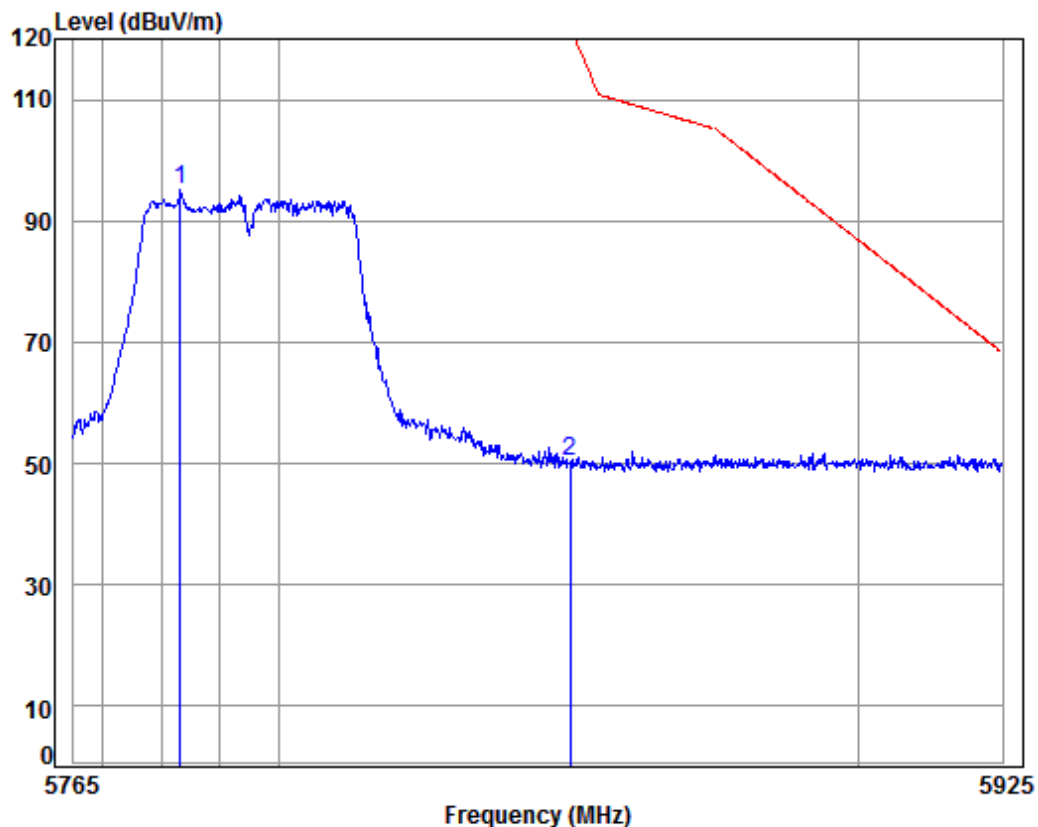

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5795 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5783.178	8.54	34.57	38.34	90.22	94.99	125.20	-30.21	
2	5850.000	8.60	34.61	38.33	45.52	50.40	122.20	-71.80	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 257 of 283

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Horizontal
------------	---------------	-----------------	------	------------

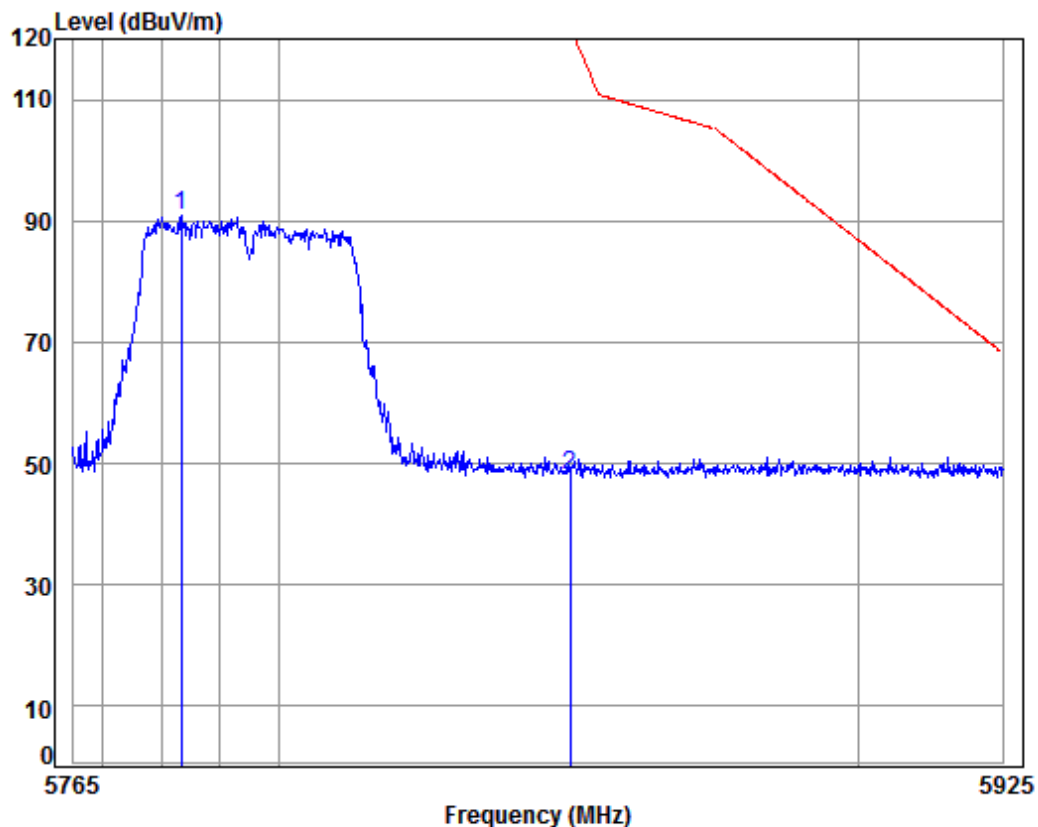

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5795 Bandedge
: WIFI-N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5783.336	8.54	34.57	38.34	86.07	90.84	125.20	-34.36	
2	5850.000	8.60	34.61	38.33	43.14	48.02	122.20	-74.18	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 258 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Vertical
------------	----------------	-----------------	------	----------

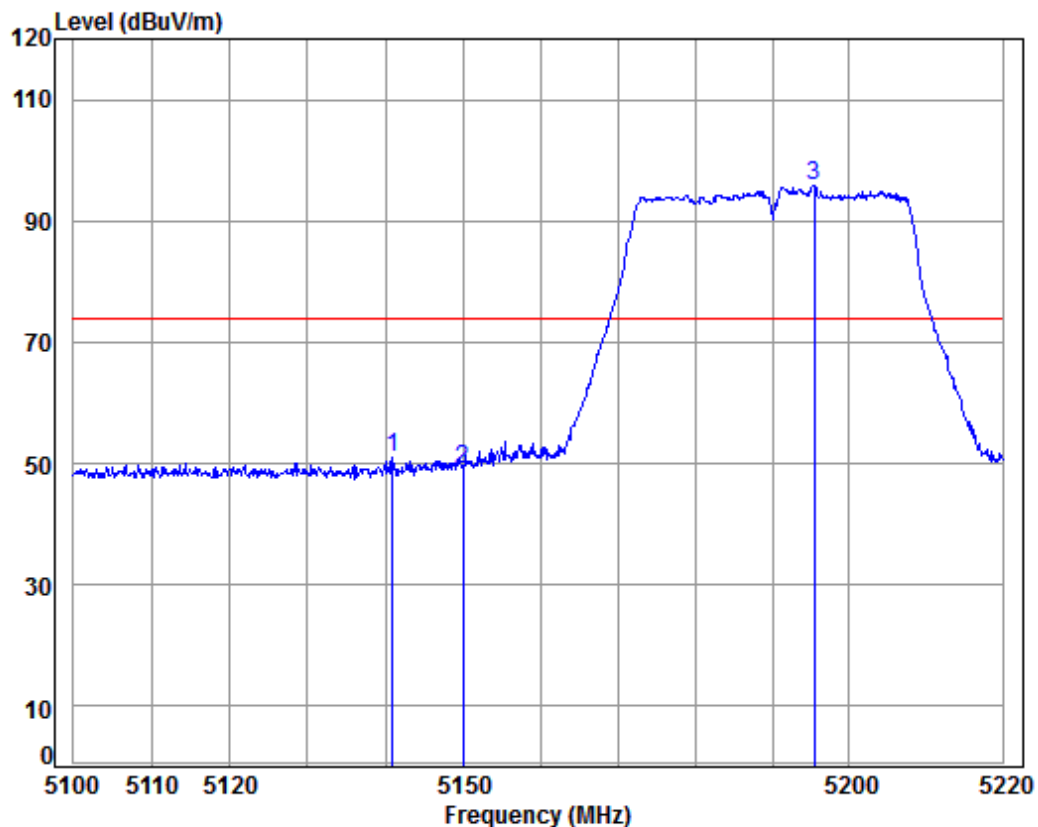

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5190 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5140.965	8.07	34.47	38.47	46.96	51.03	74.00	-22.97	
2	5150.000	8.08	34.47	38.47	45.04	49.12	74.00	-24.88	
3 pp	5195.414	8.10	34.46	38.46	91.71	95.81	74.00	21.81	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 259 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Horizontal
------------	----------------	-----------------	------	------------

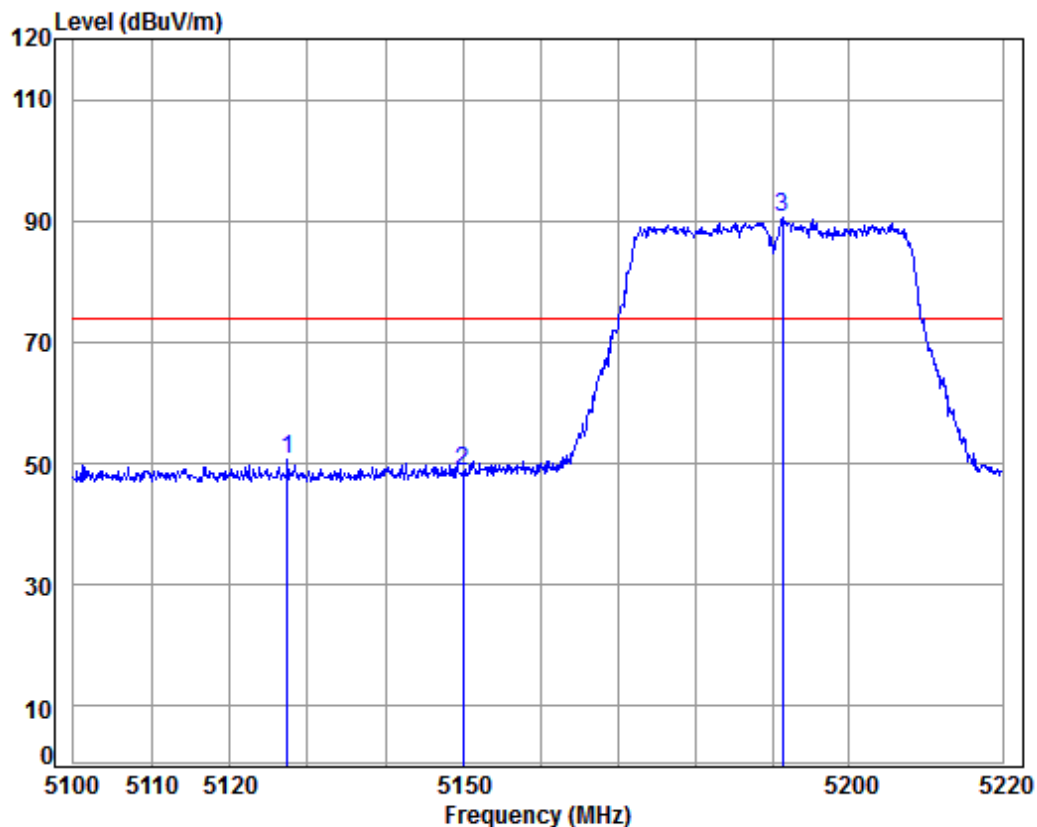

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5190 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5127.354	8.07	34.47	38.47	46.51	50.58	74.00	-23.42	
2	5150.000	8.08	34.47	38.47	44.70	48.78	74.00	-25.22	
3 pp	5191.307	8.10	34.46	38.46	86.41	90.51	74.00	16.51	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 260 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Vertical
------------	----------------	-----------------	------	----------

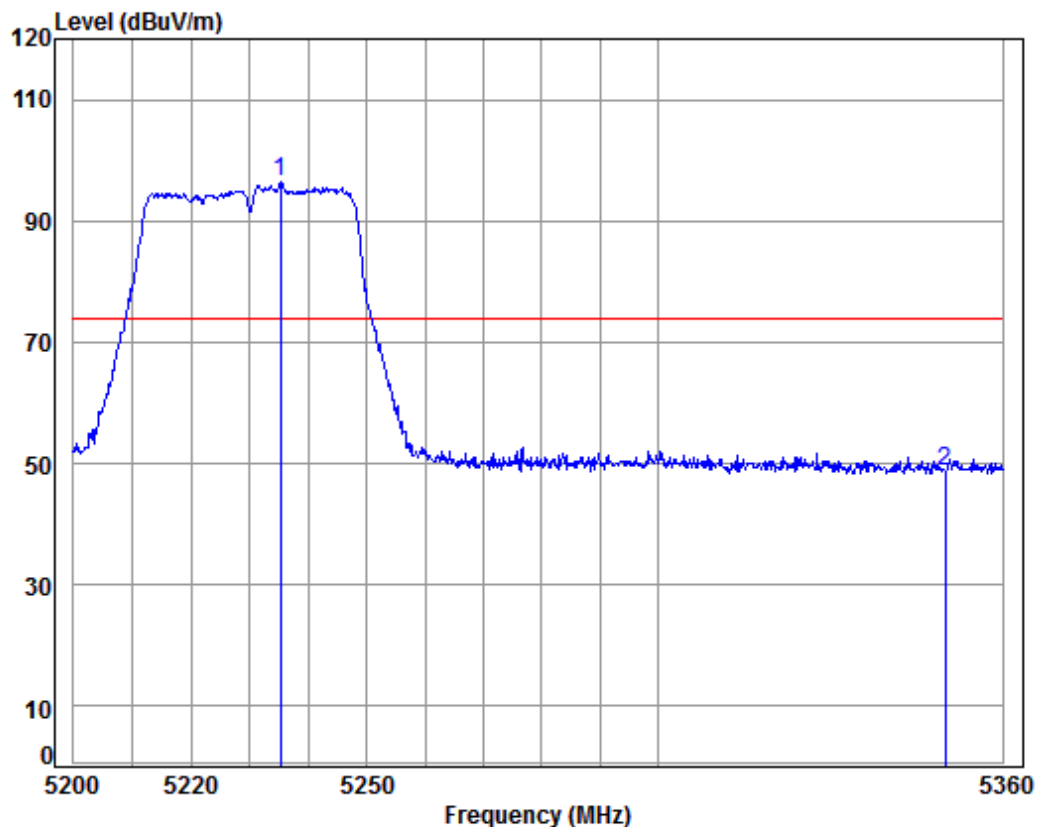

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5230 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5235.261	8.12	34.45	38.45	92.38	96.50	74.00	22.50	
2	5350.000	8.18	34.43	38.43	44.55	48.73	74.00	-25.27	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 261 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Horizontal
------------	----------------	-----------------	------	------------

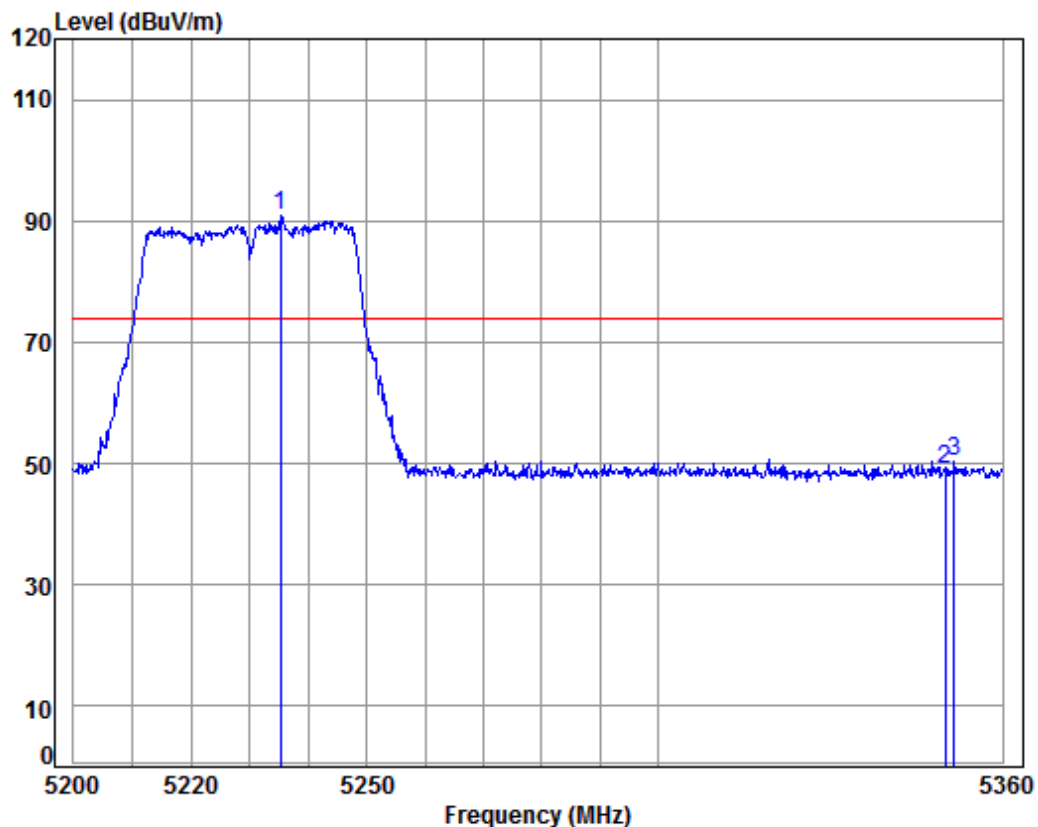

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5230 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5235.261	8.12	34.45	38.45	86.68	90.80	74.00	16.80	
2	5350.000	8.18	34.43	38.43	44.82	49.00	74.00	-25.00	
3	5351.560	8.18	34.43	38.43	46.19	50.37	74.00	-23.63	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 262 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Vertical
------------	----------------	-----------------	------	----------

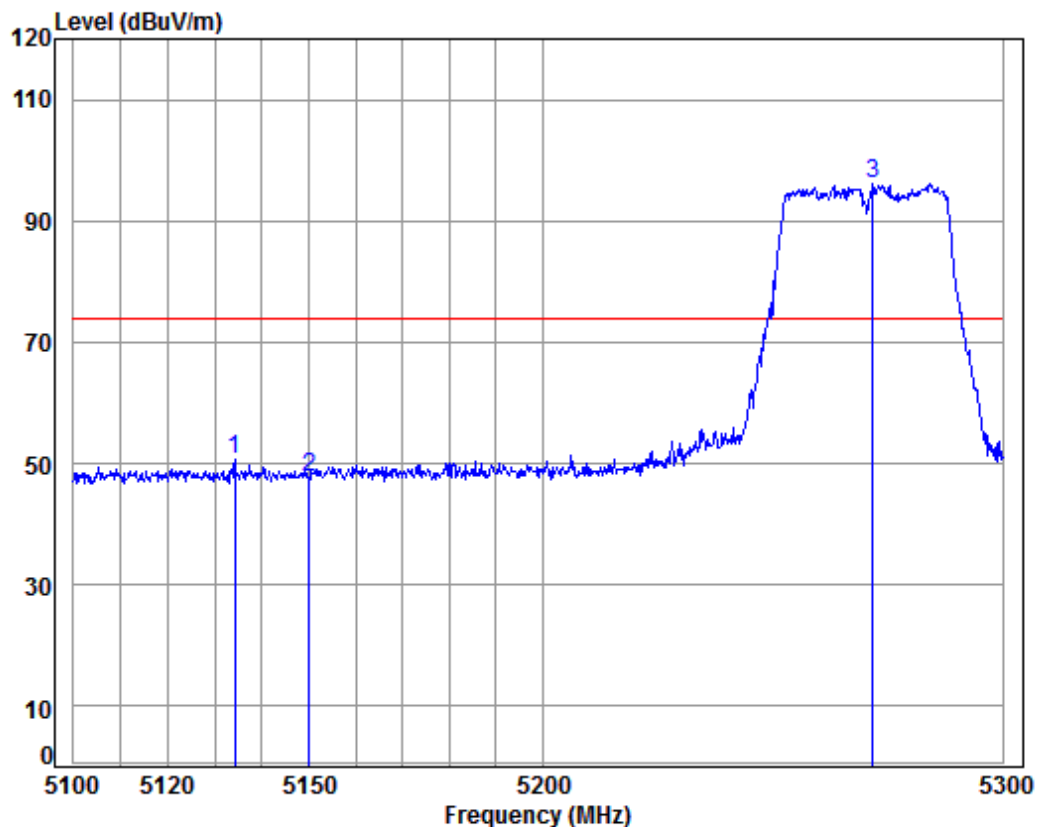

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5270 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5134.250	8.07	34.47	38.47	46.72	50.79	74.00	-23.21	
2	5150.000	8.08	34.47	38.47	43.58	47.66	74.00	-26.34	
3 pp	5271.535	8.14	34.44	38.45	92.15	96.28	74.00	22.28	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 263 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Horizontal
------------	----------------	-----------------	------	------------

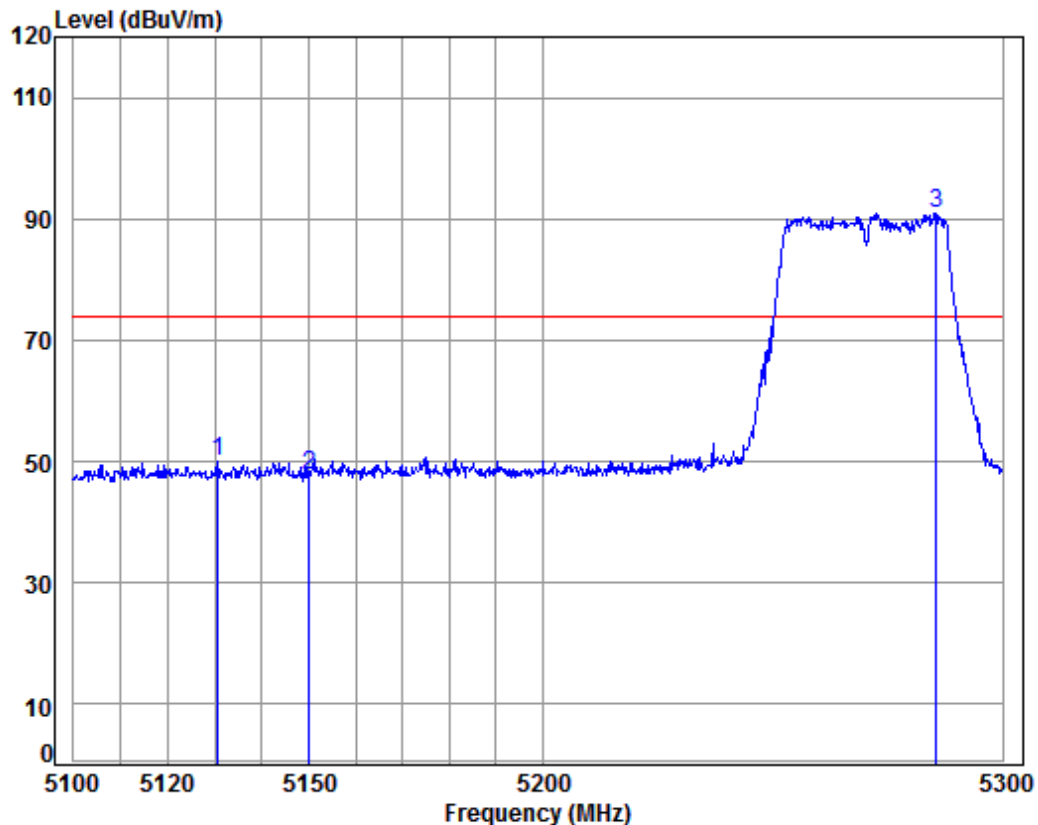

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5270 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5130.696	8.07	34.47	38.47	45.90	49.97	74.00	-24.03	
2	5150.000	8.08	34.47	38.47	43.60	47.68	74.00	-26.32	
3 pp	5285.545	8.15	34.44	38.44	86.81	90.96	74.00	16.96	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 264 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Vertical
------------	----------------	-----------------	------	----------

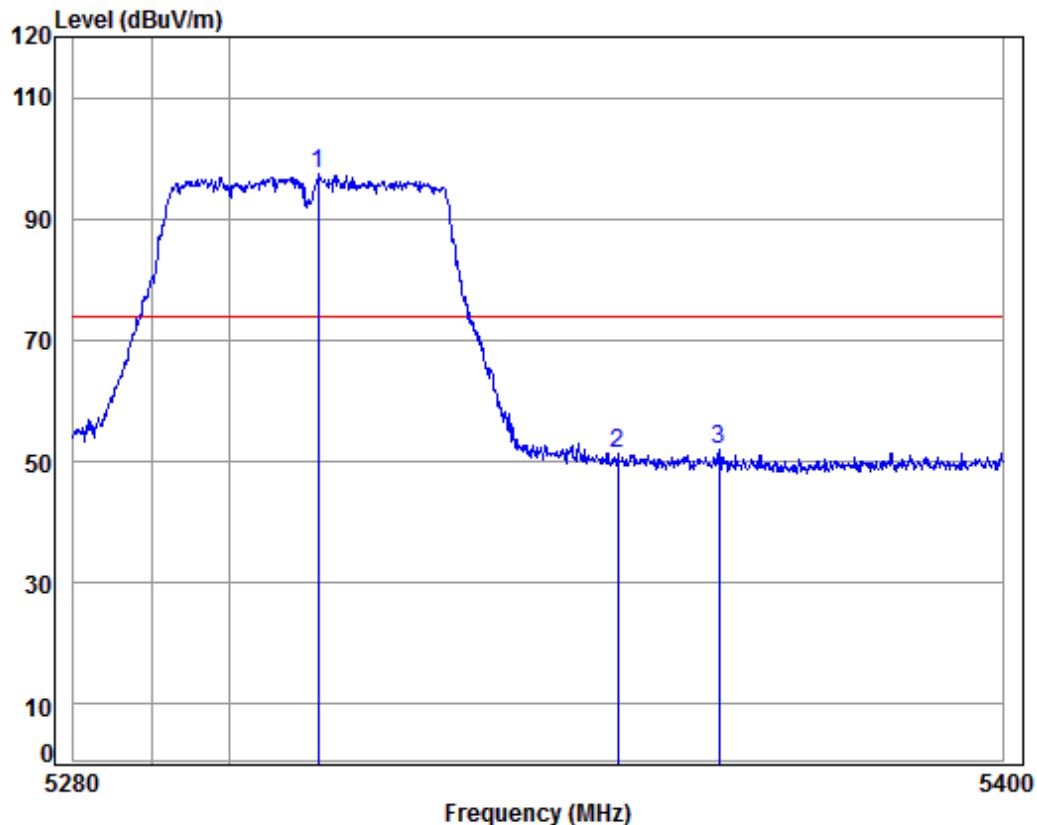

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5310 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5311.299	8.16	34.44	38.44	93.38	97.54	74.00	23.54	
2	5350.000	8.18	34.43	38.43	47.27	51.45	74.00	-22.55	
3	5363.114	8.18	34.43	38.43	47.68	51.86	74.00	-22.14	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 265 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Horizontal
------------	----------------	-----------------	------	------------

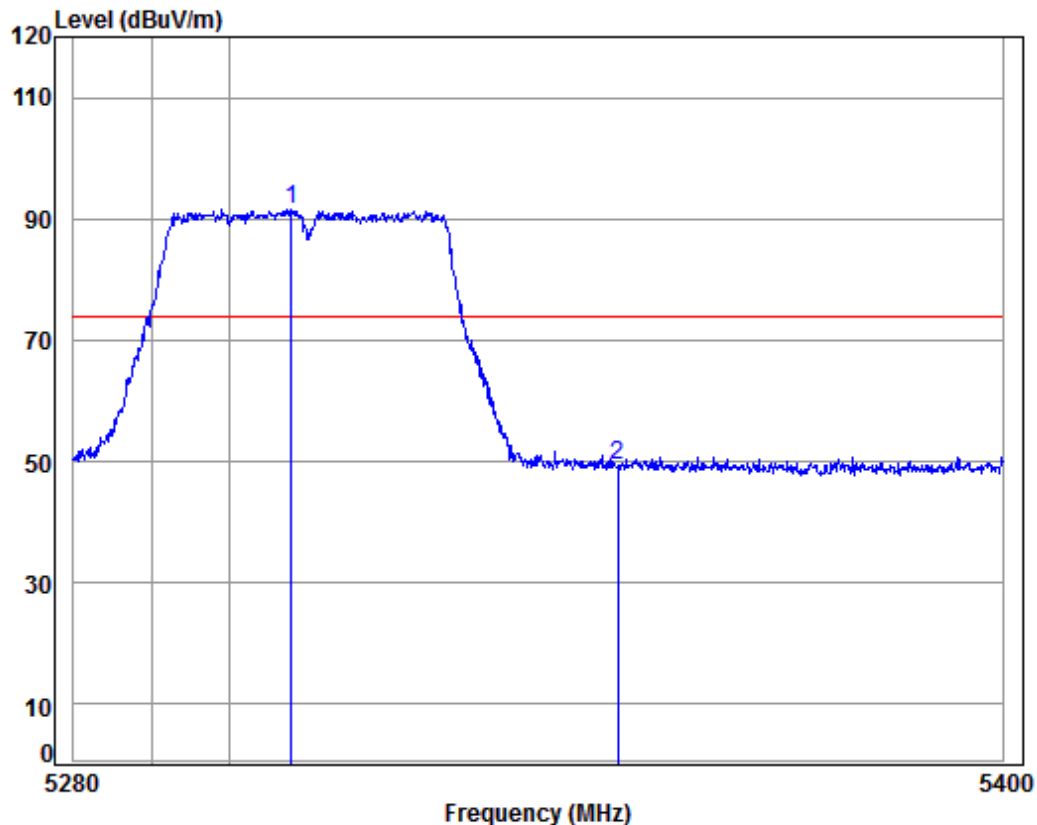

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5310 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5307.958	8.16	34.44	38.44	87.44	91.60	74.00	17.60	
2	5350.000	8.18	34.43	38.43	45.12	49.30	74.00	-24.70	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 266 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Vertical
------------	----------------	-----------------	------	----------

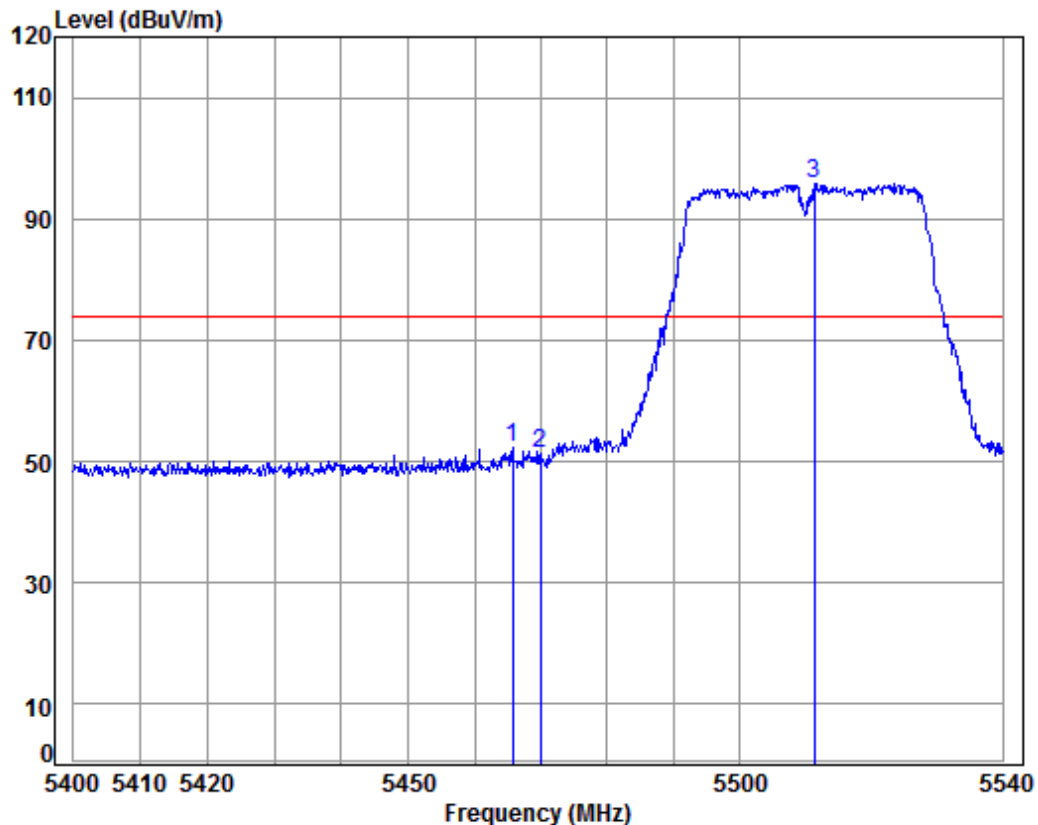

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5510 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5465.773	8.23	34.41	38.41	48.02	52.25	74.00	-21.75	
2	5470.000	8.24	34.41	38.41	47.20	51.44	74.00	-22.56	
3 pp	5511.290	8.26	34.41	38.40	91.45	95.72	74.00	21.72	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 267 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Horizontal
------------	----------------	-----------------	------	------------

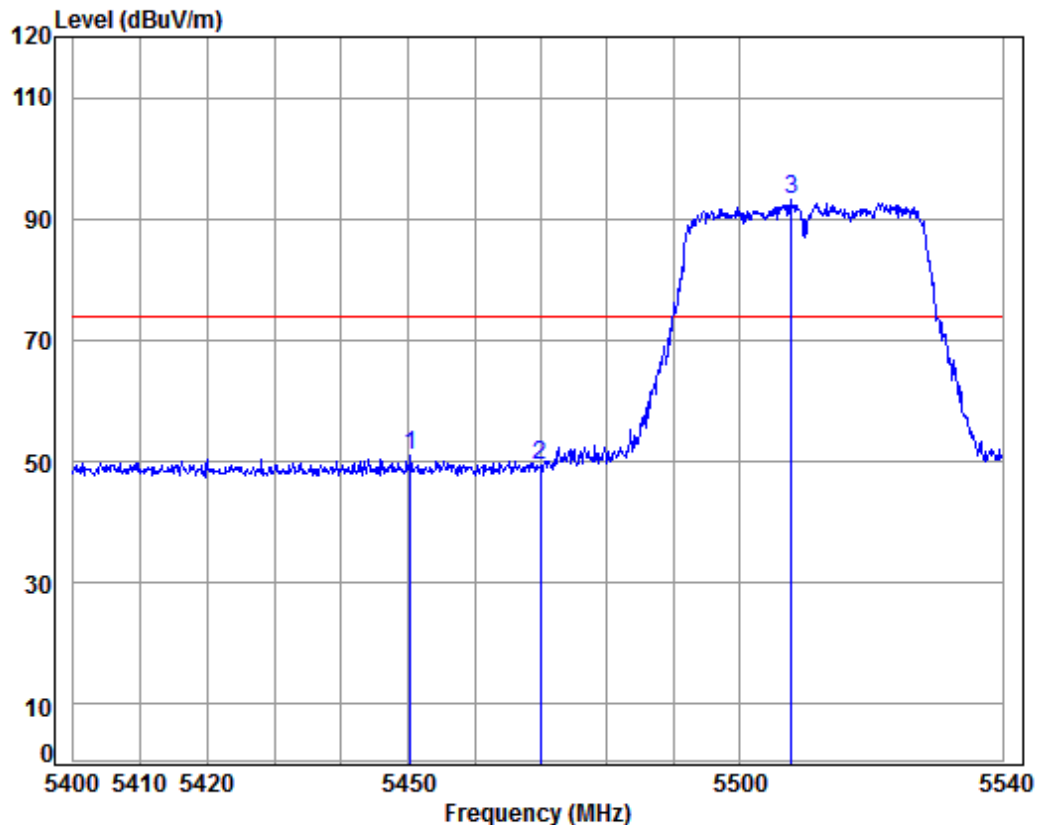

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5510 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5450.406	8.23	34.41	38.41	46.67	50.90	74.00	-23.10	
2	5470.000	8.24	34.41	38.41	45.19	49.43	74.00	-24.57	
3 pp	5507.905	8.26	34.40	38.40	88.79	93.05	74.00	19.05	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 268 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Vertical
------------	----------------	-----------------	------	----------

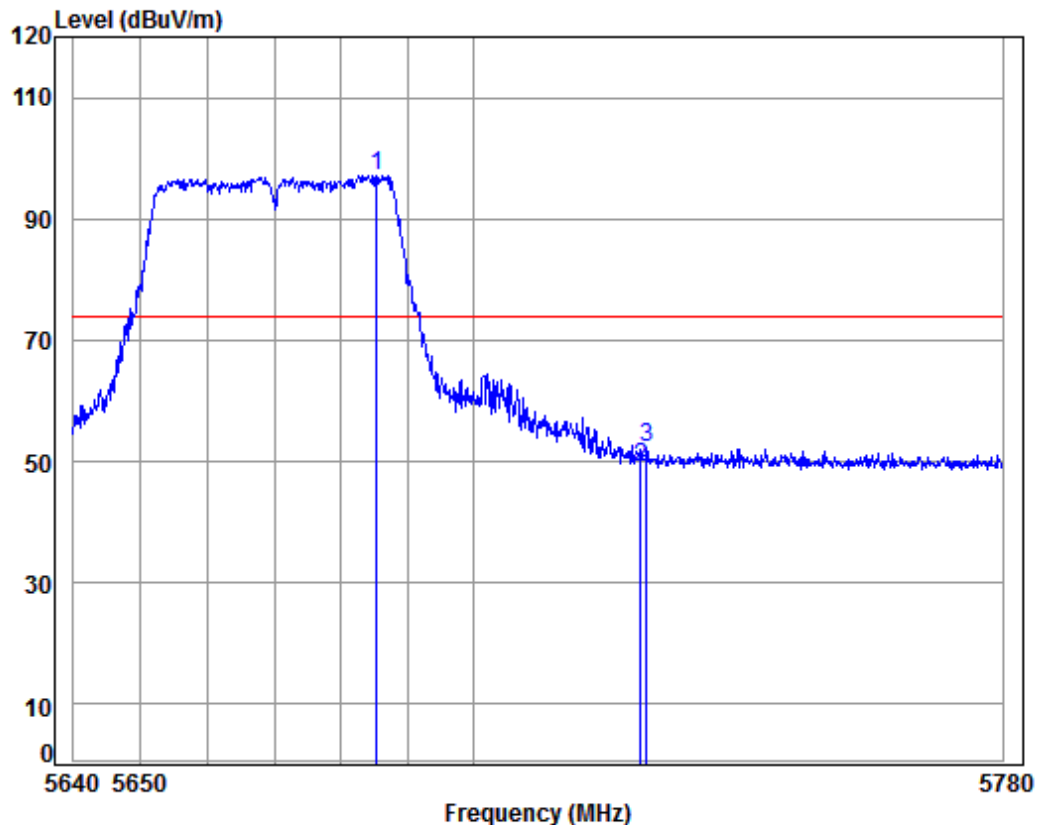

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5670 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5685.403	8.44	34.51	38.36	92.68	97.27	74.00	23.27	
2	5725.000	8.48	34.54	38.35	44.54	49.21	74.00	-24.79	
3	5725.974	8.48	34.54	38.35	47.75	52.42	74.00	-21.58	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 269 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Horizontal
------------	----------------	-----------------	------	------------

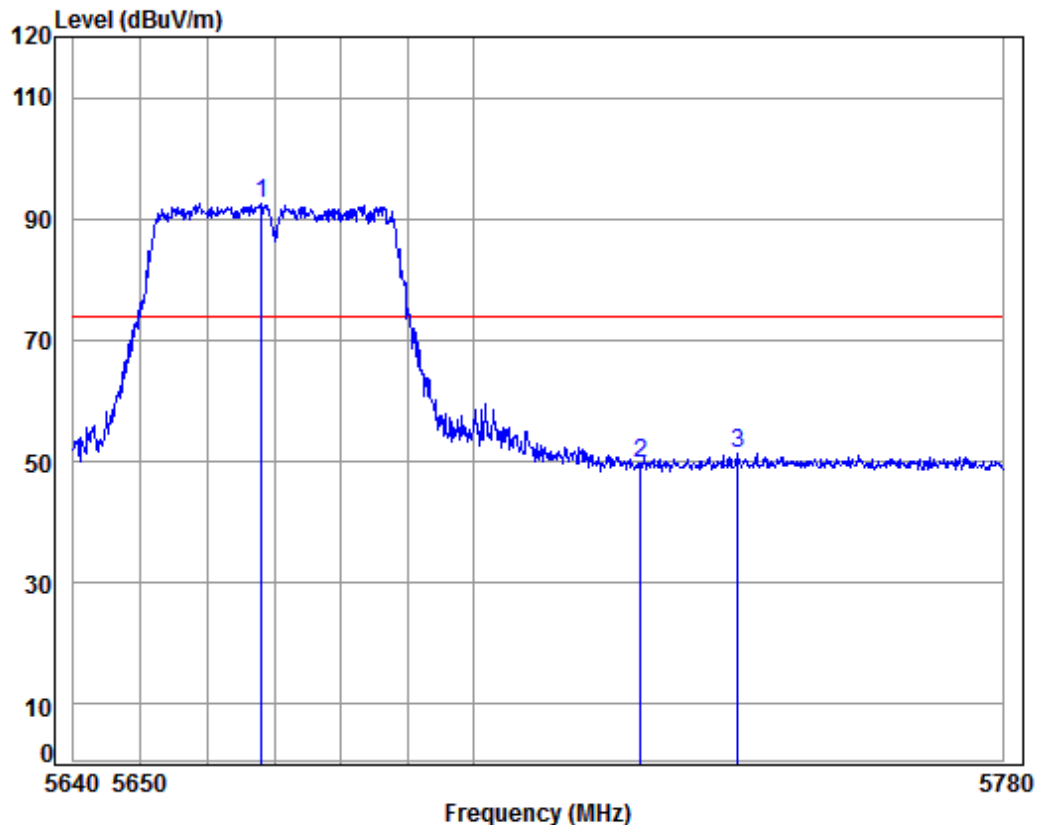

Condition: 3m HORIZONTAL
Job No: : 11090CR
Mode: : 5670 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5668.143	8.42	34.50	38.37	88.10	92.65	74.00	18.65	
2	5725.000	8.48	34.54	38.35	45.10	49.77	74.00	-24.23	
3	5739.750	8.50	34.55	38.35	46.52	51.22	74.00	-22.78	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 270 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Vertical
------------	----------------	-----------------	------	----------

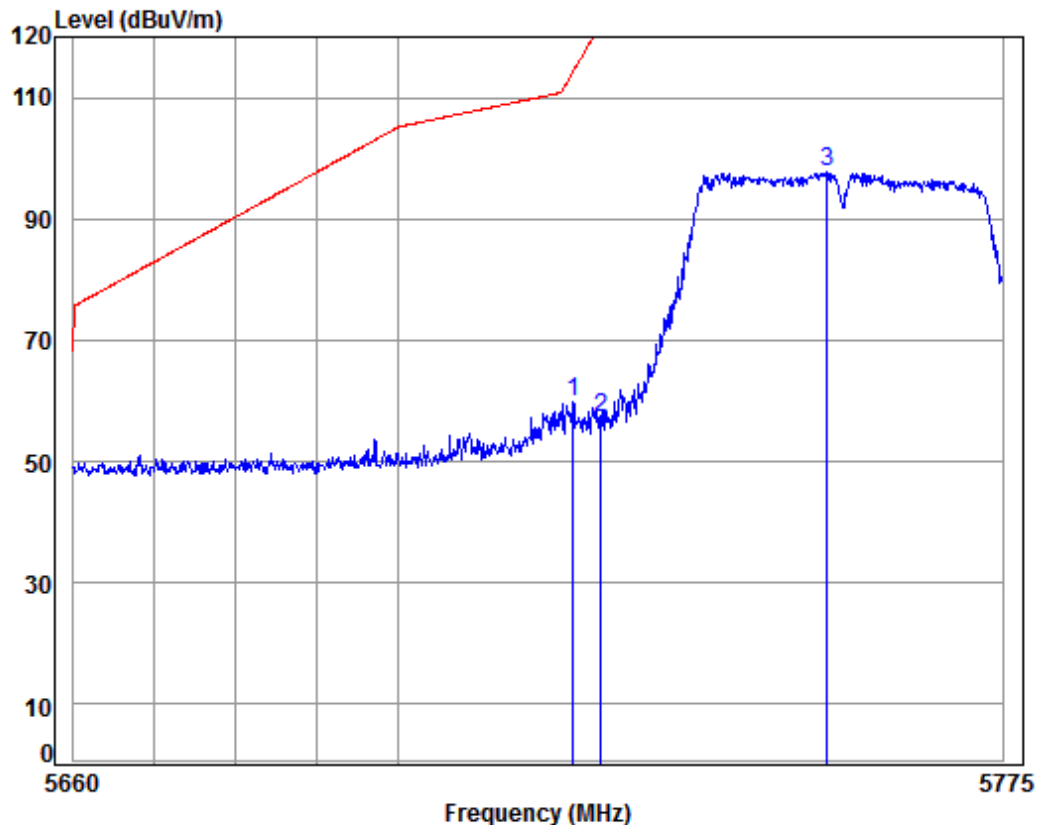

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5755 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5721.583	8.48	34.54	38.36	55.05	59.71	114.41	-54.70	
2	5725.000	8.48	34.54	38.35	52.57	57.24	122.20	-64.96	
3 pp	5753.087	8.51	34.56	38.35	93.11	97.83	125.20	-27.37	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 271 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Horizontal
------------	----------------	-----------------	------	------------

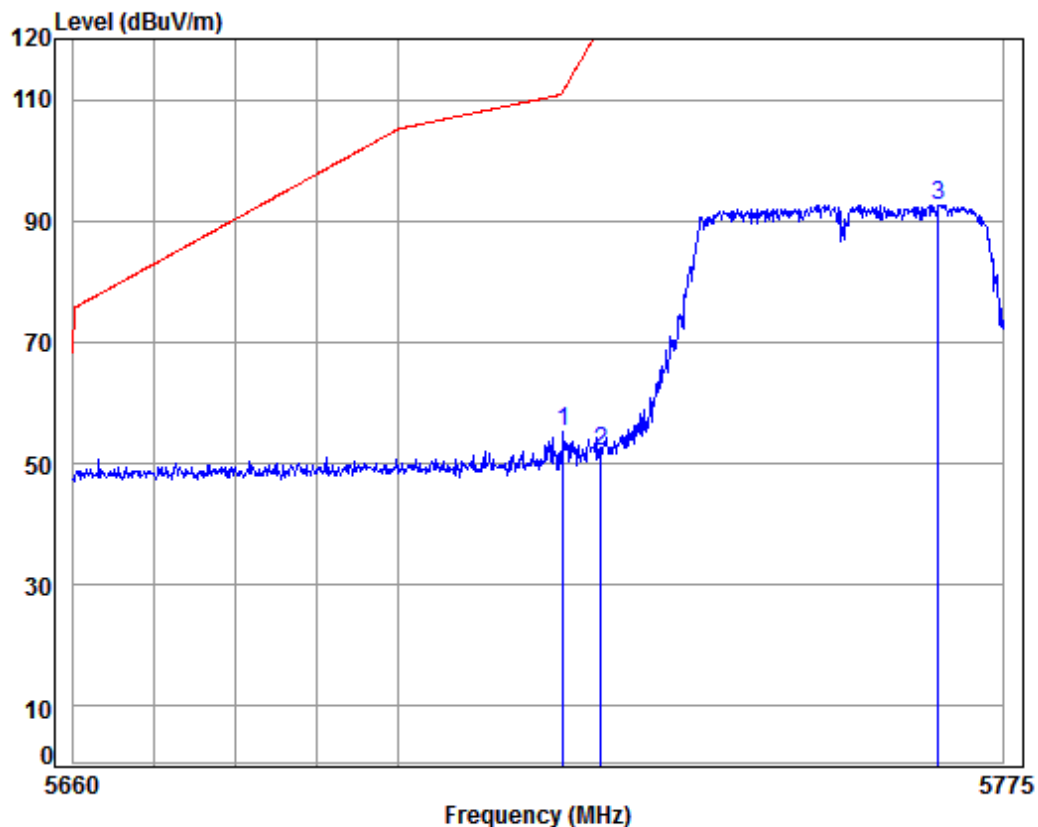

Condition: 3m HORIZONTAL
Job No: : 11090CR
Mode: : 5755 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5720.316	8.48	34.54	38.36	50.67	55.33	111.52	-56.19	
2	5725.000	8.48	34.54	38.35	47.32	51.99	122.20	-70.21	
3 pp	5766.991	8.52	34.56	38.35	87.91	92.64	125.20	-32.56	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 272 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Vertical
------------	----------------	-----------------	------	----------

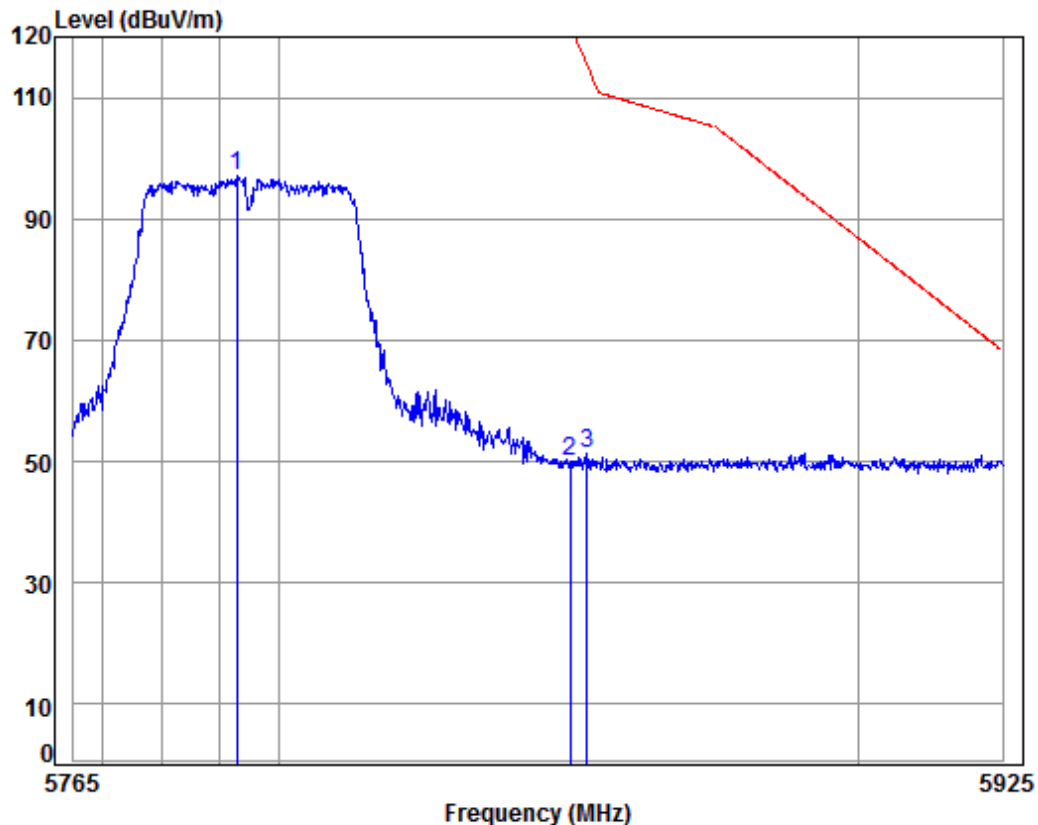

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5795 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5792.843	8.55	34.58	38.34	92.23	97.02	125.20	-28.18	
2	5850.000	8.60	34.61	38.33	45.18	50.06	122.20	-72.14	
3	5852.938	8.61	34.61	38.33	46.30	51.19	115.50	-64.31	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 273 of 283

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Horizontal
------------	----------------	-----------------	------	------------

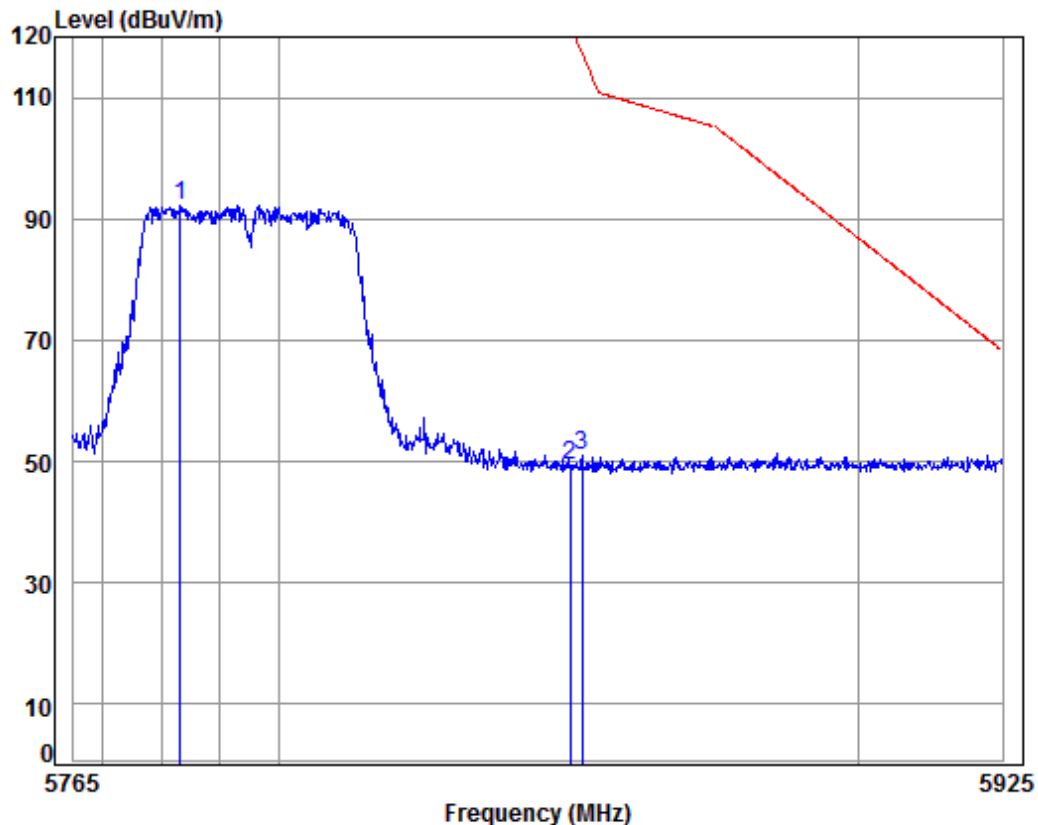

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5795 Bandedge
: WIFI-AC40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5783.178	8.54	34.57	38.34	87.37	92.14	125.20	-33.06	
2	5850.000	8.60	34.61	38.33	44.42	49.30	122.20	-72.90	
3	5851.977	8.61	34.61	38.33	46.02	50.91	117.69	-66.78	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 274 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Vertical
------------	----------------	-----------------	------	----------

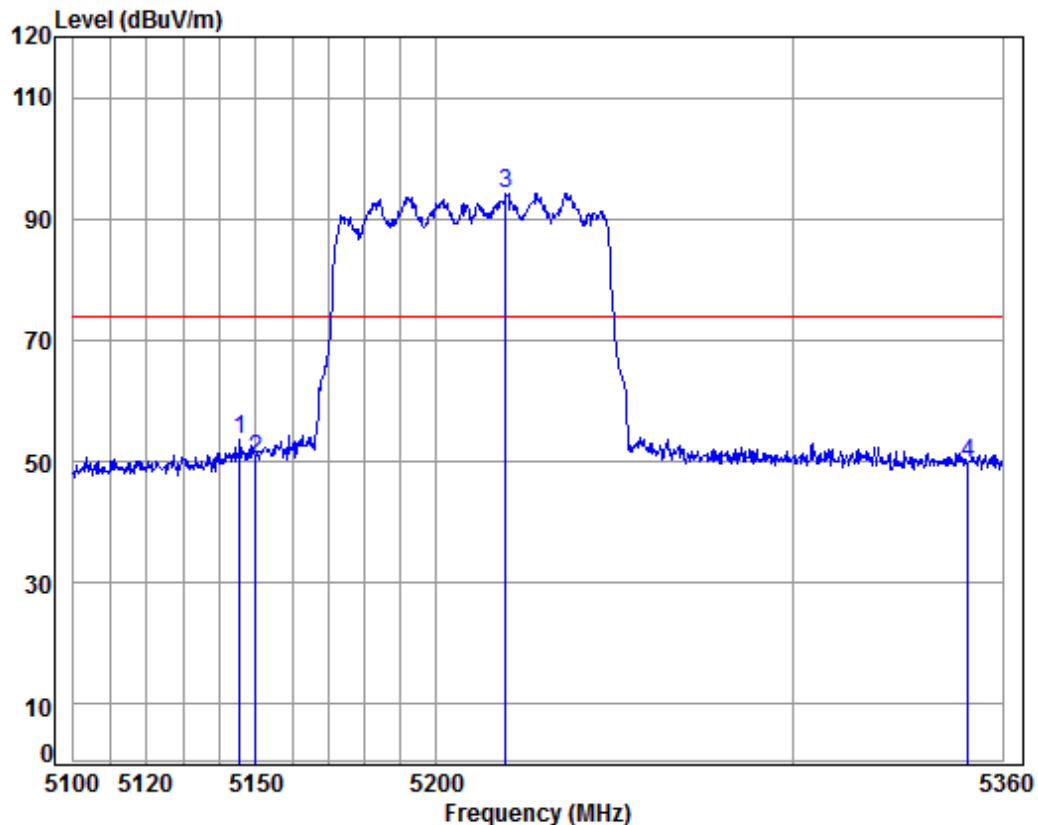

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5210 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.595	8.08	34.47	38.47	49.38	53.46	74.00	-20.54	
2	5150.000	8.08	34.47	38.47	46.20	50.28	74.00	-23.72	
3 pp	5219.293	8.11	34.45	38.46	90.12	94.22	74.00	20.22	
4	5350.000	8.18	34.43	38.43	45.60	49.78	74.00	-24.22	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 275 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Horizontal
------------	----------------	-----------------	------	------------

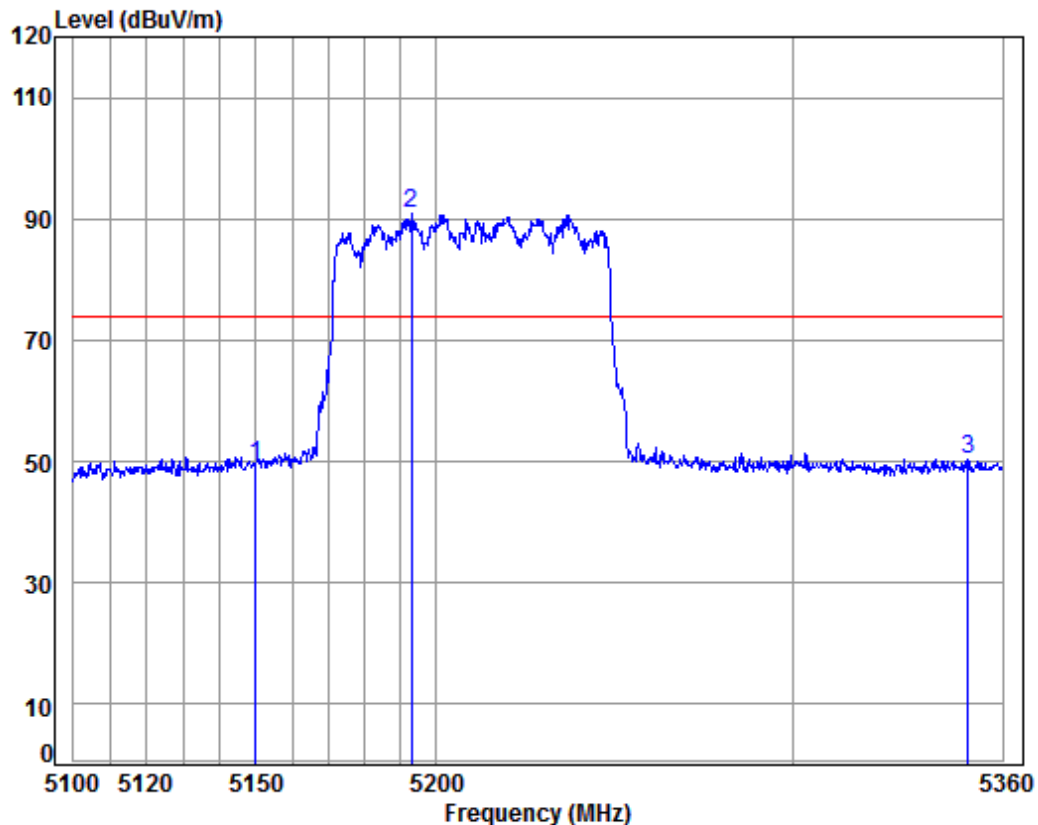

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5210 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	45.34	49.42	74.00	-24.58	
2 pp	5193.147	8.10	34.46	38.46	86.87	90.97	74.00	16.97	
3	5350.000	8.18	34.43	38.43	46.31	50.49	74.00	-23.51	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 276 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Vertical
------------	----------------	-----------------	------	----------

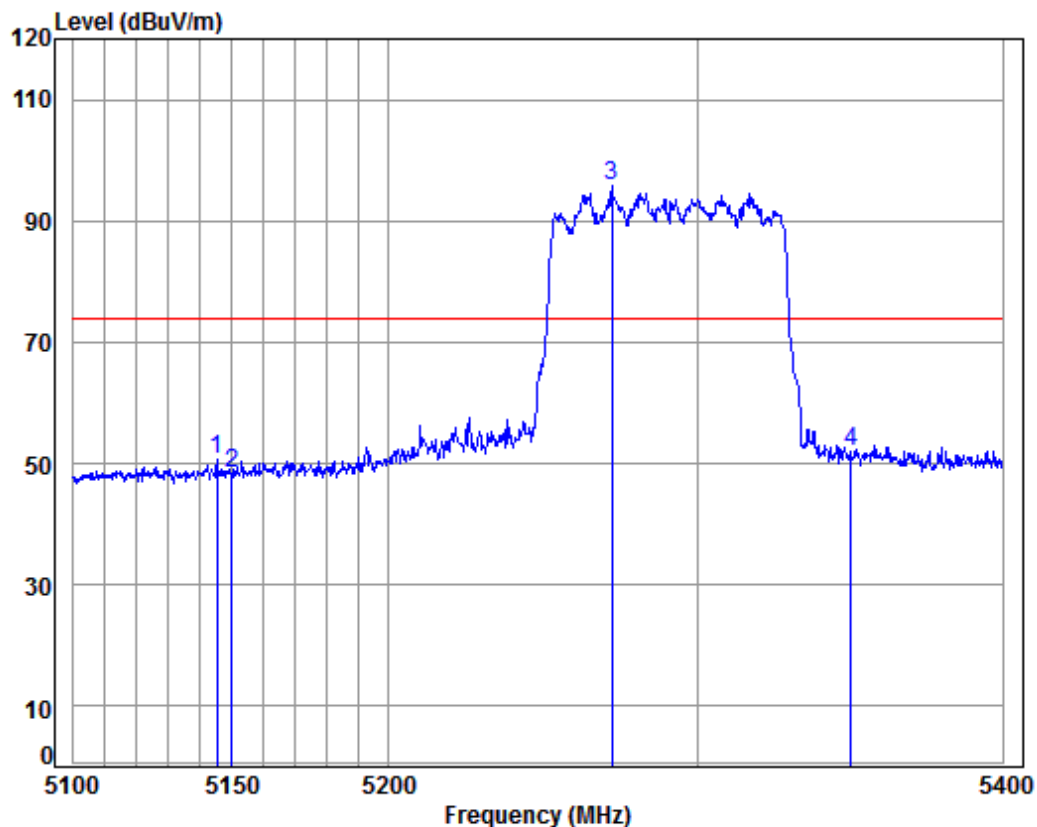

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5290 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.384	8.08	34.47	38.47	46.48	50.56	74.00	-23.44	
2	5150.000	8.08	34.47	38.47	44.35	48.43	74.00	-25.57	
3 pp	5271.908	8.14	34.44	38.45	91.71	95.84	74.00	21.84	
4	5350.000	8.18	34.43	38.43	47.97	52.15	74.00	-21.85	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 277 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Horizontal
------------	----------------	-----------------	------	------------

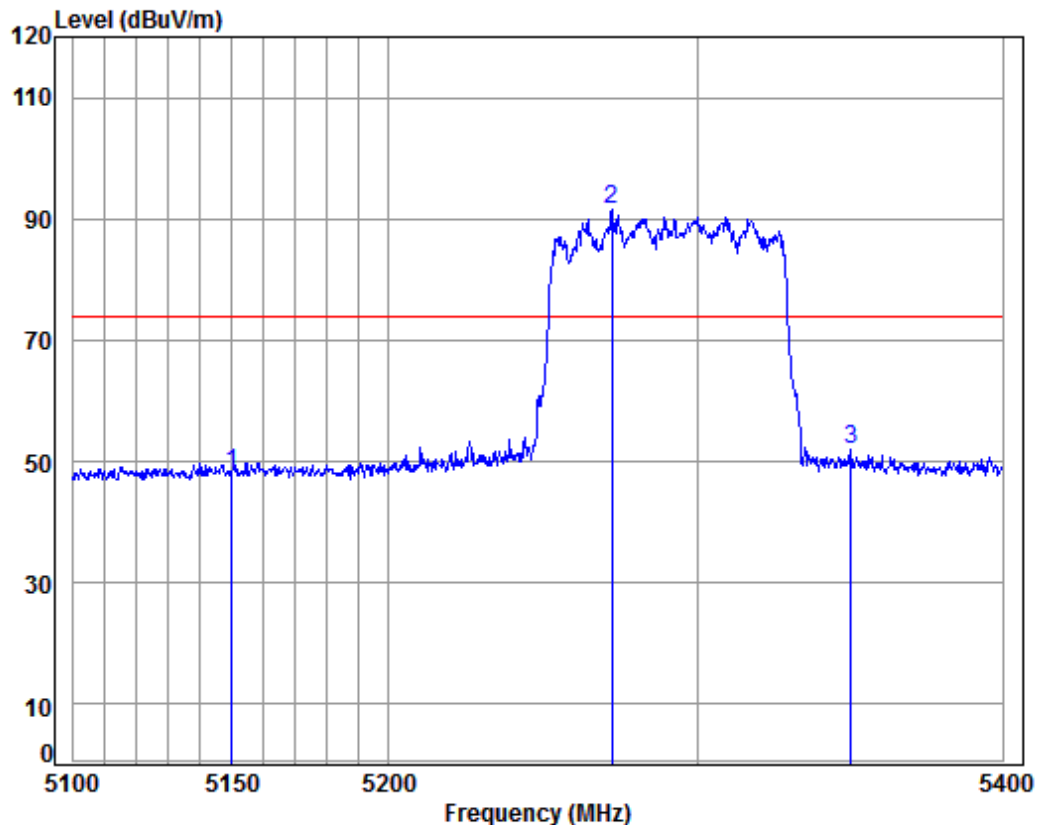

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5290 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	8.08	34.47	38.47	43.94	48.02	74.00	-25.98	
2 pp	5271.908	8.14	34.44	38.45	87.56	91.69	74.00	17.69	
3	5350.000	8.18	34.43	38.43	47.86	52.04	74.00	-21.96	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 278 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Vertical
------------	----------------	-----------------	------	----------

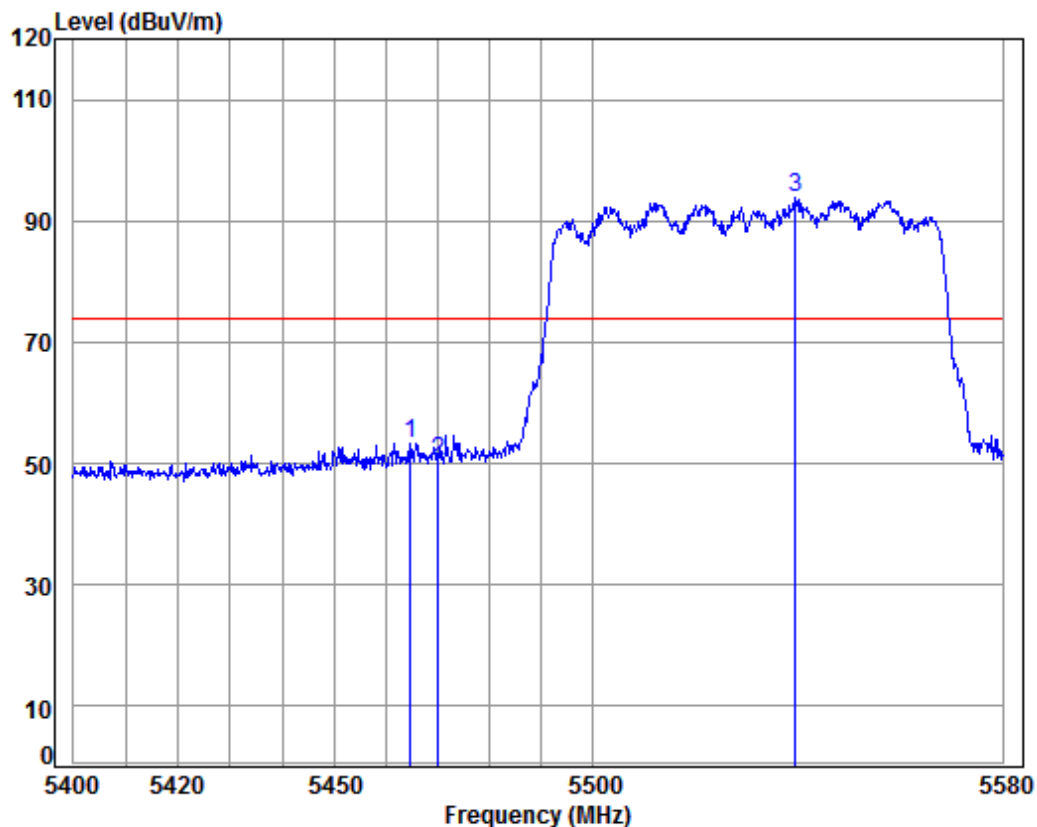

Condition: 3m VERTICAL

Job No: : 11090CR

Mode: : 5530 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5464.659	8.23	34.41	38.41	49.20	53.43	74.00	-20.57	
2	5470.000	8.24	34.41	38.41	46.12	50.36	74.00	-23.64	
3 pp	5539.347	8.29	34.42	38.39	89.44	93.76	74.00	19.76	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 279 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Horizontal
------------	----------------	-----------------	------	------------

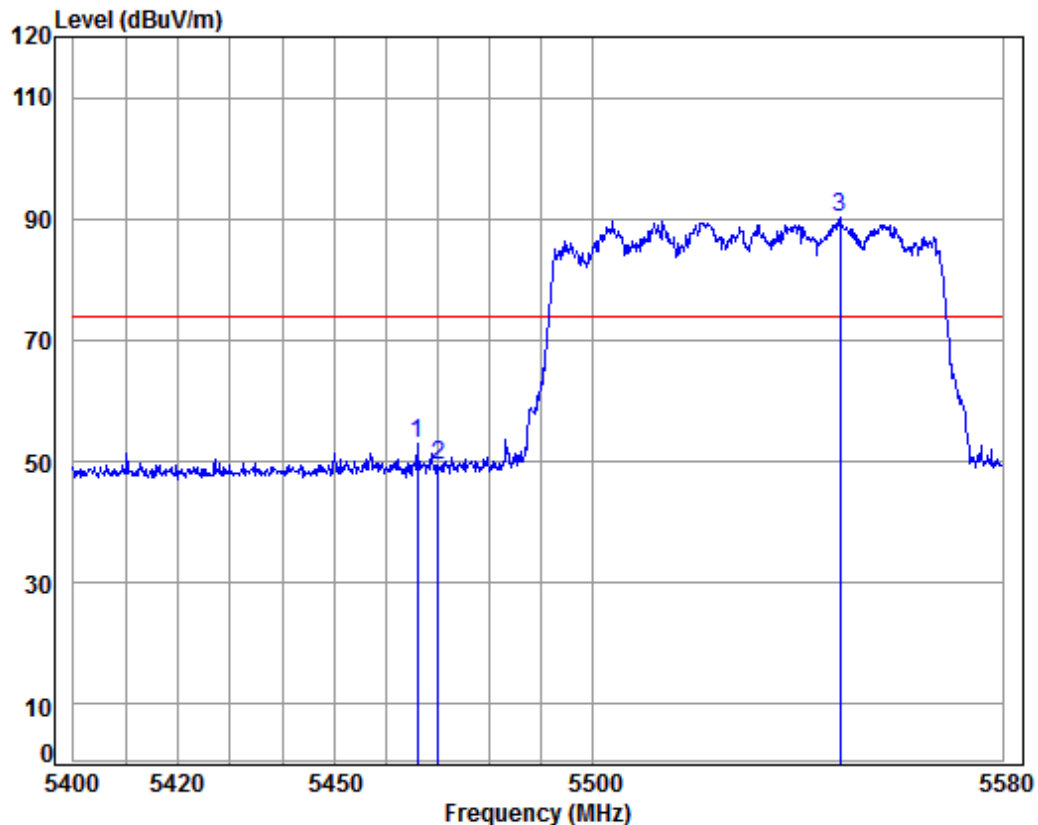

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5530 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5465.913	8.23	34.41	38.41	48.79	53.02	74.00	-20.98	
2	5470.000	8.24	34.41	38.41	45.06	49.30	74.00	-24.70	
3 pp	5548.072	8.30	34.43	38.39	85.84	90.18	74.00	16.18	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180400245803
Page: 280 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Vertical
------------	----------------	-----------------	------	----------

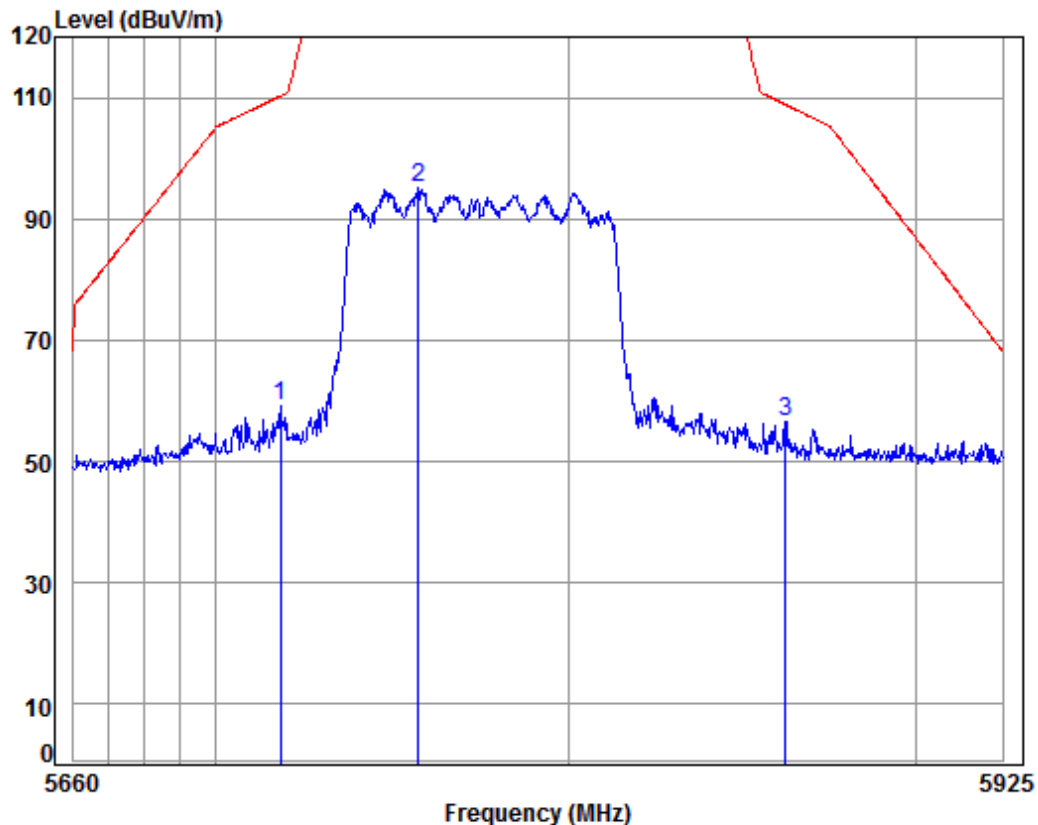

Condition: 3m VERTICAL
Job No: : 11090CR
Mode: : 5775 Bandedge
: WIFI-AC80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5718.049	8.47	34.53	38.36	54.40	59.04	110.25	-51.21	
2 pp	5756.903	8.51	34.56	38.35	90.46	95.18	125.20	-30.02	
3	5861.899	8.62	34.62	38.33	51.69	56.60	108.87	-52.27	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180400245803
Page: 281 of 283

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Horizontal
------------	----------------	-----------------	------	------------

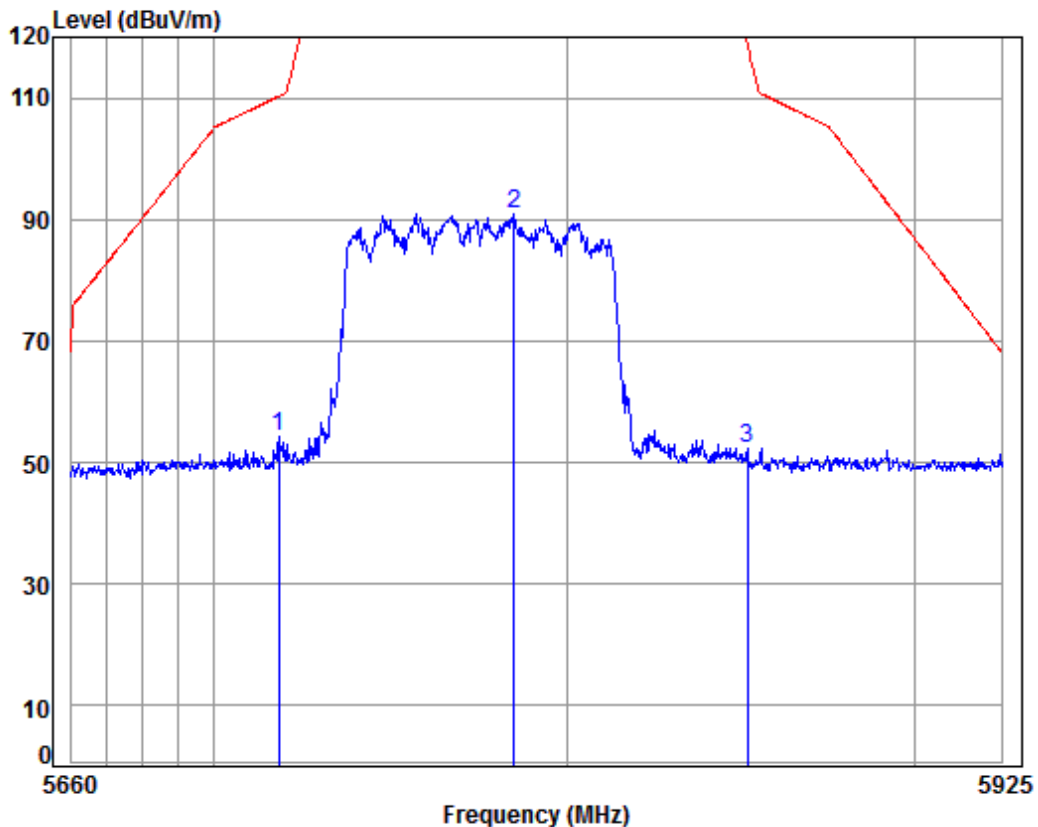

Condition: 3m HORIZONTAL

Job No: : 11090CR

Mode: : 5775 Bandedge
: WIFI-AC80

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5718.049	8.47	34.53	38.36	49.50	54.14	110.25	-56.11	
2 pp	5784.628	8.54	34.57	38.34	86.17	90.94	125.20	-34.26	
3	5851.448	8.61	34.61	38.33	47.52	52.41	118.90	-66.49	

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

7 Photographs - EUT Test Setup

Test Model No.:M30WL.11

7.1 Radiated Spurious Emission

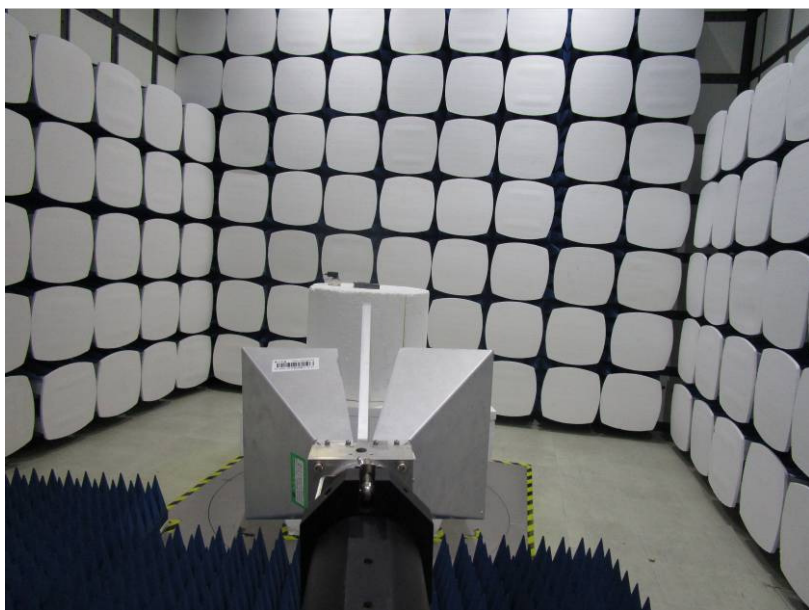

7.1 Conducted Emission Test Setup



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1804002458CR.