

Customer Name: _____

Customer Model: _____

Customer P/N: _____

Customer Describe: _____

YLKD P/N: AD-ANT3013-JN5189

Customer Describe: _____

PRODUCT SPECIFICATION


Signature and seal of confirmation					
YLKD Approved			Customer Approved		
Sample	audit	approved	validation	audit	approved
Date	2022-11-18		Date		

File for amendment/revocation/resume

[illegible]

3、Directory	
1、directory.....	1
2、File for amendment/revocation/resume.....	2
3、directory.....	3
4、Product drawings.....	4
5、Passive performance test parameter.....	5
6、2D、3D Performance figure.....	6
7、Electrical performance test report.....	7

4、Product drawings

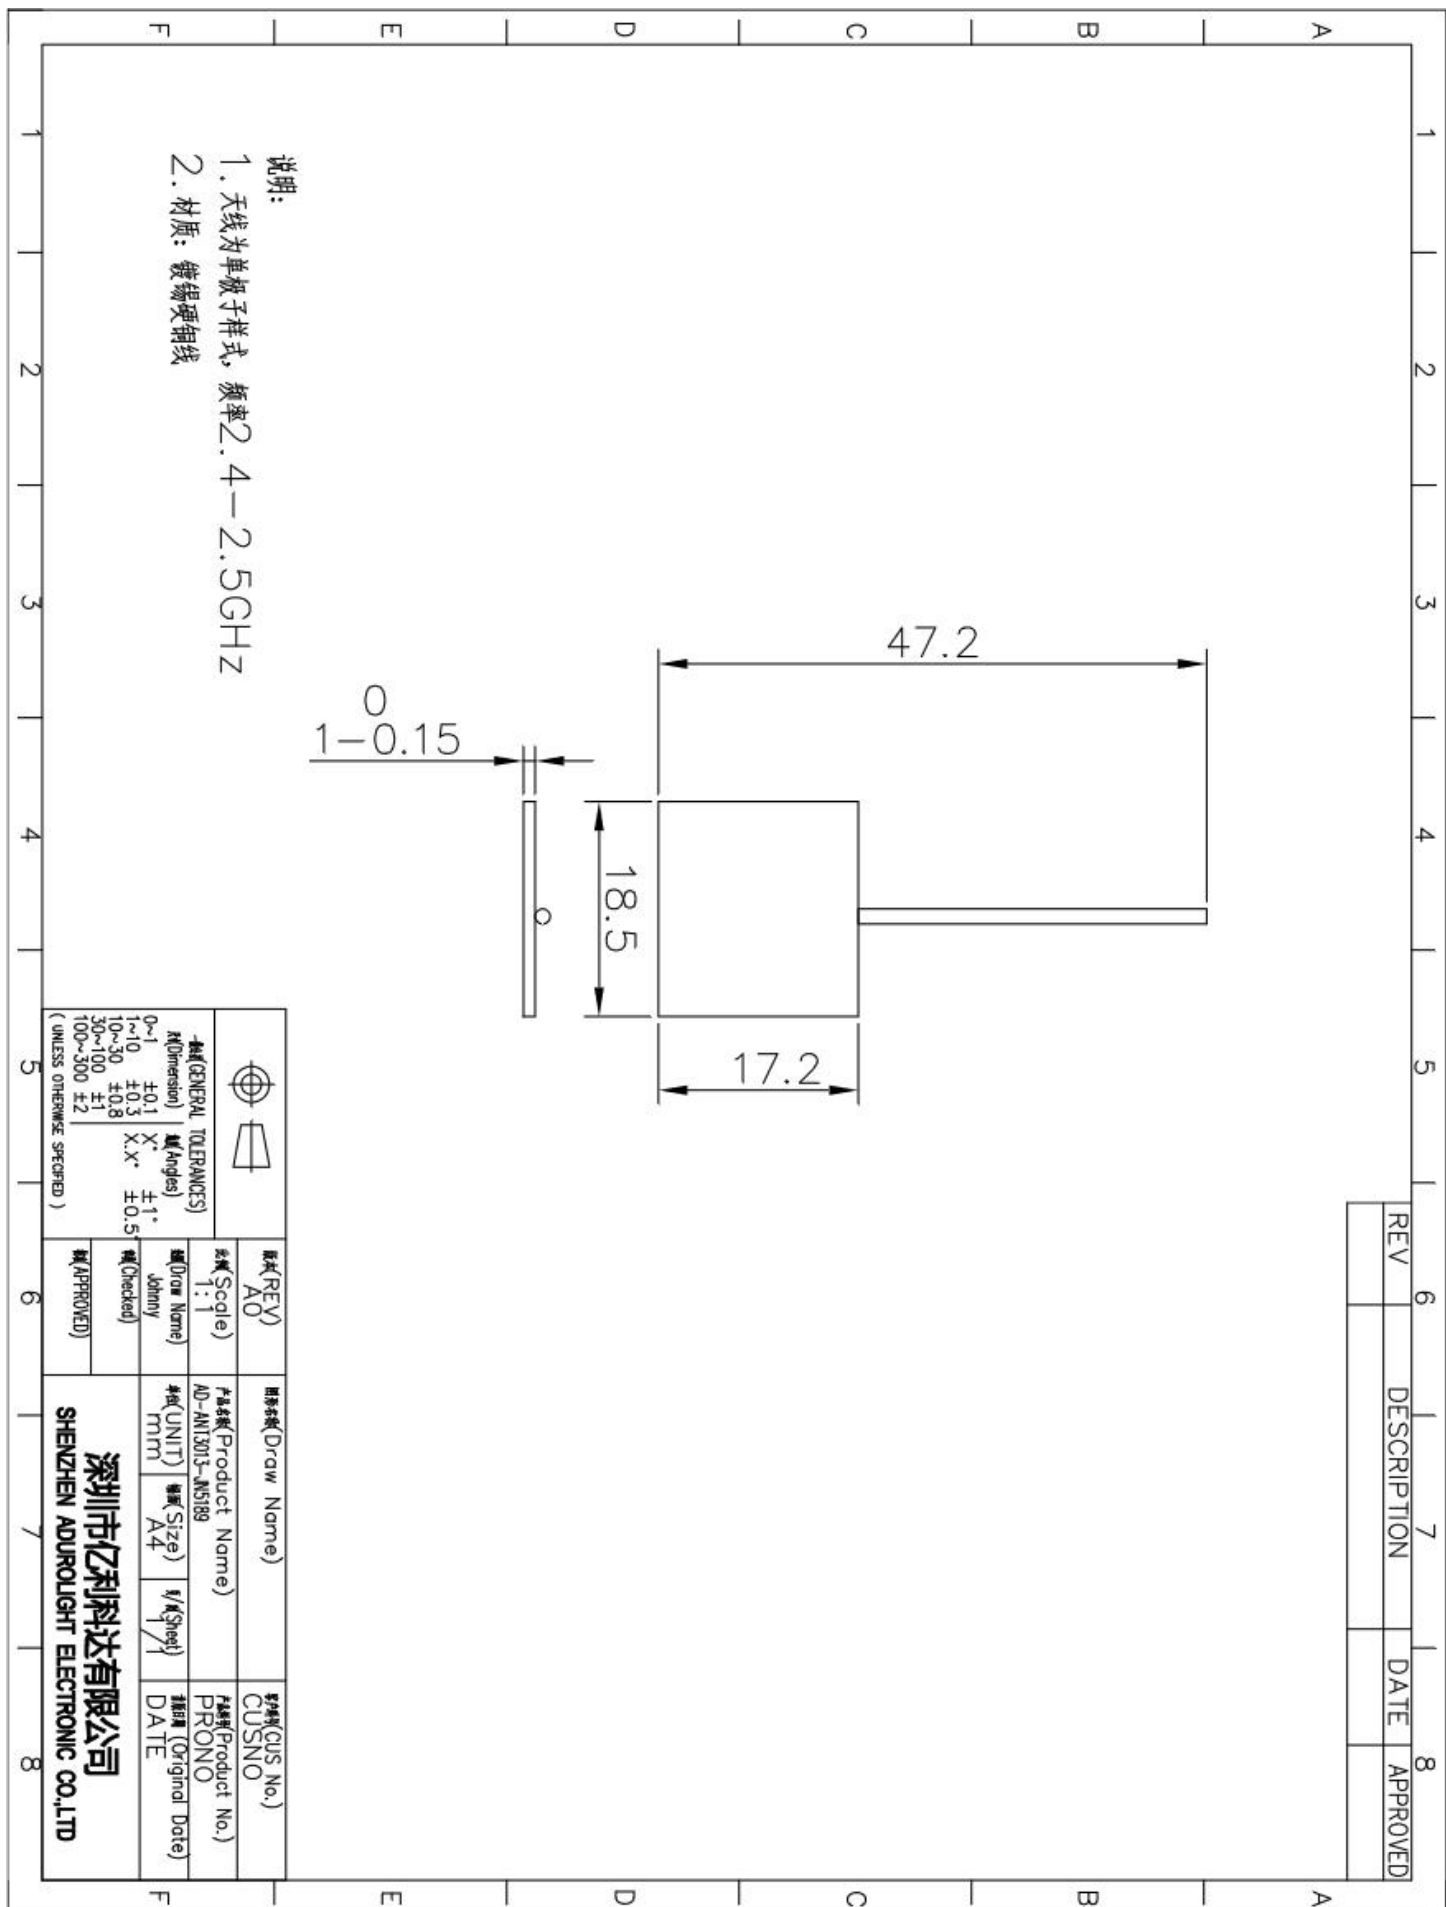


5、Passive performance test parameters

Frequency (GHz)	2.4	2.45	2.5
VSWR	1.47	1.36	1.18



6、2D、3D Performance figure

Passive Test For WiFi2.4G				
Freq (MHz)	Effi (%)	Gain(dBi)		
2400	41.41	1.2		
2450	46.74	2.29		
2500	50.92	2.73		

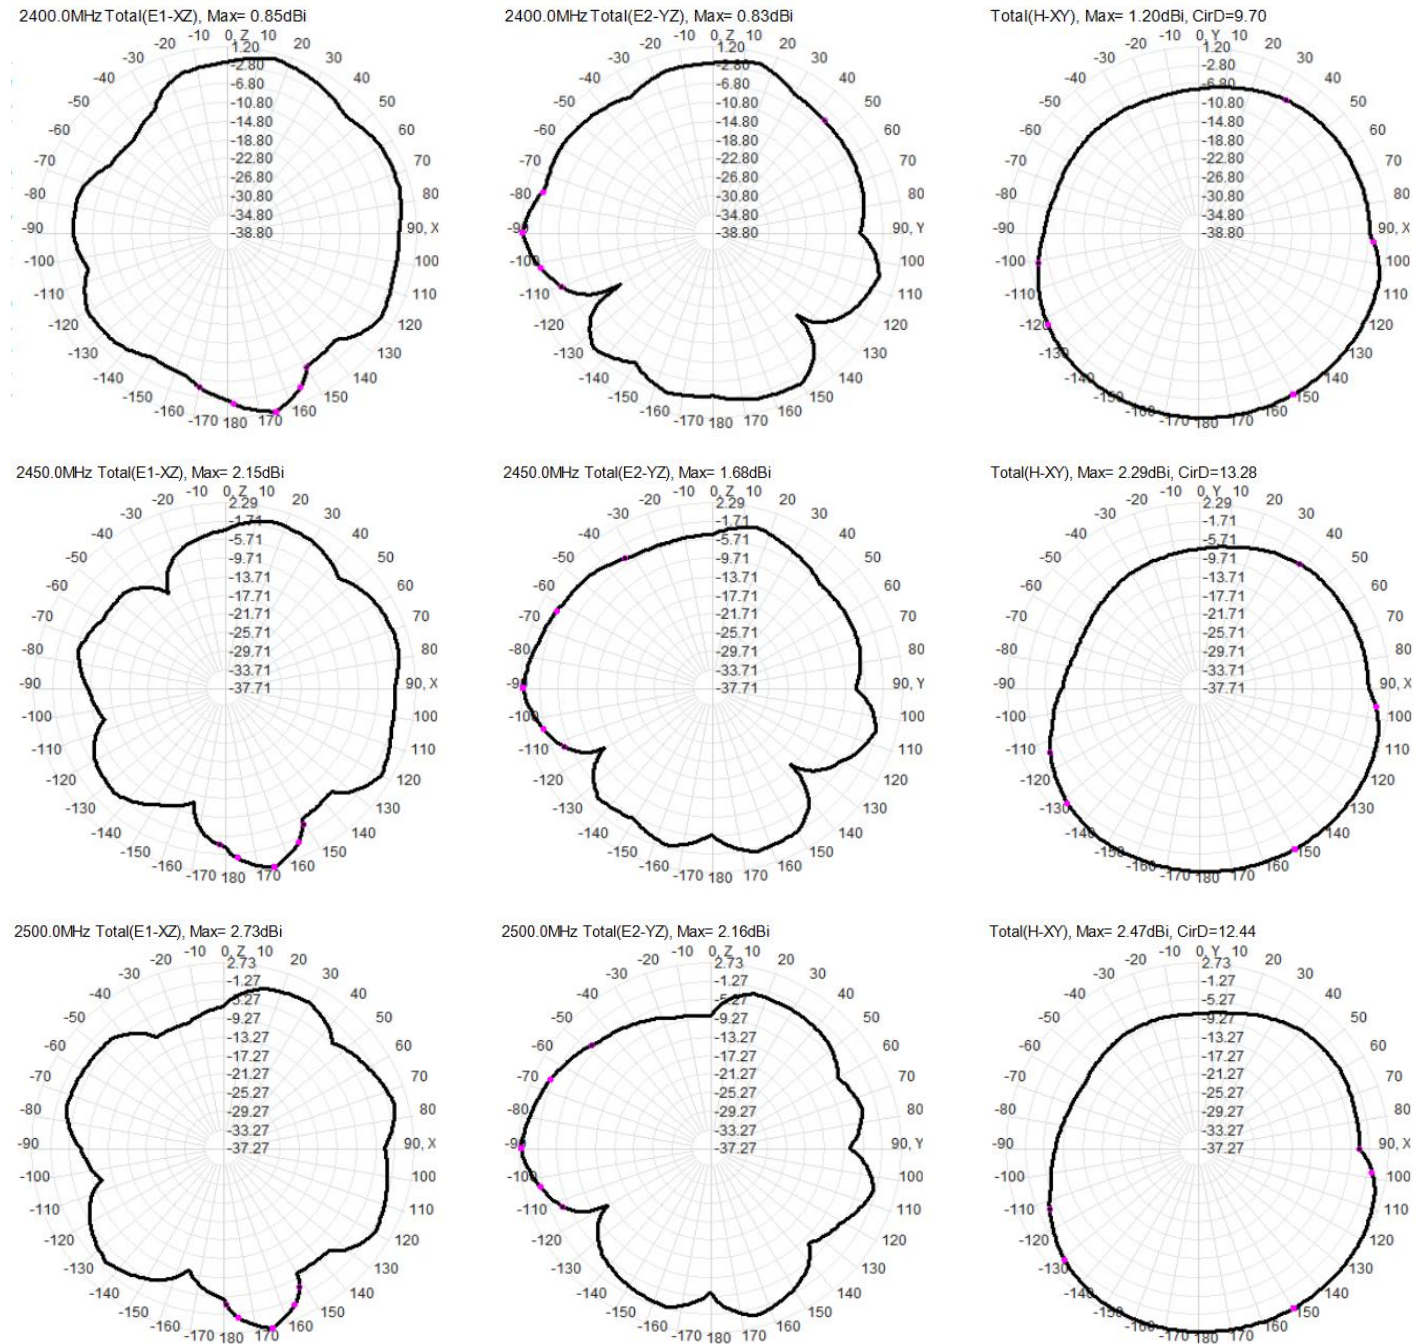

7、Electrical performance test report

Electrical parameters		
Frequency range		2400MHz-2500MHz
input impedance		50 Ω
VSWR		<2.0 control sample test pater
Gain	Maximum	2.73
Polarization mode		Vertical polarization
Radiation direction		omnidirectional
connection method		Soldering tin
The mechanical parameters		
Cable		Ø0.5mm Single core copper wire, white
Environmental parameters		
Working temperature		-40~85℃