


TEST REPORT

Application No.: BTEK260610010A01E02
Applicant: Shenzhen Sonoff Technologies Co.,Ltd.
Address of Applicant: 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China
Manufacturer: Shenzhen Sonoff Technologies Co.,Ltd.
Address of Manufacturer: 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China
Equipment Under Test (EUT):
EUT Name: OPEN NEXTION KNOB SCREEN
Test Model.: ONX2424G013
Adding Model(s): /
Trade Mark: Nextion, SONOFF
FCC ID: 2APN5-G013
Standard(s) : 47 CFR Part 15, Subpart C 15.247
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2020
Date of Receipt Sample(s): 2026-06-15
Date of Test: 2026-06-17 to 2026-07-20
Date of Issue: 2026-07-20

Test Result:	Pass*
---------------------	--------------



* In the configuration tested, the EUT complied with the standards specified above.



Alex Wang / Approved & Authorized
EMC Laboratory Manager



Revision Record			
Version	Issue Date	Revisions	Remarks
V0	2026-07-20	Initial	Valid

Authorized for issue by:			
			
		Zora Huang / File Editor	
			
		June Li/Reviewer	

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Test Summary

Radio Spectrum Technical Requirement				
Standard	Item	Method	Requirement	Result
47 CFR Part 15, Subpart C 15.247	Antenna Requirement	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Standard	Item	Method	Requirement	Result
47 CFR Part 15, Subpart C 15.247	Conducted Emissions at AC Power Line (150kHz-30MHz)	ANSI C63.10:2020 Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
	Conducted Peak Output Power	ANSI C63.10:2020 Section 11.9.1.3	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
	Minimum 6dB Bandwidth	ANSI C63.10:2020 Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
	Power Spectrum Density	ANSI C63.10:2020 Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
	Conducted Band Edges Measurement	ANSI C63.10:2020 Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
	Conducted Spurious Emissions	ANSI C63.10:2020 Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
	Radiated Emissions which fall in the restricted bands	ANSI C63.10:2020 Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
	Radiated Spurious Emissions	ANSI C63.10:2020 Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



3 Contents

	Page
1 Cover Page.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.....	5
4.2 EUT Test Mode and Test Condition	5
4.3 Measurement Uncertainty	6
4.4 Test Location	6
4.5 Deviation from Standards	6
4.6 Abnormalities from Standard Conditions	6
5 Equipment List	7
6 Radio Spectrum Technical Requirement	9
6.1 Antenna Requirement	9
6.1.1 Test Requirement:	9
6.1.2 Conclusion	9
7 Radio Spectrum Matter Test Results	10
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	10
7.1.1 Test Setup Diagram	10
7.1.2 Measurement Procedure and Data	10
7.2 Conducted Peak Output Power	13
7.2.1 Test Setup Diagram	13
7.2.2 Measurement Procedure and Data	13
7.3 Minimum 6dB Bandwidth	14
7.3.1 Test Setup Diagram	14
7.3.2 Measurement Procedure and Data	14
7.4 Power Spectrum Density	15
7.4.1 Test Setup Diagram	15
7.4.2 Measurement Procedure and Data	15
7.5 Conducted Band Edges Measurement	16
7.5.1 Test Setup Diagram	16
7.5.2 Measurement Procedure and Data	16
7.6 Conducted Spurious Emissions	17
7.6.1 Test Setup Diagram	17
7.6.2 Measurement Procedure and Data	17
7.7 Radiated Emissions which fall in the restricted bands	18
7.7.1 Test Setup Diagram	18
7.7.2 Measurement Procedure and Data	19
7.8 Radiated Spurious Emissions	21
7.8.1 Test Setup Diagram	21
7.8.2 Measurement Procedure and Data	22
8 Test Setup Photo	27
9 EUT Constructional Details (EUT Photos)	27



4 General Information

4.1 Details of E.U.T.

Power supply:	5V $\pm$ 1A
Frequency Range:	2402MHz to 2480MHz
Bluetooth Version:	V5.0 BLE
Modulation Type:	GFSK
Channel Spacing:	2MHz
Data Rate:	1Mbps, 2Mbps
Number of Channels:	40
Antenna Type:	Chip Antenna
Antenna Gain:	2.67dBi
Sample No.:	BTEK260610010-002
Model(s) Difference Statement	☒ Single Model.
	☐ Multi-Models:

4.2 EUT Test Mode and Test Condition

Test Mode	Description	Remark
1	Low/mid/High Channel	2402MHz/2440MHz/2480MHz
Remark:1.only show the worst case in the test report.		

Channel Frequency Tabel:

BLE	
Channel	Frequency (MHz)
00	2402
01	2404
19	2440
38	2478
39	2480

Test Conditions

Temperature:	22.4 °C
Relative Humidity:	70 %
ATM Pressure:	1014 mbar



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.12\text{dB}$
Conducted Peak Output Power	$\pm 0.75\text{dB}$
Minimum 6dB Bandwidth	$\pm 3\%$
Power Spectrum Density	$\pm 2.84\text{dB}$
Conducted Band Edges Measurement	$\pm 0.75\text{dB}$
Conducted Spurious Emissions	$\pm 0.75\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (above 6GHz)
Radiated Spurious Emissions (Below 1GHz)	$\pm 5.06\text{dB}$ (3m); $\pm 4.46\text{dB}$ (10m)
Radiated Spurious Emissions (Above 1GHz)	$\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (above 6GHz)

4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Tel: +86 0755-2334 4200 Fax: +86 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Shielding Room	YIHENG ENELECTRONIC	9*5*3.3	YH-BT-220304-04	2025-02-15	2028-02-14
EMI Test Receiver	Rohde&Schwarz	ESCI	101021	2026-06-17	2027-06-16
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	N/A	N/A
LISN	Rohde&Schwarz	ENV216	101472	2026-06-17	2027-06-16
LISN	Schwarzbeck	NSLK 8128	05127	2026-06-17	2027-06-16

RF Conducted					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Shielding Room	YIHENG ENELECTRONIC	5.5*3.1*3	YH-BT-220304-03	2025-02-15	2028-02-14
EXA Signal Analyzer	KEYSIGHT	N9020A	MY54230486	2026-06-17	2027-06-16
DC Power Supply	E3632A	E3642A	KR75304416	2026-06-17	2027-06-16
Attenuator	RswTech	SMA-JK-6dB	N/A	2026-06-17	2027-06-16
Attenuator	RswTech	SMA-JK-3dB	N/A	2026-06-17	2027-06-16
RF Control Unit	Techy	TR1029-1	N/A	2026-06-17	2027-06-16
RF Sensor Unit	Techy	TR1029-2	N/A	2026-06-17	2027-06-16
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	141258	2026-06-17	2027-06-16
MXG Vector Signal Generator	Agilent	N5182A	US46240522	2026-06-17	2027-06-16
Programmable Temperature&Humidity Chamber	GRT	GR-HWX1000	GR22051001	2026-06-17	2027-06-16
Measurement Software	TACHOY	RF TestSoft	N/A	N/A	N/A

RSE					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	YIHENG ENELECTRONIC	966	YH-BT-220304-01	2025-02-15	2028-02-14
EMI Test Receiver	Rohde&Schwarz	ESCI	100694	2026-06-17	2027-06-16
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	01324	2026-06-17	2027-06-16
Pre-Amplifier	Schwarzbeck	BBV 9745	#180	2026-06-17	2027-06-16
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	2026-06-17	2027-06-16
EXA Signal Analyzer	Keysight	N9020A	MY54440290	2026-06-17	2027-06-16
Horn Antenna	Schwarzbeck	BBHA 9120D	02695	2026-06-17	2027-06-16
Pre-Amplifier	Tonscend	TAP0118045	AP20K806109	2026-06-17	2027-06-16
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2026-06-17	2027-06-16
Low Noise Pre-amplifier	SKET	LNPA-1840G-50	SK2022032902	2026-06-17	2027-06-16
Signal analyzer	ROHDE&SCHWARZ	FSQ40	100010	2026-06-17	2027-06-16



Loop Antenna	ETS	6502	00201177	2026-06-17	2027-06-16
Cable	BTEK	LMR400UF-NMNM-7.00M	/	2026-06-17	2027-06-16
Cable	BTEK	LMR400UF-NMNM-2.50M	/	2026-06-17	2027-06-16
Cable	BTEK	LMR400UF-NMNM-3.00M	/	2026-06-17	2027-06-16
Cable	BTEK	SFT205PUR-MNSWSM-7.00M	/	2026-06-17	2027-06-16
Cable	BTEK	SFT205PUR-MNSWSM-2.50M	/	2026-06-17	2027-06-16
Cable	BTEK	SFT205PUR-MNSWSM-2.50M	/	2026-06-17	2027-06-16
Cable	BTEK	SFT205PUR-MNSWSM-0.30M	/	2026-06-17	2027-06-16



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

This product has a Chip Antenna, fulfill the requirement of this section.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2


Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 Test Setup Diagram

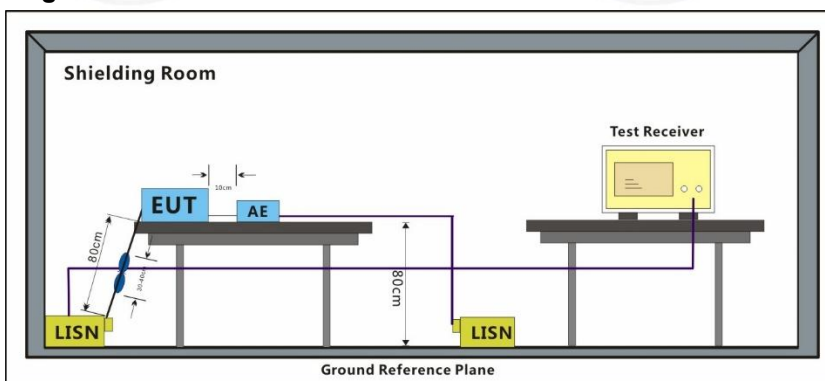


7.1.2 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor, Margin=Level-Limit




Test Mode	Communication-TX	Polarity:	Neutral
-----------	------------------	-----------	---------

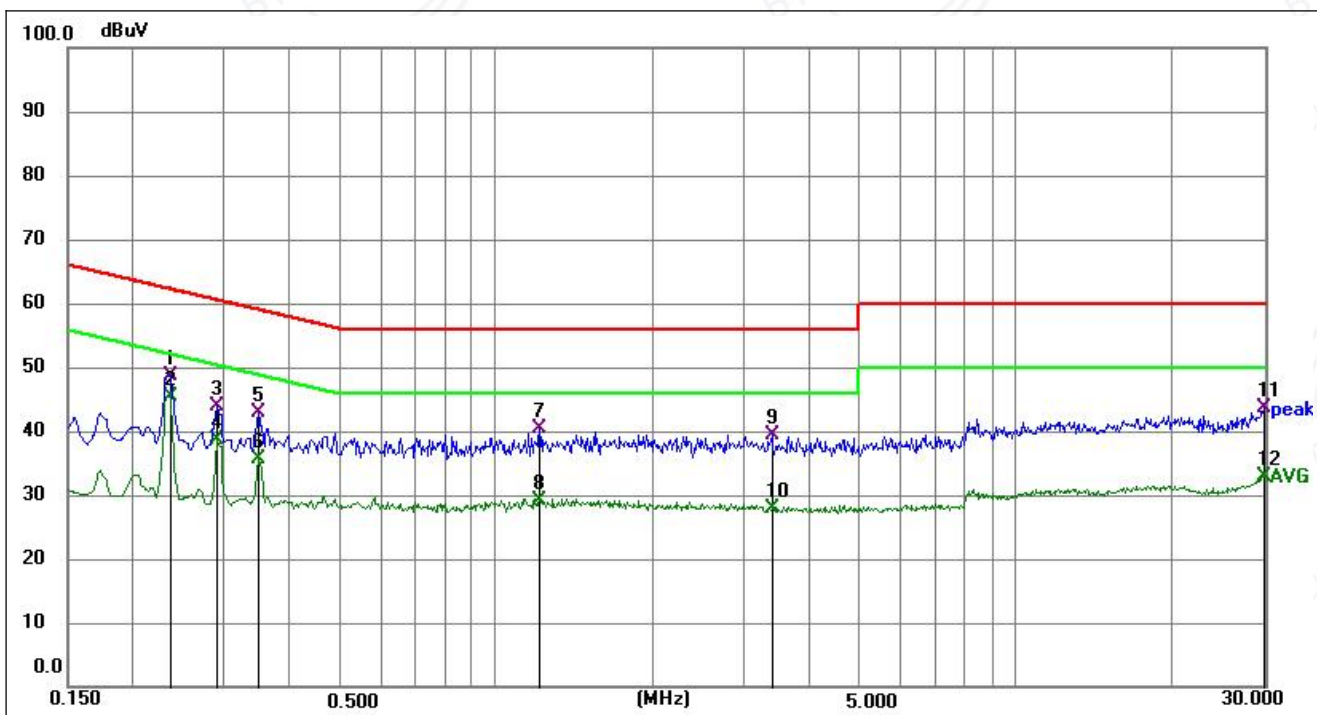

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2354	29.10	19.63	48.73	62.26	-13.53	QP	P	
2 *	0.2354	25.83	19.63	45.46	52.26	-6.80	AVG	P	
3	0.2894	24.38	19.61	43.99	60.54	-16.55	QP	P	
4	0.2894	19.09	19.61	38.70	50.54	-11.84	AVG	P	
5	0.3480	23.03	19.73	42.76	59.01	-16.25	QP	P	
6	0.3480	15.89	19.73	35.62	49.01	-13.39	AVG	P	
7	1.2120	20.12	20.34	40.46	56.00	-15.54	QP	P	
8	1.2120	8.77	20.34	29.11	46.00	-16.89	AVG	P	
9	3.3944	18.44	21.02	39.46	56.00	-16.54	QP	P	
10	3.3944	6.88	21.02	27.90	46.00	-18.10	AVG	P	
11	29.9804	19.90	23.67	43.57	60.00	-16.43	QP	P	
12	29.9804	9.23	23.67	32.90	50.00	-17.10	AVG	P	



Test Mode	Communication-TX	Polarity:	Line
-----------	------------------	-----------	------

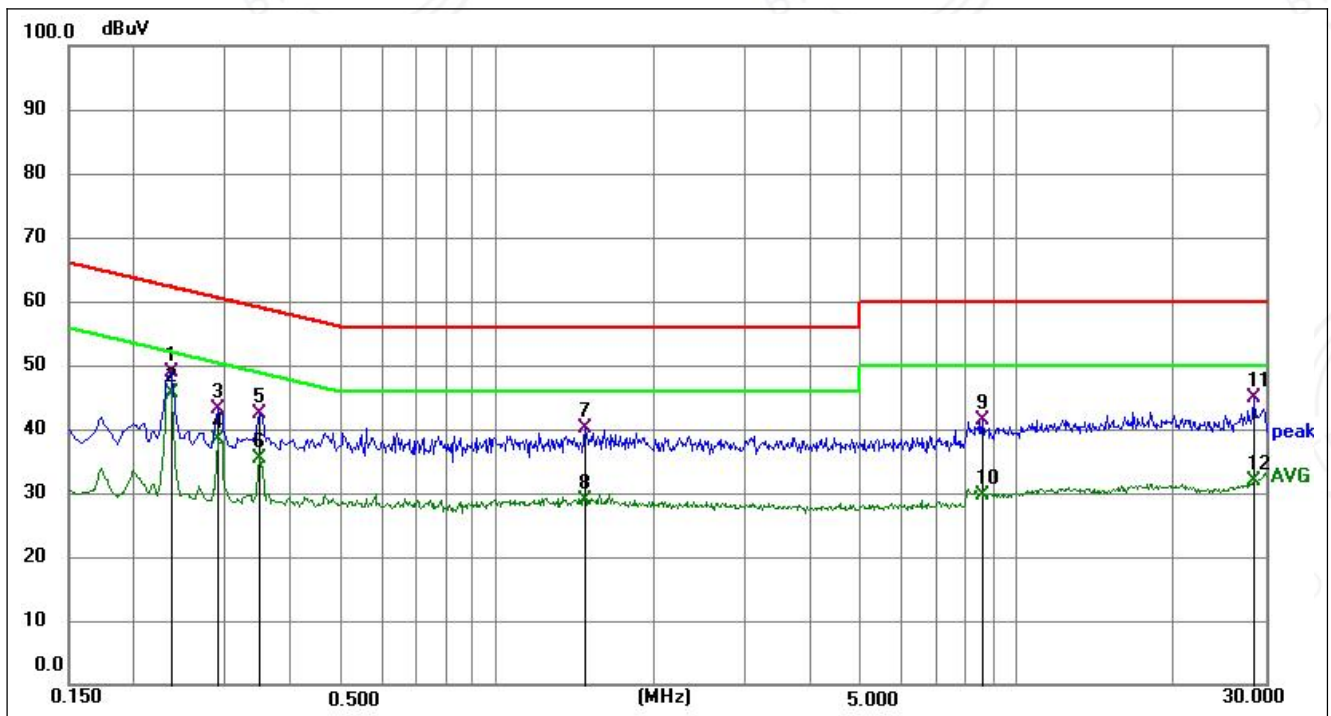

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2354	29.20	19.63	48.83	62.26	-13.43	QP	P	
2 *	0.2354	25.96	19.63	45.59	52.26	-6.67	AVG	P	
3	0.2894	23.50	19.61	43.11	60.54	-17.43	QP	P	
4	0.2894	18.75	19.61	38.36	50.54	-12.18	AVG	P	
5	0.3480	22.59	19.73	42.32	59.01	-16.69	QP	P	
6	0.3480	15.56	19.73	35.29	49.01	-13.72	AVG	P	
7	1.4730	19.57	20.52	40.09	56.00	-15.91	QP	P	
8	1.4730	8.27	20.52	28.79	46.00	-17.21	AVG	P	
9	8.5515	20.19	21.09	41.28	60.00	-18.72	QP	P	
10	8.5515	8.50	21.09	29.59	50.00	-20.41	AVG	P	
11	28.4550	21.44	23.48	44.92	60.00	-15.08	QP	P	
12	28.4550	8.49	23.48	31.97	50.00	-18.03	AVG	P	



7.2 Conducted Peak Output Power


Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10:2020 Section 11.9.1.3

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 Test Setup Diagram

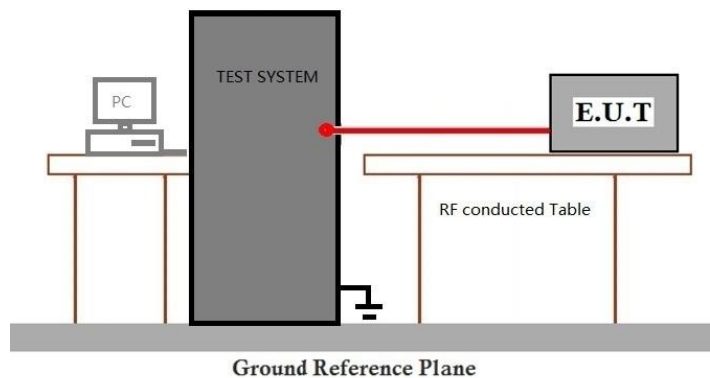

7.2.2 Measurement Procedure and Data


Please Refer to Appendix for Details



7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10:2020 Section 11.8.1
Limit: ≥ 500 kHz

7.3.1 Test Setup Diagram

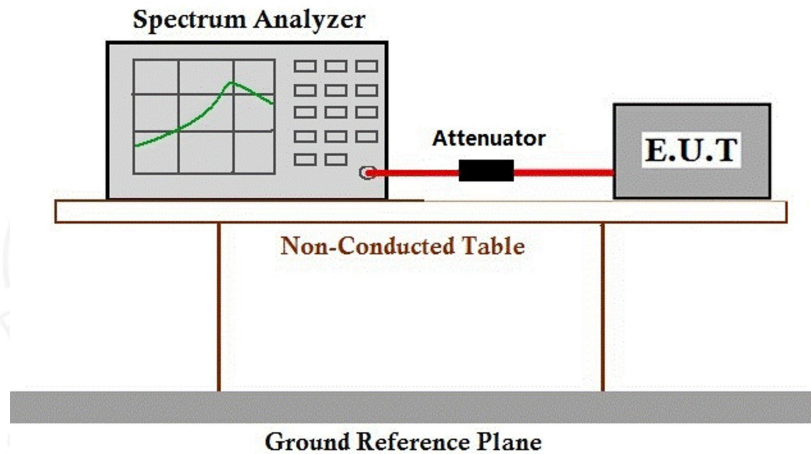

7.3.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.4 Power Spectrum Density


Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10:2020 Section 11.10.2

Limit:

$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.4.1 Test Setup Diagram

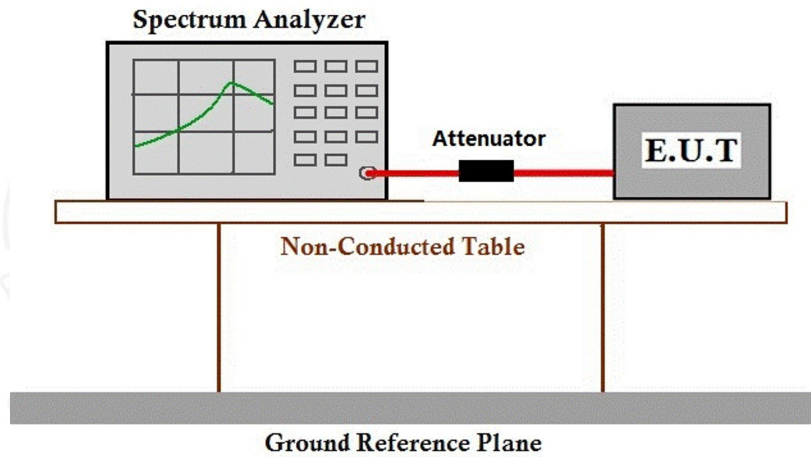

7.4.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.5 Conducted Band Edges Measurement


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10:2020 Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 Test Setup Diagram

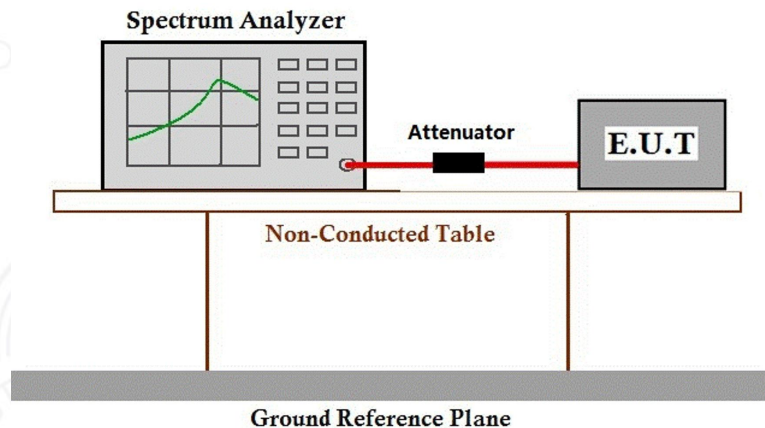

7.5.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.6 Conducted Spurious Emissions


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10:2020 Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 Test Setup Diagram

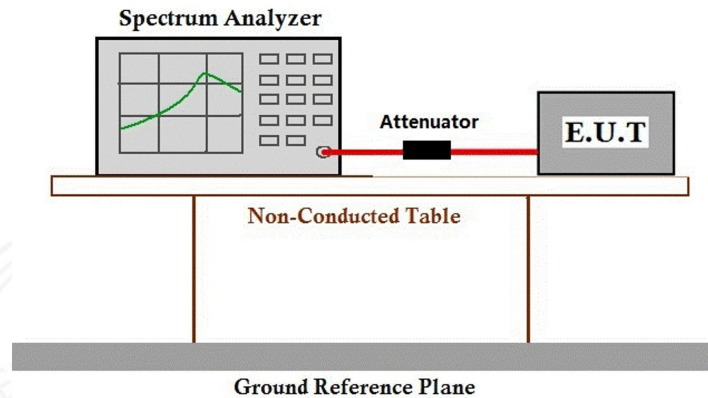

7.6.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209


Test Method: ANSI C63.10:2020 Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 Test Setup Diagram

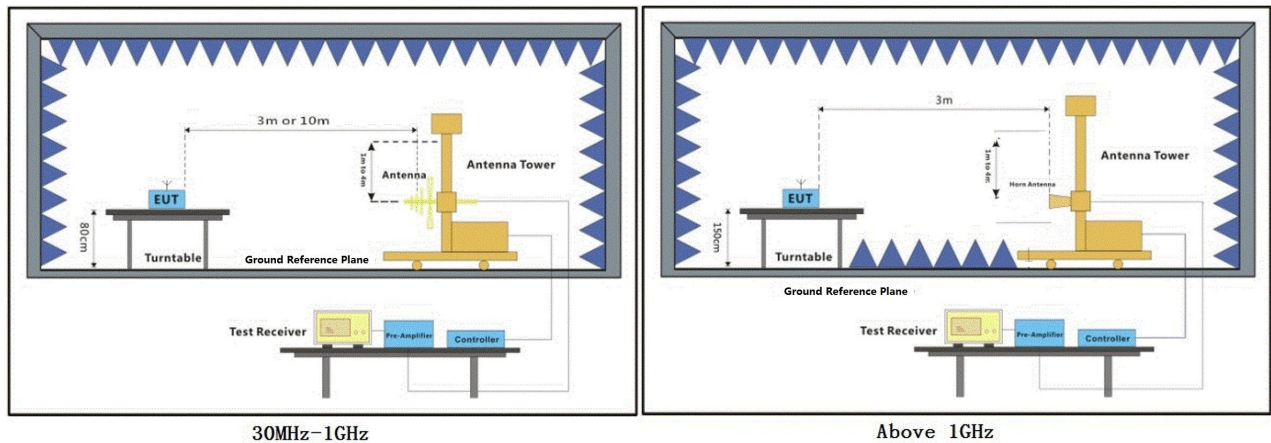

7.7.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp gain}$, $\text{Margin} = \text{Level} - \text{Limit}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

3. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.



Horizontal; Modulation:GFSK; ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.00	66.37	-24.14	42.23	74.00	-31.77	peak	P
2	2310.00	55.56	-24.14	31.42	54.00	-22.58	Average	P
3	2390.00	61.6	-23.92	37.68	74.00	-36.32	peak	P
4	2390.00	54.28	-23.92	30.36	54.00	-23.64	Average	P
5	2400.00	73.26	-23.92	49.34	74.00	-24.66	peak	P
6	2400.00	62.68	-23.92	38.76	54.00	-15.24	Average	P

Polarity: Vertical; Modulation:GFSK; ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.00	66.87	-24.14	42.73	74.00	-31.27	peak	P
2	2310.00	60.03	-24.14	35.89	54.00	-18.11	Average	P
3	2390.00	70.97	-23.92	47.05	74.00	-26.95	peak	P
4	2390.00	58.48	-23.92	34.56	54.00	-19.44	Average	P
5	2400.00	71.14	-23.92	47.22	74.00	-26.78	peak	P
6	2400.00	61.84	-23.92	37.92	54.00	-16.08	Average	P

Polarity: Horizontal; Modulation:GFSK; ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.50	67.74	-23.65	44.09	74.00	-29.91	peak	P
2	2483.50	58.23	-23.65	34.58	54.00	-19.42	Average	P
3	2500.00	75.11	-23.65	51.46	74.00	-22.54	peak	P
4	2500.00	58.81	-23.65	35.16	54.00	-18.84	Average	P

Polarity: Vertical; Modulation:GFSK; ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.50	65.1	-23.65	41.45	74.00	-32.55	peak	P
2	2483.50	56.63	-23.65	32.98	54.00	-21.02	Average	P
3	2500.00	71.09	-23.65	47.44	74.00	-26.56	peak	P
4	2500.00	65.08	-23.65	41.43	54.00	-12.57	Average	P



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209




Test Method: ANSI C63.10:2020 Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 Test Setup Diagram

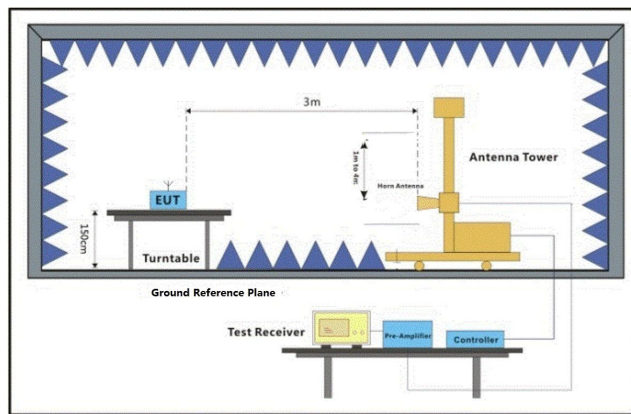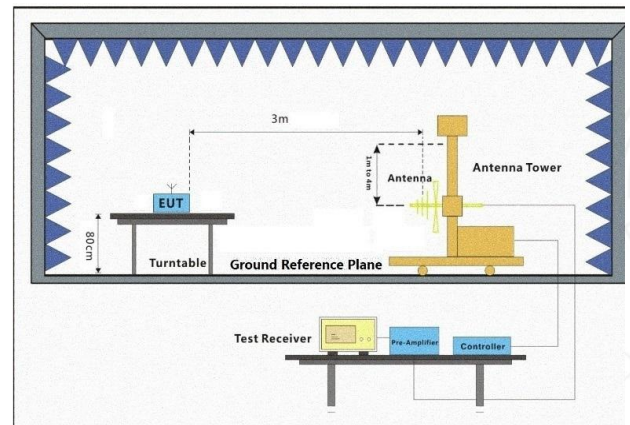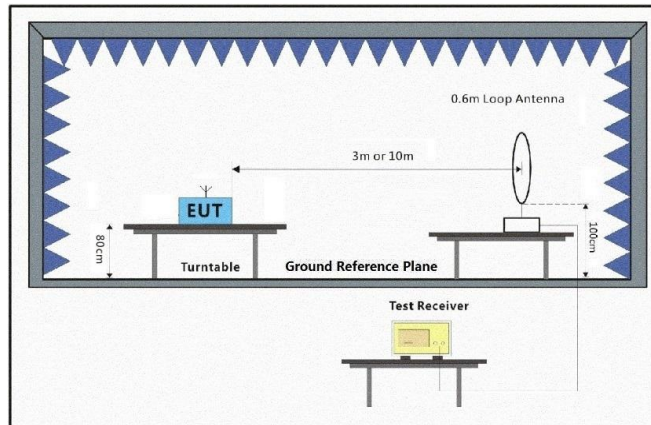

Above 1GHz




7.8.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - i. Repeat above procedures until all frequencies measured was complete.
-
- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - i. Repeat above procedures until all frequencies measured was complete.




Spurious Emissions Below 1GHz

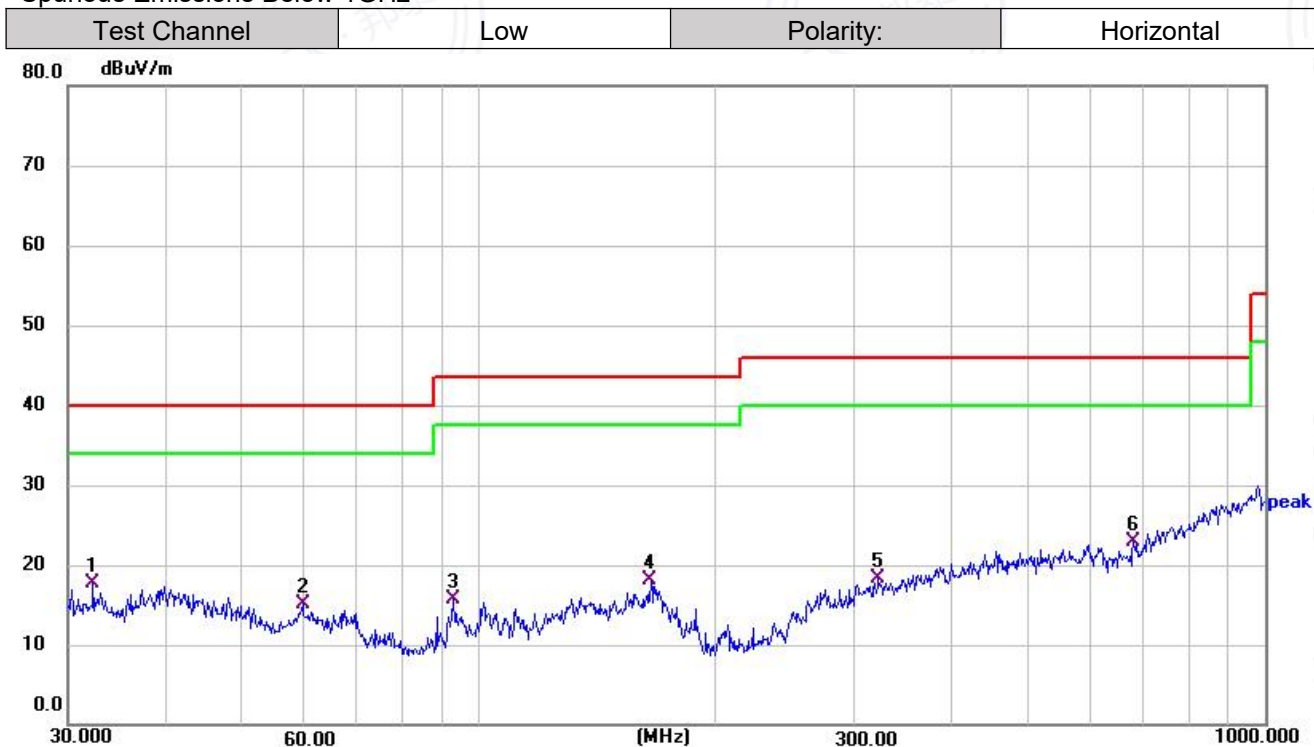

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	32.2924	29.46	-11.74	17.72	40.00	-22.28	QP	100	360	P	
2	59.6492	27.26	-12.20	15.06	40.00	-24.94	QP	100	360	P	
3	92.7870	30.88	-15.23	15.65	43.50	-27.85	QP	100	360	P	
4	165.4866	29.39	-11.30	18.09	43.50	-25.41	QP	100	360	P	
5	322.1884	29.40	-11.19	18.21	46.00	-27.79	QP	100	360	P	
6	679.9600	27.09	-4.17	22.92	46.00	-23.08	QP	100	360	P	



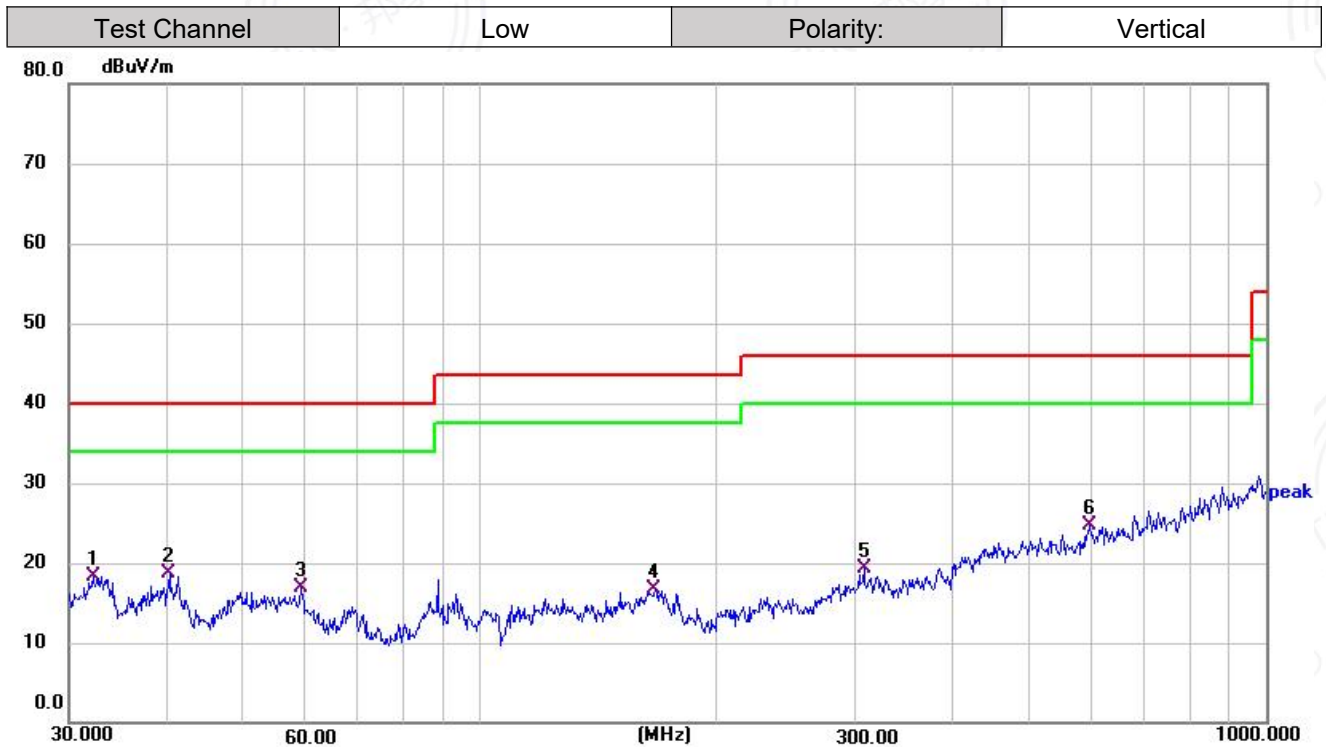

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	32.1794	29.96	-11.67	18.29	40.00	-21.71	QP	100	0	P	
2 *	40.2754	30.20	-11.40	18.80	40.00	-21.20	QP	100	0	P	
3	59.2323	28.94	-12.00	16.94	40.00	-23.06	QP	100	0	P	
4	167.2366	27.84	-11.12	16.72	43.50	-26.78	QP	100	0	P	
5	307.8312	30.62	-11.22	19.40	46.00	-26.60	QP	100	0	P	
6	597.2232	30.79	-6.02	24.77	46.00	-21.23	QP	100	0	P	

Remark:

1) Through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Reading Level + Factor, Margin= Level-Limit. Factor= Cabel loss +Antenna factor-Pre_amplifier gain.

3) Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Above 1GHz

Polarity: Horizontal; Modulation:GFSK; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4803.42	56.76	-15.60	41.16	74.00	-32.84	peak	P
2	4804.16	23.15	-15.60	7.55	54.00	-46.45	Average	P
3	7207.93	53.42	-10.97	42.45	74.00	-31.55	peak	P
4	7203.50	44.04	-10.97	33.07	54.00	-20.93	Average	P

Polarity: Vertical; Modulation:GFSK; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4804.44	56.66	-15.09	41.57	74.00	-32.43	peak	P
2	4802.12	45.26	-15.16	30.10	54.00	-23.90	Average	P
3	7205.41	53.12	-10.77	42.35	74.00	-31.65	peak	P
4	7207.87	42.13	-11.58	30.55	74.00	-43.45	Average	P

Polarity: Horizontal; Modulation:GFSK; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4883.96	55.71	-15.27	40.44	74.00	-33.56	peak	P
2	4884.87	23.79	-15.62	8.17	54.00	-45.83	Average	P
3	7323.23	53.72	-10.64	43.08	74.00	-30.92	peak	P
4	7327.53	43.35	-10.65	32.70	54.00	-21.30	Average	P

Polarity: Vertical; Modulation:GFSK; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4883.82	55.29	-14.79	40.50	74.00	-33.50	peak	P
2	4886.52	44.37	-15.54	28.83	54.00	-25.17	Average	P
3	7321.65	53.65	-10.38	43.27	74.00	-30.73	peak	P
4	7317.16	42.07	-11.91	30.16	54.00	-23.84	Average	P

Polarity: Horizontal; Modulation:GFSK; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4958.38	56.05	-16.02	40.03	74.00	-33.97	peak	P
2	4961.93	22.9	-15.55	7.35	54.00	-46.65	Average	P
3	7439.92	53.74	-10.91	42.83	74.00	-31.17	peak	P
4	7438.00	43.69	-10.77	32.92	54.00	-21.08	Average	P

Polarity: Vertical; Modulation:GFSK; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4958.63	56.75	-16.05	40.70	74.00	-33.30	peak	P
2	4959.79	44.97	-15.78	29.19	54.00	-24.81	Average	P
3	7440.15	52.81	-11.43	41.38	74.00	-32.62	peak	P
4	7437.43	41.51	-11.00	30.51	54.00	-23.49	Average	P



Note:1. Testing is carried out with frequency rang 1GHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

3. Final Test Level = Reading Level + Factor, Margin= Level-Limit. Factor= Cabel loss +Antenna factor-Pre_amplifier gain.



8 Test Setup Photo

Please refer to the Appendix Test Setup Photos

9 EUT Constructional Details (EUT Photos)

Please refer to the Appendix EUT Photos

- End of the Report -

