

ANTENNA SPECIFICATION

Product description: 2.4G Ceramic Antenna

Uni Link’s part number:


Issue Date: 2026.03.27

Note: 2400-2500MHZ


1、（PRODUCT TECHNICAL SPECIFICATION）

Electrical Specifications	
Frequency Range (MHz)	2400–2500
Input Impedence (Ω)	50
V. S. W. R	≤2
Gain(dBi)	1.02
Polarization Type	Horizontal
Power Capacity (w)	2
Mechanical Specifications	
Antenna Length (mm)	NC
Radiator	Cuprum
Connect Type	NC
Working Temp(℃)	−10~60
Storage Temperature(℃)	−20~85
antenna size	3.10*1.55*0.55m
Weight(g)	/

2、PRODUCT PICTURE

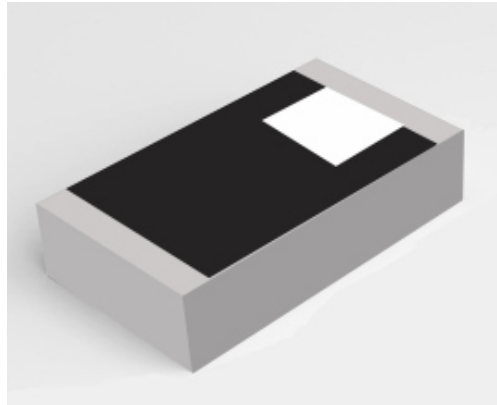



3、PRODUCT SPECIFICATION CHART



L	W	A	H
3.10±0.10	1.55±0.10	0.40±0.20	0.55±0.1

4、Image of antenna field shape test

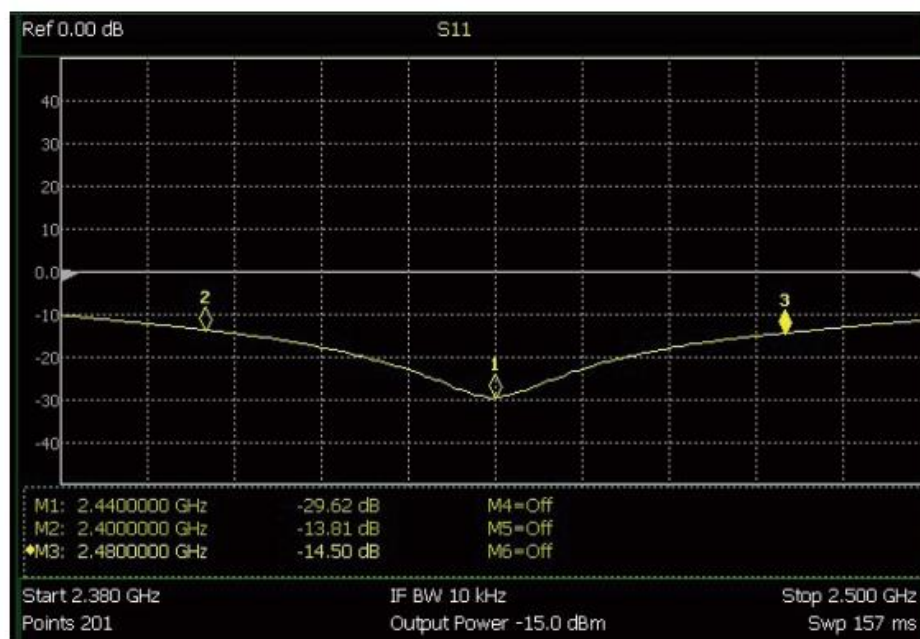

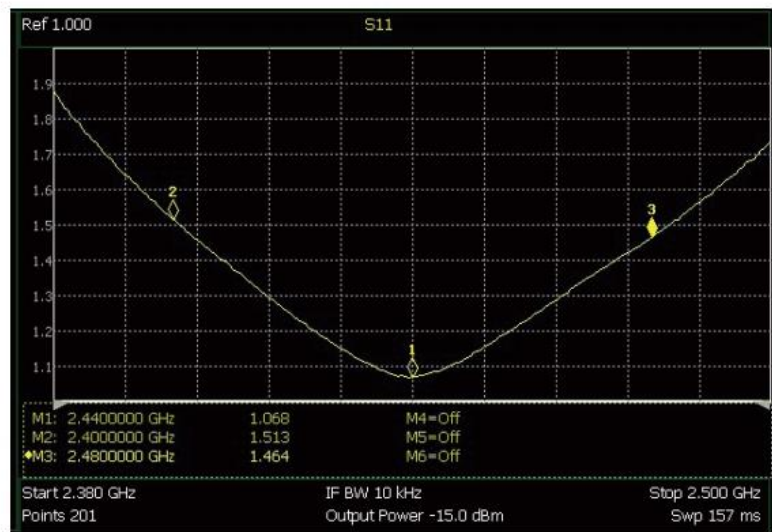

	A	B	C	D	E
1	Version FD_V2.5.4.23				
2	Frequency	Effic	Percen	Gain	
3	2400	-2.90193	51.2633%	0.61647	
4	2410	-2.82986	52.1212%	0.84781	
5	2420	-2.91876	51.06508%	0.77228	
6	2430	-2.68976	53.82995%	1.02779	
7	2440	-2.78206	52.69793%	0.89917	
8	2450	-2.93503	50.87415%	0.71576	
9	2460	-2.70924	53.58899%	0.90248	
0	2470	-2.84532	51.93598%	0.72276	
1	2480	-2.84264	51.96794%	0.6559	
2	2490	-2.76632	52.88928%	0.76751	
3	2500	-2.97664	50.389%	0.60002	
4					

