


13.1.1. 3RB, 4.5 MHz BANDWIDTH

LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

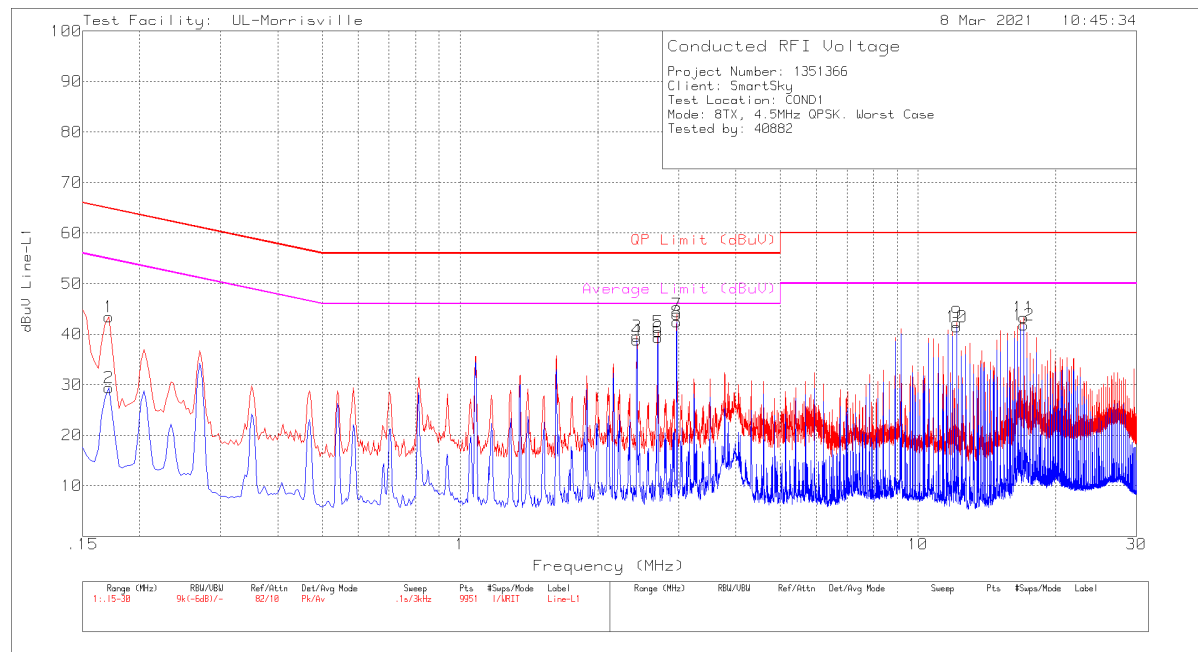


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.39	Pk	.2	9.7	43.29	65.06	-21.77	-	-
14	.168	19.4	Av	.2	9.7	29.3	-	-	55.06	-25.76
15	2.433	22.22	Pk	0	9.8	32.02	56	-23.98	-	-
16	2.433	20.53	Av	0	9.8	30.33	-	-	46	-15.67
17	2.703	23.03	Pk	0	9.8	32.83	56	-23.17	-	-
18	2.703	20.95	Av	0	9.8	30.75	-	-	46	-15.25
19	2.973	31.67	Pk	0	9.8	41.47	56	-14.53	-	-
20	2.973	30.13	Av	0	9.8	39.93	-	-	46	-6.07
21	12.162	26.55	Pk	.1	10	36.65	60	-23.35	-	-
22	12.162	25.62	Av	.1	10	35.72	-	-	50	-14.28
23	17.028	29.76	Pk	.1	10.1	39.96	60	-20.04	-	-
24	17.028	28.45	Av	.1	10.1	38.65	-	-	50	-11.35

Pk - Peak detector

Av - Average detection

Ca - CISPR average detection

LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL

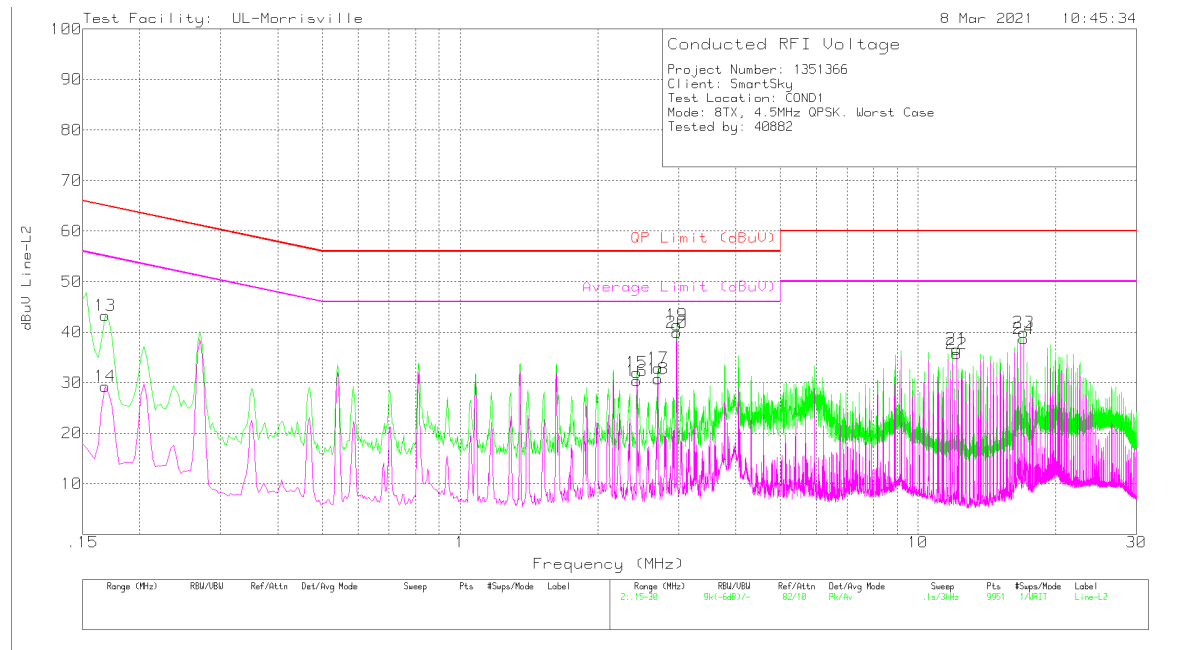

Range 2: Line-L2 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.39	Pk	.2	9.7	43.29	65.06	-21.77	-	-
14	.168	19.4	Av	.2	9.7	29.3	-	-	55.06	-25.76
15	2.433	22.22	Pk	0	9.8	32.02	56	-23.98	-	-
16	2.433	20.53	Av	0	9.8	30.33	-	-	46	-15.67
17	2.703	23.03	Pk	0	9.8	32.83	56	-23.17	-	-
18	2.703	20.95	Av	0	9.8	30.75	-	-	46	-15.25
19	2.973	31.67	Pk	0	9.8	41.47	56	-14.53	-	-
20	2.973	30.13	Av	0	9.8	39.93	-	-	46	-6.07
21	12.162	26.55	Pk	.1	10	36.65	60	-23.35	-	-
22	12.162	25.62	Av	.1	10	35.72	-	-	50	-14.28
23	17.028	29.76	Pk	.1	10.1	39.96	60	-20.04	-	-
24	17.028	28.45	Av	.1	10.1	38.65	-	-	50	-11.35

Pk - Peak detector

Av - Average detection

Ca - CISPR average detection


LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL

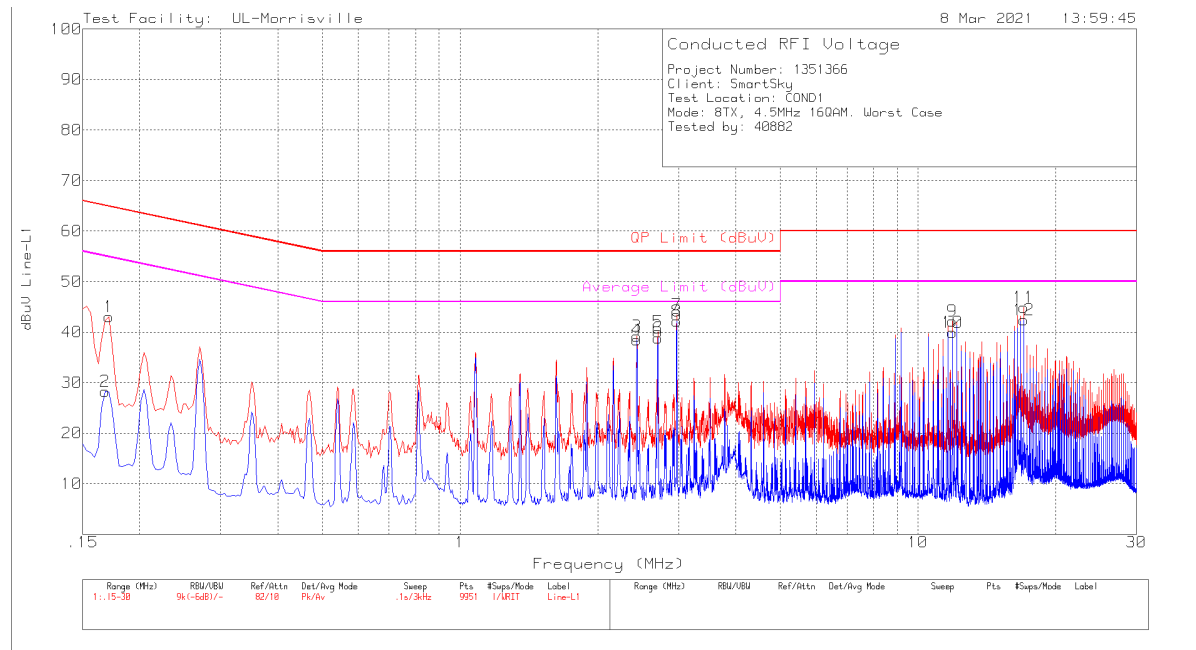

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.11	Pk	.2	9.7	43.01	64.91	-21.9	-	-
2	.168	18.4	Av	.2	9.7	28.3	-	-	55.06	-26.76
3	2.433	29.36	Pk	0	9.8	39.16	56	-16.84	-	-
4	2.433	28.69	Av	0	9.8	38.49	-	-	46	-7.51
5	2.703	30.25	Pk	0	9.8	40.05	56	-15.95	-	-
6	2.703	29.06	Av	0	9.8	38.86	-	-	46	-7.14
7	2.973	33.67	Pk	0	9.8	43.47	56	-12.53	-	-
8	2.97314	32.23	Ca	0	9.8	42.03	-	-	46	-3.97
9	11.892	32.07	Pk	.1	10	42.17	60	-17.83	-	-
10	11.892	29.89	Av	.1	10	39.99	-	-	50	-10.01
11	17.028	34.76	Pk	.1	10.1	44.96	60	-15.04	-	-
12	17.028	32.2	Av	.1	10.1	42.4	-	-	50	-7.6

Pk - Peak detector
Av - Average detection
Ca - CISPR average detection

LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL

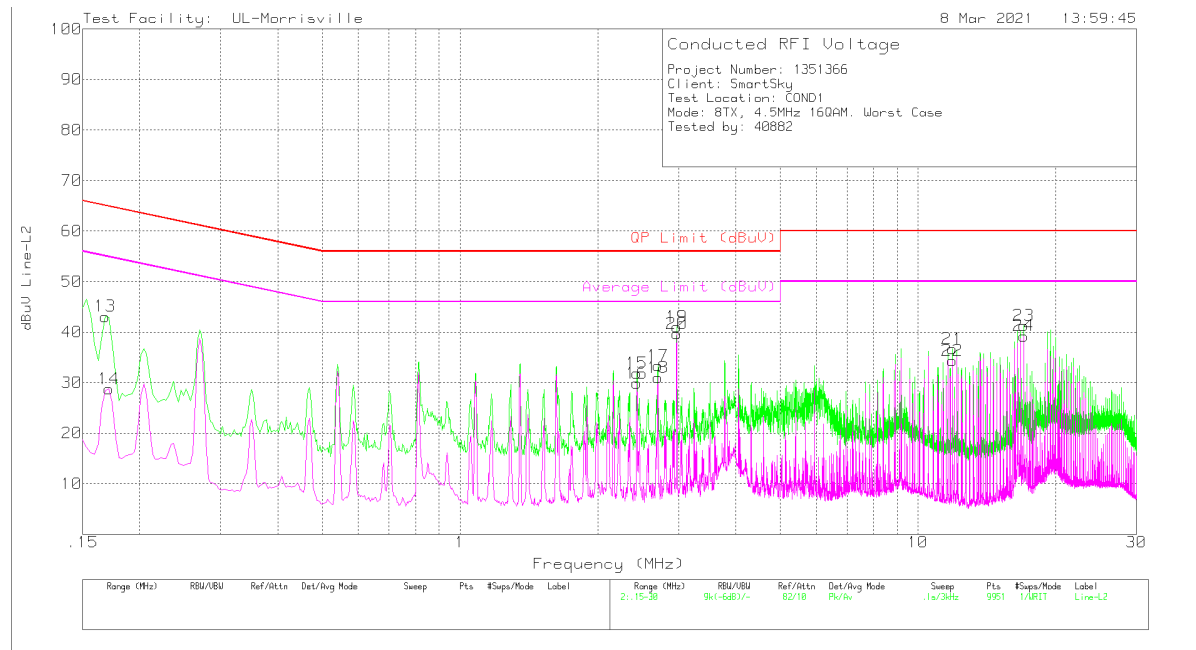


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.21	Pk	.2	9.7	43.11	65.06	-21.95	-	-
14	.171	18.9	Av	.2	9.7	28.8	-	-	54.91	-26.11
15	2.433	22.05	Pk	0	9.8	31.85	56	-24.15	-	-
16	2.433	20.09	Av	0	9.8	29.89	-	-	46	-16.11
17	2.703	23.52	Pk	0	9.8	33.32	56	-22.68	-	-
18	2.703	21.19	Av	0	9.8	30.99	-	-	46	-15.01
19	2.973	31.26	Pk	0	9.8	41.06	56	-14.94	-	-
20	2.973	29.89	Av	0	9.8	39.69	-	-	46	-6.31
21	11.892	26.62	Pk	.1	10	36.72	60	-23.28	-	-
22	11.892	24.28	Av	.1	10	34.38	-	-	50	-15.62
23	17.028	31.08	Pk	.1	10.1	41.28	60	-18.72	-	-
24	17.028	29.06	Av	.1	10.1	39.26	-	-	50	-10.74

Pk - Peak detector
Av - Average detection

13.1.2. 3RB, 9 MHz BANDWIDTH

LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

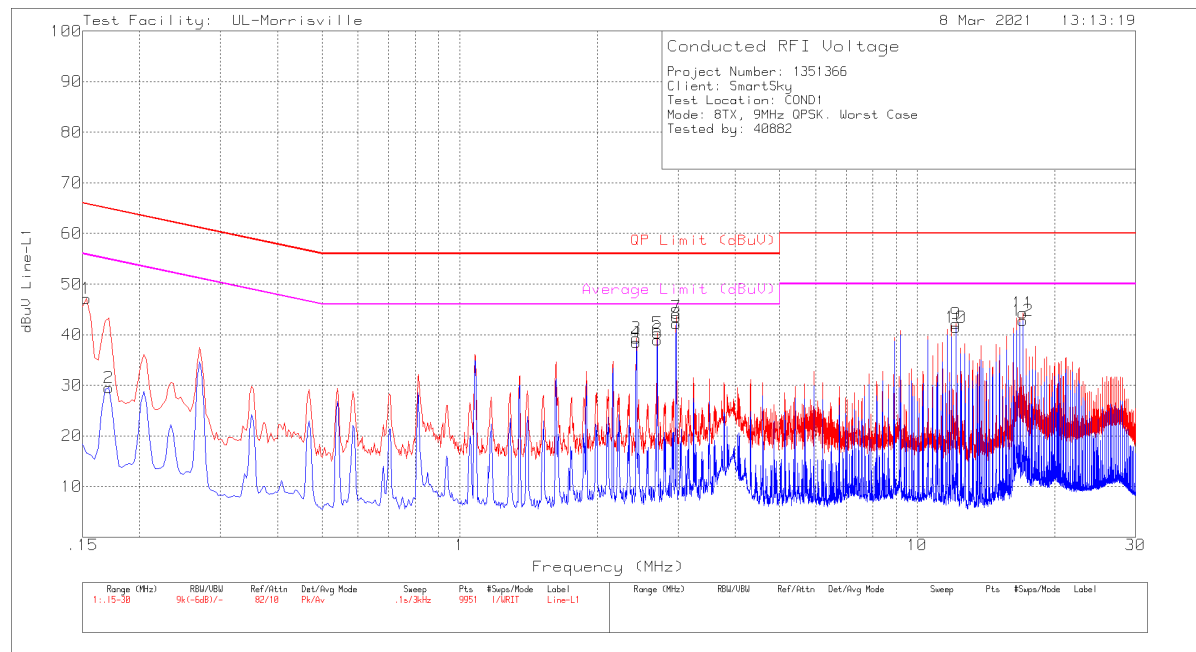


Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	37.2	Pk	.2	9.7	47.1	65.84	-18.74	-	-
2	.171	19.58	Av	.2	9.7	29.48	-	-	54.91	-25.43
3	2.433	29.48	Pk	0	9.8	39.28	56	-16.72	-	-
4	2.433	28.7	Av	0	9.8	38.5	-	-	46	-7.5
5	2.703	30.5	Pk	0	9.8	40.3	56	-15.7	-	-
6	2.703	29.14	Av	0	9.8	38.94	-	-	46	-7.06
7	2.973	33.79	Pk	0	9.8	43.59	56	-12.41	-	-
8	2.973	32.23	Ca	0	9.8	42.03	-	-	46	-3.97
9	12.162	32.04	Pk	.1	10	42.14	60	-17.86	-	-
10	12.162	31.38	Av	.1	10	41.48	-	-	50	-8.52
11	17.028	34.1	Pk	.1	10.1	44.3	60	-15.7	-	-
12	17.028	32.57	Av	.1	10.1	42.77	-	-	50	-7.23

Pk - Peak detector

Av - Average detection

Ca - CISPR average detection

LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL

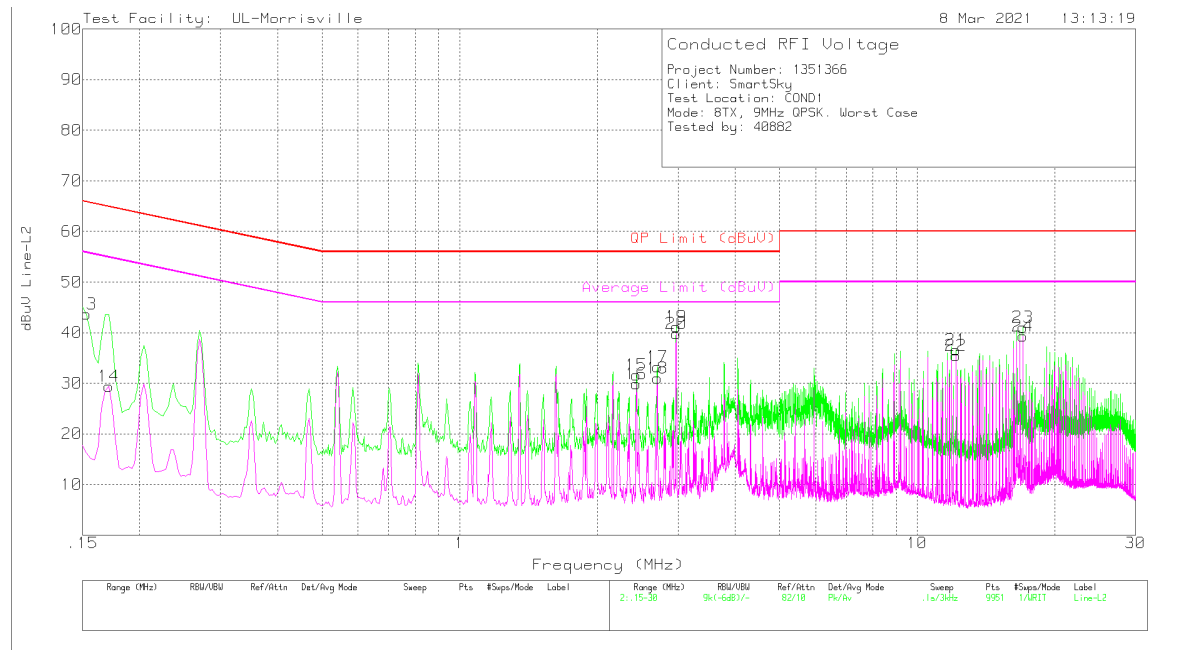

Range 2: Line-L2 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.153	33.82	Pk	.2	9.7	43.72	65.84	-22.12	-	-
14	.171	19.53	Av	.2	9.7	29.43	-	-	54.91	-25.48
15	2.433	21.82	Pk	0	9.8	31.62	56	-24.38	-	-
16	2.433	20.05	Av	0	9.8	29.85	-	-	46	-16.15
17	2.703	23.42	Pk	0	9.8	33.22	56	-22.78	-	-
18	2.703	21.17	Av	0	9.8	30.97	-	-	46	-15.03
19	2.973	31.4	Pk	0	9.8	41.2	56	-14.8	-	-
20	2.973	29.98	Av	0	9.8	39.78	-	-	46	-6.22
21	12.162	26.52	Pk	.1	10	36.62	60	-23.38	-	-
22	12.162	25.37	Av	.1	10	35.47	-	-	50	-14.53
23	17.028	30.85	Pk	.1	10.1	41.05	60	-18.95	-	-
24	17.028	29.15	Av	.1	10.1	39.35	-	-	50	-10.65

Pk - Peak detector

Av - Average detection

Ca - CISPR average detection


LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL

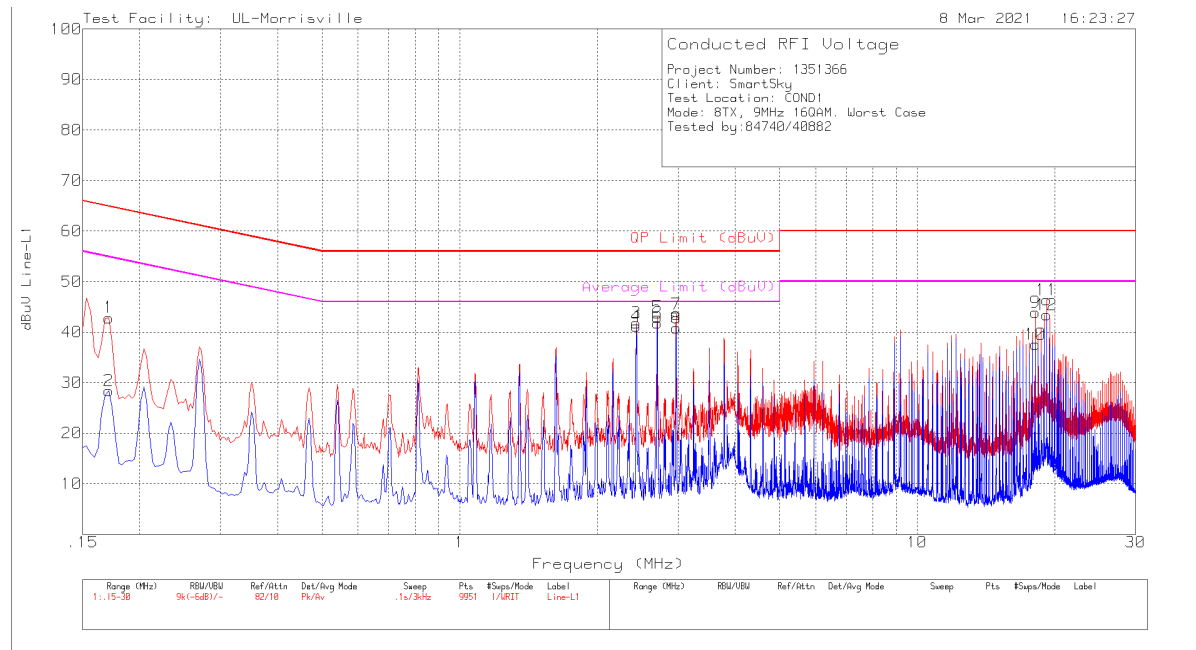

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	32.96	Pk	.2	9.7	42.86	64.91	-22.05	-	-
2	.171	18.53	Av	.2	9.7	28.43	-	-	54.91	-26.48
3	2.433	31.99	Pk	0	9.8	41.79	56	-14.21	-	-
4	2.43235	31.89	Ca	0	9.8	41.69	-	-	46	-4.31
5	2.703	33.18	Pk	0	9.8	42.98	56	-13.02	-	-
6	2.70273	32.43	Ca	0	9.8	42.23	-	-	46	-3.77
7	2.973	33.78	Pk	0	9.8	43.58	56	-12.42	-	-
8	2.9734	31.24	Ca	0	9.8	41.04	-	-	46	-4.96
9	18.108	33.74	Pk	.1	10.1	43.94	60	-16.06	-	-
10	18.108	27.41	Av	.1	10.1	37.61	-	-	50	-12.39
11	19.191	36.09	Pk	.2	10.1	46.39	60	-13.61	-	-
12	19.191	33.08	Av	.2	10.1	43.38	-	-	50	-6.62

Pk - Peak detector
Av - Average detection
Ca - CISPR average detection

LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL

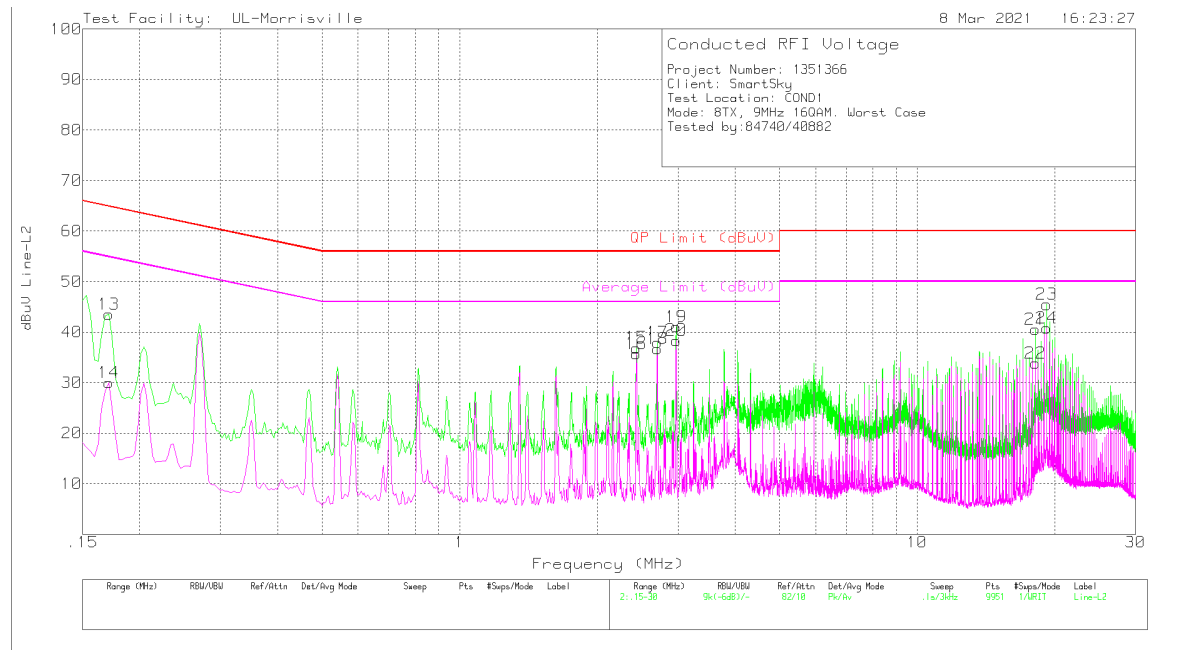


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.171	33.64	Pk	.2	9.7	43.54	64.91	-21.37	-	-
14	.171	20.11	Av	.2	9.7	30.01	-	-	54.91	-24.9
15	2.433	27.1	Pk	0	9.8	36.9	56	-19.1	-	-
16	2.433	25.98	Av	0	9.8	35.78	-	-	46	-10.22
17	2.703	28.16	Pk	0	9.8	37.96	56	-18.04	-	-
18	2.703	26.87	Av	0	9.8	36.67	-	-	46	-9.33
19	2.973	31.23	Pk	0	9.8	41.03	56	-14.97	-	-
20	2.973	28.59	Av	0	9.8	38.39	-	-	46	-7.61
21	18.108	30.34	Pk	.1	10.1	40.54	60	-19.46	-	-
22	18.108	23.69	Av	.1	10.1	33.89	-	-	50	-16.11
23	19.191	35.27	Pk	.1	10.1	45.47	60	-14.53	-	-
24	19.191	30.6	Av	.1	10.1	40.8	-	-	50	-9.2

Pk - Peak detector
Av - Average detection

13.1.3. FRB, 4.5 MHz BANDWIDTH


LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

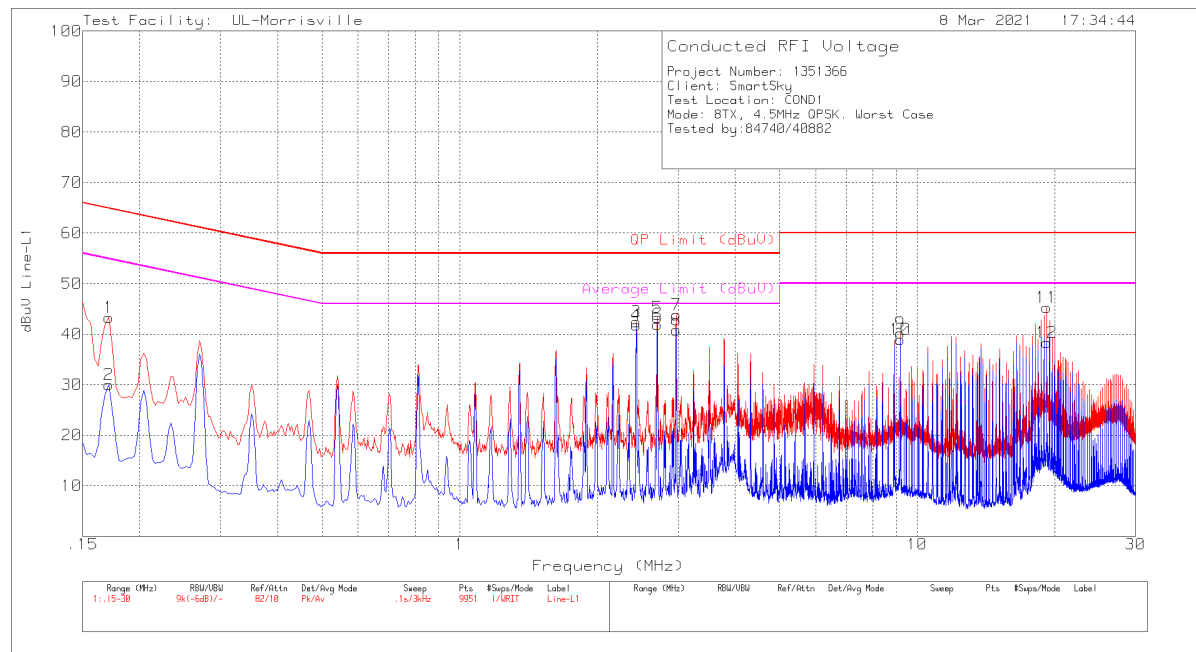

Range 1: Line-L1 15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.38	Pk	.2	9.7	43.28	64.91	-21.63	-	-
2	.171	20.08	Av	.2	9.7	29.98	-	-	54.91	-24.93
3	2.433	32.59	Pk	0	9.8	42.39	56	-13.61	-	-
4	2.43304	32.03	Ca	0	9.8	41.83	-	-	46	-4.17
5	2.703	33.46	Pk	0	9.8	43.26	56	-12.74	-	-
6	2.70288	32.16	Ca	0	9.8	41.96	-	-	46	-4.04
7	2.973	33.97	Pk	0	9.8	43.77	56	-12.23	-	-
8	2.97403	30.7	Ca	0	9.8	40.5	-	-	46	-5.5
9	9.189	30.13	Pk	.1	10	40.23	60	-19.77	-	-
10	9.189	28.9	Av	.1	10	39	-	-	50	-11
11	19.191	34.97	Pk	.2	10.1	45.27	60	-14.73	-	-
12	19.191	27.98	Av	.2	10.1	38.28	-	-	50	-11.72

Pk - Peak detector
Av - Average detection
Ca - CISPR average detection

LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL

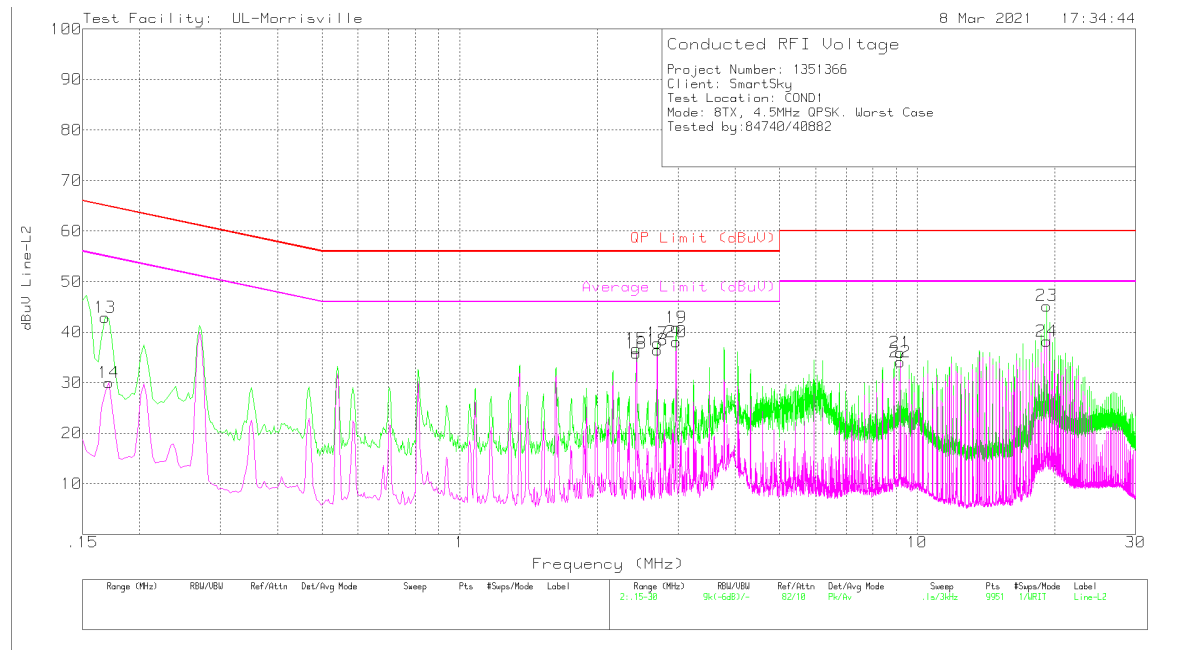


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33	Pk	.2	9.7	42.9	65.06	-22.16	-	-
14	.171	20.12	Av	.2	9.7	30.02	-	-	54.91	-24.89
15	2.433	26.96	Pk	0	9.8	36.76	56	-19.24	-	-
16	2.433	26.03	Av	0	9.8	35.83	-	-	46	-10.17
17	2.703	28.04	Pk	0	9.8	37.84	56	-18.16	-	-
18	2.703	26.65	Av	0	9.8	36.45	-	-	46	-9.55
19	2.973	31.1	Pk	0	9.8	40.9	56	-15.1	-	-
20	2.973	28.26	Av	0	9.8	38.06	-	-	46	-7.94
21	9.189	25.92	Pk	.1	10	36.02	60	-23.98	-	-
22	9.189	24.04	Av	.1	10	34.14	-	-	50	-15.86
23	19.191	35.02	Pk	.1	10.1	45.22	60	-14.78	-	-
24	19.191	28.01	Av	.1	10.1	38.21	-	-	50	-11.79

Pk - Peak detector

Av - Average detection


LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL

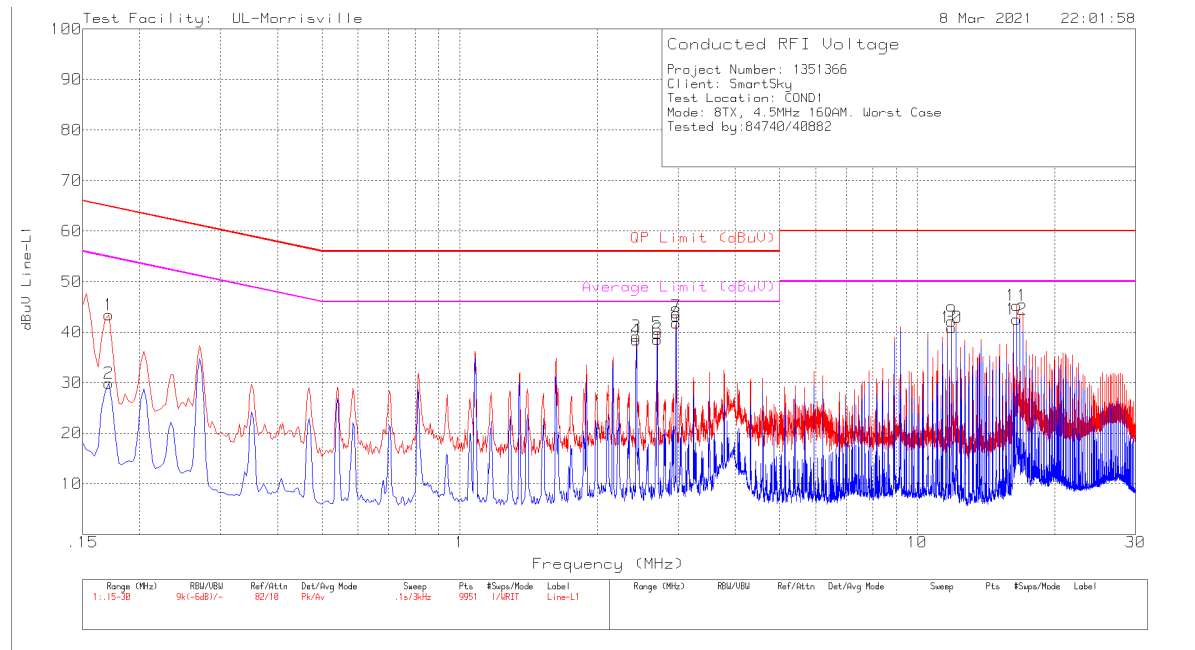

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.51	Pk	.2	9.7	43.41	64.91	-21.5	-	-
2	.171	20.02	Av	.2	9.7	29.92	-	-	54.91	-24.99
3	2.433	29.41	Pk	0	9.8	39.21	56	-16.79	-	-
4	2.433	28.65	Av	0	9.8	38.45	-	-	46	-7.55
5	2.703	29.96	Pk	0	9.8	39.76	56	-16.24	-	-
6	2.703	28.83	Av	0	9.8	38.63	-	-	46	-7.37
7	2.973	33.33	Pk	0	9.8	43.13	56	-12.87	-	-
8	2.97322	31.89	Ca	0	9.8	41.69	-	-	46	-4.31
9	11.892	32.08	Pk	.1	10	42.18	60	-17.82	-	-
10	11.892	30.84	Av	.1	10	40.94	-	-	50	-9.06
11	16.488	35.04	Pk	.1	10.1	45.24	60	-14.76	-	-
12	16.488	32.33	Av	.1	10.1	42.53	-	-	50	-7.47

Pk - Peak detector
Av - Average detection
Ca - CISPR average detection

LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL

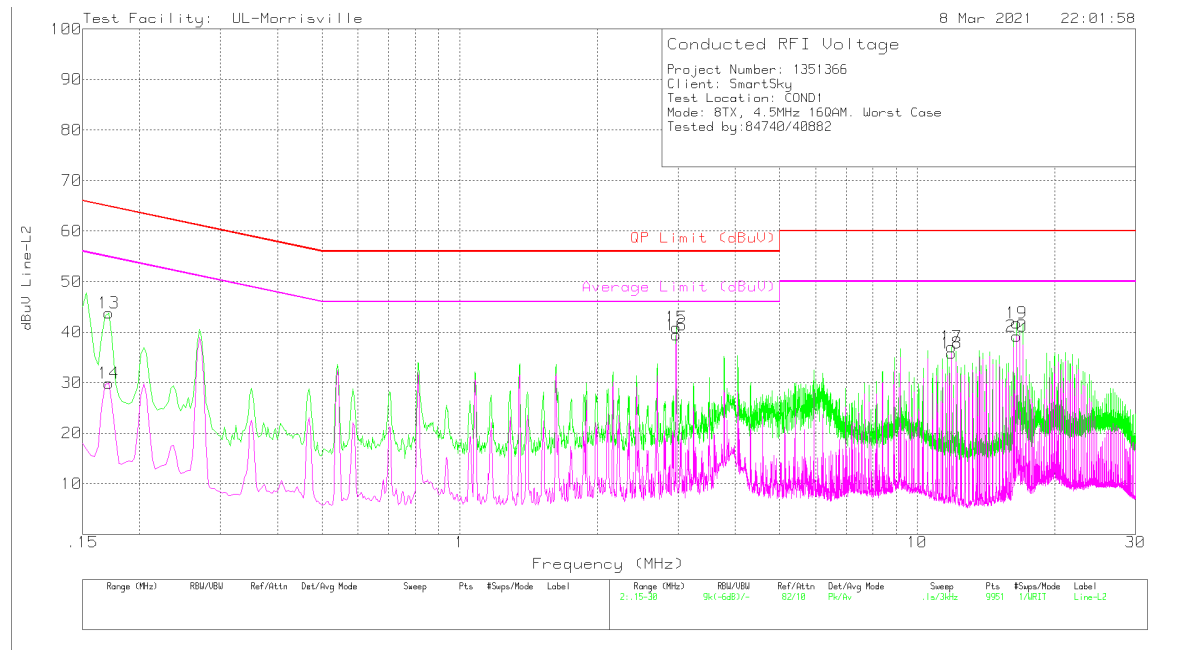


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.171	33.84	Pk	.2	9.7	43.74	64.91	-21.17	-	-
14	.171	20	Av	.2	9.7	29.9	-	-	54.91	-25.01
15	2.973	31.18	Pk	0	9.8	40.98	56	-15.02	-	-
16	2.973	29.62	Av	0	9.8	39.42	-	-	46	-6.58
17	11.892	26.98	Pk	.1	10	37.08	60	-22.92	-	-
18	11.892	25.72	Av	.1	10	35.82	-	-	50	-14.18
19	16.488	31.64	Pk	.1	10.1	41.84	60	-18.16	-	-
20	16.488	29.04	Av	.1	10.1	39.24	-	-	50	-10.76

Pk - Peak detector
Av - Average detection

13.1.4. FRB, 9 MHz BANDWIDTH


LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

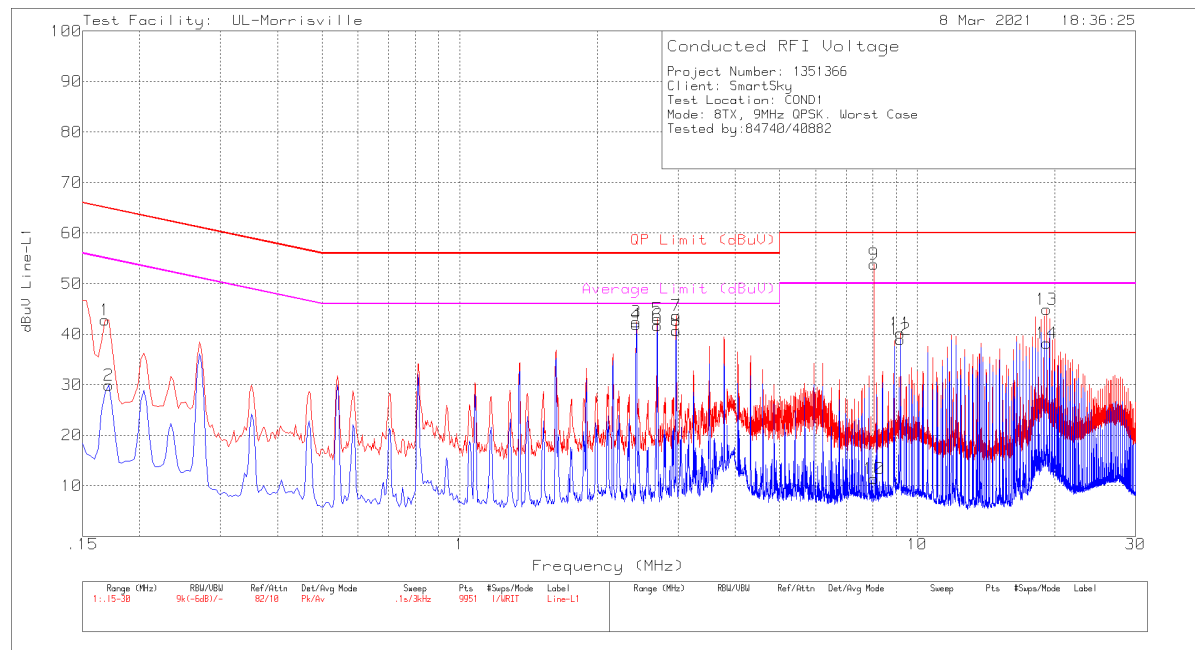

Range 1: Line-L1 1.5 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.168	32.86	Pk	.2	9.7	42.76	65.06	-22.3	-	-
2	.171	20.01	Av	.2	9.7	29.91	-	-	54.91	-25
3	2.433	32.68	Pk	0	9.8	42.48	56	-13.52	-	-
4	2.4323	32.16	Ca	0	9.8	41.96	-	-	46	-4.04
5	2.703	33.28	Pk	0	9.8	43.08	56	-12.92	-	-
6	2.70316	32.92	Ca	0	9.8	42.72	-	-	46	-3.28
7	2.973	33.81	Pk	0	9.8	43.61	56	-12.39	-	-
8	2.97296	32.2	Ca	0	9.8	42	-	-	46	-4
9	8.0413	1.49	Qp	.1	10	11.59	60	-48.41	-	-
10	8.046	1.34	Av	.1	10	11.44	-	-	50	-38.56
11	9.189	30.13	Pk	.1	10	40.23	60	-19.77	-	-
12	9.189	28.91	Av	.1	10	39.01	-	-	50	-10.99
13	19.191	34.66	Pk	.2	10.1	44.96	60	-15.04	-	-
14	19.191	27.85	Av	.2	10.1	38.15	-	-	50	-11.85

Pk - Peak detector
Av - Average detection
Qp - Quasi-Peak detector
Ca - CISPR average detection

LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL

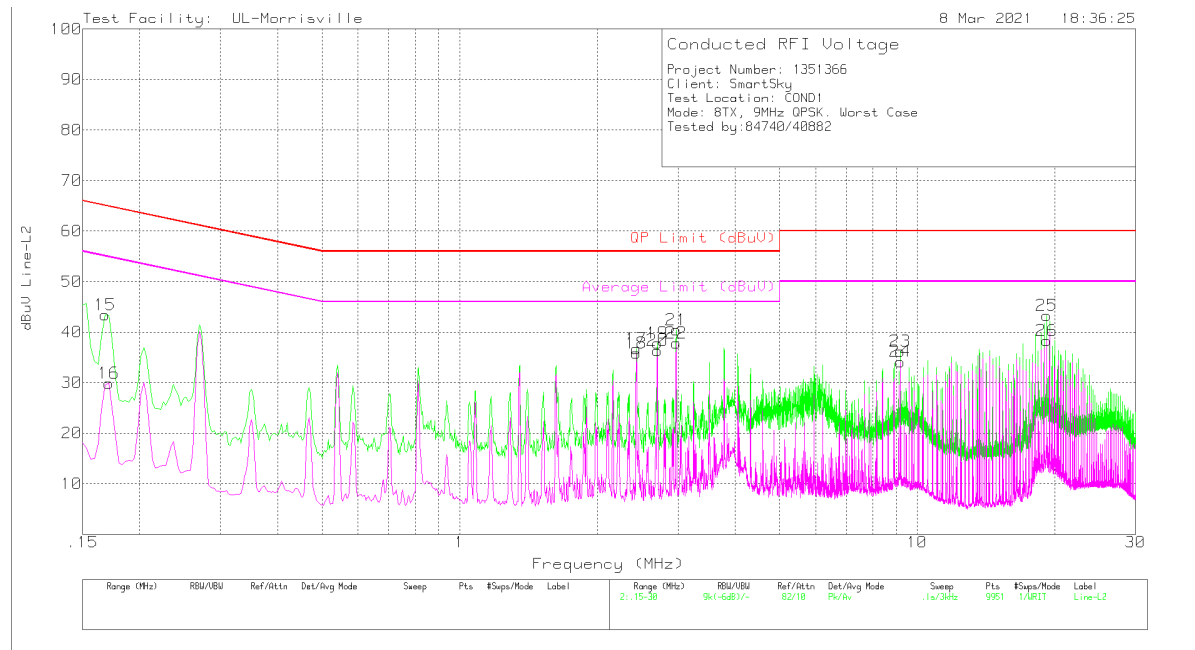


Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
15	.168	33.5	Pk	.2	9.7	43.4	65.06	-21.66	-	-
16	.171	19.94	Av	.2	9.7	29.84	-	-	54.91	-25.07
17	2.433	26.92	Pk	0	9.8	36.72	56	-19.28	-	-
18	2.433	26.01	Av	0	9.8	35.81	-	-	46	-10.19
19	2.703	27.99	Pk	0	9.8	37.79	56	-18.21	-	-
20	2.703	26.6	Av	0	9.8	36.4	-	-	46	-9.6
21	2.973	30.65	Pk	0	9.8	40.45	56	-15.55	-	-
22	2.973	28.04	Av	0	9.8	37.84	-	-	46	-8.16
23	9.189	26.07	Pk	.1	10	36.17	60	-23.83	-	-
24	9.189	24.07	Av	.1	10	34.17	-	-	50	-15.83
25	19.191	33.09	Pk	.1	10.1	43.29	60	-16.71	-	-
26	19.191	28.16	Av	.1	10.1	38.36	-	-	50	-11.64

Pk - Peak detector

Av - Average detection


LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL

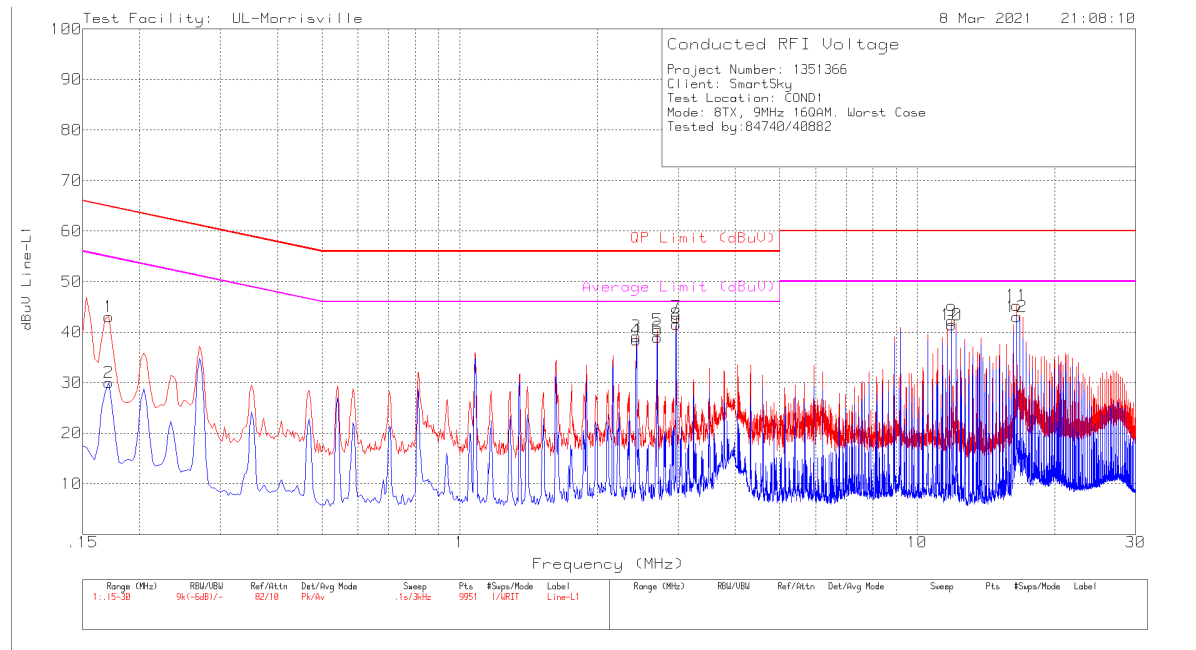

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.15	Pk	.2	9.7	43.05	64.91	-21.86	-	-
2	.171	20.1	Av	.2	9.7	30	-	-	54.91	-24.91
3	2.433	29.34	Pk	0	9.8	39.14	56	-16.86	-	-
4	2.433	28.69	Av	0	9.8	38.49	-	-	46	-7.51
5	2.703	30.66	Pk	0	9.8	40.46	56	-15.54	-	-
6	2.703	29.16	Av	0	9.8	38.96	-	-	46	-7.04
7	2.973	33.18	Pk	0	9.8	42.98	56	-13.02	-	-
8	2.97296	31.81	Ca	0	9.8	41.61	-	-	46	-4.39
9	11.892	32.23	Pk	.1	10	42.33	60	-17.67	-	-
10	11.892	31.3	Av	.1	10	41.4	-	-	50	-8.6
11	16.488	35.09	Pk	.1	10.1	45.29	60	-14.71	-	-
12	16.488	32.83	Av	.1	10.1	43.03	-	-	50	-6.97

Pk - Peak detector
Av - Average detection
Ca - CISPR average detection

LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL

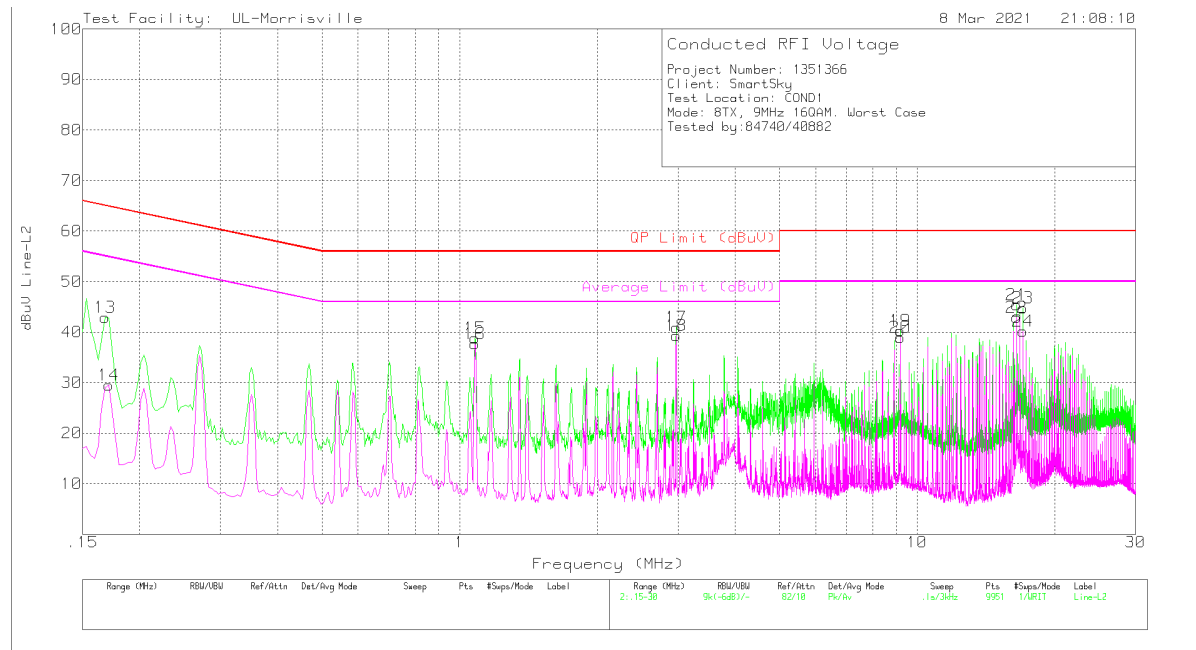


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.05	Pk	.2	9.7	42.95	65.06	-22.11	-	-
14	.171	19.63	Av	.2	9.7	29.53	-	-	54.91	-25.38
15	1.08	29.03	Pk	0	9.8	38.83	56	-17.17	-	-
16	1.08	27.94	Av	0	9.8	37.74	-	-	46	-8.26
17	2.973	31.09	Pk	0	9.8	40.89	56	-15.11	-	-
18	2.973	29.53	Av	0	9.8	39.33	-	-	46	-6.67
19	9.189	30.23	Pk	.1	10	40.33	60	-19.67	-	-
20	9.189	28.88	Av	.1	10	38.98	-	-	50	-11.02
21	16.488	35.17	Pk	.1	10.1	45.37	60	-14.63	-	-
22	16.488	32.7	Av	.1	10.1	42.9	-	-	50	-7.1
23	17.028	34.6	Pk	.1	10.1	44.8	60	-15.2	-	-
24	17.028	30	Av	.1	10.1	40.2	-	-	50	-9.8

Pk - Peak detector
Av - Average detection


14. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

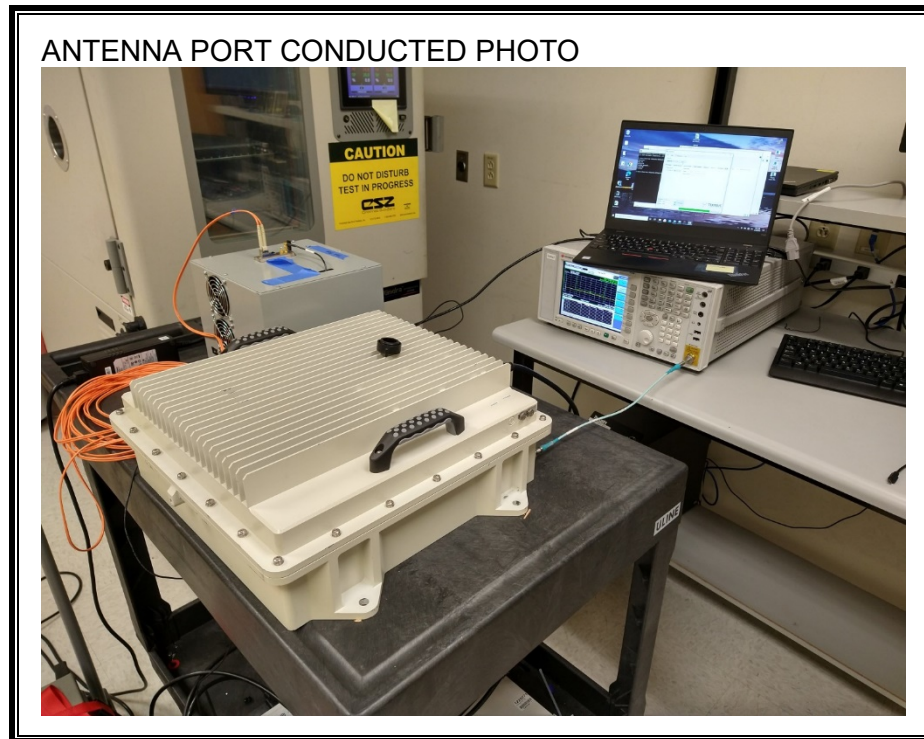


RADIATED RF MEASUREMENT SETUP (BELOW 30 MHz)

RADIATED FRONT PHOTO

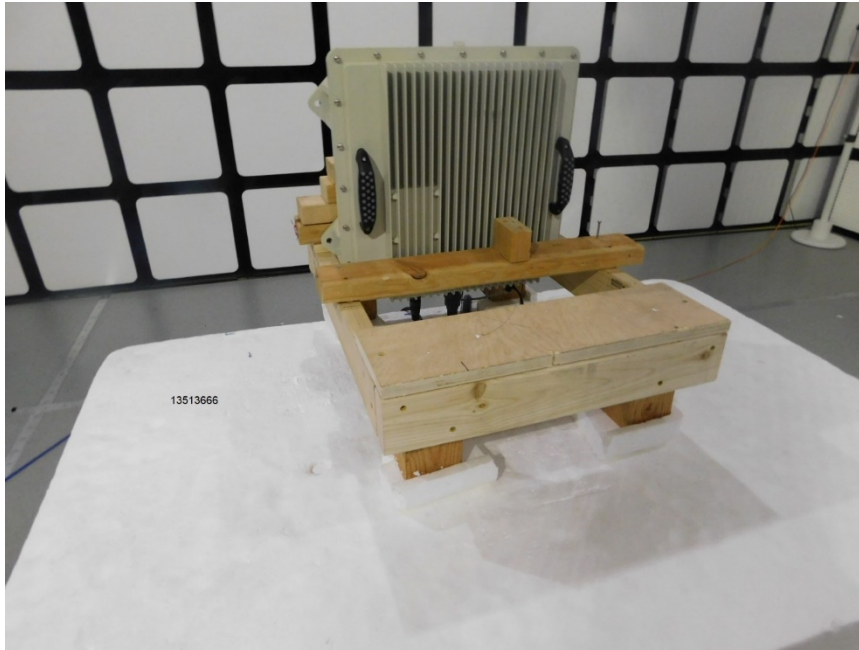


RADIATED BACK PHOTO

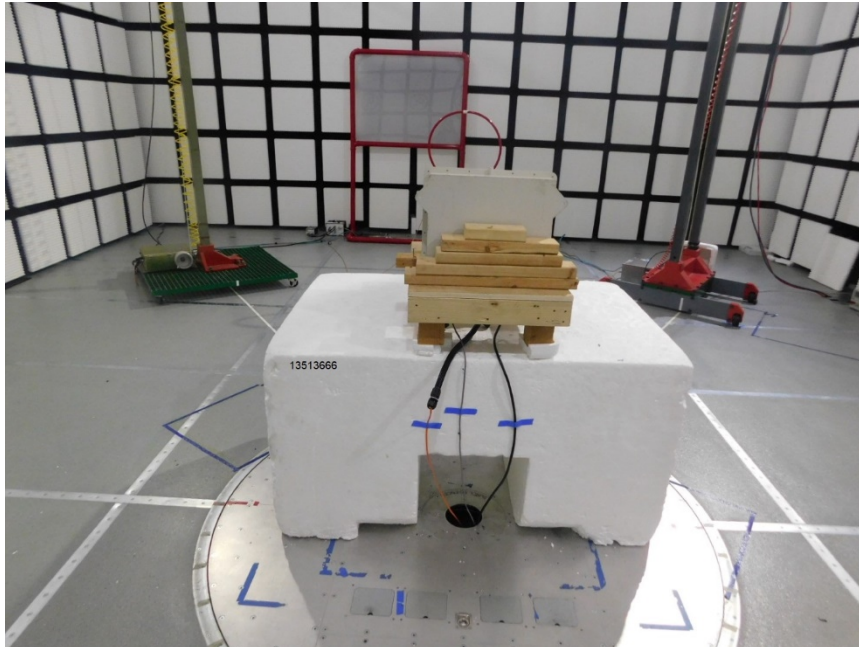


RADIATED RF MEASUREMENT SETUP (BELOW 1000 MHz)

RADIATED FRONT PHOTO

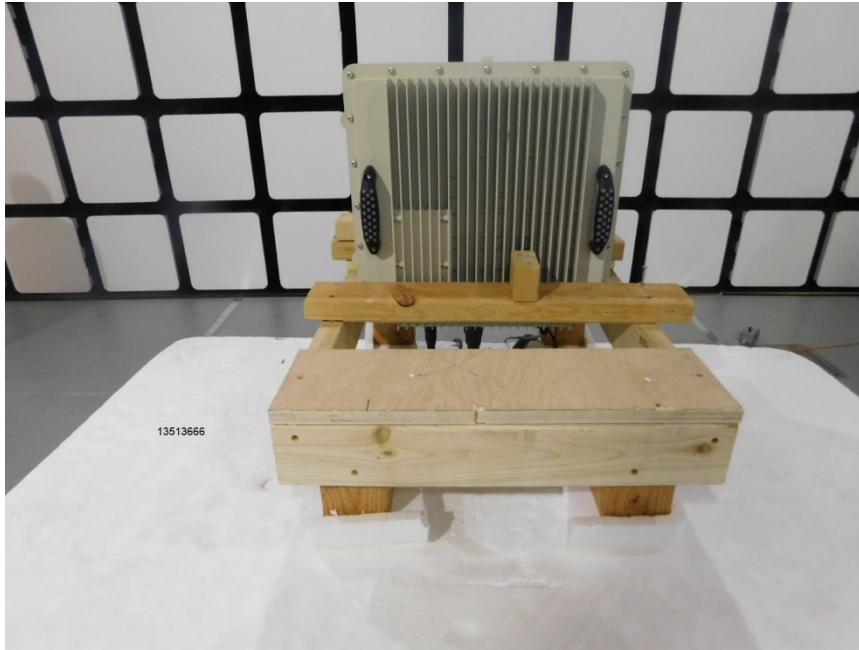


RADIATED BACK PHOTO

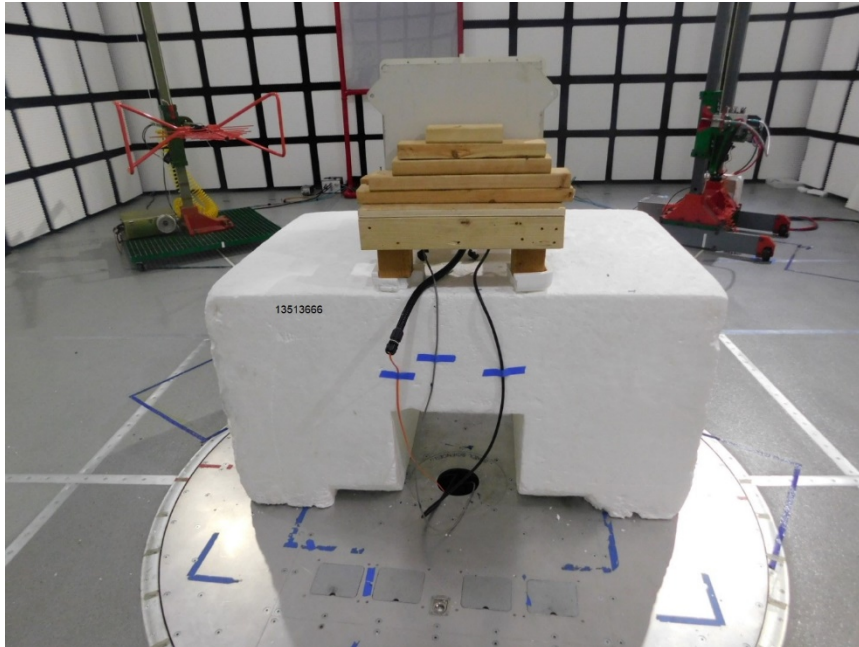


RADIATED RF MEASUREMENT SETUP (ABOVE 1000 MHz)

RADIATED FRONT PHOTO

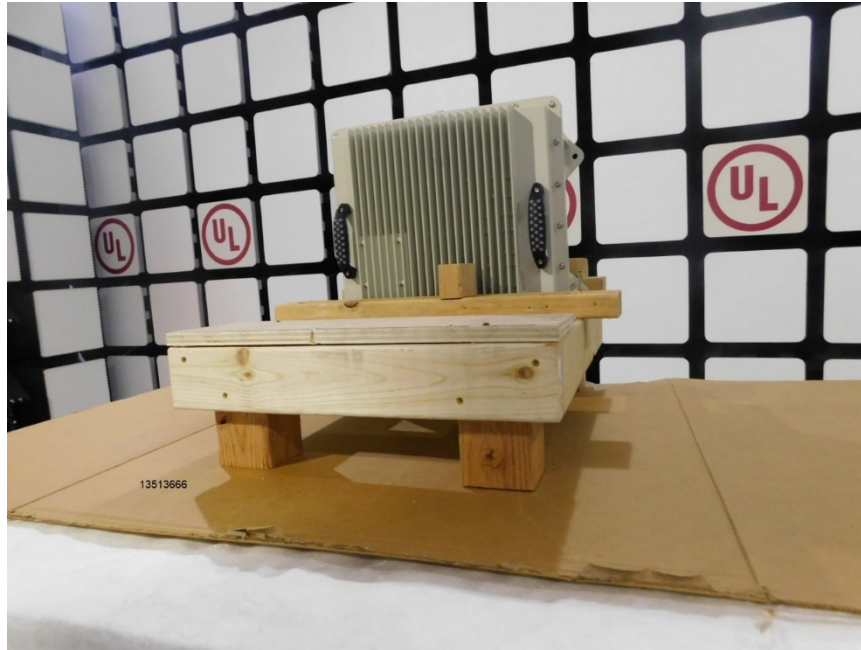



RADIATED BACK PHOTO

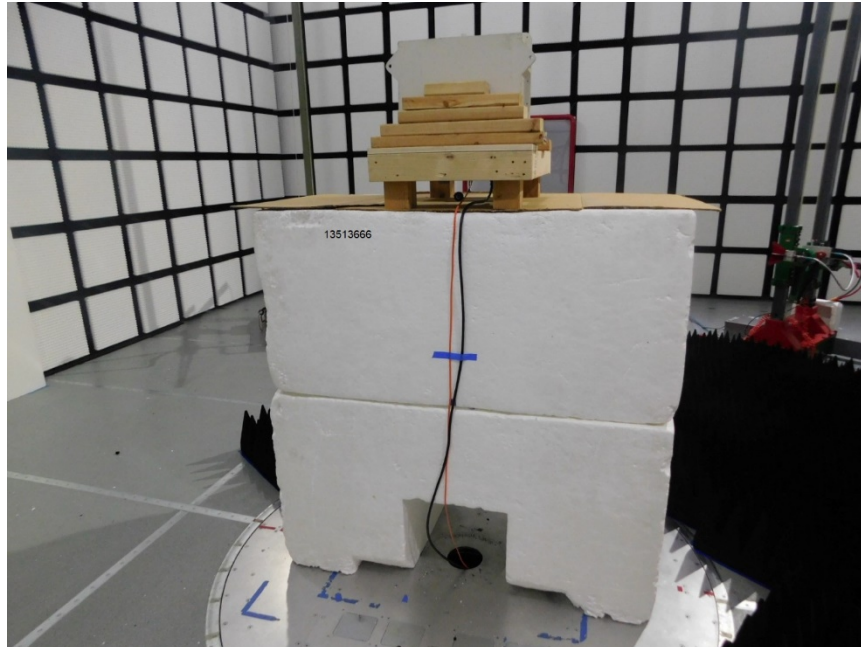

Note: EUT tested at a height slightly higher than 150cm in order to safely test the device.

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

LINE CONDUCTED PHOTO

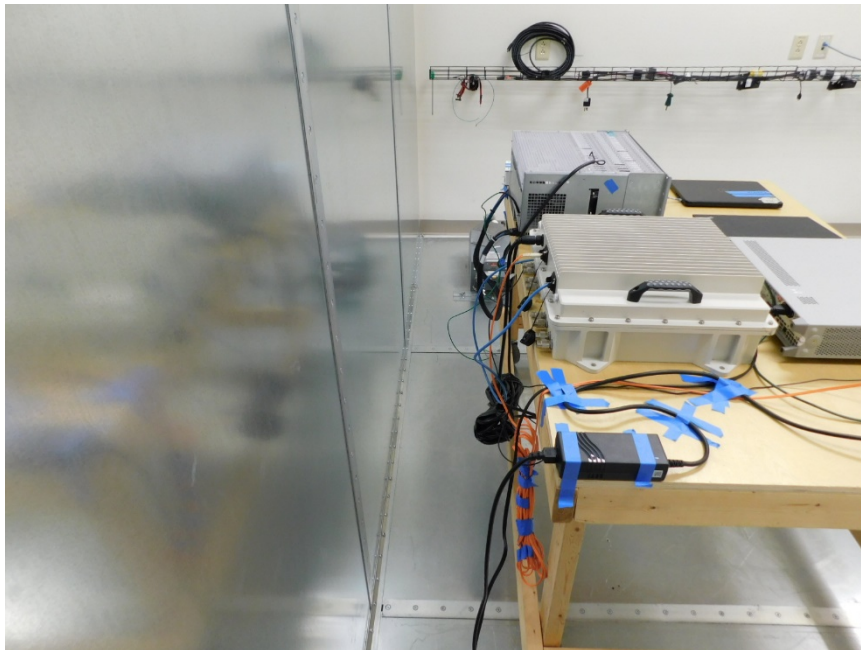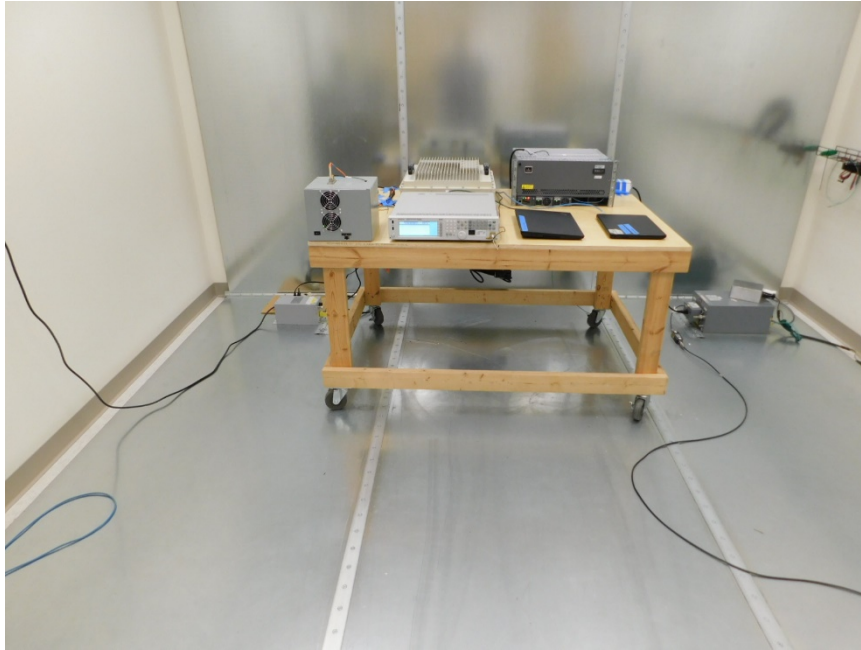

END OF REPORT