


LINKVIL

V1.01

Portable Wi-Fi Phone Quick Start Guide

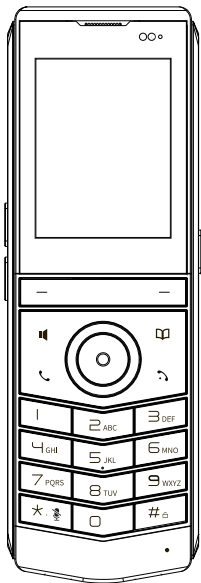

W611W

Packing list



Portable
Wi-Fi Phone



Battery Cover



Charging Base



Quick Start Guide



Rechargeable Battery




Belt Clip



Power Adapter

Handset




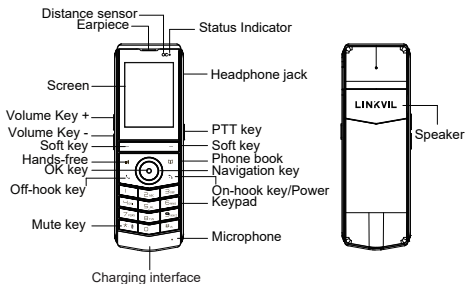


Install the battery

- 1. Remove the rear case:** Remove the rear case of the whole machine with a little force from the handle position A of the rear case of the main unit.
- 2. Install the battery:** Take out the battery from the packaging box, with the battery with the notch facing up, put the battery C at the battery compartment C, and pull the battery button until it completely fits the underside of the battery.

3. Install the battery cover: Take out the battery cover from the packaging box, and press the battery cover firmly along the edge of the battery compartment to ensure that the outer surface of the battery cover is completely inserted into the battery compartment and flush with the edge of the battery compartment, reaching IP67 protection level.

4. Install the back cover: Align the back cover with the buckle on the back of the main unit, press your hands along the edge of the main unit from top to bottom (there will be a "click" sound during the process), and ensure that there is no gap, it means that the back cover is fastened.



Replacement battery

1. Remove the rear case: Remove the rear case of the whole machine with a little force from the handle position A of the rear case of the main unit.

LINKVIL

Fanvil Technology Co., Ltd.

Website: www.fanvil.com

Email: sales@fanvil.com support@fanvil.com

Tel: +86-755-2640-2199 Fax: +86-755-2640-2618

Add: 10/F Block A, Dualshine Global Science Innovation Center,
Honglang North 2nd Road, Bao'an District, Shenzhen, China


2. Remove the battery cover: From the back of the main unit, buckle the hand position B, and pull it upwards in the direction indicated by the arrow at the same time (depending on the strength of different users, it may be removed after two or three times of pulling; in order to ensure the protection level of the machine , it is not easy to disassemble here).

3. Remove the battery: Pull the battery button down to remove the old battery.


4. Install the battery: Take out the battery from the packaging box, with the battery with the notch facing up, put the battery C at the battery compartment C, and pull the battery button until it completely fits the underside of the battery.

5. Install the battery cover: Take out the battery cover from the packaging box, and press the battery cover firmly along the edge of the battery compartment to ensure that the outer surface of the battery cover is completely inserted into the battery compartment and flush with the edge of the battery compartment, reaching IP67 protection level.


6. Install the back cover: Align the back cover with the buckle on the back of the main unit, press your hands along the edge of the main unit from top to bottom (there will be a "click" sound during the process), and ensure that there is no gap, it means that the back cover is fastened.





Remove the rear case



Remove the battery cover




Remove the battery

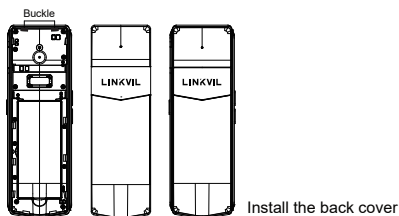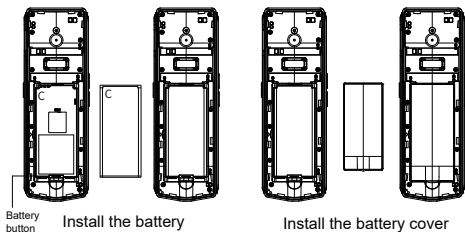


Special statement: This product belongs to the three-proof equipment of IP67. Under normal use, please do not disassemble the battery cover arbitrarily. After long-term disassembly, the protection level of IP67 will be affected. We are not responsible.

Connect the charging base

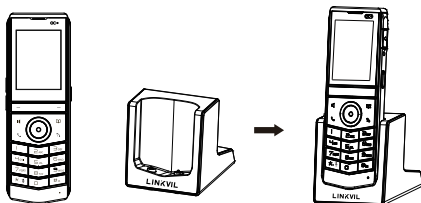

Note :

1. Use Fanvil-supplied power adapter (5V/2A).
A third-party power adapter may damage the handset.
2. Check the charging status on the top-right corner of the LCD screen.

Install the belt clip**Connect Wi-Fi**

1. Press Menu > Basic > 9 WLAN.
2. Select Wi-Fi.

Configuration**Configuration via Phone**

1. Press Menu > Advanced Settings (Default password 123).
2. Select Accounts: To configure enable the account, fill the SIP server address, port, user name, password etc.

Configuration via Web

1. Get the IP address from the phone: Press Menu > Status > 1 Network > Wi-Fi IP.
2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment (The default username and password are both 'admin'.)
3. Configure: Select Accounts, and fill the relevant content.

Warning

Used below 35°C in the state of charge

- Please dispose of lifeless battery under guidance.
- Recycle your device.
- Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types);
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.



and used in accordance with the instruction manual, it may cause harmful

Regulatory Compliance

Federal Communication Commission (FCC) — USA

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device

must accept any interference received; including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation.

This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement:

The device has been tested and comply with FCC SAR limits. And keep the device minimum 5mm from the body when normal use.

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of this equipment is a label that contains, among other information, a product identifier in the format

US: 311IPNANW611W.

If requested, this number must be provided to the telephone company.

Fanvil Technology Co., LTD.

Website: www.fanvil.com

Tel: 86-0755-26402199

Email: mengjiao.Hu@fanvil.com

add:10/F Block A, Dualshine Global Science Innovation,
Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China