

# FCC Test Report

APPLICANT : KonnectONE, LLC  
EQUIPMENT : Wireless Home Phone  
BRAND NAME : moxee  
MODEL NAME : K500HPEL  
FCC ID : 2APQU-K500HPEL  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Jul. 19, 2019 and testing was completed on Aug. 31, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

*Derreck Chen*

Reviewed by: Derreck Chen / Supervisor

*Eric Shih*

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055  
People's Republic of China**



## TABLE OF CONTENTS

|                                                               |    |
|---------------------------------------------------------------|----|
| REVISION HISTORY .....                                        | 3  |
| SUMMARY OF TEST RESULT .....                                  | 4  |
| 1. GENERAL DESCRIPTION .....                                  | 5  |
| 1.1. Applicant.....                                           | 5  |
| 1.2. Manufacturer .....                                       | 5  |
| 1.3. Product Feature of Equipment Under Test .....            | 5  |
| 1.4. Product Specification of Equipment Under Test .....      | 6  |
| 1.5. Modification of EUT .....                                | 6  |
| 1.6. Test Location .....                                      | 7  |
| 1.7. Applicable Standards .....                               | 7  |
| 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....           | 8  |
| 2.1. Test Mode .....                                          | 8  |
| 2.2. Connection Diagram of Test System .....                  | 9  |
| 2.3. Support Unit used in test configuration and system ..... | 9  |
| 2.4. EUT Operation Test Setup .....                           | 10 |
| 3. TEST RESULT .....                                          | 11 |
| 3.1. Test of AC Conducted Emission Measurement .....          | 11 |
| 3.2. Test of Radiated Emission Measurement .....              | 15 |
| 4. LIST OF MEASURING EQUIPMENT .....                          | 20 |
| 5. UNCERTAINTY OF EVALUATION .....                            | 21 |
| APPENDIX A. SETUP PHOTOGRAPHS                                 |    |



## REVISION HISTORY

| REPORT NO.  | VERSION | DESCRIPTION             | ISSUED DATE   |
|-------------|---------|-------------------------|---------------|
| FC971908-01 | Rev. 01 | Initial issue of report | Sep. 12, 2019 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description           | Limit           | Result | Remark                                  |
|----------------|----------|-----------------------|-----------------|--------|-----------------------------------------|
| 3.1            | 15.107   | AC Conducted Emission | < 15.107 limits | PASS   | Under limit<br>9.97 dB at<br>0.170 MHz  |
| 3.2            | 15.109   | Radiated Emission     | < 15.109 limits | PASS   | Under limit<br>6.56 dB at<br>57.160 MHz |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



## 1. General Description

### 1.1. Applicant

KonnectONE, LLC

40 Lake Bellevue Drive, Suite 350, Bellevue, Washington 98005, U.S.A

### 1.2. Manufacturer

KonnectONE, LLC

40 Lake Bellevue Drive, Suite 350, Bellevue, Washington 98005, U.S.A

### 1.3. Product Feature of Equipment Under Test

| Product Feature                 |                                               |
|---------------------------------|-----------------------------------------------|
| Equipment                       | Wireless Home Phone                           |
| Brand Name                      | moxee                                         |
| Model Name                      | K500HPEL                                      |
| FCC ID                          | 2APQU-K500HPEL                                |
| EUT supports Radios application | LTE/GNSS                                      |
| IMEI Code                       | Conduction: 358621100009191<br>Radiation: N/A |
| HW Version                      | EN_K500HPEL_MB_C                              |
| SW Version                      | EN_K500HPELV1.0.0B02                          |
| EUT Stage                       | Production Unit                               |

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a change ID report for K500HPEL, all the test results are leveraged from original report FC971908.

## 1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                     | LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz<br>LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz<br>LTE Band 5 : 824.7 MHz ~ 848.3 MHz<br>LTE Band 12 : 699.7 MHz ~ 715.3 MHz<br>LTE Band 13 : 779.5 MHz ~ 784.5 MHz<br>LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz<br>LTE Band 26 : 814.7 MHz ~ 848.3 MHz<br>LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz<br>LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz<br>LTE Band 71: 665.5 MHz ~ 695.5MHz                              |
| <b>Rx Frequency</b>                     | LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz<br>LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz<br>LTE Band 5 : 869.7 MHz ~ 893.3 MHz<br>LTE Band 12 : 729.7 MHz ~ 745.3 MHz<br>LTE Band 13 : 748.5 MHz ~ 753.5 MHz<br>LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz<br>LTE Band 26 : 859.7 MHz ~ 893.3 MHz<br>LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz<br>LTE Band 66 : 2110.7 MHz~ 2179.3 MHz<br>LTE Band 71: 619.5 MHz ~ 649.5MHz<br>GNSS : 1559 MHz ~ 1610 MHz |
| <b>Antenna Type</b>                     | WWAN : Fixed External Antenna<br>GNSS: FPC Antenna                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Type of Modulation</b>               | LTE: QPSK / 16QAM<br>GNSS : BPSK                                                                                                                                                                                                                                                                                                                                                                                                     |

Note : GNSS Rx = GLONASS + GPS

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

|                           |                                                                                                                                                                         |                            |                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International (Shenzhen) Inc.                                                                                                                                   |                            |                                       |
| <b>Test Site Location</b> | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China<br>TEL: +86-755-86379589<br>FAX: +86-755-86379595 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                 | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | CO01-SZ                                                                                                                                                                 | CN1256                     | 421272                                |

|                           |                                                                                                                                                           |                            |                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International (Shenzhen) Inc.                                                                                                                     |                            |                                       |
| <b>Test Site Location</b> | No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China<br>TEL: +86-755-33202398 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | 03CH04-SZ                                                                                                                                                 | CN1256                     | 421272                                |

## 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

| Test Items                                                                                                                                                                           | Function Type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission                                                                                                                                                                | Mode 1: LTE Band 2 Idle(Middle) + GNSS Rx + telephone load + Adapter<br>Mode 2: LTE Band 4 Idle(Middle) + GNSS Rx + telephone load + Adapter<br>Mode 3: LTE Band 5 Idle(Low) + GNSS Rx + telephone load + Adapter<br>Mode 4: LTE Band 12 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 5: LTE Band 13 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 6: LTE Band 25 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 7: LTE Band 26 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 8: LTE Band 41 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 9: LTE Band 66 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 10 : LTE Band 71 Idle(High) + GNSS Rx + telephone load + Adapter |
| Radiated Emissions                                                                                                                                                                   | Mode 1: LTE Band 2 Idle(Middle) + GNSS Rx + telephone load + Adapter<br>Mode 2: LTE Band 4 Idle(Middle) + GNSS Rx + telephone load + Adapter<br>Mode 3: LTE Band 5 Idle(Low) + GNSS Rx + telephone load + Adapter<br>Mode 4: LTE Band 12 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 5: LTE Band 13 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 6: LTE Band 25 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 7: LTE Band 26 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 8: LTE Band 41 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 9: LTE Band 66 Idle(High) + GNSS Rx + telephone load + Adapter<br>Mode 10 : LTE Band 71 Idle(High) + GNSS Rx + telephone load + Adapter |
| <b>Remark:</b><br>1. The worst case of AC is mode 1; only the test data of this mode is reported.<br>2. The worst case of RE is mode 7; only the test data of this mode is reported. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## 2.2.Connection Diagram of Test System

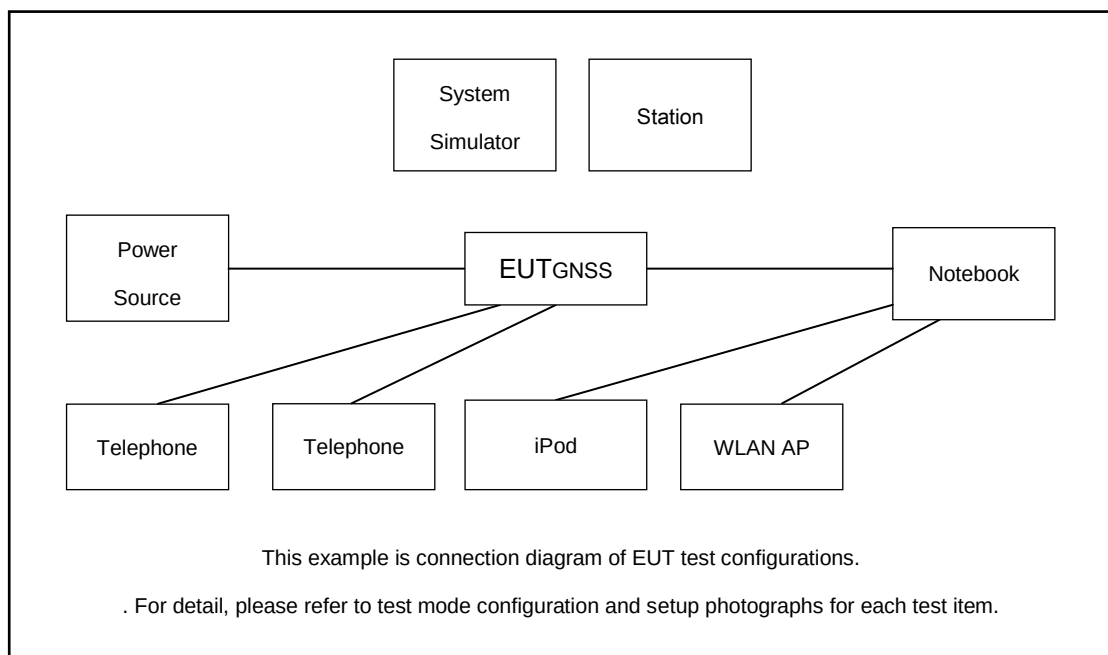

## 2.3. Support Unit used in test configuration and system

| Item | Equipment        | Trade Name | Model Name | FCC ID      | Data Cable     | Power Cord                                                 |
|------|------------------|------------|------------|-------------|----------------|------------------------------------------------------------|
| 1.   | System Simulator | Anritsu    | MT8820C    | N/A         | N/A            | Unshielded,1.8m                                            |
| 2.   | GNSS Station     | RACELOGIC  | 18645      | N/A         | N/A            | Unshielded,1.8m                                            |
| 3.   | GNSS Station     | RACELOGIC  | RLLS03-2P  | Fcc DoC     | N/A            | Unshielded,1.8m                                            |
| 4.   | WLAN AP          | D-link     | DIR-820L   | KA2IR820LA1 | N/A            | Unshielded,1.8m                                            |
| 5.   | WLAN AP          | ASUSTek    | RT-AC66U   | MSQ-RTAC66U | N/A            | Unshielded,2.7m<br>with Core                               |
| 6.   | Notebook         | Lenovo     | E540       | FCC DoC     | N/A            | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 7.   | telephone        | Bossini    | HCD133TSD  | N/A         | N/A            | N/A                                                        |
| 8.   | telephone        | Bossini    | HCD133TSDL | N/A         | N/A            | N/A                                                        |
| 9.   | iPod nano 8GB    | Apple      | MC690ZP/A  | FCC DoC     | Shielded, 1.2m | N/A                                                        |
| 10.  | IPod             | Apple      | MC525 ZP/A | Fcc DoC     | Shielded, 1.0m | N/A                                                        |



## **2.4. EUT Operation Test Setup**

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

| Frequency of emission<br>(MHz) | Conducted limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

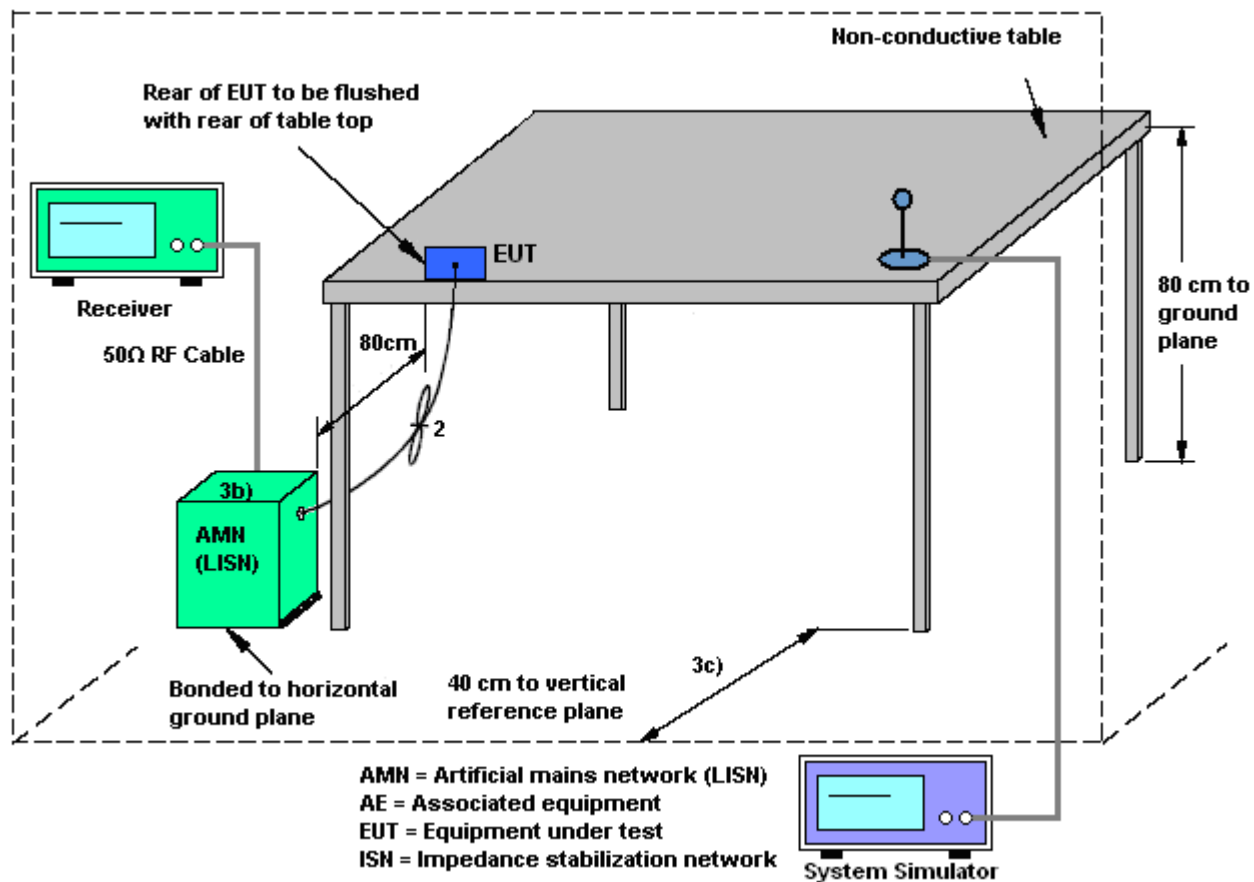



## 3.1.5 Test Result of AC Conducted Emission

|                 |                                                                                 |                     |        |
|-----------------|---------------------------------------------------------------------------------|---------------------|--------|
| Test Engineer : | Bear Xiong                                                                      | Temperature :       | 22~25℃ |
|                 |                                                                                 | Relative Humidity : | 50~55% |
| Test Voltage :  | 120Vac / 60Hz                                                                   | Phase :             | Line   |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |        |

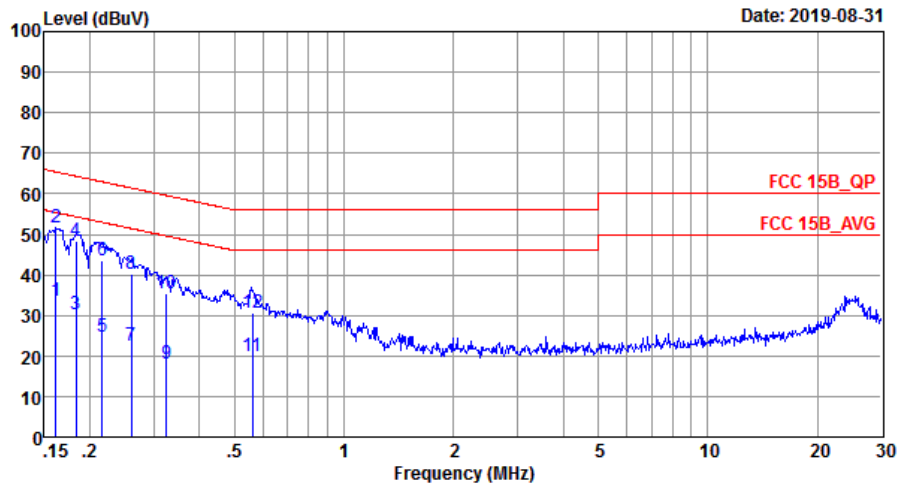


Site : CO01-SZ  
Condition: FCC 15B\_QP LISN\_20190719\_L LINE

Mode : Mode 1  
IMEI : 358621100009191

|     | Freq | Level | Over   | Limit | Read  | LISN   | Cable |         |
|-----|------|-------|--------|-------|-------|--------|-------|---------|
|     | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|     | MHz  | dBuV  | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1   | 0.16 | 33.49 | -21.89 | 55.38 | 23.30 | 0.03   | 10.16 | Average |
| 2 * | 0.16 | 51.49 | -13.89 | 65.38 | 41.30 | 0.03   | 10.16 | QP      |
| 3   | 0.18 | 30.19 | -24.14 | 54.33 | 20.00 | 0.03   | 10.16 | Average |
| 4   | 0.18 | 48.19 | -16.14 | 64.33 | 38.00 | 0.03   | 10.16 | QP      |
| 5   | 0.22 | 24.89 | -28.07 | 52.96 | 14.70 | 0.03   | 10.16 | Average |
| 6   | 0.22 | 43.69 | -19.27 | 62.96 | 33.50 | 0.03   | 10.16 | QP      |
| 7   | 0.26 | 22.40 | -29.02 | 51.42 | 12.20 | 0.03   | 10.17 | Average |
| 8   | 0.26 | 40.40 | -21.02 | 61.42 | 30.20 | 0.03   | 10.17 | QP      |
| 9   | 0.33 | 18.00 | -31.57 | 49.57 | 7.80  | 0.03   | 10.17 | Average |
| 10  | 0.33 | 35.50 | -24.07 | 59.57 | 25.30 | 0.03   | 10.17 | QP      |
| 11  | 0.56 | 19.90 | -26.10 | 46.00 | 9.70  | 0.02   | 10.18 | Average |
| 12  | 0.56 | 30.60 | -25.40 | 56.00 | 20.40 | 0.02   | 10.18 | QP      |



|                        |                                                                                 |                            |         |
|------------------------|---------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Engineer :</b> | Bear Xiong                                                                      | <b>Temperature :</b>       | 22~25℃  |
|                        |                                                                                 | <b>Relative Humidity :</b> | 50~55%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                   | <b>Phase :</b>             | Neutral |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit. |                            |         |

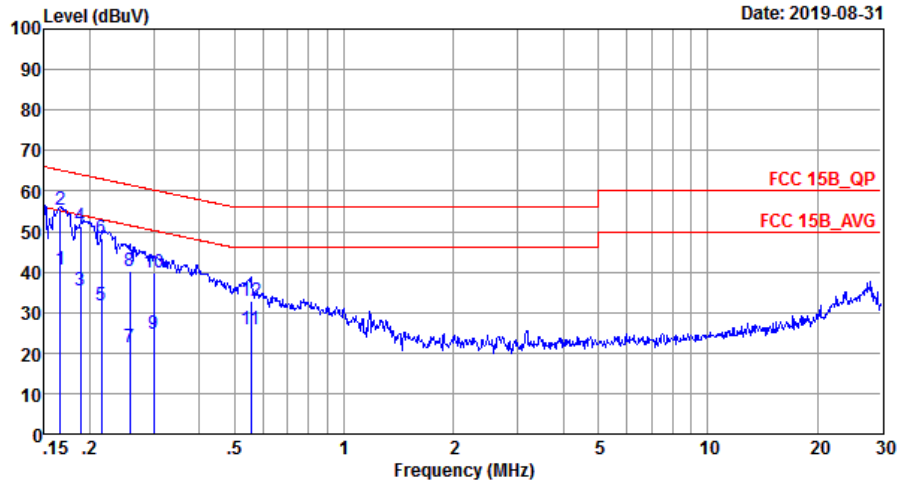

Site : CO01-SZ  
Condition: FCC 15B\_QP LISN\_20190719\_N NEUTRAL

Mode : Mode 1  
IMEI : 358621100009191

|     | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz  | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1   | 0.17 | 40.49 | -14.67     | 55.16      | 30.30      | 0.03        | 10.16      | Average |
| 2 * | 0.17 | 55.19 | -9.97      | 65.16      | 45.00      | 0.03        | 10.16      | QP      |
| 3   | 0.19 | 35.39 | -18.72     | 54.11      | 25.20      | 0.03        | 10.16      | Average |
| 4   | 0.19 | 51.39 | -12.72     | 64.11      | 41.20      | 0.03        | 10.16      | QP      |
| 5   | 0.22 | 31.69 | -21.32     | 53.01      | 21.50      | 0.03        | 10.16      | Average |
| 6   | 0.22 | 48.19 | -14.82     | 63.01      | 38.00      | 0.03        | 10.16      | QP      |
| 7   | 0.26 | 21.50 | -30.01     | 51.51      | 11.30      | 0.03        | 10.17      | Average |
| 8   | 0.26 | 40.20 | -21.31     | 61.51      | 30.00      | 0.03        | 10.17      | QP      |
| 9   | 0.30 | 24.90 | -25.34     | 50.24      | 14.70      | 0.03        | 10.17      | Average |
| 10  | 0.30 | 39.70 | -20.54     | 60.24      | 29.50      | 0.03        | 10.17      | QP      |
| 11  | 0.56 | 25.80 | -20.20     | 46.00      | 15.60      | 0.02        | 10.18      | Average |
| 12  | 0.56 | 32.70 | -23.30     | 56.00      | 22.50      | 0.02        | 10.18      | QP      |

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

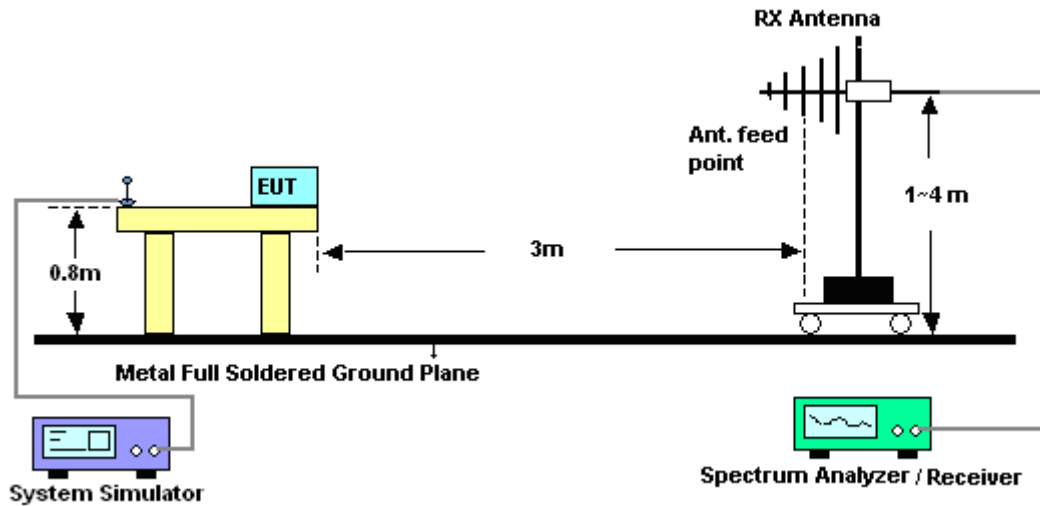


For radiated emissions above 1GHz

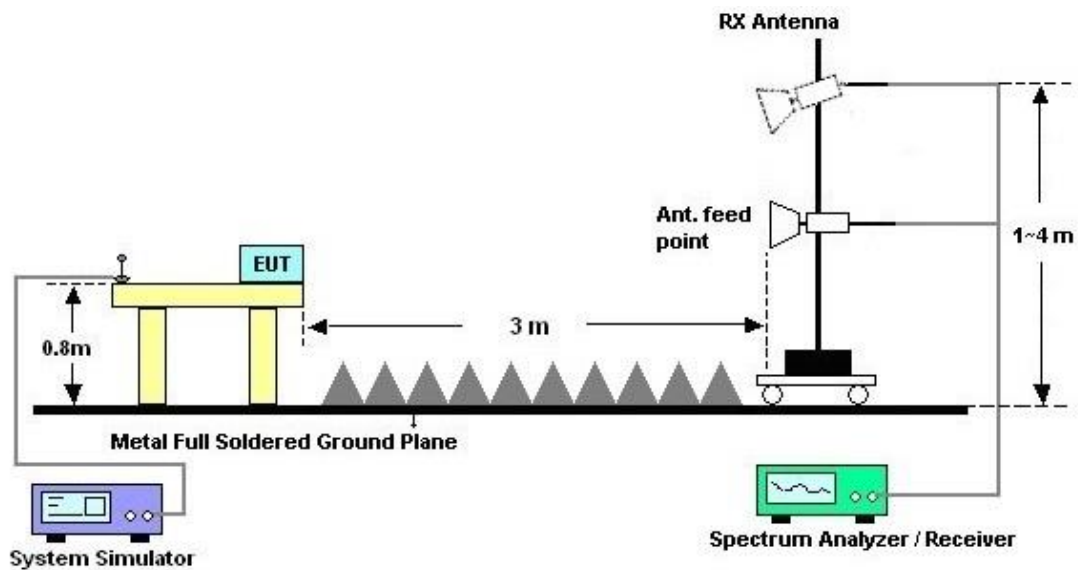

### 3.2.5. Test Result of Radiated Emission

|                 |                                                     |                     |            |
|-----------------|-----------------------------------------------------|---------------------|------------|
| Test Engineer : | Zhang Xu                                            | Temperature :       | 24~25°C    |
|                 |                                                     | Relative Humidity : | 48~49%     |
| Test Distance : | 3m                                                  | Polarization :      | Horizontal |
| Remark :        | #7 is system simulator signal which can be ignored. |                     |            |

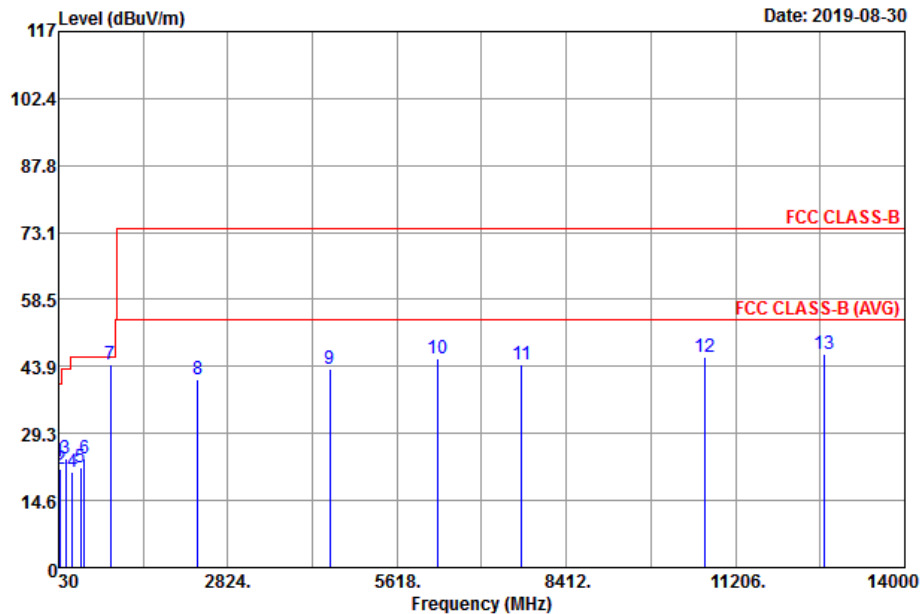


Site : 03CH04-SZ  
Condition : FCC CLASS-B 3m LF\_ANT41909\_18 HORIZONTAL

Plane : Y

|    | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | A/Pos | T/Pos | Remark |
|----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|-------|-------|--------|
|    | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            | cm    | deg   |        |
| 1  | 30.00    | 23.01  | -16.99     | 40.00      | 29.73             | 24.80          | 0.58       | 32.10         | 100   | 185   | Peak   |
| 2  | 58.13    | 21.50  | -18.50     | 40.00      | 40.13             | 12.28          | 0.79       | 31.70         | ---   | ---   | Peak   |
| 3  | 146.40   | 23.77  | -19.73     | 43.50      | 37.22             | 17.13          | 1.26       | 31.84         | ---   | ---   | Peak   |
| 4  | 263.77   | 20.80  | -25.20     | 46.00      | 30.81             | 20.13          | 1.68       | 31.82         | ---   | ---   | Peak   |
| 5  | 397.63   | 21.94  | -24.06     | 46.00      | 30.11             | 21.75          | 2.08       | 32.00         | ---   | ---   | Peak   |
| 6  | 454.86   | 23.86  | -22.14     | 46.00      | 30.38             | 22.95          | 2.22       | 31.69         | ---   | ---   | Peak   |
| 7  | 889.00   | 44.33  |            |            | 43.25             | 28.95          | 3.15       | 31.02         | ---   | ---   | Peak   |
| 8  | 2322.00  | 41.02  | -32.98     | 74.00      | 41.90             | 27.77          | 4.66       | 33.31         | ---   | ---   | Peak   |
| 9  | 4512.00  | 43.37  | -30.63     | 74.00      | 39.70             | 31.04          | 5.23       | 32.60         | ---   | ---   | Peak   |
| 10 | 6298.00  | 45.78  | -28.22     | 74.00      | 38.45             | 33.66          | 6.47       | 32.80         | ---   | ---   | Peak   |
| 11 | 7674.00  | 44.48  | -29.52     | 74.00      | 33.59             | 37.45          | 7.14       | 33.70         | ---   | ---   | Peak   |
| 12 | 10692.00 | 46.00  | -28.00     | 74.00      | 31.38             | 38.54          | 9.32       | 33.24         | ---   | ---   | Peak   |
| 13 | 12670.00 | 46.44  | -27.56     | 74.00      | 31.18             | 39.70          | 9.80       | 34.24         | 100   | 199   | Peak   |



|                 |                                                     |                     |          |
|-----------------|-----------------------------------------------------|---------------------|----------|
| Test Engineer : | Zhang Xu                                            | Temperature :       | 24~25°C  |
|                 |                                                     | Relative Humidity : | 48~49%   |
| Test Distance : | 3m                                                  | Polarization :      | Vertical |
| Remark :        | #7 is system simulator signal which can be ignored. |                     |          |

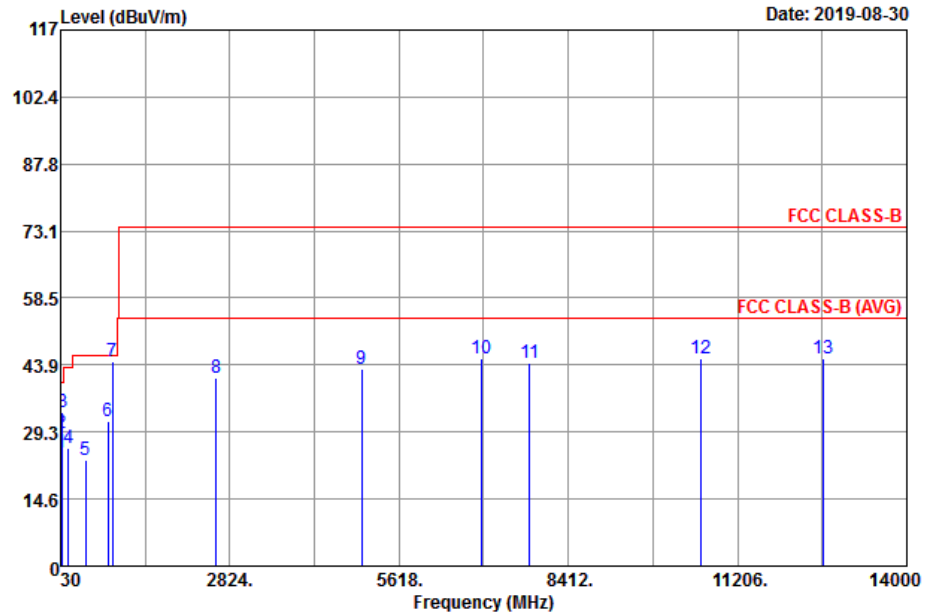

Site : 03CH04-SZ  
Condition : FCC CLASS-B 3m LF\_ANT41909\_18 VERTICAL

Plane : Y

|    | Freq     | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark  |
|----|----------|--------|--------|--------|-------------|-------|--------|-------|-------|---------|
|    | MHz      | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | cm    | deg   |         |
|    |          |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB    |       |         |
| 1  | 30.97    | 24.73  | -15.27 | 40.00  | 31.91       | 24.33 | 0.59   | 32.10 | ---   | Peak    |
| 2  | 46.49    | 29.12  | -10.88 | 40.00  | 43.91       | 16.35 | 0.71   | 31.85 | ---   | Peak    |
| 3  | 57.16    | 33.44  | -6.56  | 40.00  | 51.83       | 12.52 | 0.79   | 31.70 | 100   | 65 Peak |
| 4  | 155.13   | 25.71  | -17.79 | 43.50  | 39.56       | 16.66 | 1.30   | 31.81 | ---   | Peak    |
| 5  | 439.34   | 23.16  | -22.84 | 46.00  | 30.03       | 22.63 | 2.18   | 31.68 | ---   | Peak    |
| 6  | 813.76   | 31.61  | -14.39 | 46.00  | 31.21       | 28.57 | 3.00   | 31.17 | ---   | Peak    |
| 7  | 889.00   | 44.57  |        |        | 43.49       | 28.95 | 3.15   | 31.02 | ---   | Peak    |
| 8  | 2604.00  | 40.98  | -33.02 | 74.00  | 41.43       | 27.75 | 4.96   | 33.16 | ---   | Peak    |
| 9  | 4998.00  | 43.07  | -30.93 | 74.00  | 37.55       | 32.16 | 6.06   | 32.70 | ---   | Peak    |
| 10 | 6980.00  | 45.32  | -28.68 | 74.00  | 36.02       | 35.64 | 7.16   | 33.50 | ---   | Peak    |
| 11 | 7772.00  | 44.27  | -29.73 | 74.00  | 33.28       | 37.39 | 7.30   | 33.70 | ---   | Peak    |
| 12 | 10610.00 | 45.38  | -28.62 | 74.00  | 30.84       | 38.47 | 9.29   | 33.22 | 100   | 44 Peak |
| 13 | 12630.00 | 45.22  | -28.78 | 74.00  | 29.97       | 39.68 | 9.79   | 34.22 | ---   | Peak    |



## 4. List of Measuring Equipment

| Instrument                        | Manufacturer | Model No.                    | Serial No.       | Characteristics | Calibration Date | Test Date     | Due Date      | Remark                |
|-----------------------------------|--------------|------------------------------|------------------|-----------------|------------------|---------------|---------------|-----------------------|
| EMI Test Receiver                 | R&S          | ESR7                         | 101404           | 9kHz~7GHz       | Apr. 18, 2019    | Aug. 30, 2019 | Apr. 17, 2020 | Radiation (03CH04-SZ) |
| EXA Spectrum Analyzer             | KEYSIGHT     | N9010A                       | MY55150213       | 10Hz~44GHz      | Apr. 18, 2019    | Aug. 30, 2019 | Apr. 17, 2020 | Radiation (03CH04-SZ) |
| Bilog Antenna                     | TeseQ        | CBL6111D                     | 41909            | 30MHz~1GHz      | Aug. 27, 2019    | Aug. 30, 2019 | Aug. 26, 2020 | Radiation (03CH04-SZ) |
| LF Amplifier                      | Burgeon      | BPA-530                      | 102211           | 0.01~3000Mhz    | Oct. 18, 2018    | Aug. 30, 2019 | Oct. 17, 2019 | Radiation (03CH04-SZ) |
| Double Ridge Horn Antenna         | SCHWARZBECK  | BBHA9120D                    | 9120D-1474       | 1GHz~18GHz      | Apr. 01, 2019    | Aug. 30, 2019 | Mar. 31, 2020 | Radiation (03CH04-SZ) |
| HF Amplifier                      | MITEQ        | AMF-7D-0010<br>1800-30-10P-R | 1943528          | 1GHz~18GHz      | Oct. 18, 2018    | Aug. 30, 2019 | Oct. 17, 2019 | Radiation (03CH04-SZ) |
| AC Power Source                   | Chroma       | 61601                        | N/A              | N/A             | NCR              | Aug. 30, 2019 | NCR           | Radiation (03CH04-SZ) |
| Turn Table                        | EM           | EM1000                       | N/A              | 0~360 degree    | NCR              | Aug. 30, 2019 | NCR           | Radiation (03CH04-SZ) |
| Antenna Mast                      | EM           | EM1000                       | N/A              | 1 m~4 m         | NCR              | Aug. 30, 2019 | NCR           | Radiation (03CH04-SZ) |
| EMI Receiver                      | R&S          | ESR7                         | 101630           | 9kHz~7GHz;      | Dec. 23, 2018    | Aug. 31, 2019 | Dec. 22, 2019 | Conduction (CO01-SZ)  |
| AC LISN                           | EMCO         | 3816/2SH                     | 00103912         | 9kHz~30MHz      | Oct. 18, 2018    | Aug. 31, 2019 | Oct. 17, 2019 | Conduction (CO01-SZ)  |
| AC LISN (for auxiliary equipment) | EMCO         | 3816/2SH                     | 00103892         | 9kHz~30MHz      | Dec. 23, 2018    | Aug. 31, 2019 | Dec. 22, 2019 | Conduction (CO01-SZ)  |
| AC Power Source                   | Chroma       | 61602                        | 61602000089<br>1 | 100Vac~250Vac   | Jul. 23, 2019    | Aug. 31, 2019 | Jul. 22, 2020 | Conduction (CO01-SZ)  |

NCR: No Calibration Required

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                            |       |
|----------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 2.6dB |
|----------------------------------------------------------------------------|-------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                            |       |
|----------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 5.0dB |
|----------------------------------------------------------------------------|-------|

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

|                                                                            |       |
|----------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 4.8dB |
|----------------------------------------------------------------------------|-------|