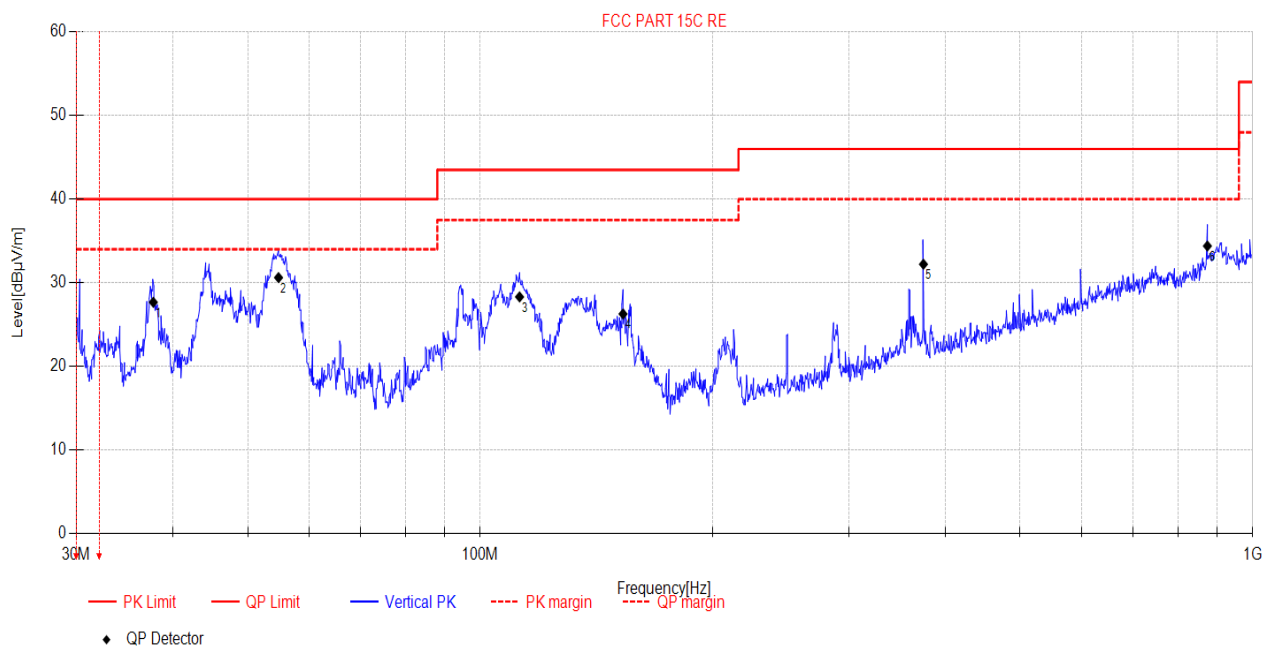


TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-25 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.4°C;Humi:61.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6a Plus\FCC BELOW 1G\20221025-084923_V
Memo: 2.4GWIFI

**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37.74	40.92	-13.26	27.66	40.00	12.34	QP	Vertical
2	54.82	42.87	-12.26	30.61	40.00	9.39	QP	Vertical
3	112.45	36.86	-8.56	28.30	43.50	15.20	QP	Vertical
4	153.08	37.46	-11.20	26.26	43.50	17.24	QP	Vertical
5	374.81	36.02	-3.81	32.21	46.00	13.79	QP	Vertical
6	873.77	28.16	6.23	34.39	46.00	11.61	QP	Vertical

Note: 1. Result Level = Read Level + Factor

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.


3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\1
Memo: 11g 2412

Test Graph

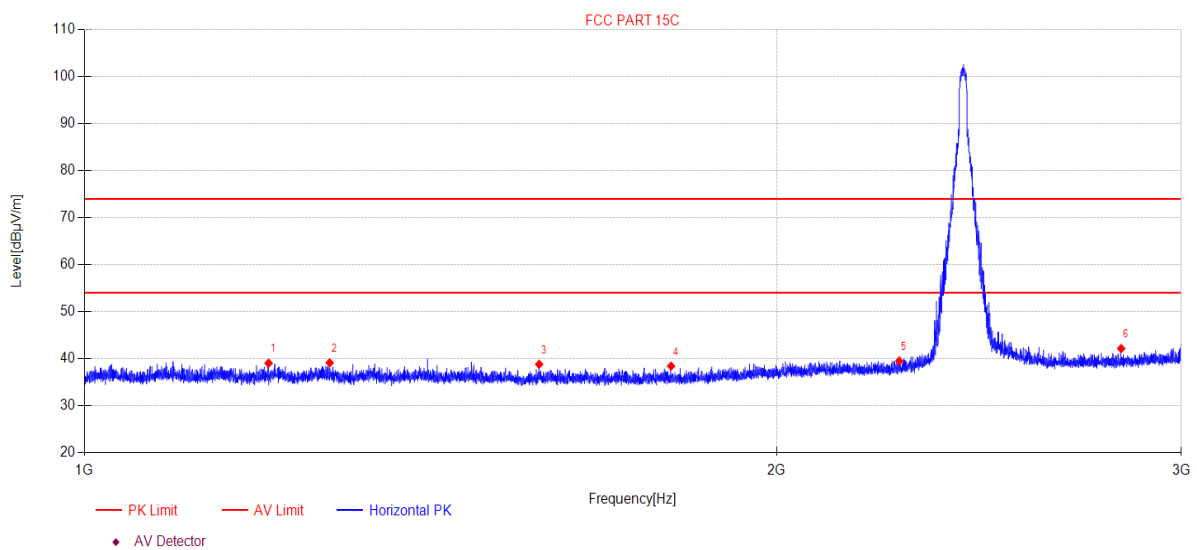

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1202.54	49.96	-10.93	39.03	74.00	34.97	PK	Horizontal
2	1278.42	50.08	-10.97	39.11	74.00	34.89	PK	Horizontal
3	1576.87	50.26	-11.48	38.78	74.00	35.22	PK	Horizontal
4	1799.64	49.98	-11.58	38.40	74.00	35.60	PK	Horizontal
5	2261.86	49.42	-9.91	39.51	74.00	34.49	PK	Horizontal
6	2824.73	50.69	-8.54	42.15	74.00	31.85	PK	Horizontal


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\2
Memo: 11g 2412

Test Graph

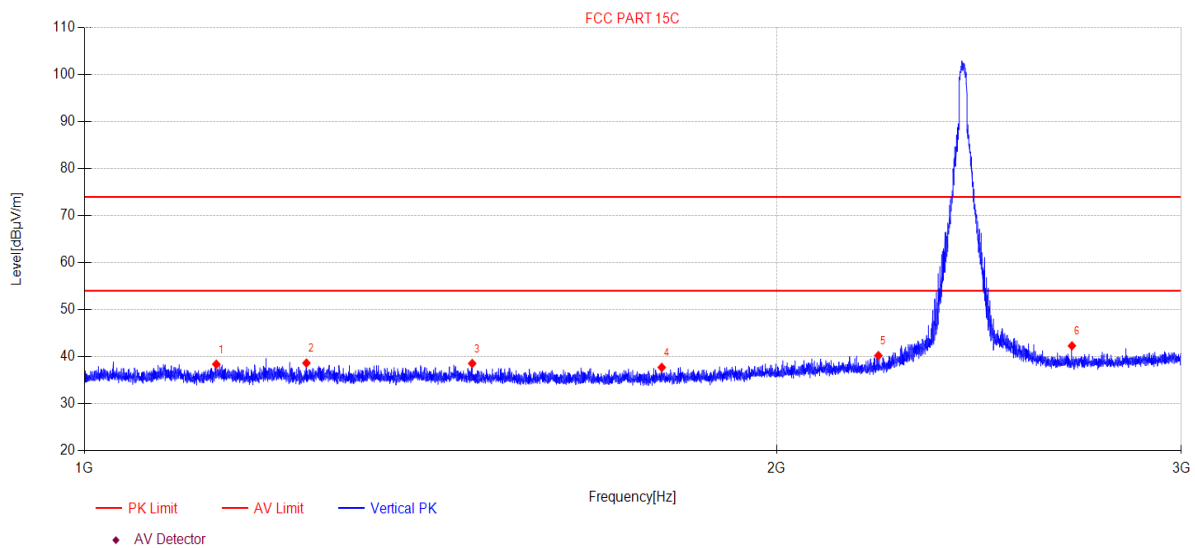

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1141.15	49.28	-10.90	38.38	74.00	35.62	PK	Vertical
2	1248.99	49.52	-10.89	38.63	74.00	35.37	PK	Vertical
3	1474.66	49.77	-11.23	38.54	74.00	35.46	PK	Vertical
4	1782.92	49.30	-11.59	37.71	74.00	36.29	PK	Vertical
5	2214.90	50.21	-9.99	40.22	74.00	33.78	PK	Vertical
6	2688.79	51.17	-8.87	42.30	74.00	31.70	PK	Vertical


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\3
Memo: 11g 2412

Test Graph

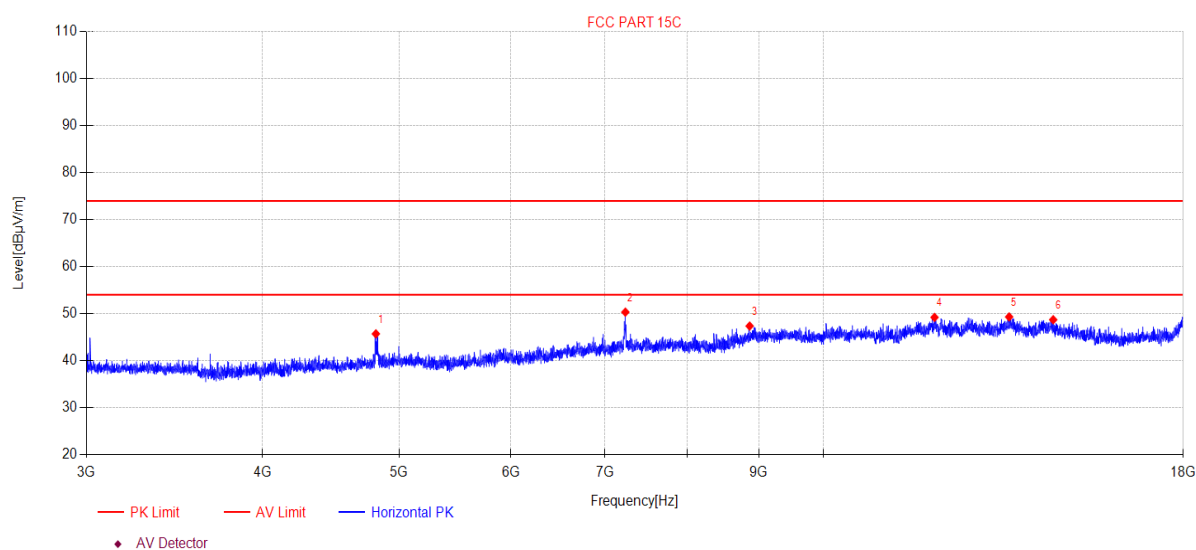

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4813.43	51.13	-5.43	45.70	74.00	28.30	PK	Horizontal
2	7235.47	51.02	-0.70	50.32	74.00	23.68	PK	Horizontal
3	8863.85	44.79	2.57	47.36	74.00	26.64	PK	Horizontal
4	11989.62	44.25	4.95	49.20	74.00	24.80	PK	Horizontal
5	13542.99	43.56	5.75	49.31	74.00	24.69	PK	Horizontal
6	14554.36	42.61	6.09	48.70	74.00	25.30	PK	Horizontal


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\4
Memo: 11g 2412

Test Graph

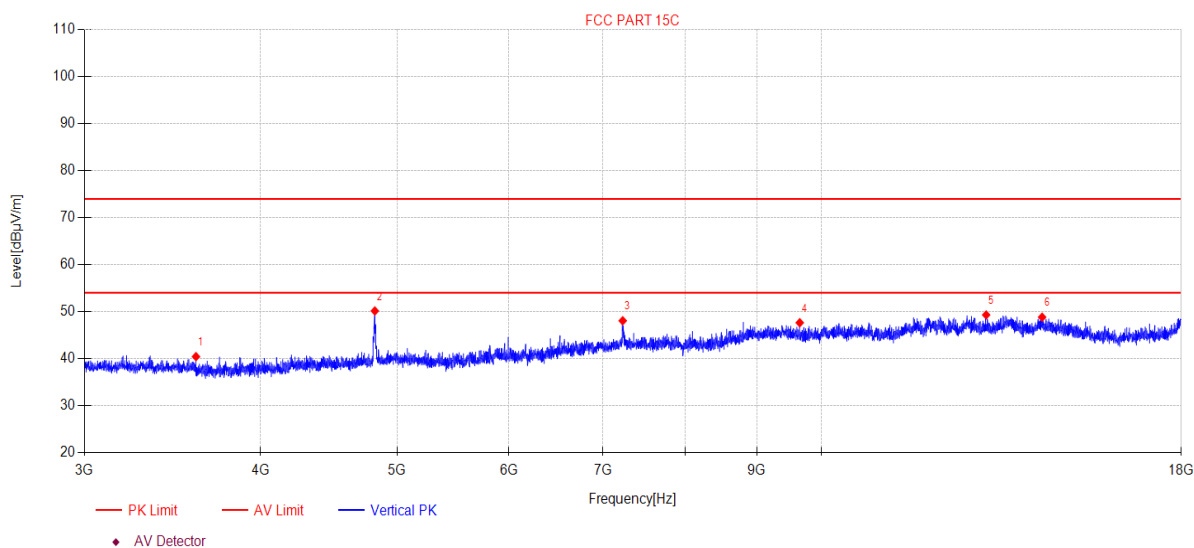

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3599.58	48.69	-8.26	40.43	74.00	33.57	PK	Vertical
2	4821.20	55.54	-5.39	50.15	74.00	23.85	PK	Vertical
3	7227.69	48.76	-0.70	48.06	74.00	25.94	PK	Vertical
4	9651.19	45.25	2.39	47.64	74.00	26.36	PK	Vertical
5	13087.40	44.10	5.20	49.30	74.00	24.70	PK	Vertical
6	14339.53	42.62	6.20	48.82	74.00	25.18	PK	Vertical


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\5
Memo: 11g 2437

Test Graph

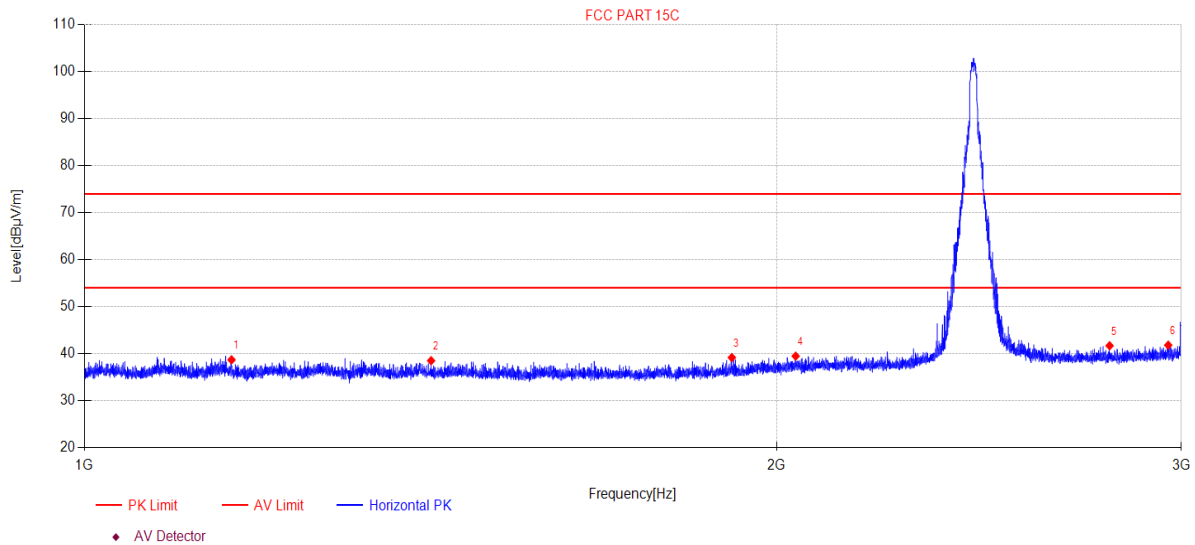

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1158.71	49.58	-10.90	38.68	74.00	35.32	PK	Horizontal
2	1415.15	49.63	-11.13	38.50	74.00	35.50	PK	Horizontal
3	1912.57	50.36	-11.20	39.16	74.00	34.84	PK	Horizontal
4	2038.84	49.88	-10.42	39.46	74.00	34.54	PK	Horizontal
5	2792.03	50.34	-8.66	41.68	74.00	32.32	PK	Horizontal
6	2961.04	49.77	-7.97	41.80	74.00	32.20	PK	Horizontal


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\6
Memo: 11g 2437

Test Graph

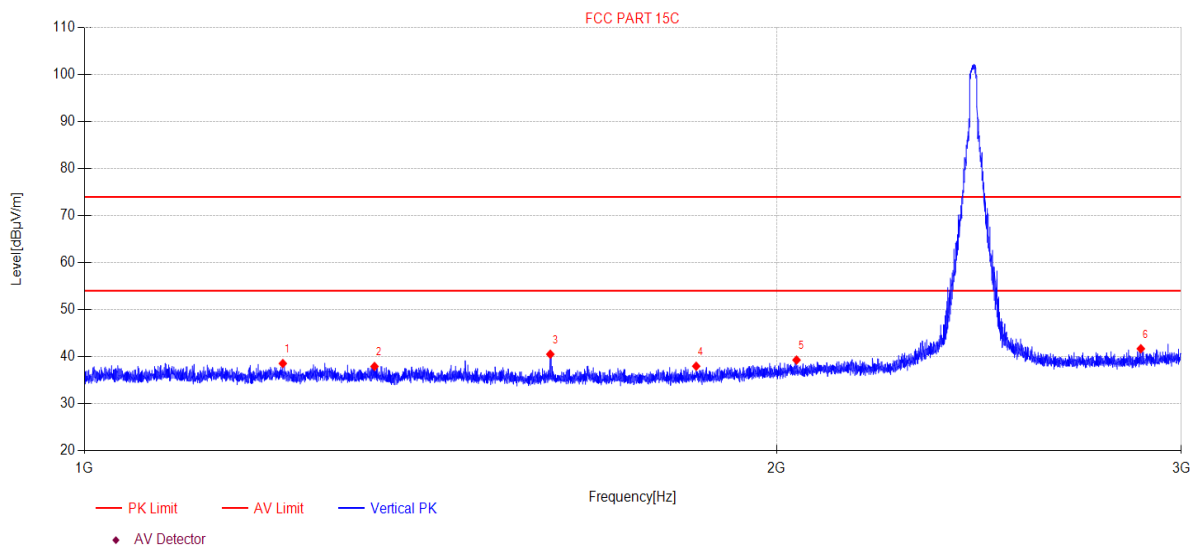

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1219.84	49.46	-10.92	38.54	74.00	35.46	PK	Vertical
2	1337.17	48.97	-11.06	37.91	74.00	36.09	PK	Vertical
3	1594.63	52.00	-11.49	40.51	74.00	33.49	PK	Vertical
4	1845.49	49.48	-11.52	37.96	74.00	36.04	PK	Vertical
5	2040.63	49.68	-10.41	39.27	74.00	34.73	PK	Vertical
6	2880.83	49.98	-8.30	41.68	74.00	32.32	PK	Vertical


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\7
Memo: 11g 2437

Test Graph

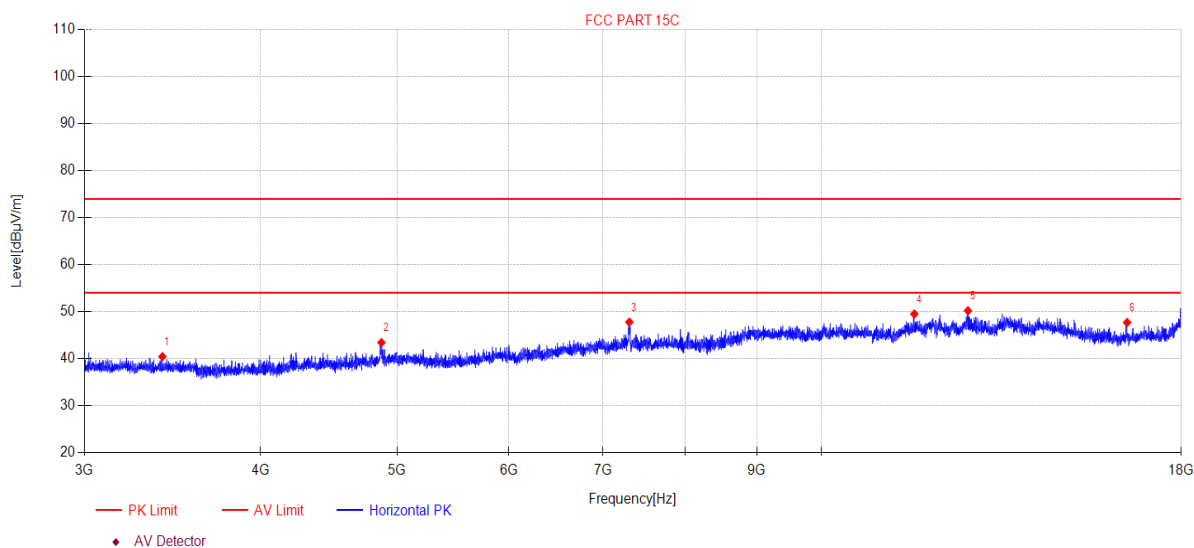

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3407.55	48.79	-8.36	40.43	74.00	33.57	PK	Horizontal
2	4873.30	48.62	-5.20	43.42	74.00	30.58	PK	Horizontal
3	7305.81	48.47	-0.69	47.78	74.00	26.22	PK	Horizontal
4	11638.30	45.28	4.22	49.50	74.00	24.50	PK	Horizontal
5	12703.90	45.21	4.98	50.19	74.00	23.81	PK	Horizontal
6	16475.39	43.45	4.25	47.70	74.00	26.30	PK	Horizontal

Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong

EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus


Test Mode: Tx Mode **Power Supply:** 120V/60Hz

Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber

File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\8

Memo: 11g 2437

Test Graph

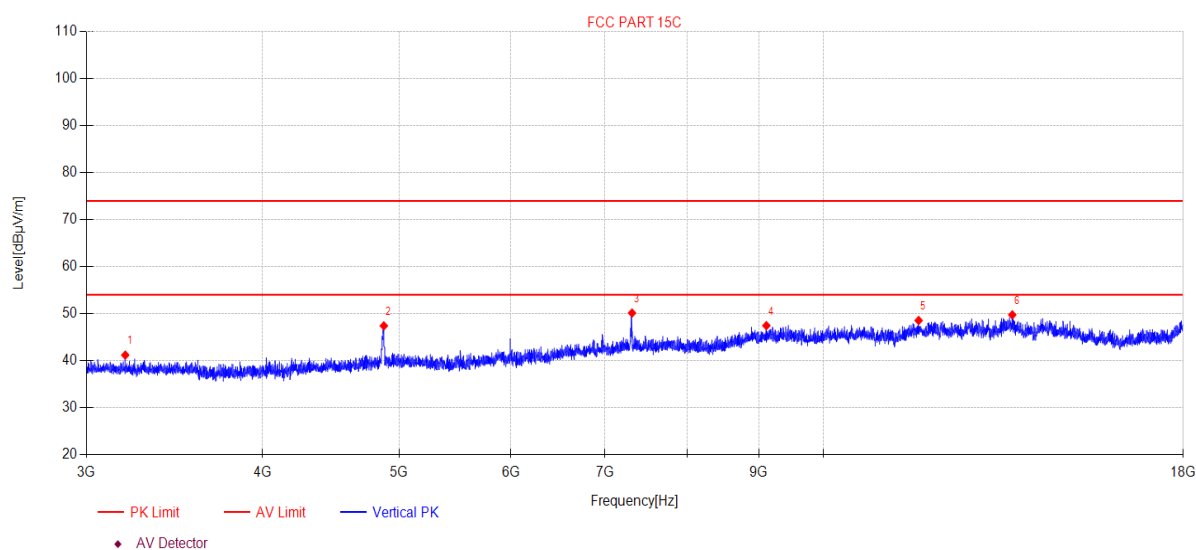

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3196.43	49.34	-8.16	41.18	74.00	32.82	PK	Vertical
2	4876.80	52.60	-5.20	47.40	74.00	26.60	PK	Vertical
3	7314.97	50.83	-0.69	50.14	74.00	23.86	PK	Vertical
4	9110.18	44.62	2.83	47.45	74.00	26.55	PK	Vertical
5	11682.17	44.28	4.27	48.55	74.00	25.45	PK	Vertical
6	13613.53	43.97	5.78	49.75	74.00	24.25	PK	Vertical


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\9
Memo: 11g 2462

Test Graph

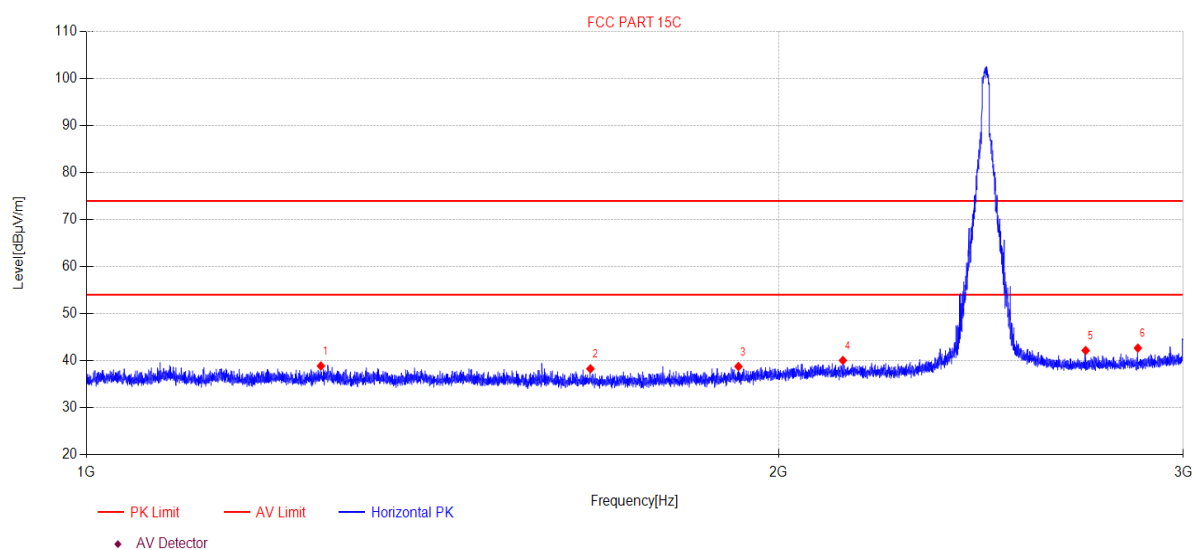

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1264.73	49.78	-10.92	38.86	74.00	35.14	PK	Horizontal
2	1656.59	49.89	-11.63	38.26	74.00	35.74	PK	Horizontal
3	1921.41	49.90	-11.15	38.75	74.00	35.25	PK	Horizontal
4	2133.23	50.11	-10.07	40.04	74.00	33.96	PK	Horizontal
5	2720.58	50.96	-8.81	42.15	74.00	31.85	PK	Horizontal
6	2866.62	51.03	-8.35	42.68	74.00	31.32	PK	Horizontal


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\10
Memo: 11g 2462

Test Graph

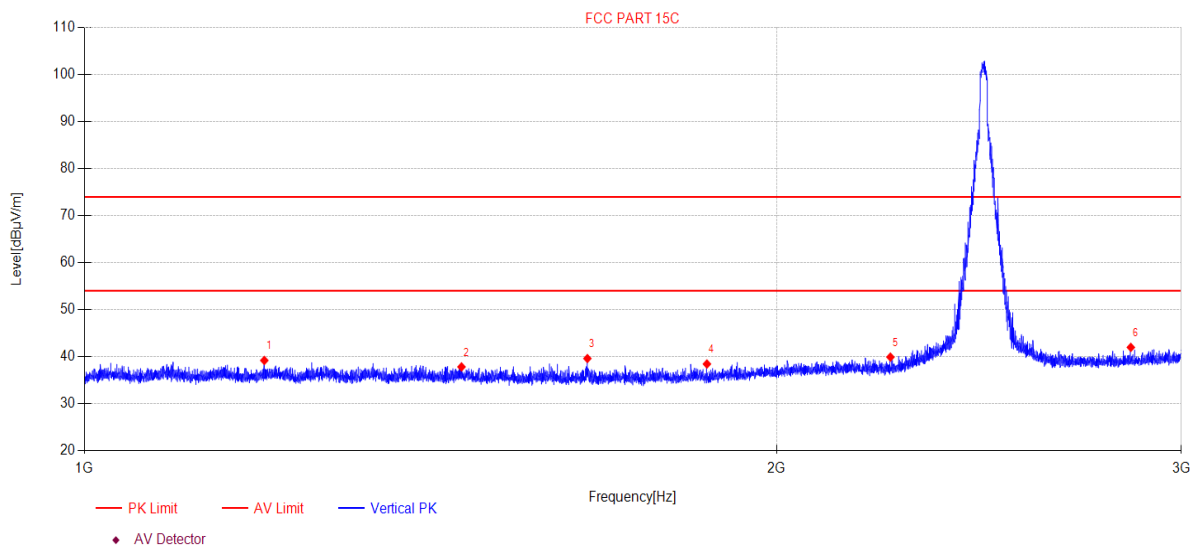

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1197.40	50.12	-10.93	39.19	74.00	34.81	PK	Vertical
2	1458.87	49.01	-11.19	37.82	74.00	36.18	PK	Vertical
3	1654.95	51.23	-11.63	39.60	74.00	34.40	PK	Vertical
4	1865.46	49.87	-11.44	38.43	74.00	35.57	PK	Vertical
5	2241.82	49.83	-9.93	39.90	74.00	34.10	PK	Vertical
6	2852.17	50.39	-8.42	41.97	74.00	32.03	PK	Vertical


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\11
Memo: 11g 2462

Test Graph

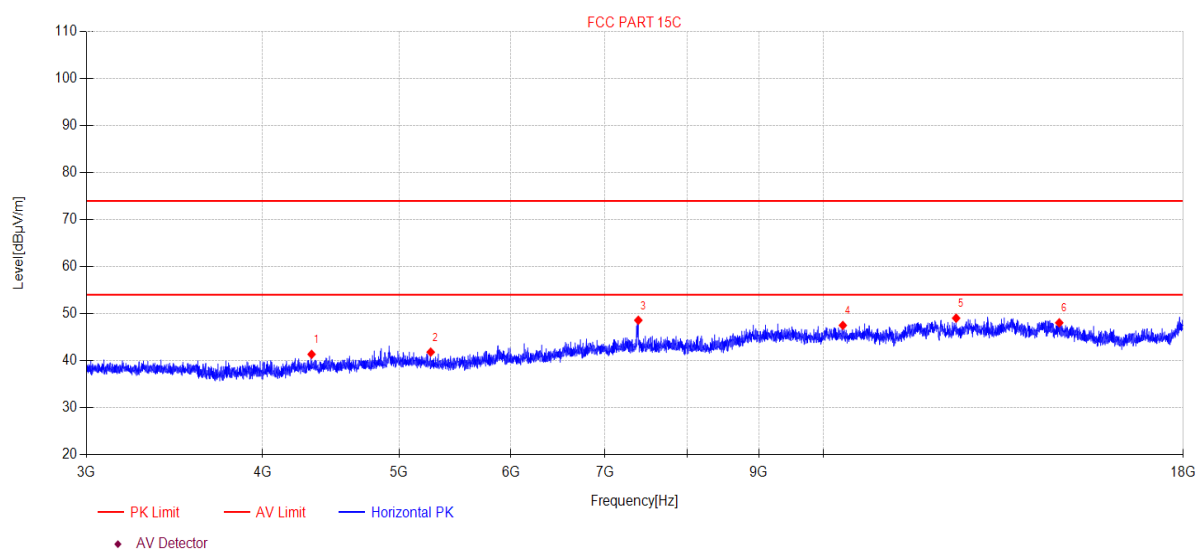

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4333.71	47.97	-6.63	41.34	74.00	32.66	PK	Horizontal
2	5264.52	46.44	-4.63	41.81	74.00	32.19	PK	Horizontal
3	7390.06	49.27	-0.68	48.59	74.00	25.41	PK	Horizontal
4	10321.87	44.84	2.66	47.50	74.00	26.50	PK	Horizontal
5	12420.34	44.16	4.88	49.04	74.00	24.96	PK	Horizontal
6	14698.48	42.05	6.00	48.05	74.00	25.95	PK	Horizontal


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-10-30 **Tested By:** Bairong
EUT: M6a Plus Mesh Wi-Fi Router **Model Number:** M6a Plus
Test Mode: Tx Mode **Power Supply:** 120V/60Hz
Condition: Temp:23.9°C;Humi:54.4%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q22100908-2E M6A plus\FCC ABOVE 1G 2.4G\12
Memo: 11g 2462

Test Graph

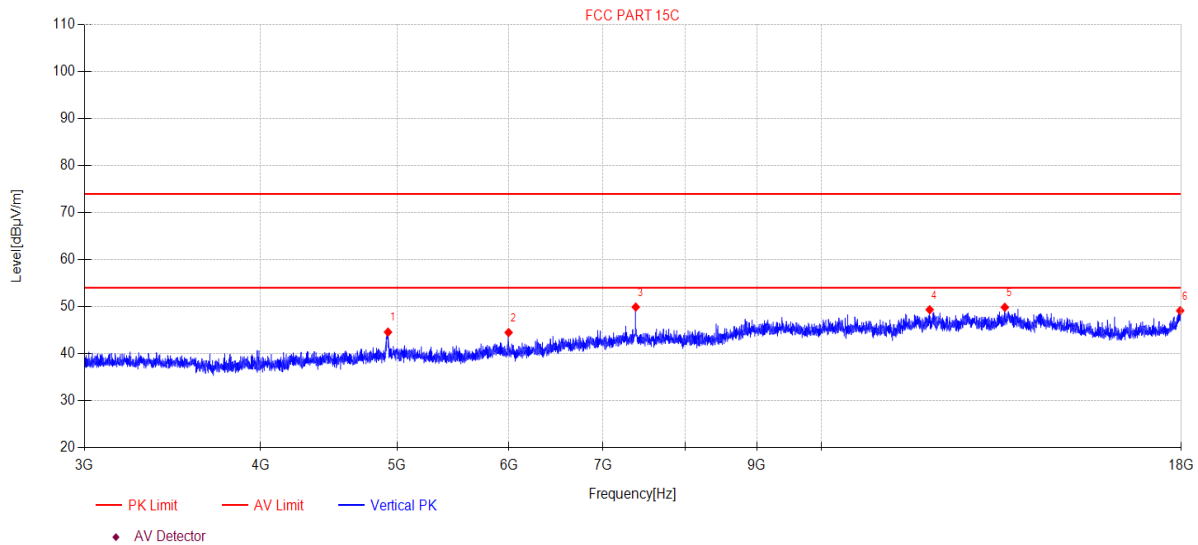

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4925.97	49.60	-5.02	44.58	74.00	29.42	PK	Vertical
2	5999.02	47.61	-3.12	44.49	74.00	29.51	PK	Vertical
3	7383.44	50.60	-0.68	49.92	74.00	24.08	PK	Vertical
4	11933.90	44.56	4.78	49.34	74.00	24.66	PK	Vertical
5	13492.13	44.14	5.72	49.86	74.00	24.14	PK	Vertical
6	17967.78	40.64	8.50	49.14	74.00	24.86	PK	Vertical

Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

9.5. Original test data

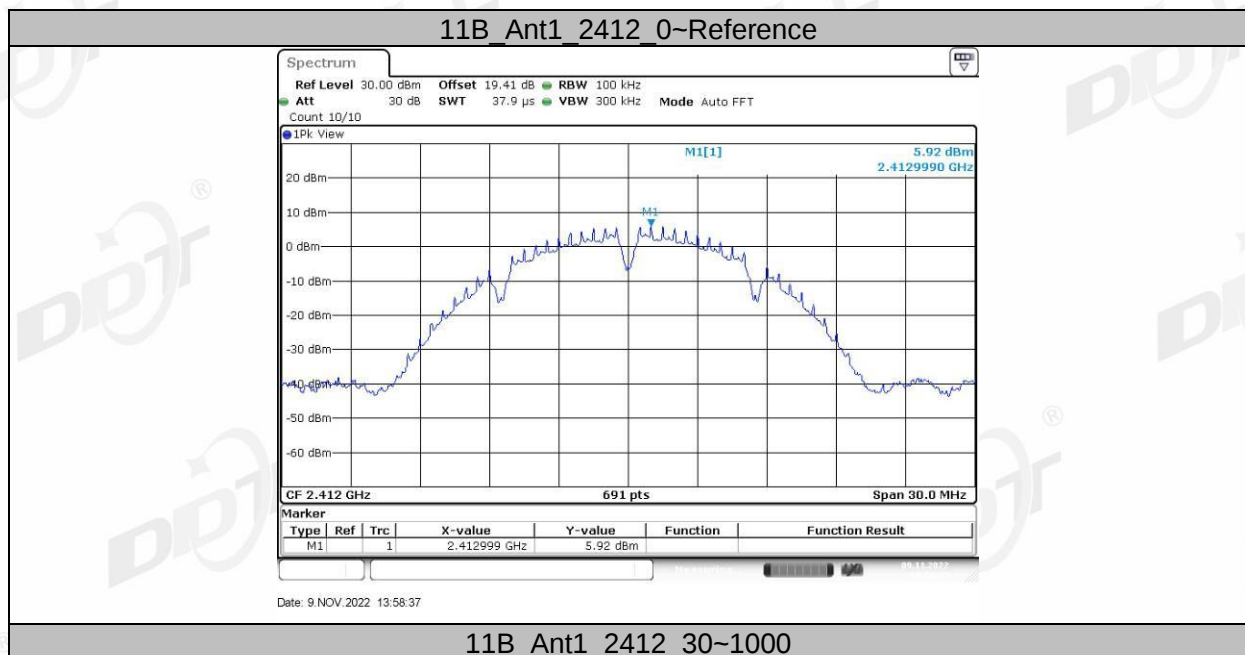


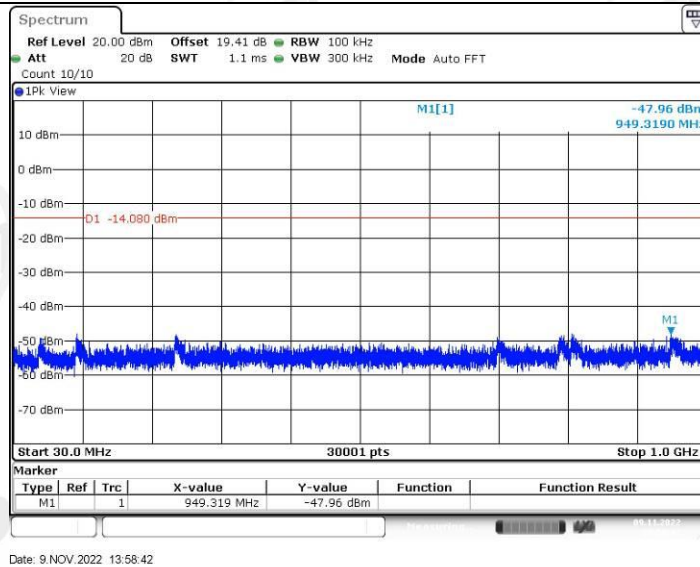


11B Ant1 2412 1000~26500

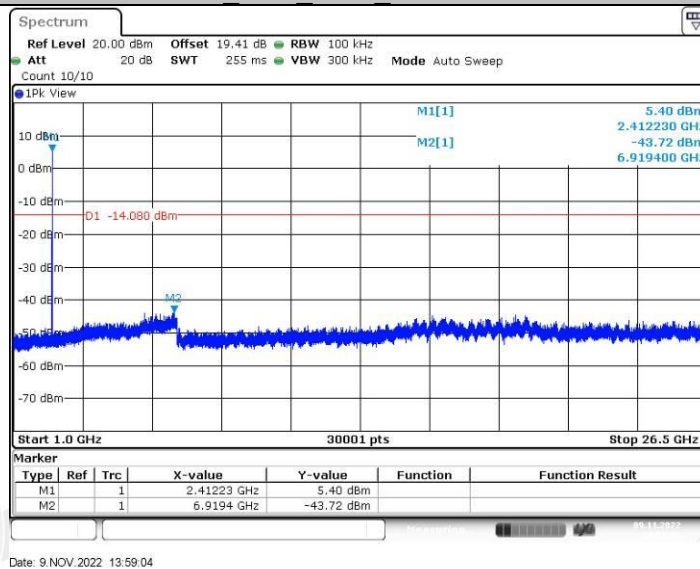


11B Ant2 2412 0~Reference

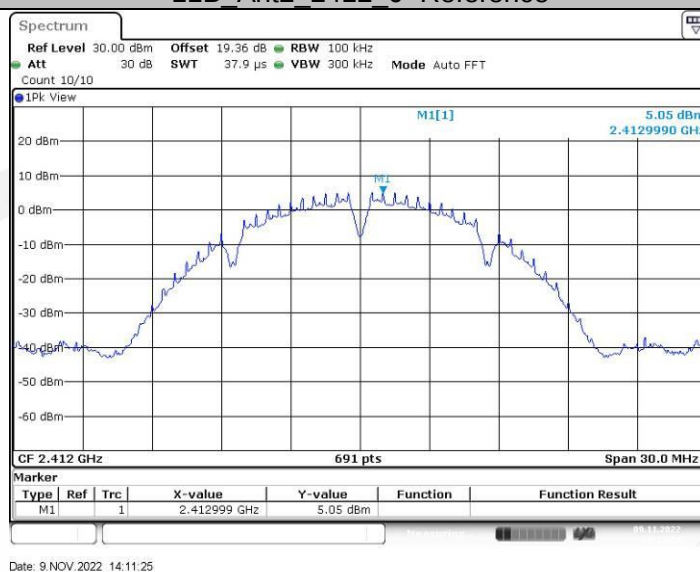


11B Ant2 2412 30~1000

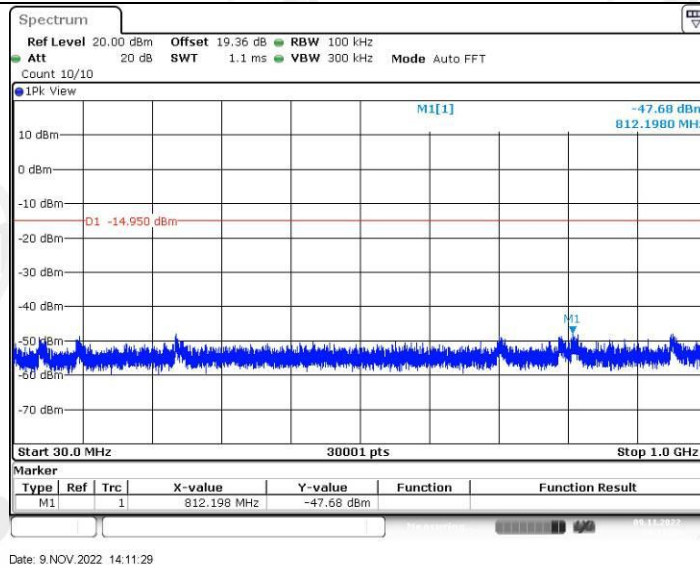


11B Ant2 2412 1000~26500

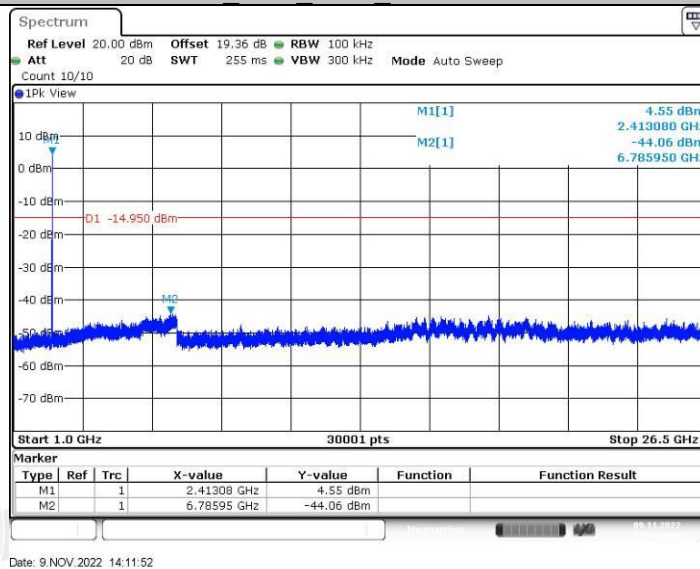


11B Ant1 2437 0~Reference

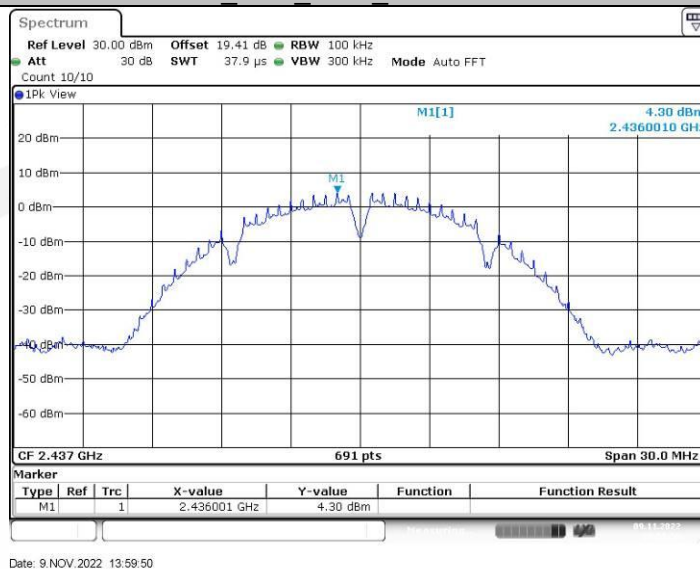


11B Ant1 2437 30~1000

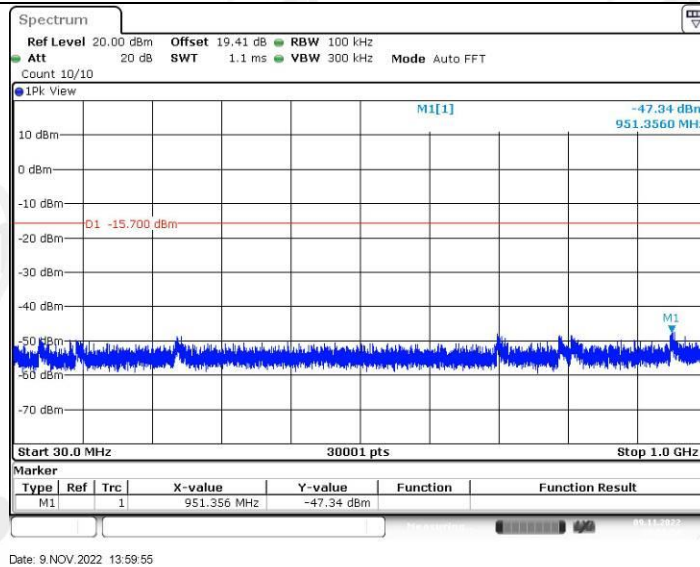


11B Ant1 2437 1000-26500

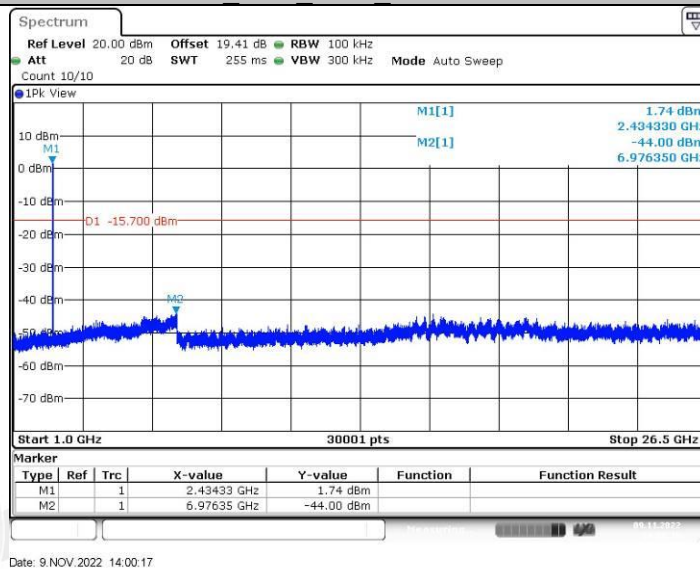


11B Ant2 2437 0~Reference

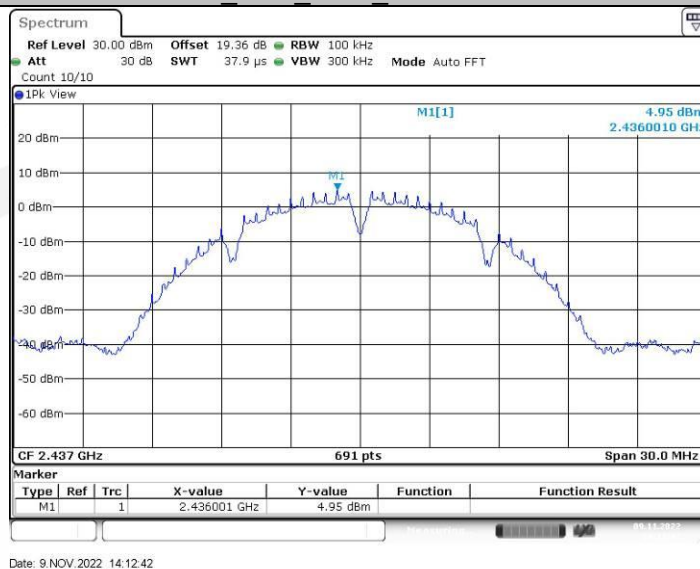


11B Ant2 2437 30~1000

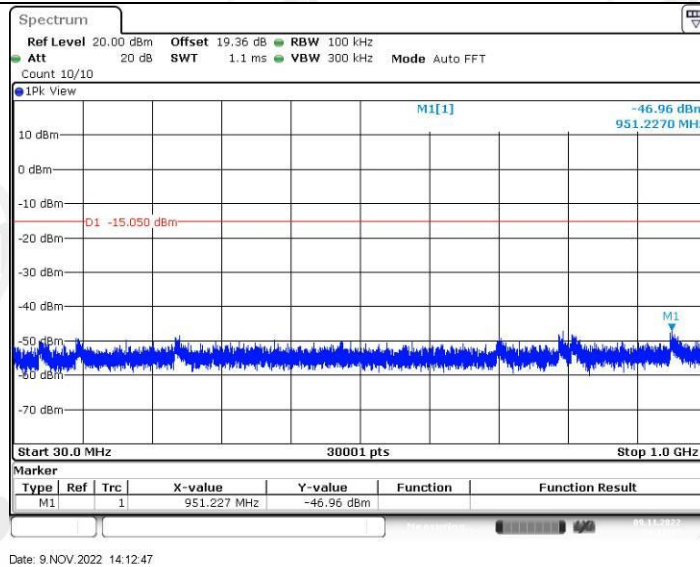


11B Ant2 2437 1000~26500

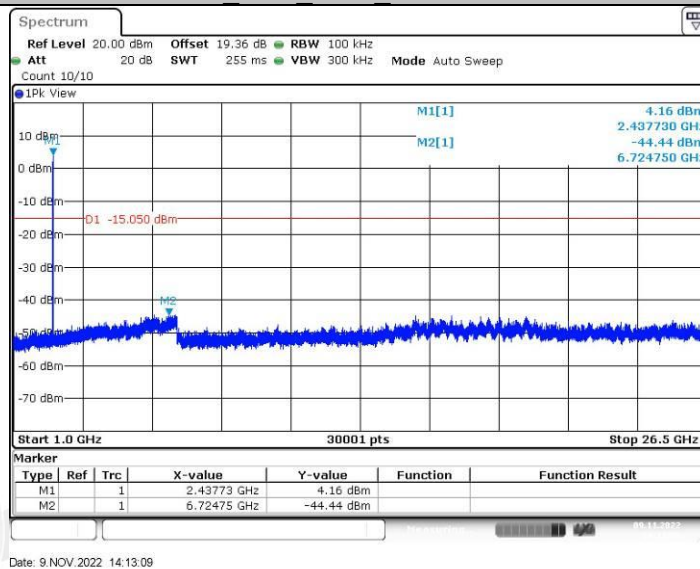


11B Ant1 2462 0~Reference

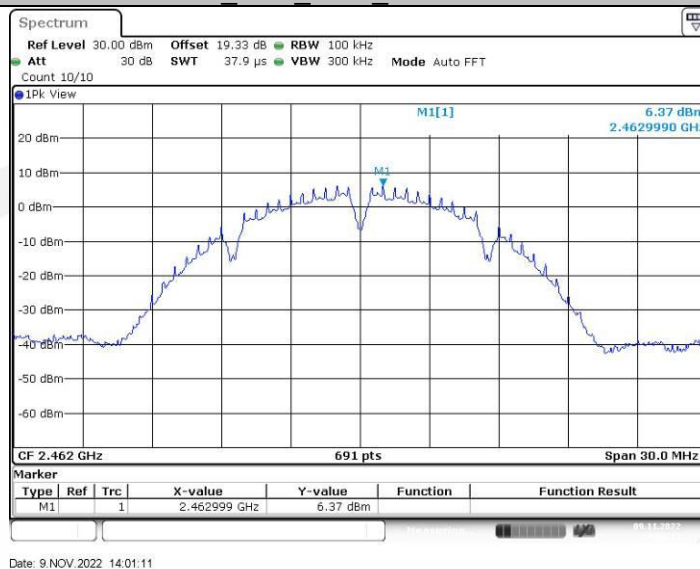


11B Ant1 2462 30~1000

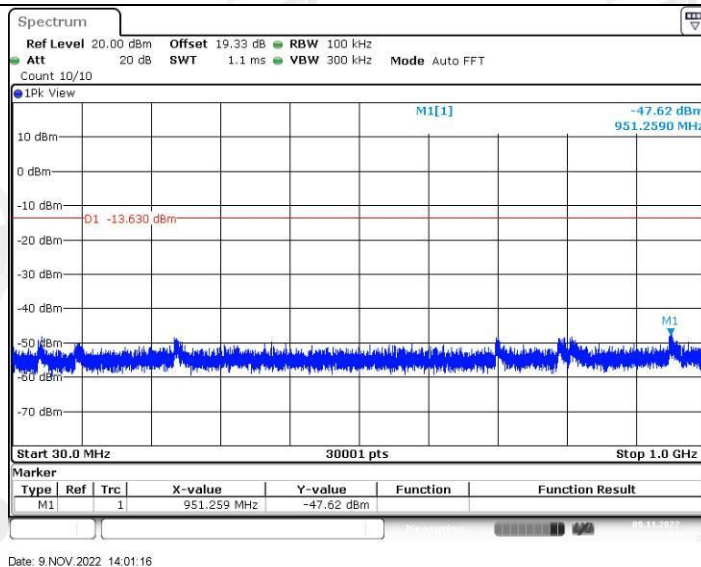


11B Ant1 2462 1000~26500

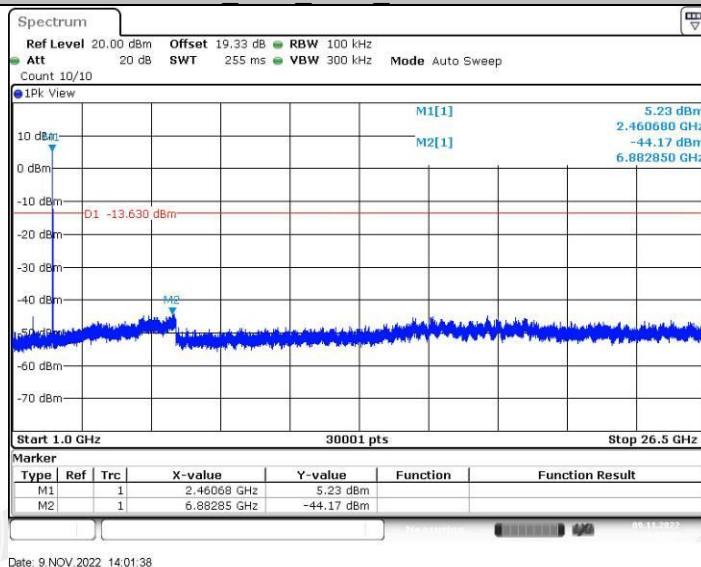


11B Ant2 2462 0~Reference

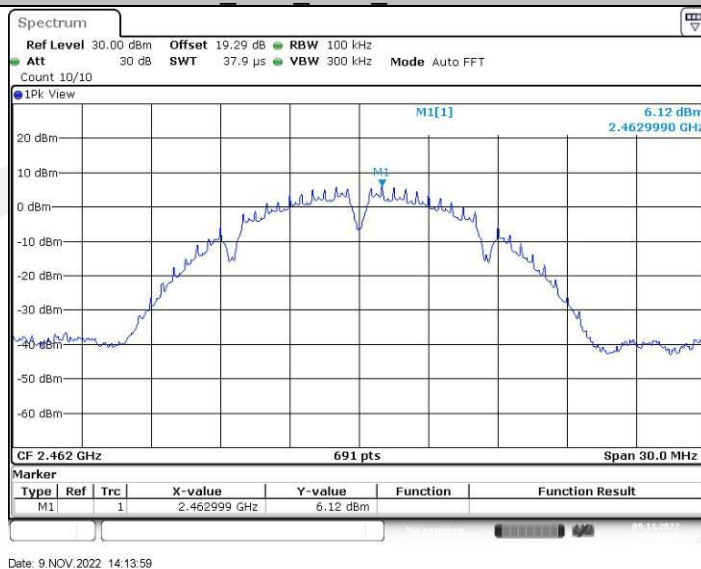


11B Ant2 2462 30~1000

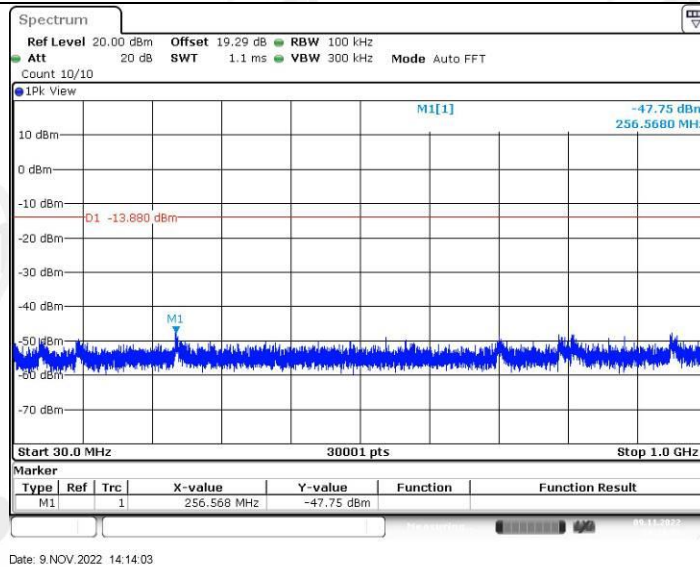


11B Ant2 2462 1000~26500

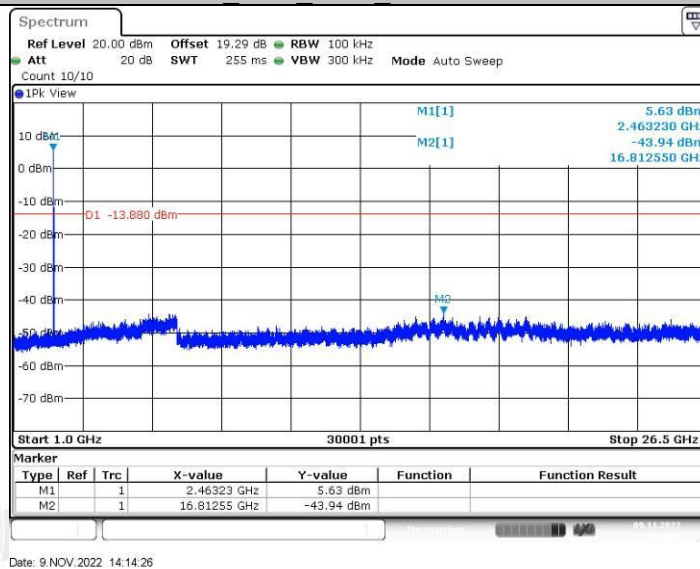


11G Ant1 2412 0~Reference

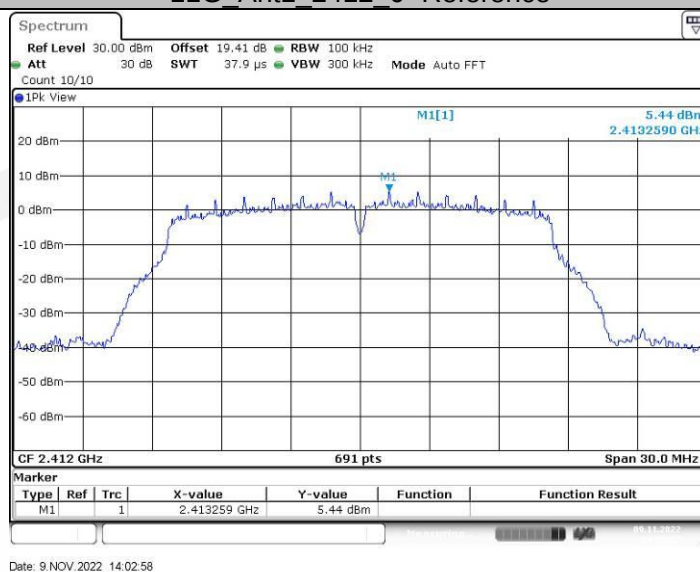


11G Ant1 2412 30~1000

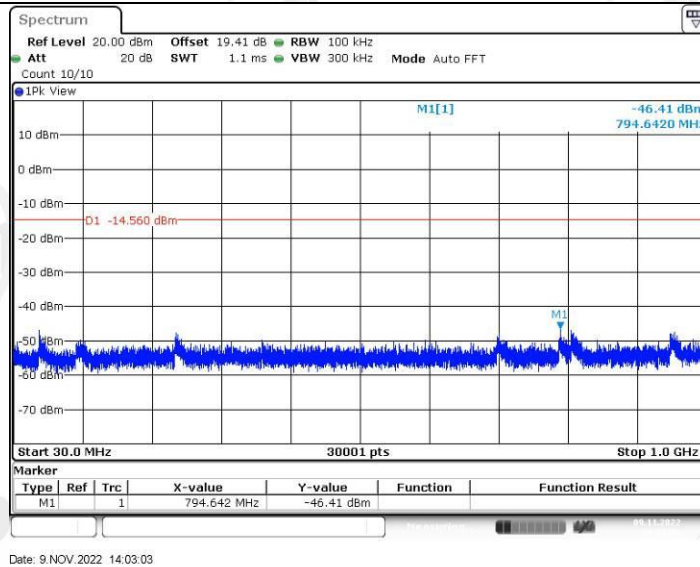


11G Ant1 2412 1000~26500

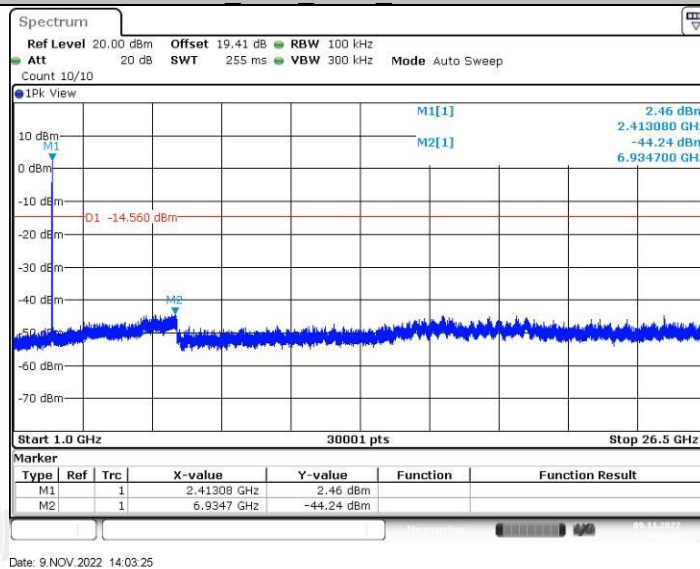


11G Ant2 2412 0~Reference

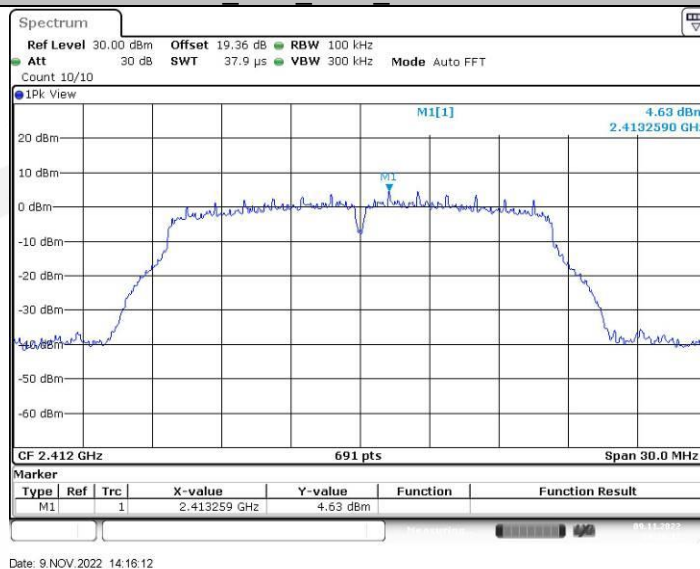


11G Ant2 2412 30~1000

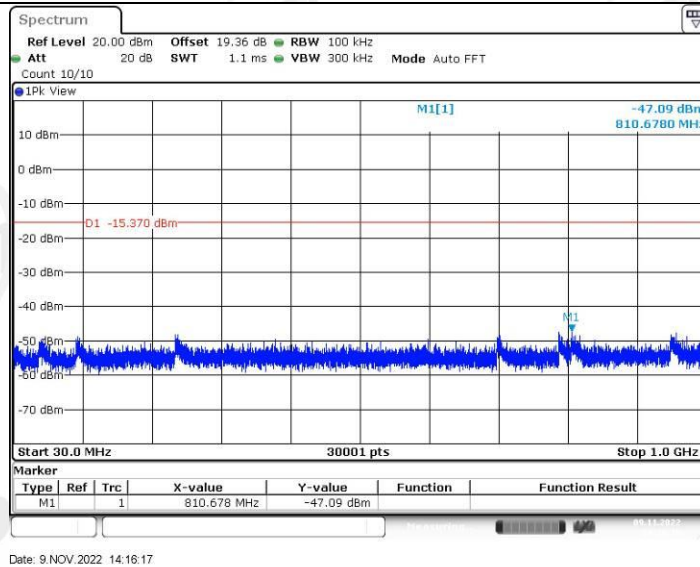


11G_Ant2_2412_1000~26500

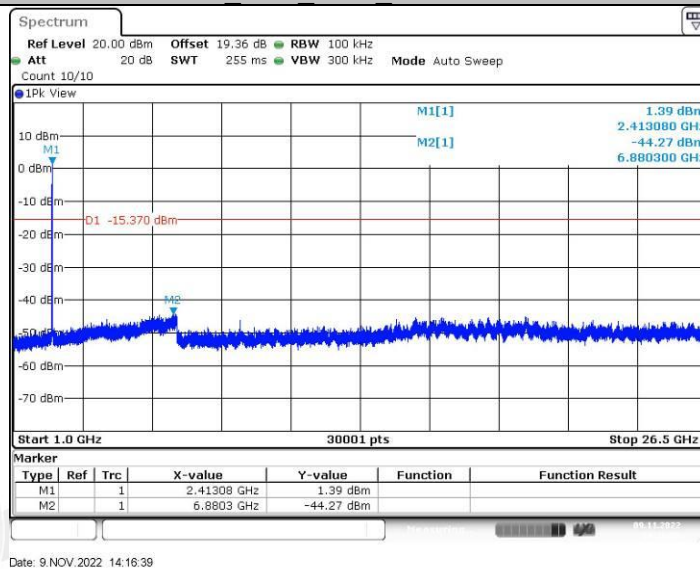


11G_Ant1_2437_0~Reference

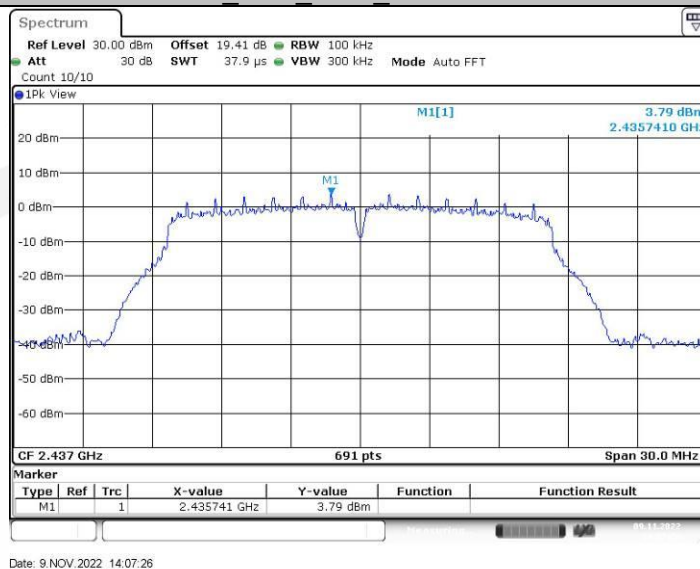


11G_Ant1_2437_30~1000

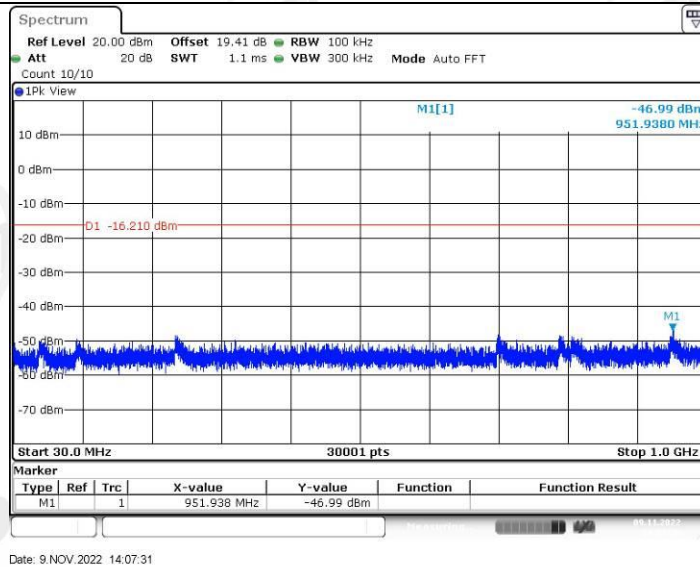


11G Ant1 2437 1000~26500

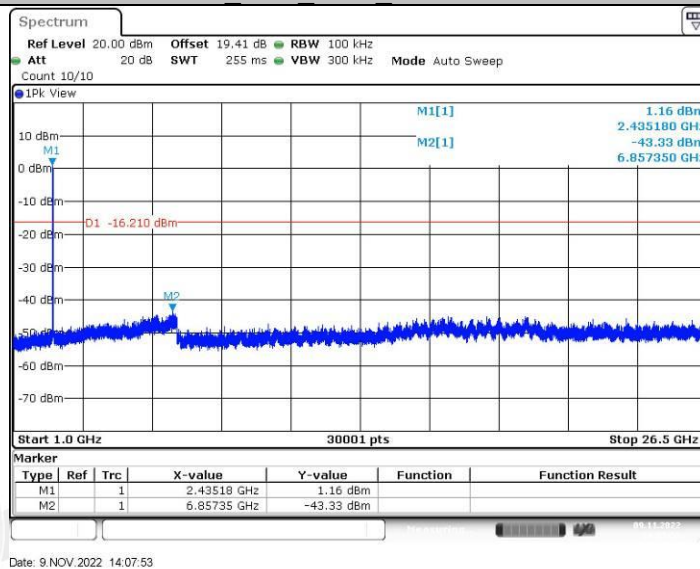


11G Ant2 2437 0~Reference

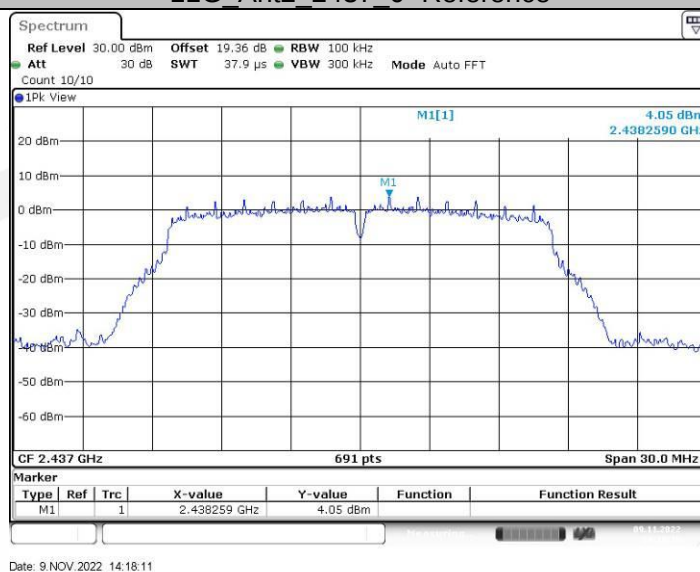


11G Ant2 2437 30~1000

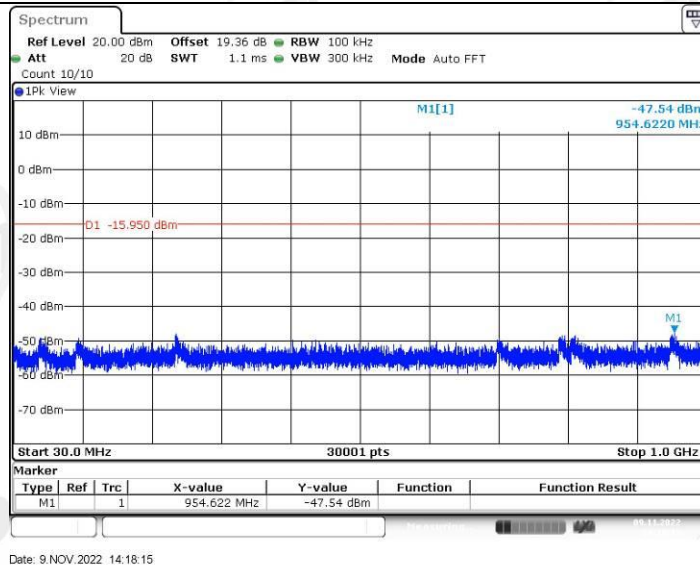


11G_Ant2_2437_1000~26500

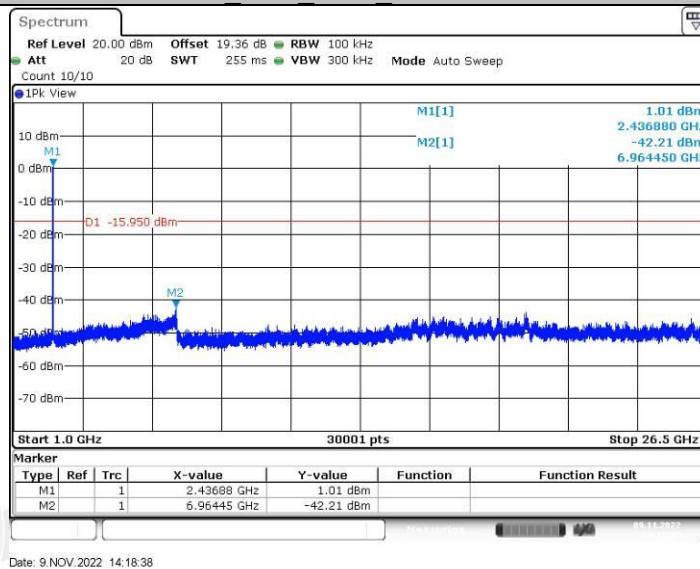


11G_Ant1_2462_0~Reference

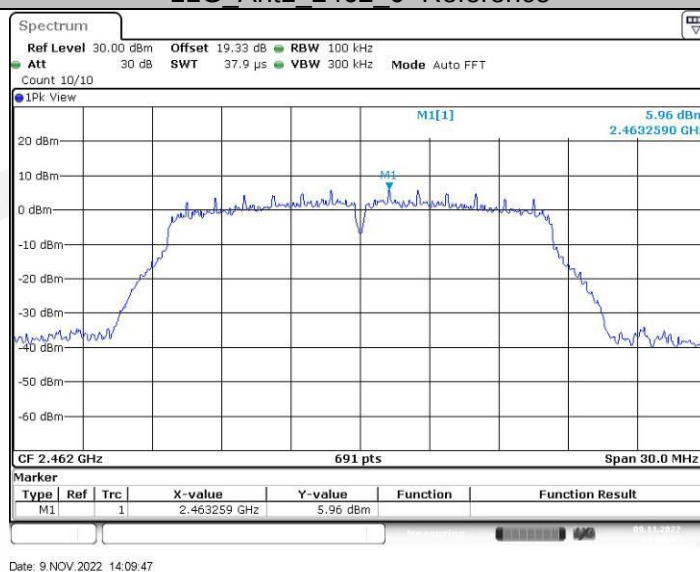


11G_Ant1_2462_30~1000

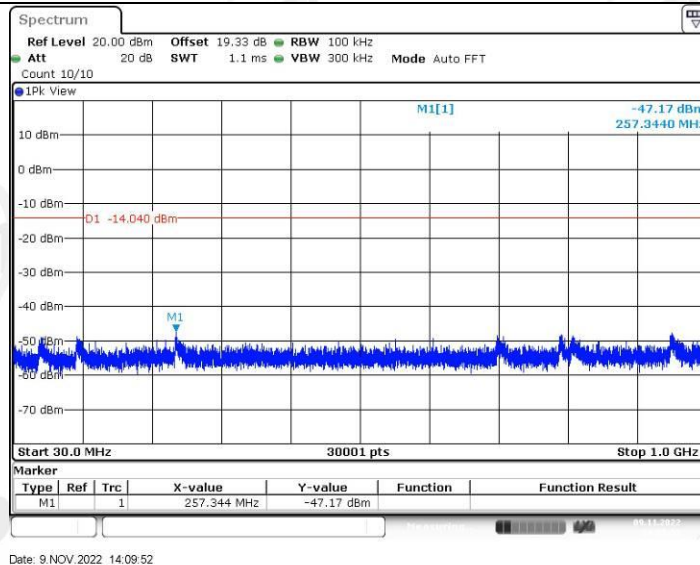


11G Ant1 2462 1000~26500

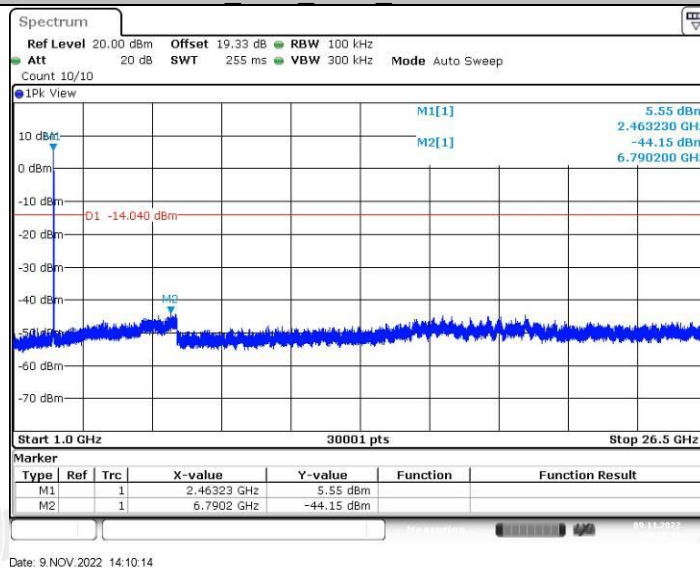


11G Ant2 2462 0~Reference

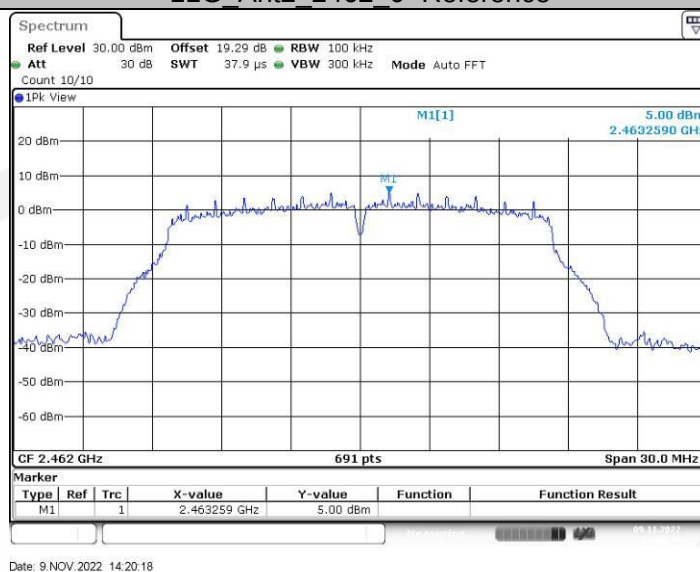


11G Ant2 2462 30~1000

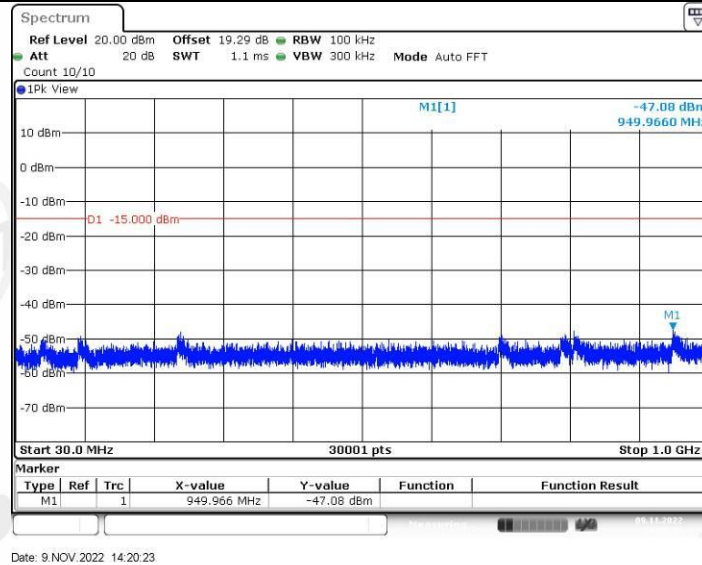


11G_Ant2_2462_1000~26500

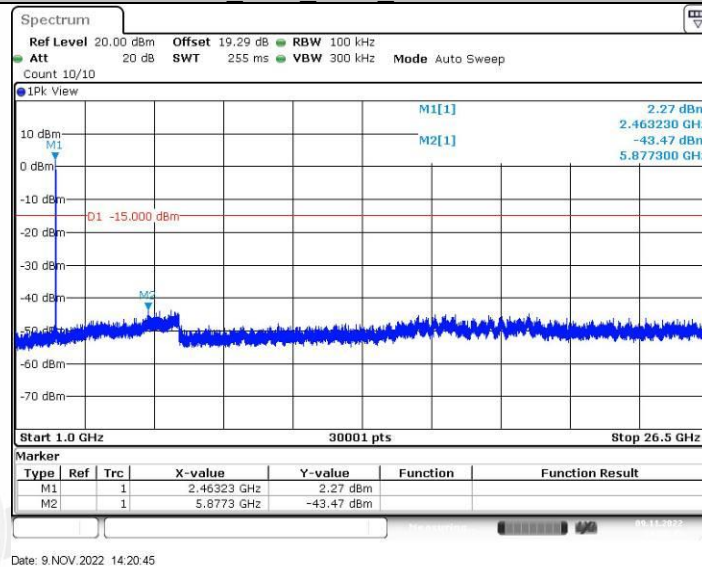


11N20MIMO_Ant1_2412_0~Reference

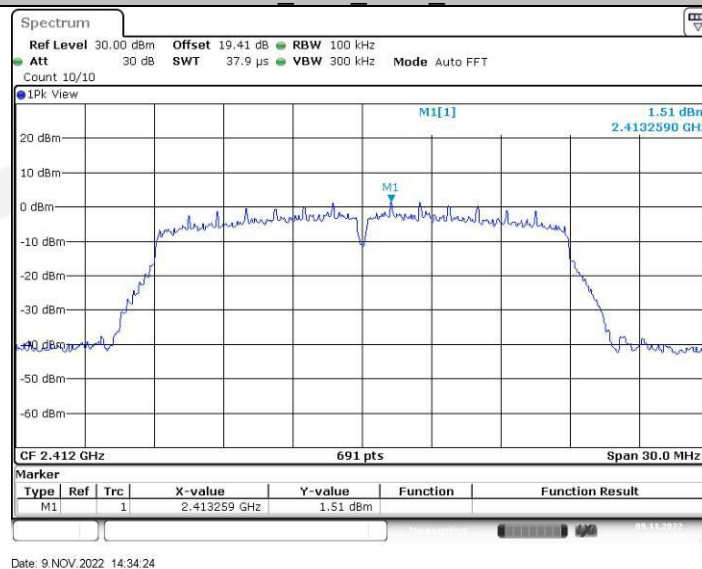


11N20MIMO_Ant1_2412_30~1000

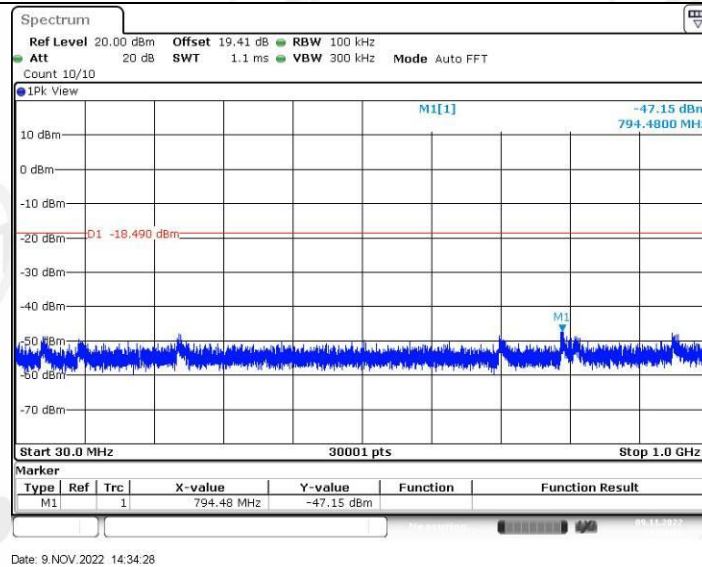


11N20MIMO Ant1 2412 1000~26500

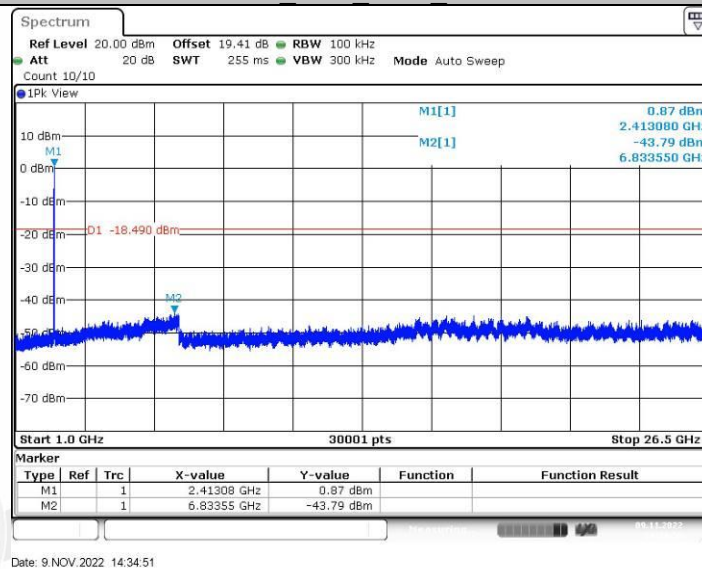


11N20MIMO Ant2 2412 0~Reference

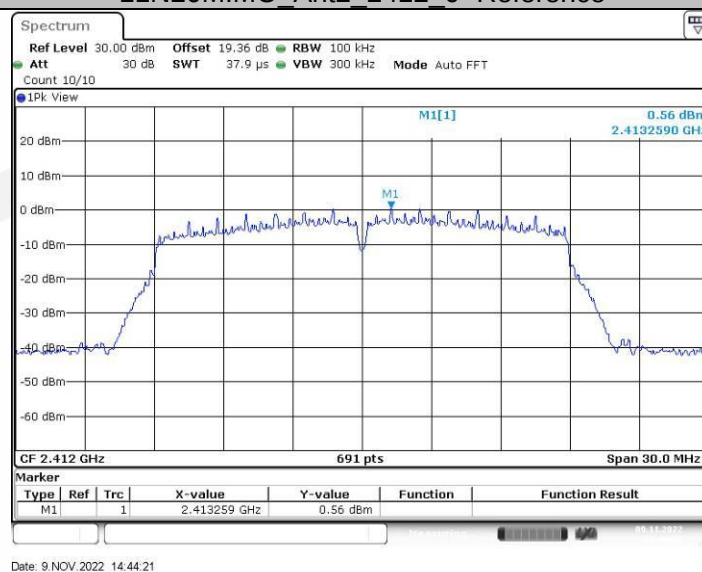


11N20MIMO Ant2 2412 30~1000

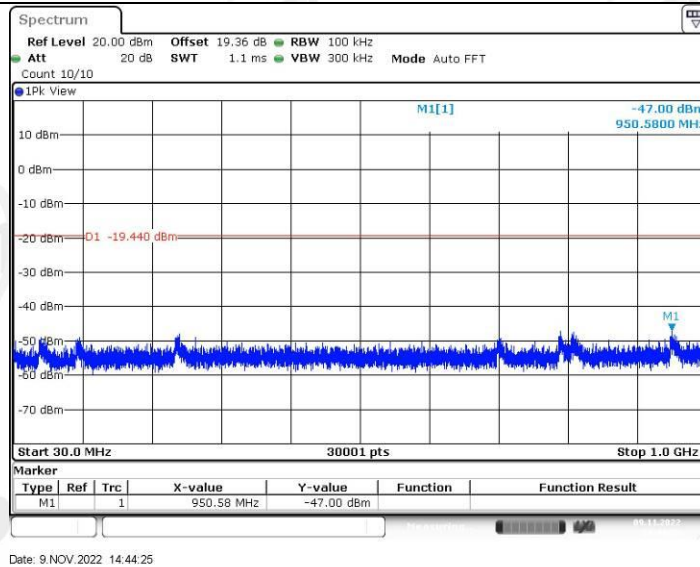


11N20MIMO Ant2 2412 1000~26500

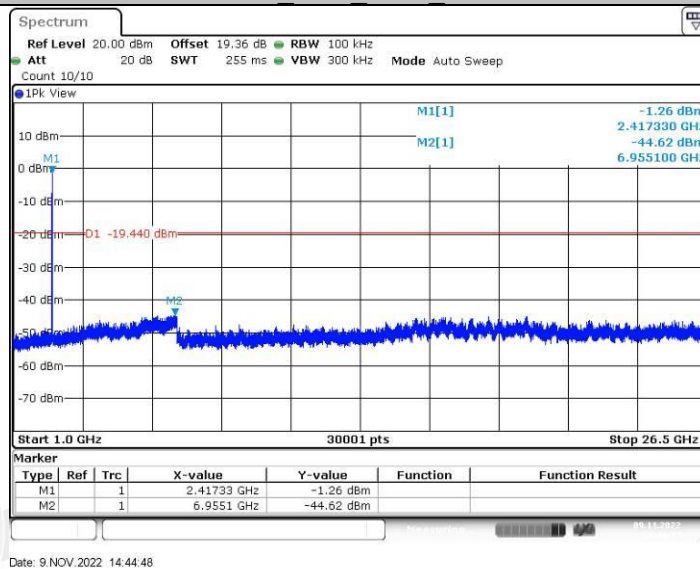


11N20MIMO Ant1 2437 0~Reference

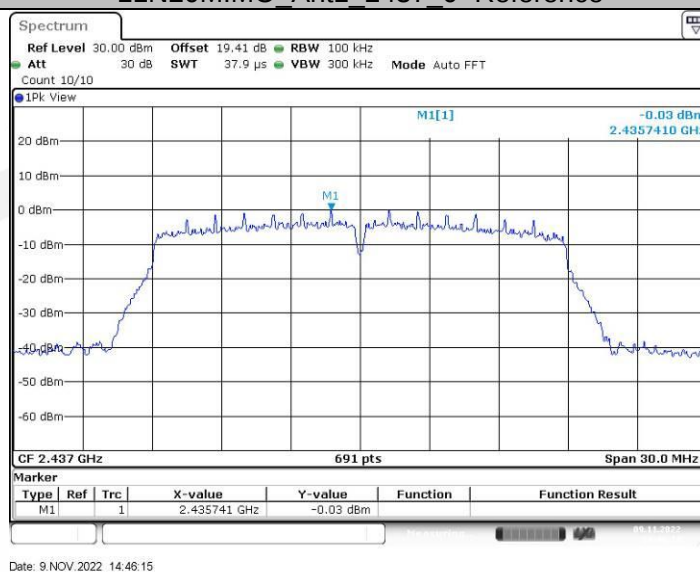


11N20MIMO Ant1 2437 30~1000

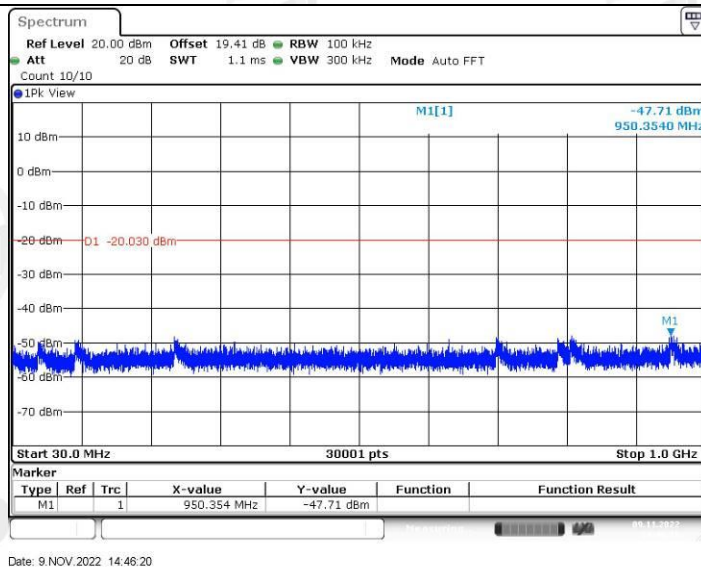


11N20MIMO Ant1 2437 1000~26500

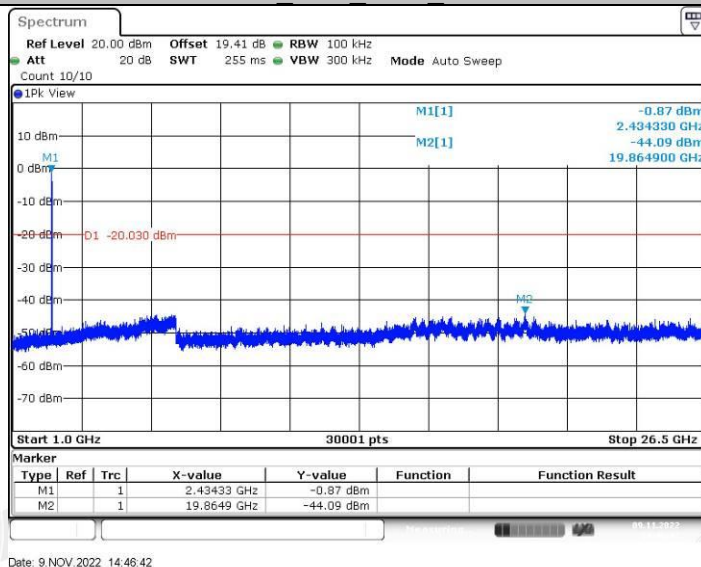


11N20MIMO Ant2 2437 0~Reference

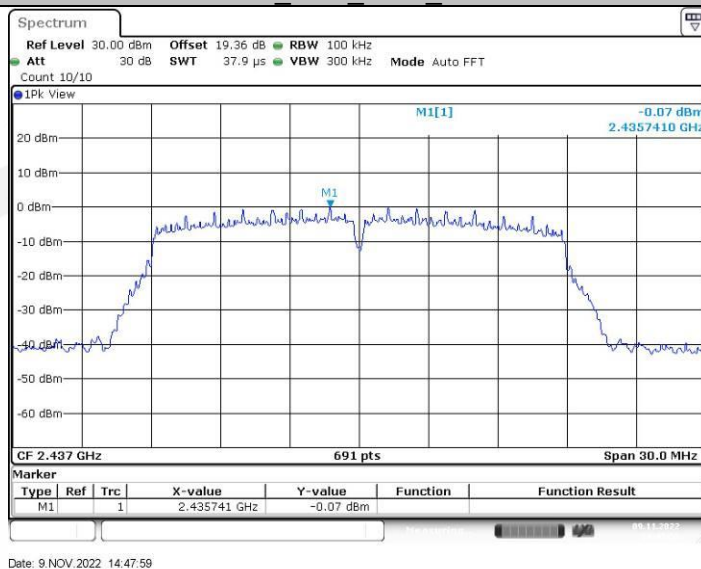


11N20MIMO Ant2 2437 30~1000

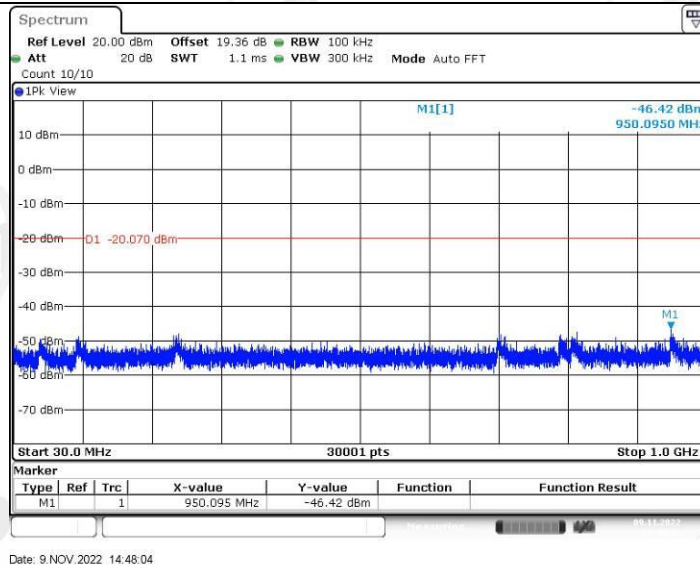


11N20MIMO Ant2 2437 1000~26500

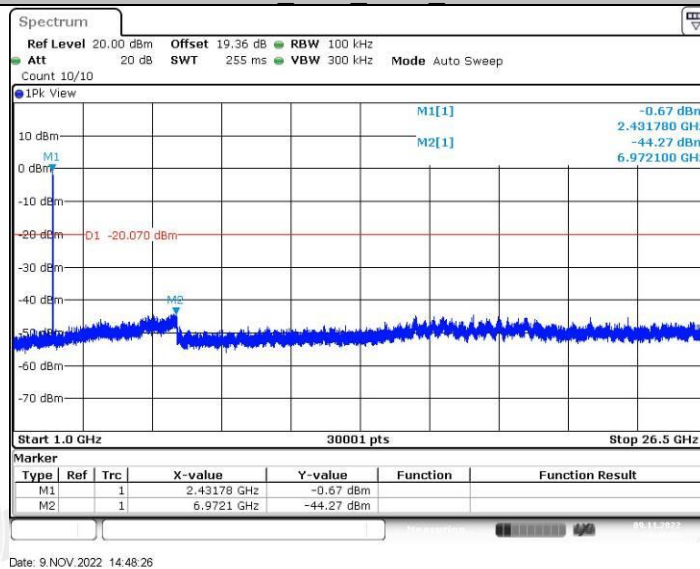


11N20MIMO Ant1 2462 0~Reference

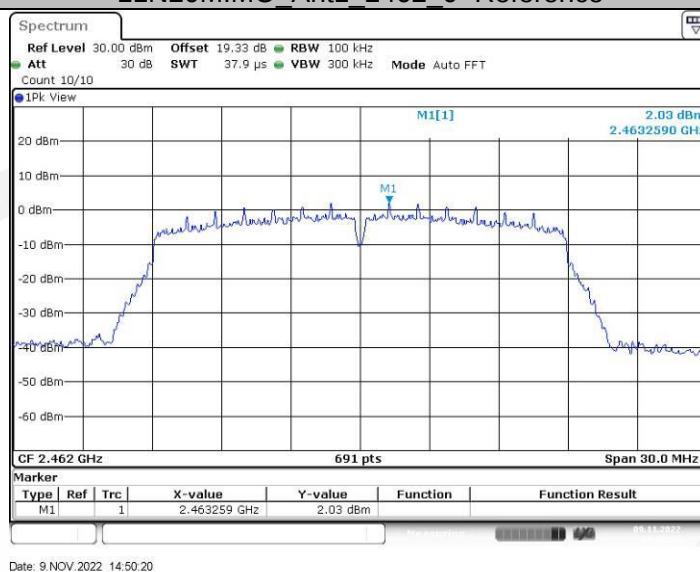


11N20MIMO Ant1 2462 30~1000

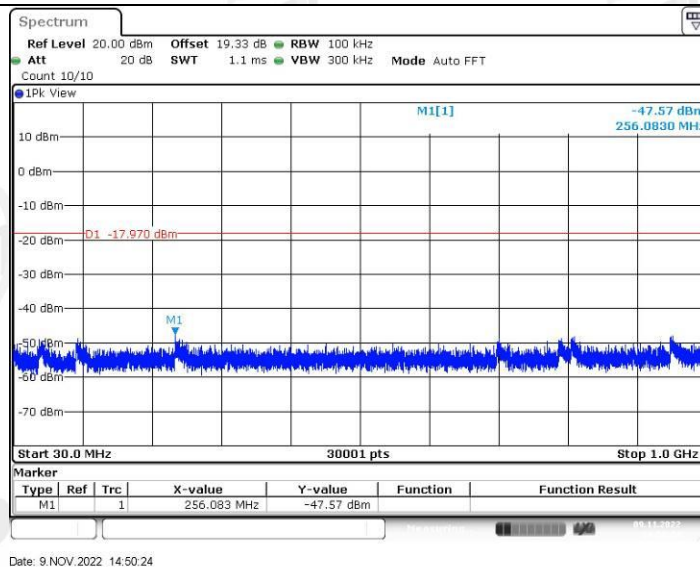


11N20MIMO Ant1 2462 1000~26500

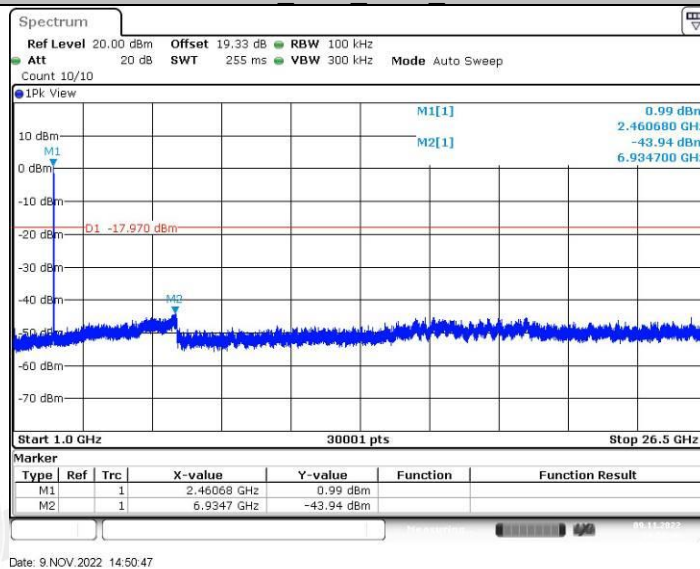


11N20MIMO Ant2 2462 0~Reference

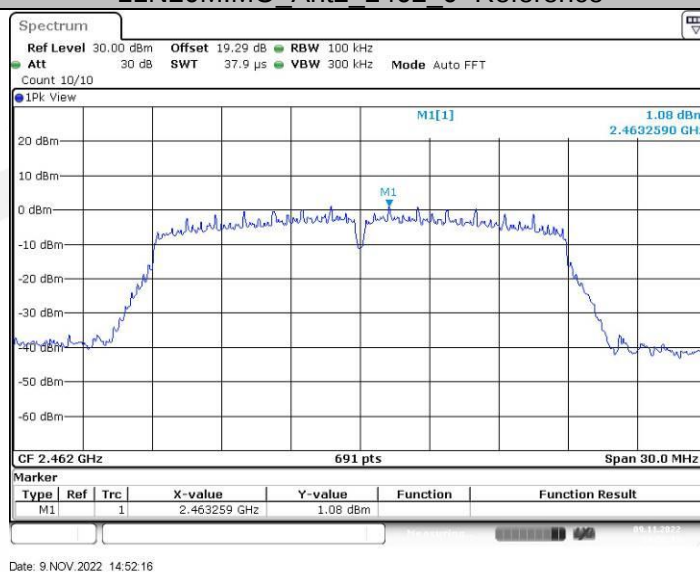


11N20MIMO Ant2 2462 30~1000

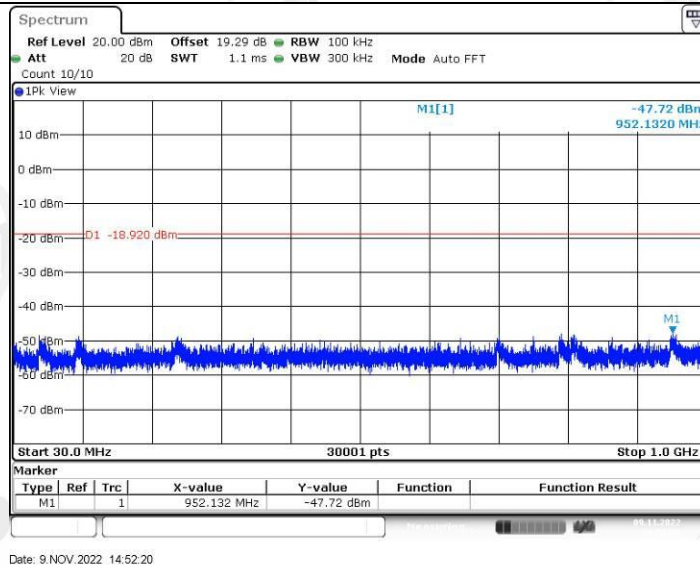


11N20MIMO Ant2 2462 1000~26500

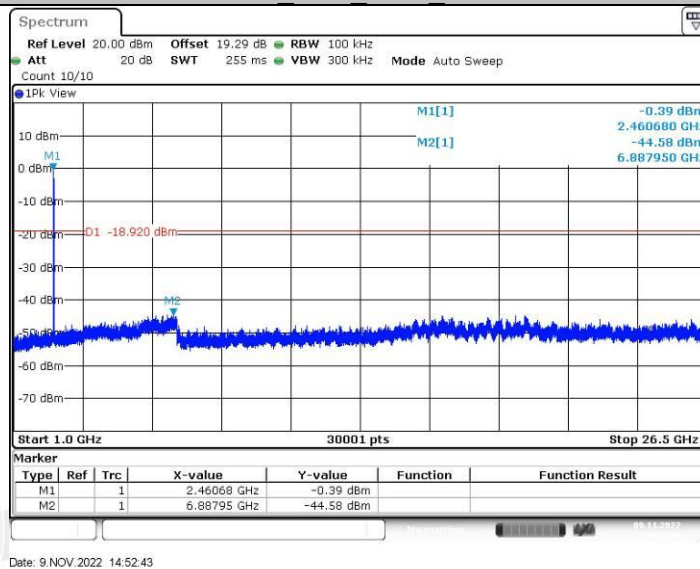


11N40MIMO Ant1 2422 0~Reference

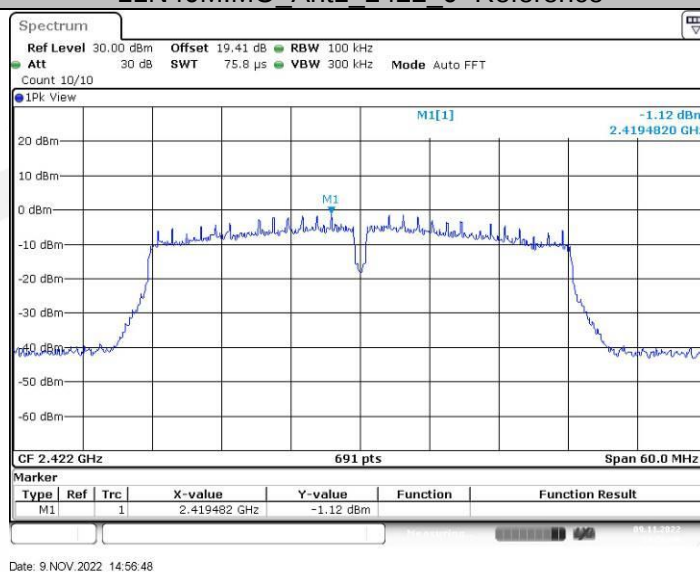


11N40MIMO Ant1 2422 30~1000

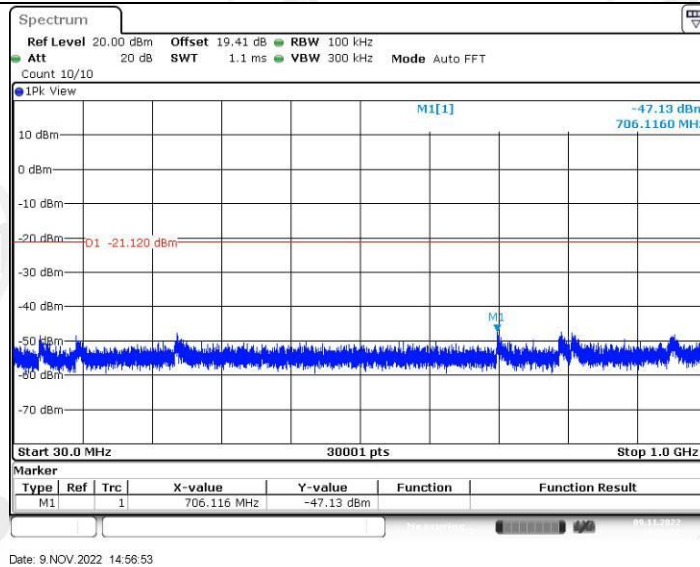

11N40MIMO Ant1 2422 1000~26500

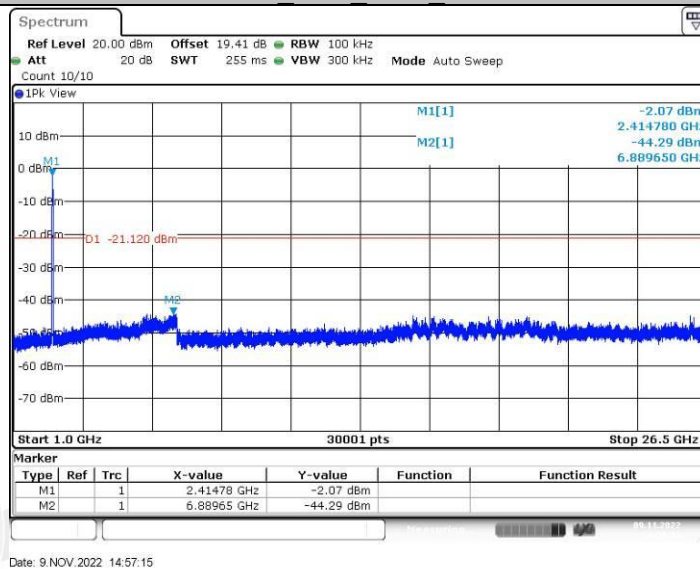

11N40MIMO Ant2 2422 0~Reference

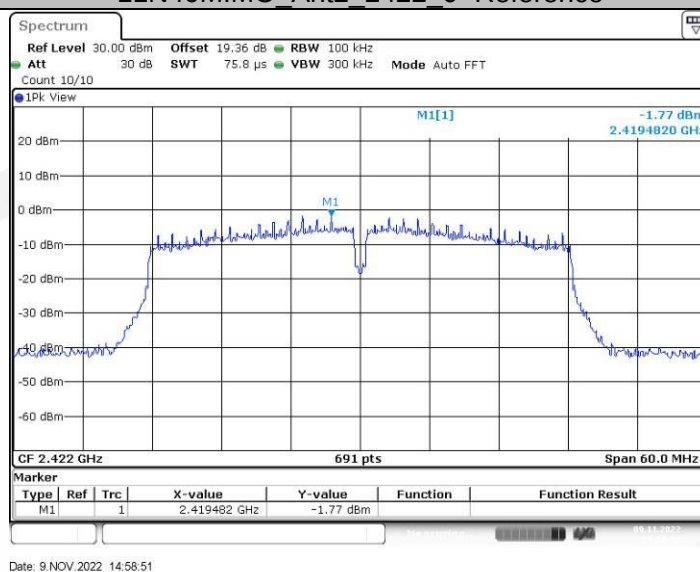

11N40MIMO Ant2 2422 30~1000