



FCC RF Test Report

APPLICANT : CHEP
EQUIPMENT : Asset Tracker
BRAND NAME : CHEP
MODEL NAME : Ultra Scout 2
FCC ID : 2APRD-ULTRASCOUT2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 12, 2026 ~ Aug. 23, 2026

The product was received on Aug. 10, 2026. We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
2.5 Measurement Results Explanation Example.....	8
3 TEST RESULT	9
3.1 6dB and 99% Bandwidth Measurement	9
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 Antenna Requirements.....	31
4 LIST OF MEASURING EQUIPMENT	32
5 MEASUREMENT UNCERTAINTY	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR680708B-R01	Rev. 01	Initial issue of report	Sep. 10, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Conducted Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.61 dB at 2483.70 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	1
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-
Remark: The device is powered by the Battery only.					

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Berry Chang



1 General Description

1.1 Applicant

CHEP

2901 Tasman Drive Suite 101 Santa Clara, CA 95054

Contact Name : Marcus Vinicius Ferrandini

Tel No.: +14044442323

1.2 Manufacturer

MINEWING VIET NAM ELECTRONICS CO., LTD

Lot CN-09, Hoa Phu Industrial Park, Xuan Cam Commune, Bac Ninh Province, Vietnam

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Asset Tracker
Brand Name	CHEP
Model Name	Ultra Scout 2
FCC ID	2APRD-ULTRASCOUT2
SN Code	Radiation:126015400000189
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 19.06 dBm (0.0805 W) 802.11g : 23.15 dBm (0.2065 W) 802.11n HT20 : 22.25 dBm (0.1679 W) 802.11ax HE20 : 22.85 dBm (0.1928 W)
99% Occupied Bandwidth	802.11b : 13.17MHz 802.11g : 17.30MHz 802.11n HT20 : 17.97MHz 802.11ax HE20 : 18.90MHz
Antenna Type / Gain	chip Antenna type with gain 2.5 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note: All antenna gain values in this report are supplied by the manufacturer, and the manufacturer takes all responsibilities for the accuracy of this information and its effect on the test results.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel


Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ax HE20	MCS0

2.3 Connection Diagram of Test System

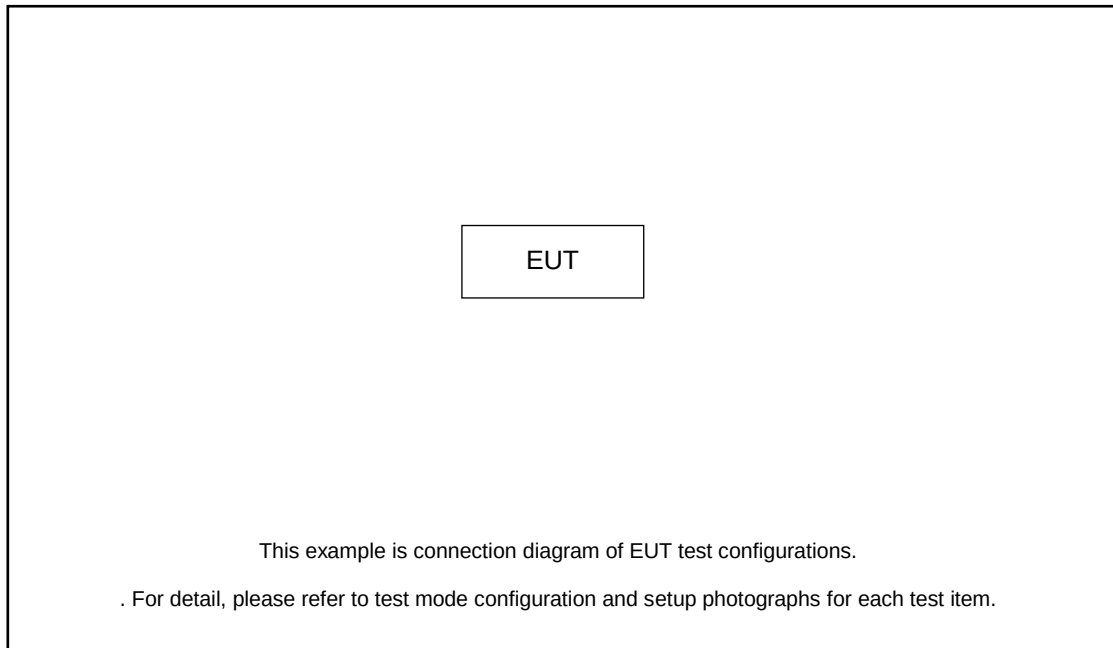

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 3.2dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 3.2 + 20 = 23.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

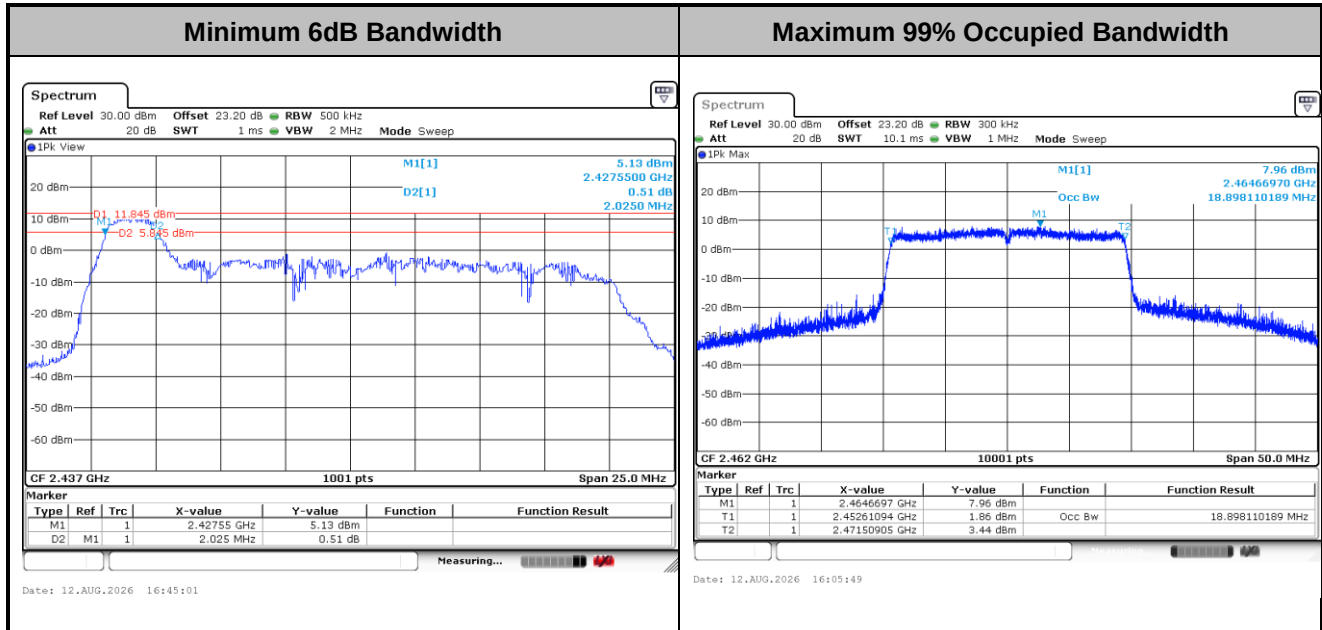

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

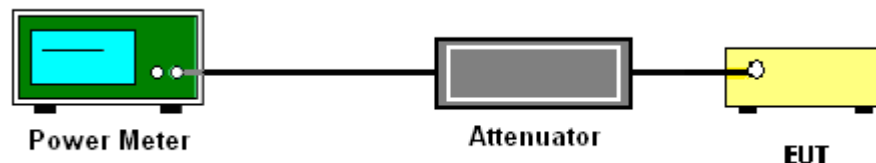

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

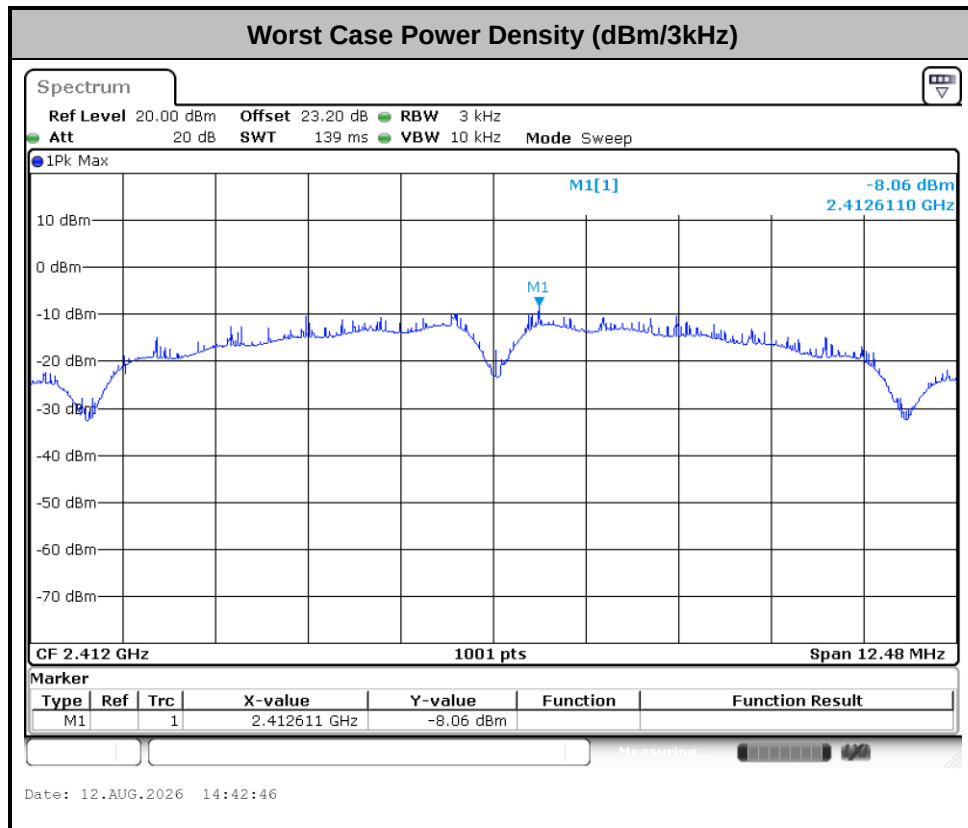

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.11.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Sam Zheng	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

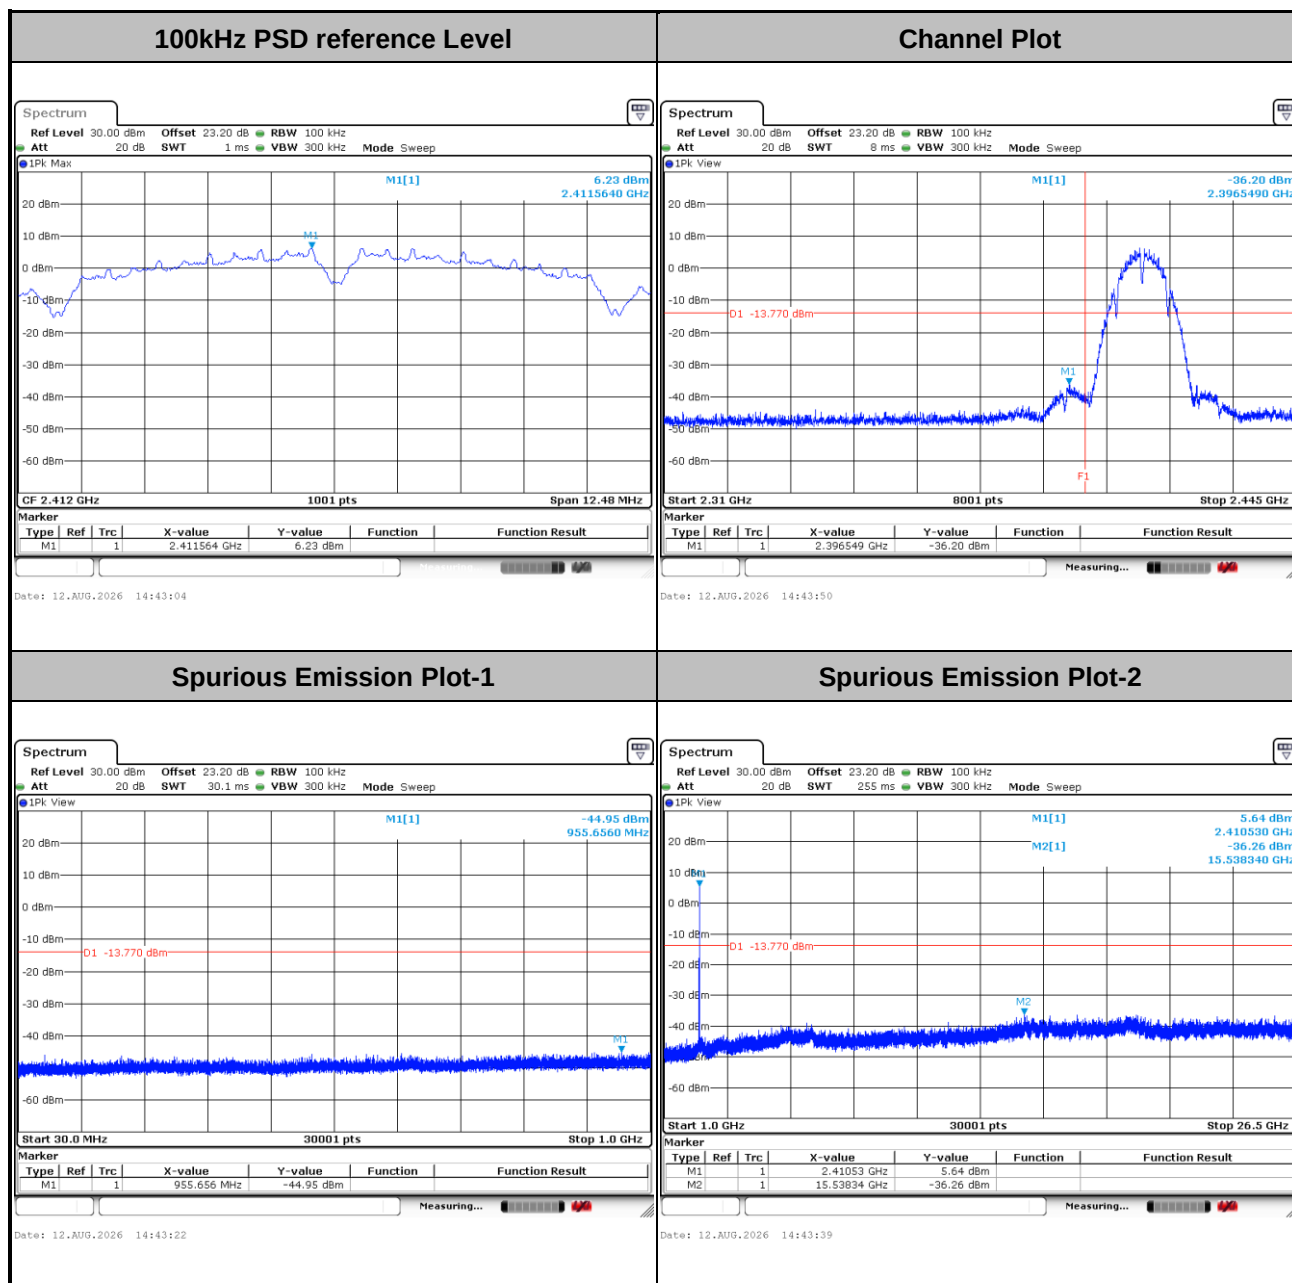




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

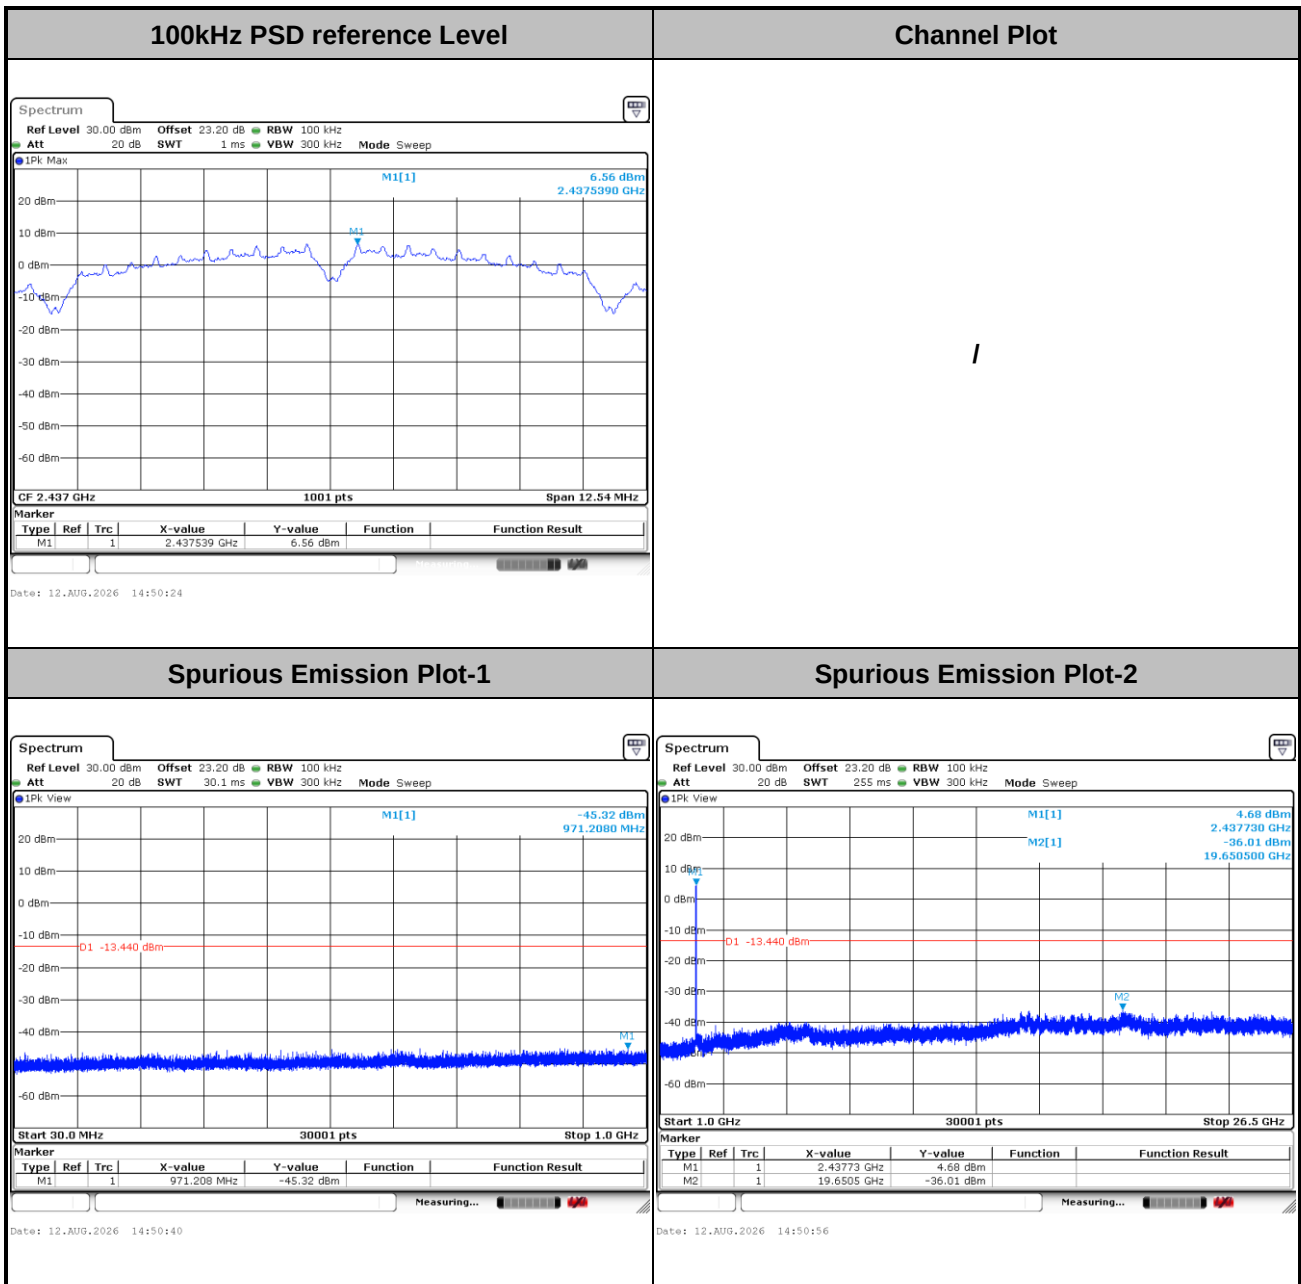




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

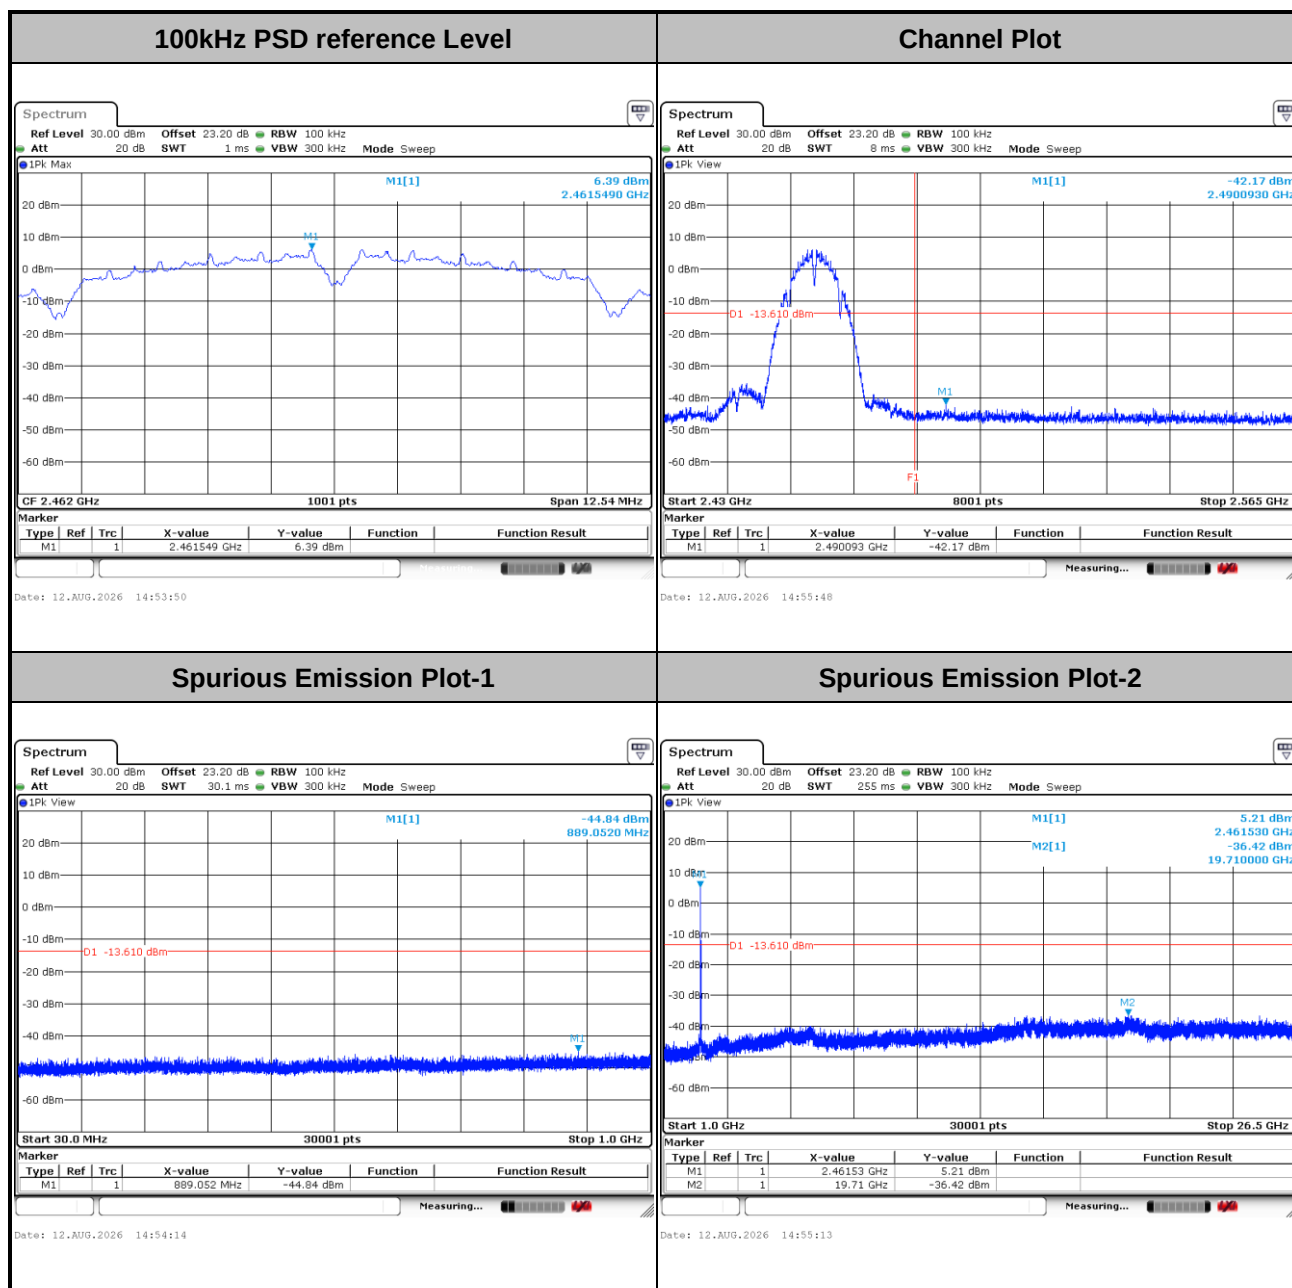




Test Mode : 802.11g Test Channel : 01

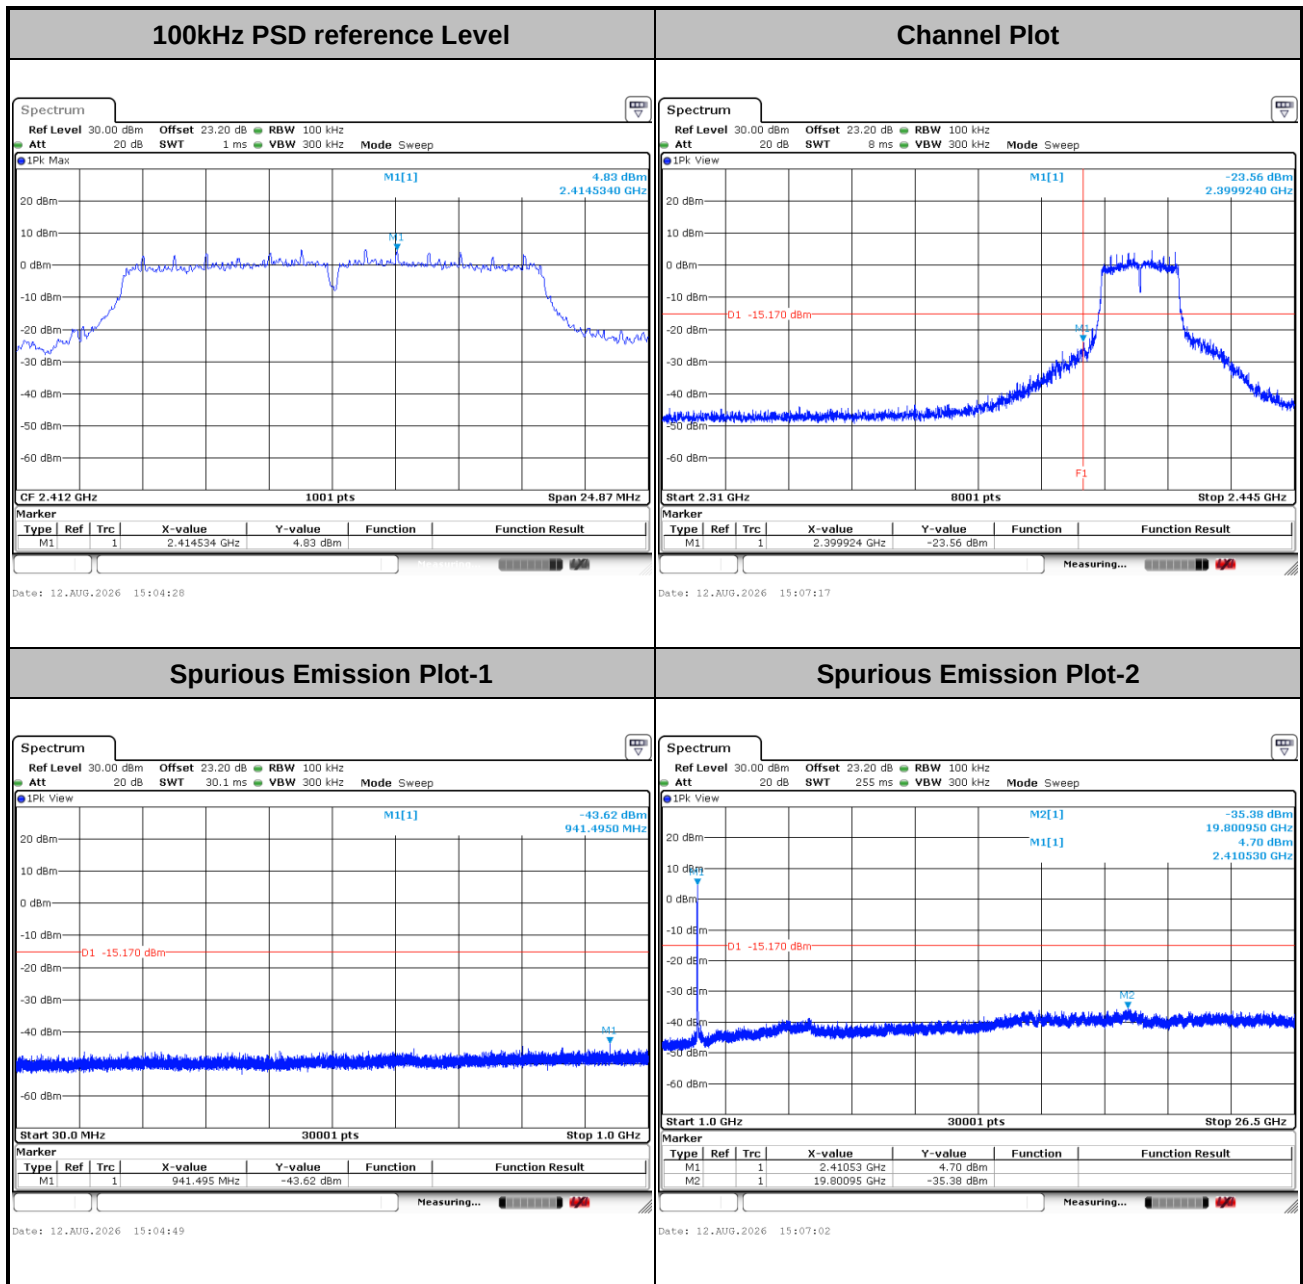




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

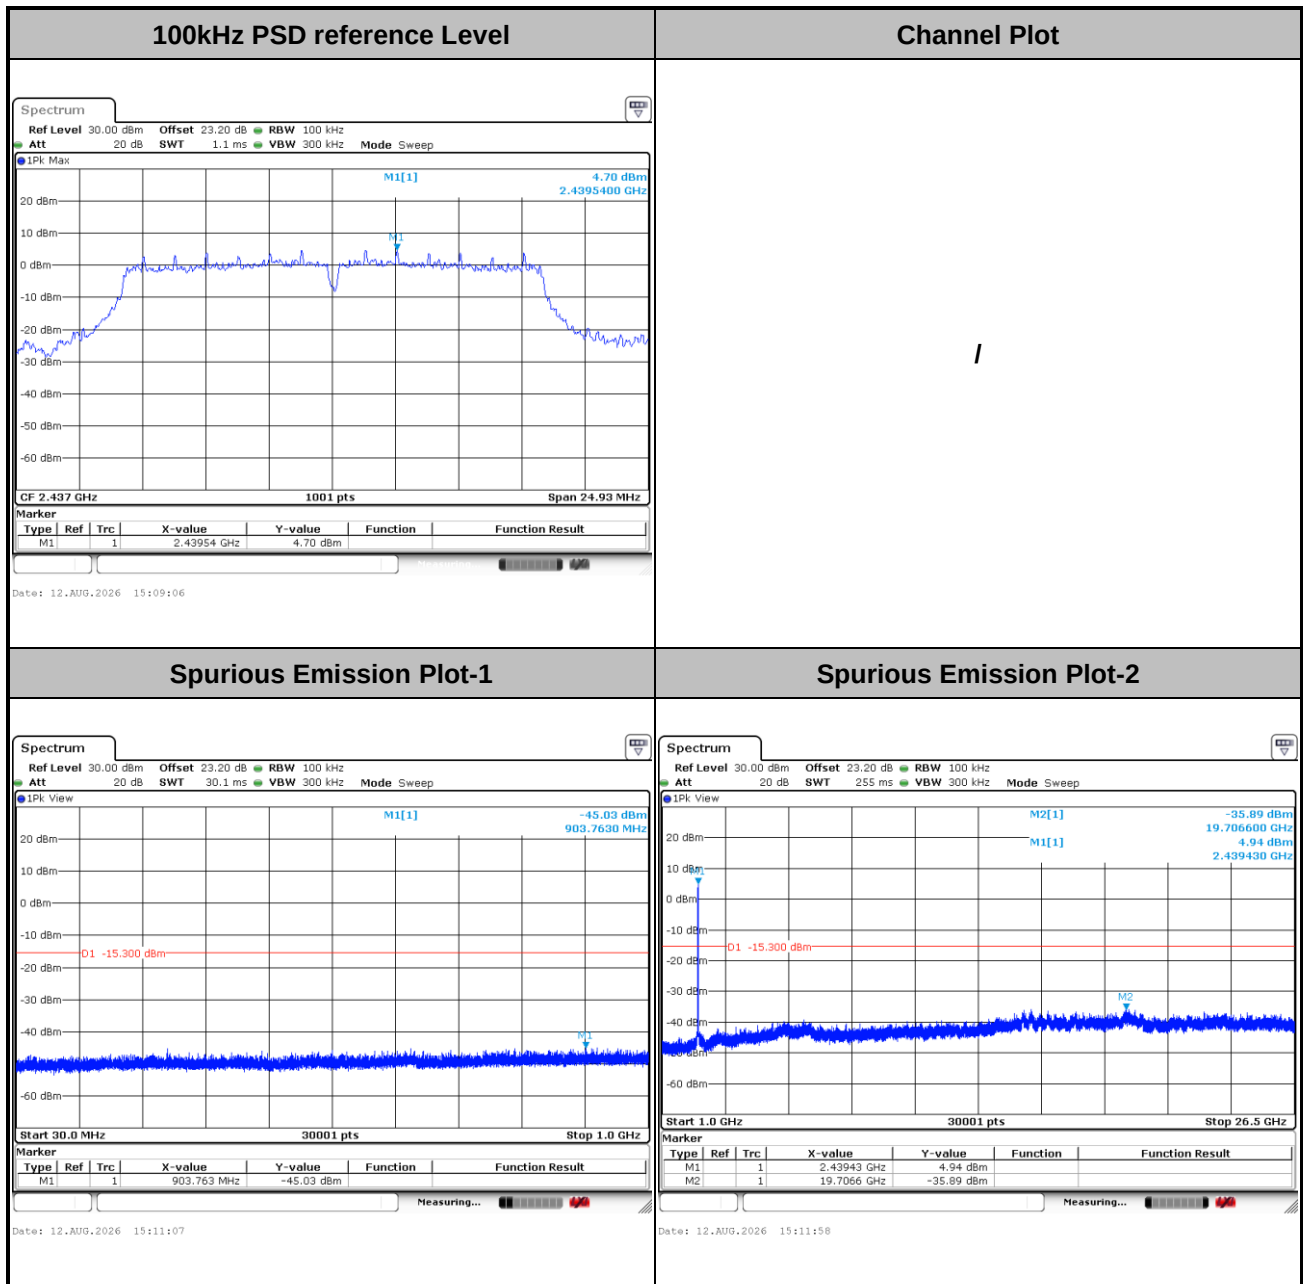




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

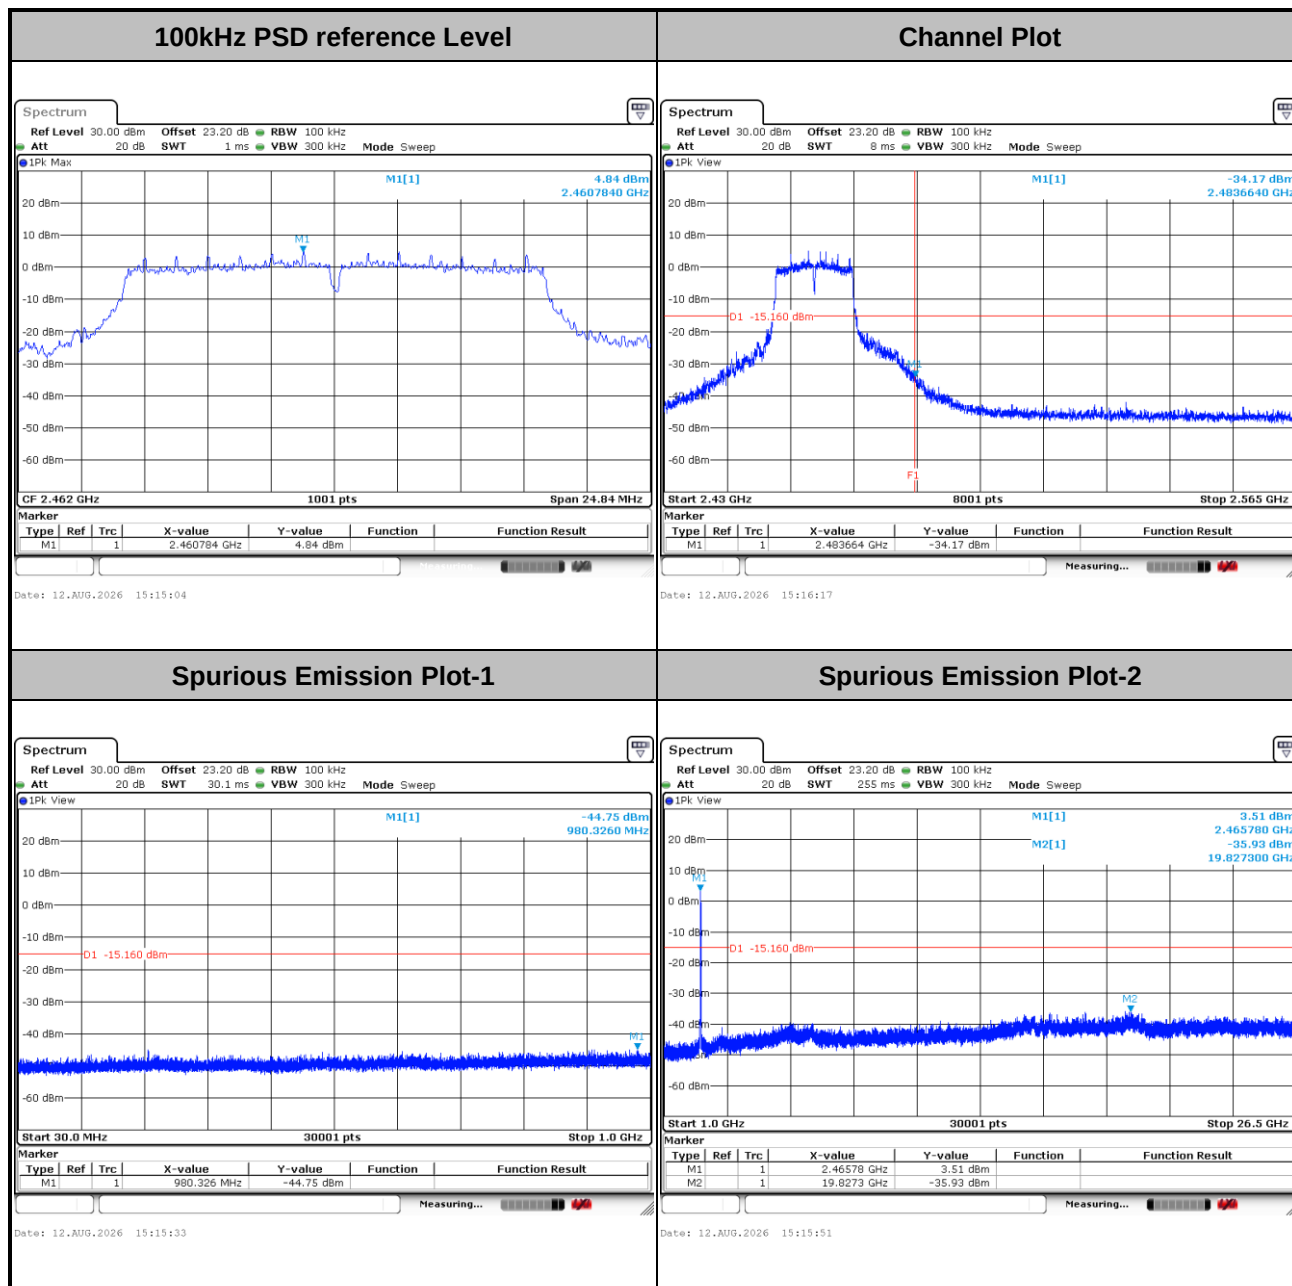




Test Mode : 802.11n HT20 Test Channel : 01


100kHz PSD reference Level

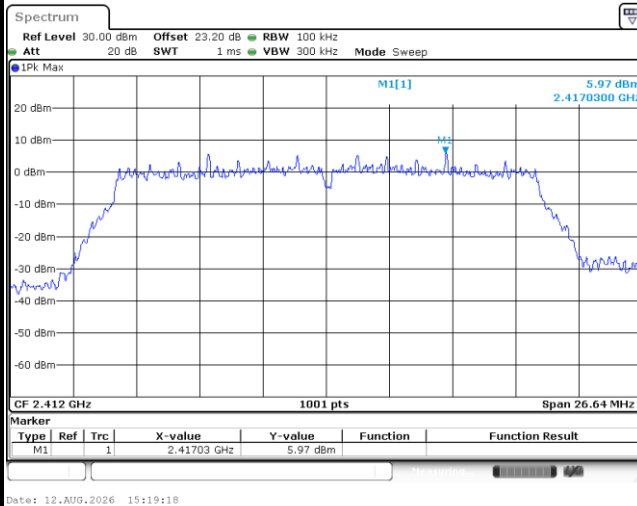


Channel Plot

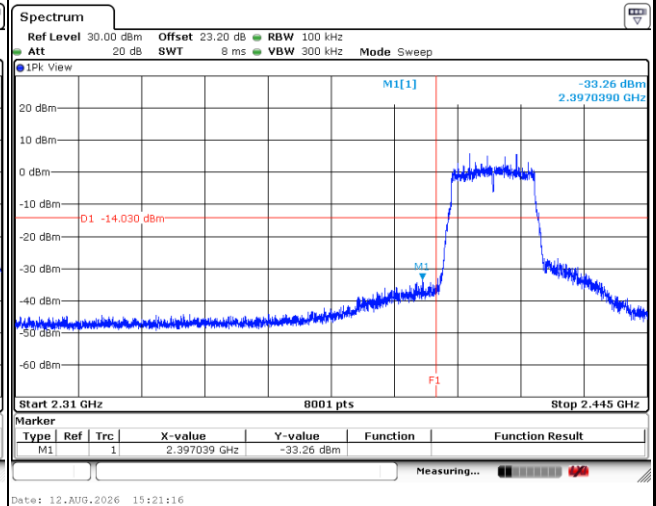

Spurious Emission Plot-1

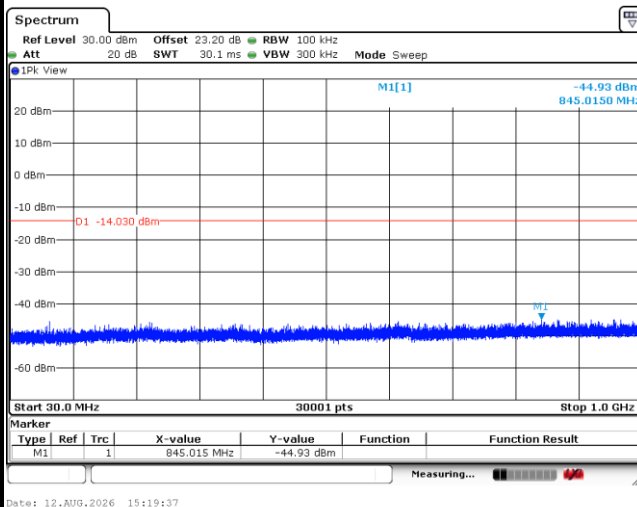


Spurious Emission Plot-2

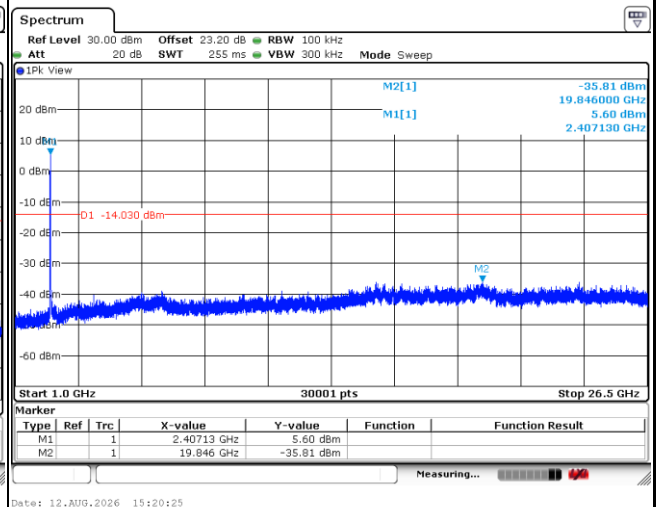




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

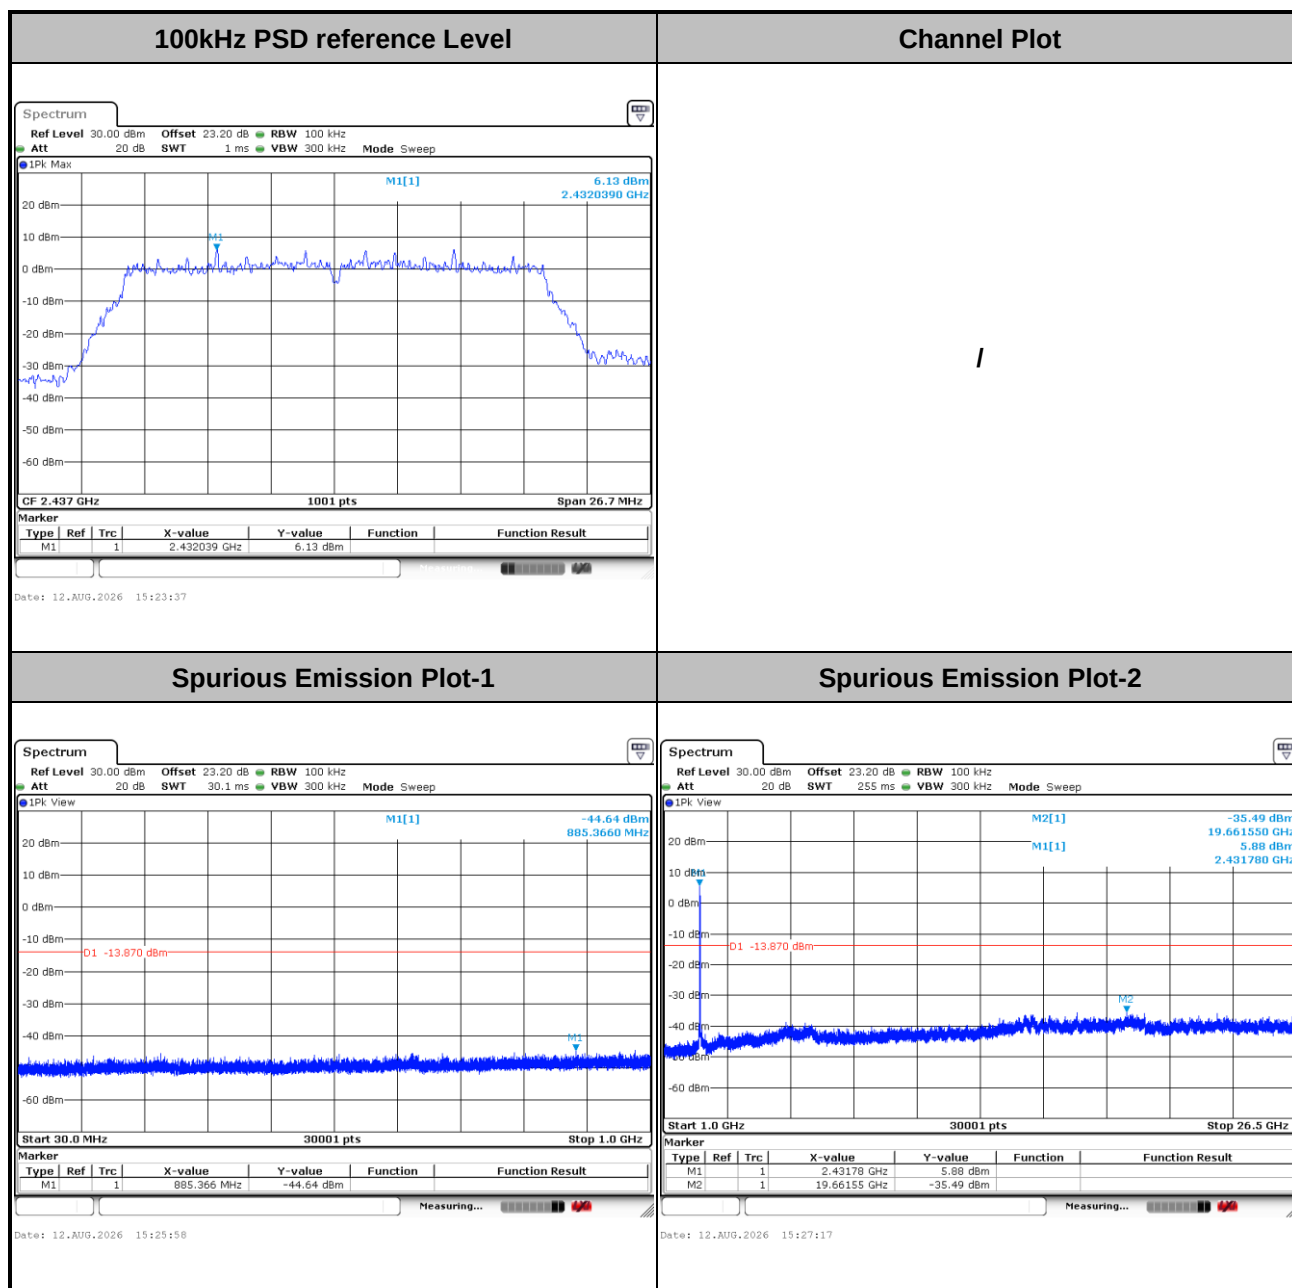




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

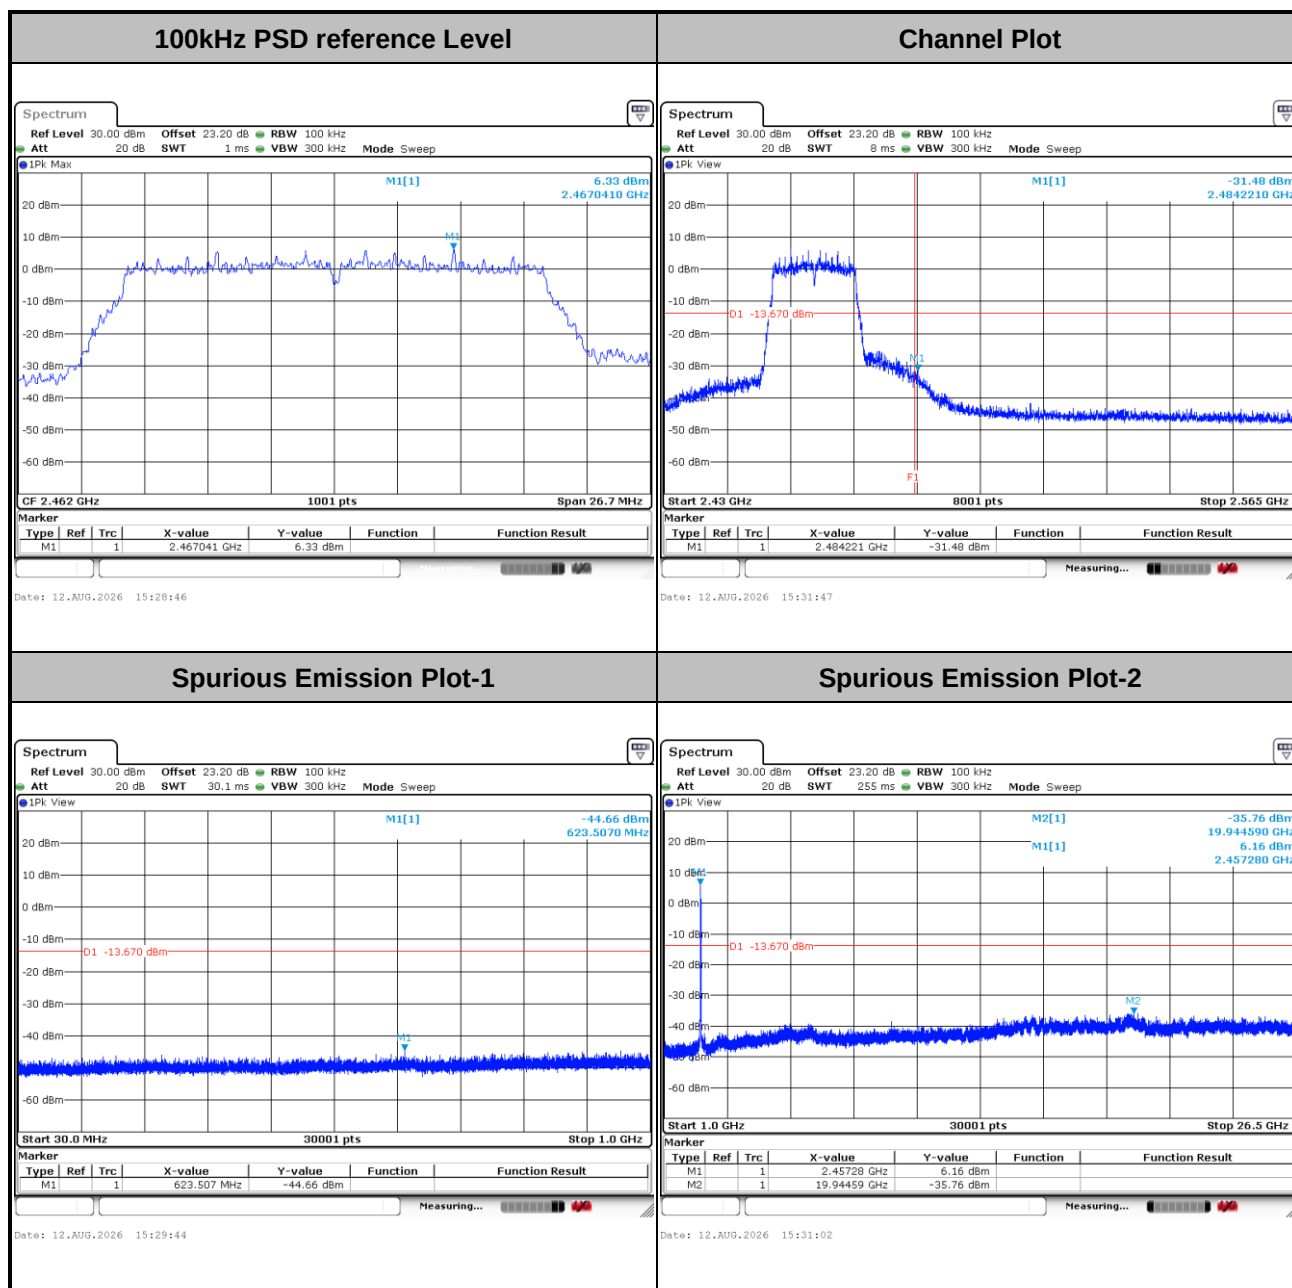




Test Mode :	802.11ax HE20	Test Channel :	01
-------------	---------------	----------------	----

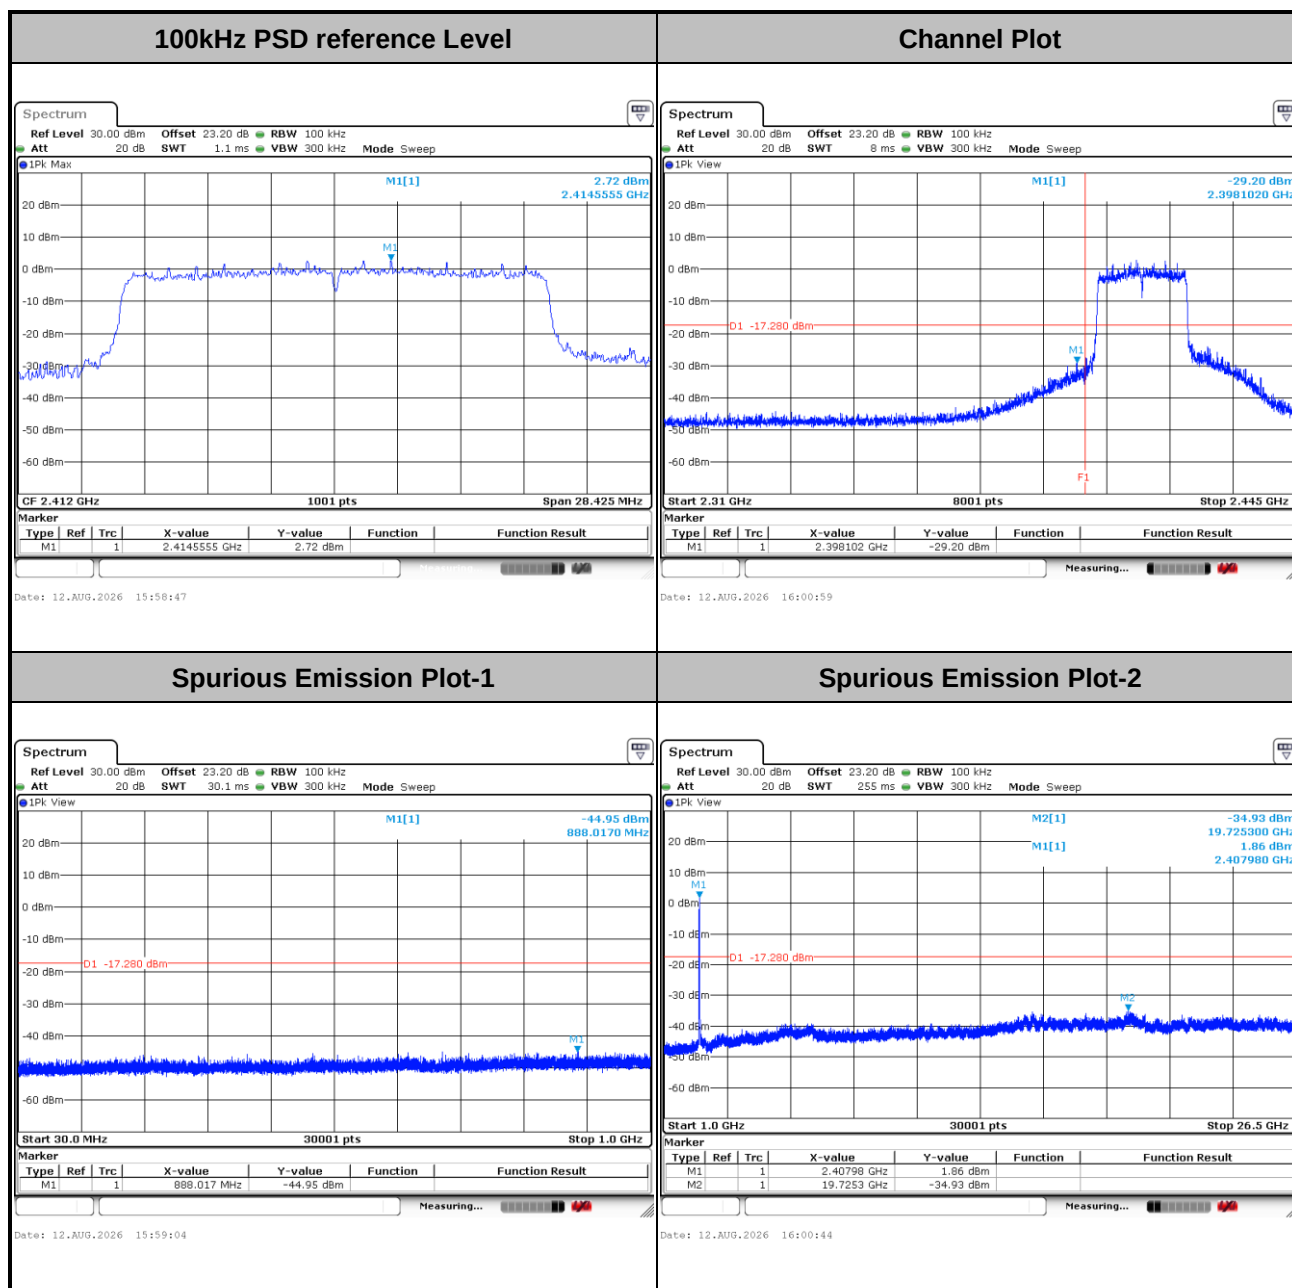




Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

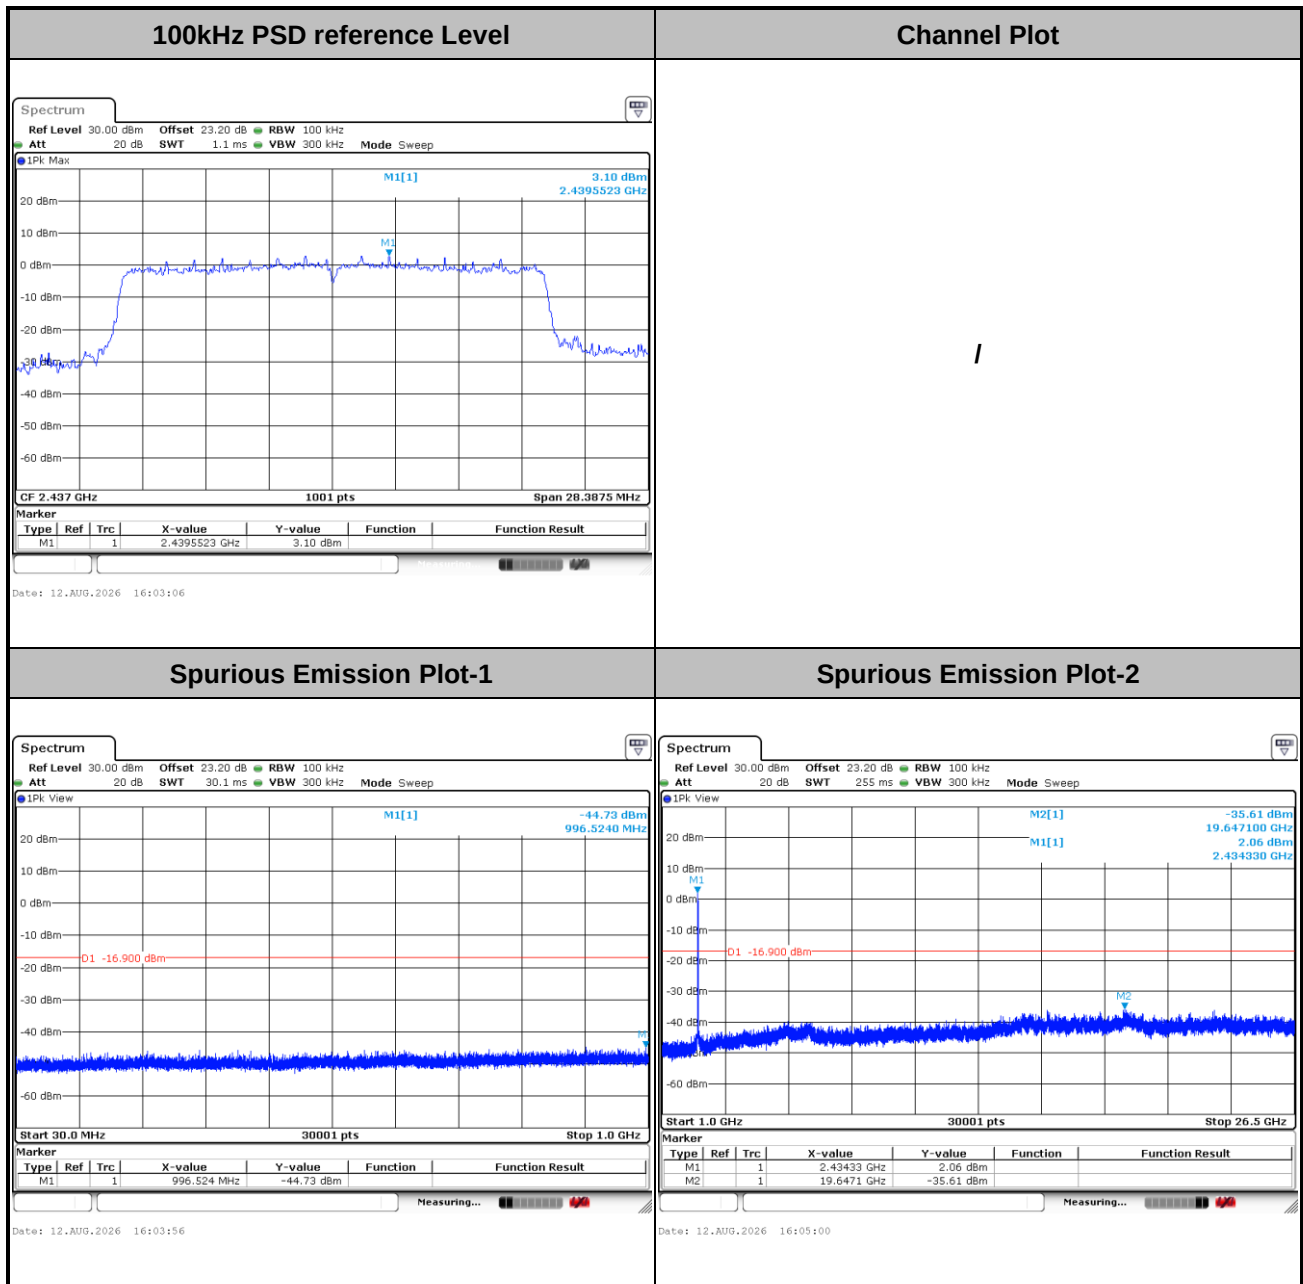



Test Mode :	802.11ax HE20	Test Channel :	11
-------------	---------------	----------------	----

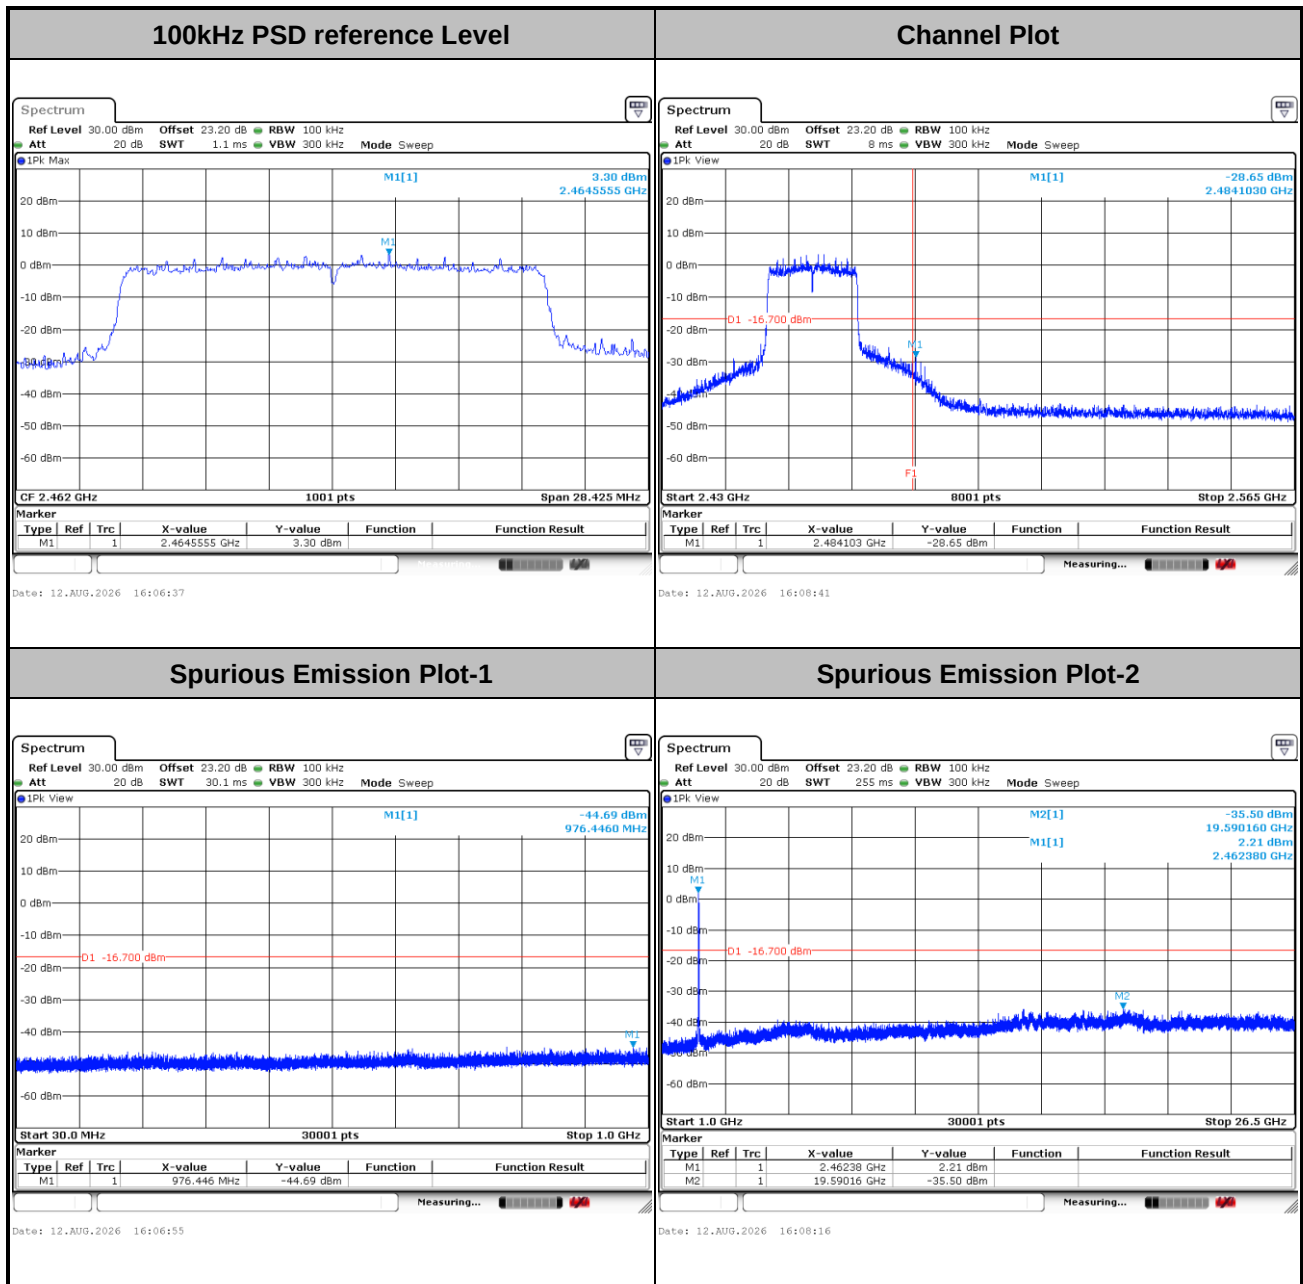

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

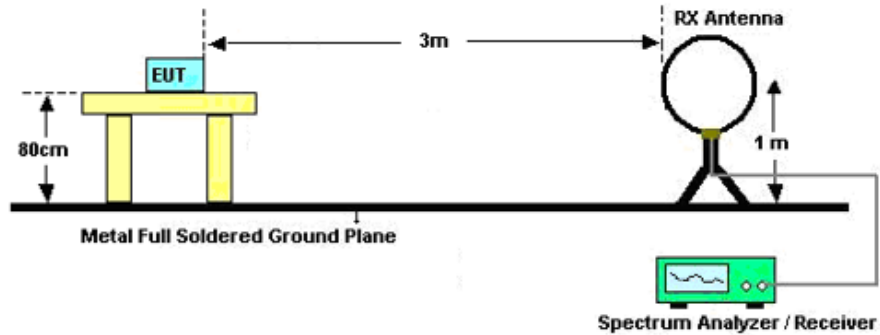

For radiated emissions from 30MHz to 1GHz

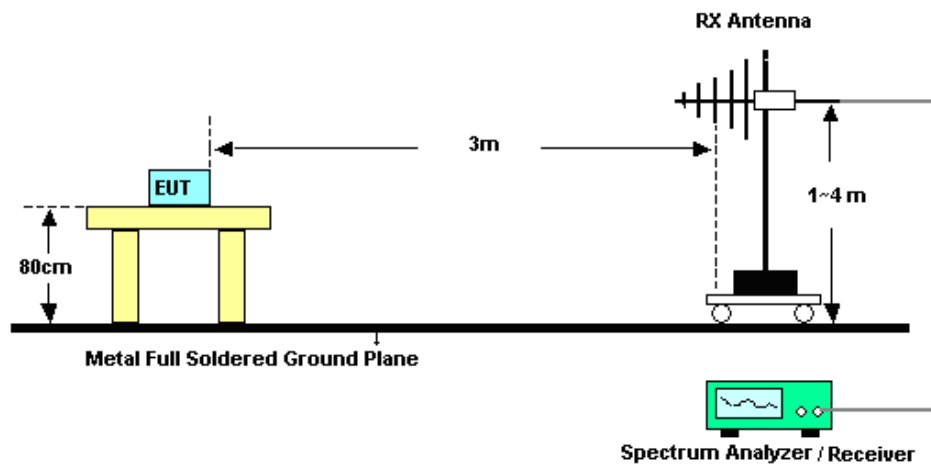

For radiated emissions above 1GHz

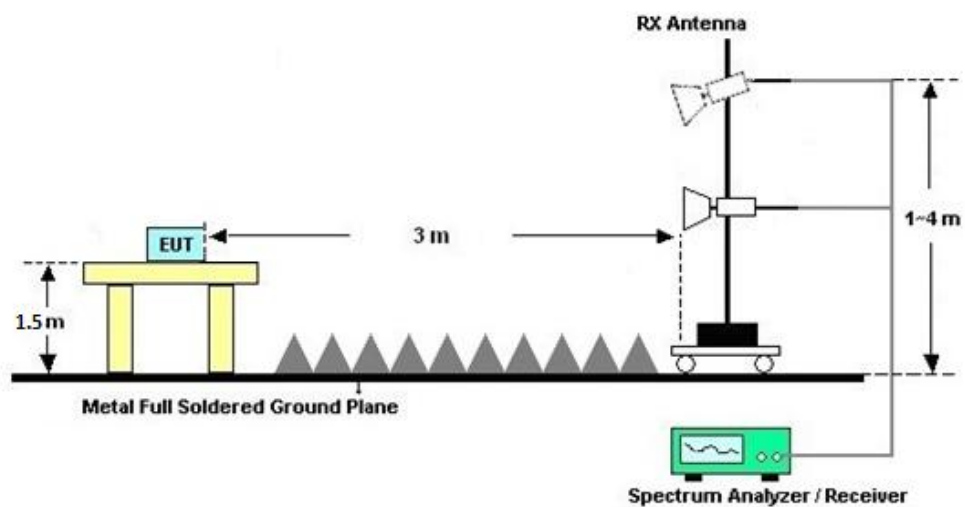



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Mar. 26, 2026	Aug. 13, 2026-Aug. 23, 2026	Mar. 25, 2027	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Mar. 27, 2026	Aug. 13, 2026-Aug. 23, 2026	Mar. 26, 2027	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Aug. 13, 2026-Aug. 23, 2026	Dec. 24, 2026	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Sept. 13, 2025	Aug. 13, 2026-Aug. 23, 2026	Sept. 12, 2026	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2026	Aug. 13, 2026-Aug. 23, 2026	Jul.12, 2027	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jun. 23 2026	Aug. 13, 2026-Aug. 23, 2026	Jun. 22, 2027	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	Aug. 13, 2026-Aug. 23, 2026	Apr. 02, 2027	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Mar. 26, 2026	Aug. 13, 2026-Aug. 23, 2026	Mar. 25, 2027	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Aug. 13, 2026-Aug. 23, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5GHz	Mar. 26, 2026	Aug. 13, 2026-Aug. 23, 2026	Mar. 25, 2027	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 13, 2025	Aug. 13, 2026-Aug. 23, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 13, 2026-Aug. 23, 2026	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 13, 2026-Aug. 23, 2026	NCR	Radiation (03CH03-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Mar. 26, 2026	Aug. 12, 2026-Aug. 17, 2026	Mar. 25, 2027	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	Aug. 12, 2026-Aug. 17, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 13, 2025	Aug. 12, 2026-Aug. 17, 2026	Oct. 12, 2026	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 0.9 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 0.8 dB
Conducted Power Spectral Density	± 0.88 dB
Frequency	± 0.0067 MHz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2026/8/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant0		
11b	1Mbps	1	1	2412	13.17	8.32	0.50	Pass
11b	1Mbps	1	6	2437	13.16	8.36	0.50	Pass
11b	1Mbps	1	11	2462	13.16	8.36	0.50	Pass
11g	6Mbps	1	1	2412	17.30	16.58	0.50	Pass
11g	6Mbps	1	6	2437	17.17	16.62	0.50	Pass
11g	6Mbps	1	11	2462	17.28	16.56	0.50	Pass
HT20	MCS0	1	1	2412	17.94	17.76	0.50	Pass
HT20	MCS0	1	6	2437	17.95	17.80	0.50	Pass
HT20	MCS0	1	11	2462	17.97	17.80	0.50	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
						Ant0	Ant0		
HE20	MCS0	1	1	2412	Full	18.89	18.95	0.50	Pass
HE20	MCS0	1	1	2412	26/0	-	2.05	0.50	Pass
HE20	MCS0	1	6	2437	Full	18.88	18.93	0.50	Pass
HE20	MCS0	1	6	2437	26/0	-	2.03	0.50	Pass
HE20	MCS0	1	11	2462	Full	18.90	18.95	0.50	Pass
HE20	MCS0	1	11	2462	26/8	-	2.05	0.50	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant0	Ant0	Ant0	
11b	1Mbps	1	1	2412	-8.06	2.50	8.00	Pass
11b	1Mbps	1	6	2437	-8.68	2.50	8.00	Pass
11b	1Mbps	1	11	2462	-8.29	2.50	8.00	Pass
11g	6Mbps	1	1	2412	-11.34	2.50	8.00	Pass
11g	6Mbps	1	6	2437	-11.05	2.50	8.00	Pass
11g	6Mbps	1	11	2462	-11.85	2.50	8.00	Pass
HT20	MCS0	1	1	2412	-11.34	2.50	8.00	Pass
HT20	MCS0	1	6	2437	-10.42	2.50	8.00	Pass
HT20	MCS0	1	11	2462	-10.36	2.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
						Ant0	Ant0	Ant0	
HE20	MCS0	1	1	2412	Full	-11.01	2.50	8.00	Pass
HE20	MCS0	1	1	2412	26/0	-11.33	2.50	8.00	Pass
HE20	MCS0	1	1	2412	52/37	-11.52	2.50	8.00	Pass
HE20	MCS0	1	1	2412	106/53	-11.04	2.50	8.00	Pass
HE20	MCS0	1	6	2437	Full	-12.64	2.50	8.00	Pass
HE20	MCS0	1	11	2462	Full	-12.34	2.50	8.00	Pass
HE20	MCS0	1	11	2462	26/8	-12.76	2.50	8.00	Pass
HE20	MCS0	1	11	2462	52/40	-12.68	2.50	8.00	Pass
HE20	MCS0	1	11	2462	106/54	-12.69	2.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant0	Ant0	Ant0	Ant0	Ant0	
11b	1Mbps	1	1	2412	16.20	30.00	2.50	18.70	36.00	Pass
11b	1Mbps	1	6	2437	16.30	30.00	2.50	18.80	36.00	Pass
11b	1Mbps	1	11	2462	15.30	30.00	2.50	17.80	36.00	Pass
11g	6Mbps	1	1	2412	16.30	30.00	2.50	18.80	36.00	Pass
11g	6Mbps	1	6	2437	16.20	30.00	2.50	18.70	36.00	Pass
11g	6Mbps	1	11	2462	15.40	30.00	2.50	17.90	36.00	Pass
HT20	MCS0	1	1	2412	16.30	30.00	2.50	18.80	36.00	Pass
HT20	MCS0	1	6	2437	16.40	30.00	2.50	18.90	36.00	Pass
HT20	MCS0	1	11	2462	16.50	30.00	2.50	19.00	36.00	Pass

Setting
Ant 0
127
127
125
127
127
127
125
127
127
127

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant0	Ant0	Ant0	Ant0	Ant0	
HE20	MCS0	1	1	2412	Full	15.10	30.00	2.50	17.60	36.00	Pass
HE20	MCS0	1	1	2412	26/0	6.00	30.00	2.50	8.50	36.00	Pass
HE20	MCS0	1	1	2412	52/37	9.40	30.00	2.50	11.90	36.00	Pass
HE20	MCS0	1	1	2412	106/53	12.20	30.00	2.50	14.70	36.00	Pass
HE20	MCS0	1	6	2437	Full	15.00	30.00	2.50	17.50	36.00	Pass
HE20	MCS0	1	11	2462	Full	14.50	30.00	2.50	17.00	36.00	Pass
HE20	MCS0	1	11	2462	26/8	4.00	30.00	2.50	6.50	36.00	Pass
HE20	MCS0	1	11	2462	52/40	7.50	30.00	2.50	10.00	36.00	Pass
HE20	MCS0	1	11	2462	106/54	9.90	30.00	2.50	12.40	36.00	Pass

Setting
Ant 0
127
8
11
14
127
125
6
9
11

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant0	Ant0			Ant0	
11b	1Mbps	1	1	2412	19.02	30.00	2.50	21.52	36.00	Pass
11b	1Mbps	1	6	2437	19.06	30.00	2.50	21.56	36.00	Pass
11b	1Mbps	1	11	2462	17.82	30.00	2.50	20.32	36.00	Pass
11g	6Mbps	1	1	2412	23.09	30.00	2.50	25.59	36.00	Pass
11g	6Mbps	1	6	2437	23.15	30.00	2.50	25.65	36.00	Pass
11g	6Mbps	1	11	2462	22.84	30.00	2.50	25.34	36.00	Pass
HT20	MCS0	1	1	2412	22.08	30.00	2.50	24.58	36.00	Pass
HT20	MCS0	1	6	2437	22.16	30.00	2.50	24.66	36.00	Pass
HT20	MCS0	1	11	2462	22.25	30.00	2.50	24.75	36.00	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant0	Ant0	Ant0	Ant0	Ant0	
HE20	MCS0	1	1	2412	Full	22.77	30.00	2.50	25.27	36.00	Pass
HE20	MCS0	1	1	2412	26/0	16.78	30.00	2.50	19.28	36.00	Pass
HE20	MCS0	1	1	2412	52/37	19.98	30.00	2.50	22.48	36.00	Pass
HE20	MCS0	1	1	2412	106/53	22.14	30.00	2.50	24.64	36.00	Pass
HE20	MCS0	1	6	2437	Full	22.85	30.00	2.50	25.35	36.00	Pass
HE20	MCS0	1	11	2462	Full	22.39	30.00	2.50	24.89	36.00	Pass
HE20	MCS0	1	11	2462	26/8	14.82	30.00	2.50	17.32	36.00	Pass
HE20	MCS0	1	11	2462	52/40	18.20	30.00	2.50	20.70	36.00	Pass
HE20	MCS0	1	11	2462	106/54	22.03	30.00	2.50	24.53	36.00	Pass



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24~25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 8	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 9	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 10	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 11	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 12	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 13	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 14	2400-2483.5	SISO	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 15	2400-2483.5	SISO	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 16	2400-2483.5	SISO	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 17	2400-2483.5	SISO	802.11ax HE20	01	2412	MCS0	Partial_RU_106/53	-
Mode 18	2400-2483.5	SISO	802.11ax HE20	11	2462	MCS0	Partial_RU_52/40	-
Mode 19	2400-2483.5	SISO	802.11ax HE20	11	2462	MCS0	Full RU	LF
Mode 21	2400-2483.5	SISO	802.11ax HE20	11	2462	MCS0	Full RU	SHF

For 802.11n/11ax mode, the RSE testing have assessed only 802.11ax EHT20 by referring to the higher output power.







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
8	802.11b	01	2389.95	48.70	54.00	-5.30	H	AVERAGE	Pass	Band Edge
8	802.11b	01	4824.00	45.70	54.00	-8.30	V	Average	Pass	Harmonic
9	802.11b	06	-	-	-	-	-	-	-	Band Edge
9	802.11b	06	4874.00	44.90	54.00	-9.10	V	Average	Pass	Harmonic
10	802.11b	11	2483.51	52.66	54.00	-1.34	H	AVERAGE	Pass	Band Edge
10	802.11b	11	4924.00	45.30	54.00	-8.70	V	Average	Pass	Harmonic
11	802.11g	01	2389.95	50.76	54.00	-3.24	H	AVERAGE	Pass	Band Edge
11	802.11g	01	4824.00	45.03	54.00	-8.97	V	Average	Pass	Harmonic
12	802.11g	06	-	-	-	-	-	-	-	Band Edge
12	802.11g	06	7311.00	43.28	54.00	-10.72	V	Average	Pass	Harmonic
13	802.11g	11	2483.55	53.09	54.00	-0.91	H	AVERAGE	Pass	Band Edge
13	802.11g	11	7386.00	44.66	54.00	-9.34	V	Average	Pass	Harmonic
14	802.11ax HE20	01	2389.69	49.49	54.00	-4.51	H	AVERAGE	Pass	Band Edge
14	802.11ax HE20	01	4824.00	44.34	54.00	-9.66	V	Average	Pass	Harmonic
15	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
15	802.11ax HE20	06	7311.00	43.02	54.00	-10.98	V	Average	Pass	Harmonic
16	802.11ax HE20	11	2483.70	53.39	54.00	-0.61	H	AVERAGE	Pass	Band Edge
16	802.11ax HE20	11	7386.00	44.07	54.00	-9.93	V	Average	Pass	Harmonic
17	802.11ax HE20	01	2389.04	44.21	54.00	-9.79	H	AVERAGE	Pass	Band Edge
17	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
18	802.11ax HE20	11	2484.72	44.16	54.00	-9.84	H	AVERAGE	Pass	Band Edge
18	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
19	802.11ax HE20	11	-	-	-	-	-	-	-	Band Edge
19	802.11ax HE20	11	955.38	32.58	46.00	-13.42	V	Peak	Pass	Harmonic





Mode	8																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	SISO																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2336 2362 2388 2414 2440 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>61.34</td><td>74.00</td><td>-12.66</td><td>54.85</td><td>31.69</td><td>8.31</td><td>33.51</td><td>100</td><td>192 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	61.34	74.00	-12.66	54.85	31.69	8.31	33.51	100	192 PEAK	Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>98.16</td><td>-----</td><td>-----</td><td>91.55</td><td>31.77</td><td>8.34</td><td>33.50</td><td>100</td><td>192 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.16	-----	-----	91.55	31.77	8.34	33.50	100	192 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.91	61.34	74.00	-12.66	54.85	31.69	8.31	33.51	100	192 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	98.16	-----	-----	91.55	31.77	8.34	33.50	100	192 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2336 2362 2388 2414 2440 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>48.70</td><td>54.00</td><td>-5.30</td><td>42.21</td><td>31.69</td><td>8.31</td><td>33.51</td><td>100</td><td>192 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.70	54.00	-5.30	42.21	31.69	8.31	33.51	100	192 AVERAGE	Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>88.75</td><td>-----</td><td>-----</td><td>82.12</td><td>31.78</td><td>8.35</td><td>33.50</td><td>100</td><td>192 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	88.75	-----	-----	82.12	31.78	8.35	33.50	100	192 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	48.70	54.00	-5.30	42.21	31.69	8.31	33.51	100	192 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	88.75	-----	-----	82.12	31.78	8.35	33.50	100	192 AVERAGE																																																																										

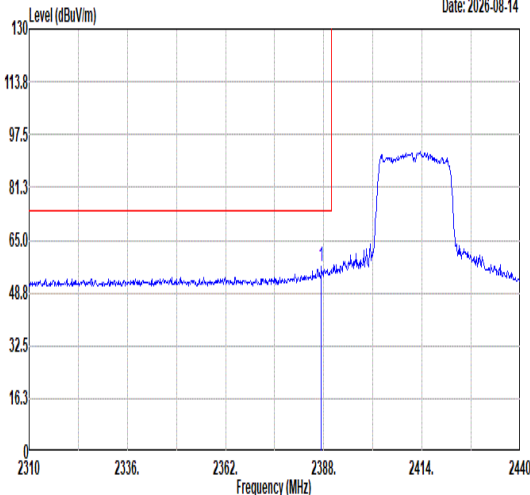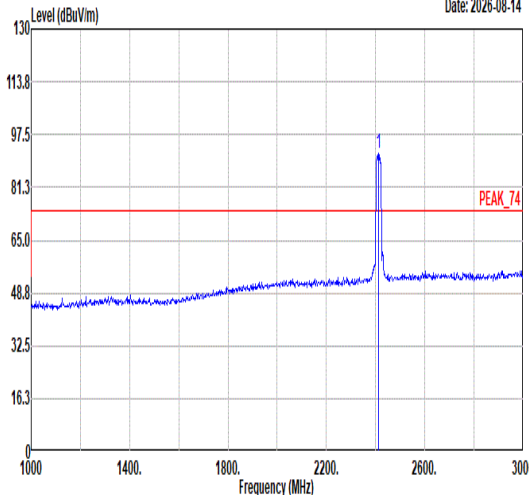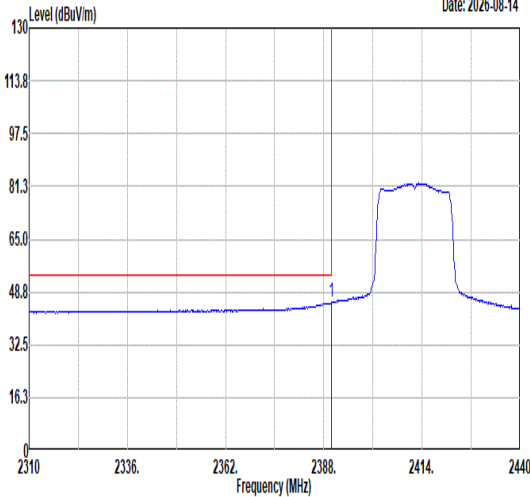
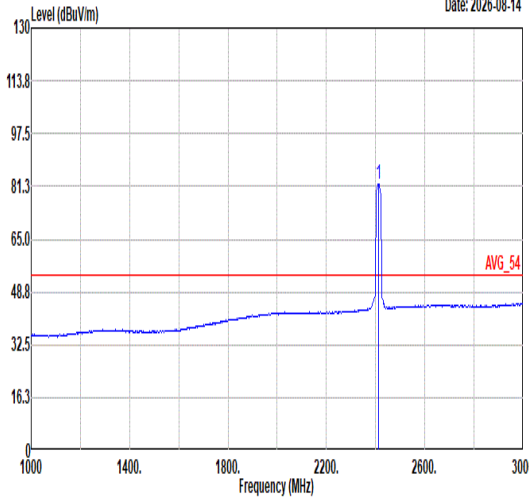


		8																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11b_CH01_2412MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.35</td><td>56.86</td><td>74.00</td><td>-17.14</td><td>50.38</td><td>31.69</td><td>8.30</td><td>33.51</td><td>300 229 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.35	56.86	74.00	-17.14	50.38	31.69	8.30	33.51	300 229 PEAK	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>91.62</td><td>-----</td><td>-----</td><td>85.01</td><td>31.77</td><td>8.34</td><td>33.50</td><td>300 229 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.62	-----	-----	85.01	31.77	8.34	33.50	300 229 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2387.35	56.86	74.00	-17.14	50.38	31.69	8.30	33.51	300 229 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	91.62	-----	-----	85.01	31.77	8.34	33.50	300 229 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>45.41</td><td>54.00</td><td>-8.59</td><td>38.92</td><td>31.69</td><td>8.31</td><td>33.51</td><td>300 229 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.41	54.00	-8.59	38.92	31.69	8.31	33.51	300 229 AVERAGE	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>82.02</td><td>-----</td><td>-----</td><td>75.39</td><td>31.78</td><td>8.35</td><td>33.50</td><td>300 229 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	82.02	-----	-----	75.39	31.78	8.35	33.50	300 229 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.95	45.41	54.00	-8.59	38.92	31.69	8.31	33.51	300 229 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	82.02	-----	-----	75.39	31.78	8.35	33.50	300 229 AVERAGE																																																																																	



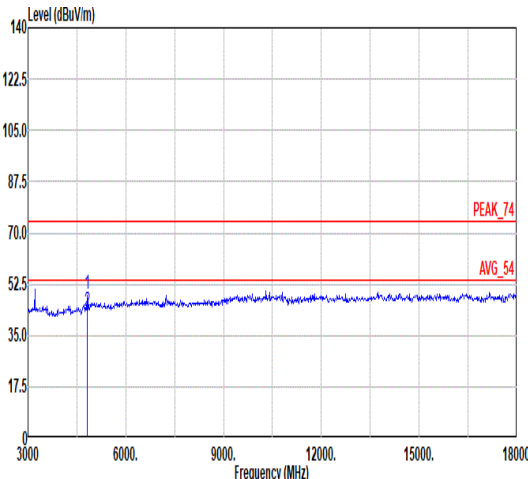
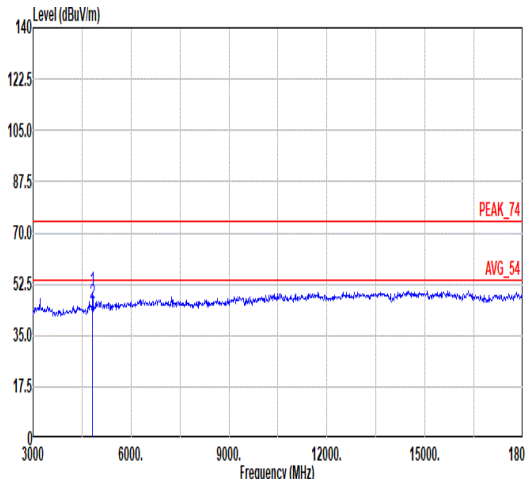


Mode	8																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																				
ANT	SISO																																																																																																																				
Pol.	Horizontal										Vertical																																																																																																										
Peak Avg																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>61.83</td><td>33.78</td><td>9.89</td><td>56.57</td><td>100</td><td>67</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>43.44</td><td>54.00</td><td>-10.56</td><td>56.34</td><td>33.78</td><td>9.89</td><td>56.57</td><td>100</td><td>67</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	48.93	74.00	-25.07	61.83	33.78	9.89	56.57	100	67	Peak	2	4824.00	43.44	54.00	-10.56	56.34	33.78	9.89	56.57	100	67	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>50.19</td><td>74.00</td><td>-23.81</td><td>63.09</td><td>33.78</td><td>9.89</td><td>56.57</td><td>100</td><td>158</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>45.70</td><td>54.00</td><td>-8.30</td><td>58.60</td><td>33.78</td><td>9.89</td><td>56.57</td><td>100</td><td>158</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.19	74.00	-23.81	63.09	33.78	9.89	56.57	100	158	Peak	2	4824.00	45.70	54.00	-8.30	58.60	33.78	9.89	56.57	100	158	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	48.93	74.00	-25.07	61.83	33.78	9.89	56.57	100	67	Peak																																																																																																										
2	4824.00	43.44	54.00	-10.56	56.34	33.78	9.89	56.57	100	67	Average																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	50.19	74.00	-23.81	63.09	33.78	9.89	56.57	100	158	Peak																																																																																																										
2	4824.00	45.70	54.00	-8.30	58.60	33.78	9.89	56.57	100	158	Average																																																																																																										



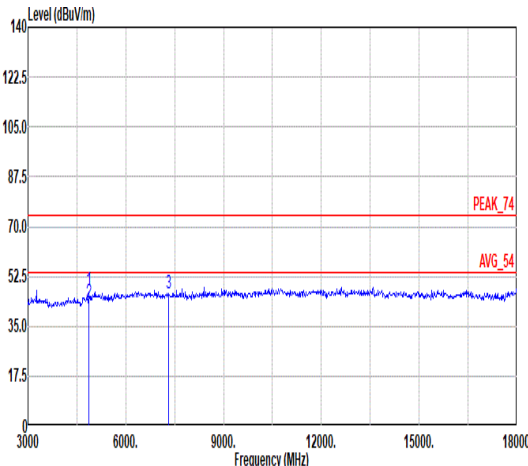
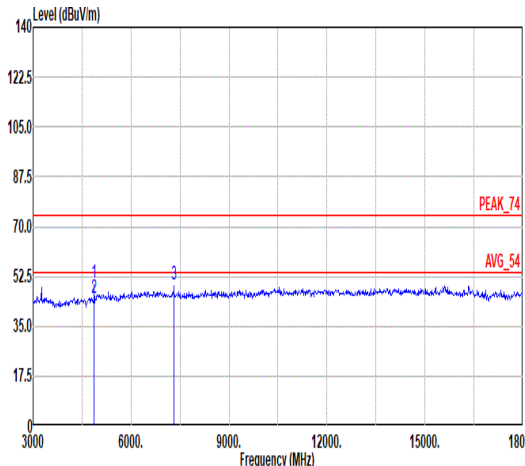


Mode	9																																																																																																																																																																																												
	Harmonic																																																																																																																																																																																												
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																												
ANT	SISO																																																																																																																																																																																												
Pol.	Horizontal										Vertical																																																																																																																																																																																		
Peak Avg																																																																																																																																																																																													
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>60.35</td><td>33.72</td><td>9.88</td><td>56.55</td><td>100</td><td>103</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>4874.00</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>56.17</td><td>33.72</td><td>9.88</td><td>56.55</td><td>100</td><td>103</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>7311.00</td><td>46.71</td><td>74.00</td><td>-27.29</td><td>58.88</td><td>35.60</td><td>11.45</td><td>59.22</td><td>---</td><td>---</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>												Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	4874.00	47.40	74.00	-26.60	60.35	33.72	9.88	56.55	100	103	Peak				2	4874.00	43.22	54.00	-10.78	56.17	33.72	9.88	56.55	100	103	Average				3	7311.00	46.71	74.00	-27.29	58.88	35.60	11.45	59.22	---	---	Peak				<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>49.97</td><td>74.00</td><td>-24.03</td><td>62.92</td><td>33.72</td><td>9.88</td><td>56.55</td><td>100</td><td>126</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>4874.00</td><td>44.90</td><td>54.00</td><td>-9.10</td><td>57.85</td><td>33.72</td><td>9.88</td><td>56.55</td><td>100</td><td>126</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>7311.00</td><td>49.48</td><td>74.00</td><td>-24.52</td><td>61.65</td><td>35.60</td><td>11.45</td><td>59.22</td><td>---</td><td>---</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	4874.00	49.97	74.00	-24.03	62.92	33.72	9.88	56.55	100	126	Peak				2	4874.00	44.90	54.00	-9.10	57.85	33.72	9.88	56.55	100	126	Average				3	7311.00	49.48	74.00	-24.52	61.65	35.60	11.45	59.22	---	---	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																				
1	4874.00	47.40	74.00	-26.60	60.35	33.72	9.88	56.55	100	103	Peak																																																																																																																																																																																		
2	4874.00	43.22	54.00	-10.78	56.17	33.72	9.88	56.55	100	103	Average																																																																																																																																																																																		
3	7311.00	46.71	74.00	-27.29	58.88	35.60	11.45	59.22	---	---	Peak																																																																																																																																																																																		
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																				
1	4874.00	49.97	74.00	-24.03	62.92	33.72	9.88	56.55	100	126	Peak																																																																																																																																																																																		
2	4874.00	44.90	54.00	-9.10	57.85	33.72	9.88	56.55	100	126	Average																																																																																																																																																																																		
3	7311.00	49.48	74.00	-24.52	61.65	35.60	11.45	59.22	---	---	Peak																																																																																																																																																																																		

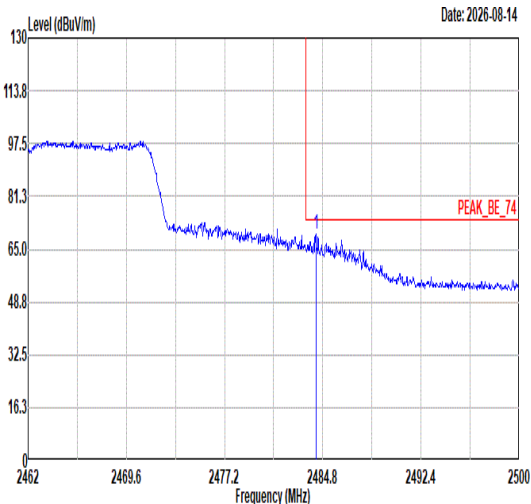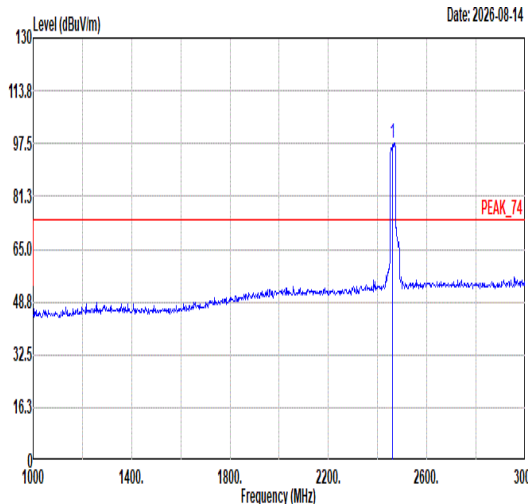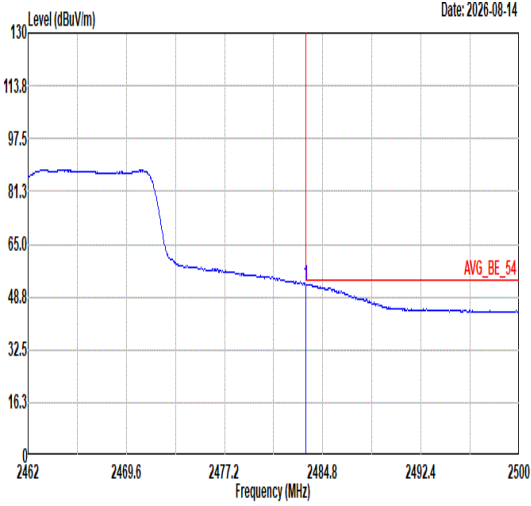
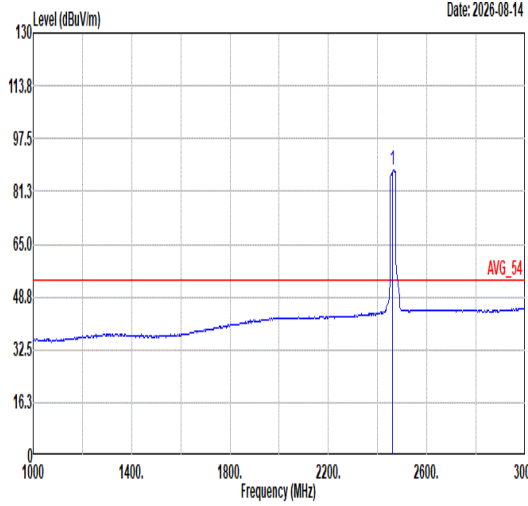


		10																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11b_CH11_2462MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.27</td><td>69.71</td><td>74.00</td><td>-4.29</td><td>62.68</td><td>32.05</td><td>8.44</td><td>33.46</td><td>300 181 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.27	69.71	74.00	-4.29	62.68	32.05	8.44	33.46	300 181 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.50</td><td>-----</td><td>-----</td><td>90.58</td><td>31.98</td><td>8.41</td><td>33.47</td><td>300 181 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.50	-----	-----	90.58	31.98	8.41	33.47
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.27	69.71	74.00	-4.29	62.68	32.05	8.44	33.46	300 181 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	97.50	-----	-----	90.58	31.98	8.41	33.47	300 181 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.66</td><td>54.00</td><td>-1.34</td><td>45.64</td><td>32.05</td><td>8.43</td><td>33.46</td><td>300 181 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.66	54.00	-1.34	45.64	32.05	8.43	33.46	300 181 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>87.66</td><td>-----</td><td>-----</td><td>80.74</td><td>31.98</td><td>8.41</td><td>33.47</td><td>300 181 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	87.66	-----	-----	80.74	31.98	8.41	33.47
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.51	52.66	54.00	-1.34	45.64	32.05	8.43	33.46	300 181 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	87.66	-----	-----	80.74	31.98	8.41	33.47	300 181 AVERAGE																																																																																

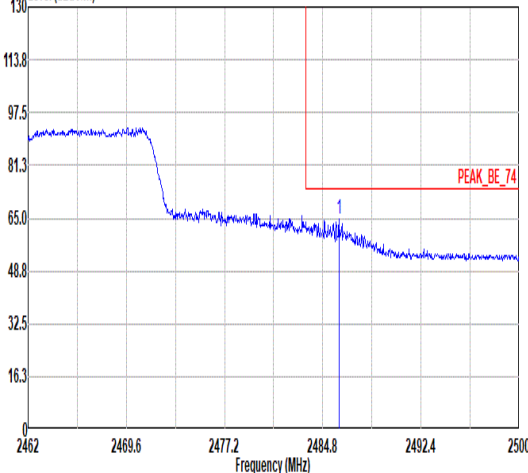
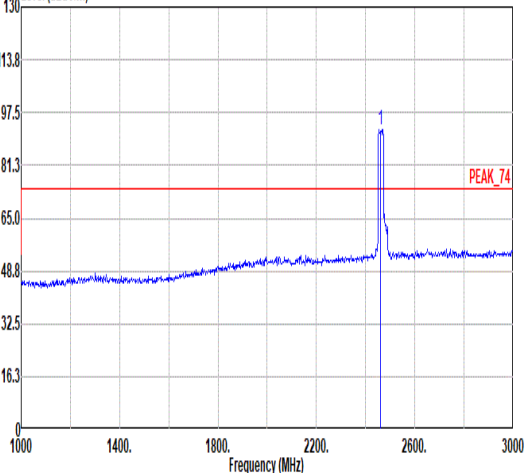
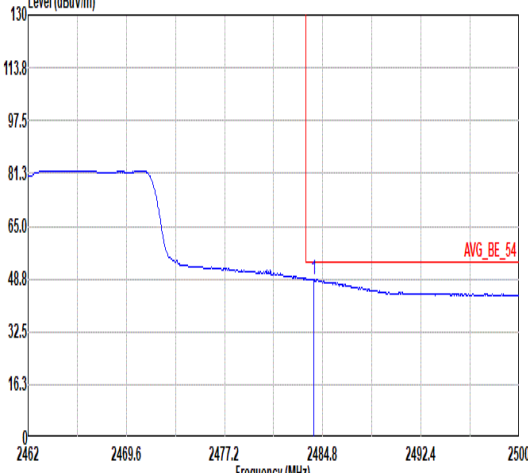
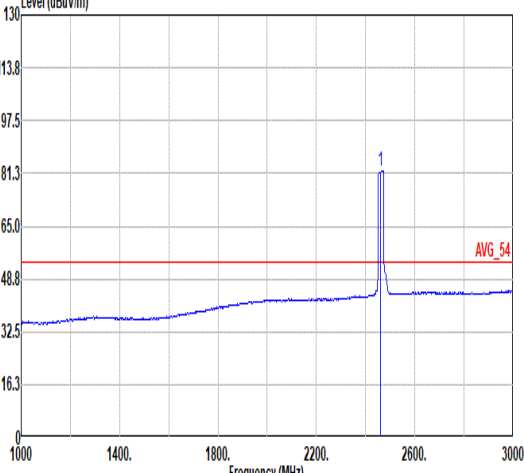


		10																																																																															
Mode		Band Edge																																																																															
		2400-2483.5_802.11b_CH11_2462MHz																																																																															
ANT		SISO																																																																															
Pol.		Vertical					Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2026-08-14  Frequency (MHz)					Level (dBuV/m) Date: 2026-08-14  Frequency (MHz)																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.05</td><td>64.93</td><td>74.00</td><td>-9.07</td><td>57.89</td><td>32.06</td><td>8.44</td><td>33.46</td><td>400 270 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.05	64.93	74.00	-9.07	57.89	32.06	8.44	33.46	400 270 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>92.36</td><td>-----</td><td>-----</td><td>85.44</td><td>31.98</td><td>8.41</td><td>33.47</td><td>400 270 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.36	-----	-----	85.44	31.98	8.41	33.47
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2486.05	64.93	74.00	-9.07	57.89	32.06	8.44	33.46	400 270 PEAK																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	92.36	-----	-----	85.44	31.98	8.41	33.47	400 270 PEAK																																																																								
Avg	Level (dBuV/m) Date: 2026-08-14  Frequency (MHz)					Level (dBuV/m) Date: 2026-08-14  Frequency (MHz)																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.12</td><td>48.80</td><td>54.00</td><td>-5.20</td><td>41.78</td><td>32.05</td><td>8.43</td><td>33.46</td><td>400 270 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	48.80	54.00	-5.20	41.78	32.05	8.43	33.46	400 270 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>82.05</td><td>-----</td><td>-----</td><td>75.10</td><td>32.00</td><td>8.42</td><td>33.47</td><td>400 270 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	82.05	-----	-----	75.10	32.00	8.42	33.47
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2484.12	48.80	54.00	-5.20	41.78	32.05	8.43	33.46	400 270 AVERAGE																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	82.05	-----	-----	75.10	32.00	8.42	33.47	400 270 AVERAGE																																																																								



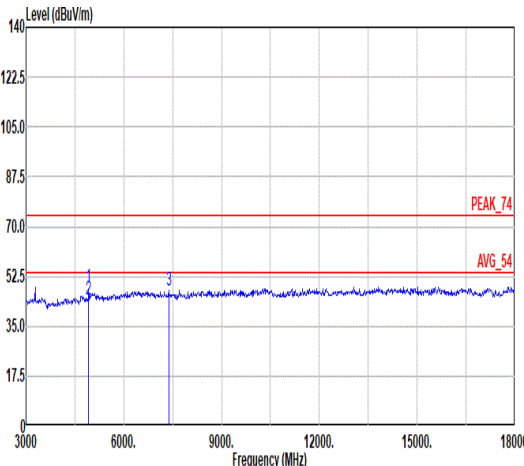
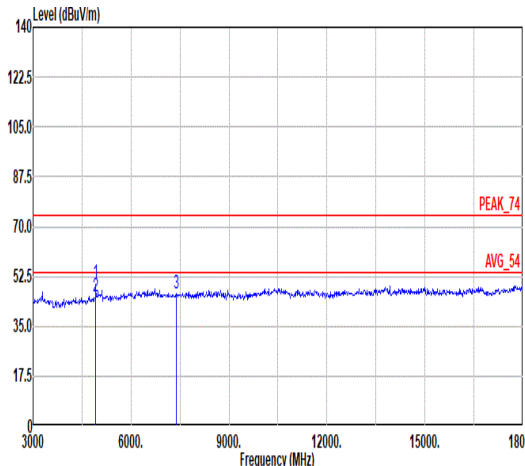


Mode	10																																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																							
ANT	SISO																																																																																																																																																																																																							
Pol.	Horizontal											Vertical																																																																																																																																																																																												
Peak Avg																																																																																																																																																																																																								
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>4924.00</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>61.39</td><td>34.03</td><td>9.87</td><td>56.53</td><td>102</td><td>145</td><td>Peak</td><td colspan="3"></td></tr><tr><td>2</td><td>4924.00</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>56.83</td><td>34.03</td><td>9.87</td><td>56.53</td><td>102</td><td>145</td><td>Average</td><td colspan="3"></td></tr><tr><td>3</td><td>7386.00</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>59.70</td><td>35.69</td><td>11.51</td><td>59.25</td><td>---</td><td>---</td><td>Peak</td><td colspan="3"></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	4924.00	48.76	74.00	-25.24	61.39	34.03	9.87	56.53	102	145	Peak				2	4924.00	44.20	54.00	-9.80	56.83	34.03	9.87	56.53	102	145	Average				3	7386.00	47.65	74.00	-26.35	59.70	35.69	11.51	59.25	---	---	Peak				<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>4924.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>62.73</td><td>34.03</td><td>9.87</td><td>56.53</td><td>100</td><td>163</td><td>Peak</td><td colspan="3"></td></tr><tr><td>2</td><td>4924.00</td><td>45.30</td><td>54.00</td><td>-8.70</td><td>57.93</td><td>34.03</td><td>9.87</td><td>56.53</td><td>100</td><td>163</td><td>Average</td><td colspan="3"></td></tr><tr><td>3</td><td>7386.00</td><td>46.23</td><td>74.00</td><td>-27.77</td><td>58.28</td><td>35.69</td><td>11.51</td><td>59.25</td><td>---</td><td>---</td><td>Peak</td><td colspan="3"></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	4924.00	50.10	74.00	-23.90	62.73	34.03	9.87	56.53	100	163	Peak				2	4924.00	45.30	54.00	-8.70	57.93	34.03	9.87	56.53	100	163	Average				3	7386.00	46.23	74.00	-27.77	58.28	35.69	11.51	59.25	---	---	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																															
1	4924.00	48.76	74.00	-25.24	61.39	34.03	9.87	56.53	102	145	Peak																																																																																																																																																																																													
2	4924.00	44.20	54.00	-9.80	56.83	34.03	9.87	56.53	102	145	Average																																																																																																																																																																																													
3	7386.00	47.65	74.00	-26.35	59.70	35.69	11.51	59.25	---	---	Peak																																																																																																																																																																																													
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																															
1	4924.00	50.10	74.00	-23.90	62.73	34.03	9.87	56.53	100	163	Peak																																																																																																																																																																																													
2	4924.00	45.30	54.00	-8.70	57.93	34.03	9.87	56.53	100	163	Average																																																																																																																																																																																													
3	7386.00	46.23	74.00	-27.77	58.28	35.69	11.51	59.25	---	---	Peak																																																																																																																																																																																													

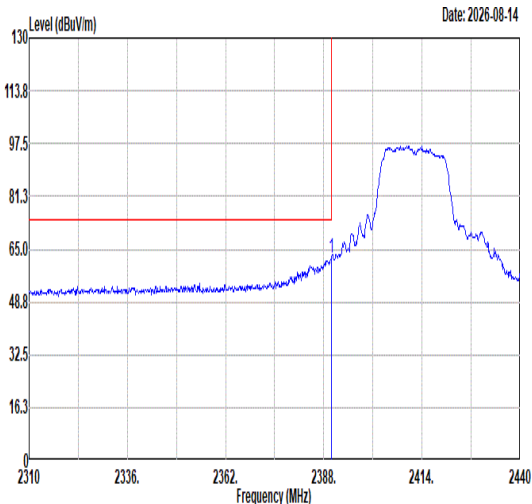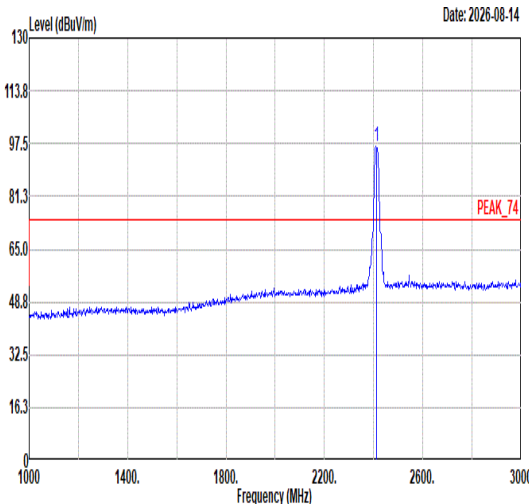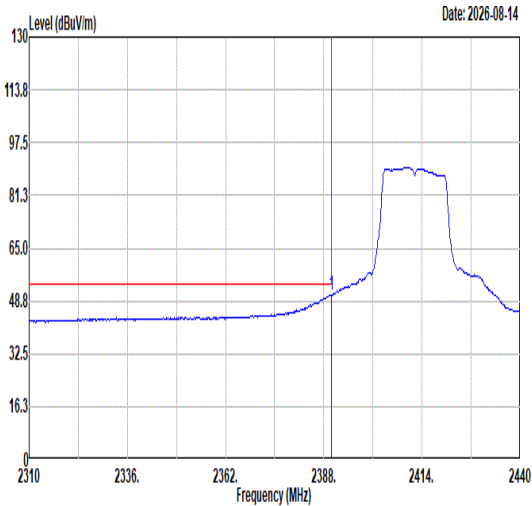
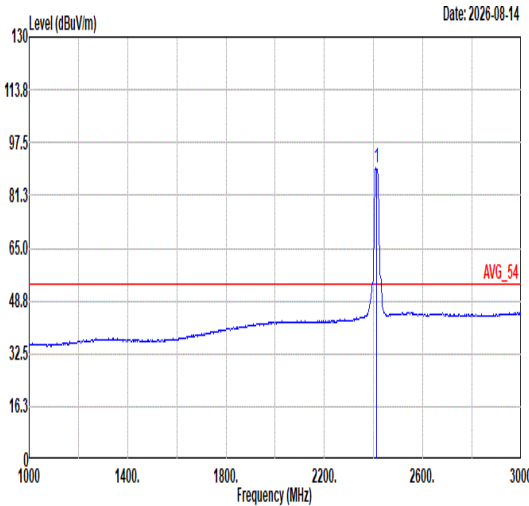


		11																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT		SISO																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2026-08-14 Frequency (MHz)					 Level (dBuV/m) Date: 2026-08-14 Frequency (MHz) PEAK_74																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>62.32</td><td>74.00</td><td>-11.68</td><td>55.83</td><td>31.69</td><td>8.31</td><td>33.51</td><td>365</td><td>181 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	62.32	74.00	-11.68	55.83	31.69	8.31	33.51	365	181 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.56</td><td>-----</td><td>-----</td><td>89.96</td><td>31.76</td><td>8.34</td><td>33.50</td><td>365</td><td>181 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.56	-----	-----	89.96	31.76	8.34	33.50	365
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	62.32	74.00	-11.68	55.83	31.69	8.31	33.51	365	181 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	96.56	-----	-----	89.96	31.76	8.34	33.50	365	181 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2026-08-14 Frequency (MHz)					 Level (dBuV/m) Date: 2026-08-14 Frequency (MHz) AVG_54																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>44.27</td><td>31.69</td><td>8.31</td><td>33.51</td><td>365</td><td>181 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.76	54.00	-3.24	44.27	31.69	8.31	33.51	365	181 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>89.65</td><td>-----</td><td>-----</td><td>83.05</td><td>31.76</td><td>8.34</td><td>33.50</td><td>365</td><td>181 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.65	-----	-----	83.05	31.76	8.34	33.50	365
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	50.76	54.00	-3.24	44.27	31.69	8.31	33.51	365	181 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	89.65	-----	-----	83.05	31.76	8.34	33.50	365	181 AVERAGE																																																																																	

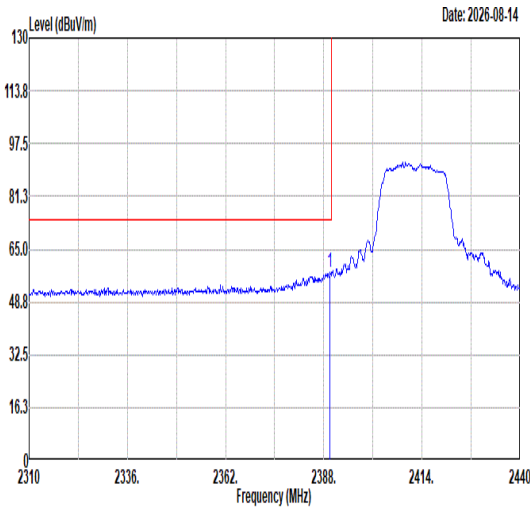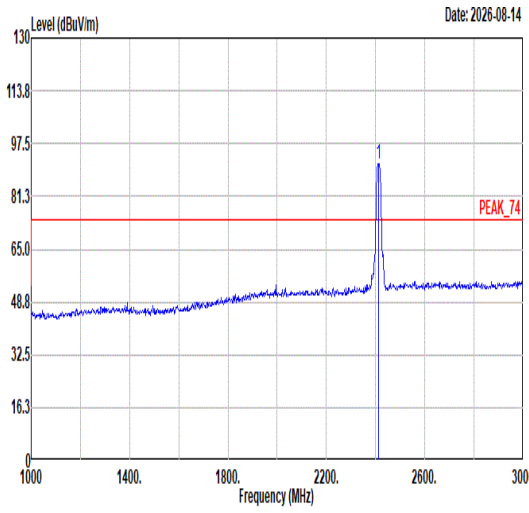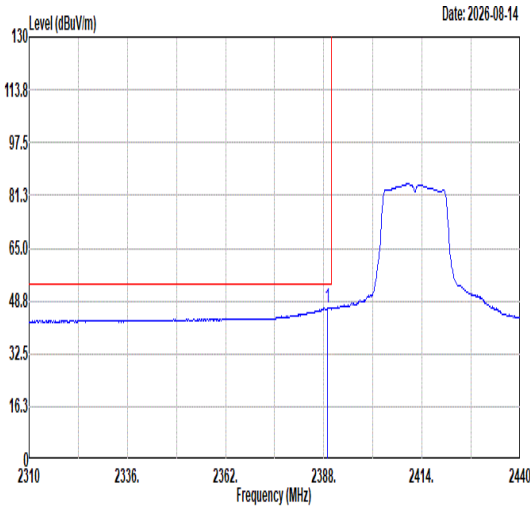
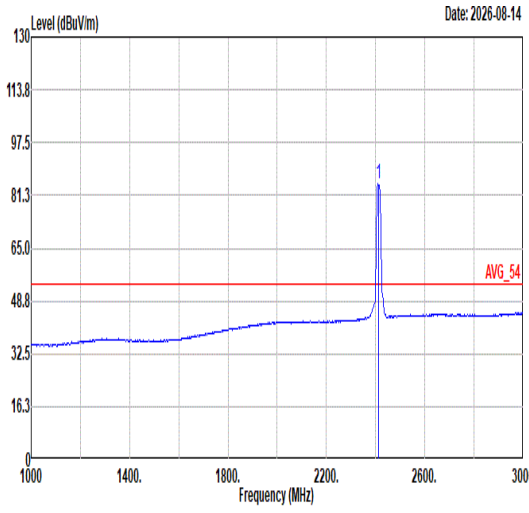


		11																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.69</td><td>57.66</td><td>74.00</td><td>-16.34</td><td>51.17</td><td>31.69</td><td>8.31</td><td>33.51</td><td>379</td><td>288 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.69	57.66	74.00	-16.34	51.17	31.69	8.31	33.51	379	288 PEAK	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>91.36</td><td>-----</td><td>-----</td><td>84.76</td><td>31.76</td><td>8.34</td><td>33.50</td><td>379</td><td>288 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	91.36	-----	-----	84.76	31.76	8.34	33.50	379	288 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.69	57.66	74.00	-16.34	51.17	31.69	8.31	33.51	379	288 PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	91.36	-----	-----	84.76	31.76	8.34	33.50	379	288 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.04</td><td>46.60</td><td>54.00</td><td>-7.40</td><td>40.11</td><td>31.69</td><td>8.31</td><td>33.51</td><td>379</td><td>288 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.04	46.60	54.00	-7.40	40.11	31.69	8.31	33.51	379	288 AVERAGE	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>84.66</td><td>-----</td><td>-----</td><td>78.06</td><td>31.76</td><td>8.34</td><td>33.50</td><td>379</td><td>288 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	84.66	-----	-----	78.06	31.76	8.34	33.50	379	288 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.04	46.60	54.00	-7.40	40.11	31.69	8.31	33.51	379	288 AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	84.66	-----	-----	78.06	31.76	8.34	33.50	379	288 AVERAGE																																																																																	



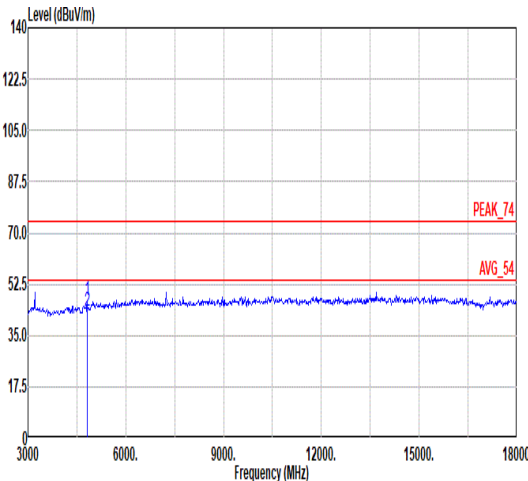
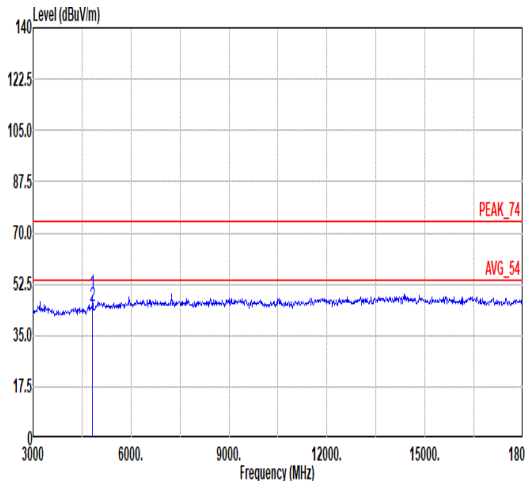


Mode	11																																																																																																																
	Harmonic																																																																																																																
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																
ANT	SISO																																																																																																																
Pol.	Horizontal										Vertical																																																																																																						
Peak Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>47.21</td><td>74.00</td><td>-26.79</td><td>60.11</td><td>33.78</td><td>9.89</td><td>56.57</td><td>100</td><td>105</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>56.28</td><td>33.78</td><td>9.89</td><td>56.57</td><td>100</td><td>105</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4824.00	47.21	74.00	-26.79	60.11	33.78	9.89	56.57	100	105	Peak	2	4824.00	43.38	54.00	-10.62	56.28	33.78	9.89	56.57	100	105	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>49.24</td><td>74.00</td><td>-24.76</td><td>62.14</td><td>33.78</td><td>9.89</td><td>56.57</td><td>122</td><td>180</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>45.03</td><td>54.00</td><td>-8.97</td><td>57.93</td><td>33.78</td><td>9.89</td><td>56.57</td><td>122</td><td>180</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4824.00	49.24	74.00	-24.76	62.14	33.78	9.89	56.57	122	180	Peak	2	4824.00	45.03	54.00	-8.97	57.93	33.78	9.89	56.57	122	180	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																										
1	4824.00	47.21	74.00	-26.79	60.11	33.78	9.89	56.57	100	105	Peak																																																																																																						
2	4824.00	43.38	54.00	-10.62	56.28	33.78	9.89	56.57	100	105	Average																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																										
1	4824.00	49.24	74.00	-24.76	62.14	33.78	9.89	56.57	122	180	Peak																																																																																																						
2	4824.00	45.03	54.00	-8.97	57.93	33.78	9.89	56.57	122	180	Average																																																																																																						



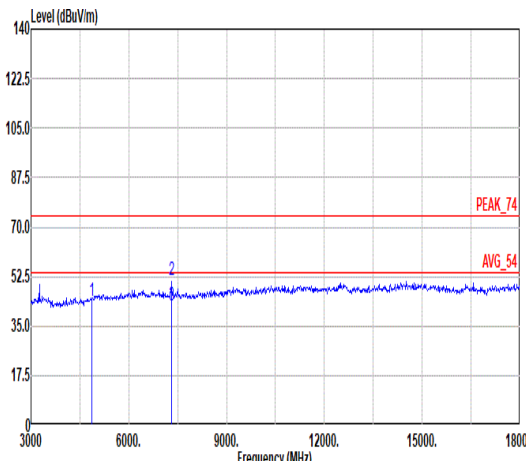
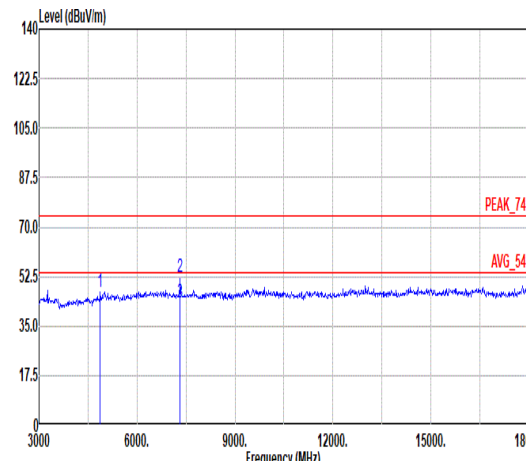


Mode	12																																																																										
	Harmonic																																																																										
	2400-2483.5_802.11g_CH06_2437MHz																																																																										
ANT	SISO																																																																										
Pol.	Horizontal																																																																										
Peak Avg																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>43.99</td><td>74.00</td><td>-30.01</td><td>56.94</td><td>33.72</td><td>9.88</td><td>56.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.00</td><td>74.00</td><td>-23.00</td><td>63.17</td><td>35.60</td><td>11.45</td><td>59.22</td><td>124</td><td>104</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>54.61</td><td>35.60</td><td>11.45</td><td>59.22</td><td>124</td><td>104</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	43.99	74.00	-30.01	56.94	33.72	9.88	56.55	---	---	Peak	2	7311.00	51.00	74.00	-23.00	63.17	35.60	11.45	59.22	124	104	Peak	3	7311.00	42.44	54.00	-11.56	54.61	35.60	11.45	59.22	124	104	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	4874.00	43.99	74.00	-30.01	56.94	33.72	9.88	56.55	---	---	Peak																																																																
2	7311.00	51.00	74.00	-23.00	63.17	35.60	11.45	59.22	124	104	Peak																																																																
3	7311.00	42.44	54.00	-11.56	54.61	35.60	11.45	59.22	124	104	Average																																																																
Vertical																																																																											
																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>60.18</td><td>33.72</td><td>9.88</td><td>56.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>52.29</td><td>74.00</td><td>-21.71</td><td>64.46</td><td>35.60</td><td>11.45</td><td>59.22</td><td>100</td><td>263</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>55.45</td><td>35.60</td><td>11.45</td><td>59.22</td><td>100</td><td>263</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	47.23	74.00	-26.77	60.18	33.72	9.88	56.55	---	---	Peak	2	7311.00	52.29	74.00	-21.71	64.46	35.60	11.45	59.22	100	263	Peak	3	7311.00	43.28	54.00	-10.72	55.45	35.60	11.45	59.22	100	263	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	4874.00	47.23	74.00	-26.77	60.18	33.72	9.88	56.55	---	---	Peak																																																																
2	7311.00	52.29	74.00	-21.71	64.46	35.60	11.45	59.22	100	263	Peak																																																																
3	7311.00	43.28	54.00	-10.72	55.45	35.60	11.45	59.22	100	263	Average																																																																

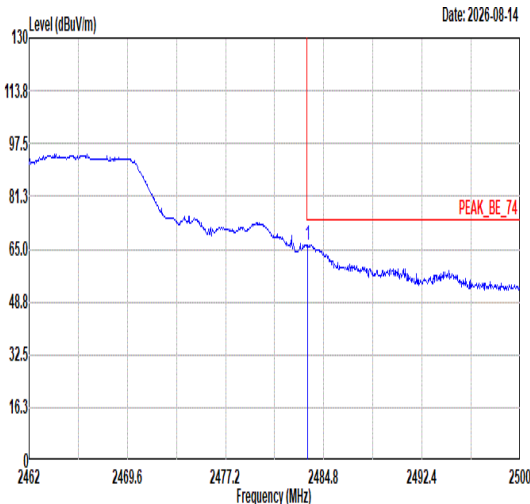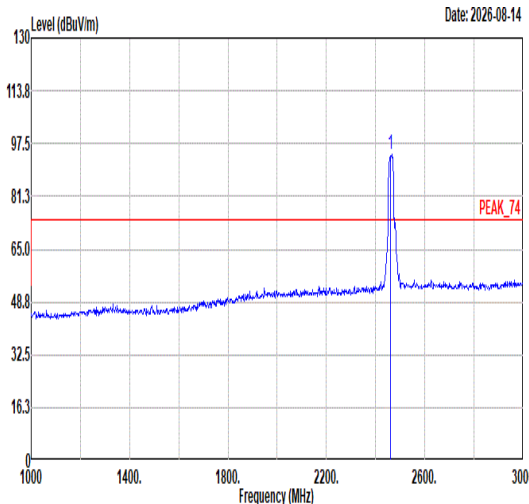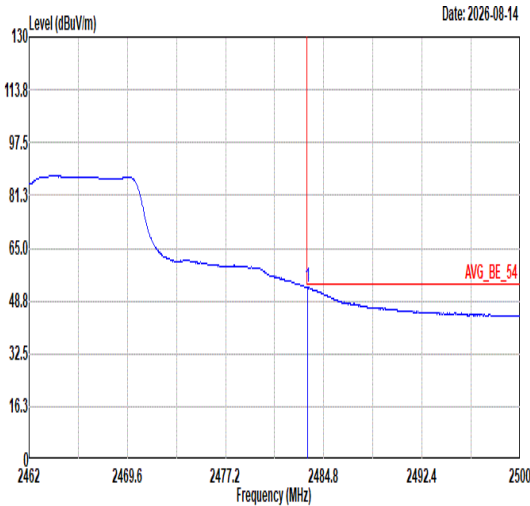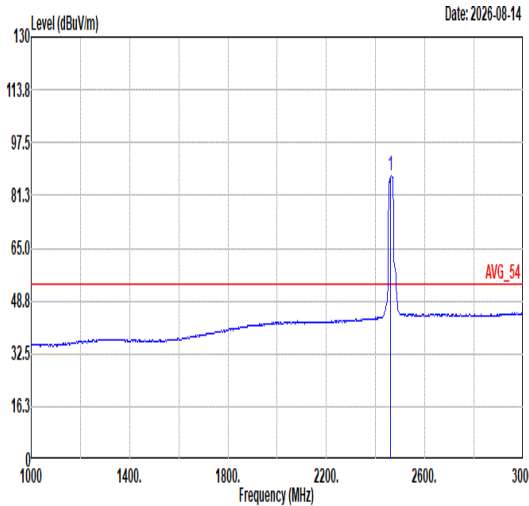

		13																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11g_CH11_2462MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>66.40</td><td>74.00</td><td>-7.60</td><td>59.38</td><td>32.05</td><td>8.43</td><td>33.46</td><td>131 244 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	66.40	74.00	-7.60	59.38	32.05	8.43	33.46	131 244 PEAK	 Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.10</td><td>-----</td><td>87.18</td><td>31.98</td><td>8.41</td><td>33.47</td><td>131 244 PEAK</td><td></td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.10	-----	87.18	31.98	8.41	33.47	131 244 PEAK	
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.55	66.40	74.00	-7.60	59.38	32.05	8.43	33.46	131 244 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	94.10	-----	87.18	31.98	8.41	33.47	131 244 PEAK																																																																																		
Avg	 Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>53.09</td><td>54.00</td><td>-0.91</td><td>46.07</td><td>32.05</td><td>8.43</td><td>33.46</td><td>131 244 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	53.09	54.00	-0.91	46.07	32.05	8.43	33.46	131 244 AVERAGE	 Level (dBuV/m) Date: 2026-08-14 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>87.13</td><td>-----</td><td>80.23</td><td>31.97</td><td>8.41</td><td>33.48</td><td>131 244 AVERAGE</td><td></td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	87.13	-----	80.23	31.97	8.41	33.48	131 244 AVERAGE	
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.55	53.09	54.00	-0.91	46.07	32.05	8.43	33.46	131 244 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	87.13	-----	80.23	31.97	8.41	33.48	131 244 AVERAGE																																																																																		

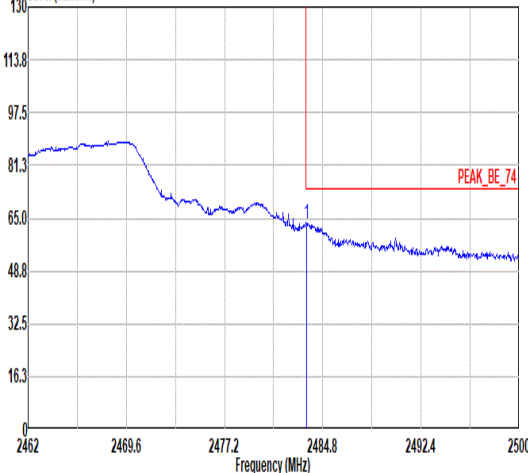
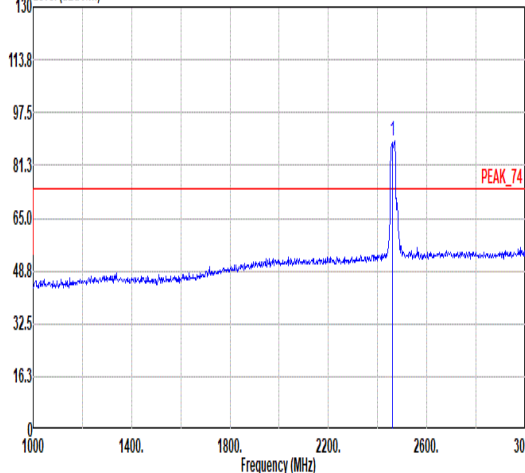
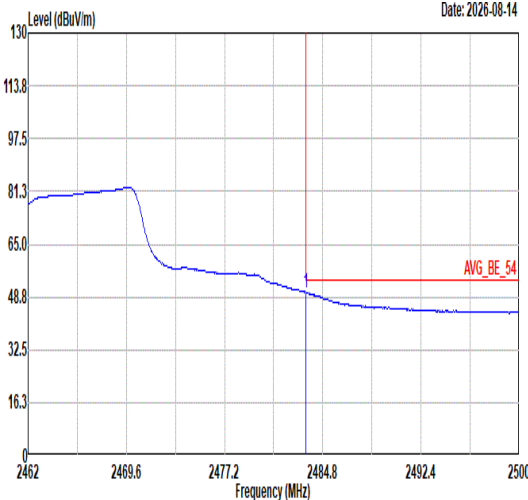
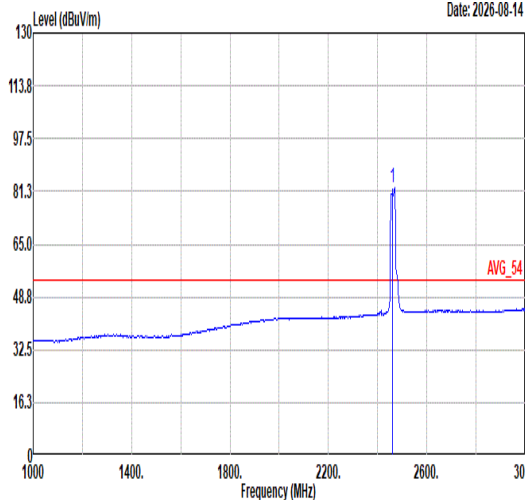


Mode	13																																									
	Band Edge																																									
	2400-2483.5_802.11g_CH11_2462MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2026-08-14  PEAK_BE_74 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.55</td><td>63.39</td><td>74.00</td><td>-10.61</td><td>56.37</td><td>32.05</td><td>8.43</td><td>33.46</td><td>392</td><td>275 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2026-08-14  PEAK_74 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>88.78</td><td>-----</td><td>-----</td><td>81.83</td><td>32.00</td><td>8.42</td><td>33.47</td><td>392</td><td>275 PEAK</td></tr></tbody></table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.55	63.39	74.00	-10.61	56.37	32.05	8.43	33.46	392	275 PEAK	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	88.78	-----	-----	81.83	32.00	8.42	33.47	392	275 PEAK	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 2483.55	63.39	74.00	-10.61	56.37	32.05	8.43	33.46	392	275 PEAK																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 2462.00	88.78	-----	-----	81.83	32.00	8.42	33.47	392	275 PEAK																																	
Avg	Level (dBuV/m) Date: 2026-08-14  AVG_BE_54 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>50.12</td><td>54.00</td><td>-3.88</td><td>43.10</td><td>32.05</td><td>8.43</td><td>33.46</td><td>392</td><td>275 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2026-08-14  AVG_54 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>82.43</td><td>-----</td><td>-----</td><td>75.48</td><td>32.00</td><td>8.42</td><td>33.47</td><td>392</td><td>275 AVERAGE</td></tr></tbody></table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.51	50.12	54.00	-3.88	43.10	32.05	8.43	33.46	392	275 AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	82.43	-----	-----	75.48	32.00	8.42	33.47	392	275 AVERAGE	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 2483.51	50.12	54.00	-3.88	43.10	32.05	8.43	33.46	392	275 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 2462.00	82.43	-----	-----	75.48	32.00	8.42	33.47	392	275 AVERAGE																																	







Mode	13																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																									
ANT	SISO																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>59.58</td><td>34.03</td><td>9.87</td><td>56.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>64.23</td><td>35.69</td><td>11.51</td><td>59.25</td><td>102</td><td>140</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>55.04</td><td>35.69</td><td>11.51</td><td>59.25</td><td>102</td><td>140</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4924.00	46.95	74.00	-27.05	59.58	34.03	9.87	56.53	---	---	Peak	2	7386.00	52.18	74.00	-21.82	64.23	35.69	11.51	59.25	102	140	Peak	3	7386.00	42.99	54.00	-11.01	55.04	35.69	11.51	59.25	102	140	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>60.26</td><td>34.03</td><td>9.87</td><td>56.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>65.34</td><td>35.69</td><td>11.51</td><td>59.25</td><td>100</td><td>157</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>44.66</td><td>54.00</td><td>-9.34</td><td>56.71</td><td>35.69</td><td>11.51</td><td>59.25</td><td>100</td><td>157</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4924.00	47.63	74.00	-26.37	60.26	34.03	9.87	56.53	---	---	Peak	2	7386.00	53.29	74.00	-20.71	65.34	35.69	11.51	59.25	100	157	Peak	3	7386.00	44.66	54.00	-9.34	56.71	35.69	11.51	59.25	100	157	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																		
1	4924.00	46.95	74.00	-27.05	59.58	34.03	9.87	56.53	---	---	Peak																																																																																																																															
2	7386.00	52.18	74.00	-21.82	64.23	35.69	11.51	59.25	102	140	Peak																																																																																																																															
3	7386.00	42.99	54.00	-11.01	55.04	35.69	11.51	59.25	102	140	Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																		
1	4924.00	47.63	74.00	-26.37	60.26	34.03	9.87	56.53	---	---	Peak																																																																																																																															
2	7386.00	53.29	74.00	-20.71	65.34	35.69	11.51	59.25	100	157	Peak																																																																																																																															
3	7386.00	44.66	54.00	-9.34	56.71	35.69	11.51	59.25	100	157	Average																																																																																																																															

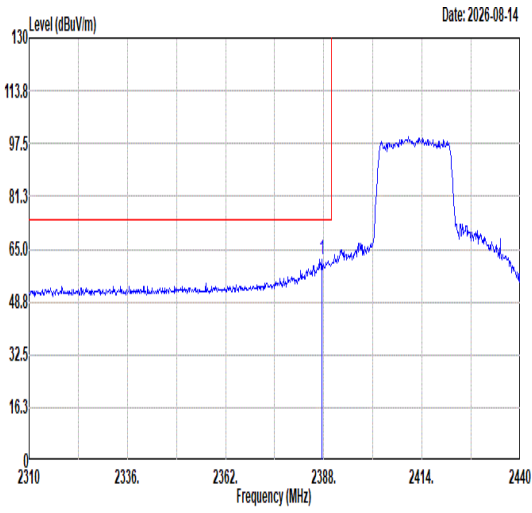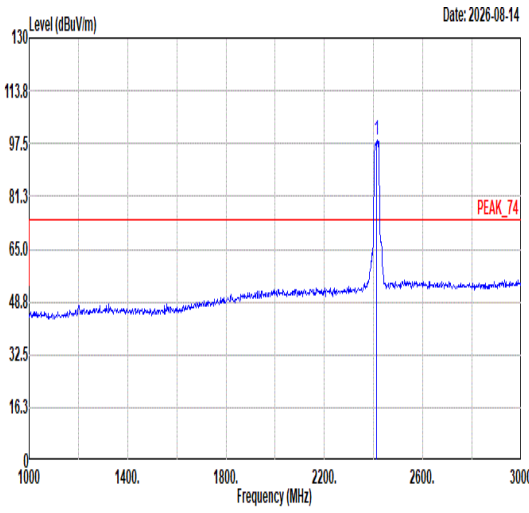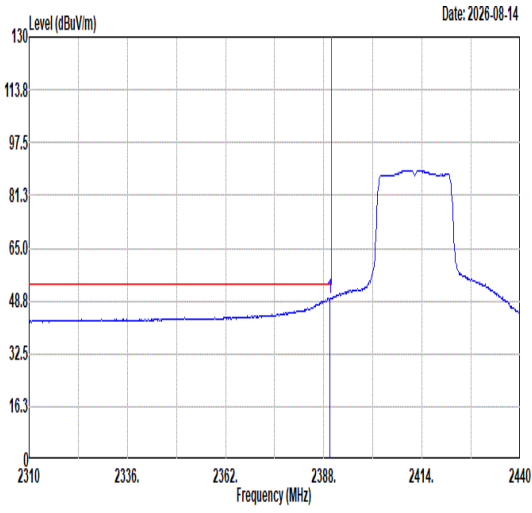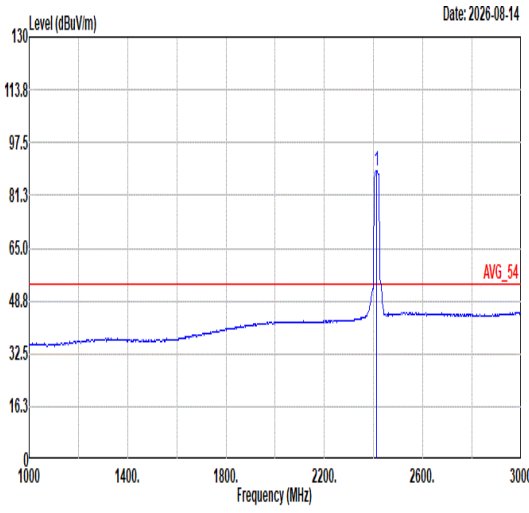


		14																																																																																																																										
Mode		Band Edge																																																																																																																										
		2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																																										
ANT		SISO																																																																																																																										
Pol.		Horizontal					Fundamental																																																																																																																					
Peak	 Level (dBuV/m) vs Frequency (MHz) for Horizontal Peak. The plot shows a signal rising from 48.8 dBuV/m at 2310 MHz to a peak of 62.02 dBuV/m at 2387.48 MHz, then dropping to 48.8 dBuV/m at 2440 MHz. A red limit line is at 74.00 dBuV/m.					 Level (dBuV/m) vs Frequency (MHz) for Fundamental Peak. The plot shows a signal rising from 48.8 dBuV/m at 1000 MHz to a peak of 98.48 dBuV/m at 2412.00 MHz, then dropping to 48.8 dBuV/m at 3000 MHz. A red limit line is at 74.00 dBuV/m.																																																																																																																						
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	62.02	74.00	-11.98	55.53	31.69	8.31	33.51	322 186 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.48	-----	-----	91.85	31.78	8.35	33.50	322 186 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.48</td><td>-----</td><td>-----</td><td>91.85</td><td>31.78</td><td>8.35</td><td>33.50</td><td>322 186 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.48	-----	-----	91.85	31.78	8.35	33.50
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2387.48	62.02	74.00	-11.98	55.53	31.69	8.31	33.51	322 186 PEAK																																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2412.00	98.48	-----	-----	91.85	31.78	8.35	33.50	322 186 PEAK																																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2412.00	98.48	-----	-----	91.85	31.78	8.35	33.50	322 186 PEAK																																																																																																																			
Avg	 Level (dBuV/m) vs Frequency (MHz) for Horizontal Avg. The plot shows a signal rising from 48.8 dBuV/m at 2310 MHz to an average of 49.49 dBuV/m at 2389.69 MHz, then dropping to 48.8 dBuV/m at 2440 MHz. A red limit line is at 54.00 dBuV/m.					 Level (dBuV/m) vs Frequency (MHz) for Fundamental Avg. The plot shows a signal rising from 48.8 dBuV/m at 1000 MHz to an average of 88.86 dBuV/m at 2412.00 MHz, then dropping to 48.8 dBuV/m at 3000 MHz. A red limit line is at 54.00 dBuV/m.																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>49.49</td><td>54.00</td><td>-4.51</td><td>43.00</td><td>31.69</td><td>8.31</td><td>33.51</td><td>322 186 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	49.49	54.00	-4.51	43.00	31.69	8.31	33.51	322 186 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>88.86</td><td>-----</td><td>-----</td><td>82.25</td><td>31.77</td><td>8.34</td><td>33.50</td><td>322 186 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	88.86	-----	-----	82.25	31.77	8.34	33.50	322 186 AVERAGE																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2389.69	49.49	54.00	-4.51	43.00	31.69	8.31	33.51	322 186 AVERAGE																																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2412.00	88.86	-----	-----	82.25	31.77	8.34	33.50	322 186 AVERAGE																																																																																																																			

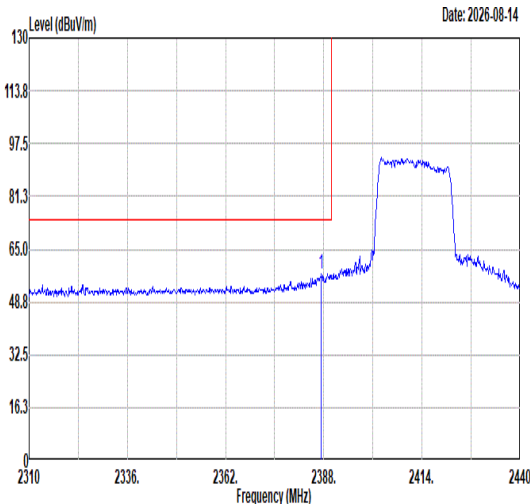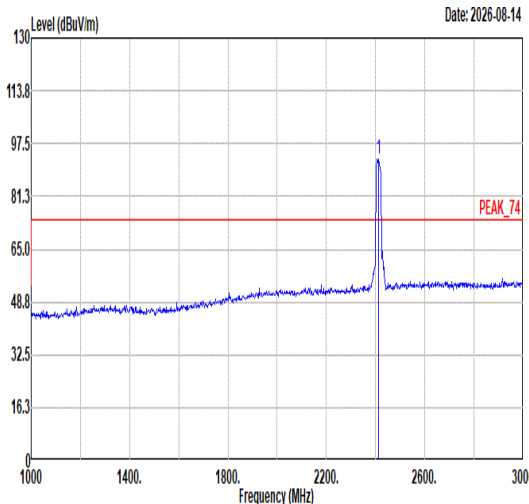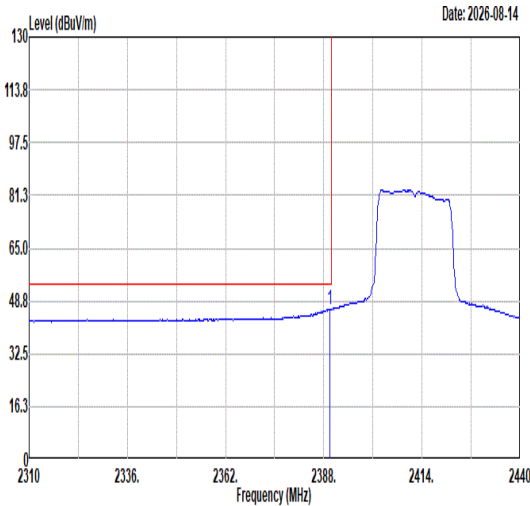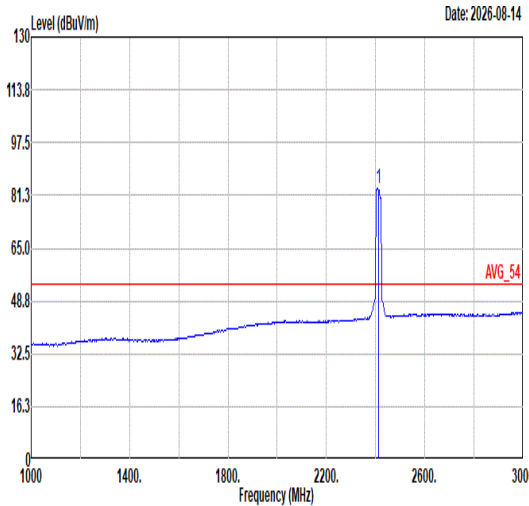

		14																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2387.35</td><td>57.62</td><td>74.00</td><td>-16.38</td><td>51.14</td><td>31.69</td><td>8.30</td><td>33.51</td><td>335</td><td>280 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2387.35	57.62	74.00	-16.38	51.14	31.69	8.30	33.51	335	280 PEAK	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>92.56</td><td>-----</td><td>-----</td><td>86.00</td><td>31.74</td><td>8.33</td><td>33.51</td><td>335</td><td>280 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	92.56	-----	-----	86.00	31.74	8.33	33.51	335	280 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2387.35	57.62	74.00	-16.38	51.14	31.69	8.30	33.51	335	280 PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	92.56	-----	-----	86.00	31.74	8.33	33.51	335	280 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.69</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>39.78</td><td>31.69</td><td>8.31</td><td>33.51</td><td>335</td><td>280 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.69	46.27	54.00	-7.73	39.78	31.69	8.31	33.51	335	280 AVERAGE	 Level (dBuV/m) Date: 2026-08-14 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>83.22</td><td>-----</td><td>-----</td><td>76.63</td><td>31.75</td><td>8.34</td><td>33.50</td><td>335</td><td>280 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	83.22	-----	-----	76.63	31.75	8.34	33.50	335	280 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.69	46.27	54.00	-7.73	39.78	31.69	8.31	33.51	335	280 AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	83.22	-----	-----	76.63	31.75	8.34	33.50	335	280 AVERAGE																																																																																	

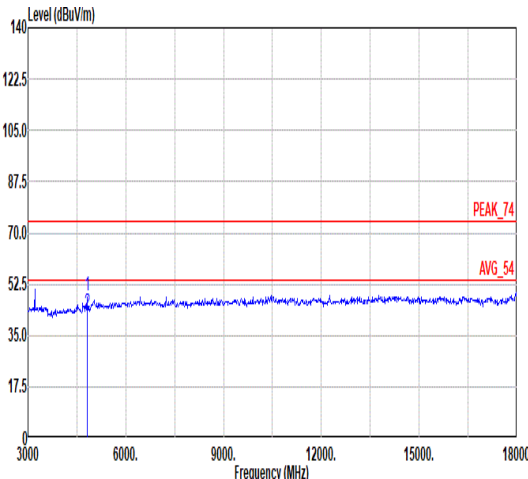

Mode	14																																																																
	Harmonic																																																																
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																
ANT	SISO																																																																
Pol.	Horizontal																																																																
Peak Avg																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.63</td><td>74.00</td><td>-25.37</td><td>61.53</td><td>33.78</td><td>9.89</td><td>56.57</td><td>120</td><td>156</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>42.70</td><td>54.00</td><td>-11.30</td><td>55.60</td><td>33.78</td><td>9.89</td><td>56.57</td><td>120</td><td>156</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	48.63	74.00	-25.37	61.53	33.78	9.89	56.57	120	156	Peak	2	4824.00	42.70	54.00	-11.30	55.60	33.78	9.89	56.57	120	156	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	4824.00	48.63	74.00	-25.37	61.53	33.78	9.89	56.57	120	156	Peak																																																						
2	4824.00	42.70	54.00	-11.30	55.60	33.78	9.89	56.57	120	156	Average																																																						

	Limit	Read	Ant	Cable	Preamp	APos	TPos				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4824.00	49.44	74.00	-24.56	62.34	33.78	9.89	56.57	154	175	Peak
2	4824.00	44.34	54.00	-9.66	57.24	33.78	9.89	56.57	154	175	Average







Mode	15																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal																																																																																	
Peak Avg																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>57.29</td><td>33.72</td><td>9.88</td><td>56.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>62.70</td><td>35.60</td><td>11.45</td><td>59.22</td><td>105</td><td>172</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>54.06</td><td>35.60</td><td>11.45</td><td>59.22</td><td>105</td><td>172</td><td>Average</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4874.00	44.34	74.00	-29.66	57.29	33.72	9.88	56.55	---	---	Peak	2	7311.00	50.53	74.00	-23.47	62.70	35.60	11.45	59.22	105	172	Peak	3	7311.00	41.89	54.00	-12.11	54.06	35.60	11.45	59.22	105	172	Average
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4874.00	44.34	74.00	-29.66	57.29	33.72	9.88	56.55	---	---	Peak																																																																							
2	7311.00	50.53	74.00	-23.47	62.70	35.60	11.45	59.22	105	172	Peak																																																																							
3	7311.00	41.89	54.00	-12.11	54.06	35.60	11.45	59.22	105	172	Average																																																																							
Vertical																																																																																		
Peak Avg																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.49</td><td>74.00</td><td>-29.51</td><td>57.44</td><td>33.72</td><td>9.88</td><td>56.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.53</td><td>74.00</td><td>-22.47</td><td>63.70</td><td>35.60</td><td>11.45</td><td>59.22</td><td>100</td><td>192</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>55.19</td><td>35.60</td><td>11.45</td><td>59.22</td><td>100</td><td>192</td><td>Average</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4874.00	44.49	74.00	-29.51	57.44	33.72	9.88	56.55	---	---	Peak	2	7311.00	51.53	74.00	-22.47	63.70	35.60	11.45	59.22	100	192	Peak	3	7311.00	43.02	54.00	-10.98	55.19	35.60	11.45	59.22	100	192	Average
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4874.00	44.49	74.00	-29.51	57.44	33.72	9.88	56.55	---	---	Peak																																																																							
2	7311.00	51.53	74.00	-22.47	63.70	35.60	11.45	59.22	100	192	Peak																																																																							
3	7311.00	43.02	54.00	-10.98	55.19	35.60	11.45	59.22	100	192	Average																																																																							





Mode	16																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-08-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.65</td><td>69.76</td><td>74.00</td><td>-4.24</td><td>62.72</td><td>32.06</td><td>8.44</td><td>33.46</td><td>382 200 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.65	69.76	74.00	-4.24	62.72	32.06	8.44	33.46	382 200 PEAK	Level (dBuV/m) Date: 2026-08-15 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.32</td><td>-----</td><td>-----</td><td>91.42</td><td>31.97</td><td>8.41</td><td>33.48</td><td>382 200 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.32	-----	-----	91.42	31.97	8.41	33.48	382 200 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2484.65	69.76	74.00	-4.24	62.72	32.06	8.44	33.46	382 200 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	98.32	-----	-----	91.42	31.97	8.41	33.48	382 200 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2026-08-14 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.70</td><td>53.39</td><td>54.00</td><td>-0.61</td><td>46.37</td><td>32.05</td><td>8.43</td><td>33.46</td><td>382 200 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.70	53.39	54.00	-0.61	46.37	32.05	8.43	33.46	382 200 AVERAGE	Level (dBuV/m) Date: 2026-08-15 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>88.94</td><td>-----</td><td>-----</td><td>82.04</td><td>31.97</td><td>8.41</td><td>33.48</td><td>382 200 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	88.94	-----	-----	82.04	31.97	8.41	33.48	382 200 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.70	53.39	54.00	-0.61	46.37	32.05	8.43	33.46	382 200 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	88.94	-----	-----	82.04	31.97	8.41	33.48	382 200 AVERAGE																																																																									

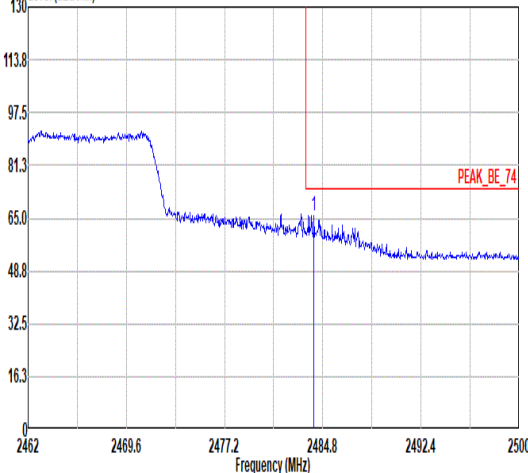
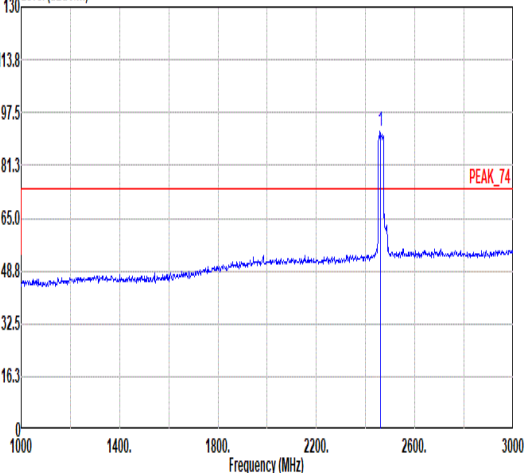
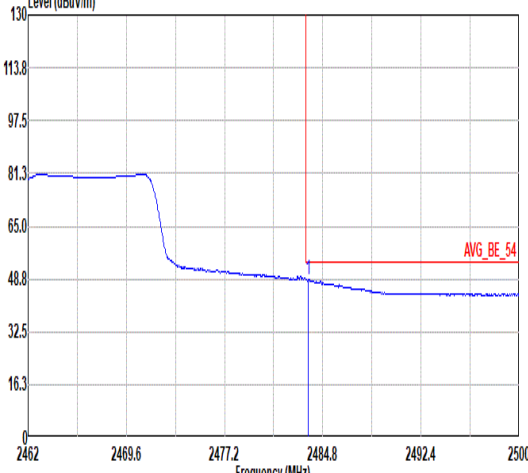
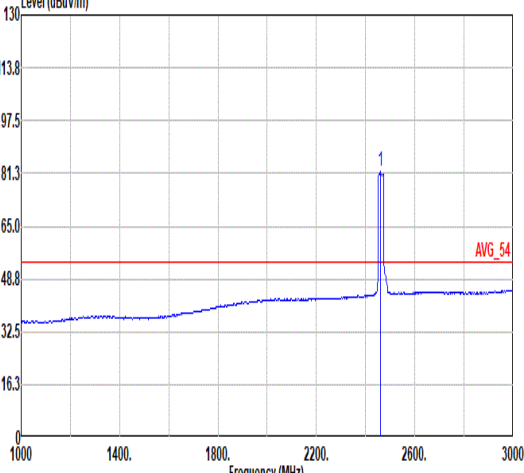


		16																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-08-14  PEAK_BE_74					Level (dBuV/m) Date: 2026-08-15  PEAK_74																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.12</td><td>65.75</td><td>74.00</td><td>-8.25</td><td>58.73</td><td>32.05</td><td>8.43</td><td>33.46</td><td>391 246 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	65.75	74.00	-8.25	58.73	32.05	8.43	33.46	391 246 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.64</td><td>-----</td><td>84.77</td><td>31.95</td><td>8.40</td><td>33.48</td><td>391</td><td>246 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.64	-----	84.77	31.95	8.40	33.48	391
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2484.12	65.75	74.00	-8.25	58.73	32.05	8.43	33.46	391 246 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	91.64	-----	84.77	31.95	8.40	33.48	391	246 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2026-08-14  AVG_BE_54					Level (dBuV/m) Date: 2026-08-15  AVG_54																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>48.73</td><td>54.00</td><td>-5.27</td><td>41.71</td><td>32.05</td><td>8.43</td><td>33.46</td><td>391 246 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	48.73	54.00	-5.27	41.71	32.05	8.43	33.46	391 246 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>81.76</td><td>-----</td><td>74.88</td><td>31.96</td><td>8.40</td><td>33.48</td><td>391</td><td>246 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	81.76	-----	74.88	31.96	8.40	33.48	391
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.66	48.73	54.00	-5.27	41.71	32.05	8.43	33.46	391 246 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	81.76	-----	74.88	31.96	8.40	33.48	391	246 AVERAGE																																																																																



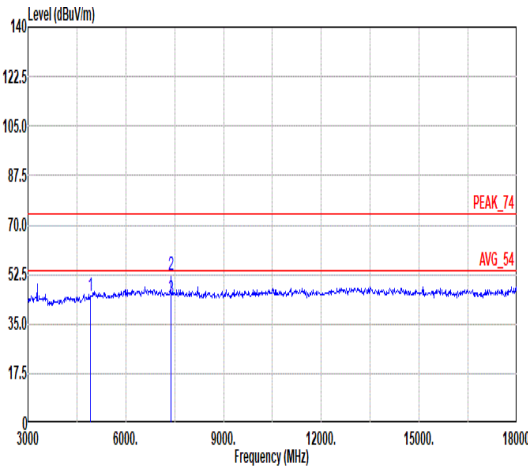
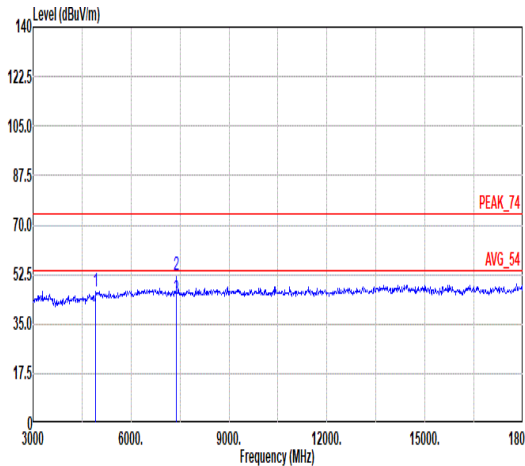


Mode	16																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																																																									
ANT	SISO																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4924.00</td><td>45.03</td><td>74.00</td><td>-28.97</td><td>57.66</td><td>34.03</td><td>9.87</td><td>56.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>52.13</td><td>74.00</td><td>-21.87</td><td>64.18</td><td>35.69</td><td>11.51</td><td>59.25</td><td>100</td><td>19</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>55.68</td><td>35.69</td><td>11.51</td><td>59.25</td><td>100</td><td>19</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4924.00	45.03	74.00	-28.97	57.66	34.03	9.87	56.53	---	---	Peak	2	7386.00	52.13	74.00	-21.87	64.18	35.69	11.51	59.25	100	19	Peak	3	7386.00	43.63	54.00	-10.37	55.68	35.69	11.51	59.25	100	19	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4924.00</td><td>46.47</td><td>74.00</td><td>-27.53</td><td>59.10</td><td>34.03</td><td>9.87</td><td>56.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>52.49</td><td>74.00</td><td>-21.51</td><td>64.54</td><td>35.69</td><td>11.51</td><td>59.25</td><td>100</td><td>163</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>44.07</td><td>54.00</td><td>-9.93</td><td>56.12</td><td>35.69</td><td>11.51</td><td>59.25</td><td>100</td><td>163</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4924.00	46.47	74.00	-27.53	59.10	34.03	9.87	56.53	---	---	Peak	2	7386.00	52.49	74.00	-21.51	64.54	35.69	11.51	59.25	100	163	Peak	3	7386.00	44.07	54.00	-9.93	56.12	35.69	11.51	59.25	100	163	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																		
1	4924.00	45.03	74.00	-28.97	57.66	34.03	9.87	56.53	---	---	Peak																																																																																																																															
2	7386.00	52.13	74.00	-21.87	64.18	35.69	11.51	59.25	100	19	Peak																																																																																																																															
3	7386.00	43.63	54.00	-10.37	55.68	35.69	11.51	59.25	100	19	Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																		
1	4924.00	46.47	74.00	-27.53	59.10	34.03	9.87	56.53	---	---	Peak																																																																																																																															
2	7386.00	52.49	74.00	-21.51	64.54	35.69	11.51	59.25	100	163	Peak																																																																																																																															
3	7386.00	44.07	54.00	-9.93	56.12	35.69	11.51	59.25	100	163	Average																																																																																																																															

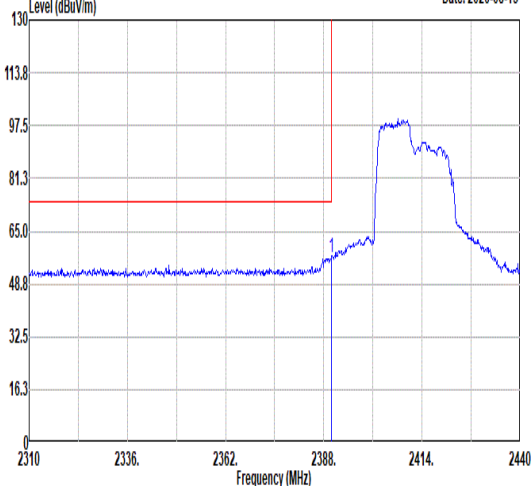
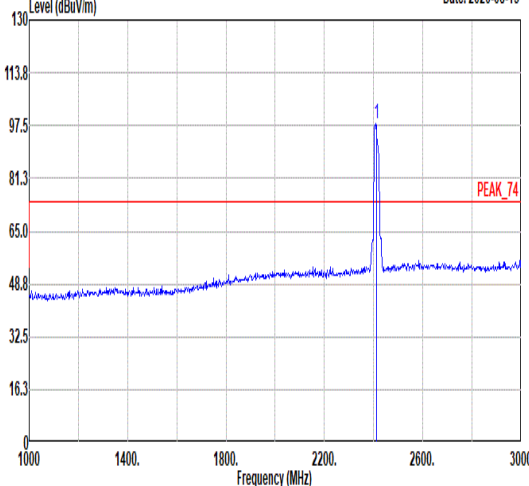
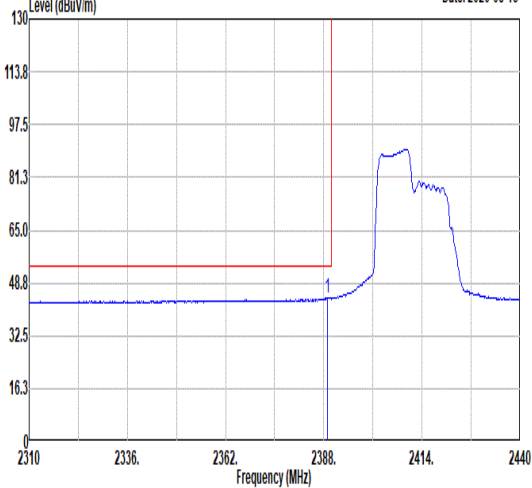
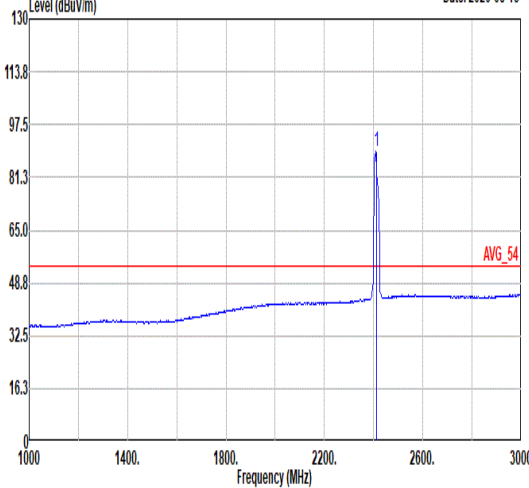


		17																																																																																											
Mode		Band Edge																																																																																											
		2400-2483.5_802.11ax HE20_CH01_Partial_RU_106/53_2412MHz																																																																																											
ANT		SISO																																																																																											
Pol.		Horizontal					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2026-08-15  Frequency (MHz)					Level (dBuV/m) Date: 2026-08-15  Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>57.03</td><td>74.00</td><td>-16.97</td><td>50.54</td><td>31.69</td><td>8.31</td><td>33.51</td><td>100</td><td>185</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.95	57.03	74.00	-16.97	50.54	31.69	8.31	33.51	100	185	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.02</td><td>-----</td><td>-----</td><td>91.42</td><td>31.76</td><td>8.34</td><td>33.50</td><td>100</td><td>185</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.02	-----	-----	91.42	31.76	8.34	33.50	100	185
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.95	57.03	74.00	-16.97	50.54	31.69	8.31	33.51	100	185	PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2412.00	98.02	-----	-----	91.42	31.76	8.34	33.50	100	185	PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2026-08-15  Frequency (MHz)					Level (dBuV/m) Date: 2026-08-15  Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.04</td><td>44.21</td><td>54.00</td><td>-9.79</td><td>37.72</td><td>31.69</td><td>8.31</td><td>33.51</td><td>100</td><td>185</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.04	44.21	54.00	-9.79	37.72	31.69	8.31	33.51	100	185	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>89.46</td><td>-----</td><td>-----</td><td>82.86</td><td>31.76</td><td>8.34</td><td>33.50</td><td>100</td><td>185</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.46	-----	-----	82.86	31.76	8.34	33.50	100	185
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.04	44.21	54.00	-9.79	37.72	31.69	8.31	33.51	100	185	AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2412.00	89.46	-----	-----	82.86	31.76	8.34	33.50	100	185	AVERAGE																																																																																		

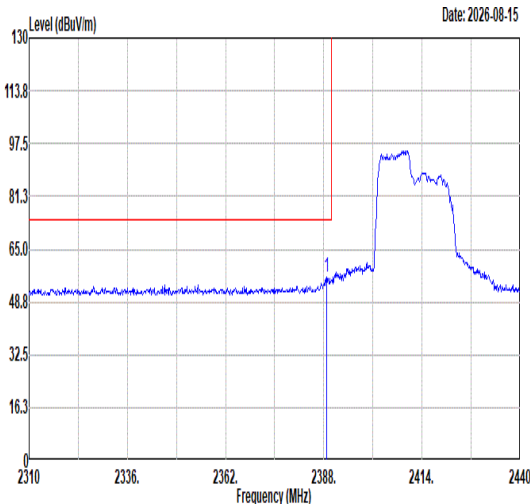
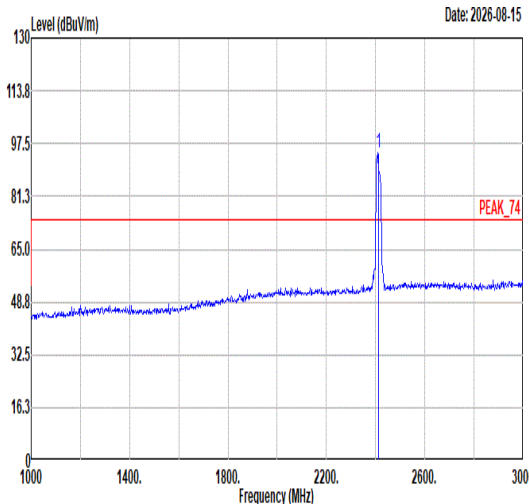
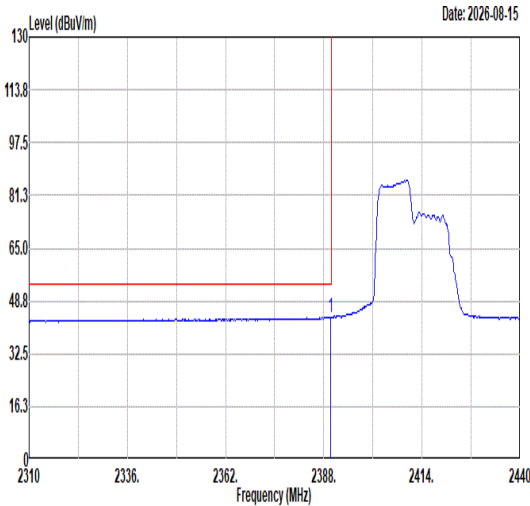
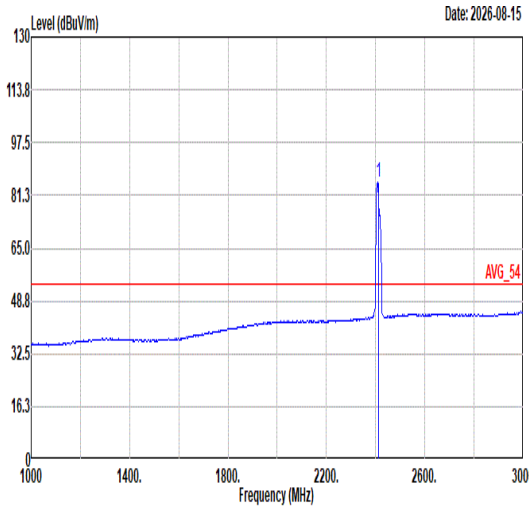


		17																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11ax HE20_CH01_Partial_RU_106/53_2412MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2026-08-15 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.78</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>49.76</td><td>31.69</td><td>8.31</td><td>33.51</td><td>381 264 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.78	56.25	74.00	-17.75	49.76	31.69	8.31	33.51	381 264 PEAK	 Level (dBuV/m) Date: 2026-08-15 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.66</td><td>-----</td><td>-----</td><td>88.07</td><td>31.75</td><td>8.34</td><td>33.50</td><td>381 264 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.66	-----	-----	88.07	31.75	8.34	33.50	381 264 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2388.78	56.25	74.00	-17.75	49.76	31.69	8.31	33.51	381 264 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	94.66	-----	-----	88.07	31.75	8.34	33.50	381 264 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2026-08-15 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>43.81</td><td>54.00</td><td>-10.19</td><td>37.32</td><td>31.69</td><td>8.31</td><td>33.51</td><td>381 264 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	43.81	54.00	-10.19	37.32	31.69	8.31	33.51	381 264 AVERAGE	 Level (dBuV/m) Date: 2026-08-15 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>85.60</td><td>-----</td><td>-----</td><td>79.00</td><td>31.76</td><td>8.34</td><td>33.50</td><td>381 264 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	85.60	-----	-----	79.00	31.76	8.34	33.50	381 264 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.82	43.81	54.00	-10.19	37.32	31.69	8.31	33.51	381 264 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	85.60	-----	-----	79.00	31.76	8.34	33.50	381 264 AVERAGE																																																																																	

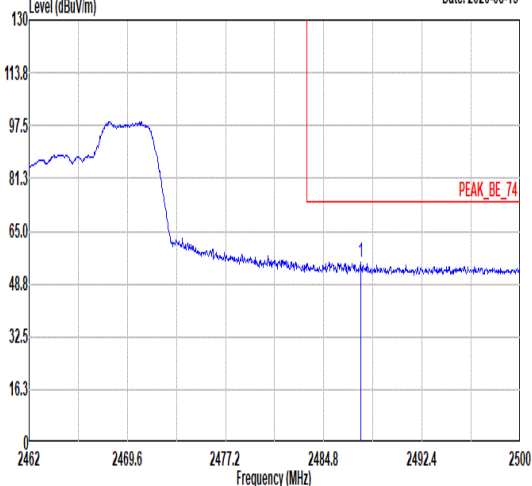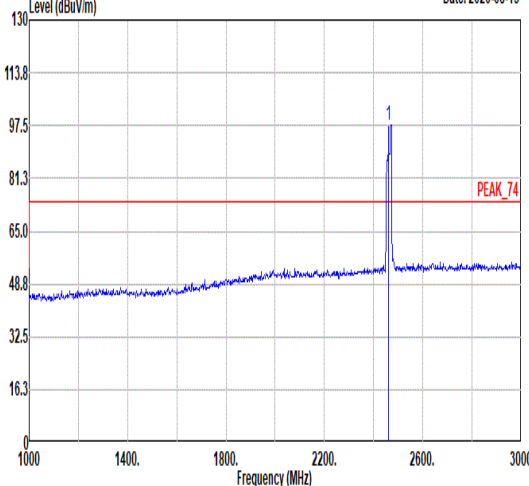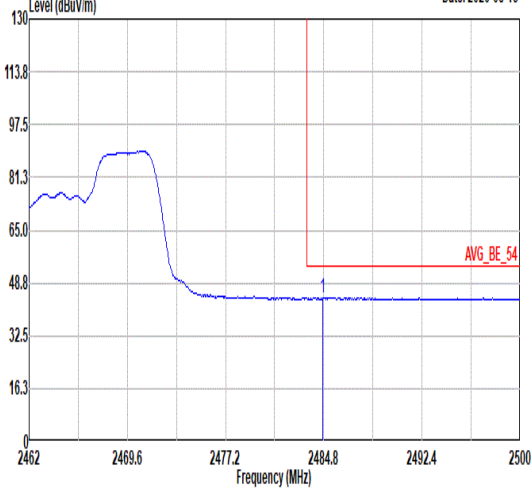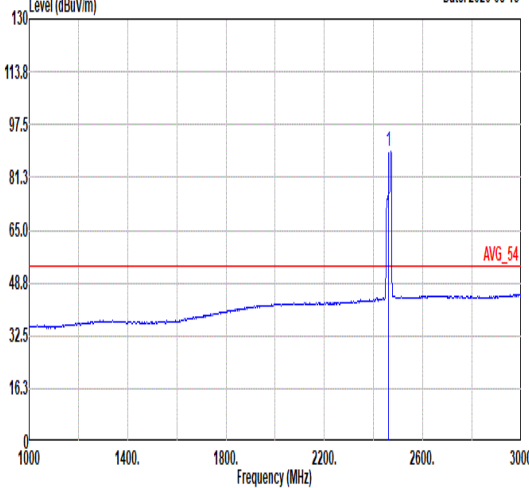

		18																																																																																						
Mode		Band Edge																																																																																						
		2400-2483.5_802.11ax HE20_CH11_Partial_RU_52/40_2462MHz																																																																																						
ANT		SISO																																																																																						
Pol.		Horizontal					Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2026-08-15  PEAK_BE_74					Level (dBuV/m) Date: 2026-08-15  PEAK_74																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.65</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>48.30</td><td>32.07</td><td>8.44</td><td>33.46</td><td>300 186 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2487.65	55.35	74.00	-18.65	48.30	32.07	8.44	33.46	300 186 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.70</td><td>-----</td><td>90.74</td><td>32.01</td><td>8.42</td><td>33.47</td><td>300 186 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.70	-----	90.74	32.01	8.42	33.47
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2487.65	55.35	74.00	-18.65	48.30	32.07	8.44	33.46	300 186 PEAK																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2462.00	97.70	-----	90.74	32.01	8.42	33.47	300 186 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2026-08-15  AVG_BE_54					Level (dBuV/m) Date: 2026-08-15  AVG_54																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.72</td><td>44.16</td><td>54.00</td><td>-9.84</td><td>37.12</td><td>32.06</td><td>8.44</td><td>33.46</td><td>300 186 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.72	44.16	54.00	-9.84	37.12	32.06	8.44	33.46	300 186 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>89.25</td><td>-----</td><td>82.30</td><td>32.00</td><td>8.42</td><td>33.47</td><td>300 186 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	89.25	-----	82.30	32.00	8.42	33.47
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2484.72	44.16	54.00	-9.84	37.12	32.06	8.44	33.46	300 186 AVERAGE																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2462.00	89.25	-----	82.30	32.00	8.42	33.47	300 186 AVERAGE																																																																																

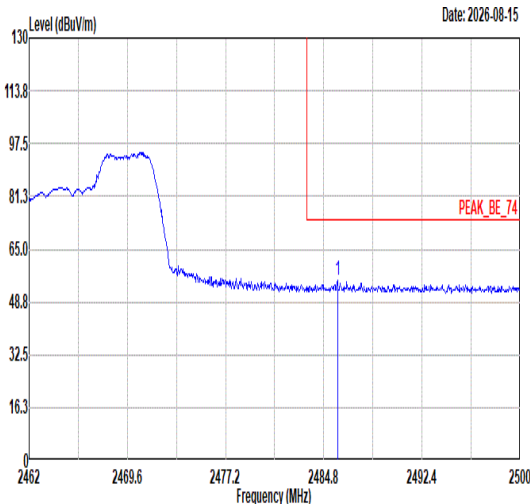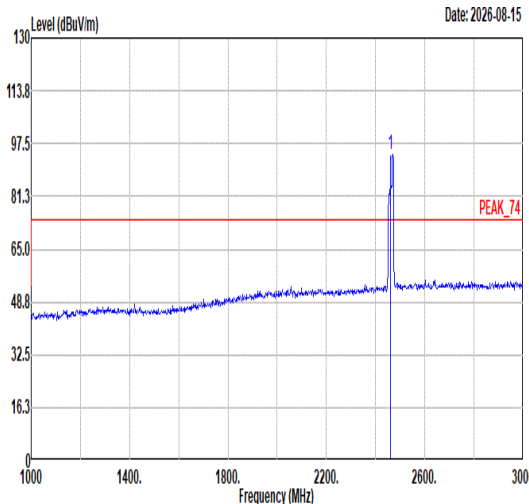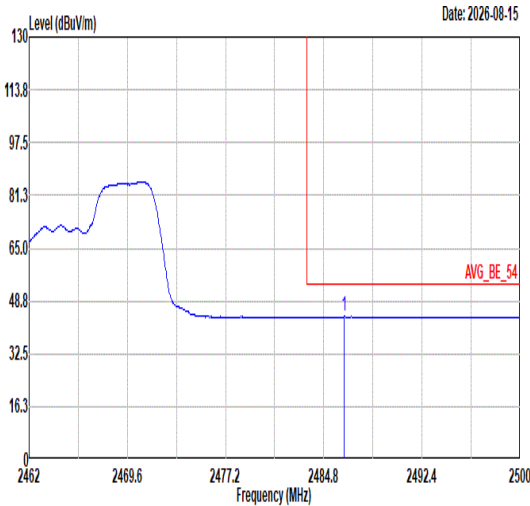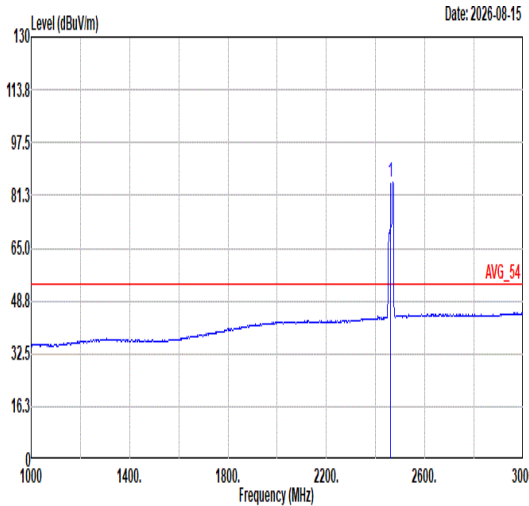

		18																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11ax HE20_CH11_Partial_RU_52/40_2462MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2026-08-15. Peak at 2484.8 MHz labeled PEAK_BE_74.					 Level (dBuV/m) vs Frequency (MHz). Date: 2026-08-15. Peak at 2462.00 MHz labeled PEAK_74.																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2485.86</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>48.37</td><td>32.06</td><td>8.44</td><td>33.46</td><td>400</td><td>252 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2485.86	55.41	74.00	-18.59	48.37	32.06	8.44	33.46	400	252 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>94.39</td><td>-----</td><td>-----</td><td>87.44</td><td>32.00</td><td>8.42</td><td>33.47</td><td>400</td><td>252 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	94.39	-----	-----	87.44	32.00	8.42	33.47	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2485.86	55.41	74.00	-18.59	48.37	32.06	8.44	33.46	400	252 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2462.00	94.39	-----	-----	87.44	32.00	8.42	33.47	400	252 PEAK																																																																																
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2026-08-15. Average at 2484.8 MHz labeled AVG_BE_54.					 Level (dBuV/m) vs Frequency (MHz). Date: 2026-08-15. Average at 2462.00 MHz labeled AVG_54.																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.40</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>36.94</td><td>32.06</td><td>8.44</td><td>33.46</td><td>400</td><td>252 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2486.40	43.98	54.00	-10.02	36.94	32.06	8.44	33.46	400	252 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>85.29</td><td>-----</td><td>-----</td><td>78.34</td><td>32.00</td><td>8.42</td><td>33.47</td><td>400</td><td>252 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	85.29	-----	-----	78.34	32.00	8.42	33.47	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2486.40	43.98	54.00	-10.02	36.94	32.06	8.44	33.46	400	252 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2462.00	85.29	-----	-----	78.34	32.00	8.42	33.47	400	252 AVERAGE																																																																																



Mode	19																																																																																																															
	LF																																																																																																															
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																															
ANT	SISO																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>51.34</td><td>18.55</td><td>40.00</td><td>-21.45</td><td>33.24</td><td>19.58</td><td>0.73</td><td>35.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>142.52</td><td>18.52</td><td>43.50</td><td>-24.98</td><td>33.82</td><td>18.35</td><td>1.25</td><td>34.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>443.22</td><td>23.97</td><td>46.00</td><td>-22.03</td><td>33.79</td><td>22.57</td><td>2.22</td><td>34.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>635.28</td><td>26.35</td><td>46.00</td><td>-19.65</td><td>31.88</td><td>26.20</td><td>2.67</td><td>34.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>825.40</td><td>30.64</td><td>46.00</td><td>-15.36</td><td>33.31</td><td>28.33</td><td>3.07</td><td>34.07</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>989.33</td><td>32.42</td><td>54.00</td><td>-21.58</td><td>33.11</td><td>29.98</td><td>3.33</td><td>34.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	51.34	18.55	40.00	-21.45	33.24	19.58	0.73	35.00	---	---	Peak	2	142.52	18.52	43.50	-24.98	33.82	18.35	1.25	34.90	---	---	Peak	3	443.22	23.97	46.00	-22.03	33.79	22.57	2.22	34.61	---	---	Peak	4	635.28	26.35	46.00	-19.65	31.88	26.20	2.67	34.40	---	---	Peak	5	825.40	30.64	46.00	-15.36	33.31	28.33	3.07	34.07	---	---	Peak	6	989.33	32.42	54.00	-21.58	33.11	29.98	3.33	34.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	51.34	18.55	40.00	-21.45	33.24	19.58	0.73	35.00	---	---	Peak																																																																																																					
2	142.52	18.52	43.50	-24.98	33.82	18.35	1.25	34.90	---	---	Peak																																																																																																					
3	443.22	23.97	46.00	-22.03	33.79	22.57	2.22	34.61	---	---	Peak																																																																																																					
4	635.28	26.35	46.00	-19.65	31.88	26.20	2.67	34.40	---	---	Peak																																																																																																					
5	825.40	30.64	46.00	-15.36	33.31	28.33	3.07	34.07	---	---	Peak																																																																																																					
6	989.33	32.42	54.00	-21.58	33.11	29.98	3.33	34.00	---	---	Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>37.76</td><td>22.03</td><td>40.00</td><td>-17.97</td><td>37.05</td><td>19.04</td><td>0.61</td><td>34.67</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>52.31</td><td>24.02</td><td>40.00</td><td>-15.98</td><td>38.75</td><td>19.53</td><td>0.74</td><td>35.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>144.46</td><td>21.70</td><td>43.50</td><td>-21.80</td><td>36.83</td><td>18.51</td><td>1.26</td><td>34.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>542.16</td><td>26.07</td><td>46.00</td><td>-19.93</td><td>34.04</td><td>24.06</td><td>2.47</td><td>34.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>769.14</td><td>29.00</td><td>46.00</td><td>-17.00</td><td>32.49</td><td>27.69</td><td>2.98</td><td>34.16</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>955.38</td><td>32.58</td><td>46.00</td><td>-13.42</td><td>33.52</td><td>29.79</td><td>3.27</td><td>34.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	37.76	22.03	40.00	-17.97	37.05	19.04	0.61	34.67	---	---	Peak	2	52.31	24.02	40.00	-15.98	38.75	19.53	0.74	35.00	---	---	Peak	3	144.46	21.70	43.50	-21.80	36.83	18.51	1.26	34.90	---	---	Peak	4	542.16	26.07	46.00	-19.93	34.04	24.06	2.47	34.50	---	---	Peak	5	769.14	29.00	46.00	-17.00	32.49	27.69	2.98	34.16	---	---	Peak	6	955.38	32.58	46.00	-13.42	33.52	29.79	3.27	34.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	37.76	22.03	40.00	-17.97	37.05	19.04	0.61	34.67	---	---	Peak																																																																																																					
2	52.31	24.02	40.00	-15.98	38.75	19.53	0.74	35.00	---	---	Peak																																																																																																					
3	144.46	21.70	43.50	-21.80	36.83	18.51	1.26	34.90	---	---	Peak																																																																																																					
4	542.16	26.07	46.00	-19.93	34.04	24.06	2.47	34.50	---	---	Peak																																																																																																					
5	769.14	29.00	46.00	-17.00	32.49	27.69	2.98	34.16	---	---	Peak																																																																																																					
6	955.38	32.58	46.00	-13.42	33.52	29.79	3.27	34.00	---	---	Peak																																																																																																					




Mode	21	
	SHF	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	Horizontal Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a noisy signal with a peak level of 74 dBuV/m (PEAK_74) and an average level of 54 dBuV/m (AVG_54). The frequency range is from 18000 to 26000 MHz.	Vertical Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a noisy signal with a peak level of 74 dBuV/m (PEAK_74) and an average level of 54 dBuV/m (AVG_54). The frequency range is from 18000 to 26000 MHz.


Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	92.41	1.46	0.685	1kHz
802.11g	93.52	2.02	0.495	1kHz
802.11ax HE20	92.95	1.45	0.690	1kHz

802.11b

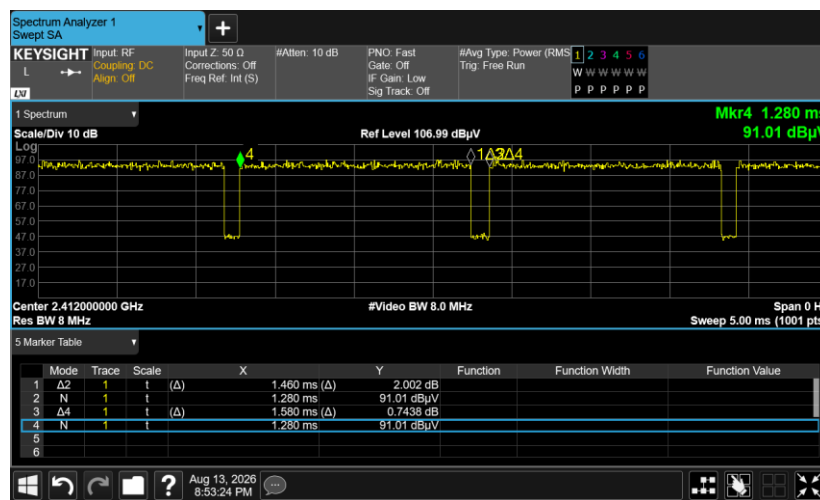

802.11g

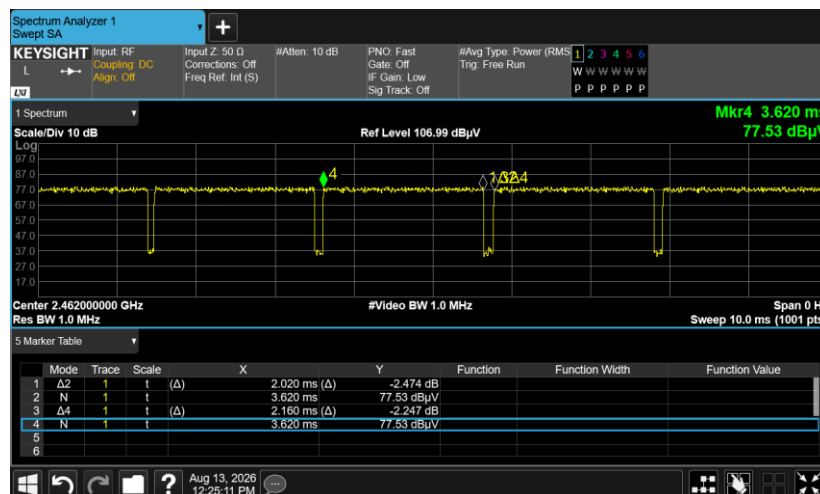



802.11ax HE20

