



FCC Radio Test Report

FCC ID: 2APRGLT03

This report concerns: Original Grant

Project No. : 2403G076
Equipment : 4G LTE CAT 6 Wi-Fi Router
Brand Name : Cudy
Test Model : LT700
Series Model : N/A
Applicant : Shenzhen Cudy Technology Co., Ltd.
Address : Room A606, Gaoxinqi Industrial Park, Liuxianyi Road, Baoan District, Shenzhen, China
Manufacturer : Shenzhen Cudy Technology Co., Ltd.
Address : Room A606, Gaoxinqi Industrial Park, Liuxianyi Road, Baoan District, Shenzhen, China
Factory : Shenzhen Cudy Technology Co., Ltd.
Address : Room A606, Gaoxinqi Industrial Park, Liuxianyi Road, Baoan District, Shenzhen, China
Date of Receipt : May 16, 2024
Date of Test : May 21, 2024 ~ Jul. 01, 2024
Issued Date : Jul. 10, 2024
Report Version : R01
Test Sample : Engineering Sample No.: SSL20240516199 for AC Power Line Conducted Emissions and Radiated Emissions and other conducted, SSL20240516200 for Power.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by

:


Antony Liang

Approved by

:


Chay Cai

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong,
People's Republic of China

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	14
3.4 DUTY CYCLE	16
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
3.6 SUPPORT UNITS	18
3.7 CUSTOMER INFORMATION DESCRIPTION	18
4 . AC POWER LINE CONDUCTED EMISSIONS	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS	20
5 . RADIATED EMISSIONS	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM TEST STANDARD	23
5.4 TEST SETUP	23
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	25
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	25
5.8 TEST RESULTS - ABOVE 1000 MHZ	25
6 . BANDWIDTH	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27
6.6 TEST RESULTS	27
7 . MAXIMUM OUTPUT POWER	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . POWER SPECTRAL DENSITY	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	30
8.5 EUT OPERATION CONDITIONS	30
8.6 TEST RESULTS	30
9 . FREQUENCY STABILITY	31
9.1 LIMIT	31
9.2 TEST PROCEDURE	31
9.3 DEVIATION FROM STANDARD	31
9.4 TEST SETUP	31
9.5 EUT OPERATION CONDITIONS	31
9.6 TEST RESULTS	31
10 . MEASUREMENT INSTRUMENTS LIST	32
11 . EUT TEST PHOTOS	35
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	41
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	44
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	49
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	52
APPENDIX E - BANDWIDTH	87
APPENDIX F - MAXIMUM OUTPUT POWER	96

Table of Contents	Page
APPENDIX G - POWER SPECTRAL DENSITY	111
APPENDIX H - FREQUENCY STABILITY	120

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2403G076	R00	Original Report.	Jul. 04, 2024	Invalid
BTL-FCCP-1-2403G076	R01	Modified the software version.	Jul. 10, 2024	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☒ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☐ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report

1#For Maximum Output Power: Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

2#For Radiated Emissions 1GHz – 18GHz: Room 102 & Room 701, Building 3, No.9, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

3#For others: No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	2.24
		6GHz ~ 18GHz	1.94

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	0.95 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	25°C	62%	AC 120V/60Hz	Hayden Chen	May 28, 2024
Radiated Emissions-9kHz to 30MHz	23°C	42%	AC 120V/60Hz	Hayden Chen	Jun. 12, 2024
Radiated Emissions-30MHz to 1000MHz	22°C	58%	AC 120V/60Hz	Terry Deng	Jun. 05, 2024
Radiated Emissions-Above 1000 MHz	23°C	53%	AC 120V/60Hz	Jensen Zhou	Jun. 04, 2024
	22°C	58%	AC 120V/60Hz	Allen Tong	Jun. 12, 2024
Bandwidth	24°C	52%	DC 12V	Steve Zhou	Jun. 13, 2024
Maximum Output Power	24-25°C	49-60%	DC 12V	Brand Duan	May 28, 2024
Power Spectral Density	24°C	52%	DC 12V	Steve Zhou	Jun. 13, 2024
Frequency Stability	Normal & Extreme	52%	Normal & Extreme	Steve Zhou	Jun. 13, 2024

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	2403G076
Brand Name	Cudy
Test Model	LT700
Series Model	NA
Model Difference(s)	NA
Software Version	1.15.29
Hardware Version	V1
Power Source	DC Voltage supplied from AC adapter. Model: DSA-12PF11-12 FUS 120100
Power Rating	I/P:100-240V~50/60Hz 0.5A O/P:+12.0V 1.0A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.7 Mbps
Maximum Output Power UNII-1 Non Beamforming	IEEE 802.11n(HT20): 24.75 dBm (0.2985 W)
Maximum Output Power UNII-3 Non Beamforming	IEEE 802.11ac(VHT80): 24.11 dBm (0.2576 W)
Maximum Output Power UNII-1 Beamforming	IEEE 802.11n(HT20): 24.40 dBm (0.2754 W)
Maximum Output Power UNII-3 Beamforming	IEEE 802.11ac(VHT80): 23.62 dBm (0.2301 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		U00T01S004N03482	Dipole	IPEX	5.18
2		U00T01S004N03483	Dipole	IPEX	4.49

Note:

- 1) This EUT supports CDD, and all antenna gains are not equal, so Directional gain= $10\log[(10^{G1/20}+10^{G2/20}+...10^{GN/20})^2/N]$ dBi, that is Directional gain= $10\log[(10^{5.18/20}+10^{4.49/20})^2/2]$ dBi =7.85. So, the UNII-1, UNII-3 output power limit is 30-(7.85-6)=28.15. The UNII-1 power spectral density limit is 17-(7.85-6)=15.15, the UNII-3 power spectral density limit is 30-(7.85-6)=28.15.
- 2) Beamforming Gain is 3 dBi, that is Directional gain=3+5.18=8.18. So, the UNII-1, UNII-3 output power limit is 30-(8.18-6)=27.82.

4. Table for Antenna Configuration:

For Non Beamforming:

Operating Mode	TX Mode	2TX
	IEEE 802.11a	V (Ant. 1 + Ant. 2)
	IEEE 802.11n(HT20)	V (Ant. 1 + Ant. 2)
	IEEE 802.11n(HT40)	V (Ant. 1 + Ant. 2)
	IEEE 802.11ac(VHT20)	V (Ant. 1 + Ant. 2)
	IEEE 802.11ac(VHT40)	V (Ant. 1 + Ant. 2)
	IEEE 802.11ac(VHT80)	V (Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode	TX Mode	2TX
	IEEE 802.11n(HT20)	V (Ant. 1 + Ant. 2)
	IEEE 802.11n(HT40)	V (Ant. 1 + Ant. 2)
	IEEE 802.11ac(VHT20)	V (Ant. 1 + Ant. 2)
	IEEE 802.11ac(VHT40)	V (Ant. 1 + Ant. 2)
	IEEE 802.11ac(VHT80)	V (Ant. 1 + Ant. 2)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 9	TX N(HT20) Mode Channel 40 (UNII-1)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 9	TX N(HT20) Mode Channel 40 (UNII-1)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 9	TX N(HT20) Mode Channel 40 (UNII-1)

Radiated Emissions Test - Above 1GHz_Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX AC(VHT80) Mode Channel 155 (UNII-3)

Maximum Output Power Test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX AC(VHT80) Mode Channel 155 (UNII-3)

Maximum Output Power Test_Beamforming	
Final Test Mode	Description
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 6	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX AC(VHT80) Mode Channel 155 (UNII-3)

Other Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 149/157/165 (UNII-3)
Mode 6	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 7	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 8	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX N(HT20) Mode Channel 40 (UNII-1) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.
- (6) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.
- (7) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

Non Beamforming

UNII-1			
Test Software Version	QATool_Dbg 0.0.26		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	21	24	24
IEEE 802.11n(HT20)	23	28	27
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	1D	24	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	1B		

UNII-3			
Test Software Version	QATool_Dbg 0.0.26		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	24	24	25
IEEE 802.11n(HT20)	24	24	26
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	24	25	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	26		

Beamforming

UNII-1			
Test Software Version	QATool_Dbg 0.0.26		
Frequency (MHz)	5180	5200	5240
IEEE 802.11n(HT20)	22	27	26
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	1C	23	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	1A		

UNII-3			
Test Software Version	QATool_Dbg 0.0.26		
Frequency (MHz)	5745	5785	5825
IEEE 802.11n(HT20)	23	23	25
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	24	24	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	25		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

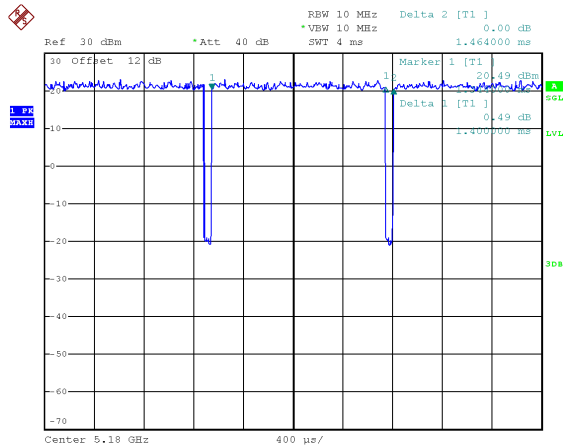

Date: 13.JUN.2024 15:13:50

Duty cycle = $1.400 \text{ ms} / 1.464 \text{ ms} = 95.63\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.19$


IEEE 802.11n(HT20)

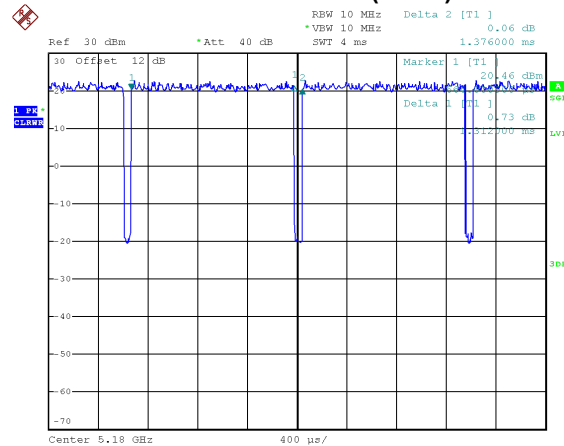

Date: 13.JUN.2024 15:14:38

Duty cycle = $1.312 \text{ ms} / 1.376 \text{ ms} = 95.35\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.21$


IEEE 802.11n(HT40)

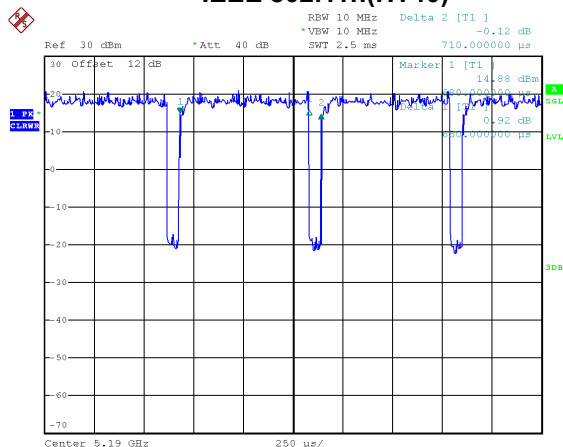

Date: 13.JUN.2024 15:15:54

Duty cycle = $0.650 \text{ ms} / 0.710 \text{ ms} = 91.55\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.38$

IEEE 802.11ac(VHT80)

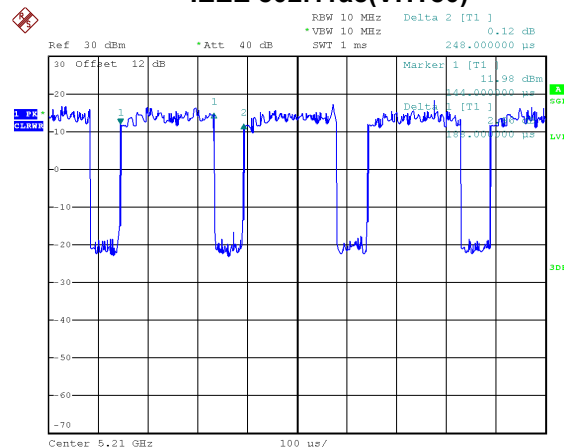

Date: 13.JUN.2024 15:17:14

Duty cycle = $0.188 \text{ ms} / 0.248 \text{ ms} = 75.81\%$
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 1.20$

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 714 Hz (Duty cycle < 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 762 Hz (Duty cycle < 98%).


For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1538 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 5319 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

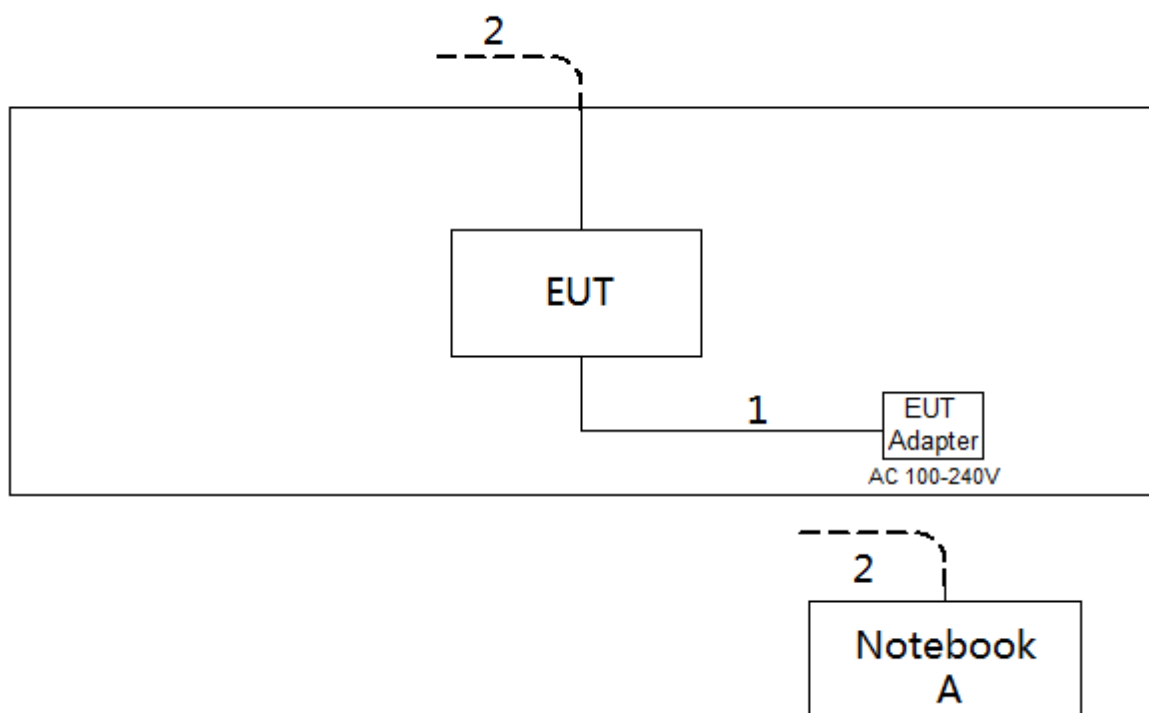

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

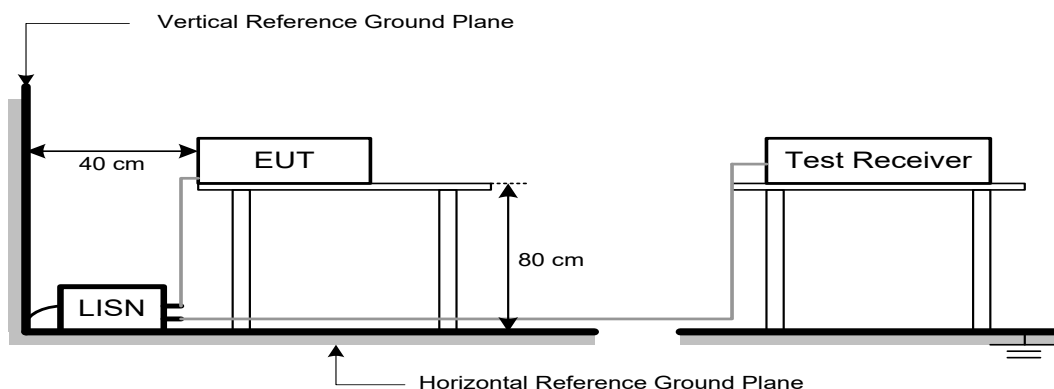

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$$20\log(d_{\text{limit}}/d_{\text{measure}})=20\log(3/1)=9.5 \text{ dB.}$$

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

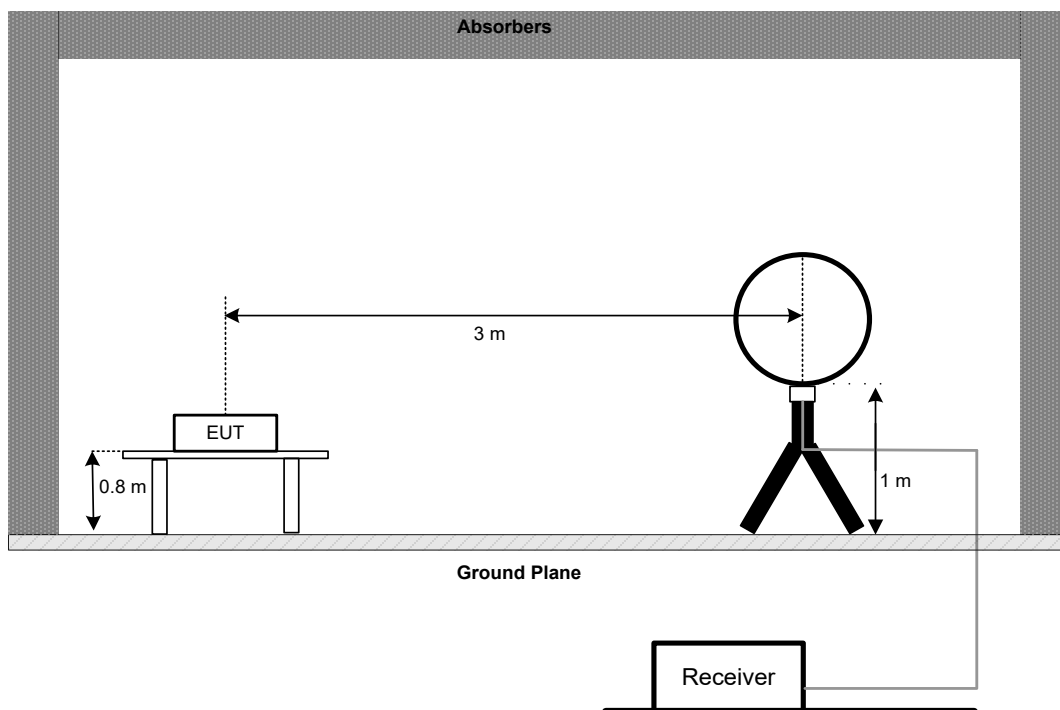


30 MHz to 1 GHz

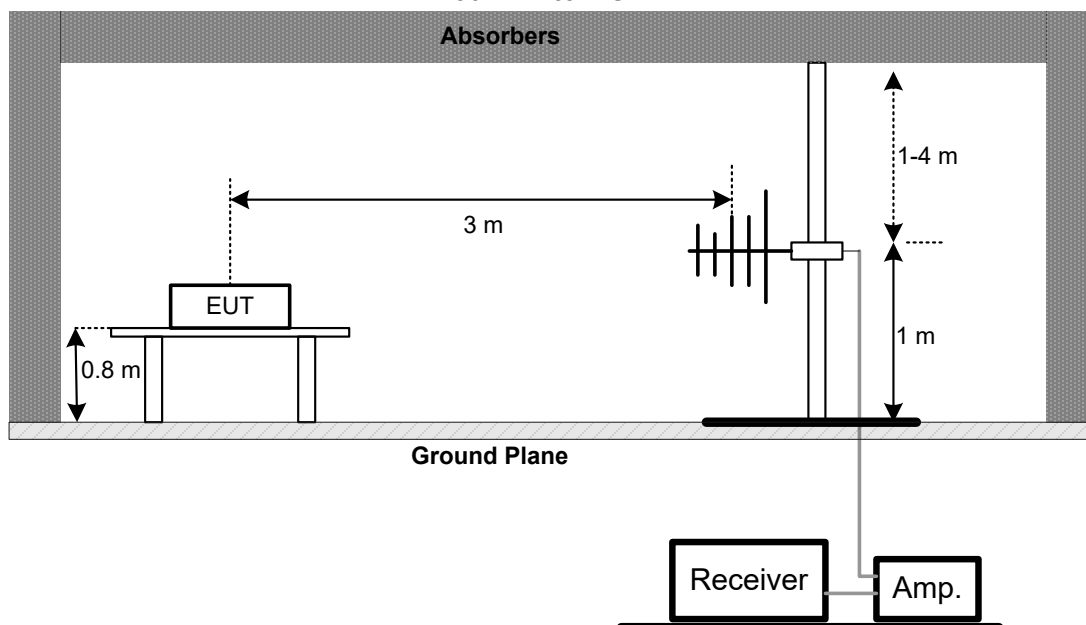


Above 1 GHz Band edge

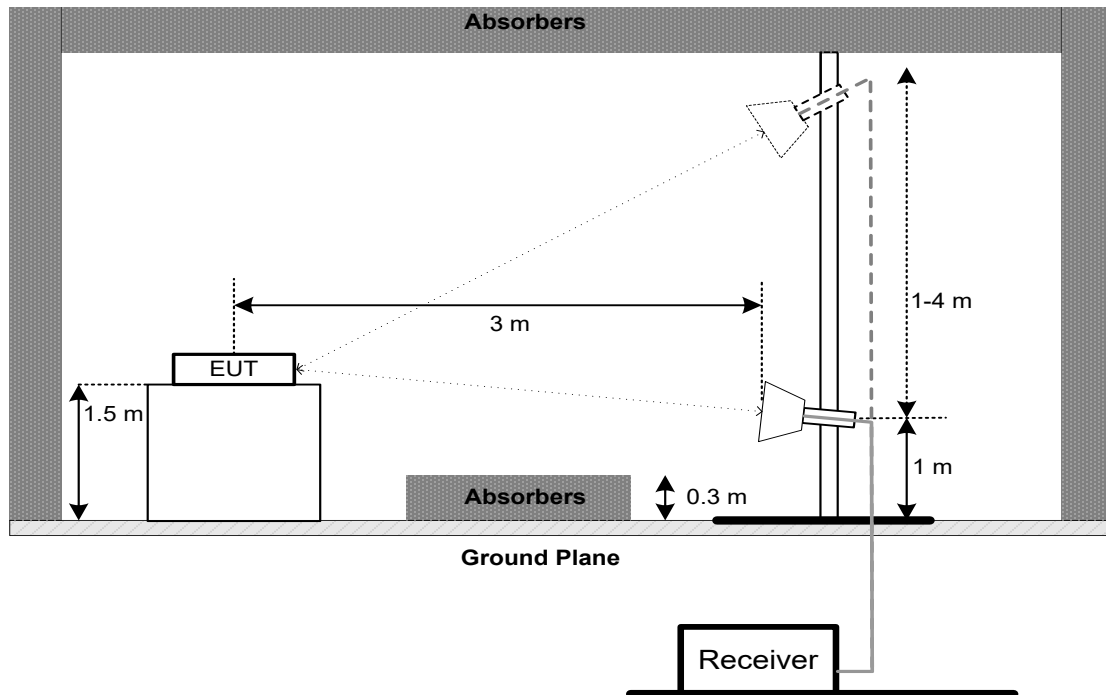

Harmonic (1 GHz to 18 GHz)

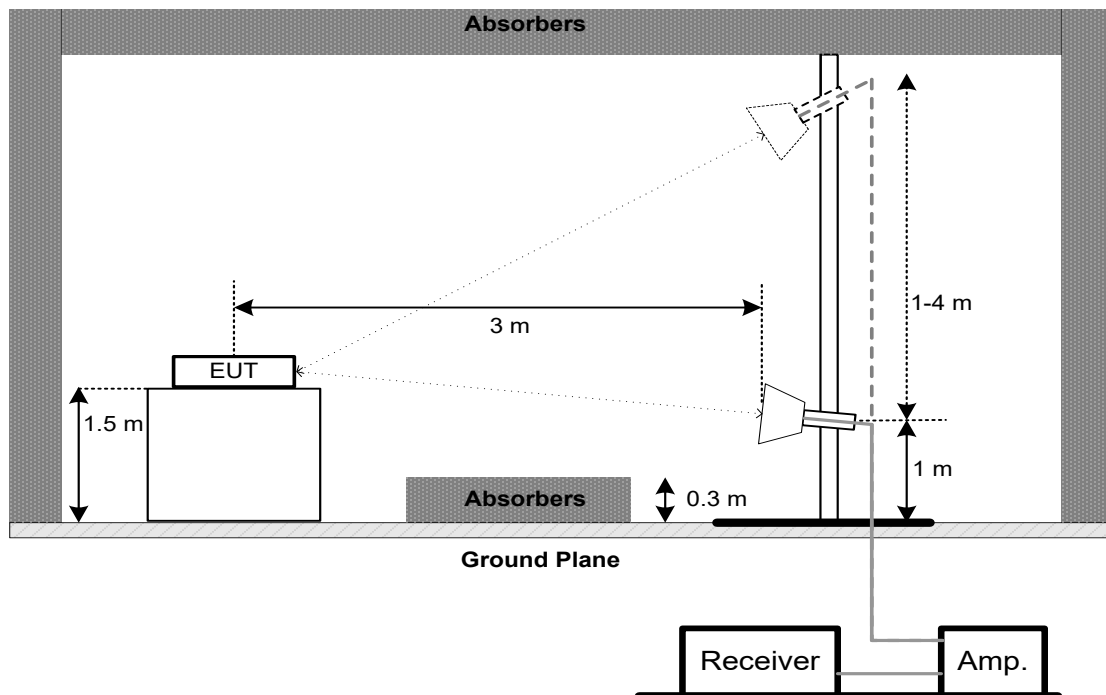

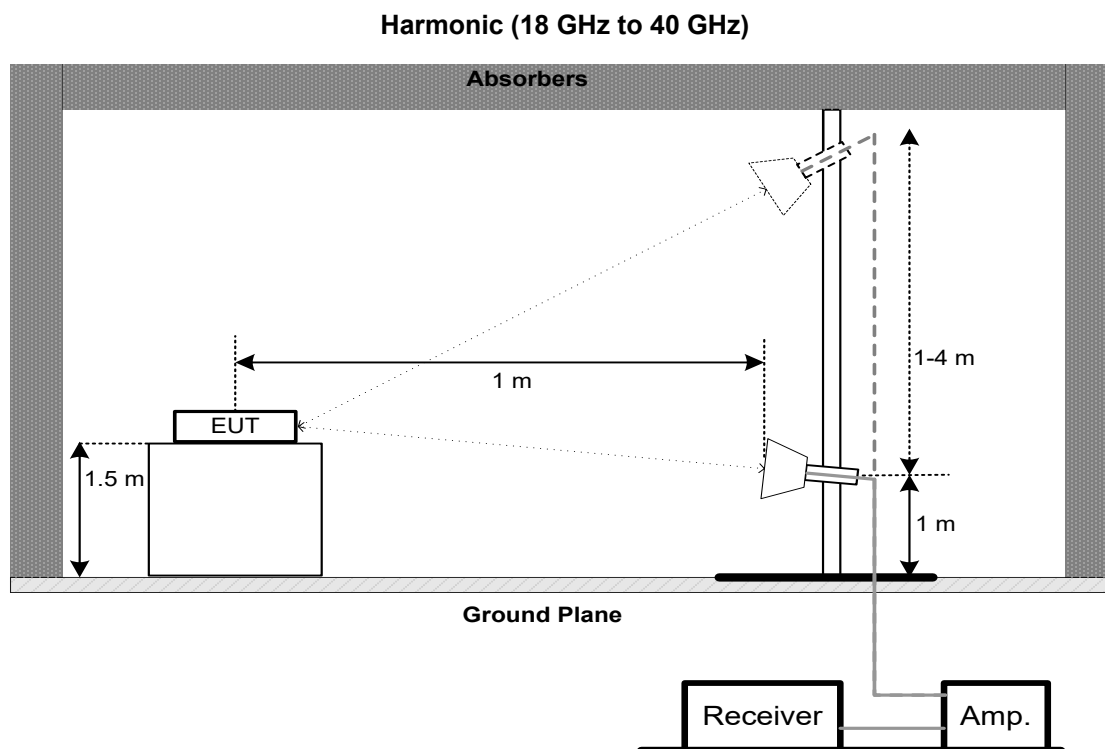

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	26 dB Bandwidth	-	5150-5250
FCC 15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

- b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		1 Watt (30dBm)	5725-5850

Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

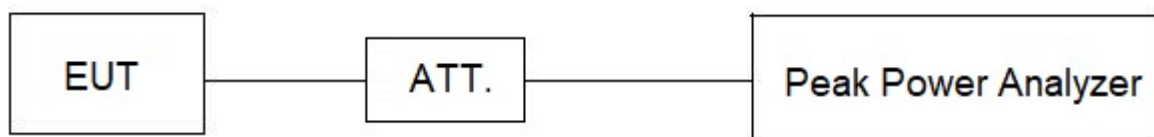

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For UNII-1:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 13 dB, and the final offset is $13 + 7 = 20 \text{ dB}$ when RBW=100kHz is used.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5725-5850

9.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

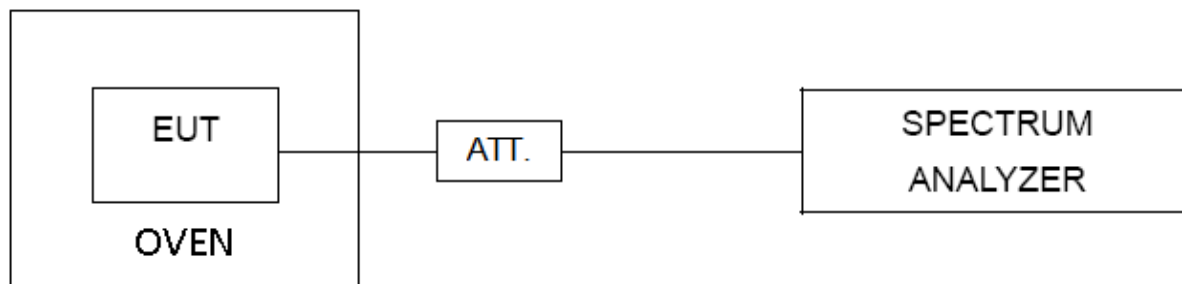

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR3	103027	Jun. 16, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 27, 2024
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW2350-3.8A-NMB M-1.5M	N/A	Jun. 09, 2025
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chamber room	ETS	9*6*6	N/A	Jul. 11, 2024

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1462	Dec. 13, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 13, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980863	Apr. 07, 2025
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jul. 04, 2024
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jul. 04, 2024
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jul. 04, 2024
7	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Positioning Controller	MF	MF-7802	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
11	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Nov. 17, 2024
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Jan. 09, 2025
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 09, 2025
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 09, 2025
7	966 Chamber room	ETS	RFD-100(SVSWR)	Q2179	Jan. 09, 2025
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 08, 2024
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9969	N/A	Nov. 17, 2024

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	May 31, 2025
2	Low Noise Amplifier	CONNPHY	CLN-18G40G-4330 -K	619413	Jul. 06, 2024
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 26, 2024
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 26, 2024
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 10, 2024
6	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Attenuator	Talent Microwave	TA10A0-S-26.5	N/A	N/A
4	DC Block	N/A	N/A	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Attenuator	RegalWay	RWA-201-S-10	N/A	Sep. 26, 2024
2	Power sensors	MA24408A	12592	N/A	Dec. 22, 2024
3	MA24400A PEAK POWER ANALYZER	VERSION 1.1.0.0	N/A	N/A	N/A


Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Spectrum Analyzer	R&S	FSP40	100185	May 31, 2025
3	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
4	Attenuator	Talent Microwave	TA10A0-S-26.5	N/A	N/A
5	DC Block	N/A	N/A	N/A	N/A
6	Desktop Constant Temperature Chamber	BEIER	BTH-50C	20170306001	Jan. 19. 2025
7	DC power supply	UNI-T	UDP6721	AWP7224050031	Mar. 20, 2025
8	Cable	Woke	S02-181212-064	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


11. EUT TEST PHOTOS


AC Power Line Conducted Emissions Test Photos


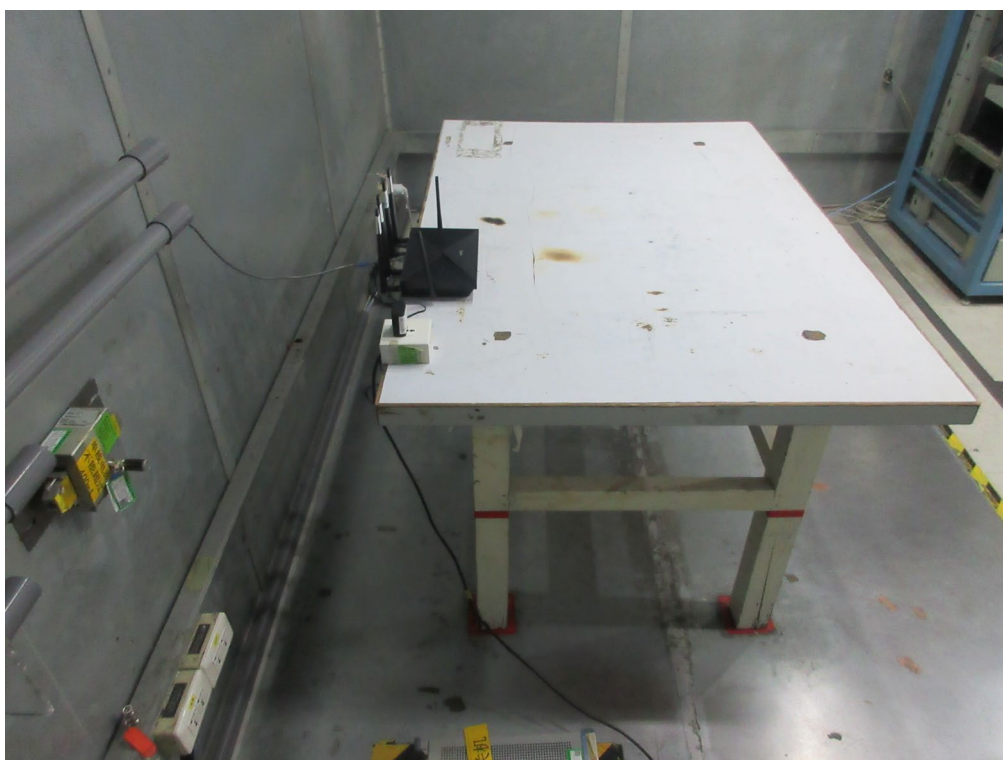


Radiated Emissions Test Photos

9 kHz to 30 MHz


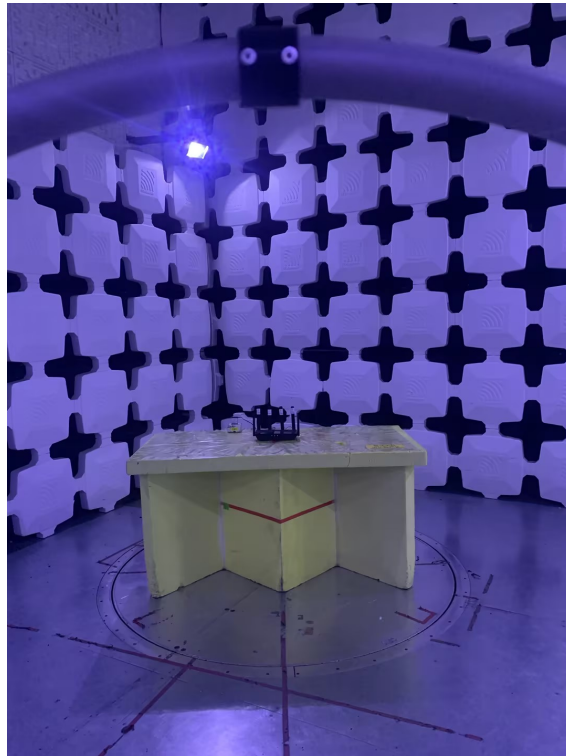


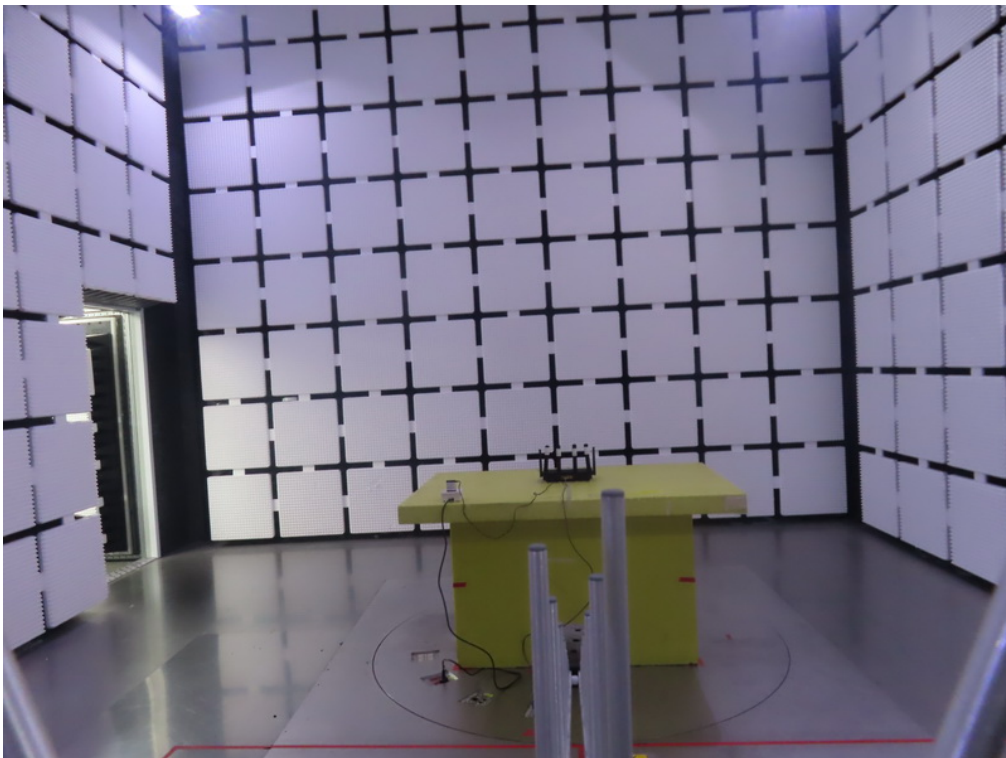Radiated Emissions Test Photos**30 MHz to 1 GHz**

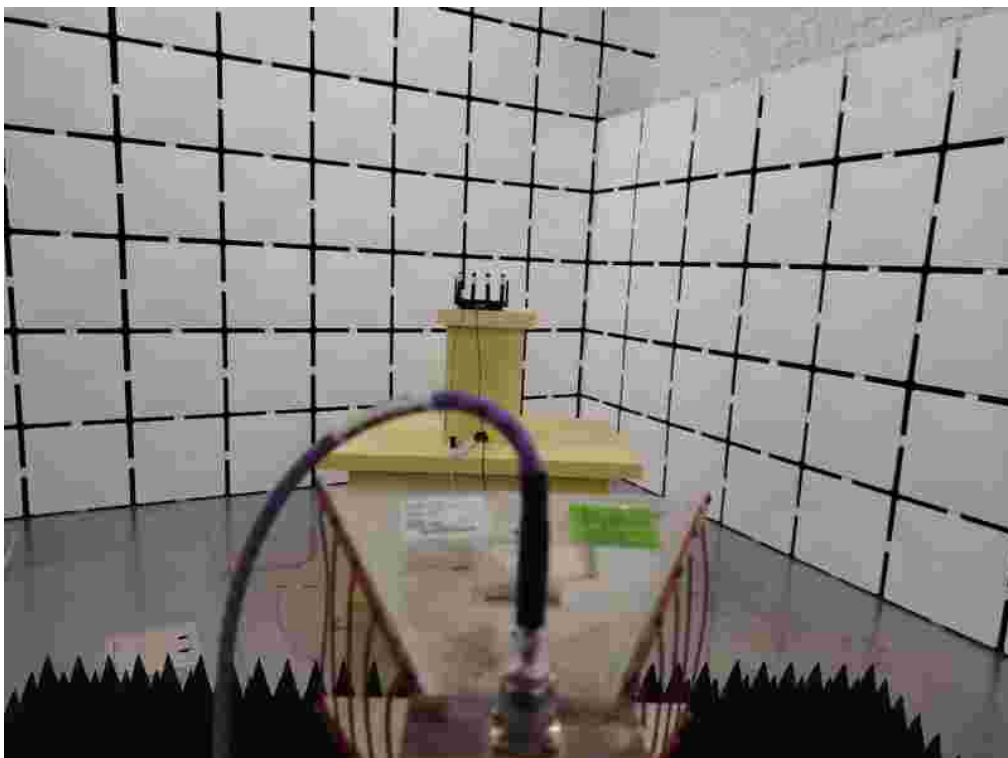
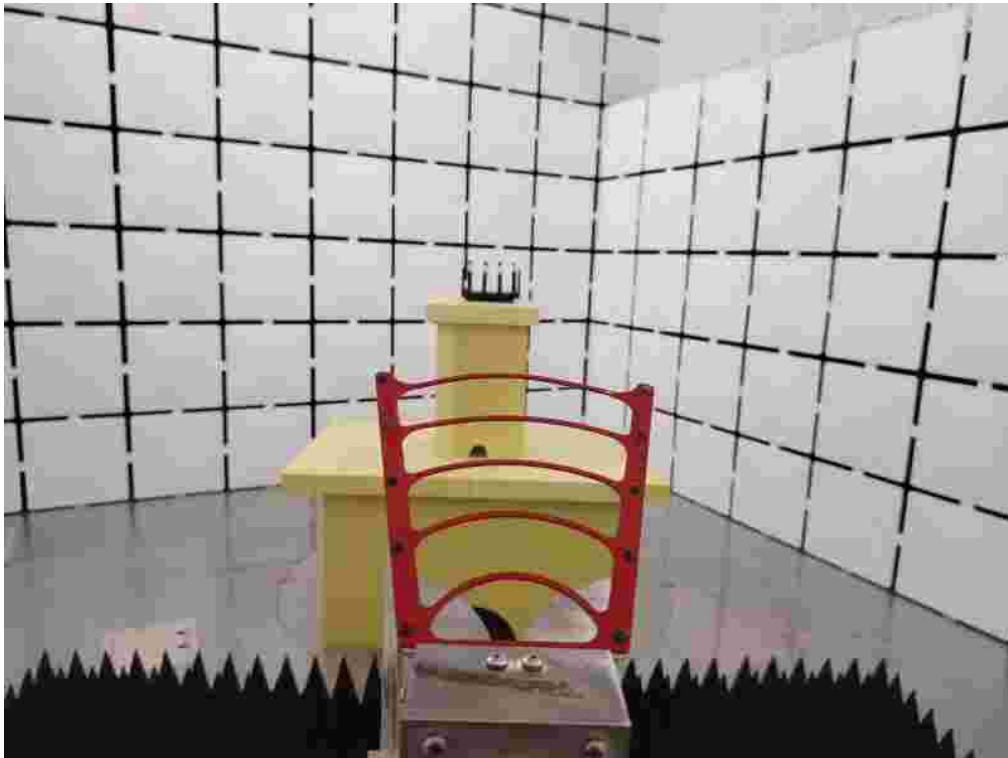
Radiated Emissions Test Photos**1 GHz to 18GHz**

Radiated Emissions Test Photos

Above 18 GHz

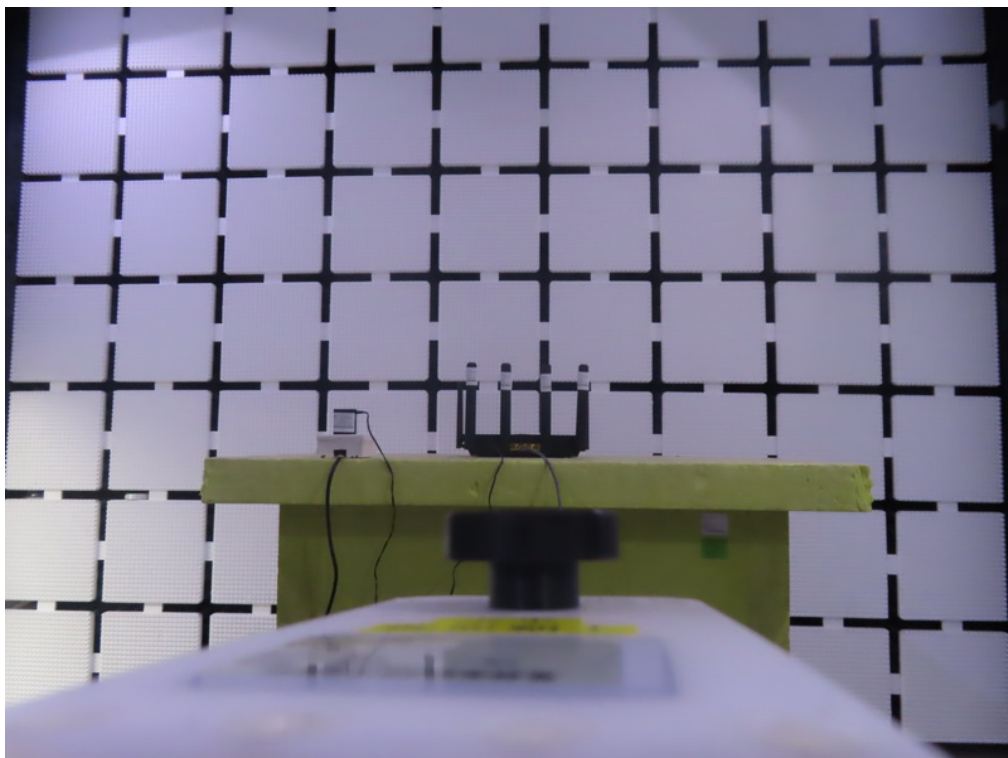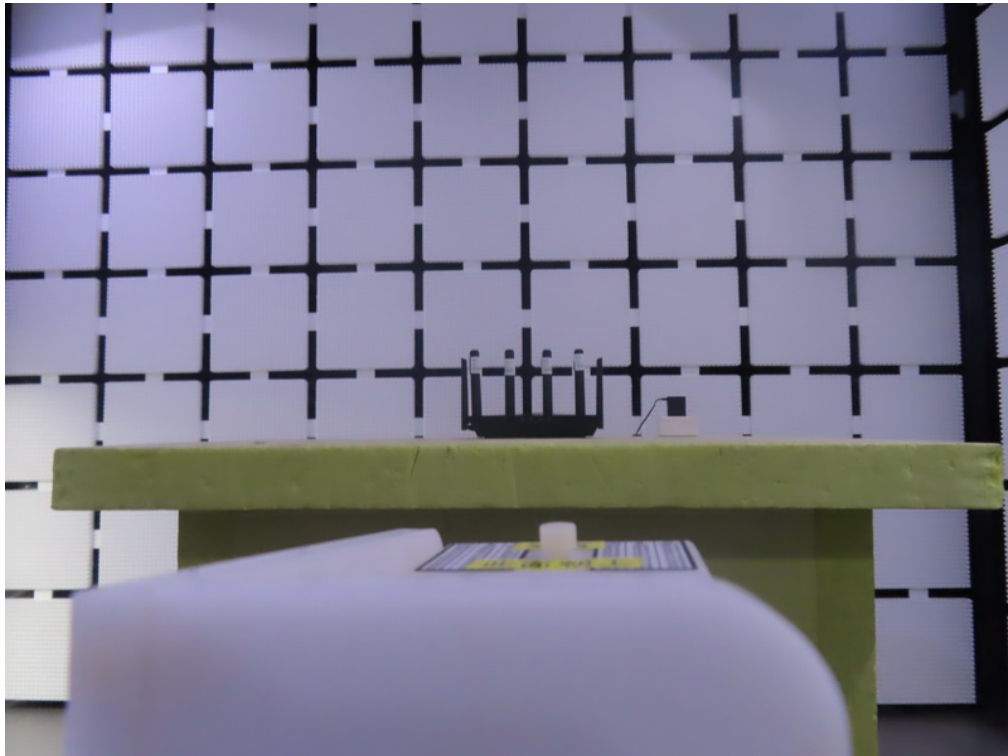


Conducted Test Photos

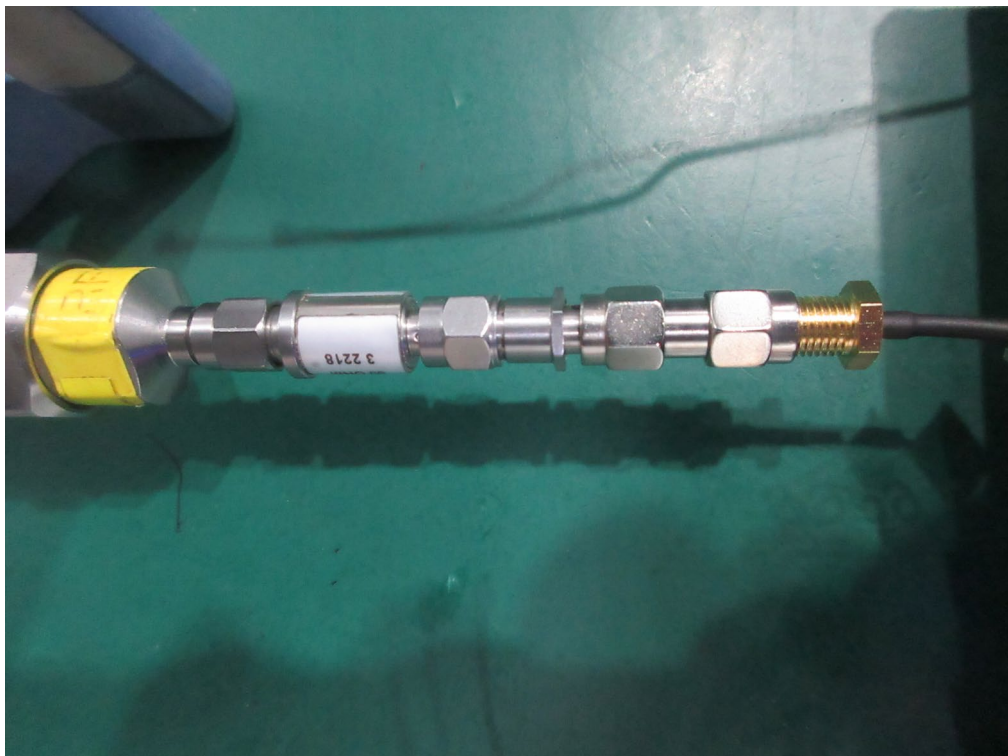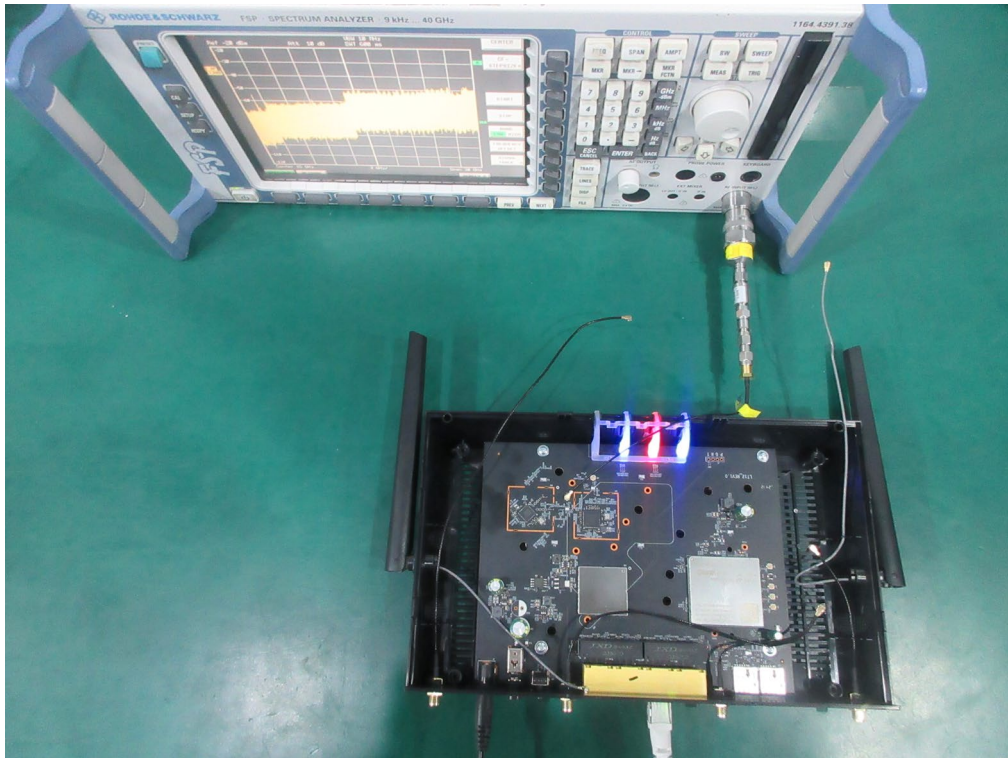

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Phase	Line
-----------	-------------------------------------	-------	------

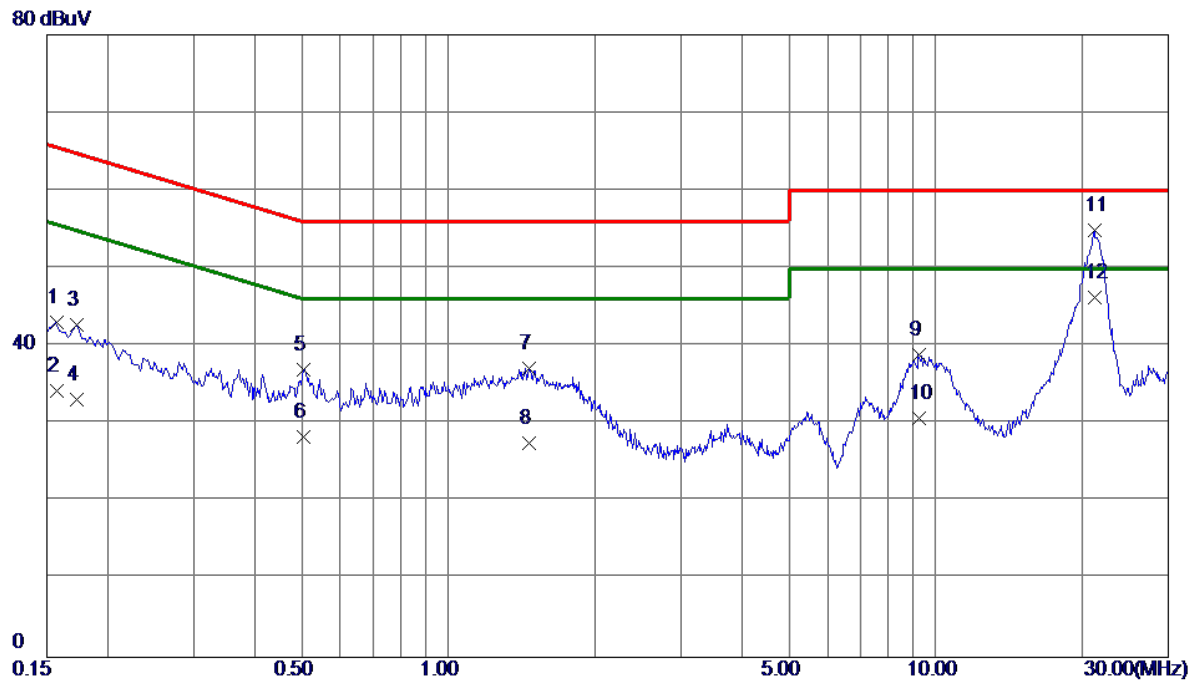


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1568	33.05	9.97	43.02	65.63	-22.61	QP	
2	0.1568	24.30	9.97	34.27	55.63	-21.36	AVG	
3	0.1725	32.79	9.97	42.76	64.84	-22.08	QP	
4	0.1725	23.10	9.97	33.07	54.84	-21.77	AVG	
5	0.5032	26.33	10.64	36.97	56.00	-19.03	QP	
6	0.5032	17.70	10.64	28.34	46.00	-17.66	AVG	
7	1.4640	25.89	11.27	37.16	56.00	-18.84	QP	
8	1.4640	16.20	11.27	27.47	46.00	-18.53	AVG	
9	9.2153	27.14	11.81	38.95	60.00	-21.05	QP	
10	9.2153	18.90	11.81	30.71	50.00	-19.29	AVG	
11	21.1448	40.04	14.77	54.81	60.00	-5.19	QP	
12 *	21.1448	31.50	14.77	46.27	50.00	-3.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Phase	Neutral
-----------	-------------------------------------	-------	---------

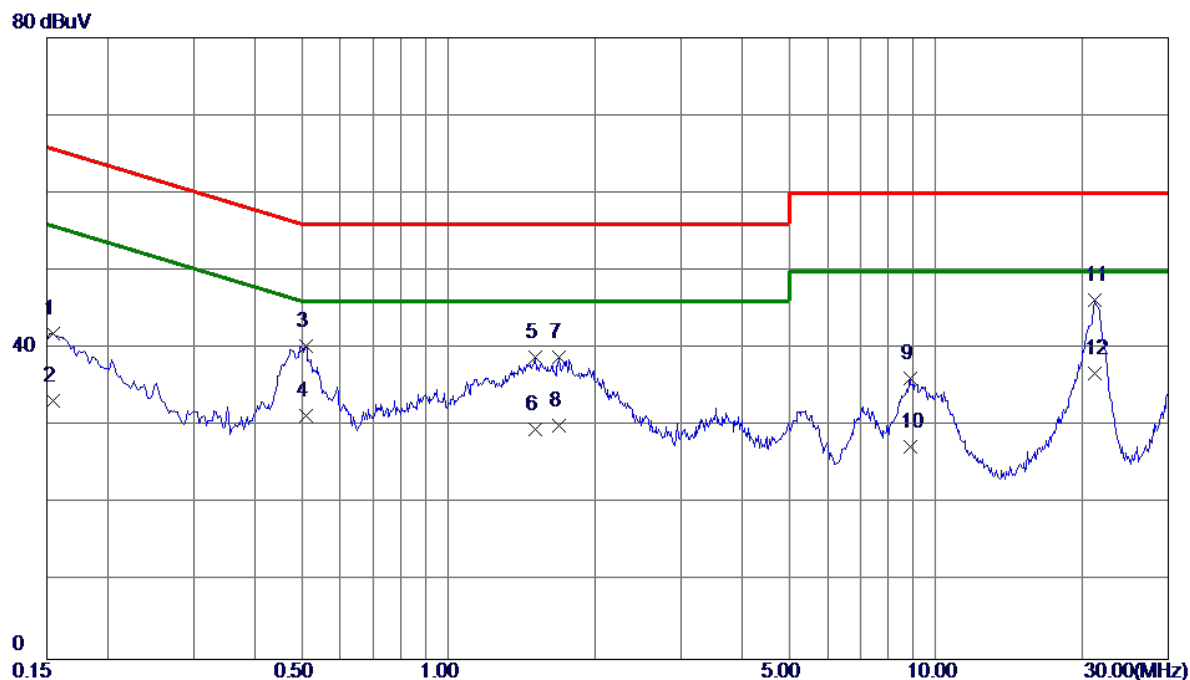


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	32.06	9.93	41.99	65.75	-23.76	QP	
2	0.1545	23.31	9.93	33.24	55.75	-22.51	AVG	
3	0.5100	29.78	10.61	40.39	56.00	-15.61	QP	
4	0.5100	20.80	10.61	31.41	46.00	-14.59	AVG	
5	1.5045	27.68	11.21	38.89	56.00	-17.11	QP	
6	1.5045	18.41	11.21	29.62	46.00	-16.38	AVG	
7	1.6823	27.72	11.11	38.83	56.00	-17.17	QP	
8	1.6823	18.90	11.11	30.01	46.00	-15.99	AVG	
9	8.8665	24.48	11.62	36.10	60.00	-23.90	QP	
10	8.8665	15.71	11.62	27.33	50.00	-22.67	AVG	
11	21.2595	31.49	14.72	46.21	60.00	-13.79	QP	
12 *	21.2595	22.10	14.72	36.82	50.00	-13.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Ant 0°
-----------	-------------------------------------	--------------	--------

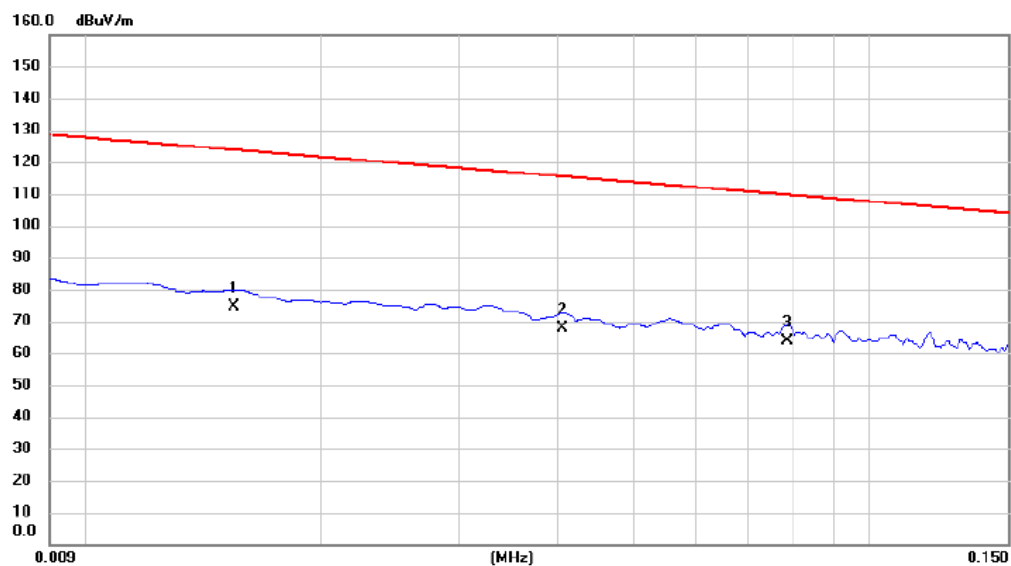


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0155	53.92	20.66	74.58	123.80	-49.22	AVG	
2	0.0406	46.48	21.15	67.63	115.43	-47.80	AVG	
3 *	0.0786	42.61	21.30	63.91	109.70	-45.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Ant 0°
-----------	-------------------------------------	--------------	--------

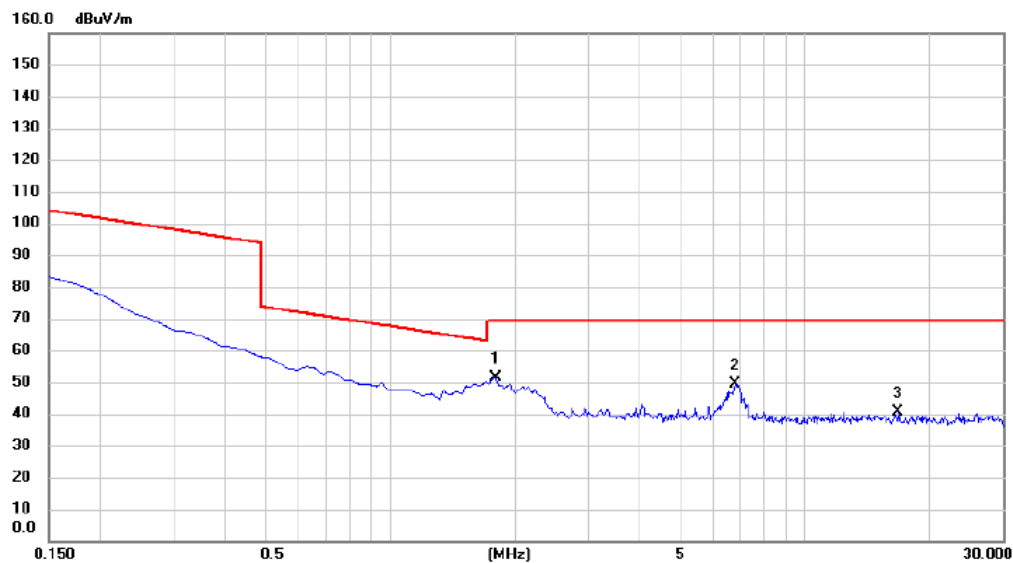


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	1.7917	30.40	21.02	51.42	69.54	-18.12	QP	
2		6.7767	28.30	21.00	49.30	69.54	-20.24	QP	
3		16.8063	19.60	21.04	40.64	69.54	-28.90	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Ant 90°
-----------	-------------------------------------	--------------	---------

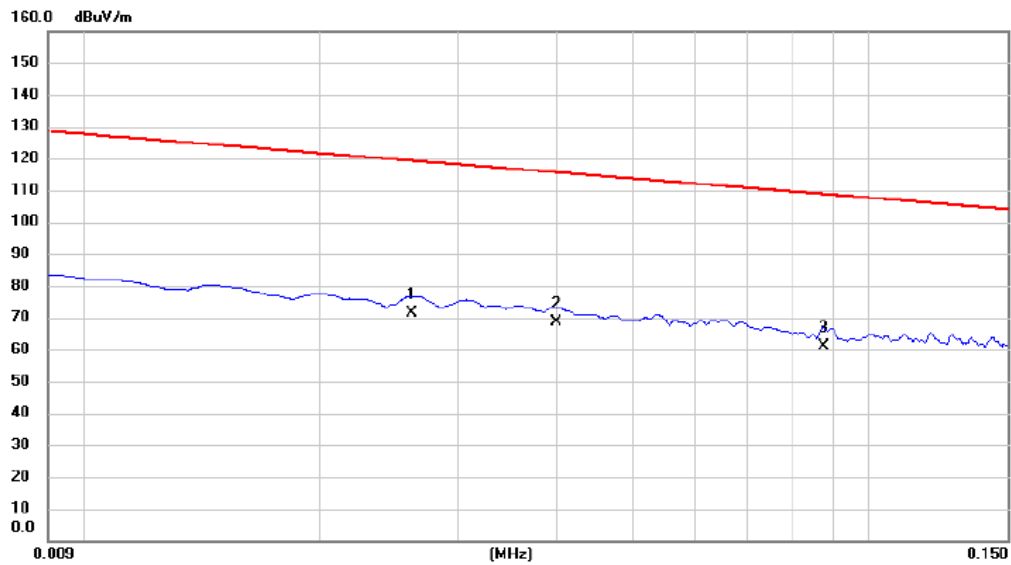


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0262	50.36	20.99	71.35	119.24	-47.89	AVG	
2	*	0.0400	47.29	21.15	68.44	115.56	-47.12	AVG	
3		0.0875	39.87	21.30	61.17	108.76	-47.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Ant 90°
-----------	-------------------------------------	--------------	---------

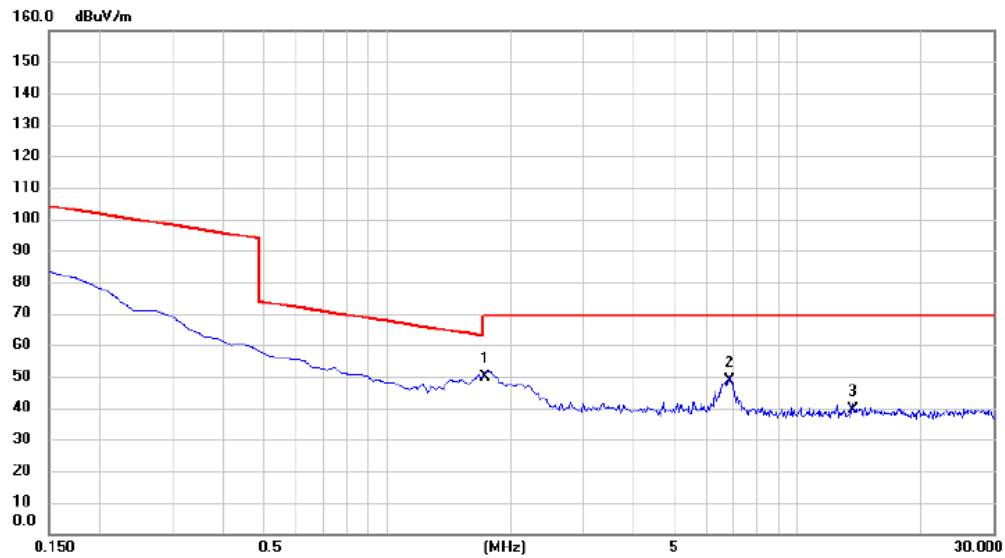

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.7321	28.63	21.03	49.66	69.54	-19.88	QP	
2		6.8065	27.73	21.00	48.73	69.54	-20.81	QP	
3		13.6422	18.23	20.98	39.21	69.54	-30.33	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

80 dBuV/m

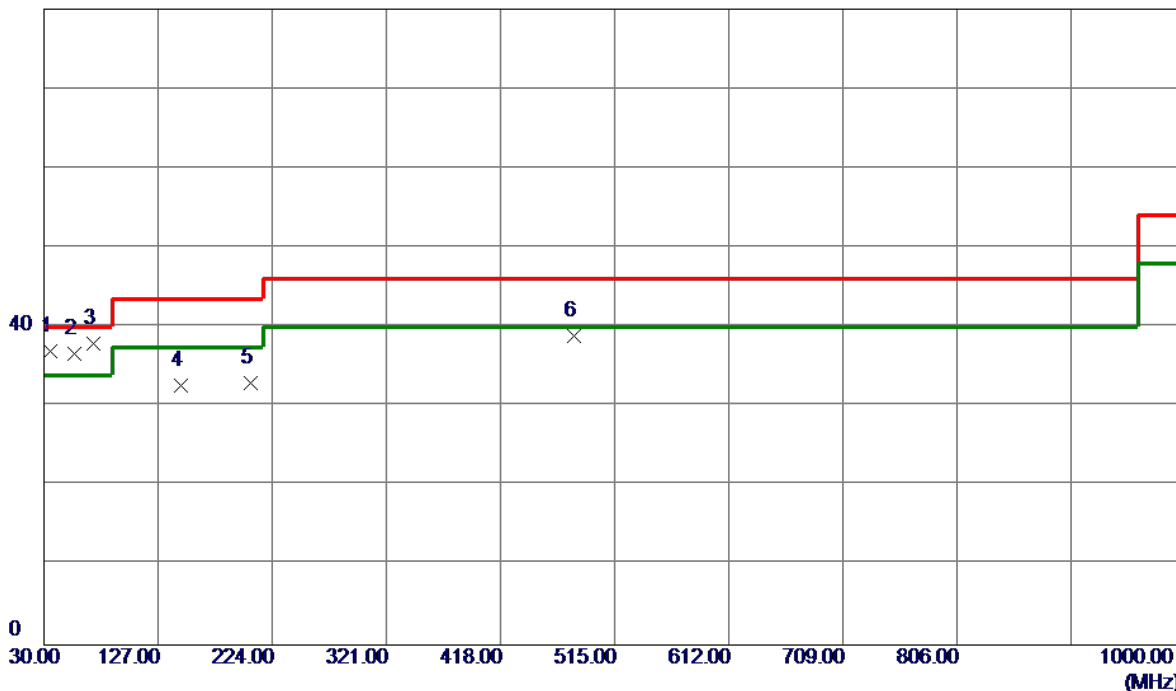


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	49.25	-12.25	37.00	40.00	-3.00	Peak	
2	56.1900	48.27	-11.61	36.66	40.00	-3.34	Peak	
3 *	72.1950	51.86	-13.90	37.96	40.00	-2.04	Peak	
4	145.9149	44.00	-11.38	32.62	43.50	-10.88	Peak	
5	206.0549	47.33	-14.40	32.93	43.50	-10.57	Peak	
6	480.0800	45.12	-6.23	38.89	46.00	-7.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

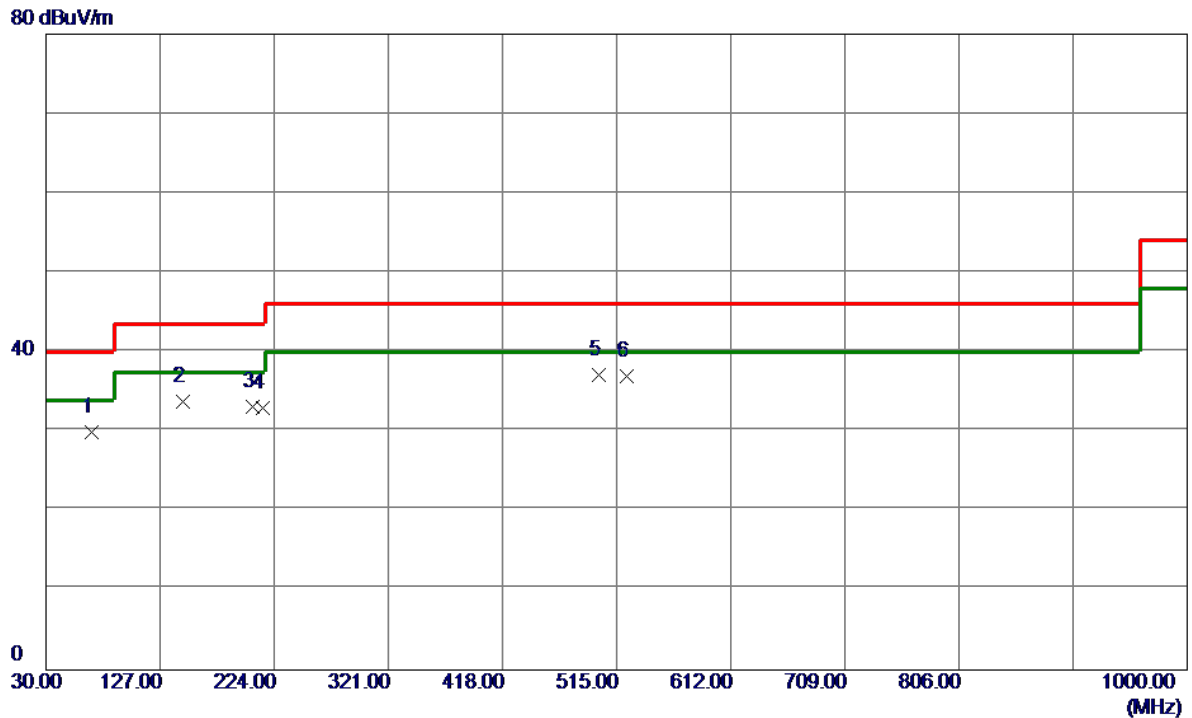


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	69.2850	43.28	-13.41	29.87	40.00	-10.13	Peak	
2	145.9149	45.16	-11.38	33.78	43.50	-9.72	Peak	
3	205.5700	47.51	-14.41	33.10	43.50	-10.40	Peak	
4	214.3000	47.36	-14.37	32.99	43.50	-10.51	Peak	
5 *	499.9650	42.98	-5.93	37.05	46.00	-8.95	Peak	
6	523.2450	42.36	-5.47	36.89	46.00	-9.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

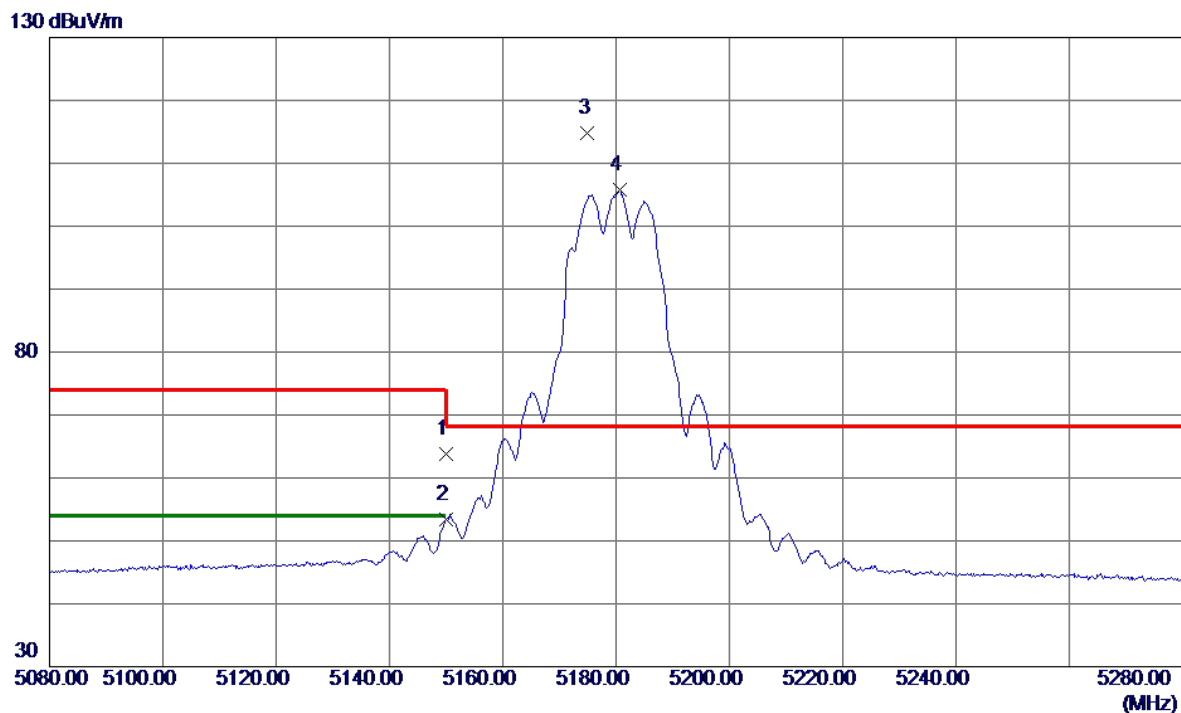


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.58	14.21	63.79	74.00	-10.21	Peak	
2	5150.0000	39.13	14.21	53.34	54.00	-0.66	AVG	
3 *	5175.0000	100.56	14.22	114.78	68.20	46.58	Peak	No Limit
4	5180.6000	91.51	14.22	105.73	999.00	-893.27	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

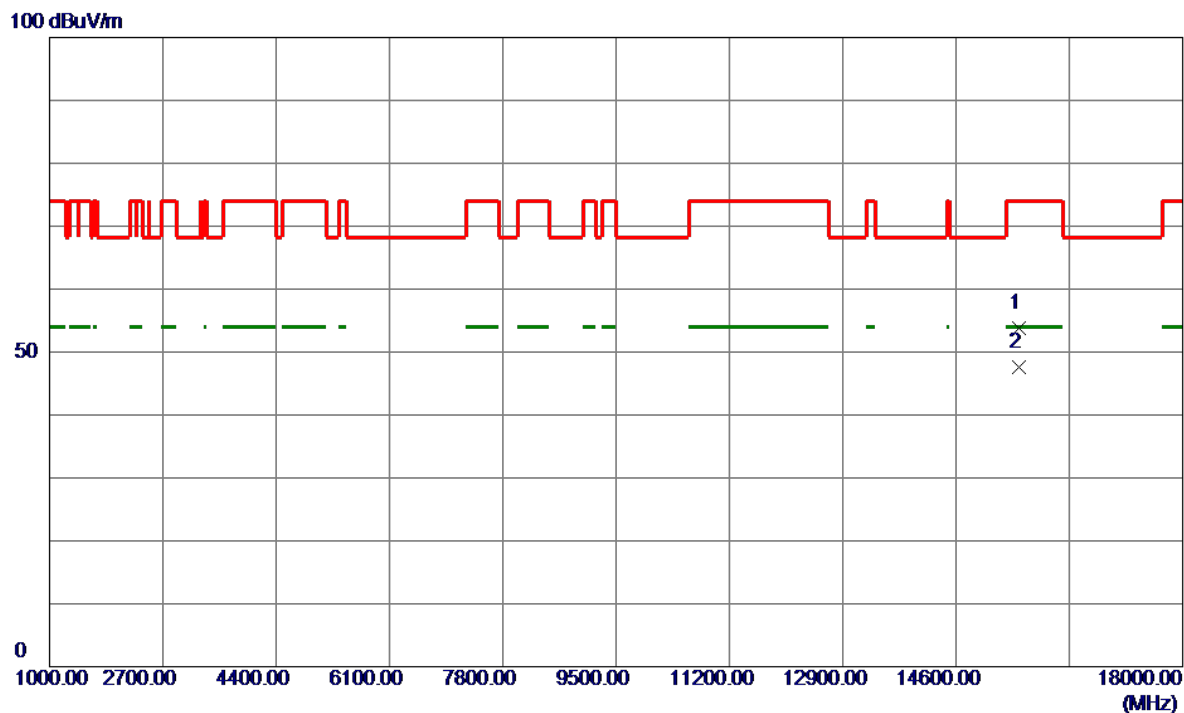


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15537.1000	41.98	11.80	53.78	74.00	-20.22	Peak	
2 *	15541.0500	35.74	11.80	47.54	54.00	-6.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

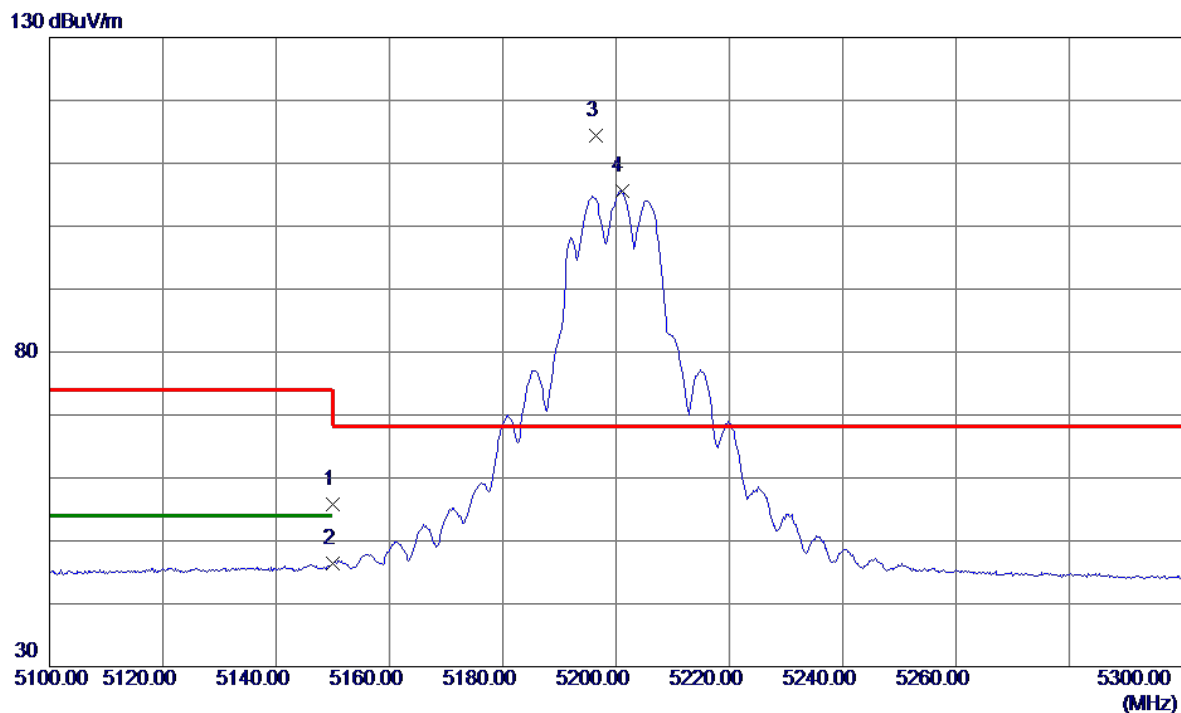


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.62	14.21	55.83	74.00	-18.17	Peak	
2	5150.0000	32.10	14.21	46.31	54.00	-7.69	AVG	
3 *	5196.4000	100.13	14.23	114.36	68.20	46.16	Peak	No Limit
4	5201.0000	91.34	14.23	105.57	999.00	-893.43	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

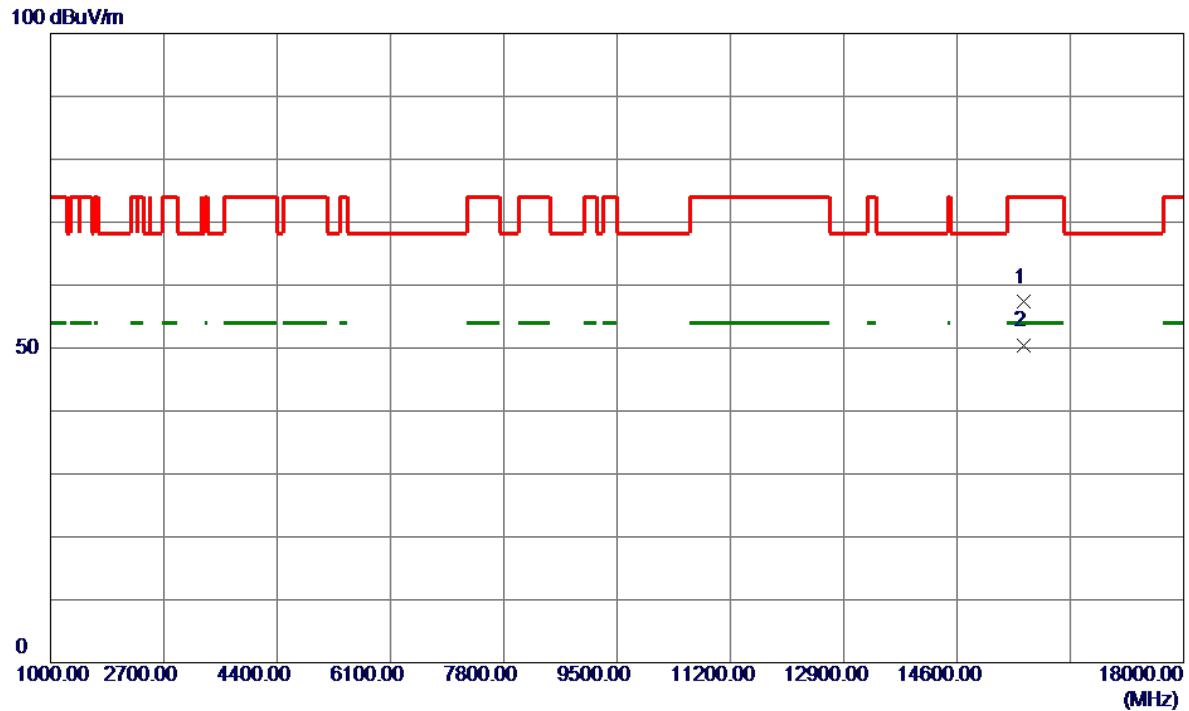


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15600.5500	45.54	11.76	57.30	74.00	-16.70	Peak	
2 *	15600.7500	38.69	11.76	50.45	54.00	-3.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

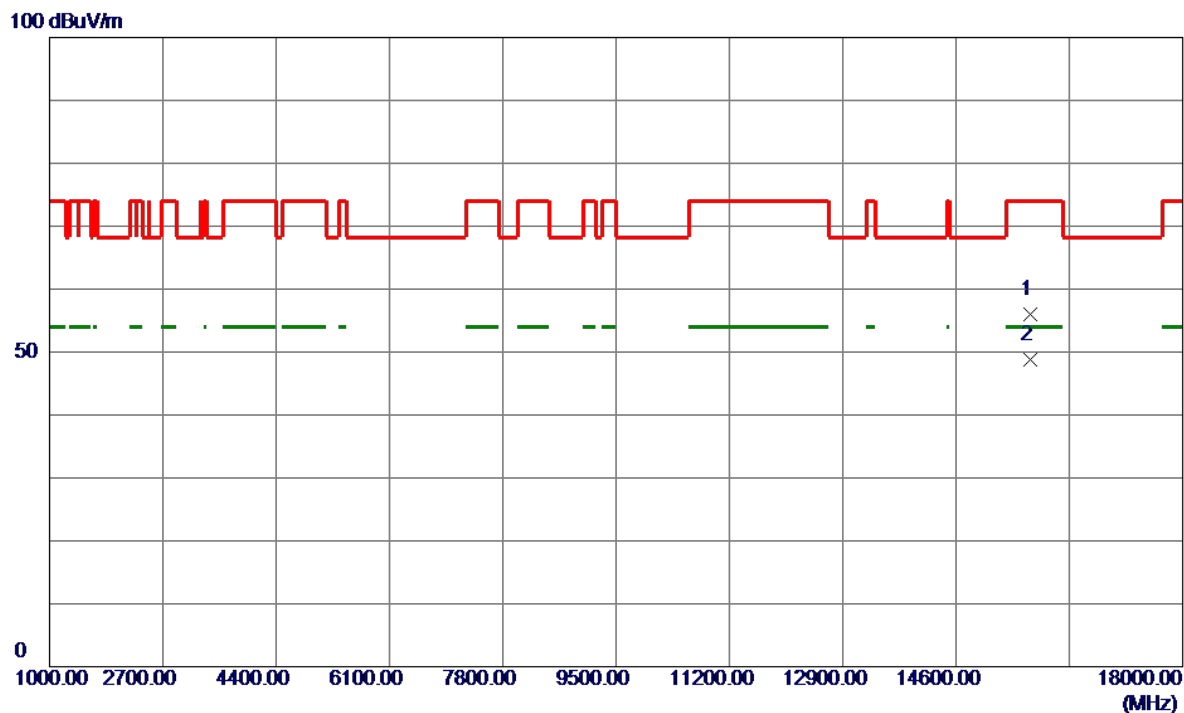


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15716.8500	44.27	11.69	55.96	74.00	-18.04	Peak	
2 *	15721.3500	37.05	11.69	48.74	54.00	-5.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

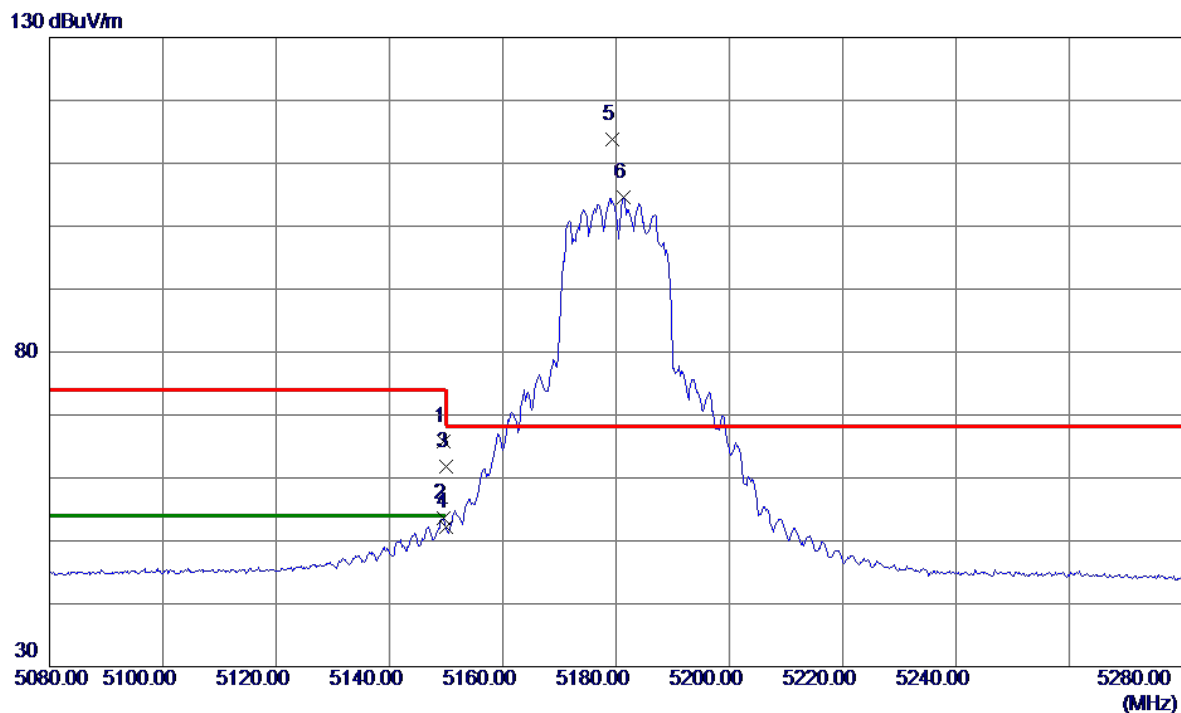


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.6000	51.52	14.21	65.73	74.00	-8.27	Peak	
2	5149.6000	39.45	14.21	53.66	54.00	-0.34	AVG	
3	5150.0000	47.51	14.21	61.72	74.00	-12.28	Peak	
4	5150.0000	38.03	14.21	52.24	54.00	-1.76	AVG	
5 *	5179.4000	99.49	14.22	113.71	68.20	45.51	Peak	No Limit
6	5181.4000	90.33	14.22	104.55	999.00	-894.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

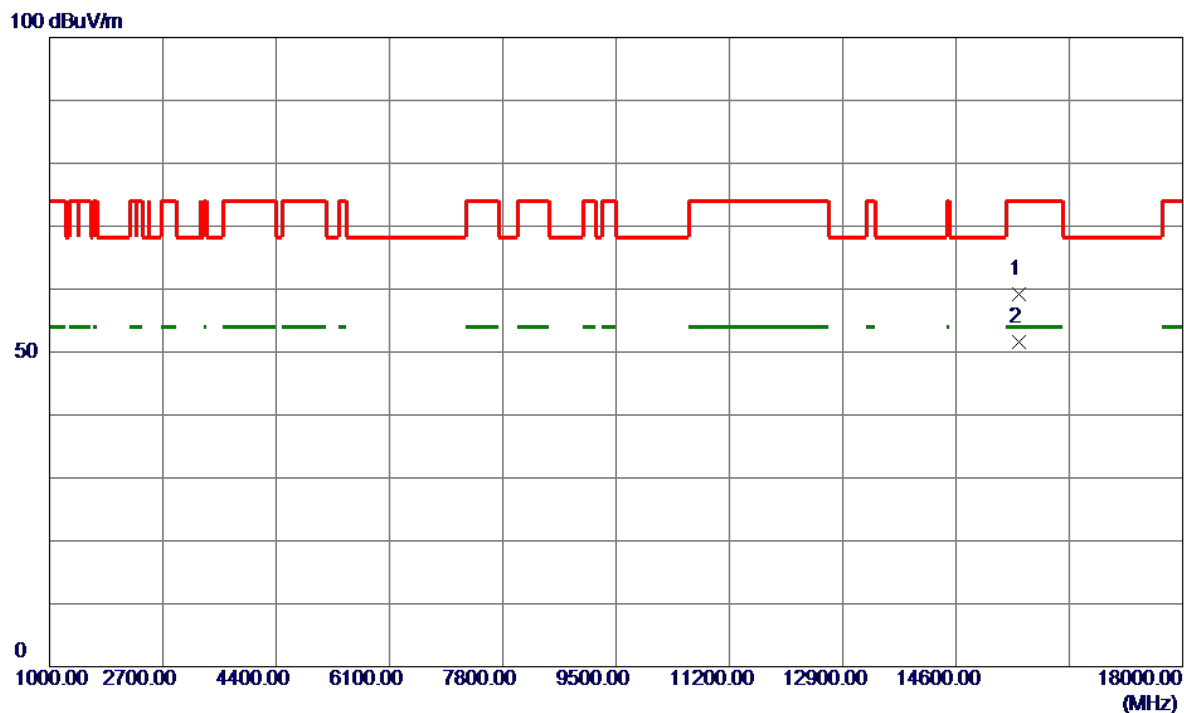


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15535.2000	47.37	11.80	59.17	74.00	-14.83	Peak	
2 *	15540.5000	39.86	11.80	51.66	54.00	-2.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

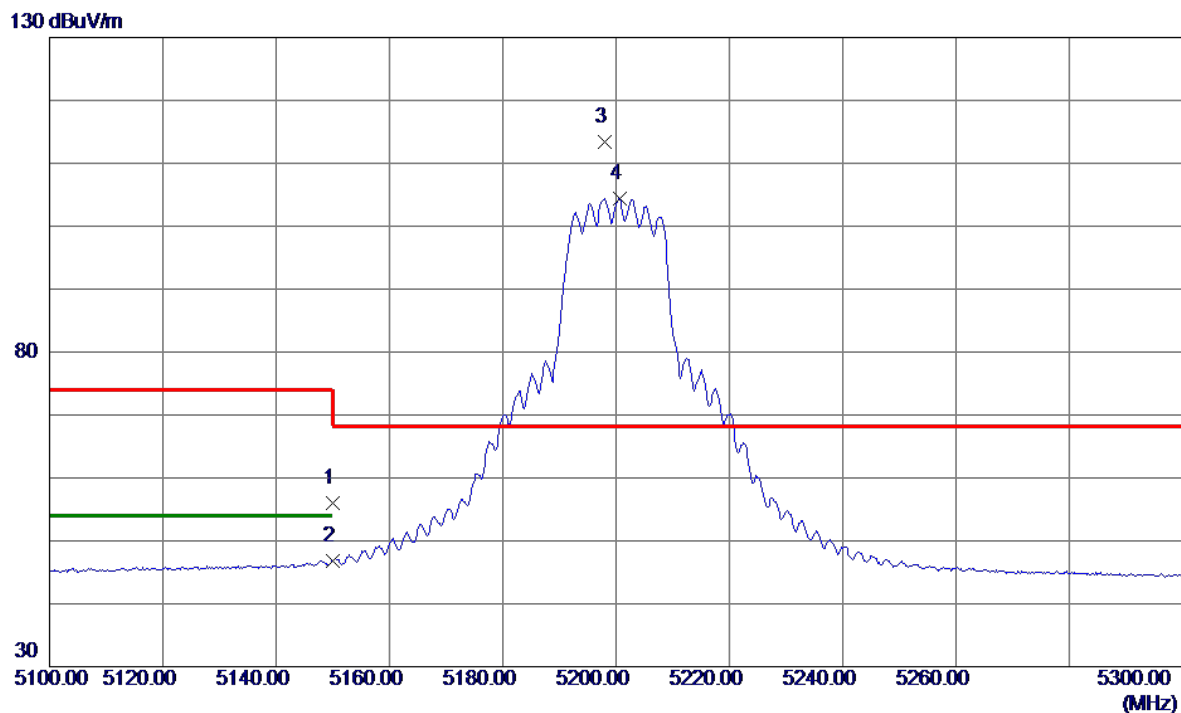


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.81	14.21	56.02	74.00	-17.98	Peak	
2	5150.0000	32.60	14.21	46.81	54.00	-7.19	AVG	
3 *	5198.0000	99.12	14.23	113.35	68.20	45.15	Peak	No Limit
4	5200.6000	90.26	14.23	104.49	999.00	-894.51	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

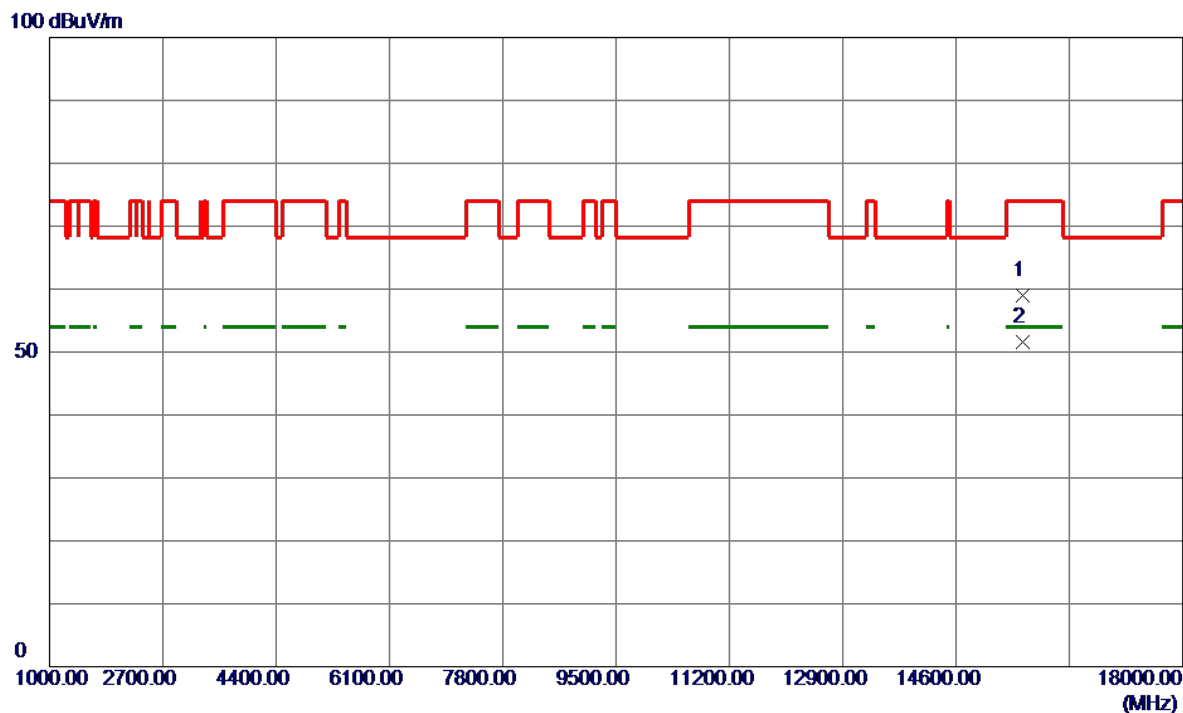


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15595.8000	47.31	11.77	59.08	74.00	-14.92	Peak	
2 *	15600.3500	39.91	11.76	51.67	54.00	-2.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

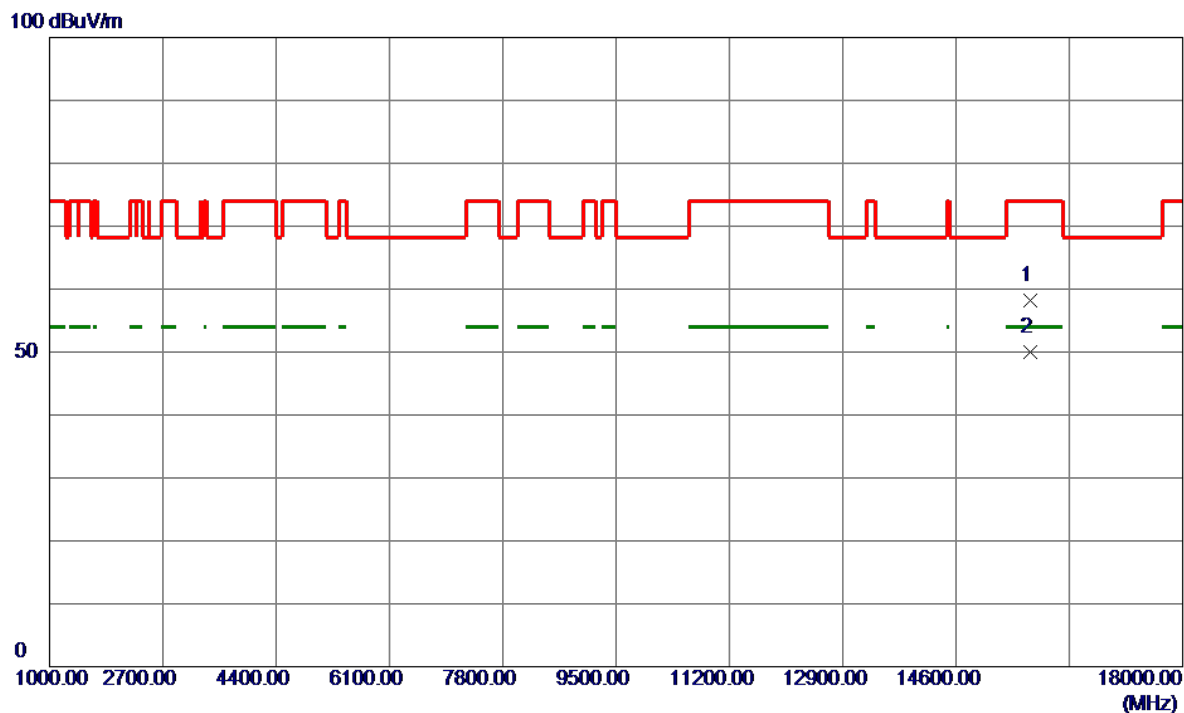


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15715.7500	46.60	11.69	58.29	74.00	-15.71	Peak	
2 *	15720.5500	38.22	11.69	49.91	54.00	-4.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

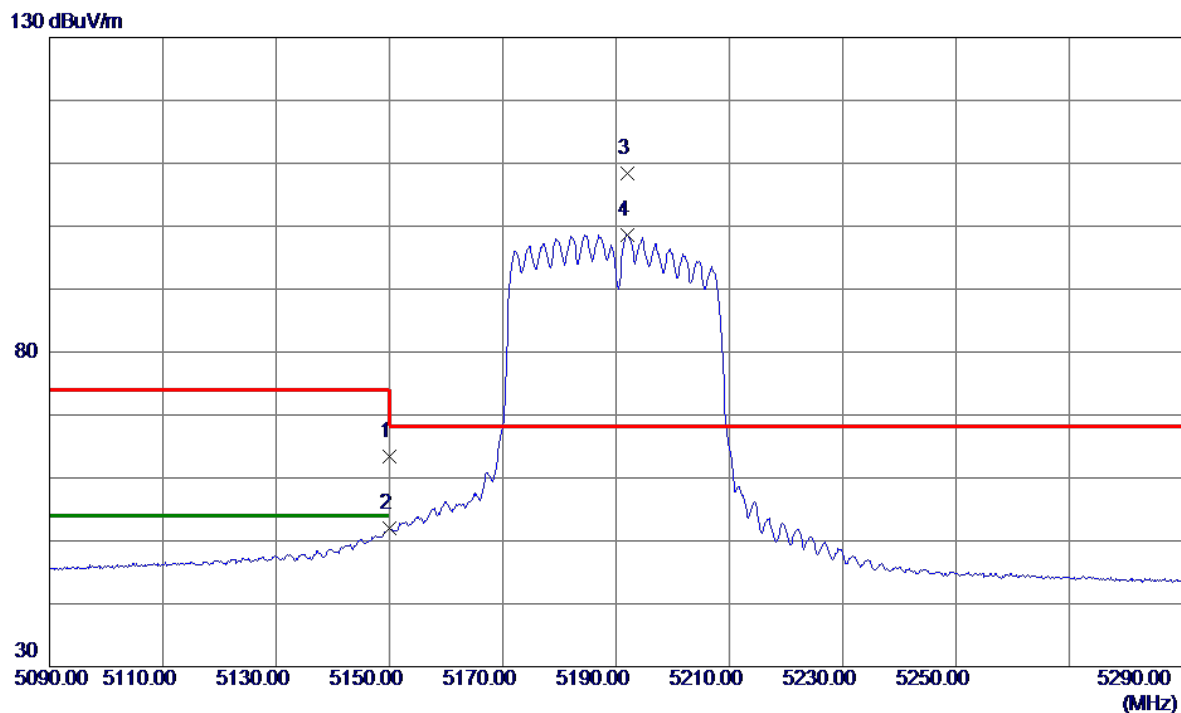


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.24	14.21	63.45	74.00	-10.55	Peak	
2	5150.0000	37.73	14.21	51.94	54.00	-2.06	AVG	
3 *	5192.0000	94.24	14.23	108.47	68.20	40.27	Peak	No Limit
4	5192.0000	84.37	14.23	98.60	999.00	-900.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

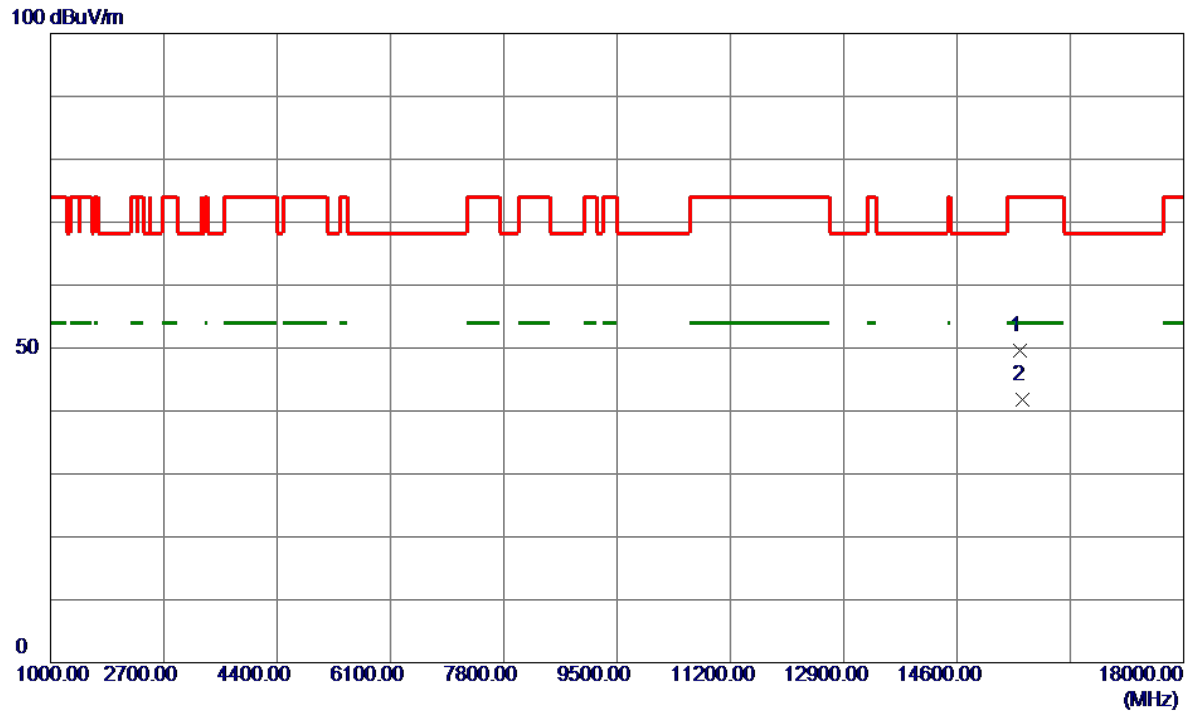


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15545.4500	37.81	11.80	49.61	74.00	-24.39	Peak	
2 *	15575.6500	30.10	11.78	41.88	54.00	-12.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5230 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

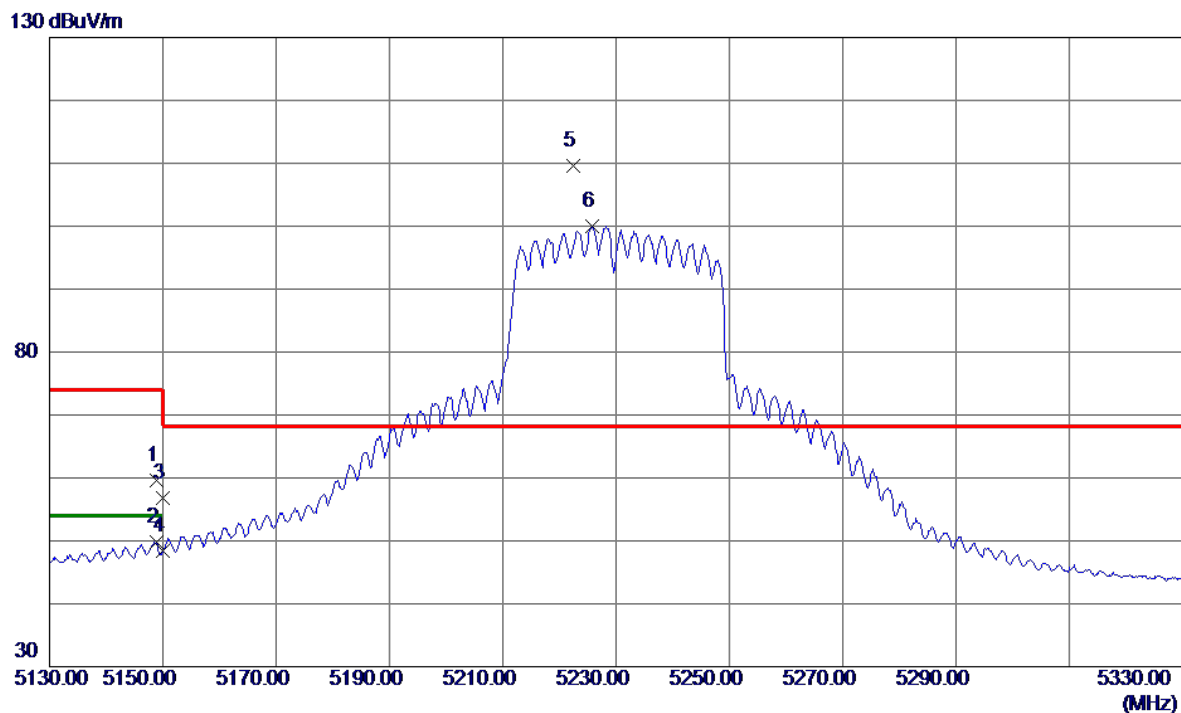


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.8000	45.47	14.21	59.68	74.00	-14.32	Peak	
2	5148.8000	35.63	14.21	49.84	54.00	-4.16	AVG	
3	5150.0000	42.55	14.21	56.76	74.00	-17.24	Peak	
4	5150.0000	34.21	14.21	48.42	54.00	-5.58	AVG	
5 *	5222.4000	95.40	14.24	109.64	68.20	41.44	Peak	No Limit
6	5225.8000	85.72	14.24	99.96	999.00	-899.04	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5230 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

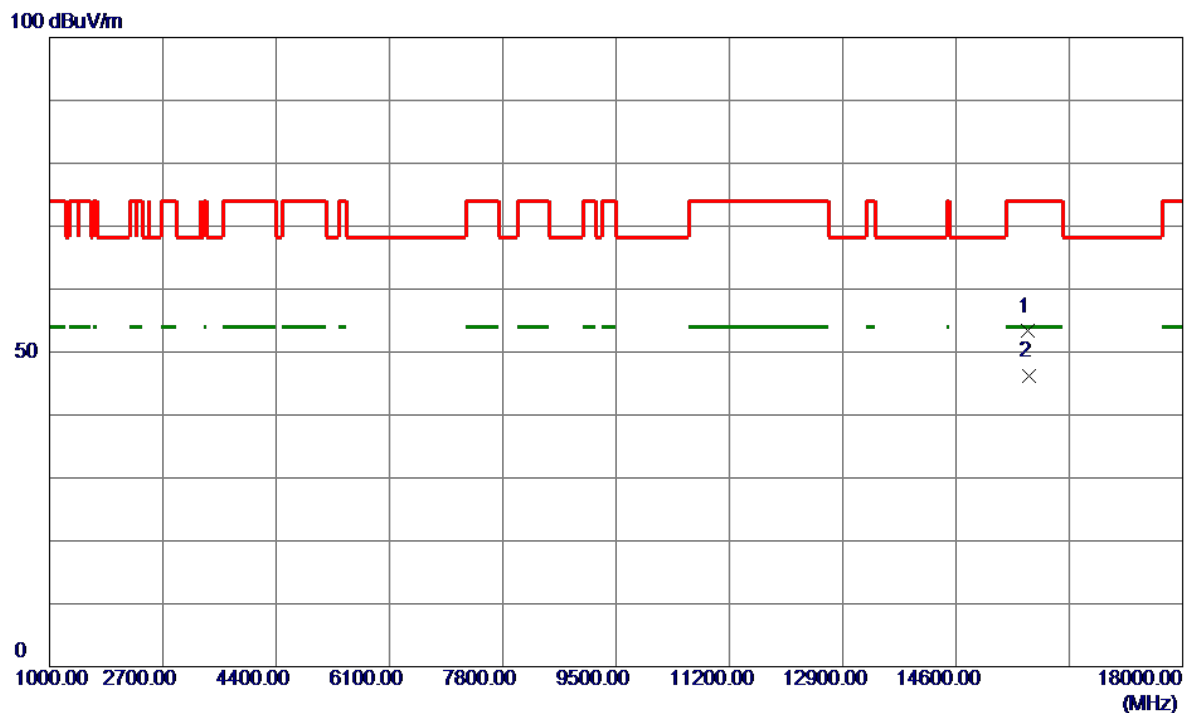


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15683.0500	41.59	11.71	53.30	74.00	-20.70	Peak	
2 *	15688.0500	34.42	11.71	46.13	54.00	-7.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

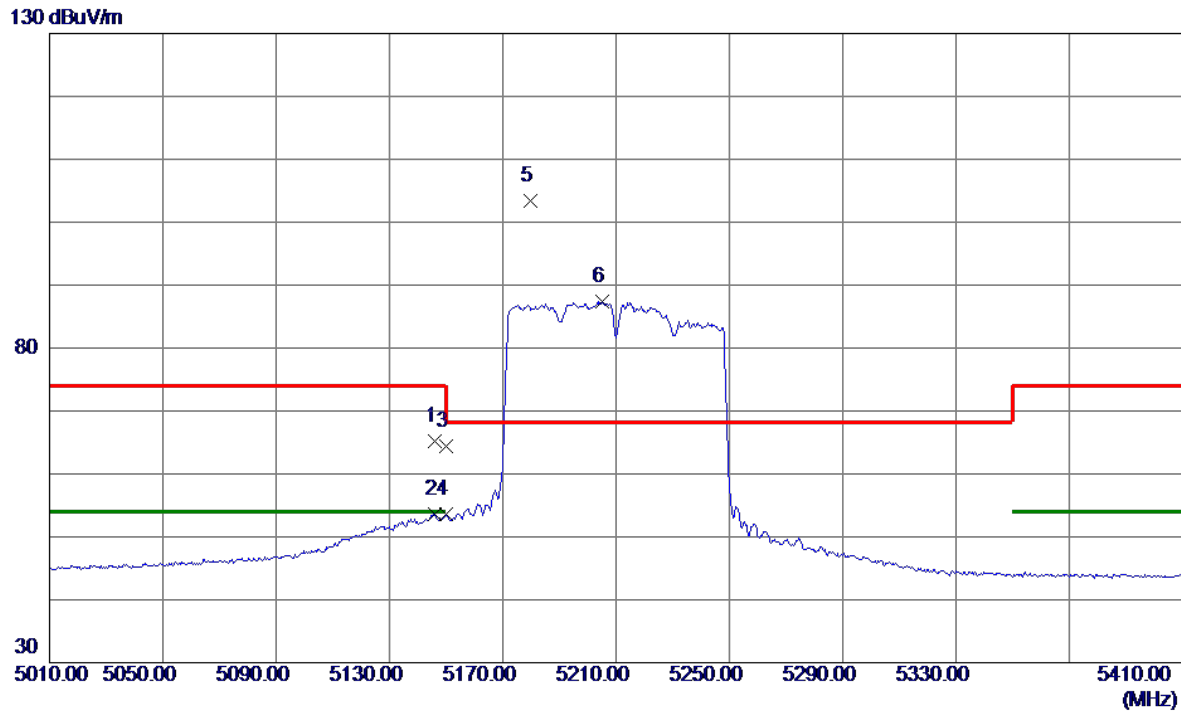


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.0000	51.03	14.21	65.24	74.00	-8.76	Peak	
2	5146.0000	39.45	14.21	53.66	54.00	-0.34	AVG	
3	5150.0000	50.11	14.21	64.32	74.00	-9.68	Peak	
4	5150.0000	39.35	14.21	53.56	54.00	-0.44	AVG	
5 *	5179.6000	89.18	14.22	103.40	68.20	35.20	Peak	No Limit
6	5205.2000	73.21	14.23	87.44	999.00	-911.56	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

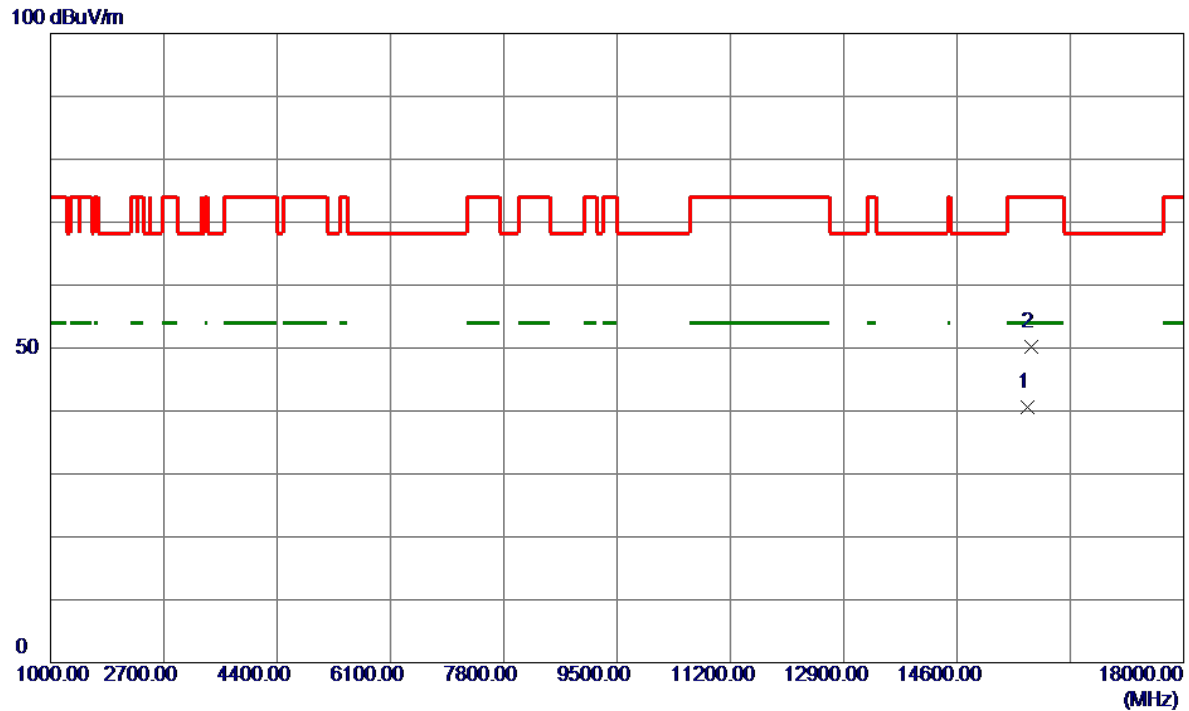


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15661.8000	28.82	11.73	40.55	54.00	-13.45	AVG	
2	15711.4000	38.50	11.70	50.20	74.00	-23.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

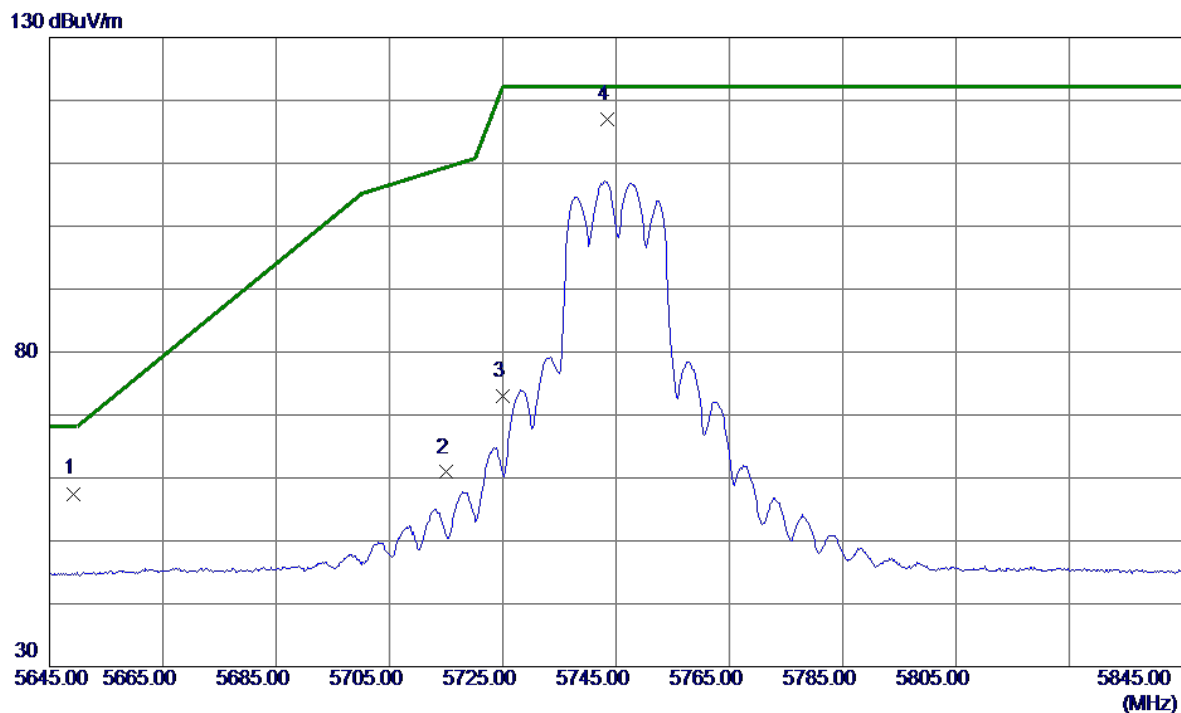


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5649.2000	42.81	14.69	57.50	68.20	-10.70	Peak	
2	5715.0000	46.06	14.84	60.90	109.40	-48.50	Peak	
3	5725.0000	58.09	14.86	72.95	122.20	-49.25	Peak	
4 *	5743.4000	102.05	14.90	116.95	122.20	-5.25	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

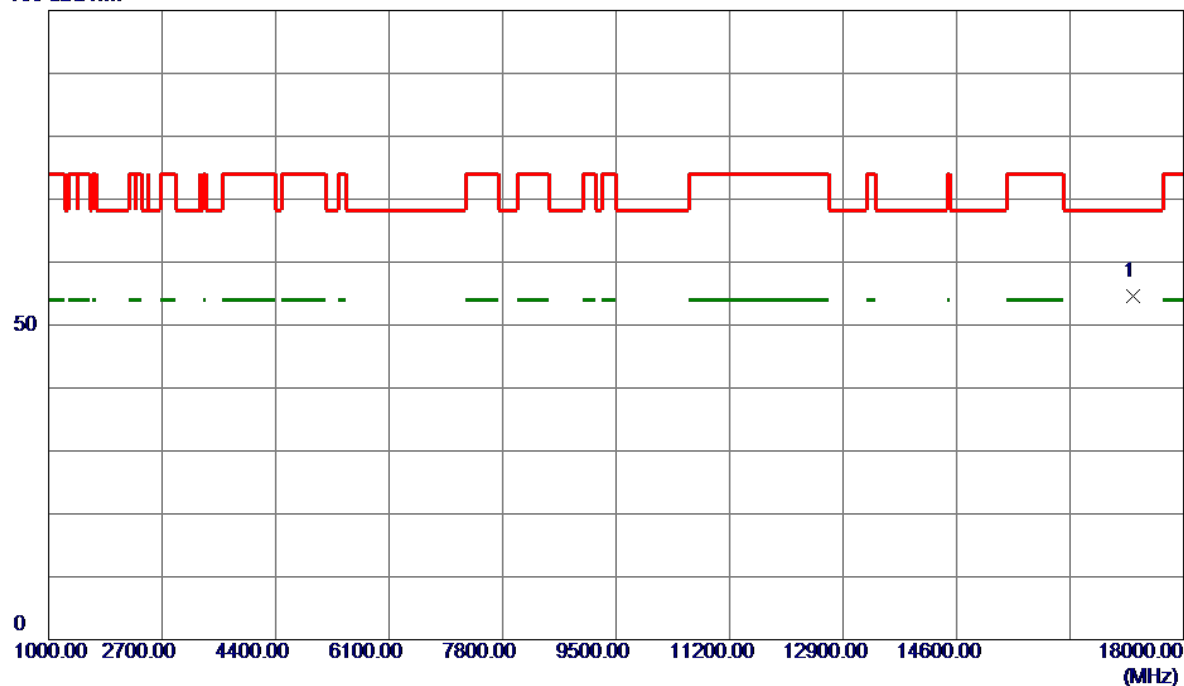


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17235.9000	44.22	10.38	54.60	68.20	-13.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

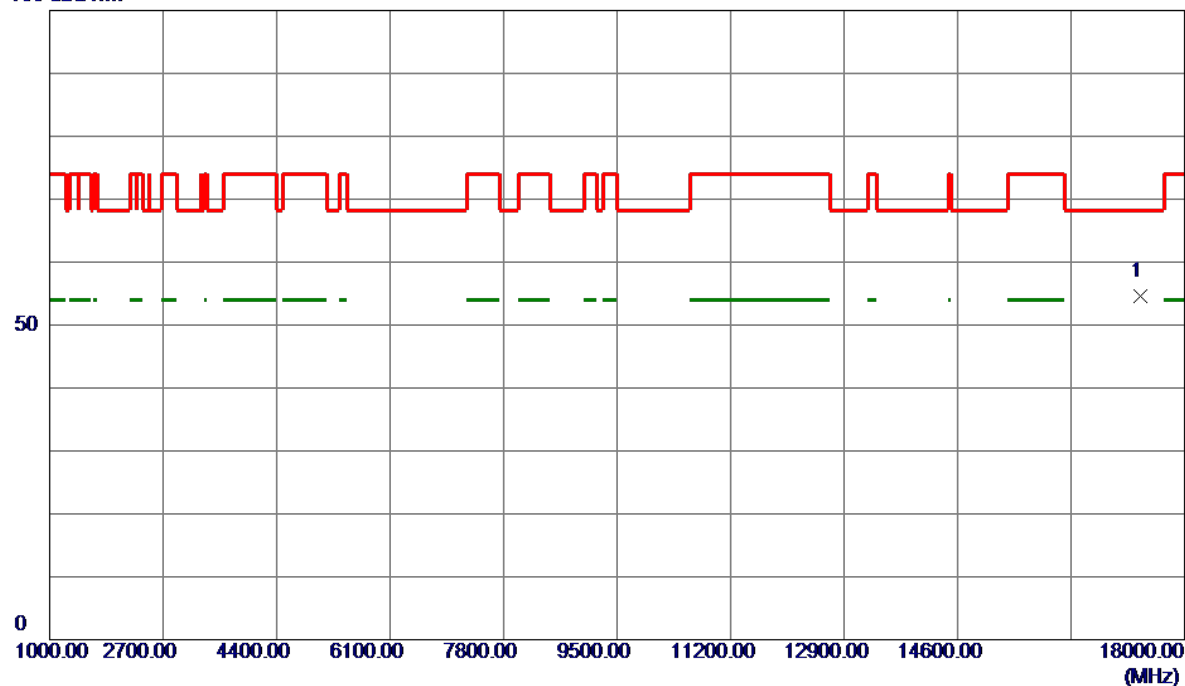


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17347.5500	44.24	10.30	54.54	68.20	-13.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

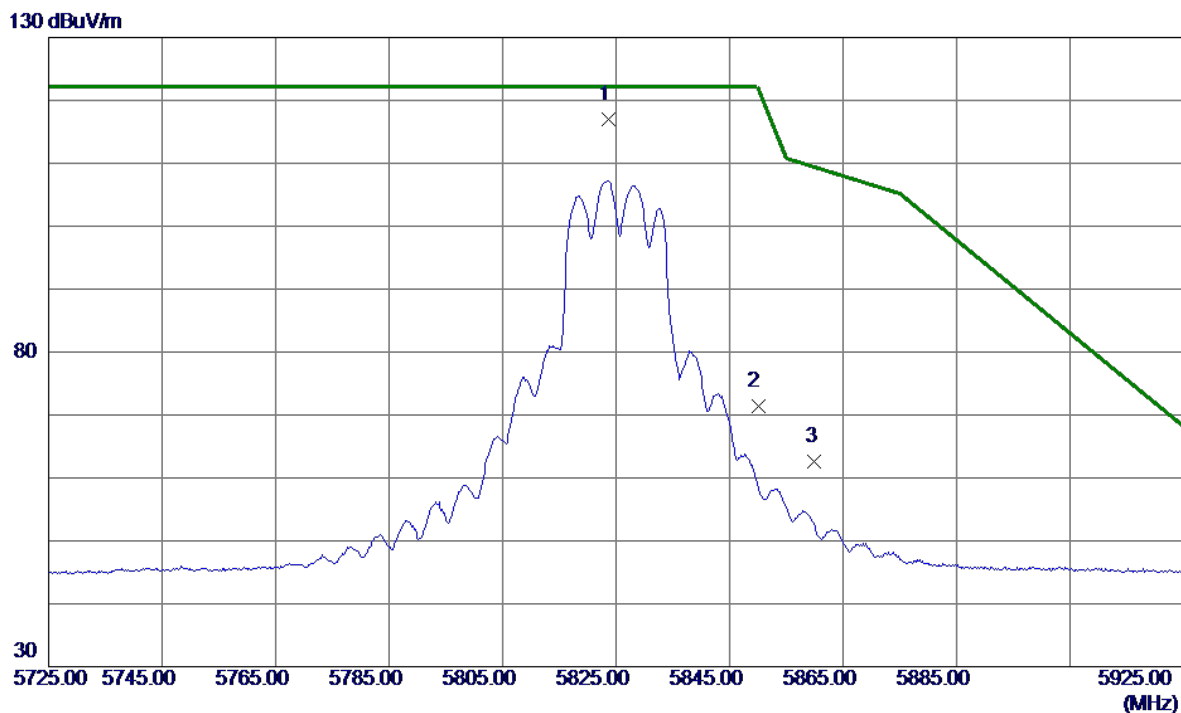


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.6000	101.98	15.08	117.06	122.20	-5.14	Peak	No Limit
2	5850.0000	56.35	15.14	71.49	122.20	-50.71	Peak	
3	5860.0000	47.35	15.16	62.51	109.40	-46.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

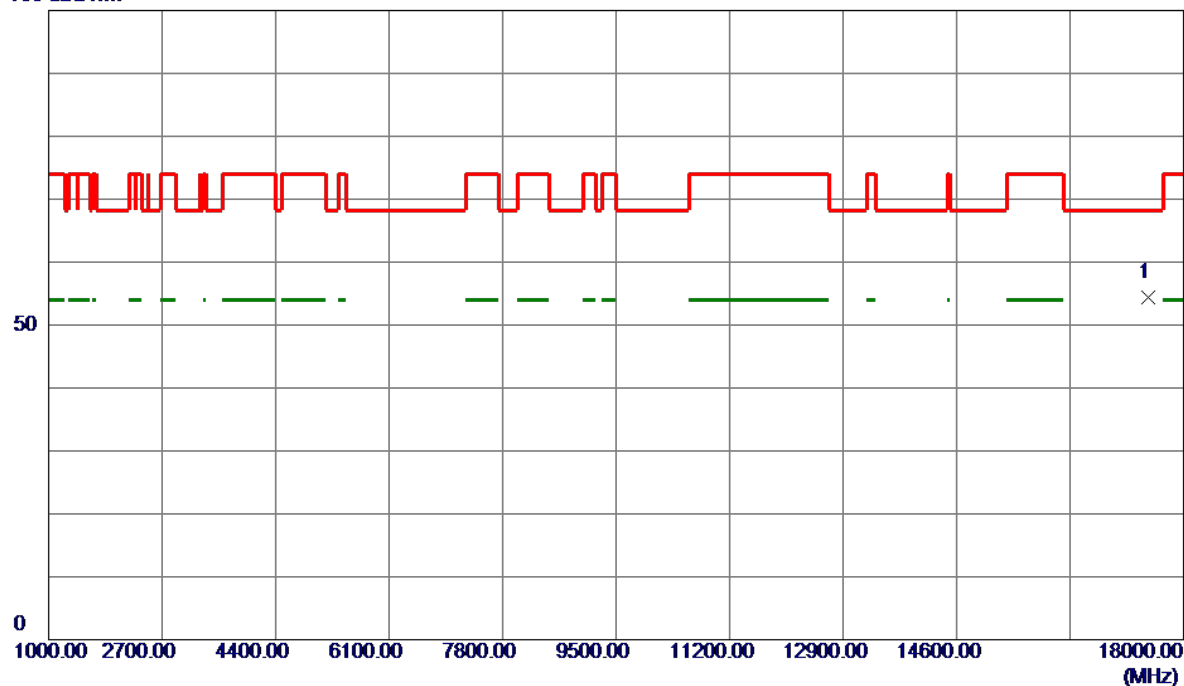


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17478.2500	44.21	10.21	54.42	68.20	-13.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

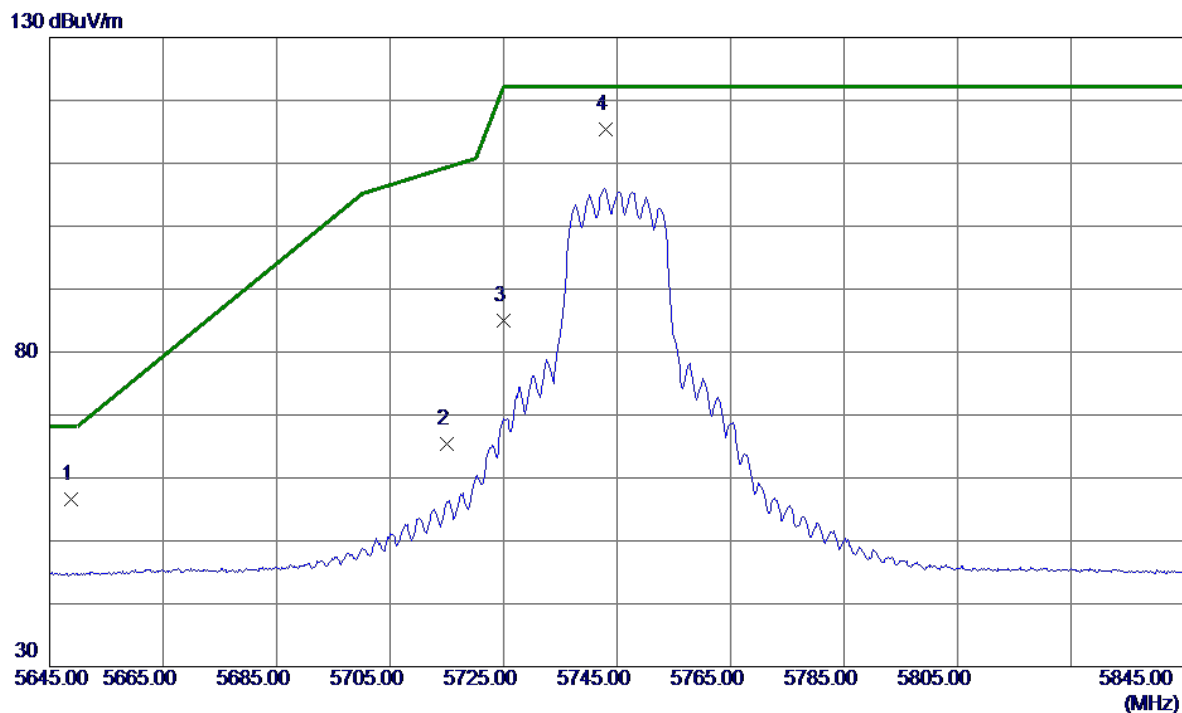

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.8000	41.98	14.69	56.67	68.20	-11.53	Peak	
2	5715.0000	50.50	14.84	65.34	109.40	-44.06	Peak	
3	5725.0000	70.22	14.86	85.08	122.20	-37.12	Peak	
4 *	5743.0000	100.45	14.90	115.35	122.20	-6.85	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

100 dBuV/m

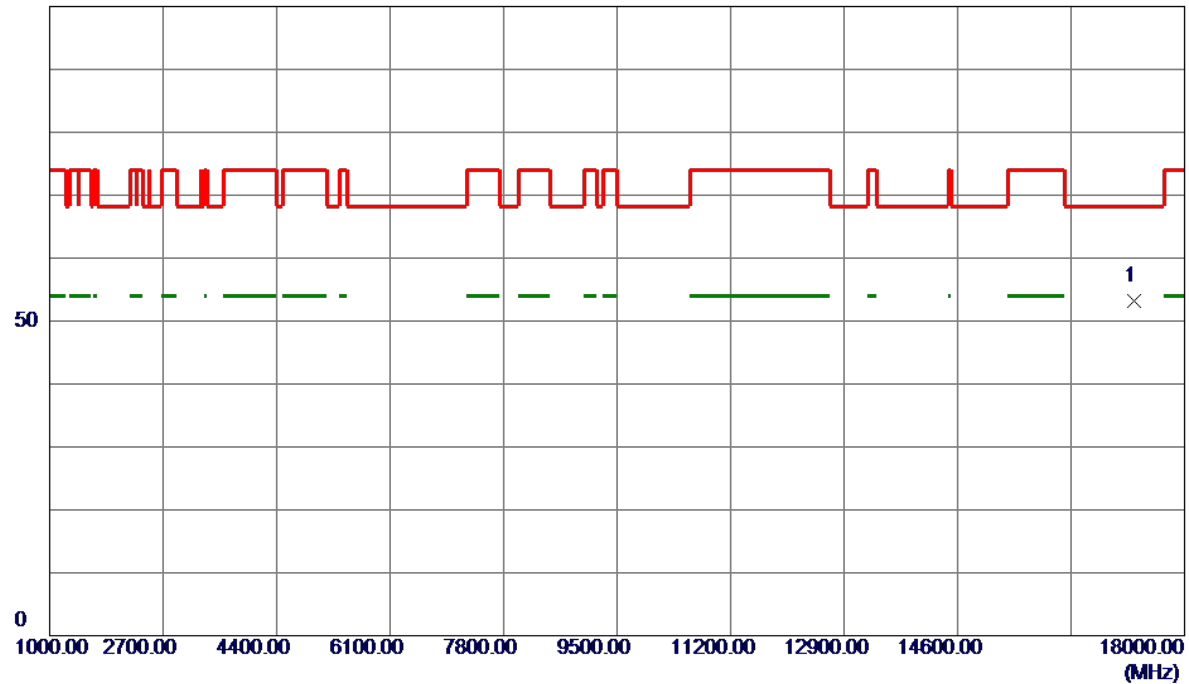


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17243.7500	42.86	10.37	53.23	68.20	-14.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

100 dBuV/m

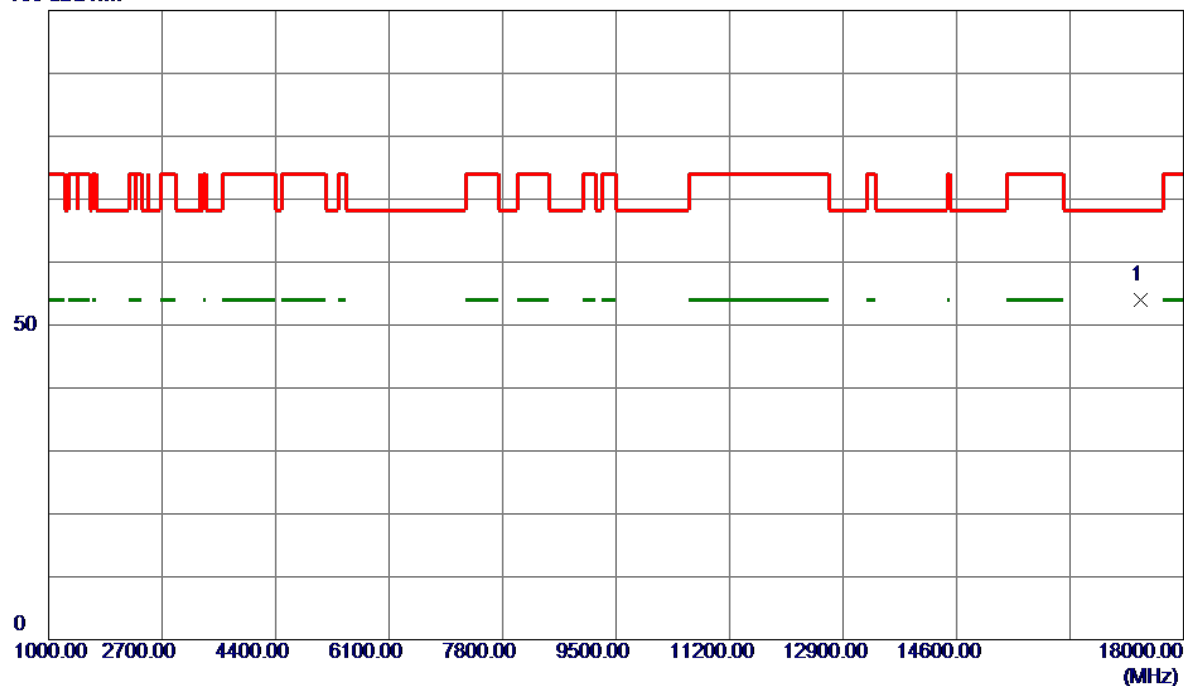


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17352.6500	43.64	10.30	53.94	68.20	-14.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

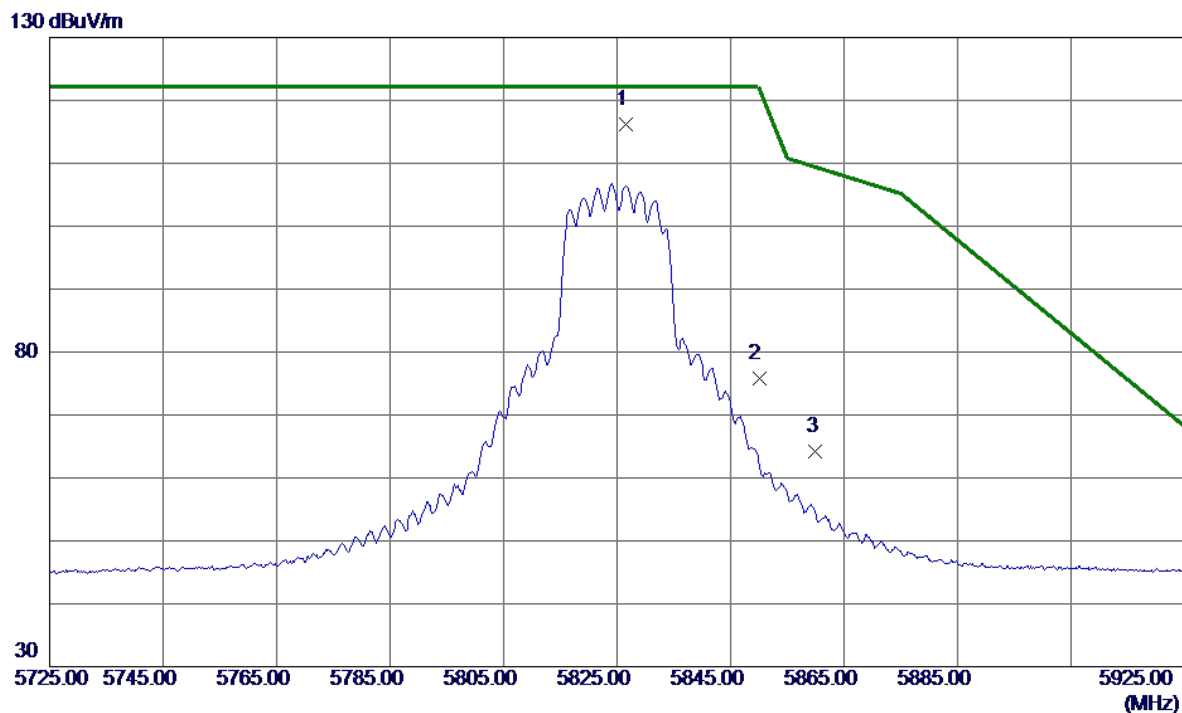


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.6000	101.10	15.09	116.19	122.20	-6.01	Peak	No Limit
2	5850.0000	60.67	15.14	75.81	122.20	-46.39	Peak	
3	5860.0000	48.97	15.16	64.13	109.40	-45.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

100 dBuV/m

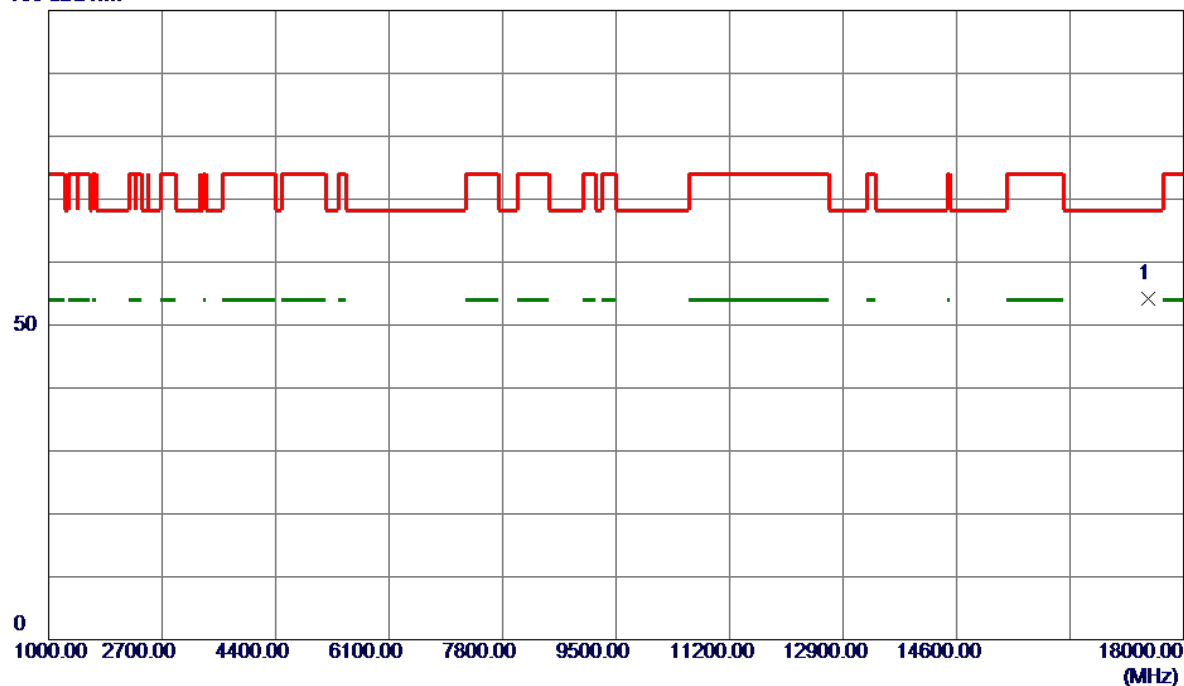


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.8000	44.02	10.22	54.24	68.20	-13.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

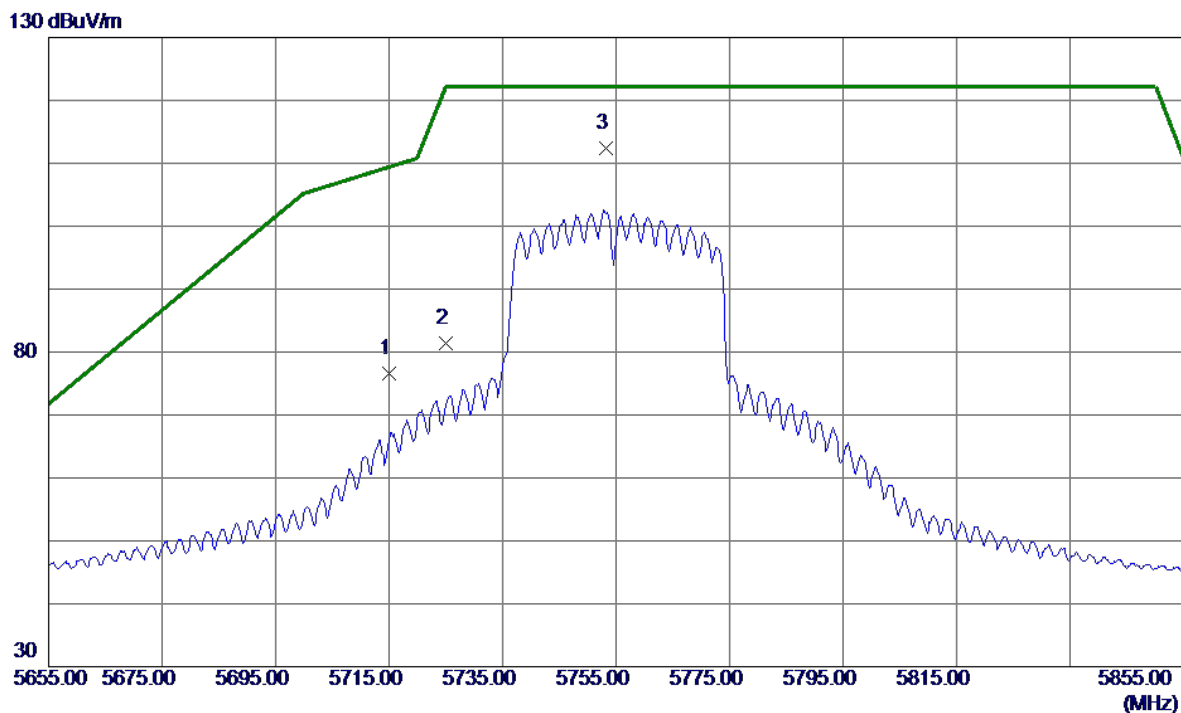


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	61.67	14.84	76.51	109.40	-32.89	Peak	
2	5725.0000	66.60	14.86	81.46	122.20	-40.74	Peak	
3 *	5753.2000	97.43	14.92	112.35	122.20	-9.85	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

100 dBuV/m

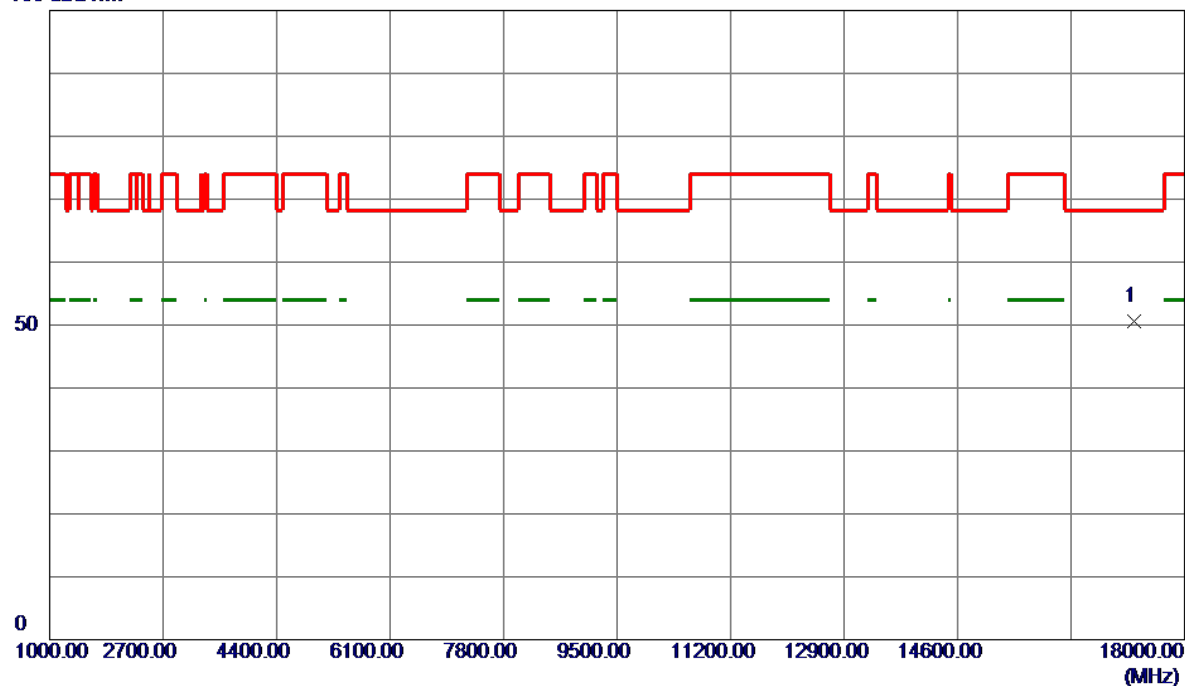


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17241.4500	40.29	10.38	50.67	68.20	-17.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

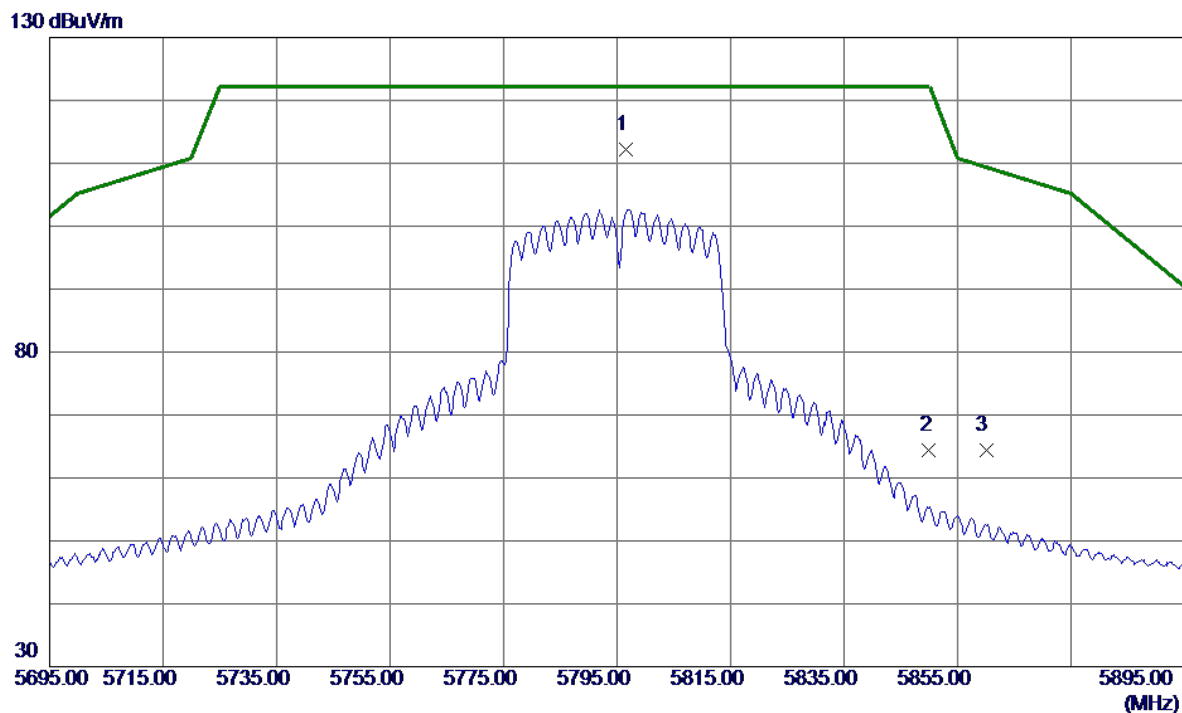


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5796.6000	97.15	15.02	112.17	122.20	-10.03	Peak	No Limit
2	5850.0000	49.22	15.14	64.36	122.20	-57.84	Peak	
3	5860.0000	49.30	15.16	64.46	109.40	-44.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

100 dBuV/m

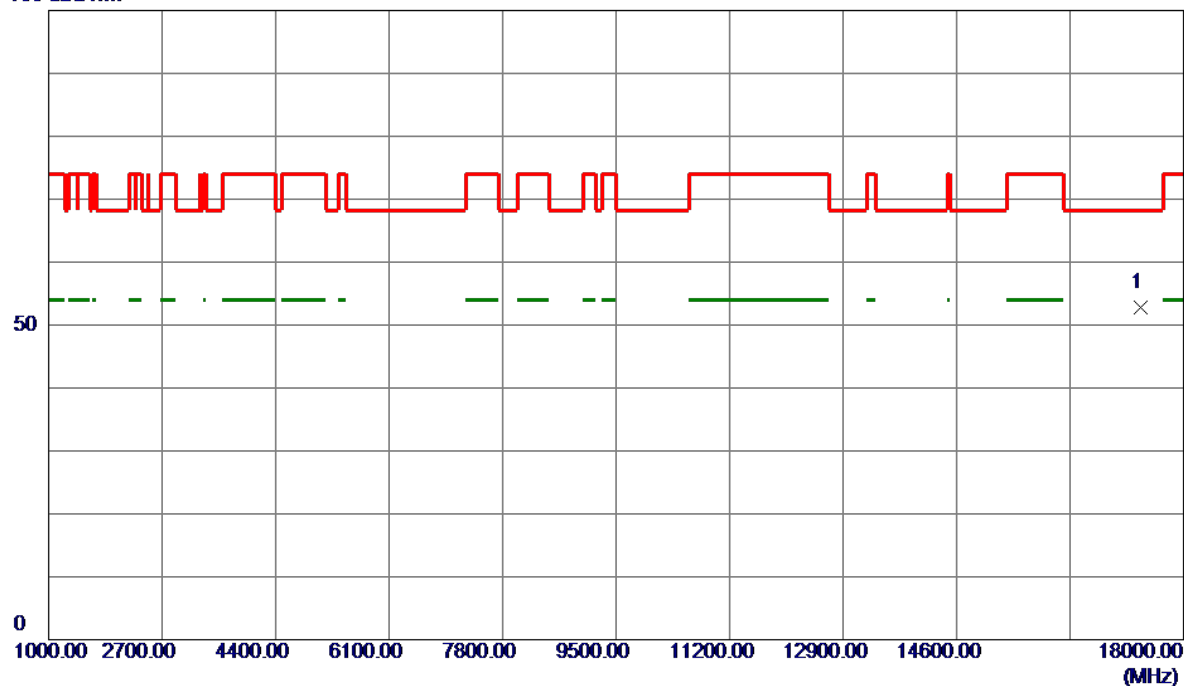


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17360.0500	42.59	10.30	52.89	68.20	-15.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

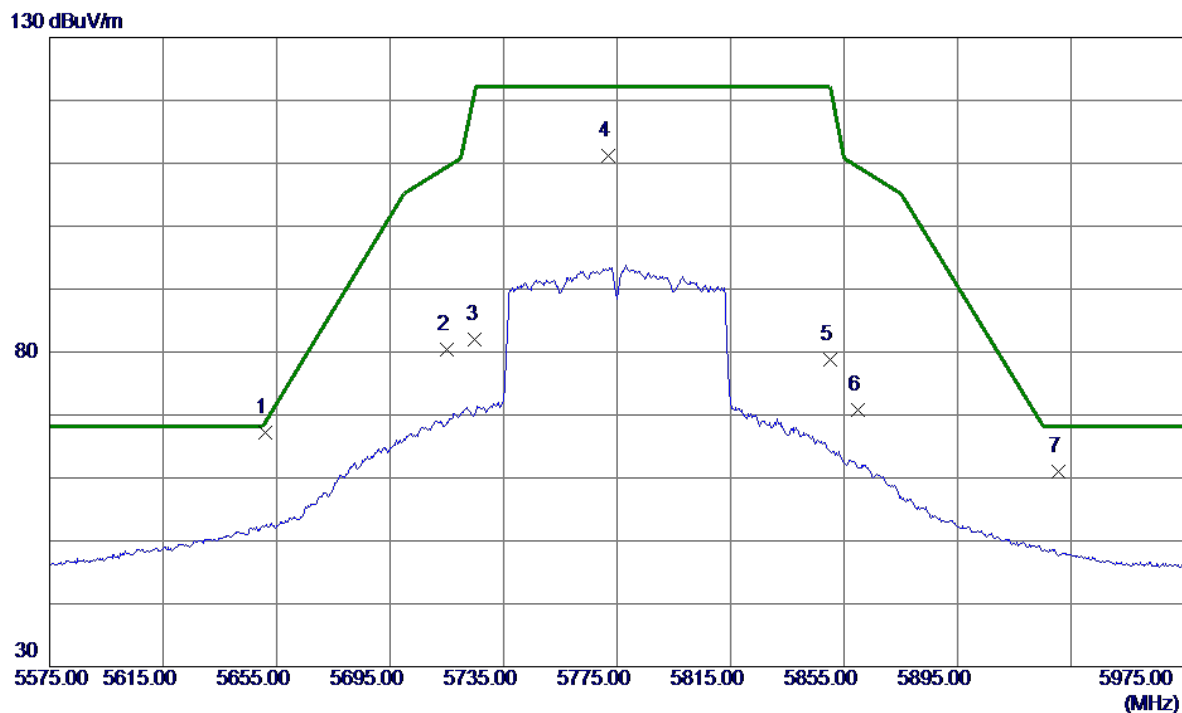


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5651.0000	52.48	14.69	67.17	68.94	-1.77	Peak	
2	5715.0000	65.60	14.84	80.44	109.40	-28.96	Peak	
3	5725.0000	67.11	14.86	81.97	122.20	-40.23	Peak	
4	5771.8000	96.19	14.96	111.15	122.20	-11.05	Peak	No Limit
5	5850.0000	63.70	15.14	78.84	122.20	-43.36	Peak	
6	5860.0000	55.66	15.16	70.82	109.40	-38.58	Peak	
7	5930.4000	45.66	15.32	60.98	68.20	-7.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

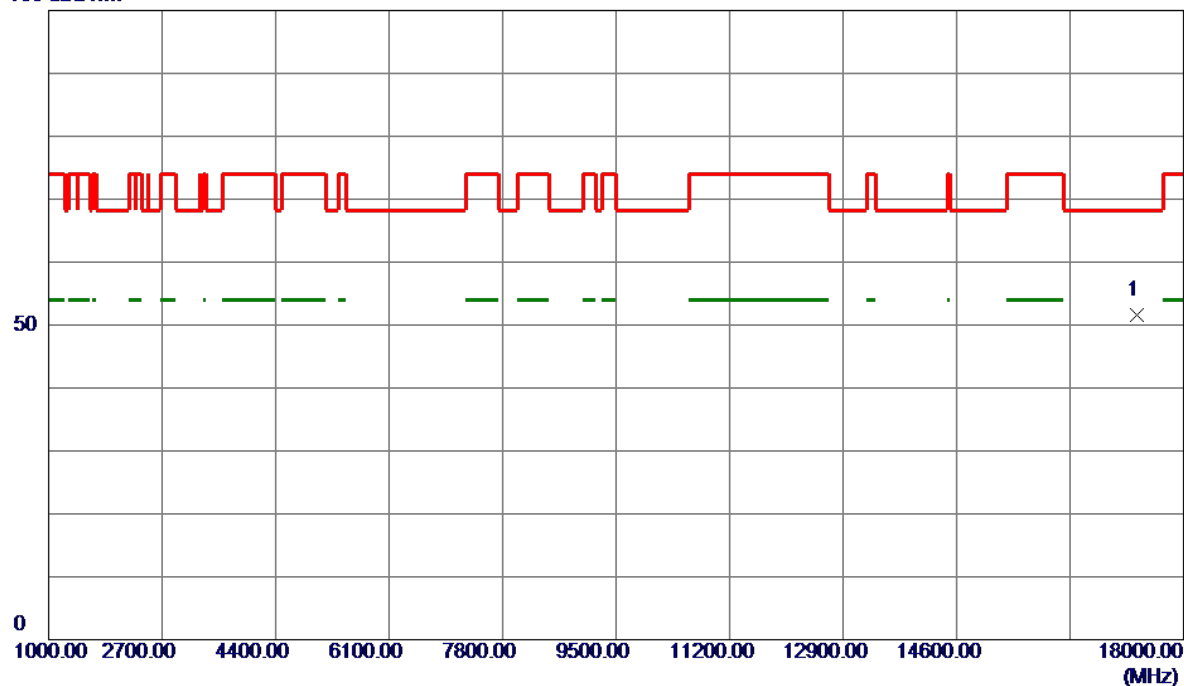


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17300.5000	41.30	10.34	51.64	68.20	-16.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

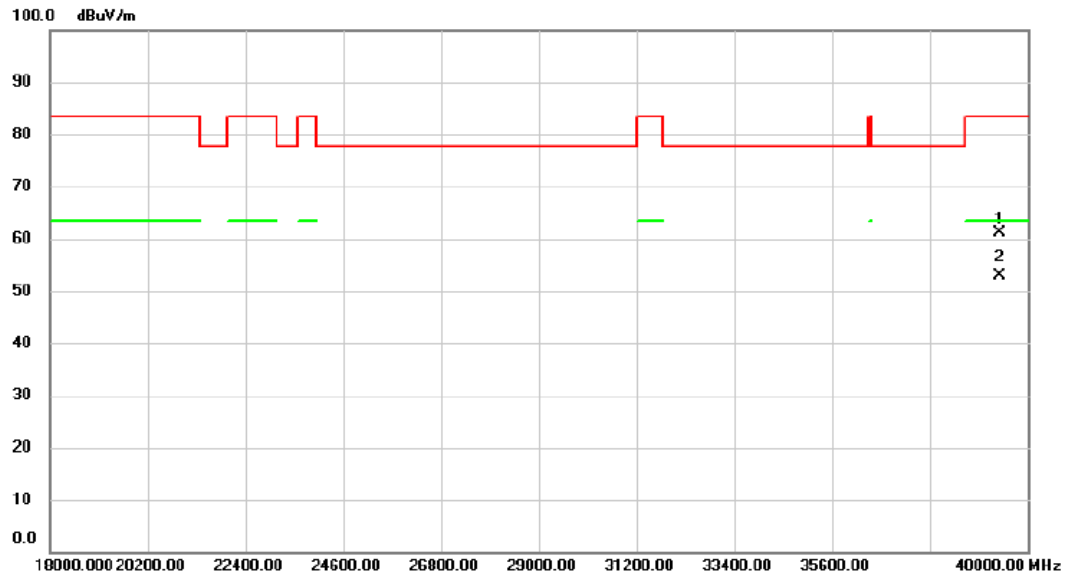


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39362.00	49.03	12.13	61.16	83.50	-22.34	peak	
2	*	39362.00	40.64	12.13	52.77	63.50	-10.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 40 (UNII-1)	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

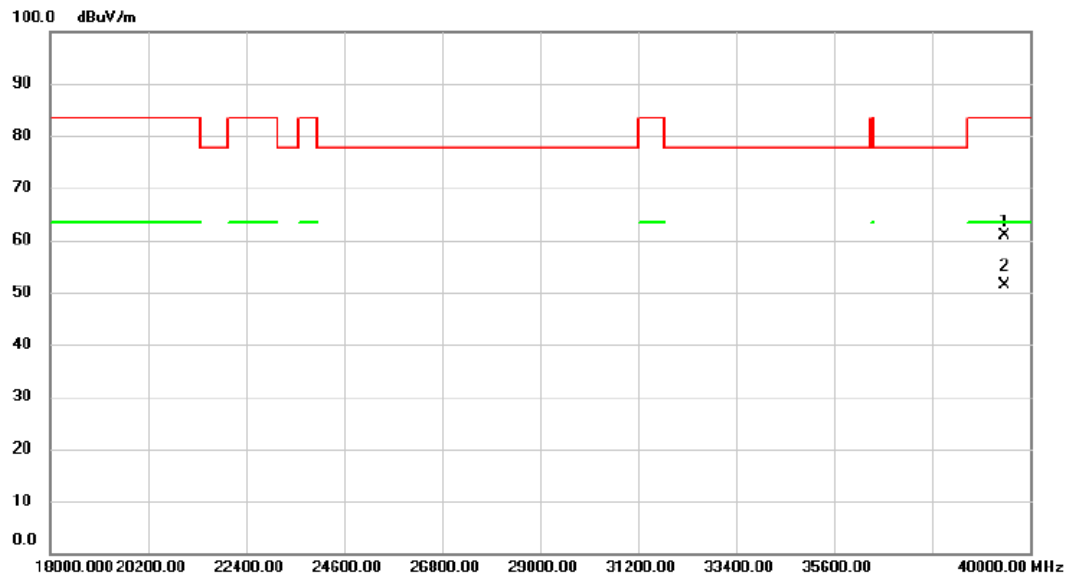

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39428.00	48.79	12.17	60.96	83.50	-22.54	peak	
2	*	39428.00	39.15	12.17	51.32	63.50	-12.18	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	29.388	17.700
40	5200	28.850	17.600
48	5240	29.650	17.500

CH36

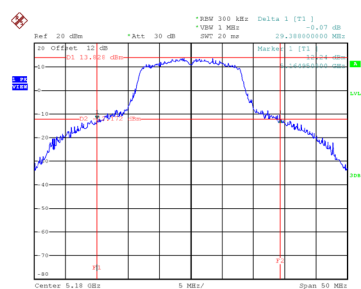


Date: 13.JUN.2024 16:50:51

CH40
26 dB Bandwidth

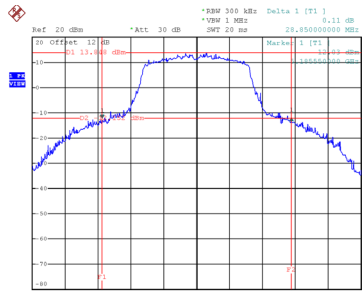


Date: 13.JUN.2024 16:51:22

CH48

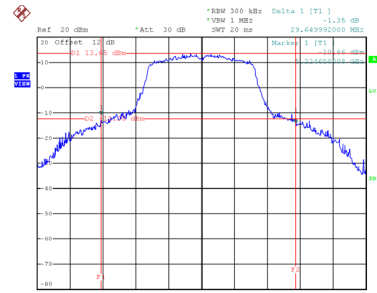


Date: 13.JUN.2024 16:51:51


99 % Occupied Bandwidth

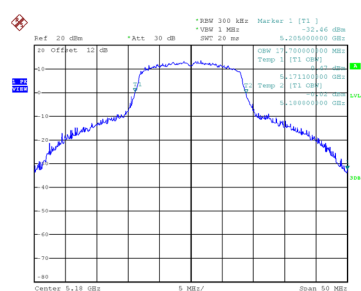

Date: 13.JUN.2024 16:50:30

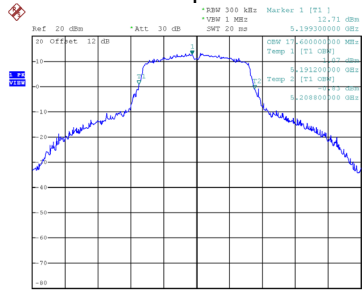

Date: 13.JUN.2024 16:51:00

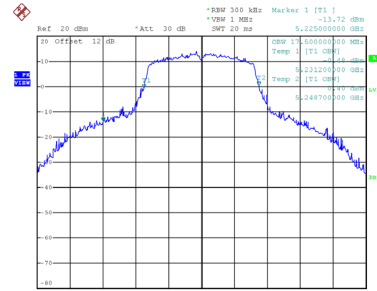


Date: 13.JUN.2024 16:51:32

Test Mode	UNII-1_TX N(HT20) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	40.500	22.100
40	5200	38.499	22.000
48	5240	35.290	20.200

CH36

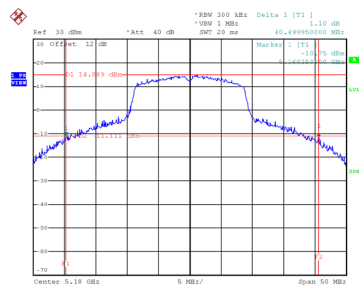


Date: 13.JUN.2024 16:45:42

CH40
26 dB Bandwidth

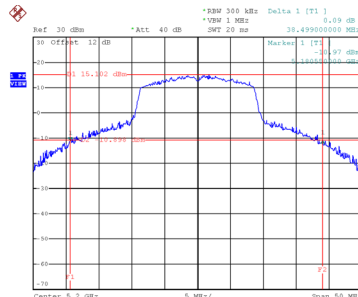


Date: 13.JUN.2024 16:46:20

CH48

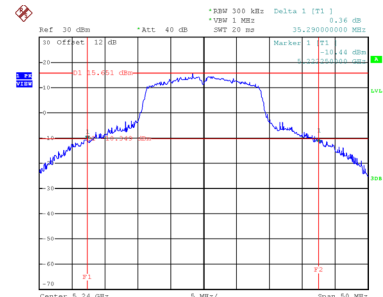


Date: 13.JUN.2024 16:46:46


99 % Occupied Bandwidth

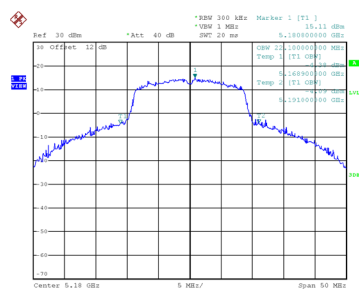

Date: 13.JUN.2024 16:45:29



Date: 13.JUN.2024 16:46:03

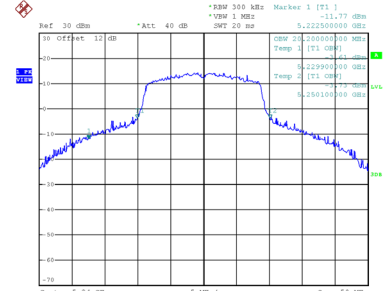


Date: 13.JUN.2024 16:46:29

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	144.000	77.200

CH42 26 dB Bandwidth

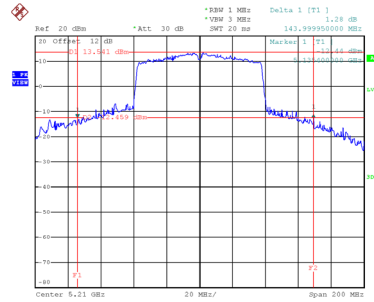

Date: 13 JUN 2024 16:34:49

99 % Occupied Bandwidth

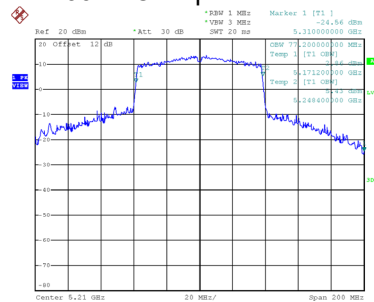


Date: 13 JUN 2024 16:33:44

Test Mode	UNII-3_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	15.150	17.300	0.5	Complies
157	5785	15.200	17.400	0.5	Complies
165	5825	15.200	18.500	0.5	Complies

CH149

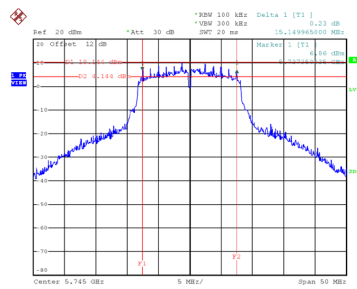


Date: 13.JUN.2024 16:52:27

CH157
6 dB Bandwidth

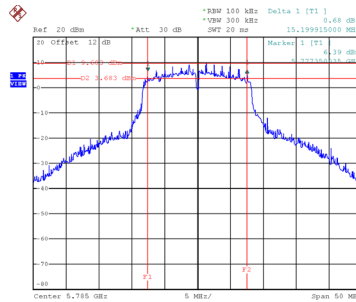


Date: 13.JUN.2024 16:53:04

CH165

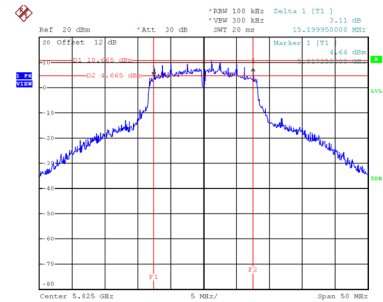


Date: 13.JUN.2024 16:53:40


99 % Occupied Bandwidth

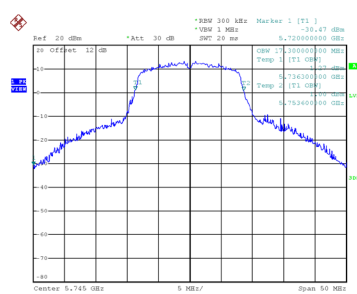

Date: 13.JUN.2024 16:52:01

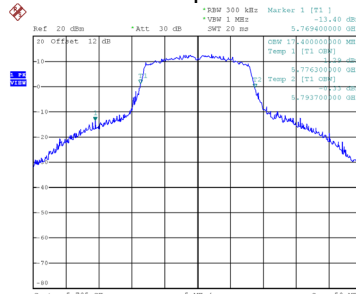

Date: 13.JUN.2024 16:52:36

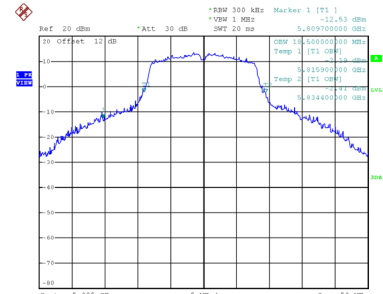


Date: 13.JUN.2024 16:53:15

Test Mode	UNII-3_TX N(HT20) Mode
-----------	------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	15.190	18.200	0.5	Complies
157	5785	15.150	18.200	0.5	Complies
165	5825	15.200	19.500	0.5	Complies

CH149

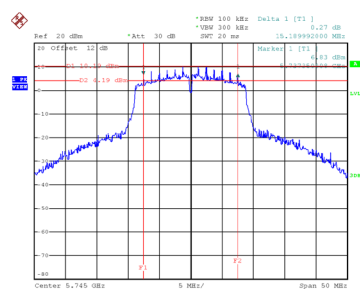


Date: 13.JUN.2024 16:47:46

CH157
6 dB Bandwidth

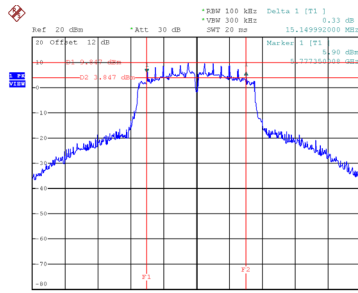


Date: 13.JUN.2024 16:48:32

CH165

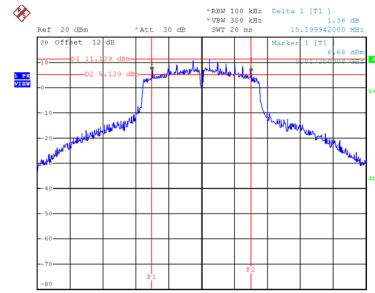


Date: 13.JUN.2024 16:49:18


99 % Occupied Bandwidth

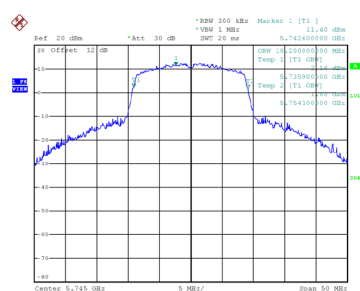

Date: 13.JUN.2024 16:47:18



Date: 13.JUN.2024 16:48:02

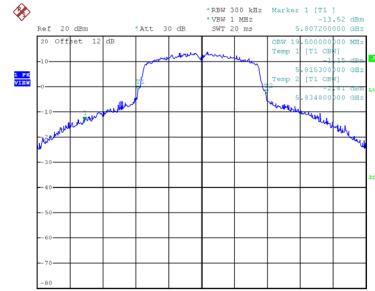


Date: 13.JUN.2024 16:48:51

Test Mode	UNII-3_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
155	5775	74.200	76.800	0.5	Complies

CH155 6 dB Bandwidth

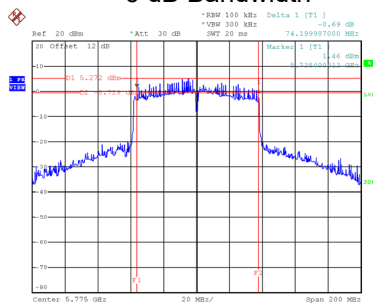

Date: 13 JUN 2024 16:33:05

99 % Occupied Bandwidth

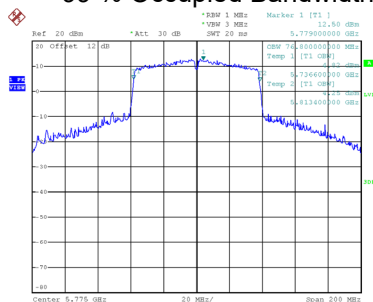

Date: 13 JUN 2024 16:32:25

APPENDIX F - MAXIMUM OUTPUT POWER

Non Beamforming

Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.78	0.19	18.97	30.00	1.0000	Complies
40	5200	20.00	0.19	20.19	30.00	1.0000	Complies
48	5240	20.23	0.19	20.42	30.00	1.0000	Complies

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.71	0.19	18.90	30.00	1.0000	Complies
40	5200	20.16	0.19	20.35	30.00	1.0000	Complies
48	5240	20.37	0.19	20.56	30.00	1.0000	Complies

Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	21.95	28.15	0.6531	Complies
40	5200	23.29	28.15	0.6531	Complies
48	5240	23.50	28.15	0.6531	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.57	0.21	19.78	30.00	1.0000	Complies
40	5200	21.52	0.21	21.73	30.00	1.0000	Complies
48	5240	21.41	0.21	21.62	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.66	0.21	19.87	30.00	1.0000	Complies
40	5200	21.54	0.21	21.75	30.00	1.0000	Complies
48	5240	21.47	0.21	21.68	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	22.83	28.15	0.6531	Complies
40	5200	24.75	28.15	0.6531	Complies
48	5240	24.66	28.15	0.6531	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.23	0.38	17.61	30.00	1.0000	Complies
46	5230	19.93	0.38	20.31	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.03	0.38	17.41	30.00	1.0000	Complies
46	5230	20.04	0.38	20.42	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	20.52	28.15	0.6531	Complies
46	5230	23.38	28.15	0.6531	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.26	1.20	16.46	30.00	1.0000	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.54	1.20	16.74	30.00	1.0000	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	19.62	28.15	0.6531	Complies

Test Mode	UNII-3_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	20.15	0.19	20.34	30.00	1.0000	Complies
157	5785	20.05	0.19	20.24	30.00	1.0000	Complies
165	5825	19.74	0.19	19.93	30.00	1.0000	Complies

Test Mode	UNII-3_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	19.73	0.19	19.92	30.00	1.0000	Complies
157	5785	19.56	0.19	19.75	30.00	1.0000	Complies
165	5825	20.08	0.19	20.27	30.00	1.0000	Complies

Test Mode	UNII-3_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.15	28.15	0.6531	Complies
157	5785	23.02	28.15	0.6531	Complies
165	5825	23.12	28.15	0.6531	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	20.19	0.21	20.40	30.00	1.0000	Complies
157	5785	20.00	0.21	20.21	30.00	1.0000	Complies
165	5825	20.05	0.21	20.26	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	19.67	0.21	19.88	30.00	1.0000	Complies
157	5785	19.59	0.21	19.80	30.00	1.0000	Complies
165	5825	20.35	0.21	20.56	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	23.15	28.15	0.6531	Complies
157	5785	23.02	28.15	0.6531	Complies
165	5825	23.42	28.15	0.6531	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	19.95	0.38	20.33	30.00	1.0000	Complies
159	5795	20.31	0.38	20.69	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	19.51	0.38	19.89	30.00	1.0000	Complies
159	5795	19.76	0.38	20.14	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	23.13	28.15	0.6531	Complies
159	5795	23.44	28.15	0.6531	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	20.13	1.20	21.33	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.66	1.20	20.86	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	24.11	28.15	0.6531	Complies

Beamforming

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.06	0.21	19.27	30.00	1.0000	Complies
40	5200	21.14	0.21	21.35	30.00	1.0000	Complies
48	5240	21.01	0.21	21.22	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.22	0.21	19.43	30.00	1.0000	Complies
40	5200	21.22	0.21	21.43	30.00	1.0000	Complies
48	5240	21.07	0.21	21.28	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	22.36	27.82	0.6053	Complies
40	5200	24.40	27.82	0.6053	Complies
48	5240	24.26	27.82	0.6053	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	16.88	0.38	17.26	30.00	1.0000	Complies
46	5230	19.41	0.38	19.79	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	16.54	0.38	16.92	30.00	1.0000	Complies
46	5230	19.62	0.38	20.00	30.00	1.0000	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	20.11	27.82	0.6053	Complies
46	5230	22.91	27.82	0.6053	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	14.88	1.20	16.08	30.00	1.0000	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.03	1.20	16.23	30.00	1.0000	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	19.17	27.82	0.6053	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	19.67	0.21	19.88	30.00	1.0000	Complies
157	5785	19.61	0.21	19.82	30.00	1.0000	Complies
165	5825	19.43	0.21	19.64	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	19.22	0.21	19.43	30.00	1.0000	Complies
157	5785	19.12	0.21	19.33	30.00	1.0000	Complies
165	5825	19.86	0.21	20.07	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	22.67	27.82	0.6053	Complies
157	5785	22.59	27.82	0.6053	Complies
165	5825	22.87	27.82	0.6053	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	19.21	0.38	19.59	30.00	1.0000	Complies
159	5795	19.21	0.38	19.59	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	19.32	0.38	19.70	30.00	1.0000	Complies
159	5795	19.96	0.38	20.34	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.66	27.82	0.6053	Complies
159	5795	22.99	27.82	0.6053	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	19.81	1.20	21.01	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	18.96	1.20	20.16	30.00	1.0000	Complies


Test Mode	UNII-3_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	23.62	27.82	0.6053	Complies

APPENDIX G - POWER SPECTRAL DENSITY


Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	10.10	0.19	10.29	17.00	Complies
40	5200	9.96	0.19	10.15	17.00	Complies
48	5240	10.09	0.19	10.28	17.00	Complies

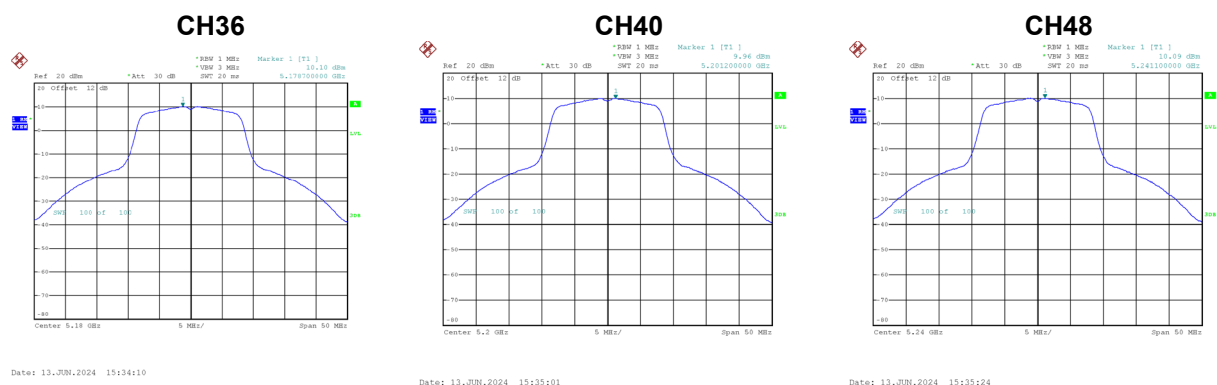

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	9.23	0.19	9.42	17.00	Complies
40	5200	9.26	0.19	9.45	17.00	Complies
48	5240	9.16	0.19	9.35	17.00	Complies

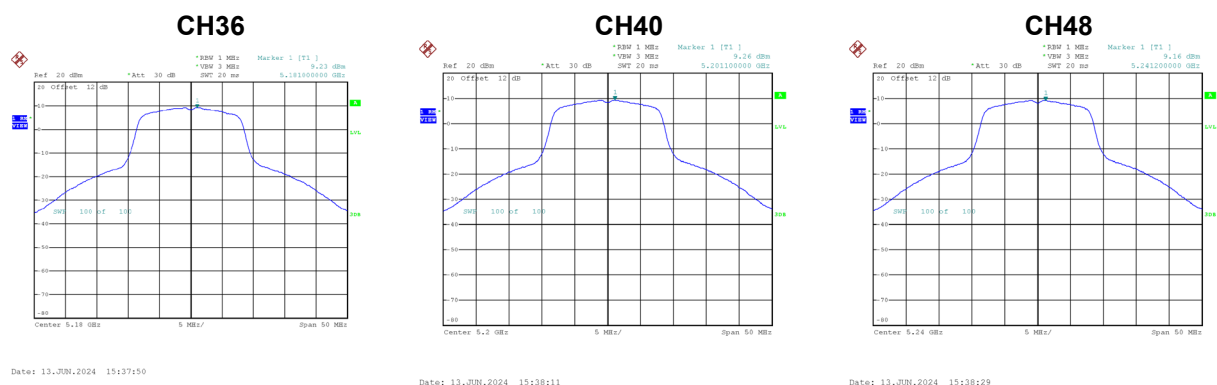


Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	12.89	15.15	Complies
40	5200	12.83	15.15	Complies
48	5240	12.85	15.15	Complies


Test Mode	UNII-1_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	11.45	0.21	11.66	17.00	Complies
40	5200	11.42	0.21	11.63	17.00	Complies
48	5240	11.13	0.21	11.34	17.00	Complies

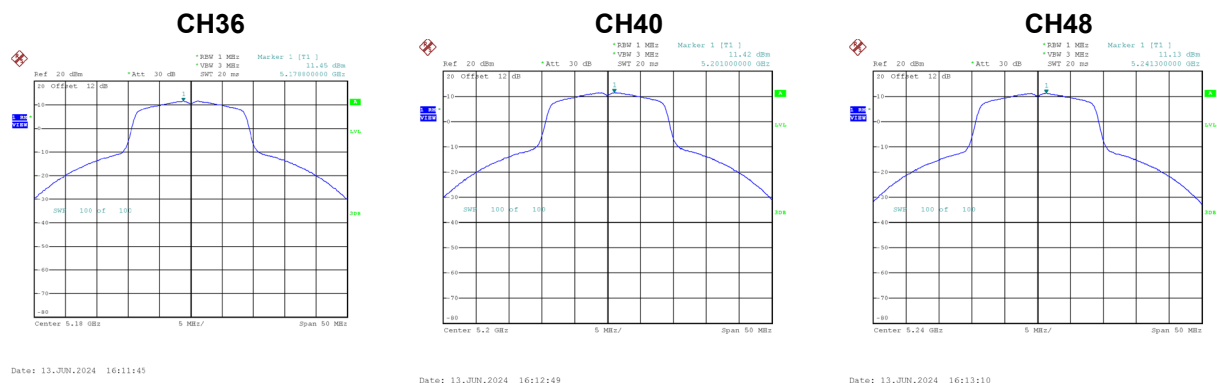

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	10.62	0.21	10.83	17.00	Complies
40	5200	10.75	0.21	10.96	17.00	Complies
48	5240	10.36	0.21	10.57	17.00	Complies

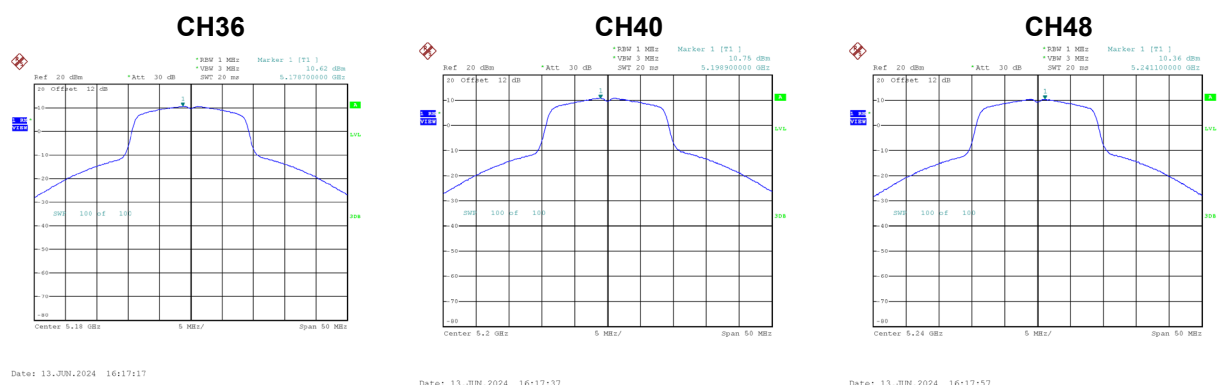


Test Mode	UNII-1_TX N(HT20) Mode_Total
-----------	------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	14.27	15.15	Complies
40	5200	14.32	15.15	Complies
48	5240	13.98	15.15	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	6.87	0.38	7.25	17.00	Complies
46	5230	6.59	0.38	6.97	17.00	Complies

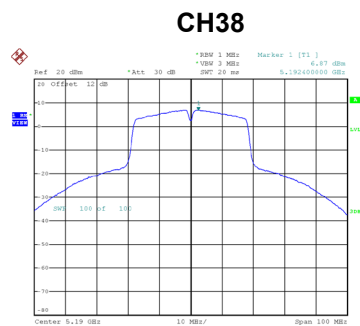


Date: 13 JUN 2024 16:19:22

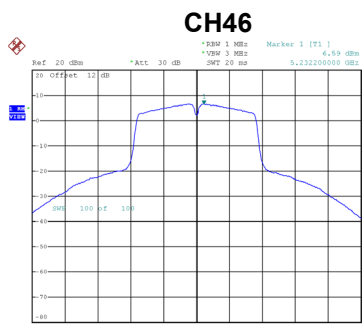


Date: 13 JUN 2024 16:20:40

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	6.26	0.38	6.64	17.00	Complies
46	5230	5.81	0.38	6.19	17.00	Complies

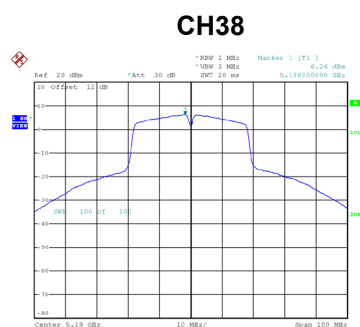

Date: 13 JUN 2024 16:27:03

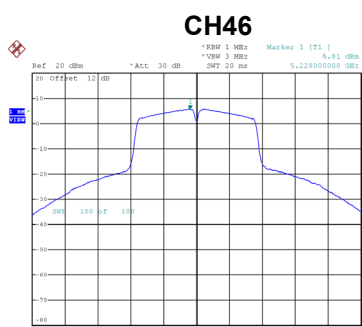


Date: 13 JUN 2024 16:27:28

Test Mode	UNII-1_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	9.97	15.15	Complies
46	5230	9.61	15.15	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	3.70	1.20	4.90	17.00	Complies

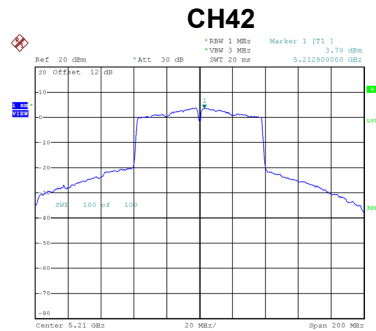

Date: 13 JUN 2024 16:35:10

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	3.08	1.20	4.28	17.00	Complies

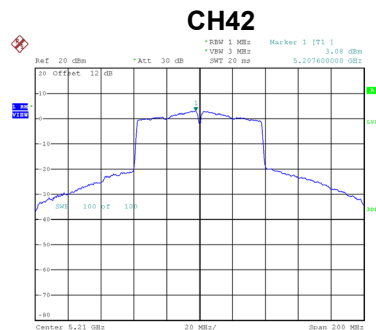


Date: 13 JUN 2024 16:30:42

Test Mode	UNII-1_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	7.61	15.15	Complies


Test Mode	UNII-3_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	7.50	0.19	7.69	30.00	Complies
157	5785	7.36	0.19	7.55	30.00	Complies
165	5825	8.06	0.19	8.25	30.00	Complies

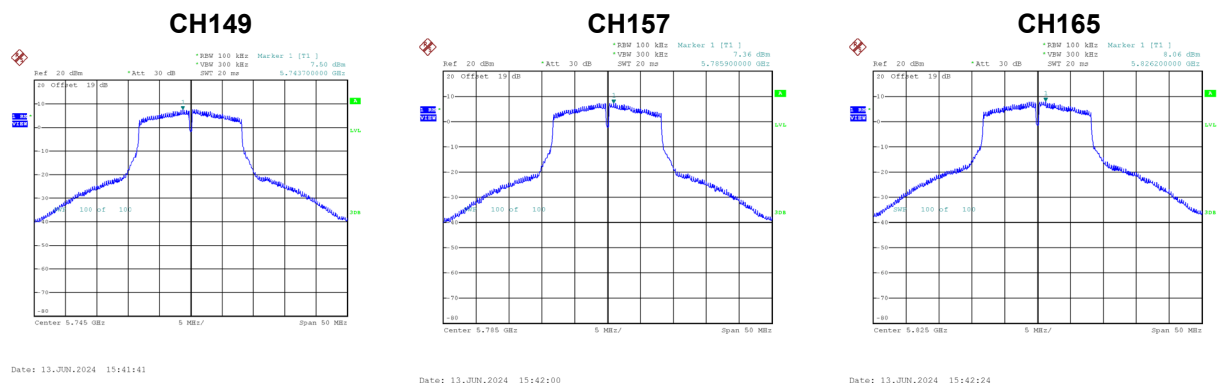

Test Mode	UNII-3_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	8.26	0.19	8.45	30.00	Complies
157	5785	7.99	0.19	8.18	30.00	Complies
165	5825	7.57	0.19	7.76	30.00	Complies

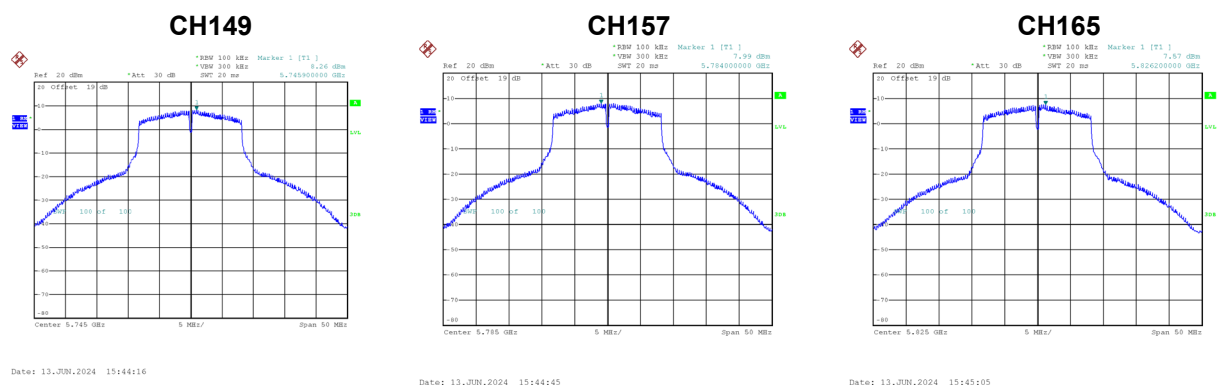


Test Mode	UNII-3_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	11.10	28.15	Complies
157	5785	10.89	28.15	Complies
165	5825	11.03	28.15	Complies


Test Mode	UNII-3_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	7.40	0.21	7.61	30.00	Complies
157	5785	7.32	0.21	7.53	30.00	Complies
165	5825	8.45	0.21	8.66	30.00	Complies

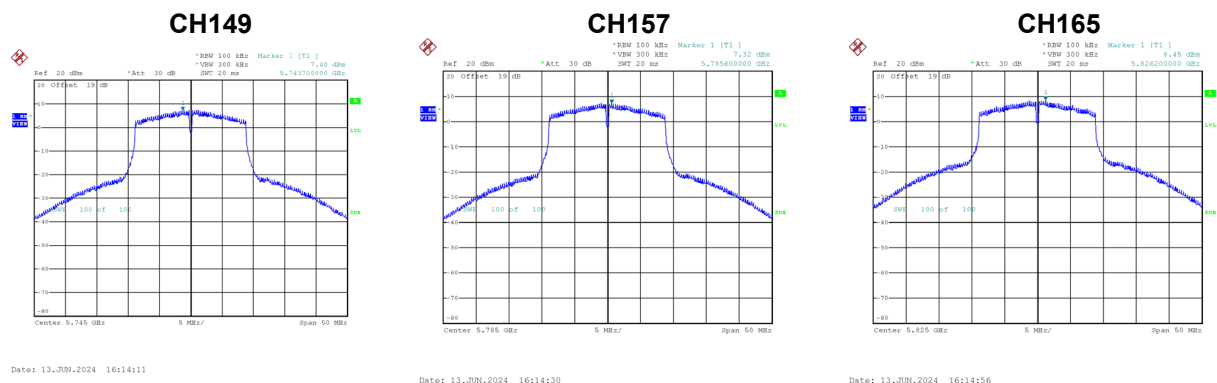

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	8.07	0.21	8.28	30.00	Complies
157	5785	8.14	0.21	8.35	30.00	Complies
165	5825	7.88	0.21	8.09	30.00	Complies

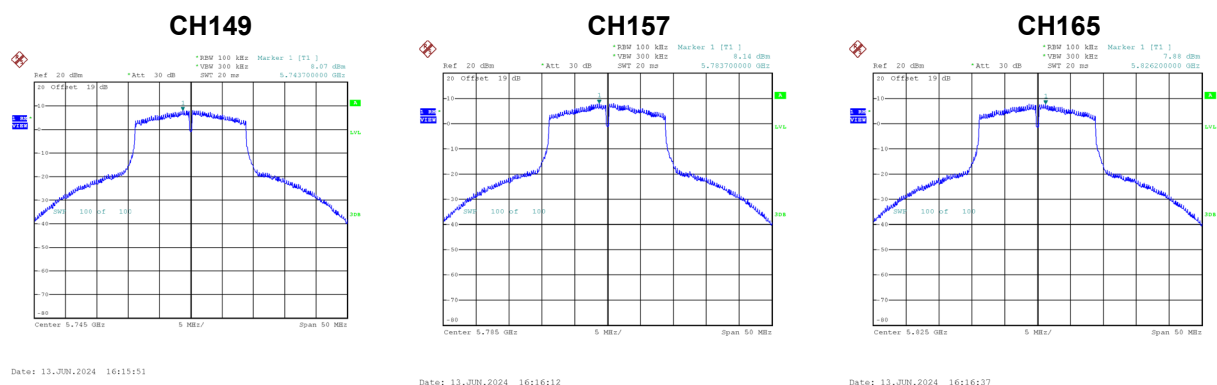


Test Mode	UNII-3_TX N(HT20) Mode_Total
-----------	------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	10.97	28.15	Complies
157	5785	10.97	28.15	Complies
165	5825	11.39	28.15	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	4.08	0.38	4.46	30.00	Complies
159	5795	3.99	0.38	4.37	30.00	Complies

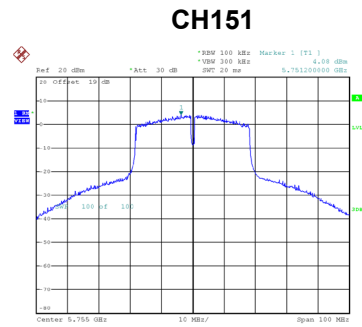


Date: 13 JUN 2024 16:24:28

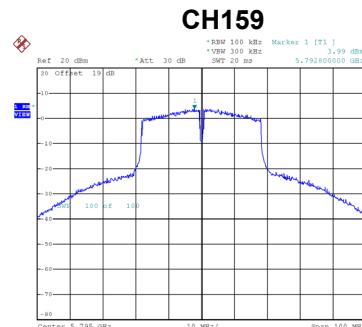


Date: 13 JUN 2024 16:25:50

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	4.33	0.38	4.71	30.00	Complies
159	5795	4.74	0.38	5.12	30.00	Complies

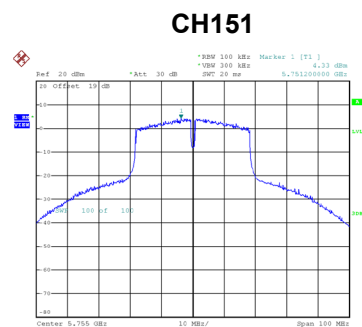

Date: 13 JUN 2024 16:28:09

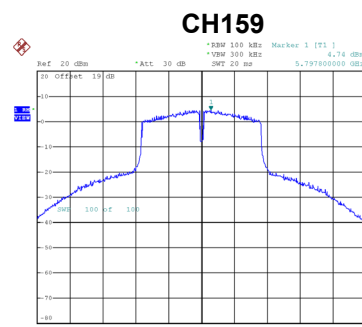


Date: 13 JUN 2024 16:28:35

Test Mode	UNII-3_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	7.60	28.15	Complies
159	5795	7.77	28.15	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	0.21	1.20	1.41	30.00	Complies

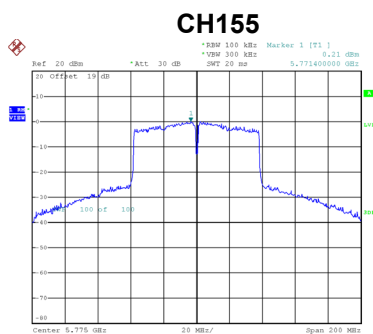

Date: 13 JUN 2024 16:32:08

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	1.44	1.20	2.64	30.00	Complies

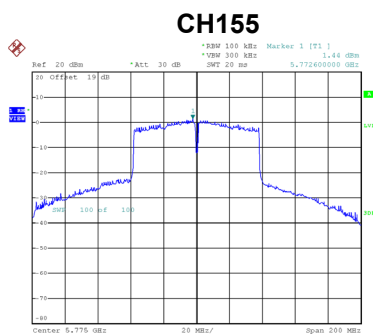

Date: 13 JUN 2024 16:31:23

Test Mode	UNII-3_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	5.08	28.15	Complies

APPENDIX H - FREQUENCY STABILITY

Test Mode	UNII-1
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5180.0000
13.8	5179.9600
12.0	5179.9550
10.2	5179.9800
Maximum Deviation (MHz)	0.0450
Maximum Deviation (ppm)	8.6848

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5180.0000
0	5179.9550
10	5179.9599
20	5179.9551
30	5179.9550
40	5179.9600
Maximum Deviation (MHz)	0.0450
Maximum Deviation (ppm)	8.6848

Test Mode	UNII-3
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5745.0000
13.8	5744.9800
12.0	5744.9800
10.2	5744.9348
Maximum Deviation (MHz)	0.0652
Maximum Deviation (ppm)	11.3468

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5745.0000
0	5744.9550
10	5744.9750
20	5744.9550
30	5744.9600
40	5744.9350
Maximum Deviation (MHz)	0.0650
Maximum Deviation (ppm)	11.3120

End of Test Report