



F2 Labs
16740 Peters Road
Middlefield, Ohio 44062
United States of America
www.f2labs.com

CERTIFICATION TEST REPORT

Manufacturer: lushSensor, LLC
11855 SW Ridgecrest Drive
Suite 127
Beaverton, Oregon 97008 USA

Applicant: Same as Above

Product Names: Ambient Sensor, Soil Sensor, PAR Sensor

Product Description: Sensors for horticultural monitoring system.

Operating Voltage/Frequency: Battery-operated (9V)

Models: Ambient Sensor, LS-AS-00-000W-01;
Soil Sensor, LS-SS-00-000W-01;
PAR Sensor, LS-PS-00-000W-01

FCC ID: 2APTWSR0001

Testing Commenced: May 28, 2018

Testing Ended: Aug. 27, 2018

Summary of Test Results: **In Compliance**

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications and/or manufacturer's statement. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

Standards:

- ❖ **FCC Part 15 Subpart C, Section 15.249**
- ❖ **FCC Part 15 Subpart C, Section 15.215(c) – Additional provisions to the general radiated emission limitations**
- ❖ **FCC Part 15 Subpart A, Section 15.31(e) – Measurement Standards**



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Evaluation Conducted by:

Julius Chiller, EMC/Wireless Engineer

Report Reviewed by:

Ken Littell, Director of EMC & Wireless Operations

F2 Labs
26501 Ridge Road
Damascus, MD 20872
Ph 301.253.4500

F2 Labs
16740 Peters Road
Middlefield, OH 44062
Ph 440.632.5541

F2 Labs
8583 Zionsville Road
Indianapolis, IN 46268
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



TABLE OF CONTENTS

Section	Title	Page
1	ADMINISTRATIVE INFORMATION	4
2	SUMMARY OF TEST RESULTS/MODIFICATIONS	7
3	TABLES OF MEASURED RESULTS	8
4	ENGINEERING STATEMENT	11
5	EUT INFORMATION AND DATA	12
6	LIST OF MEASUREMENT INSTRUMENTATION	13
7	OCCUPIED BANDWIDTH	14
8	FIELD STRENGTH OF EMISSIONS	24
9	PHOTOGRAPHS	44



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

1 ADMINISTRATIVE INFORMATION

1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

1.2 Measurement Procedure:

All measurements were performed according to the 2013 version of ANSI C63.10 and recommended FCC procedure of measurement of DXT Low Power Transceiver operating under FCC 15.249. A list of the measurement equipment can be found in Section 6.



1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used, and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data and are expressed with a 95% confidence factor using a coverage factor of $k=2$. The Uncertainty for a laboratory are referred to as U_{lab} . For Radiated and Conducted Emissions, the Expanded Uncertainty is compared to the U_{cispr} values to determine if a specific margin is required to deem compliance.

U_{lab}

Measurement Range	Combined Uncertainty	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	2.54	5.07dB
Radiated Emissions <1 GHz @ 10m	2.55	5.09dB
Radiated Emissions 1 GHz to 2.7 GHz	1.81	3.62dB
Radiated Emissions 2.7 GHz to 18 GHz	1.55	3.10dB
AC Power Line Conducted Emissions, 150kHz to 30 MHz	1.38	2.76dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	1.66	3.32dB

U_{cispr}

Measurement Range	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	5.2dB
Radiated Emissions <1 GHz @ 10m	5.2dB
Radiated Emissions 1 GHz to 2.7 GHz	Under Consideration
Radiated Emissions 2.7 GHz to 18 GHz	Under Consideration
AC Power Line Conducted Emissions, 150kHz to 30 MHz	3.6dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	4.0dB

If U_{lab} is less than or equal to U_{cispr} , then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} in table 1, then:

- compliance is deemed to occur if no measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Note: Only measurements listed in the tables above that relate to tests included in this Test Report are applicable.



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

1.4 Document History:

Document Number	Description	Issue Date	Approved By
F2P18768A-02E	First Issue	Aug. 31, 2018	K. Littell

**2 SUMMARY OF TEST RESULTS**

Test Name	Standard(s)	Results
-20dB Occupied Bandwidth	CFR 47 Part 15.215(c)	Complies
Field Strength of Emissions	CFR 47 Part 15.249(a)(d)	Complies
Variation of the Input Power	CFR 47 Part 15.31(e)	Complies*

**Sensors were operated using non-rechargeable 9V batteries. Requirements of 15.31 were met by using new batteries.*

Modifications Made to the Equipment
None



3 TABLES OF MEASURED RESULTS

PAR Sensor

Test	Low Channel 903 MHz	Mid Channel 915 MHz	High Channel 927 MHz
Max Field Strength of Fundamental	70.5 dB μ V/m (3.34 mV/m)	68.9 dB μ V/m (2.78 mV/m)	67.9 dB μ V/m (2.48 mV/m)
Limit for Fundamental	50 millivolts/meter (93.97 dB μ V/m)	50 millivolts/meter (93.97 dB μ V/m)	50 millivolts/meter (93.97 dB μ V/m)
-20dB Occupied Bandwidth (kHz)	77.9	78.07	78.07

The -20dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated.

**Soil Sensor**

Test	Low Channel 903 MHz	Mid Channel 915 MHz	High Channel 927 MHz
Max Field Strength of Fundamental	75.5 dB μ V/m (5.95 mV/m)	73.1 dB μ V/m (4.51 mV/m)	72.0 dB μ V/m (3.98 mV/m)
Limit for Fundamental	50 millivolts/meter (93.97 dB μ V/m)	50 millivolts/meter (93.97 dB μ V/m)	50 millivolts/meter (93.97 dB μ V/m)
-20dB Occupied Bandwidth (kHz)	78.00	78.07	78.07

The -20dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated.

**Ambient Sensor**

Test	Low Channel 903 MHz	Mid Channel 915 MHz	High Channel 927 MHz
Max Field Strength of Fundamental	71.4 dB μ V/m (3.71 mV/m)	70.2 dB μ V/m (3.23 mV/m)	69.8 dB μ V/m (3.10 mV/m)
Limit for Fundamental	50 millivolts/meter (93.97 dB μ V/m)	50 millivolts/meter (93.97 dB μ V/m)	50 millivolts/meter (93.97 dB μ V/m)
-20dB Occupied Bandwidth (kHz)	78.04	78.06	78.07

The -20dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated.



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

4 ENGINEERING STATEMENT

This report has been prepared on behalf of lushSensor, LLC to provide documentation for the testing described herein. This equipment has been tested and found to comply with part 15.249 of the FCC Rules using ANSI C63.10 2013 standard. The test results found in this test report relate only to the items tested.



5 EUT INFORMATION AND DATA

5.1 Equipment Under Test:

Product: Ambient Sensor, Soil Sensor, PAR Sensor
Models: Ambient Sensor, LS-AS-00-000W-01; Soil Sensor, LS-SS-00-000W-01;
PAR Sensor, LS-PS-00-000W-01
Serial No.: None Specified
FCC ID: 2APTWSR0001

5.2 Trade Name:

lushSensor, LLC

5.3 Power Supply:

9V Battery

5.4 Applicable Rules:

CFR 47, Part 15.249

5.5 Equipment Category:

DXT Low Power Transceiver

5.6 Antenna:

2.15dBi Gain Integral

5.7 Accessories:

N/A

5.8 Test Item Condition:

The equipment to be tested was received in good condition.

5.9 Testing Algorithm:

EUT was set up in a normal operating mode. EUT was placed on an 80cm and 1.5m high table on the turntable of a semi-anechoic chamber, 3m from the measuring antenna. Radiated emissions were measured of the fundamental (903-927 MHz) and out-of-band spectrums. Measurements were made on three different channels (low, mid and high).



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

6 LIST OF MEASUREMENT INSTRUMENTATION

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shielded Chamber	CL166-E	Albatross Projects	B83117-DF435-T261	US140023	Jan. 9, 2019
Shield Room	0175-3V	Ray Proof	N/A	11645	Feb. 28, 2019
Spectrum Analyzer	CL138	Agilent Technologies	E4407B	US41192779	June 19, 2019
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Nov. 17, 2018
Horn Antenna	CL098	Emco	3115	9809-5580	Dec. 28, 2018
Pre-Amplifier	CL153	Keysight Tech.	83006A	MY39500791	Sept. 20, 2018
Pre-Amplifier	CL136	Hewlett Packard	8447E	A937A01894	Mar. 26, 2019
Active 18" Loop Antenna	CL163-Loop	A.H. Systems, Inc.	EHA-52B	100	June 4, 2019
Antenna, JB3 Combination	CL175	Sunol Sciences	JB3	A030315	Oct.11, 2019
Temp/Hum. Recorder	CL232	Extech	445814	01	Mar. 22, 2019
Transient Limiter	0202	Hewlett Packard	11947A	3107A00729	June 19, 2019
Software:	Tile Version 3.4.B.3.			Software Verified: May 28-Aug. 28, 2018	
Software:	EMC 32, Version 8.53.0		Software Verified: May 28-Aug. 28, 2018		



7 FCC PART 15.215(c), OCCUPIED BANDWIDTH

7.1 Requirements:

§15.215 Additional provisions to the general radiated emission limitations.

(a) The regulations in §§15.217 through 15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.

(b) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in §15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


Bandwidth measurements were made at the low (903), mid (915) and upper (927) frequencies. The bandwidth was measured using the analyzer's marker function.



7.2 Occupied Bandwidth Test Data

Test Date(s):	Aug. 27, 2018	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.215(c)	Air Temperature:	22.1°C
		Relative Humidity:	42%

PAR Sensor: -20dB, Low Channel

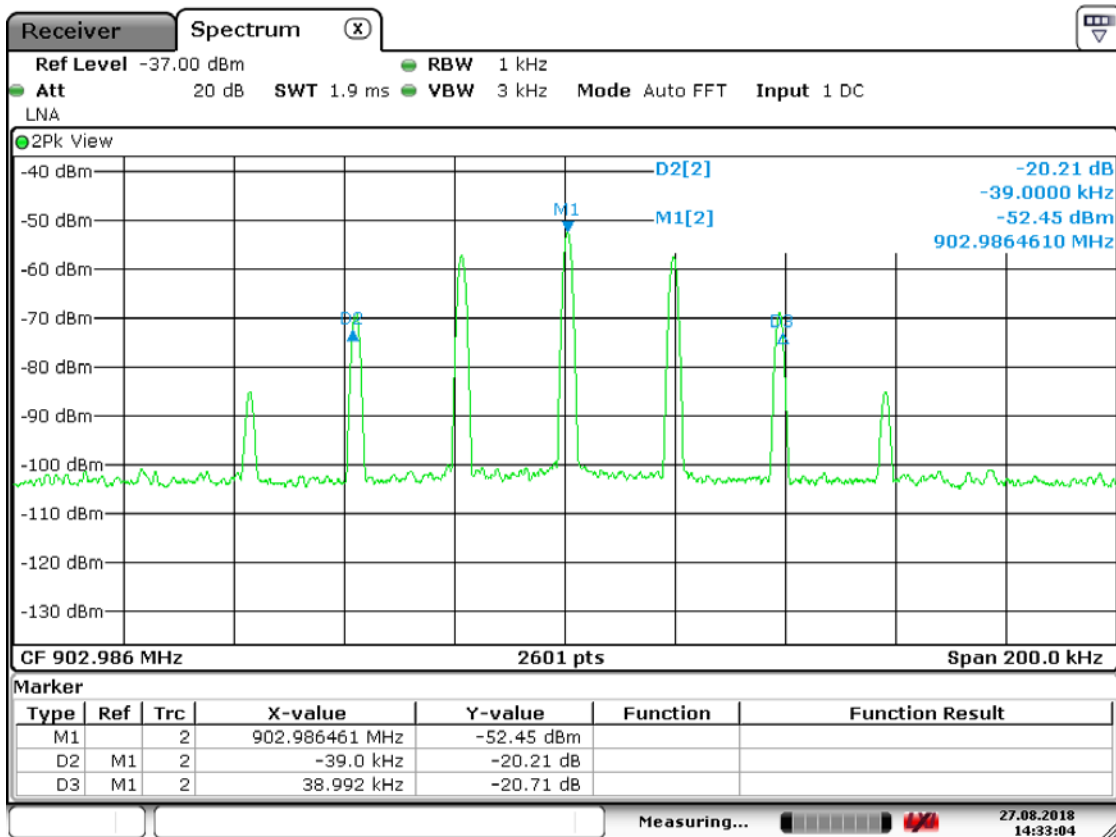


Date: 27.AUG.2018 14:33:04



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

PAR Sensor: -20dB, Mid Channel

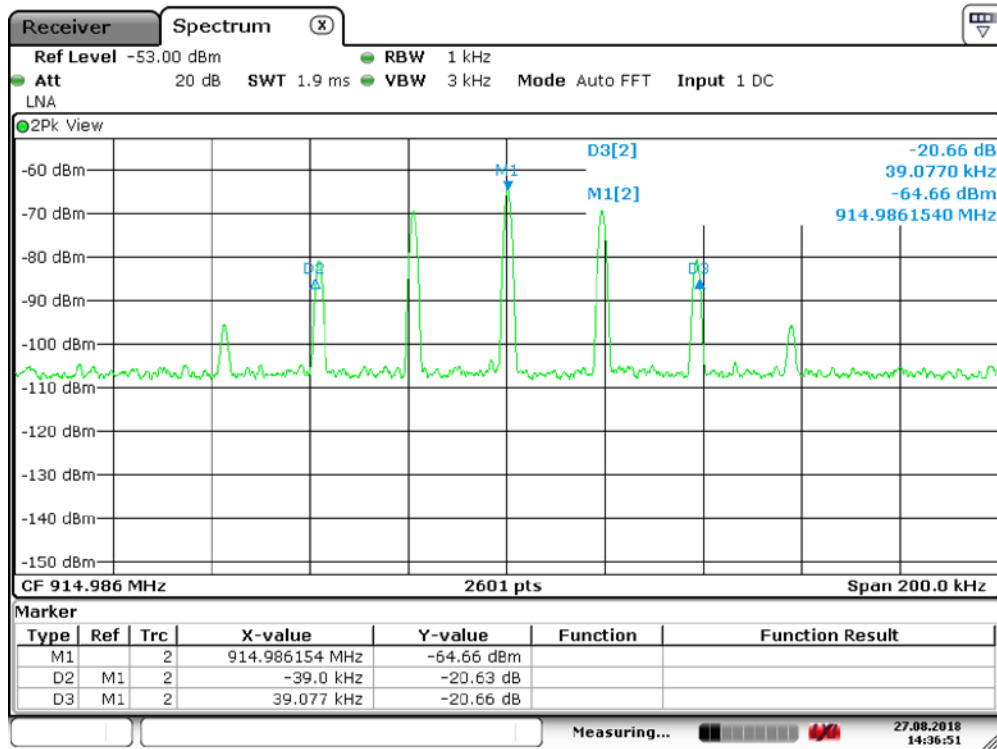


Date: 27.AUG.2018 14:36:51



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

PAR Sensor: -20dB, High Channel

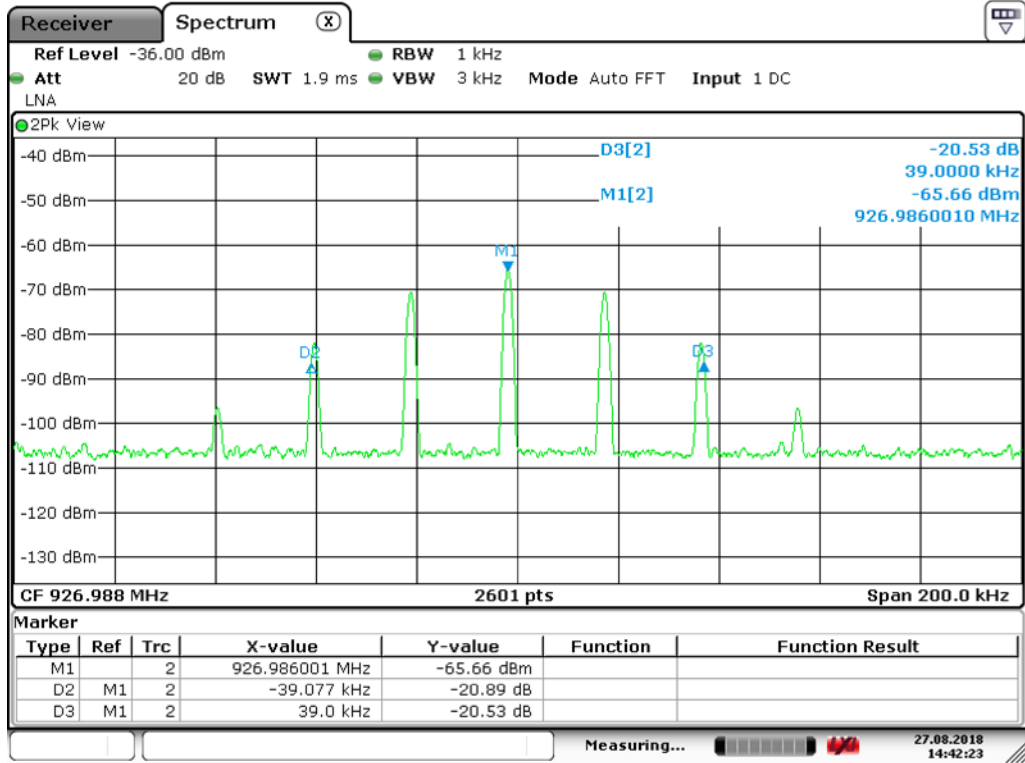


Date: 27.AUG.2018 14:42:23



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Soil Sensor: -20dB, Low Channel

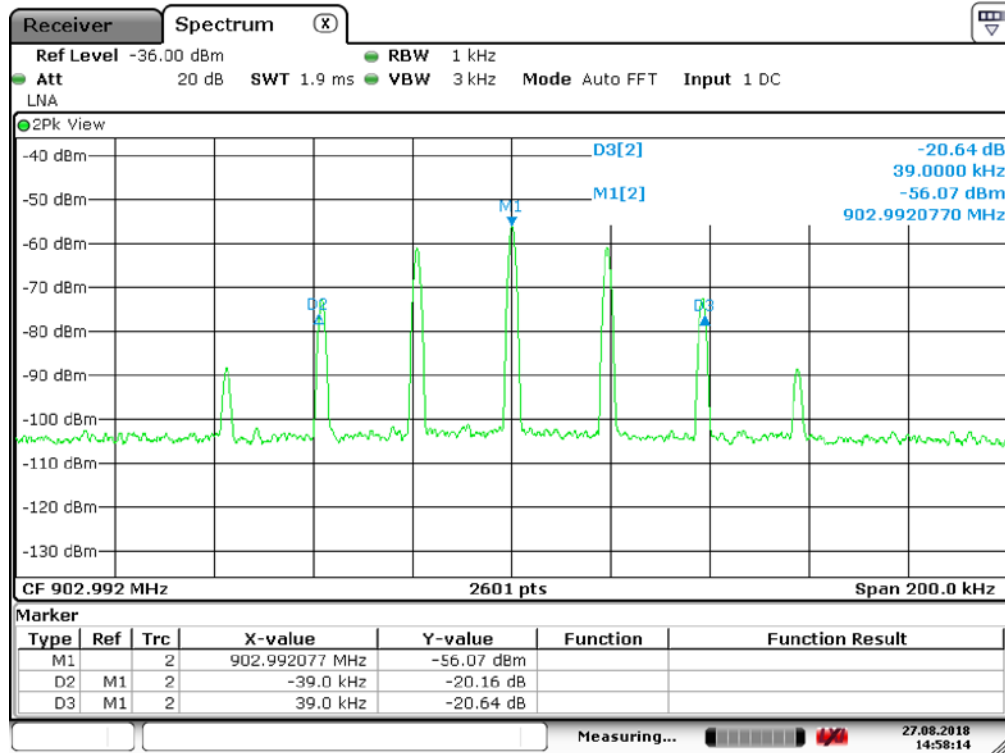


Date: 27.AUG.2018 14:58:14



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Soil Sensor: -20dB, Mid Channel

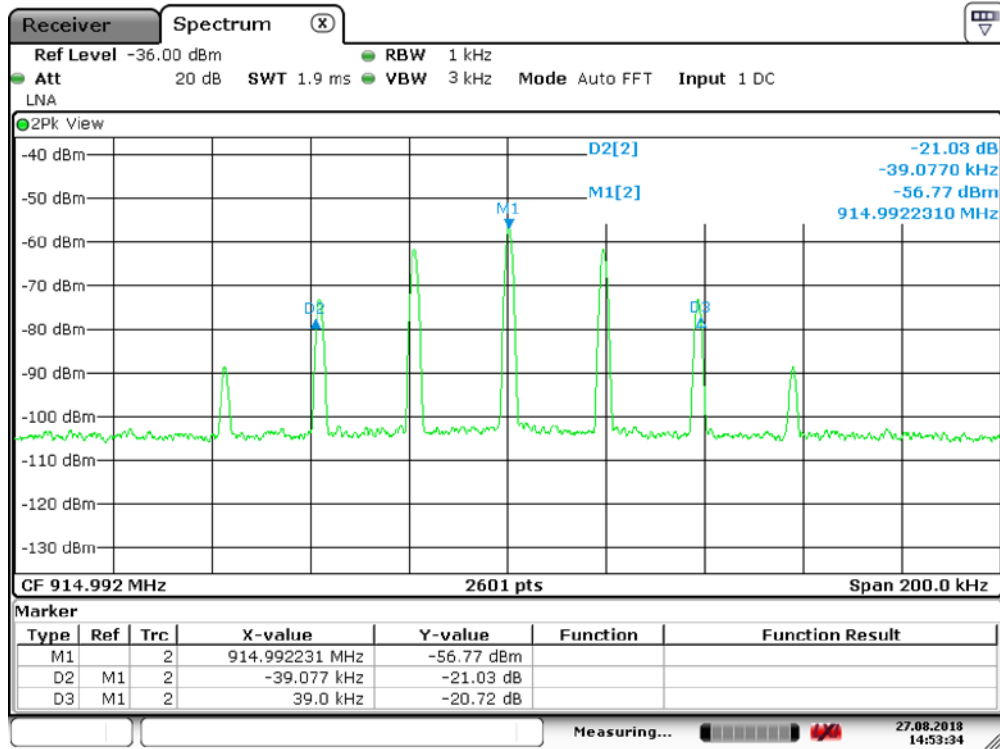


Date: 27.AUG.2018 14:53:34



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Soil Sensor: -20dB, High Channel

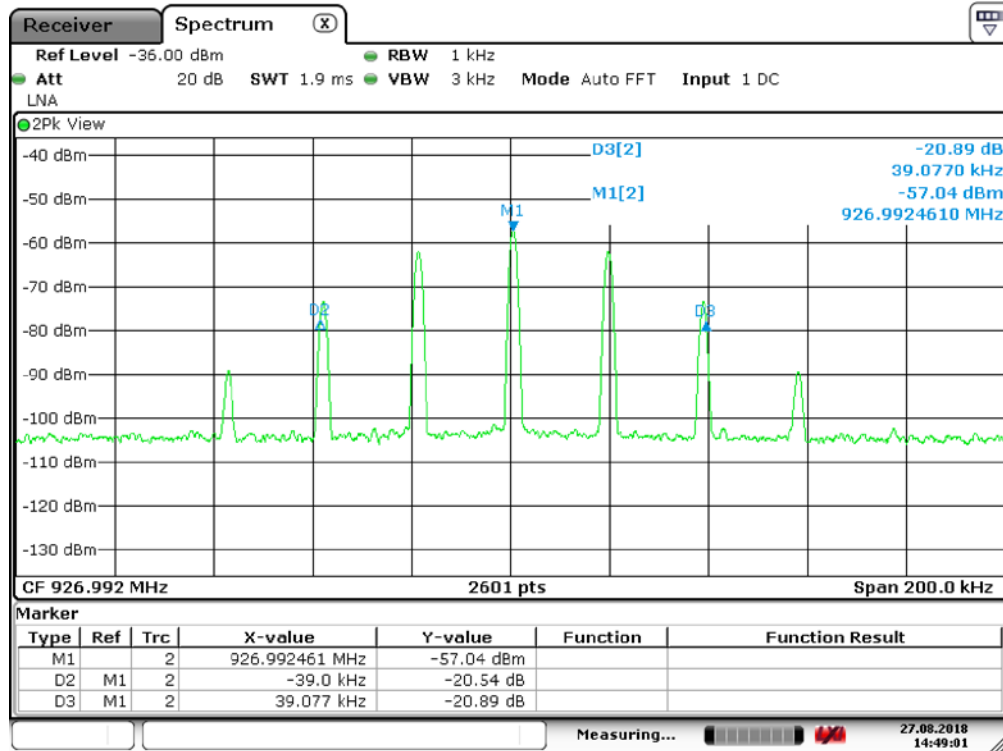


Date: 27.AUG.2018 14:49:01



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Ambient Sensor: -20dB, Low Channel

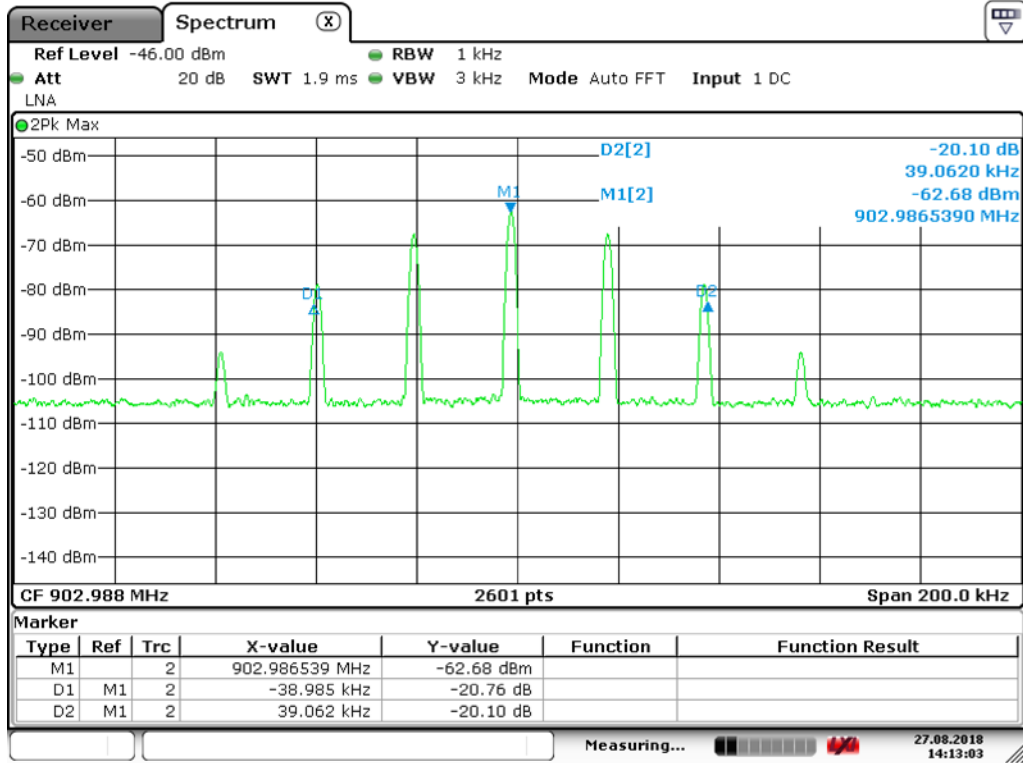


Date: 27.AUG.2018 14:13:04



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Ambient Sensor: -20dB, Mid Channel

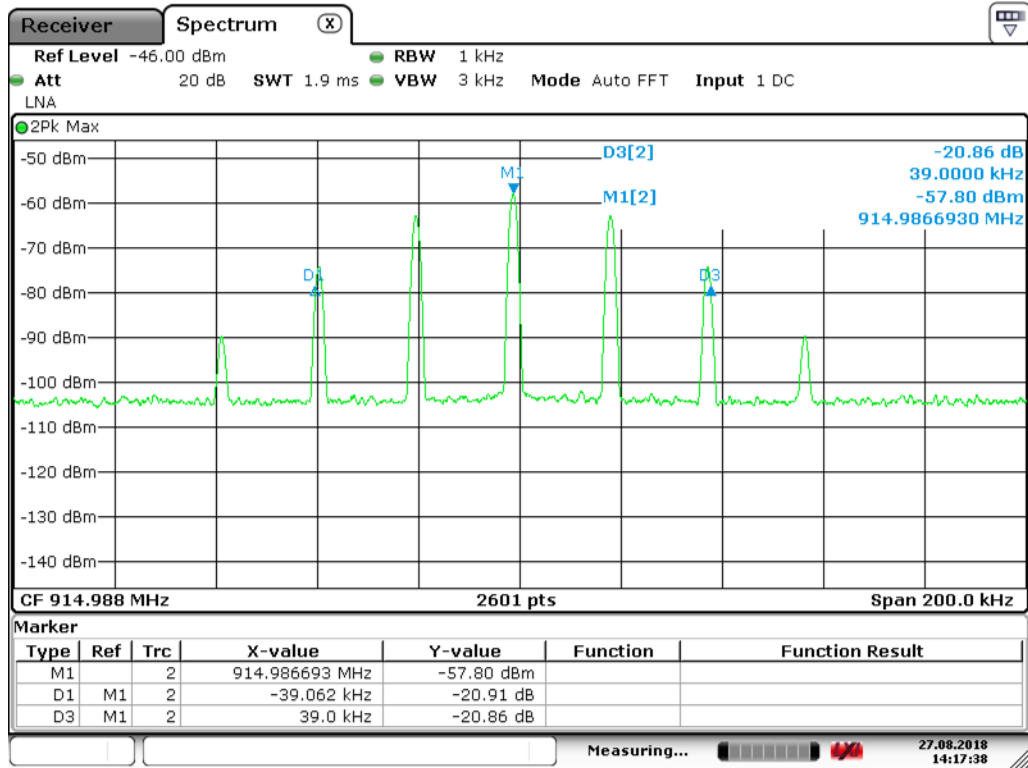


Date: 27.AUG.2018 14:17:38



Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Ambient Sensor: -20dB, High Channel

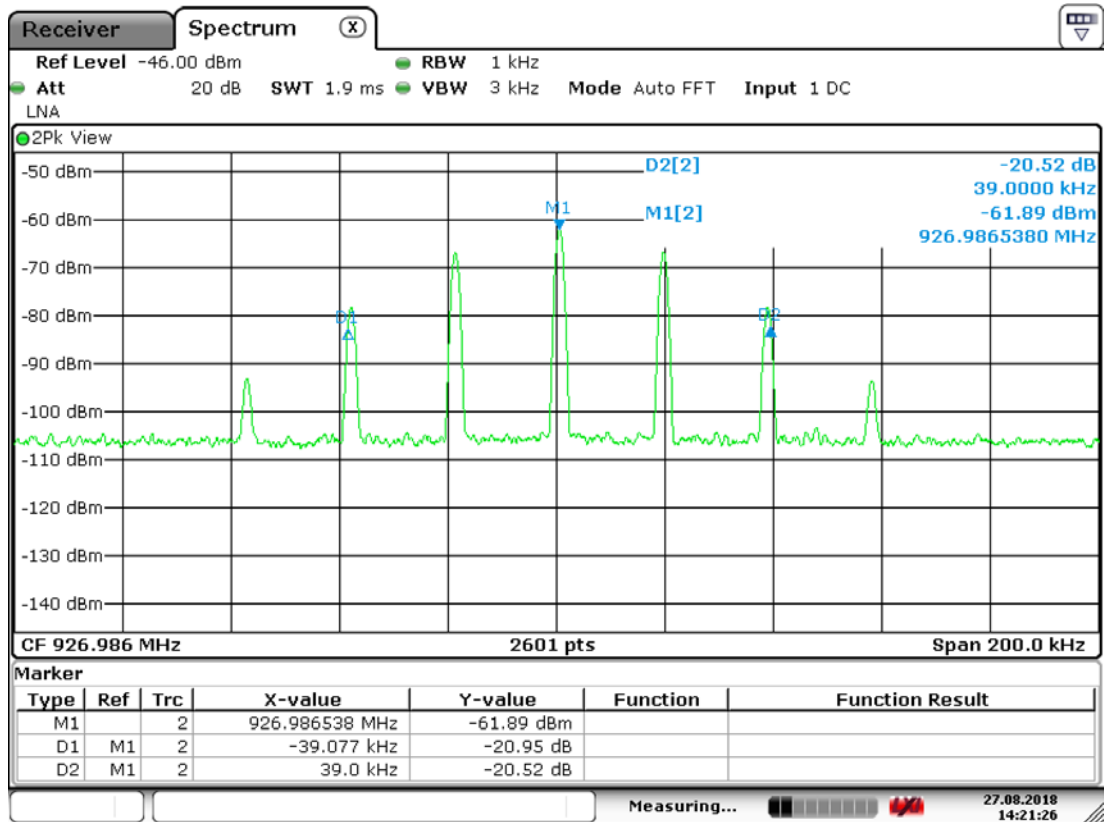

Date: 27.AUG.2018 14:21:26

**8 FCC PART 15.249(a)(d) – FIELD STRENGTH OF EMISSIONS FROM INTENTIONAL RADIATORS**

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


NOTE: During the pre-scan evaluation, the EUT was rotated in all three orthogonal positions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions.



8.1 Test Data - Field Strength of Emissions from Intentional Radiators

Test Date(s):	June 12, 2018	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(a)	Air Temperature:	21.9°C
		Relative Humidity:	47%


PAR Sensor

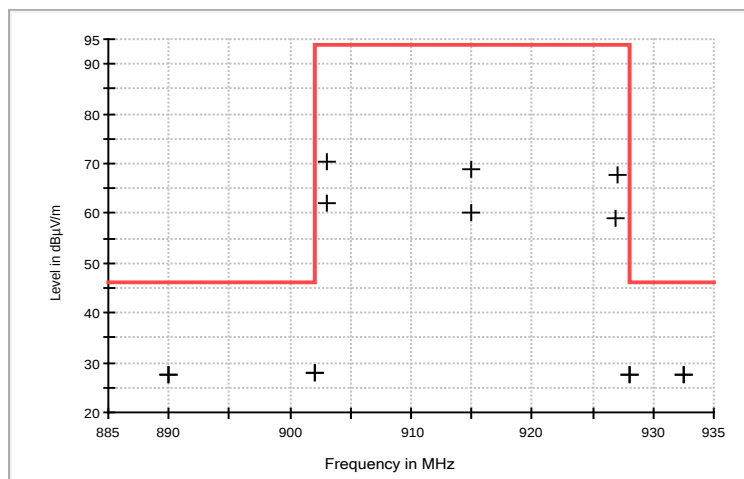

Frequency (MHz)	Polarity	Antenna Height (cm)	Azimuth (deg)	Corr. (dB)	QuasiPeak (dBµV/m)	QuasiPeak (dBµV/m) Limit	QuasiPeak Margin (dB)	Bandwidth (kHz)
902.980000	V	105.0	105.0	11.50	62.2	94	-31.8	120.000
903.000000	H	108.0	194.0	11.50	70.5	94	-23.5	120.000
914.970000	V	105.0	93.0	11.60	60.3	94	-33.7	120.000
915.000000	H	108.0	194.0	11.60	68.9	94	-25.1	120.000
926.970000	V	105.0	88.0	12.10	58.9	94	-35.1	120.000
927.000000	H	108.0	202.0	12.10	67.9	94	-26.1	120.000




Soil Sensor

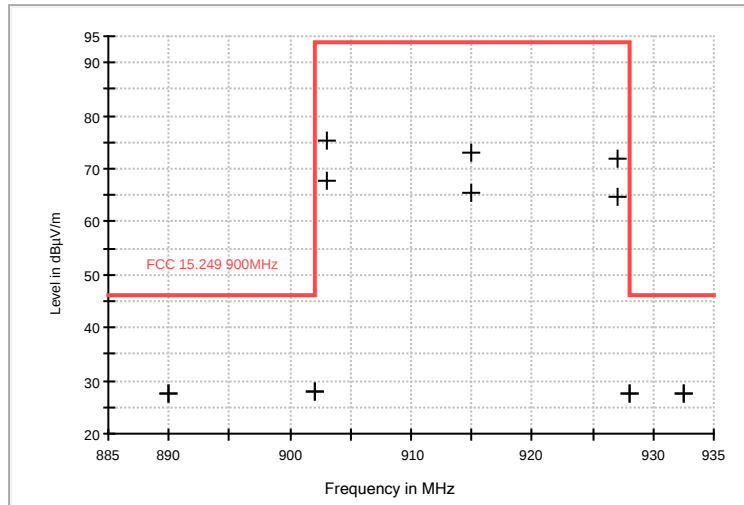

Frequency (MHz)	Polarity	Antenna Height (cm)	Azimuth (deg)	Corr. (dB)	QuasiPeak (dBµV/m)	QuasiPeak (dBµV/m) Limit	QuasiPeak Margin (dB)	Bandwidth (kHz)
903.000000	H	100.0	77.0	11.5	75.5	94	-18.5	120.000
903.000000	V	108.0	100.0	11.5	67.6	94	-26.4	120.000
915.000000	H	100.0	76.0	11.6	73.1	94	-20.9	120.000
915.000000	V	105.0	118.0	11.6	65.6	94	-28.4	120.000
927.000000	V	100.0	102.0	12.1	64.9	94	-29.1	120.000
927.000000	H	100.0	76.0	12.1	72.0	94	-22.0	120.000

Ambient Sensor

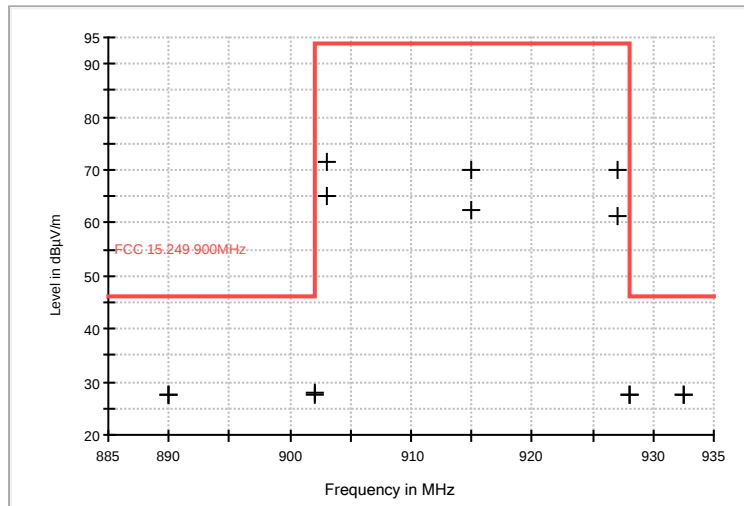

Frequency (MHz)	Polarity	Antenna Height (cm)	Azimuth (deg)	Corr. (dB)	QuasiPeak (dBμV/m)	QuasiPeak (dBμV/m) Limit	QuasiPeak Margin (dB)	Bandwidth (kHz)
902.970000	V	108.0	90.0	11.5	65.0	94	-29.0	120.000
903.000000	H	108.0	241.0	11.5	71.4	94	-22.6	120.000
914.980000	V	108.0	90.0	11.6	62.6	94	-31.4	120.000
915.000000	H	108.0	265.0	11.6	70.2	94	-23.8	120.000
927.000000	V	108.0	92.0	12.1	61.1	94	-32.9	120.000
927.000000	H	108.0	255.0	12.1	69.8	94	-24.2	120.000



8.2 Test Data – Spurious Emissions

Notes: Plots are peak, max hold pre-scan data included only to determine what frequencies to investigate and measure. During the pre-scan evaluation, the EUT was rotated in all three orthogonal positions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. At some frequencies, no emissions from the EUT were measurable over the ambient noise floor. The readings did not change with EUT on and EUT off.

Where emissions from the EUT were visible within 20dB of the limit, at least 6 of the highest frequencies were measured per ANSI 63.4 in a 3-meter anechoic chamber. Frequencies below 1GHz were measured using a quasi-peak detector. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions. Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit. Frequencies were scanned from 9kHz to 10 GHz and the highest emissions are listed below.

Note: Spurious emissions in these EUTs were tested for all three channels. The results below are from the one that was deemed worst case. For the sensors, all were operated at 903 MHz (Low Channel).




Order Number: F2P18768A


Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Test Date(s):	June 1, 2018	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(d) / Part 15.209	Air Temperature:	19.4°C
Results:	Complies	Relative Humidity:	47%

PAR Sensor: 0.009 MHz to 0.15 MHz, Low Channel

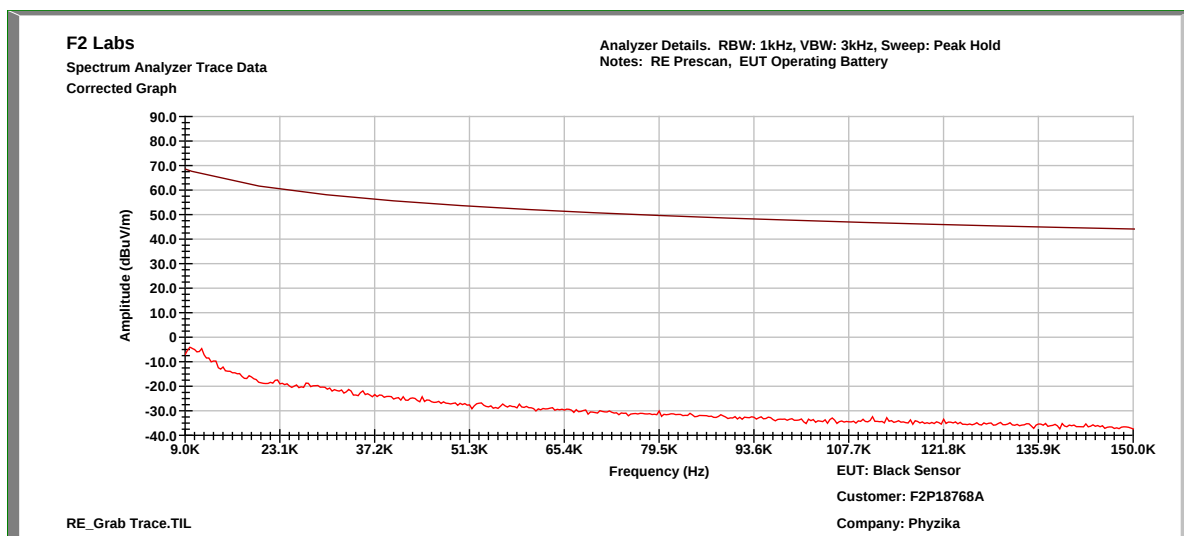

PAR Sensor: 0.15 MHz to 0.5 MHz, Low Channel

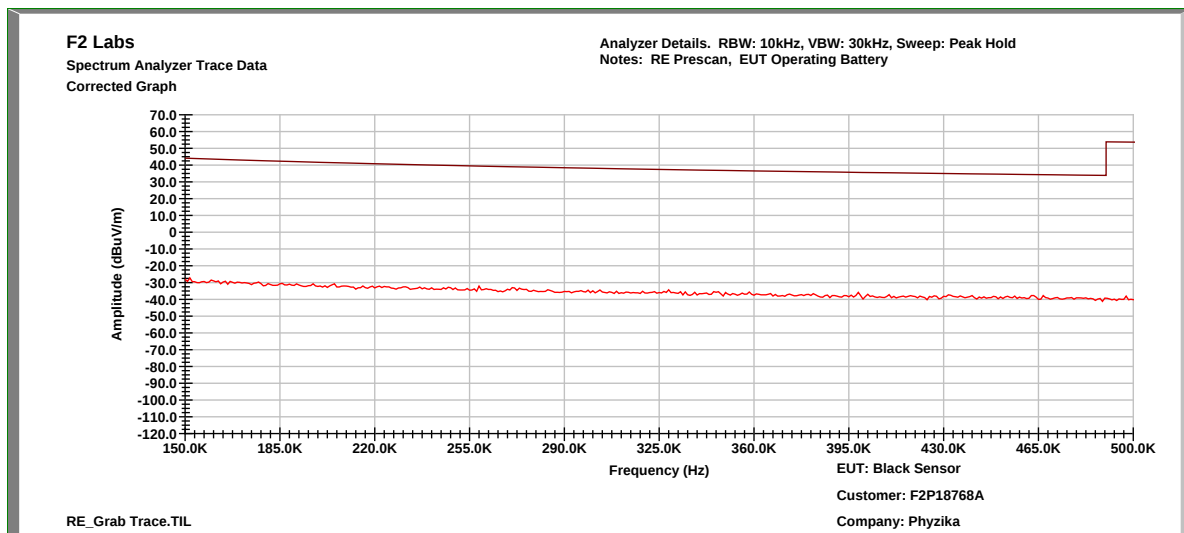





Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

PAR Sensor: 0.5 MHz to 5.0 MHz, Low Channel

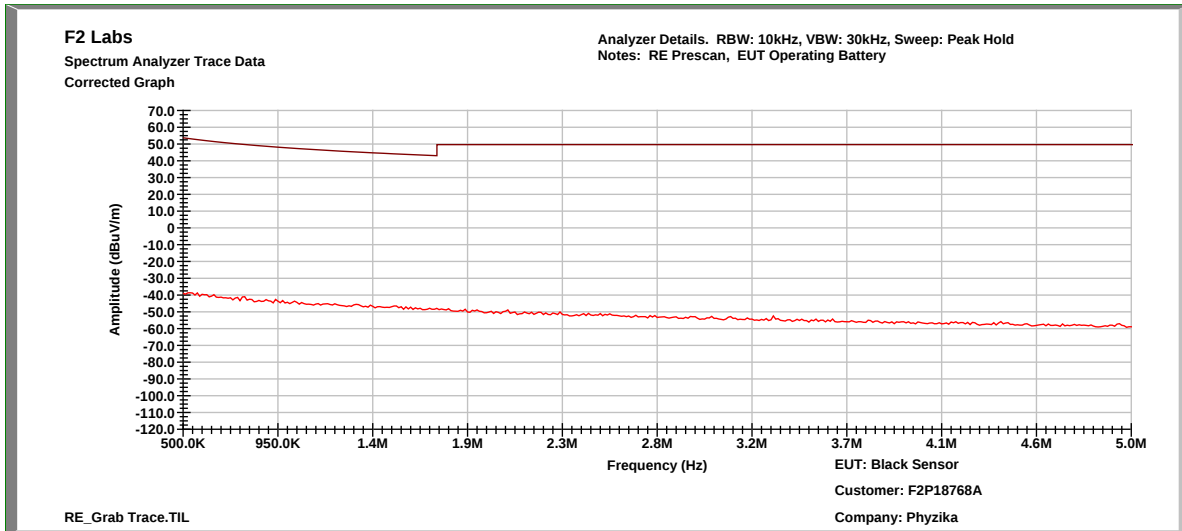


PAR Sensor: 5.0 MHz to 30.0 MHz, Low Channel

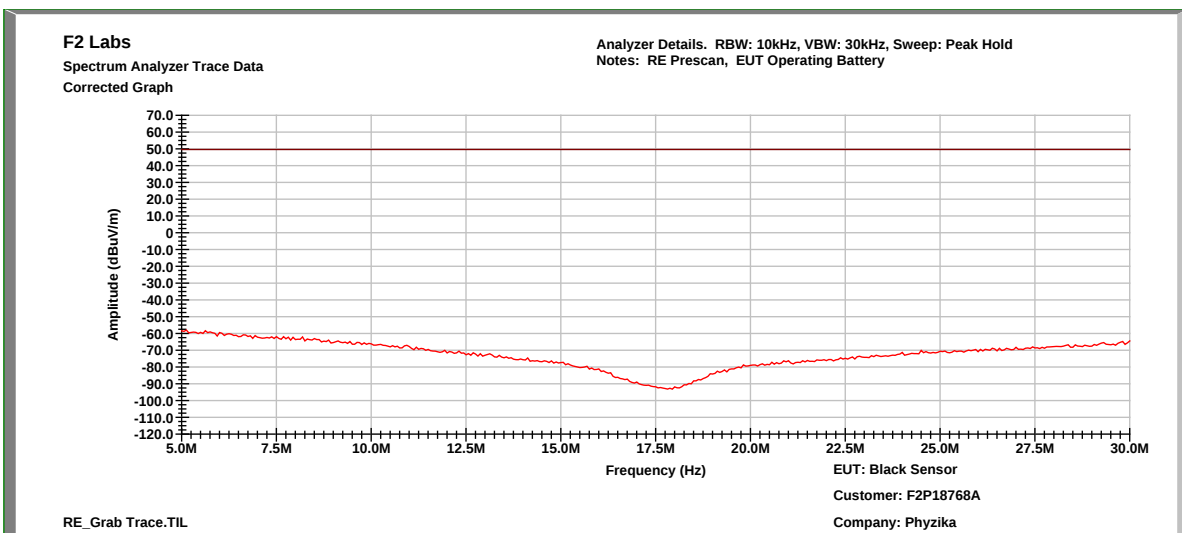




PAR Sensor: 30 MHz to 1000 MHz, Vertical, Low Channel*

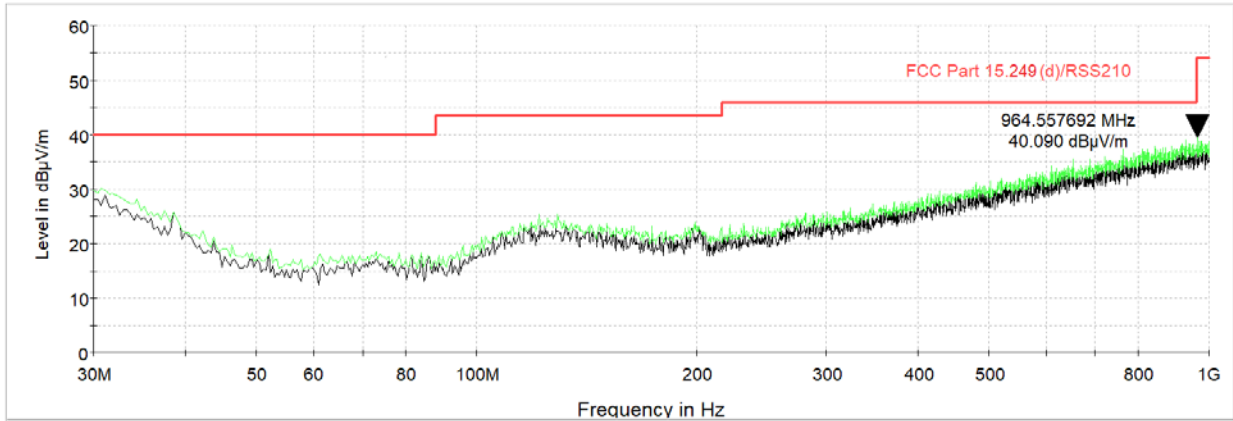


PAR Sensor: 30 MHz to 1000 MHz – Horizontal, Low Channel*

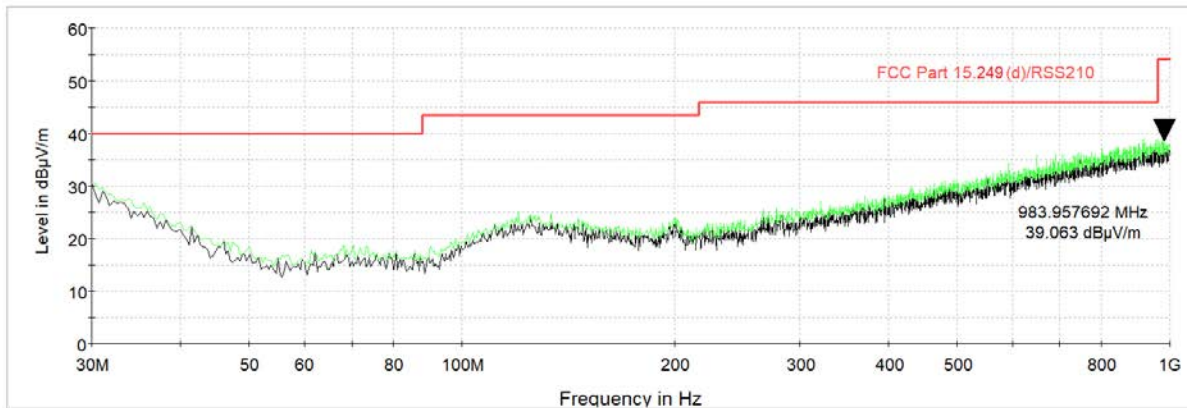


**There were no measurable emissions within 20dB of the limit. The signal at 903 MHz is the operating channel of the EUT.*



PAR Sensor: 1 GHz to 10 GHz, Vertical, Low Channel*

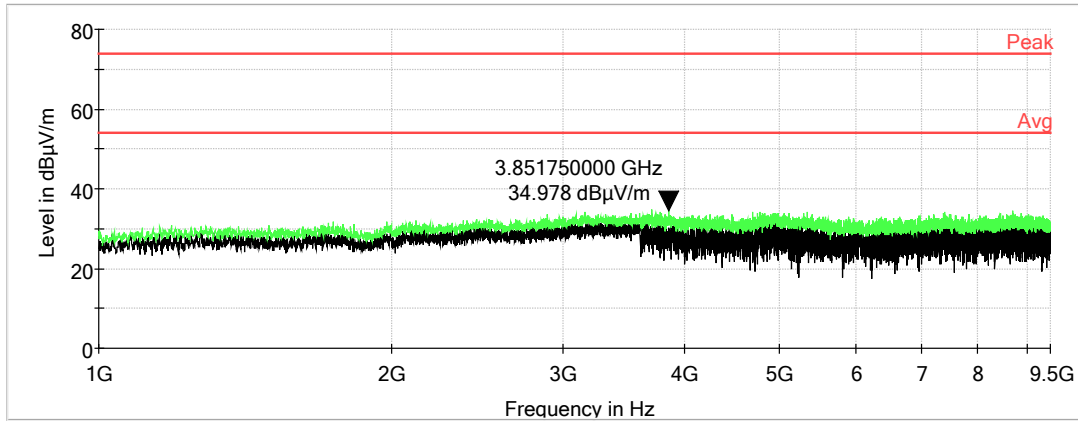


PAR Sensor: 1 GHz to 10 GHz, Horizontal, Low Channel*

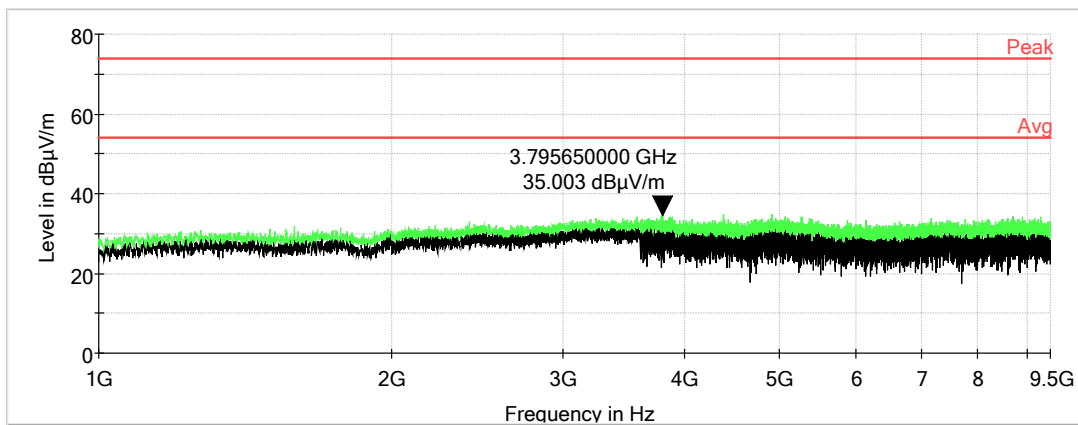

**There were no measurable emissions within 20dB of the limit.*



PAR Sensor: Band Edges

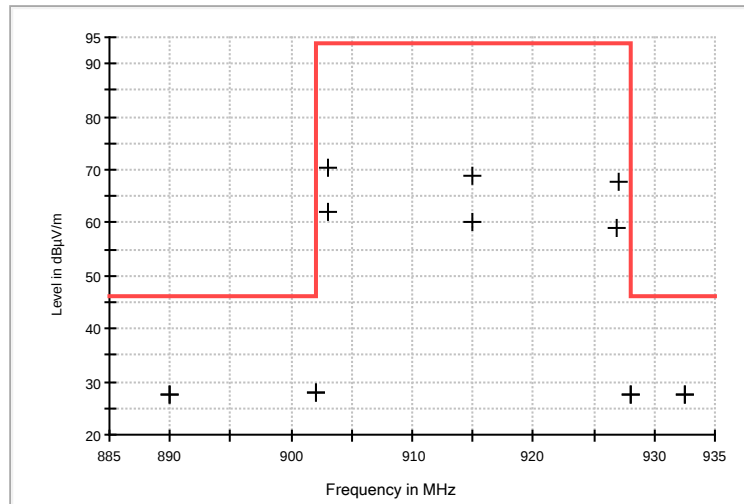

Frequency (MHz)	Polarity	Antenna Height (cm)	Azimuth (deg)	Corr. (dB)	QuasiPeak (dBµV/m)	QuasiPeak (dBµV/m) Limit	QuasiPeak Margin (dB)	Bandwidth (kHz)
890.000000	V	105.0	90.0	11.3	27.6	46	-18.4	120.000
890.000000	H	108.0	194.0	11.3	27.6	46	-18.4	120.000
902.000000	V	105.0	90.0	11.6	27.8	46	-18.2	120.000
928.000000	V	105.0	88.0	12.1	27.5	46	-18.5	120.000
932.500000	V	105.0	88.0	12.1	27.6	46	-18.4	120.000
932.500000	H	108.0	194.0	12.1	27.6	46	-18.4	120.000




Order Number: F2P18768A


Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Test Date(s):	June 1, 2018	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(d) / Part 15.209	Air Temperature:	19.4°C
Results:	Complies	Relative Humidity:	47%

Soil Sensor: 0.009 MHz to 0.15 MHz, Low Channel

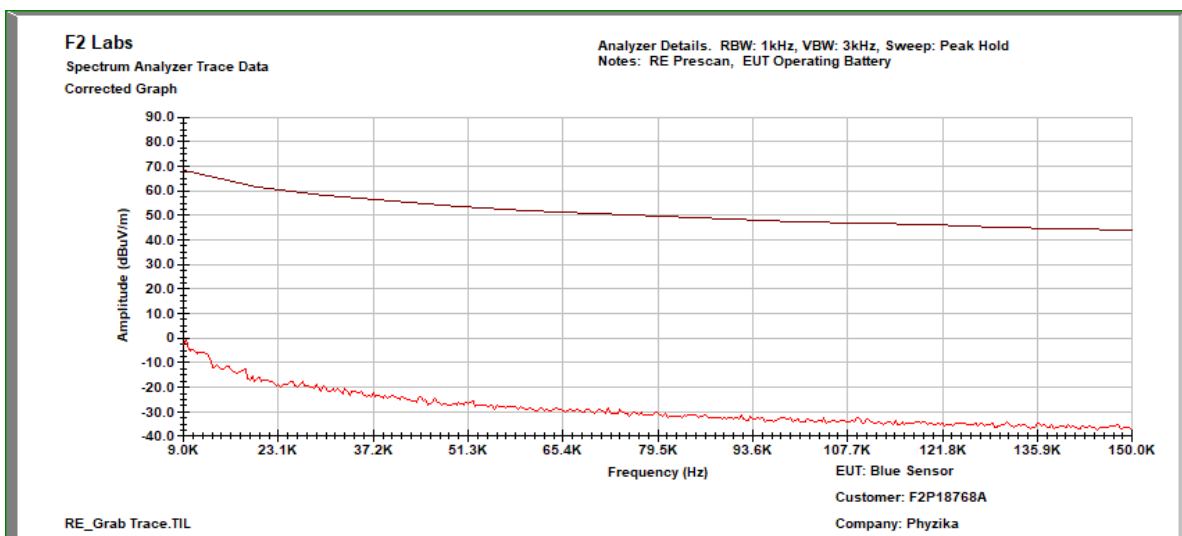

Soil Sensor: 0.15 MHz to 0.5 MHz, Low Channel

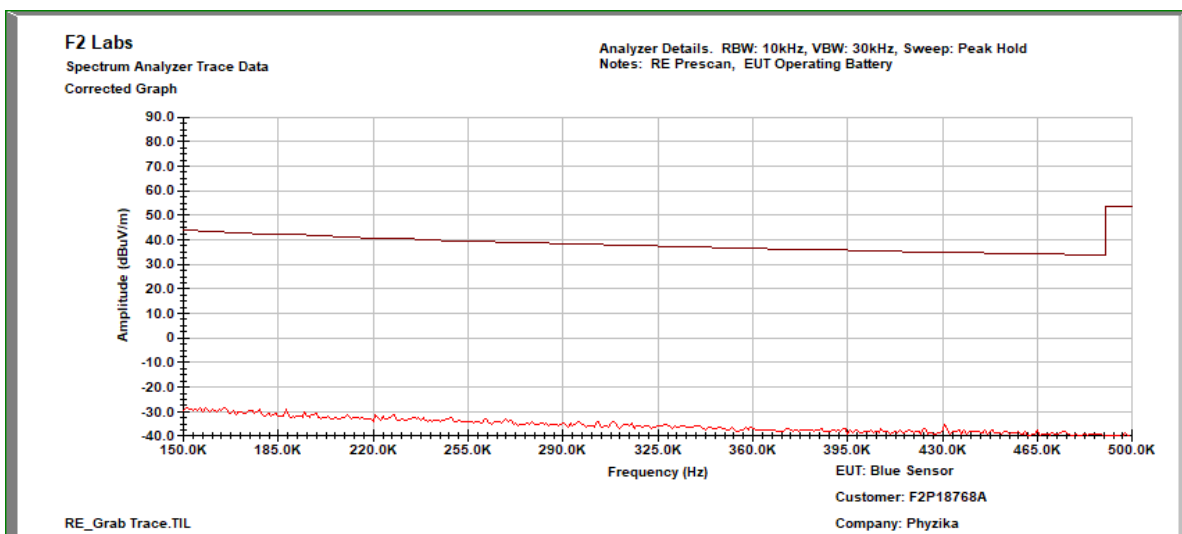





Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Soil Sensor: 0.5 MHz to 5.0 MHz, Low Channel

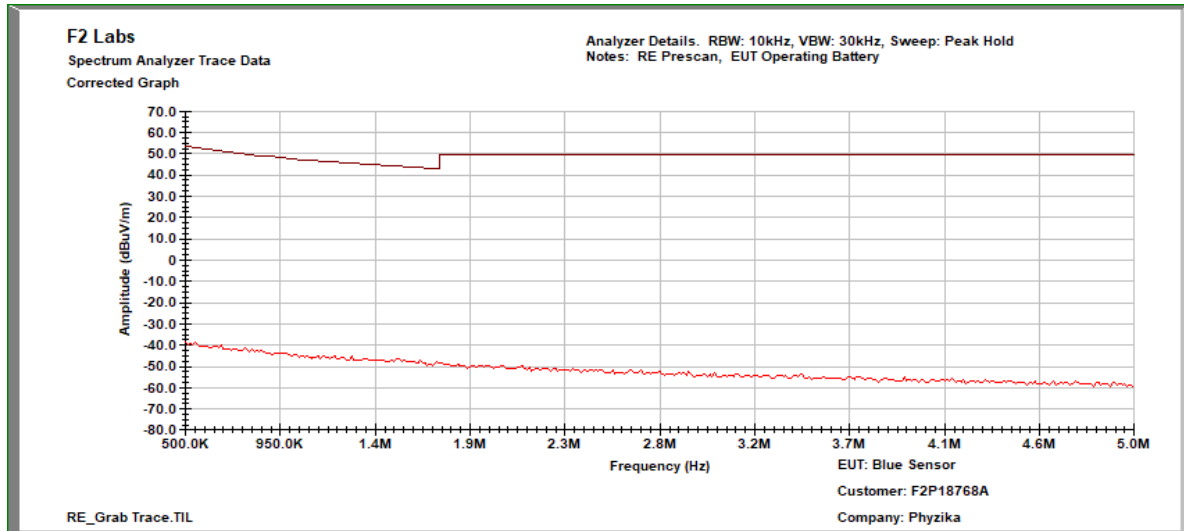


Soil Sensor: 5.0 MHz to 30.0 MHz, Low Channel

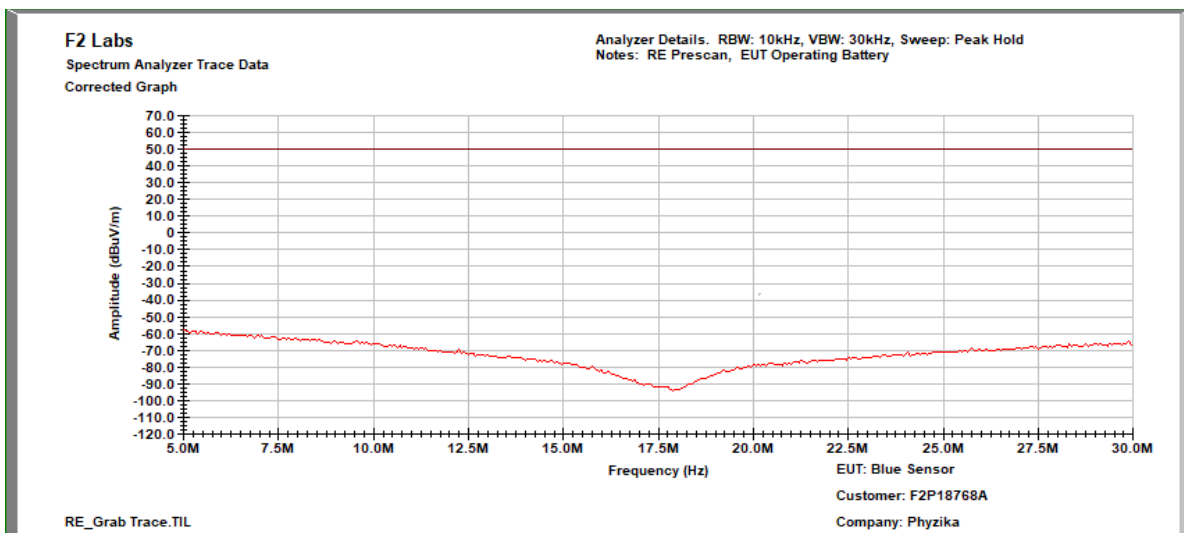




Soil Sensor: 30 MHz to 1000 MHz, Vertical, Low Channel*

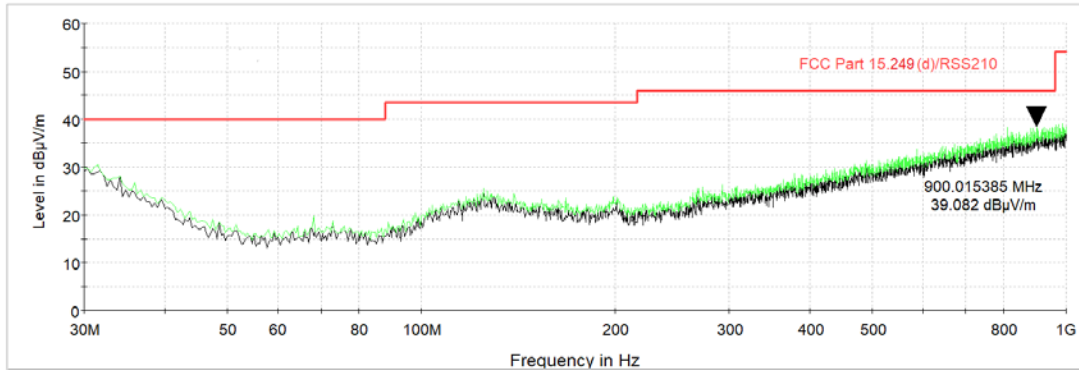


Soil Sensor: 30 MHz to 1000 MHz, Horizontal, Low Channel*

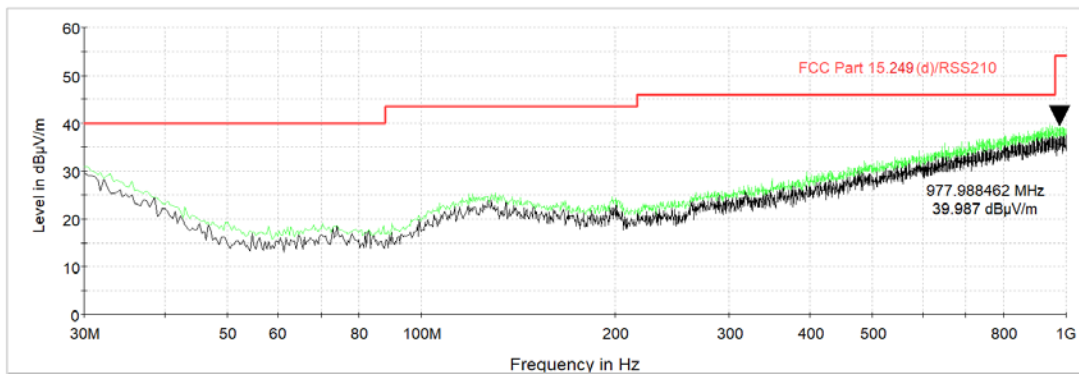


**There were no measurable emissions within 20dB of the limit. The signal at 903 MHz is the operating channel of the EUT.*



Soil Sensor: 1 GHz to 10 GHz, Vertical, Low Channel*

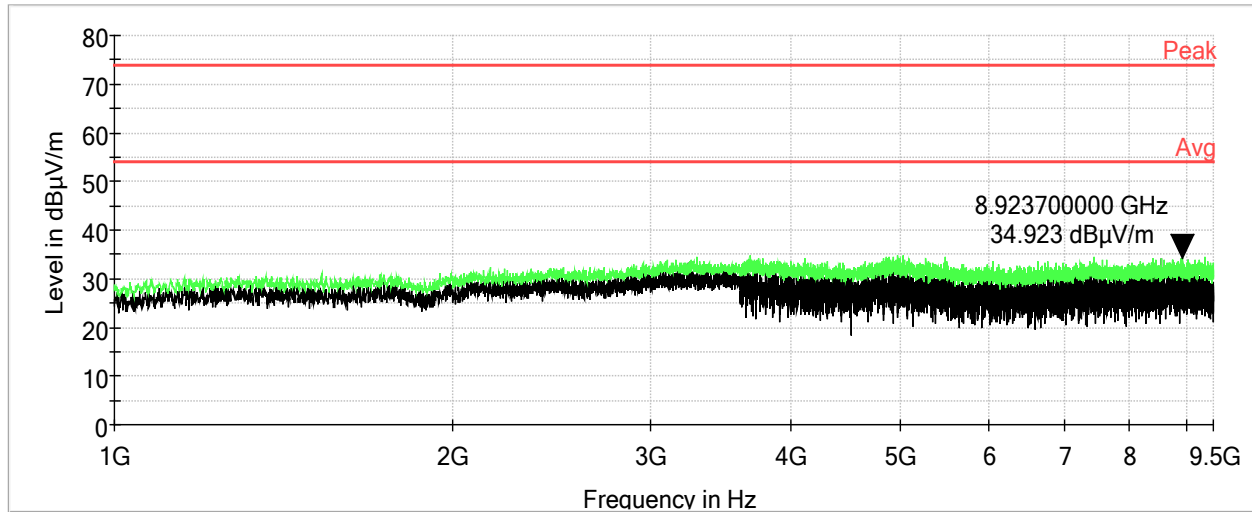


Soil Sensor: 1 GHz to 10 GHz, Horizontal, Low Channel*

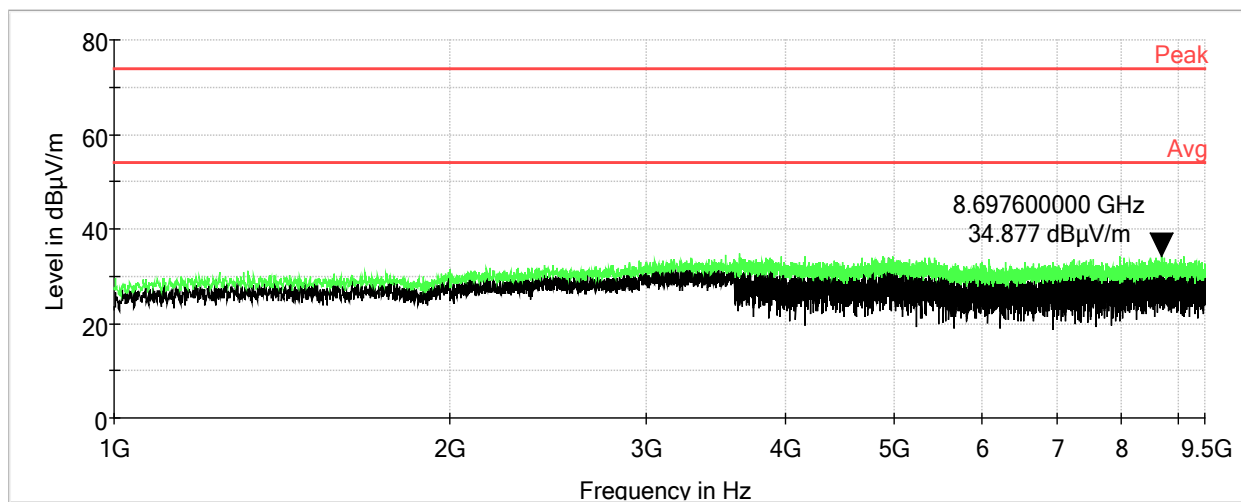

**There were no measurable emissions within 20dB of the limit.*



Soil Sensor: Band Edges

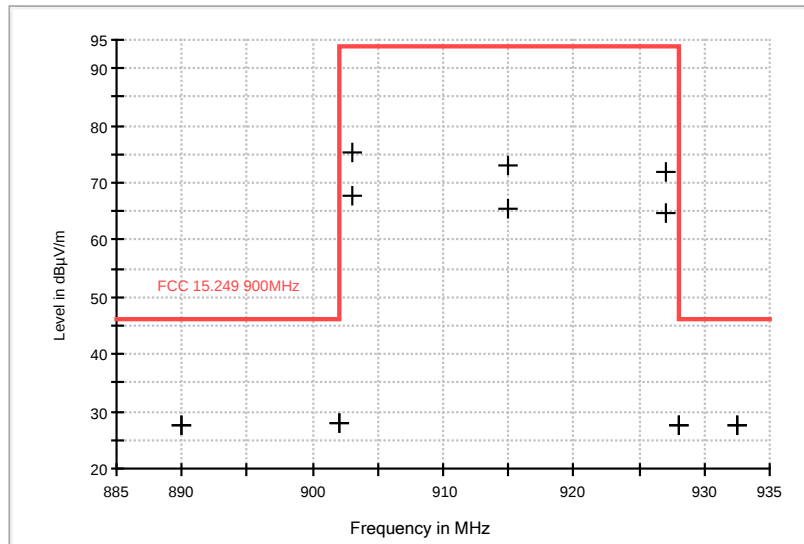

Frequency (MHz)	Polarity	Antenna Height (cm)	Azimuth (deg)	Corr. (dB)	QuasiPeak (dBμV/m)	QuasiPeak (dBμV/m) Limit	QuasiPeak Margin (dB)	Bandwidth (kHz)
890.000000	V	108.0	100.0	11.3	27.5	46	-18.5	120.000
890.000000	H	100.0	77.0	11.3	27.6	46	-18.4	120.000
902.000000	V	108.0	100.0	11.6	27.8	46	-18.2	120.000
928.000000	V	100.0	102.0	12.1	27.5	46	-18.5	120.000
932.520000	V	100.0	102.0	12.1	27.6	46	-18.4	120.000
932.520000	H	100.0	76.0	12.1	27.6	46	-18.4	120.000




Order Number: F2P18768A


Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Test Date(s):	June 1, 2018	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(d) / Part 15.209	Air Temperature:	19.4°C
Results:	Complies	Relative Humidity:	47%

Ambient Sensor: 0.009 MHz to 0.15 MHz, Low Channel

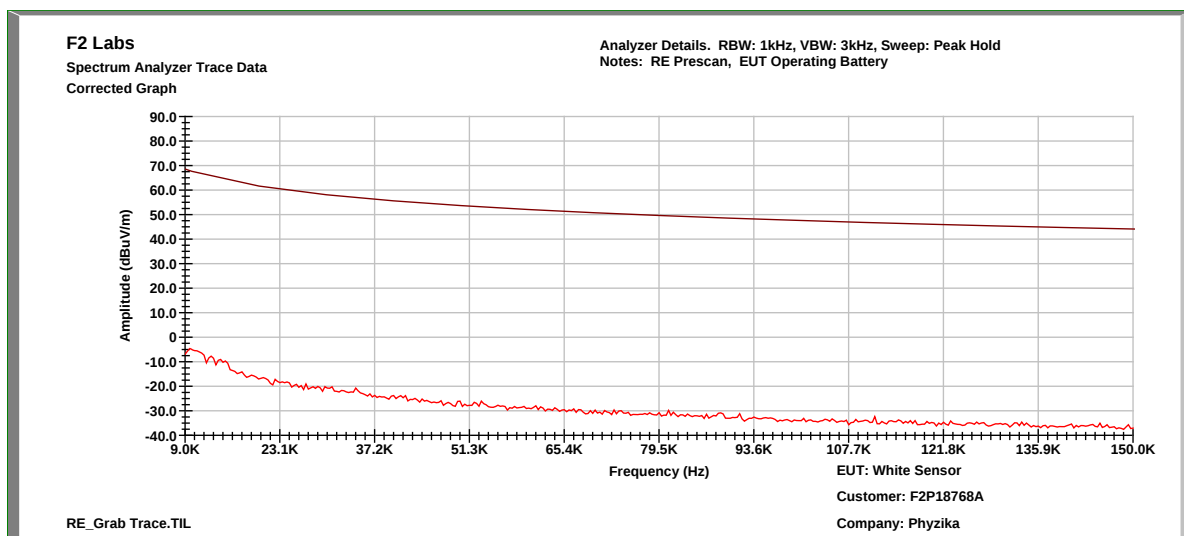

Ambient Sensor: 0.15 MHz to 0.5 MHz, Low Channel

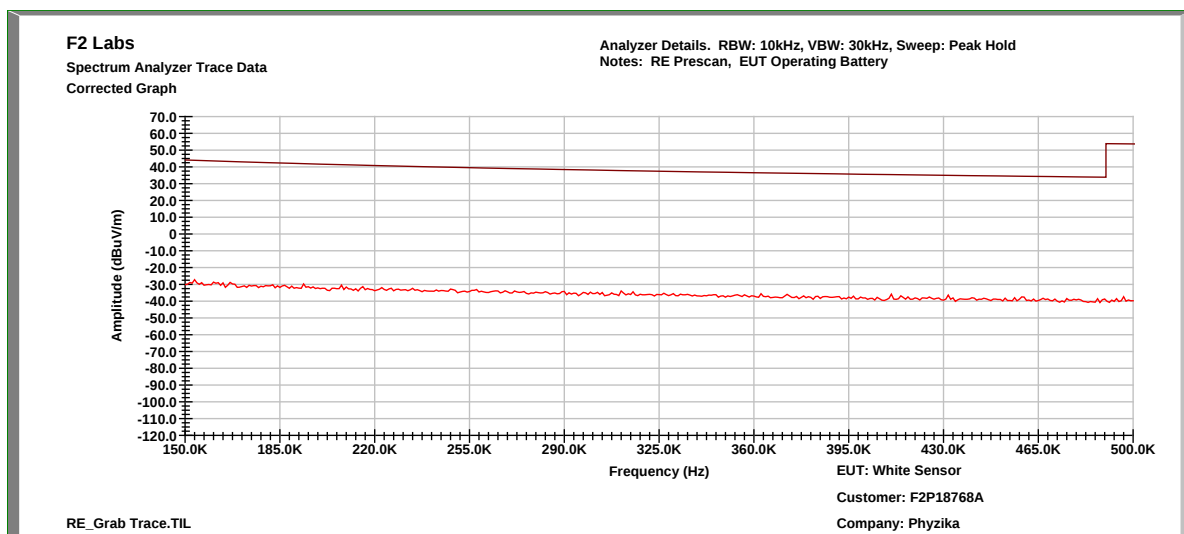





Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Ambient Sensor: 0.5 MHz to 5.0 MHz, Low Channel

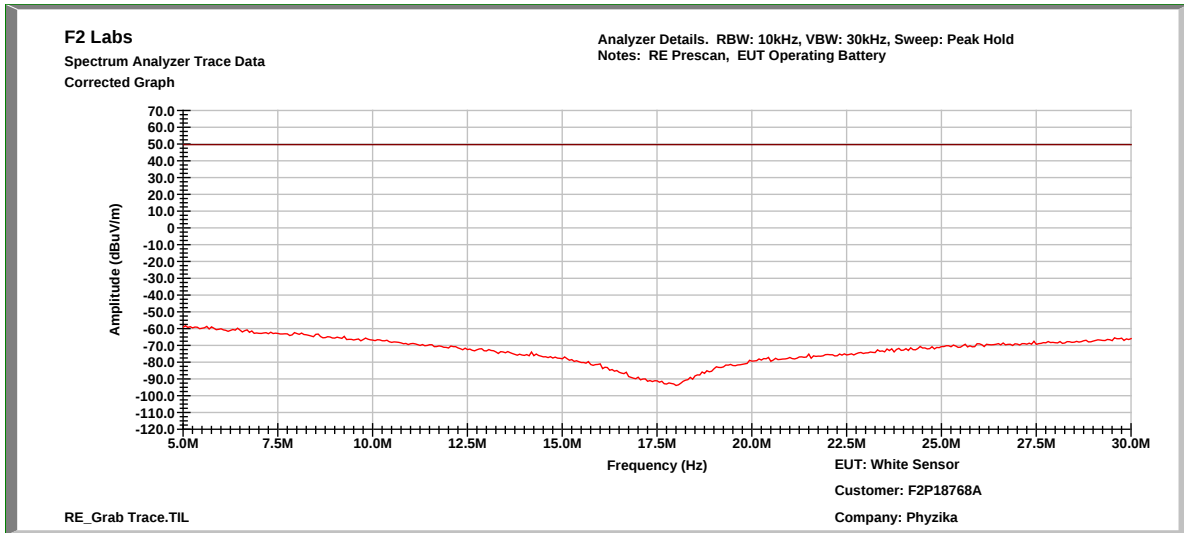


Ambient Sensor: 5.0 MHz to 30.0 MHz, Low Channel

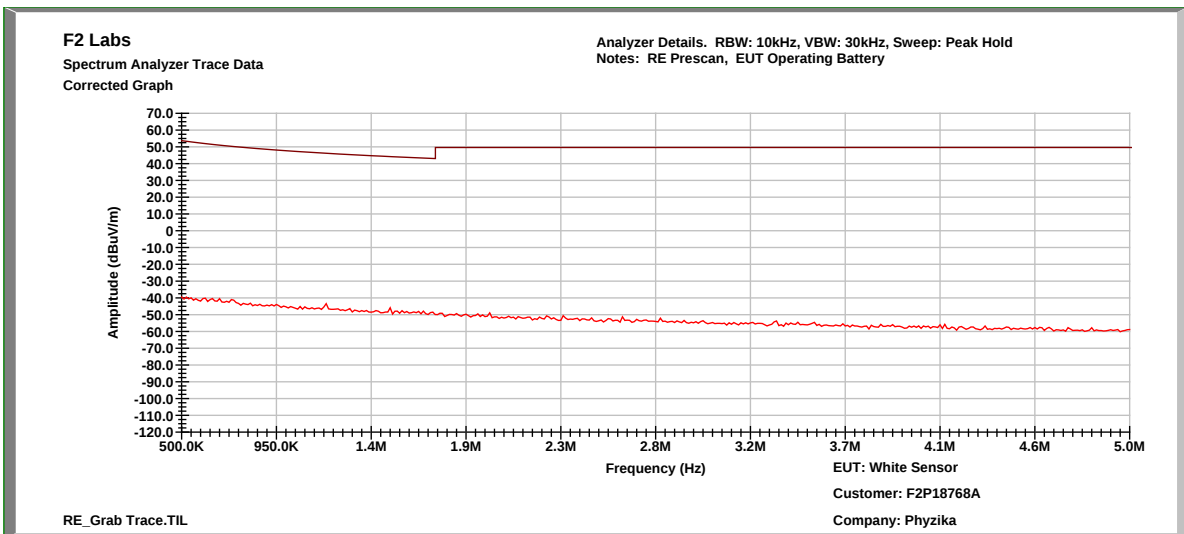




Ambient Sensor: 30 MHz to 1000 MHz, Low Channel, Vertical

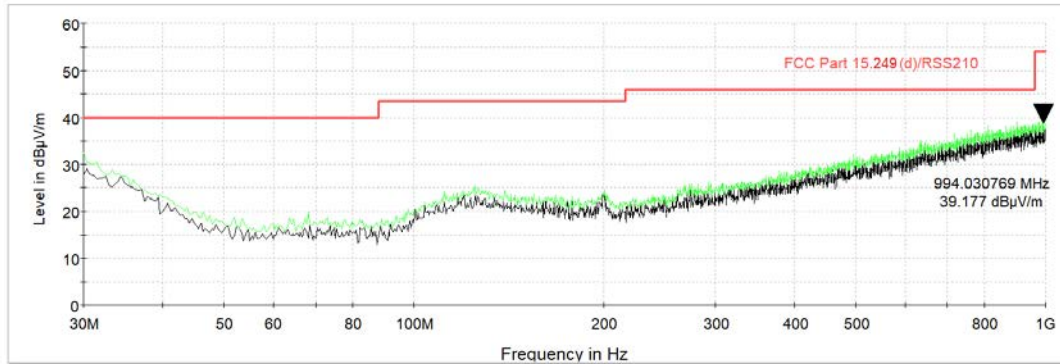


Ambient Sensor: 30 MHz to 1000 MHz, Low Channel, Horizontal

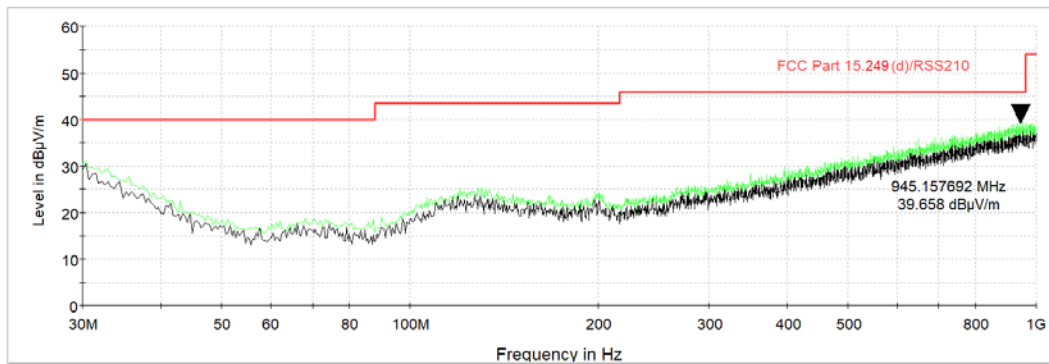


**There were no measurable emissions within 20dB of the limit.*



Ambient Sensor: 1 GHz to 10 GHz, Vertical, Low Channel

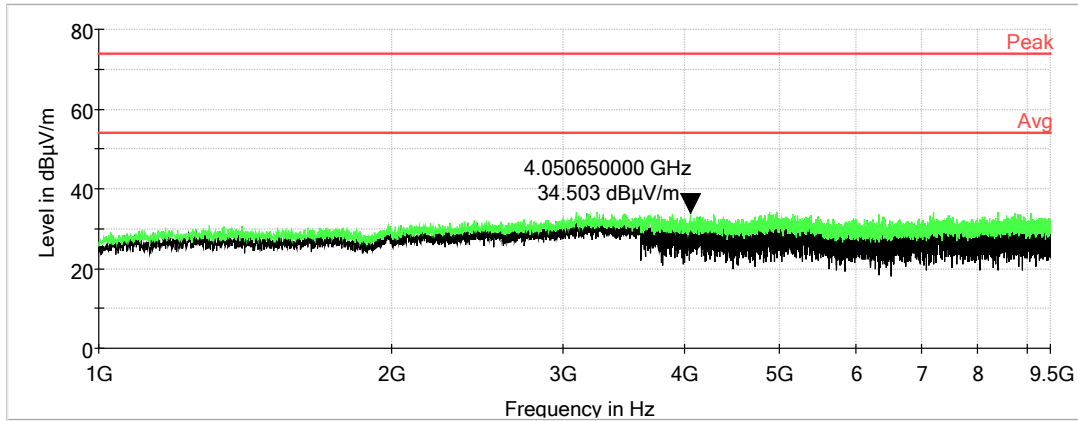


Ambient Sensor: 1 GHz to 10 GHz, Horizontal, Low Channel

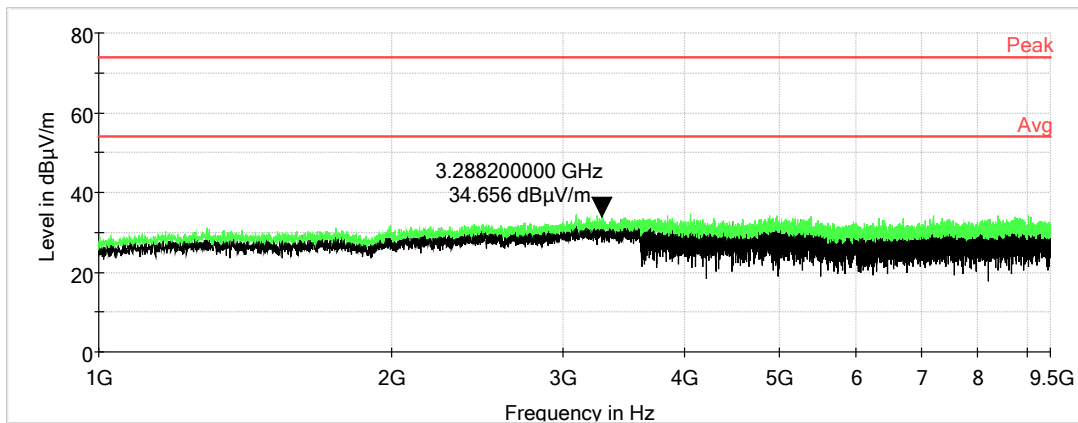

**There were no measurable emissions within 20dB of the limit.*



Ambient Sensor: Band Edges

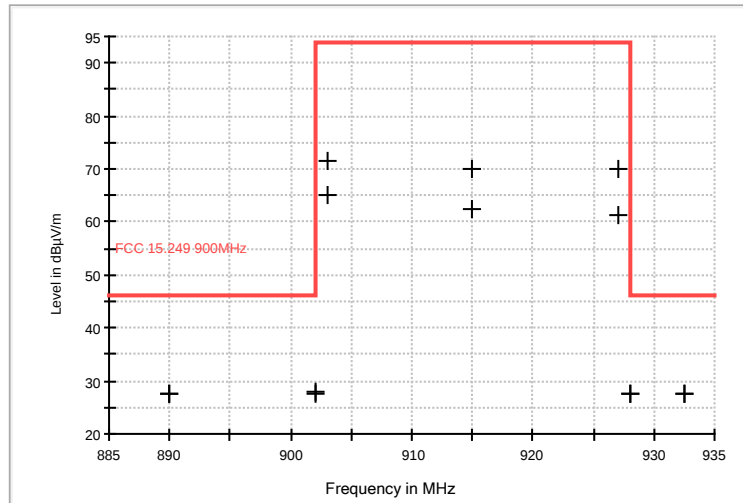

Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Azimuth (degrees)	Reading (dBμV)	Cable Loss & Antenna Factor (dB)	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
890.000000	V	108.00	90.00	16.2	11.3	27.50	46.0	-18.5
890.000000	H	108.00	255.00	16.3	11.3	27.60	46.0	-18.4
902.000000	V	108.00	90.00	16.1	11.6	27.70	46.0	-18.3
928.000000	V	108.00	92.00	15.5	12.1	27.60	46.0	-18.4
932.500000	V	108.00	92.00	15.4	12.1	27.50	46.0	-18.5
932.500000	H	108.00	255.00	15.5	12.1	27.60	46.0	-18.4




9 PHOTOGRAPHS

Radiated Emissions 30 MHz to 1 GHz & Occupied Bandwidth: PAR Sensor



Radiated Emissions: PAR Sensor, Above 1 GHz

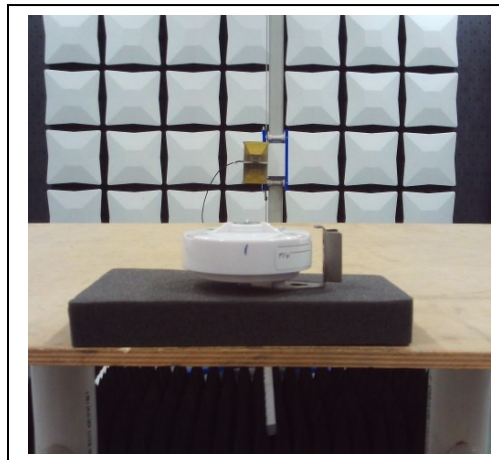





Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Radiated Emissions 30 MHz to 1 GHz & Occupied Bandwidth: Soil Sensor

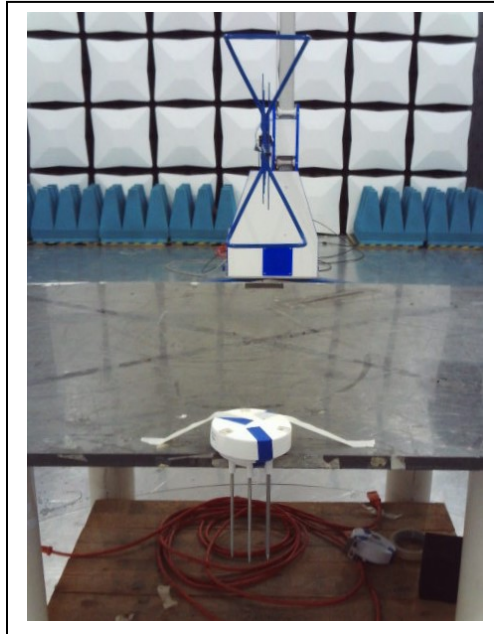

Radiated Emissions: Soil Sensor, Above 1 GHz

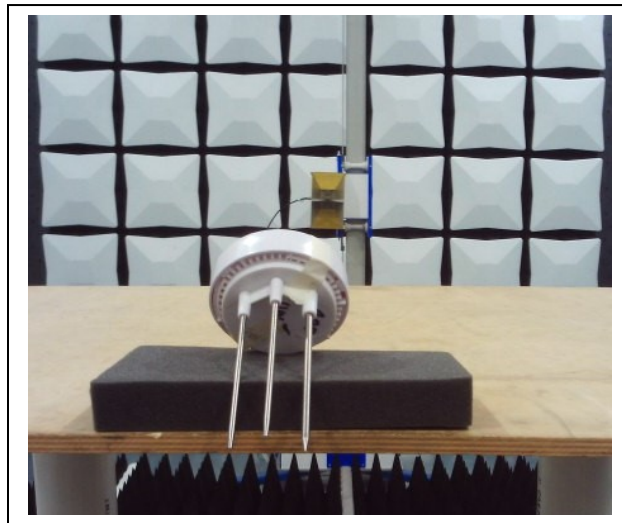




Order Number: F2P18768A

Applicant: lushSensor, LLC
Models: LS-AS-00-000W-01, LS-SS-00-000W-01,
LS-PS-00-000W-01

Radiated Emissions 30 MHz to 1 GHz & Occupied Bandwidth: Ambient Sensor

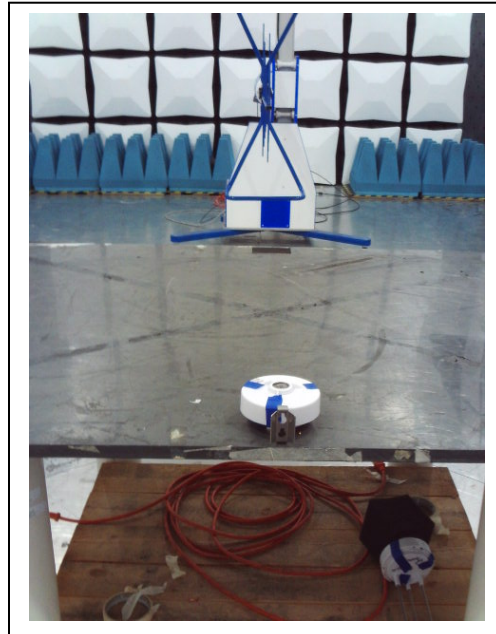

Radiated Emissions: Ambient Sensor, Above 1 GHz

