

TEST REPORT

Applicant: Hunan Greatwall Computer System Co., Ltd
Address: Hunan Greatwall Industrial Park, Tianyi Science and Technology City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan Province
Equipment Type: Smart Projector
Model Name: T110 (refer to section 2.3)
Brand Name: N/A
FCC ID: 2APUQ-T110
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: Apr. 25, 2024
Test Date: May 12, 2025 - Jun. 16, 2025
Date of Issue: Jul. 21, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu

Julie Zhu

Checked by: Ye Hongji

Ye Hongji

Approved by: Sunny Zou
(Technical Director)

Sunny Zou

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 21, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	11
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	12
4.6	Measurement Results Explanation Example	15
5	TEST ITEMS	16
5.1	Antenna Requirements	16
5.2	Output Power	17
5.3	Occupied Bandwidth	19
5.4	Conducted Spurious Emission	20
5.5	Band Edge (Authorized-band band-edge)	22

5.6	Conducted Emission	24
5.7	Radiated Spurious Emission	25
5.8	Band Edge (Restricted-band band-edge).....	30
5.9	Power Spectral density (PSD).....	31
ANNEX A	TEST RESULT	32
A.1	Output Power	32
A.2	Occupied Bandwidth	42
A.3	Conducted Spurious Emissions	47
A.4	Band Edge (Authorized-band band-edge).....	56
A.5	Conducted Emissions.....	60
A.6	Radiated Emission	62
A.7	Band Edge (Restricted-band band-edge).....	76
A.8	Power Spectral Density (PSD)	78
ANNEX B	TEST SETUP PHOTOS	81
ANNEX C	EUT EXTERNAL PHOTOS	81
ANNEX D	EUT INTERNAL PHOTOS	81

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Hunan Greatwall Computer System Co., Ltd
Address	Hunan Greatwall Industrial Park, Tianyi Science and Technology City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan Province

2.2 Manufacturer Information

Manufacturer	Hunan Greatwall Computer System Co., Ltd
Address	Hunan Greatwall Industrial Park, Tianyi Science and Technology City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan Province

2.3 General Description for Equipment under Test (EUT)

EUT Name	Smart Projector
Model Name Under Test	T110
Series Model Name	T110-001, T110-002, T110-003, T110-004, T110-005, T110-006, T110-007, T110-008, T110-009, T110-010, T110-011, T110-012, W1, W1 Pro, W1 Ultra, W1 Max, W1s, W1-001, W1-002, W1-003, W1-004, W1-005, W1-006, W1-007, W1-008, W1-009, W1-010, W1-011, W1-012, T110L, T110L-001, T110L-002, T110L-003, T110L-004, T110L-005, T110L-006, T110L-007, T110L-008, T110L-009, T110L-010, T110L-011, T110L-012, F7800, F7800s, F7800 Pro, F7800 Ultra, F7800-001, F7800-002, F7800-003, F7800-004, F7800-005, F7800-006, F7800-007, F7800-008, F7800-009, F7800-010, F7800-011, F7800-012, T110D, T110D-001, T110D-002, T110D-003, T110D-004, T110D-005, T110D-006, T110DL, T110DL-001, T110DL-002, T110DL-003, T110DL-004, T110DL-005, T110DL-006
Description of Model name differentiation	a. There are two appearances for the product in total. The main differences lie in the presence or absence of a stand, the body color, and the position of the power port. b. All models have the same electrical parameters and circuit structure. For the two appearances with or without a stand, there is only a slight difference in the length of the internal power connection wire. (this information provided by the applicant)
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.	
Modulation Technology	DSSS, OFDM	
Product Type	☒ Mobile ☐ Portable ☐ Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11b/g Multi Input Multi Output (MIMO) for 802.11n	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated for 802.11b/g Categorization as Uncorrelated for 802.11n	
Antenna Type	SISO-Antenna 1 SISO-Antenna 2	Built-in Antenna
Antenna Gain	SISO-Antenna 1	2.75 dBi
	SISO-Antenna 2	3.21 dBi
Total directional gain	For power spectral density (PSD) measurements	Correlated: 5.99 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 2.99 dBi Formulas: Directional gain = G_{ANT}
	For power measurements	Correlated: 5.99 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 2.99 dBi Formulas: Directional gain = G_{ANT}
	For Conducted	Correlated: 5.99 dBi

	Out-of-Band and Spurious Measurements	Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 2.99 dBi Formulas: Directional gain = G_{ANT}
About the Product		Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.

Mode	Antenna		
	SISO-Antenna 1	SISO-Antenna 2	MIMO
802.11b	√	√	√
802.11g	√	√	√
802.11n20	√	√	√
802.11n40	√	√	√
Note: All the configurations were tested, but only the worst data was shown in this report.			

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
4	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	54% to 60%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+19.8°C to +24.5°C
Working Voltage of the EUT	NV (Normal Voltage)	230 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2024.12.16	2025.12.15
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2024.08.01	2025.07.31
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2025.02.22	2028.02.21
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2025.09.03
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2024.07.06	2027.07.05
Amplifier	COM-MV	ZT30-1000M	B2017119082	2024.11.28	2025.11.27
Anechoic Chamber	RAINFORD	9m*6m*6m	101	2023.03.04	2026.03.03
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8 m	112	2025.02.14	2028.02.13

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

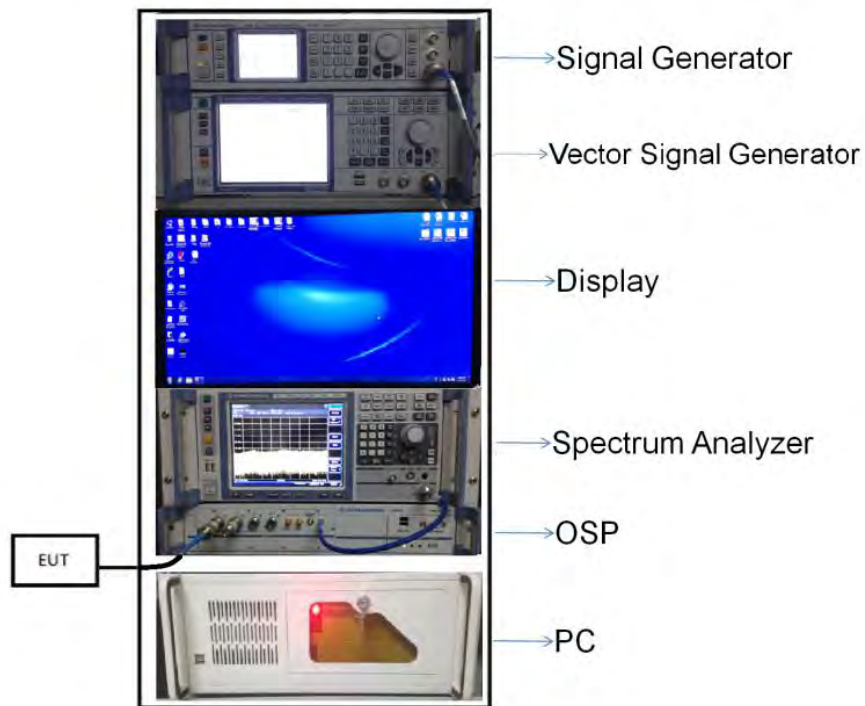


(Diagram 1)

4.5.2 For AC Power Supply Port Test

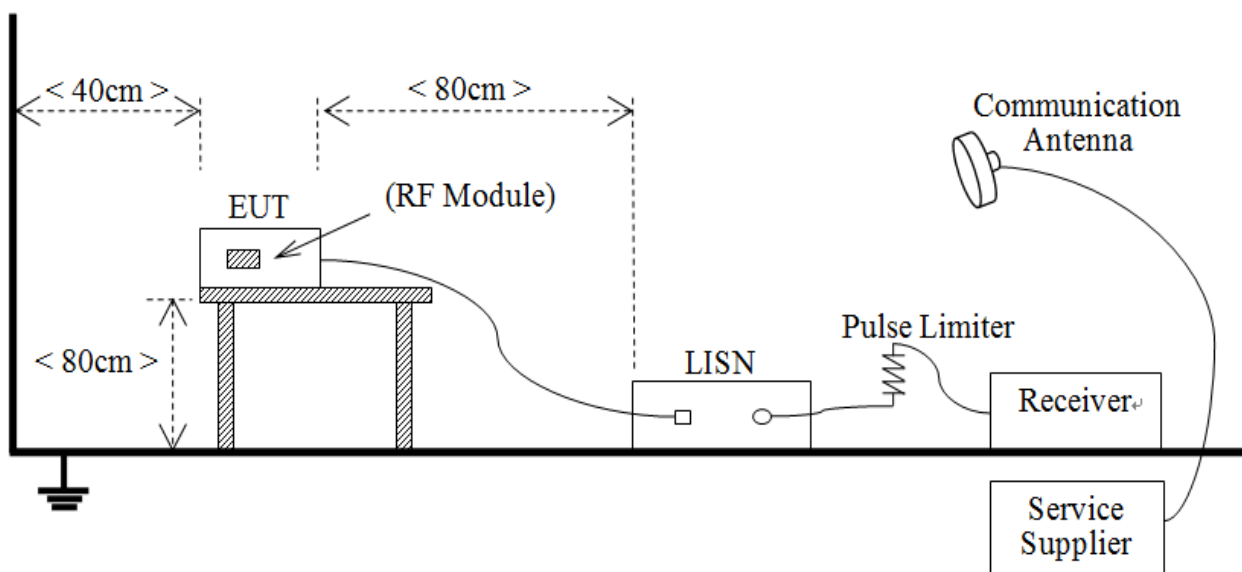


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

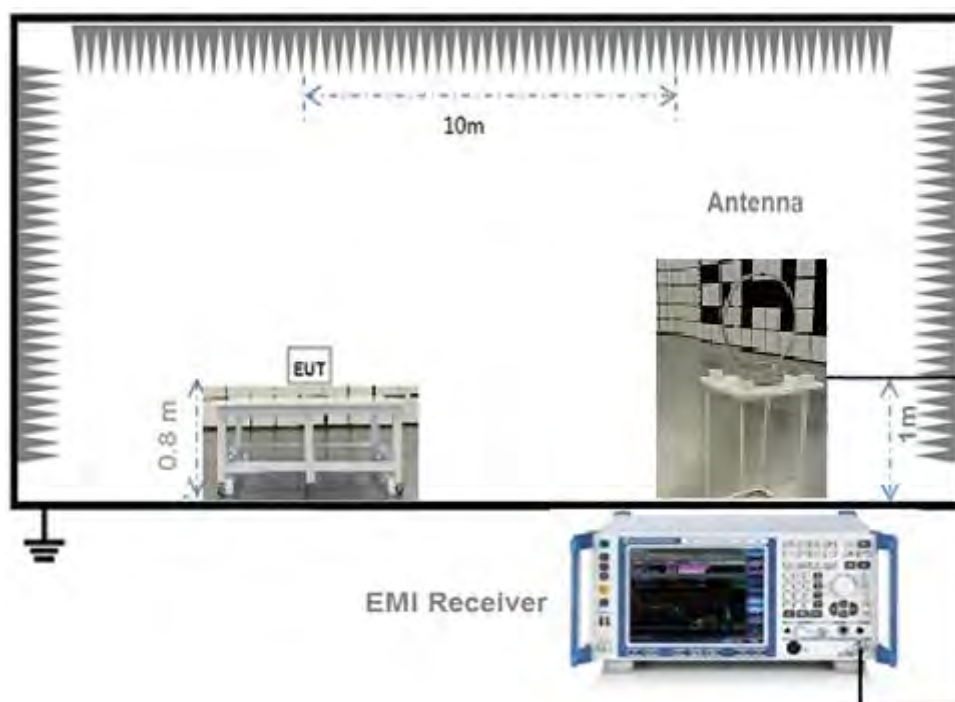


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

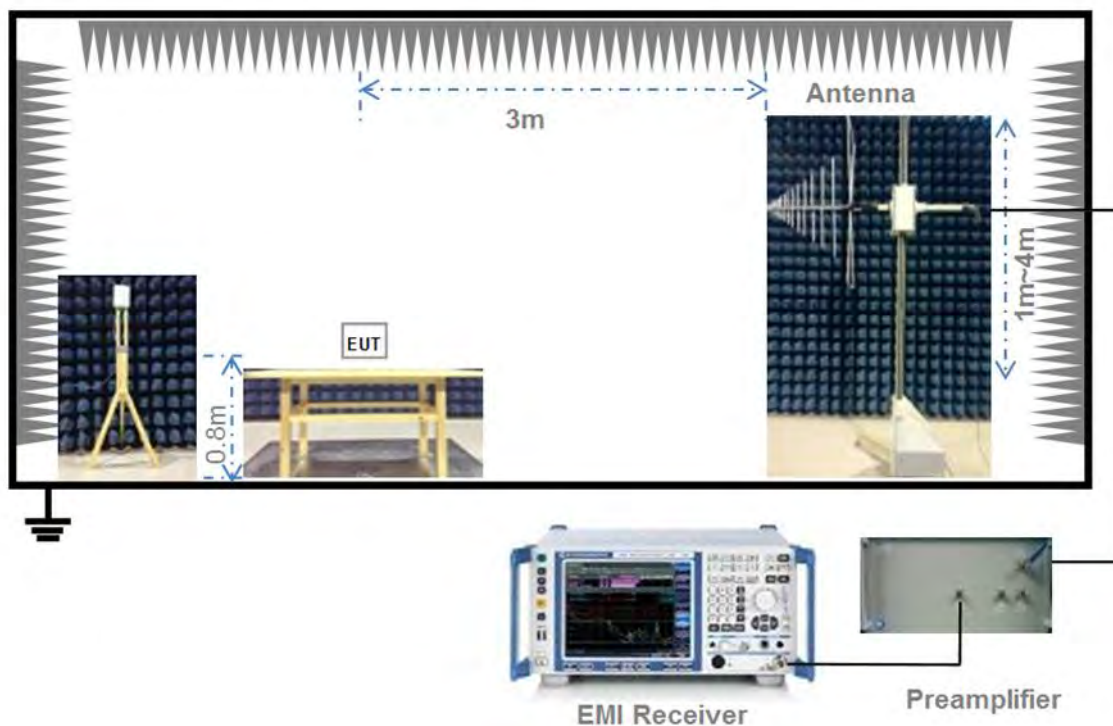

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

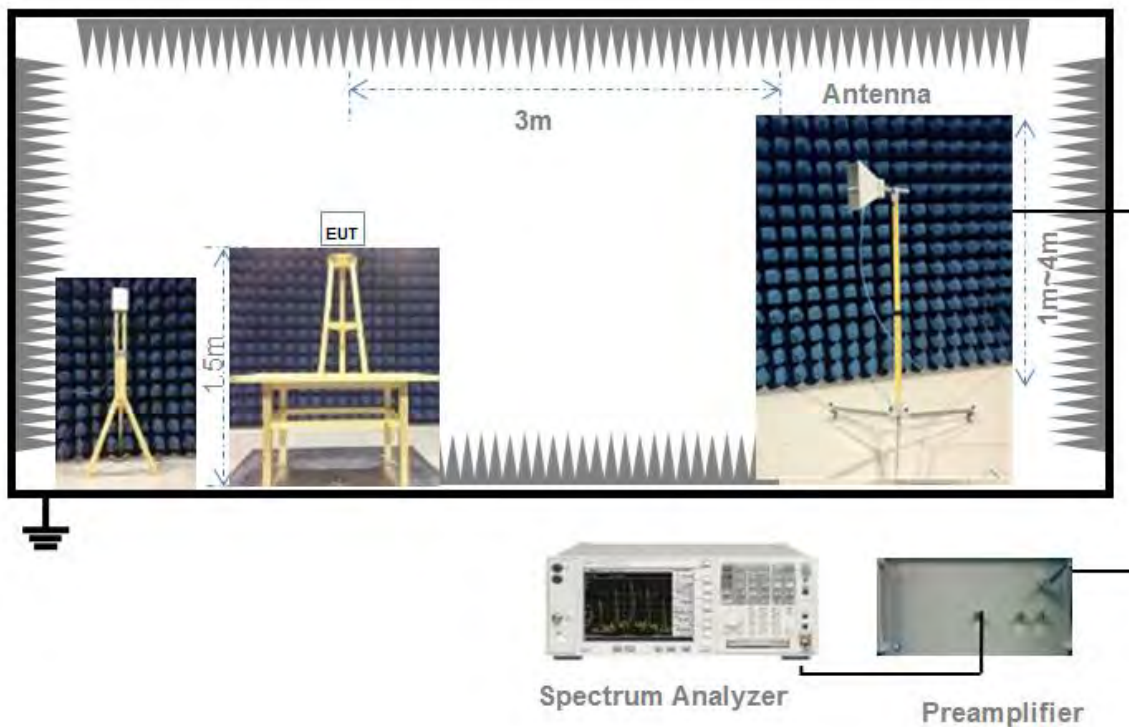

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The EUT shall be transmitted at its maximum power control level.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) $VBW \geq 3 \times RBW$.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (RBW/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle	Duty Factor
802.11b	12.40	12.83	96.65%	0.15
802.11g	2.06	2.22	92.71%	0.33
802.11n-20 MHz	1.92	2.14	89.41%	0.49
802.11n-40 MHz	0.94	1.17	80.79%	0.93

SISO-Antenna 1

Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.71	59.02	30	1000	Pass
Middle	17.46	55.72			Pass
High	17.87	61.24			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.81	120.50	30	1000	Pass
Middle	20.58	114.29			Pass
High	20.89	122.74			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.81	120.50	30	1000	Pass
Middle	20.61	115.08			Pass
High	20.85	121.62			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.05	127.35	30	1000	Pass
Middle	21.06	127.64			Pass
High	21.25	133.35			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.62	28.97	30	1000	Pass
Middle	14.28	26.79			Pass
High	14.61	28.91			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.48	28.05	30	1000	Pass
Middle	14.19	26.24			Pass
High	14.28	26.79			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.38	27.42	30	1000	Pass
Middle	14.32	27.04			Pass
High	14.35	27.23			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.35	27.23	30	1000	Pass
Middle	14.34	27.16			Pass
High	14.42	27.67			Pass

SISO-Antenna 2Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.41	55.08	30	1000	Pass
Middle	17.26	53.21			Pass
High	17.57	57.15			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.51	112.46	30	1000	Pass
Middle	20.68	116.95			Pass
High	20.49	111.94			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.81	120.50	30	1000	Pass
Middle	20.41	109.90			Pass
High	20.65	116.14			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.15	130.32	30	1000	Pass
Middle	20.76	119.12			Pass
High	21.45	139.64			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.82	30.34	30	1000	Pass
Middle	14.28	26.79			Pass
High	14.71	29.58			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.18	26.18	30	1000	Pass
Middle	14.19	26.24			Pass
High	14.38	27.42			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.08	25.59	30	1000	Pass
Middle	14.22	26.42			Pass
High	13.95	24.83			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.35	27.23	30	1000	Pass
Middle	14.44	27.80			Pass
High	14.42	27.67			Pass

MIMO-Antenna 1Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.61	28.91	30	1000	Pass
Middle	14.26	26.67			Pass
High	14.87	30.69			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.41	55.08	30	1000	Pass
Middle	17.58	57.28			Pass
High	17.59	57.41			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.41	55.08	30	1000	Pass
Middle	17.51	56.36			Pass
High	17.75	59.57			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.15	65.31	30	1000	Pass
Middle	17.66	58.34			Pass
High	18.45	69.98			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.42	13.87	30	1000	Pass
Middle	11.48	14.06			Pass
High	11.41	13.84			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.58	14.39	30	1000	Pass
Middle	10.79	11.99			Pass
High	11.08	12.82			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.08	12.82	30	1000	Pass
Middle	11.12	12.94			Pass
High	11.25	13.34			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.55	14.29	30	1000	Pass
Middle	11.04	12.71			Pass
High	11.22	13.24			Pass

MIMO-Antenna 2Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.41	27.61	30	1000	Pass
Middle	14.16	26.06			Pass
High	15.07	32.14			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.11	51.40	30	1000	Pass
Middle	17.28	53.46			Pass
High	17.79	60.12			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.61	57.68	30	1000	Pass
Middle	17.31	53.83			Pass
High	17.85	60.95			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.85	60.95	30	1000	Pass
Middle	17.56	57.02			Pass
High	18.25	66.83			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.32	13.55	30	1000	Pass
Middle	11.38	13.74			Pass
High	11.11	12.91			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.18	13.12	30	1000	Pass
Middle	10.59	11.46			Pass
High	11.08	12.82			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.18	13.12	30	1000	Pass
Middle	10.82	12.08			Pass
High	11.45	13.96			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.55	14.29	30	1000	Pass
Middle	11.14	13.00			Pass
High	11.42	13.87			Pass

MIMOPeak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.52	56.51	30	1000	Pass
Middle	17.22	52.73			Pass
High	17.98	62.83			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.27	106.49	30	1000	Pass
Middle	20.44	110.74			Pass
High	20.70	117.53			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.52	112.76	30	1000	Pass
Middle	20.42	110.19			Pass
High	20.81	120.52			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.01	126.27	30	1000	Pass
Middle	20.62	115.36			Pass
High	21.36	136.82			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.38	27.42	30	1000	Pass
Middle	14.44	27.80			Pass
High	14.27	26.75			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.39	27.51	30	1000	Pass
Middle	13.70	23.45			Pass
High	14.09	25.65			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.14	25.95	30	1000	Pass
Middle	13.98	25.02			Pass
High	14.36	27.30			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.56	28.58	30	1000	Pass
Middle	14.10	25.71			Pass
High	14.33	27.11			Pass

A.2 Occupied Bandwidth

Note: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	10.200000	14.734000	≥500
Middle	10.200000	14.714000	≥500
High	10.200000	14.708000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.200000	16.983000	≥500
Middle	16.000000	16.989000	≥500
High	16.200000	17.089000	≥500

802.11n-20 MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.700000	18.025000	≥500
Middle	16.000000	18.149000	≥500
High	16.800000	18.056000	≥500

802.11n-40 MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	35.300000	36.205000	≥500
Middle	35.400000	36.178000	≥500
High	35.400000	36.273000	≥500

Test Plots

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL




802.11n-20 MHz MIDDLE CHANNEL




802.11n-20 MHz HIGH CHANNEL




802.11n-40 MHz LOW CHANNEL

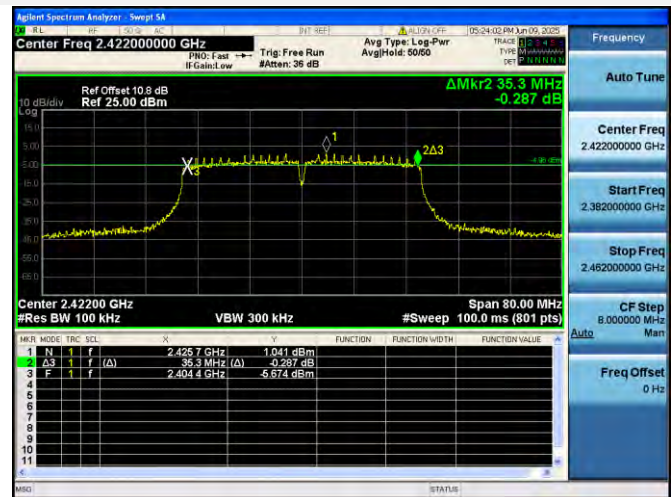

802.11n-40 MHz MIDDLE CHANNEL

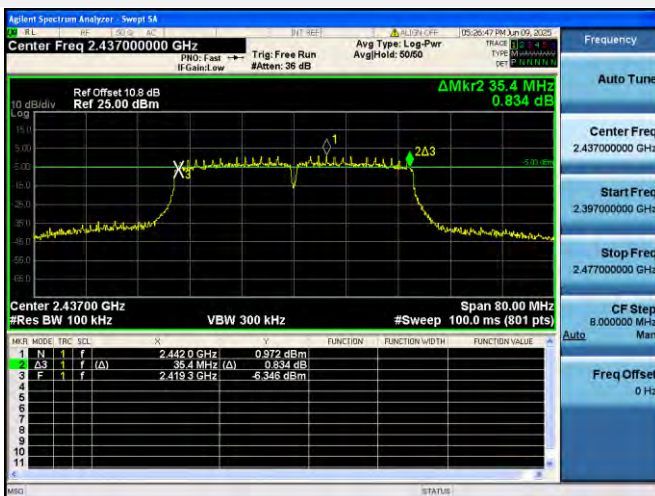


802.11n-40 MHz HIGH CHANNEL

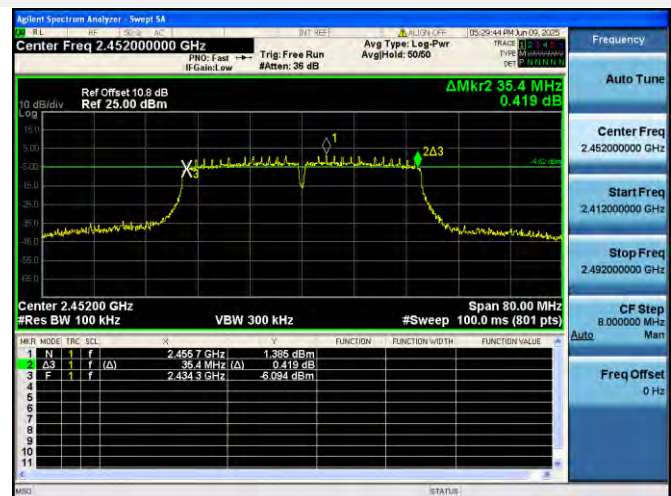


99% Bandwidth

802.11b LOW CHANNEL

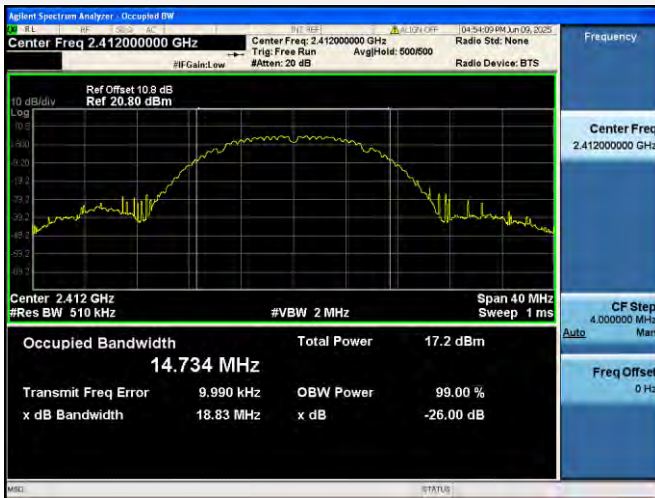

802.11b MIDDLE CHANNEL

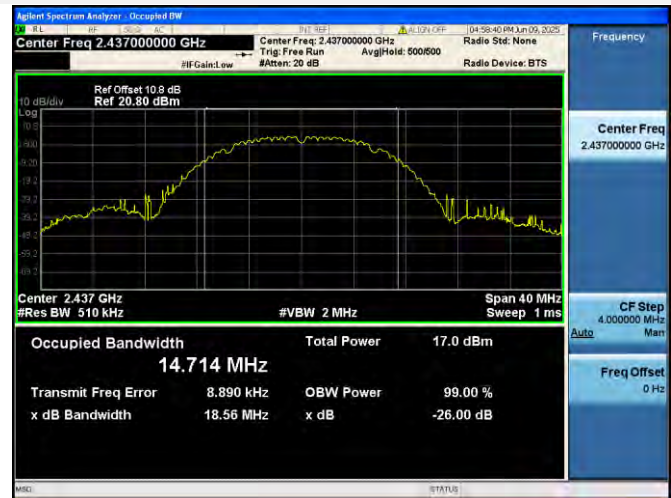

802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL




802.11n-40 MHz LOW CHANNEL



802.11n-40 MHz MIDDLE CHANNEL



802.11n-40 MHz HIGH CHANNEL

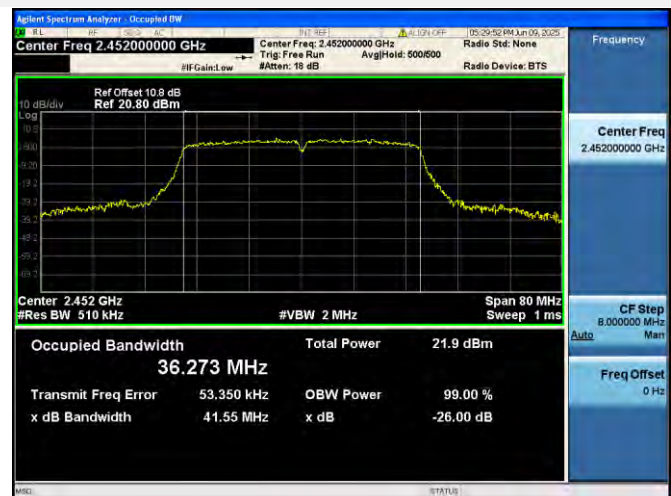

A.3 Conducted Spurious Emissions

Note: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.15	5.20	-14.80	Pass
Middle	-36.57	4.95	-15.05	Pass
High	-36.40	5.37	-14.63	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.64	3.90	-16.10	Pass
Middle	-38.76	3.91	-16.09	Pass
High	-36.58	4.44	-15.56	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-37.05	4.17	-15.84	Pass
Middle	-38.87	3.99	-16.01	Pass
High	-36.81	4.27	-15.73	Pass

802.11n-40 MHz Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-37.42	1.18	-18.82	Pass
Middle	-39.01	1.26	-18.74	Pass
High	-36.63	1.54	-18.46	Pass

Test Plots


802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

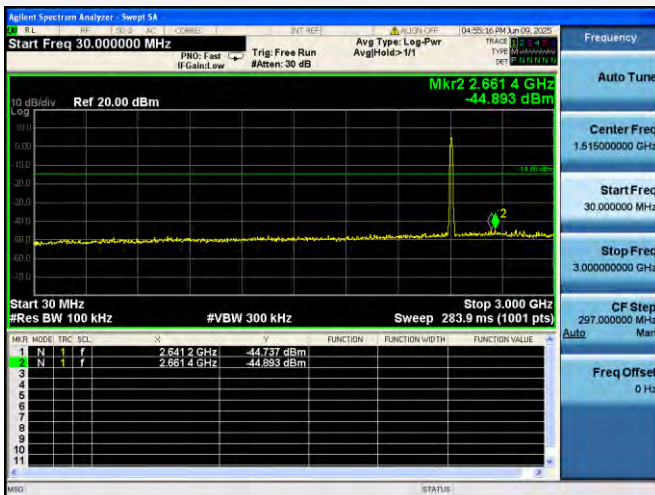


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

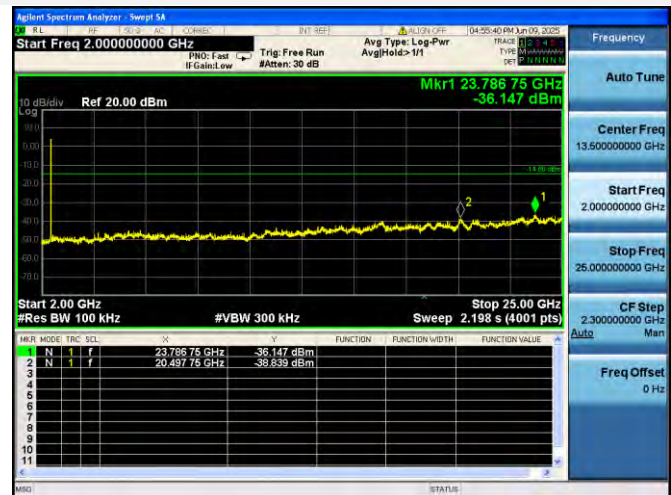


802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

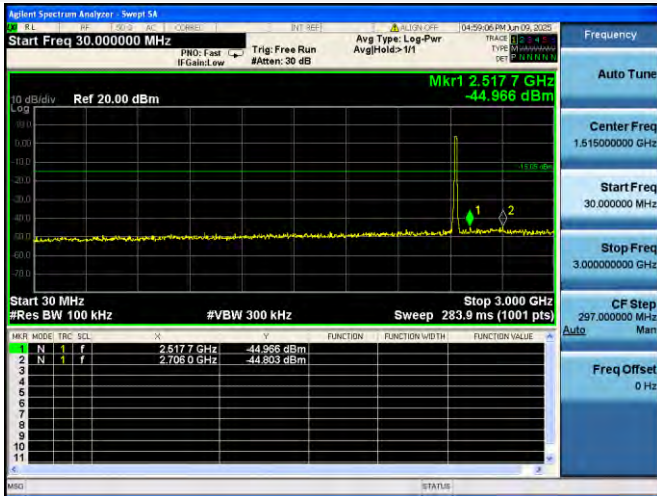


802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

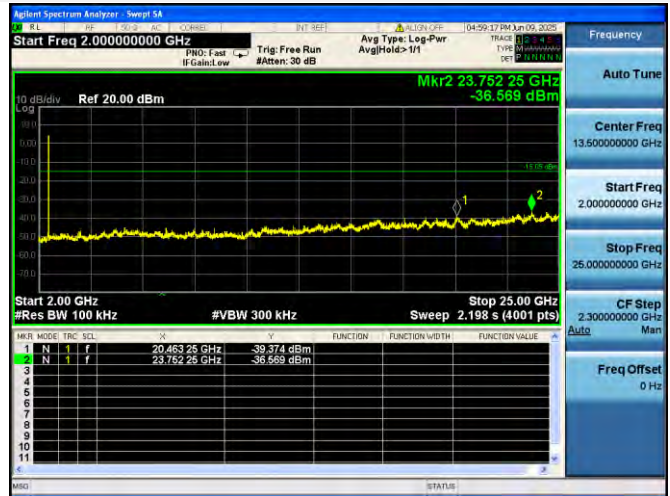

802.11b HIGH CHANNEL CARRIER LEVEL



802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

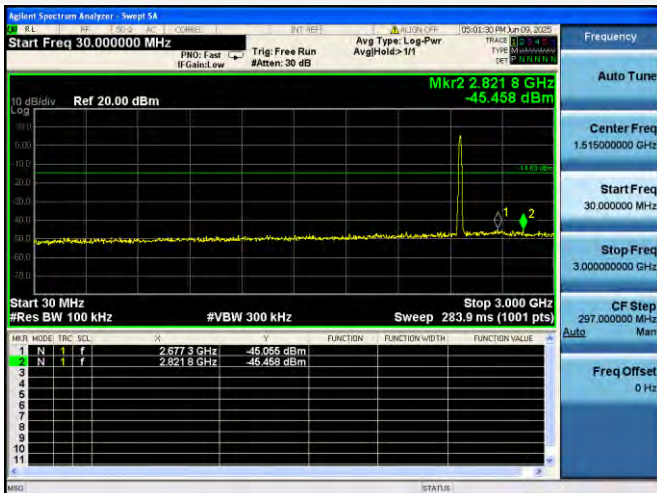


802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

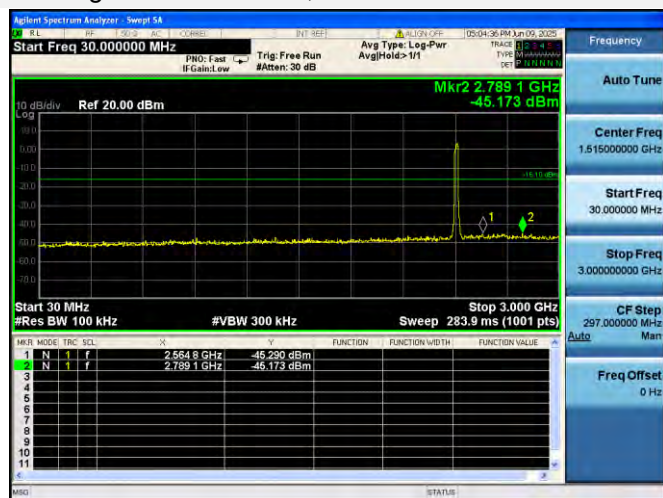


802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

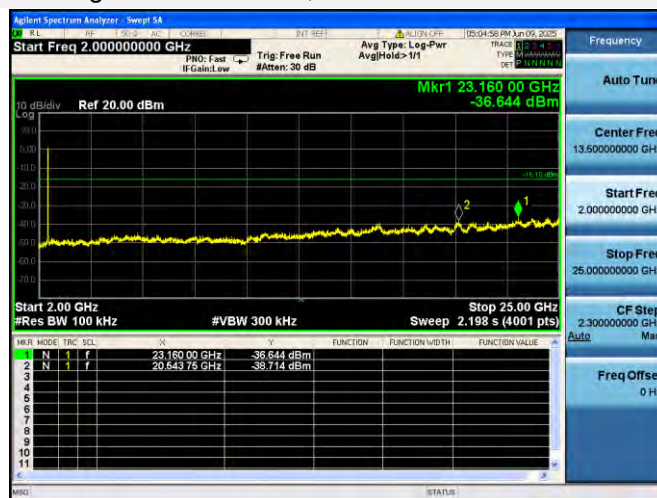


802.11g MIDDLE CHANNEL CARRIER LEVEL

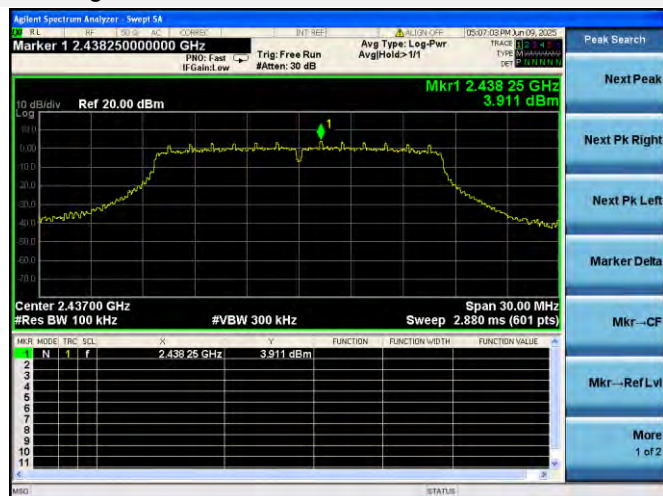

802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

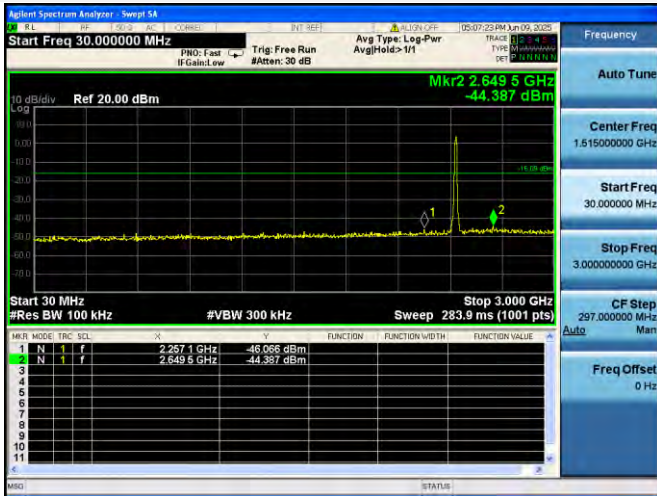


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

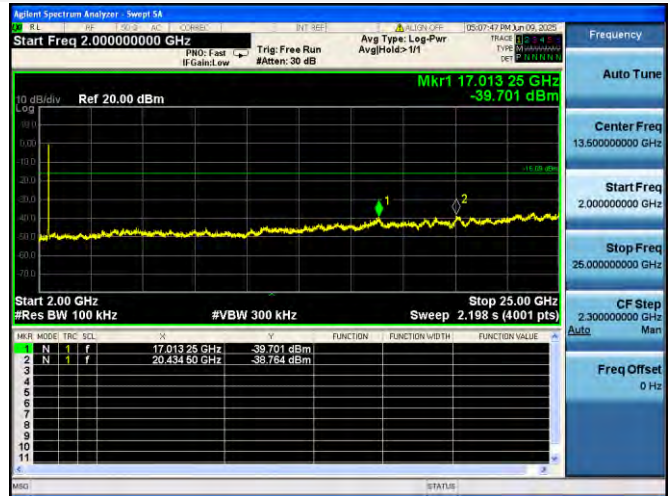

802.11g HIGH CHANNEL CARRIER LEVEL






802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

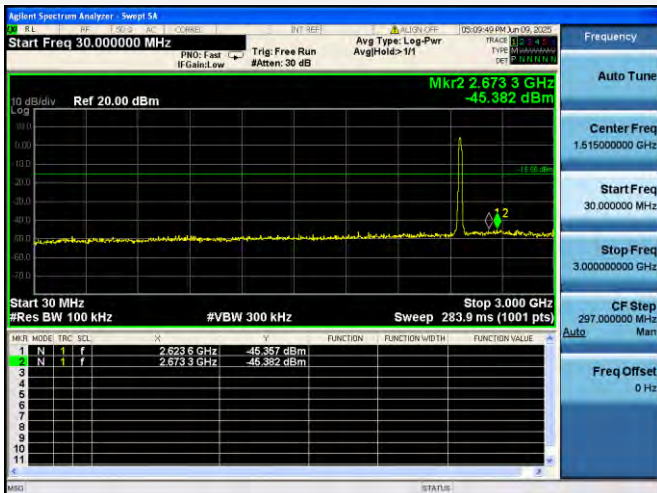


802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

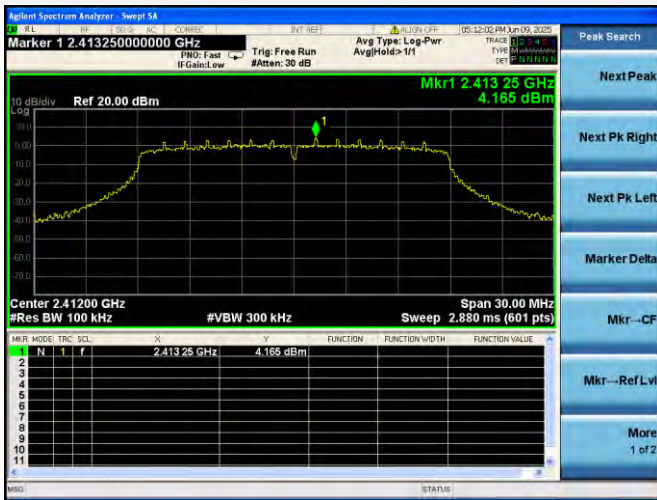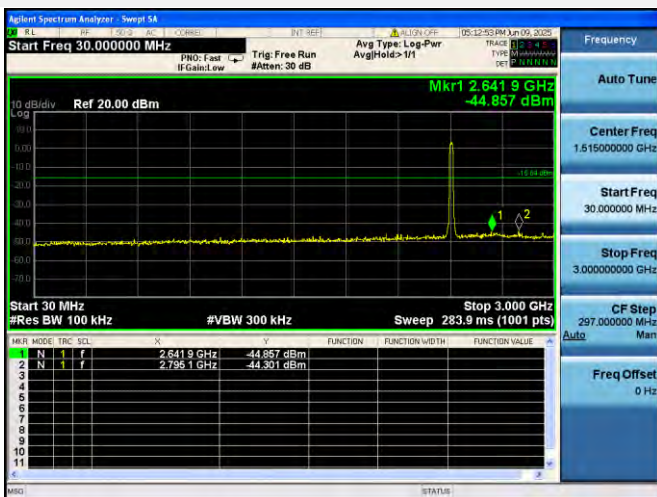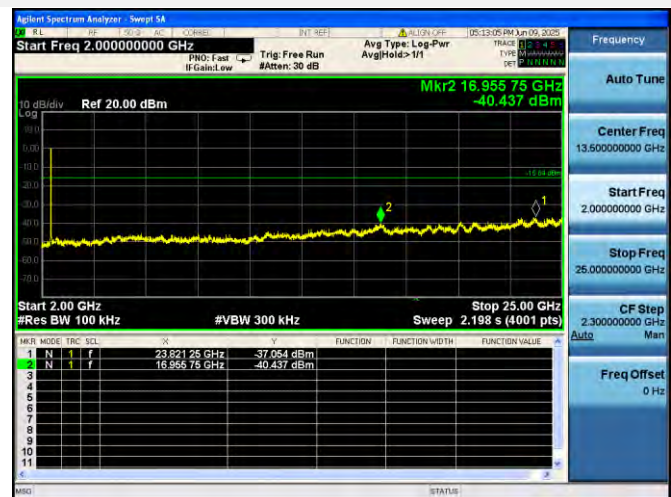802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

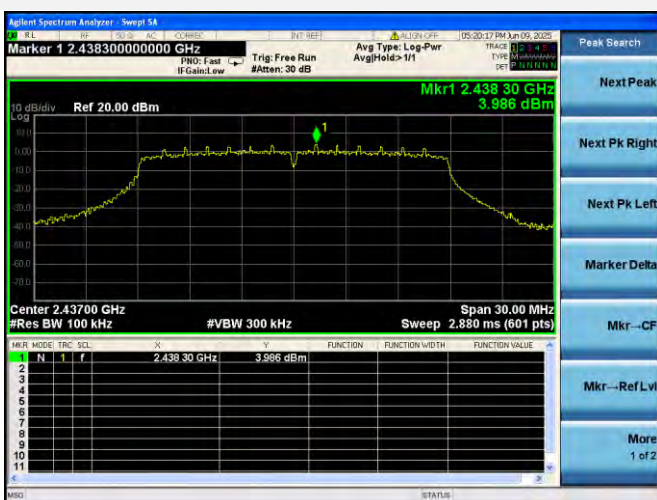


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

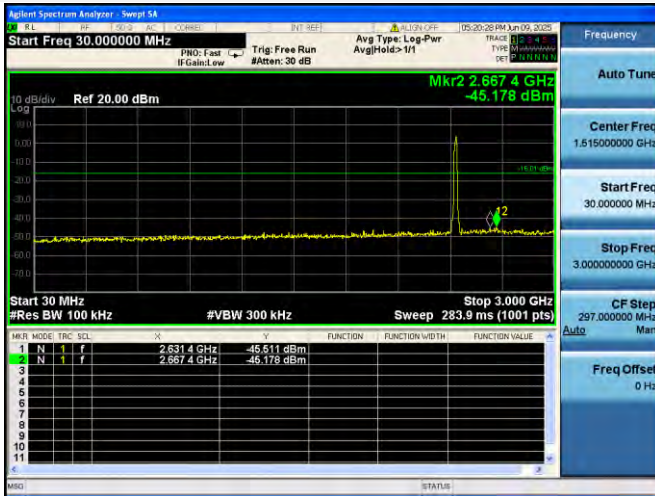


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

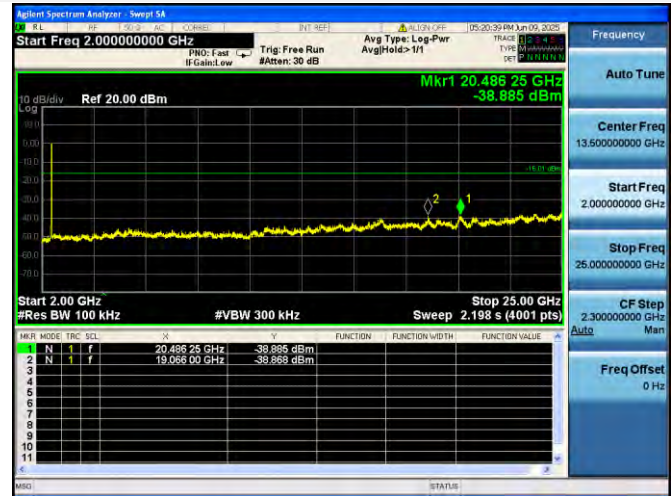


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

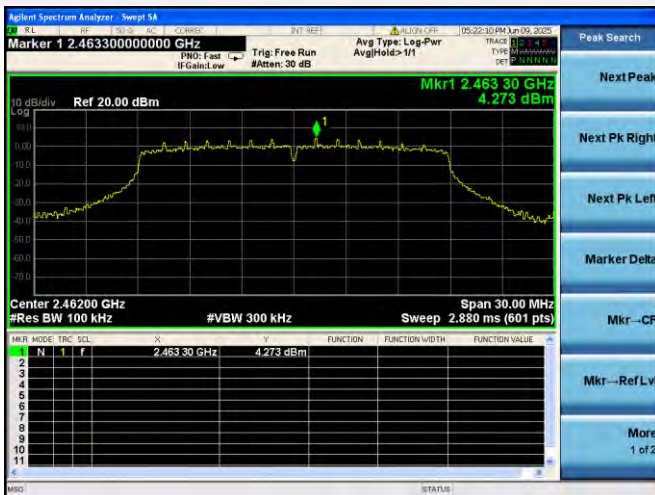




802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

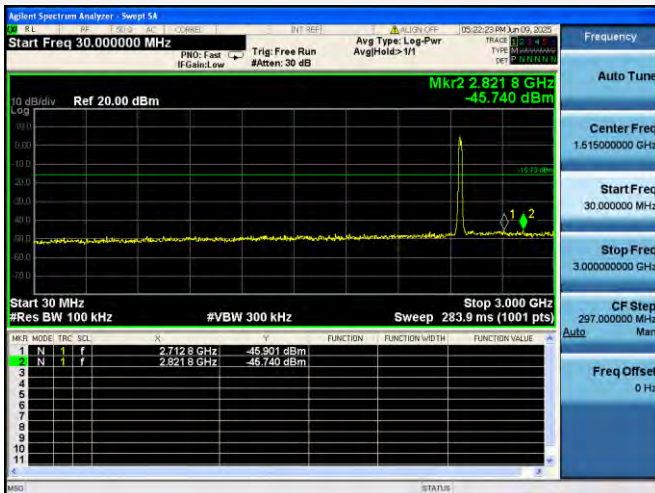


802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

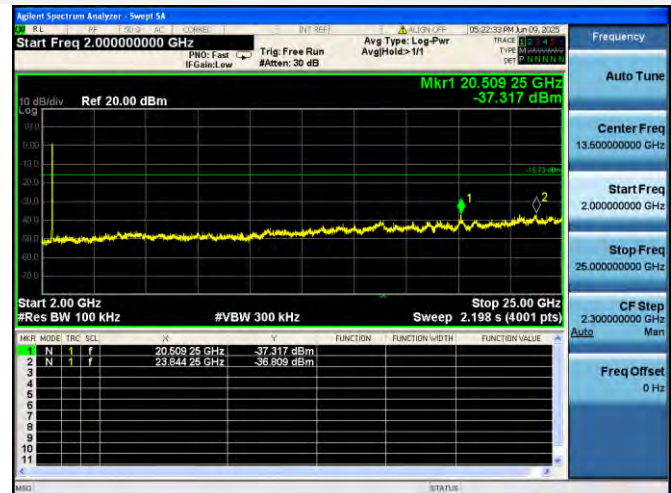


802.11n-40 MHz LOW CHANNEL CARRIER LEVEL

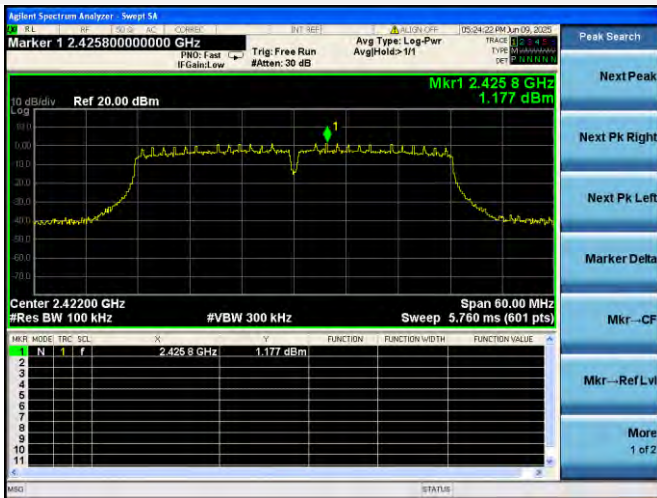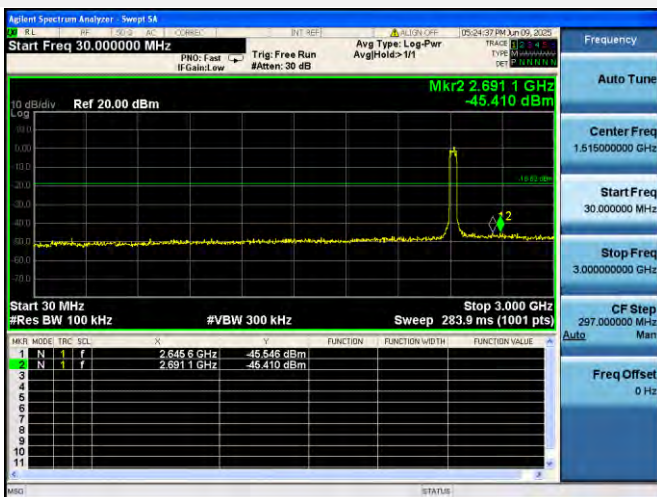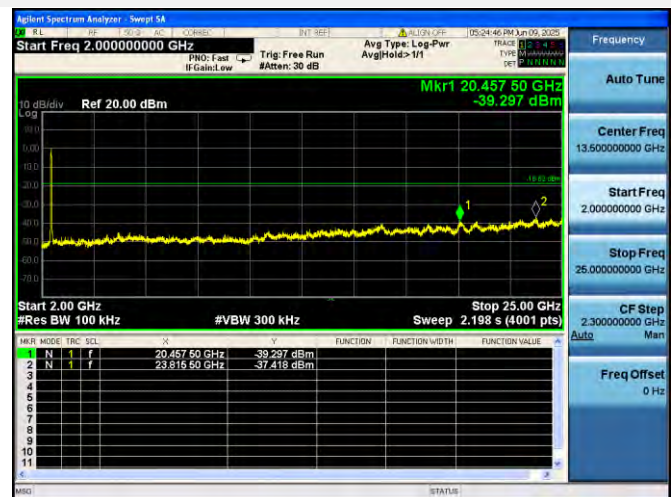802.11n-40 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-40 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-40 MHz MIDDLE CHANNEL CARRIER LEVEL

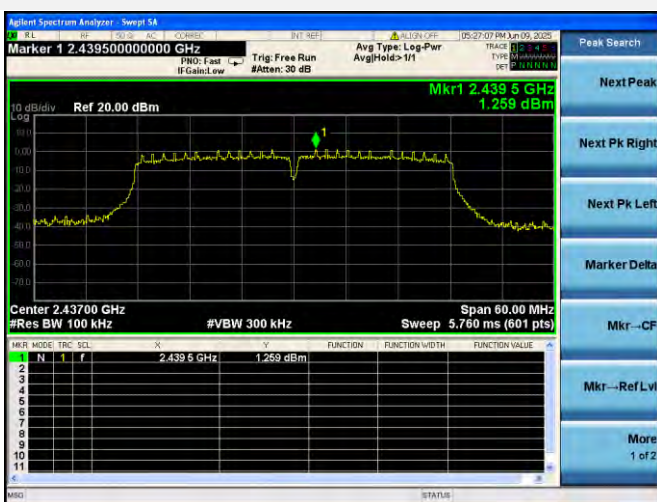


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

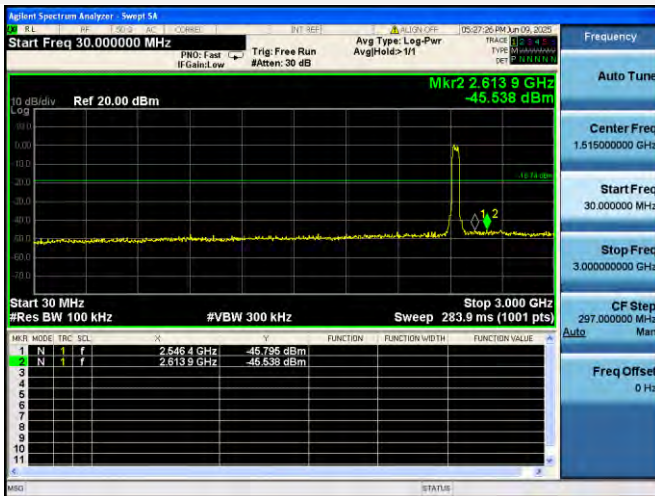


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

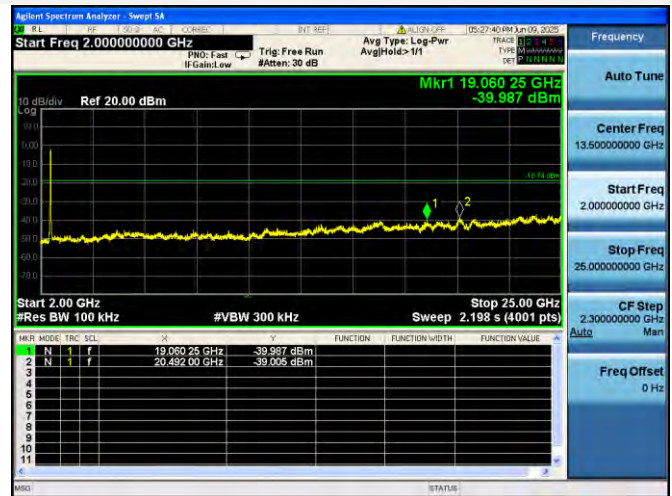


802.11n-40 MHz HIGH CHANNEL CARRIER LEVEL

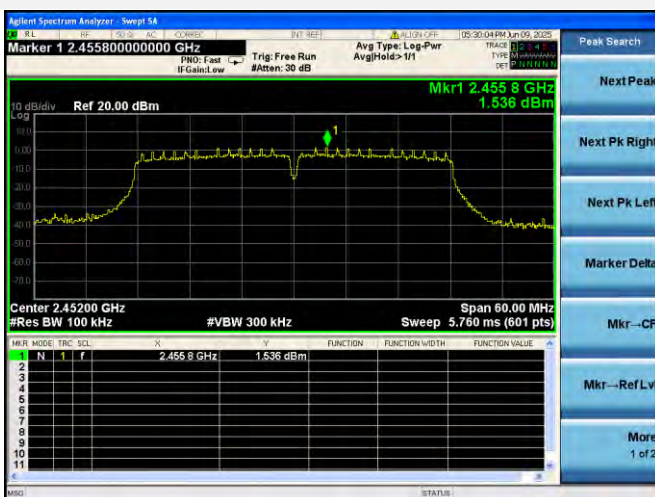

802.11n-40 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

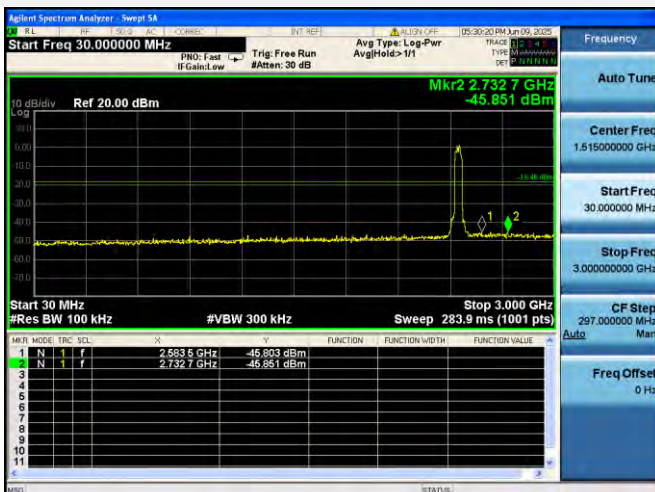

802.11n-40 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

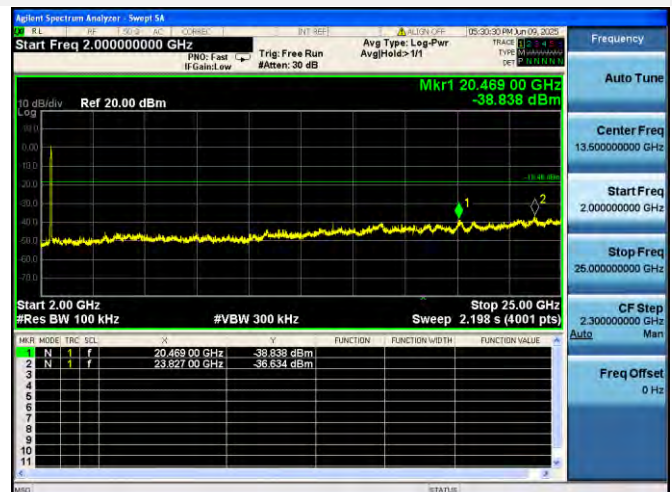

A.4 Band Edge (Authorized-band band-edge)

Note ¹: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Note ²: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.62	5.20	-14.80	Pass
High Channel	-47.82	5.37	-14.63	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.85	3.90	-16.10	Pass
High Channel	-43.67	4.44	-15.56	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.33	4.17	-15.84	Pass
High Channel	-42.51	4.27	-15.73	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-36.25	1.18	-18.82	Pass
High Channel	-38.96	1.54	-18.46	Pass

Test Plots

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

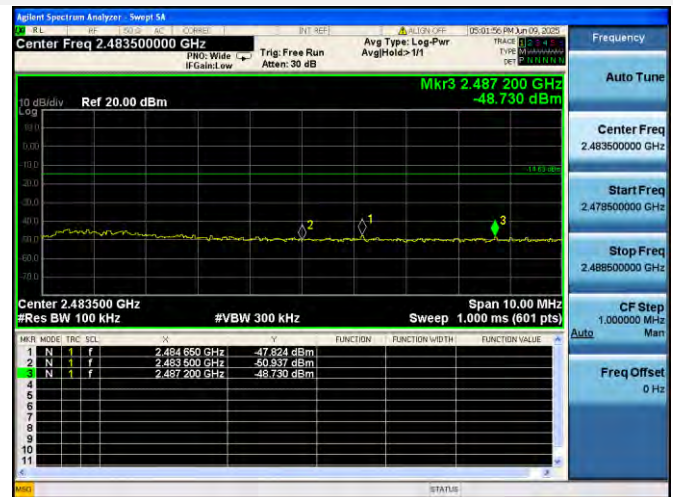

802.11g LOW CHANNEL, CARRIER LEVEL

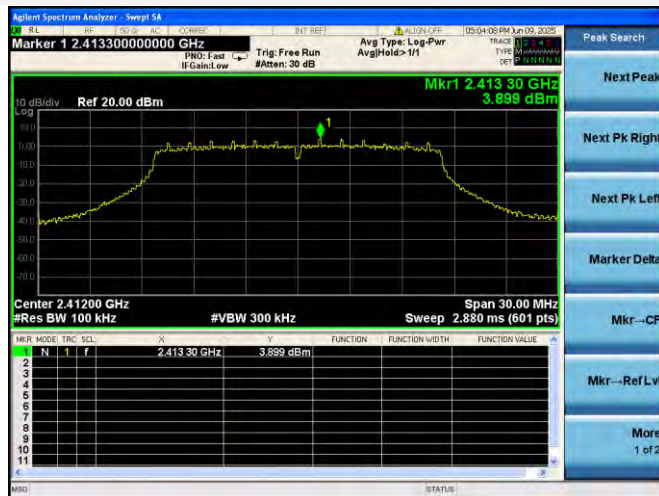


802.11g LOW CHANNEL, BAND EDGE




802.11g HIGH CHANNEL, CARRIER LEVEL



802.11g HIGH CHANNEL, BAND EDGE

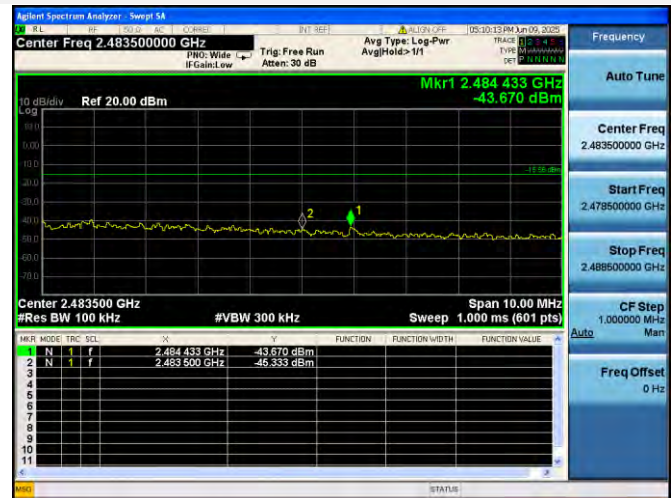


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

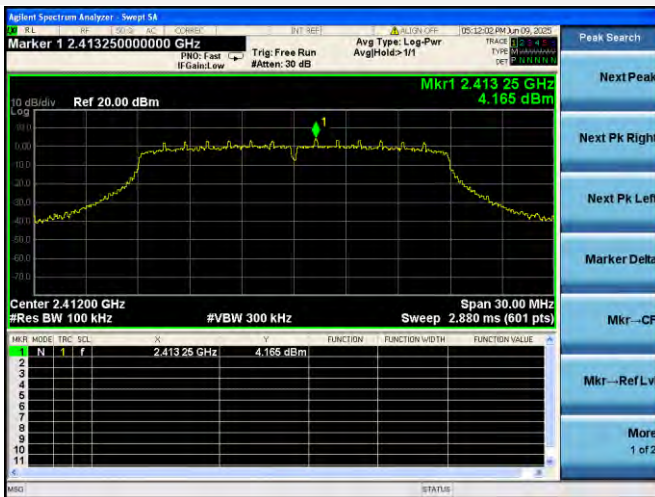


802.11n-20 MHz LOW CHANNEL, BAND EDGE




802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

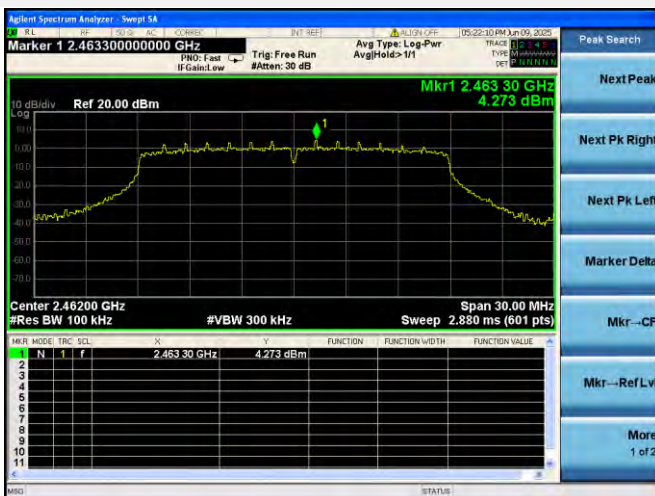

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

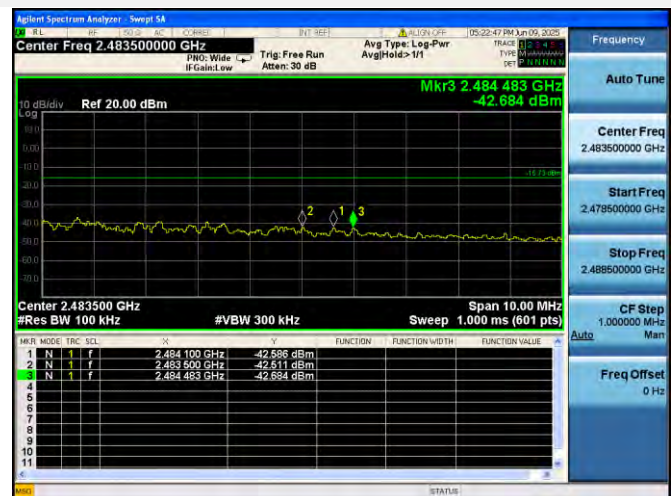


802.11n-40 MHz LOW CHANNEL, CARRIER LEVEL

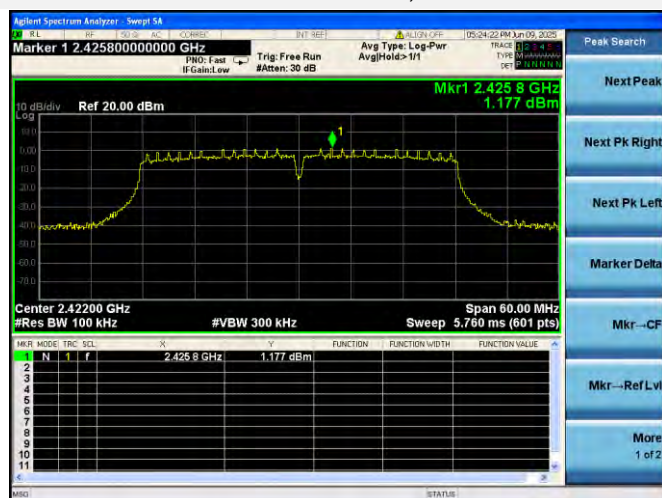


802.11n-40 MHz LOW CHANNEL, BAND EDGE



802.11n-40 MHz HIGH CHANNEL, CARRIER LEVEL

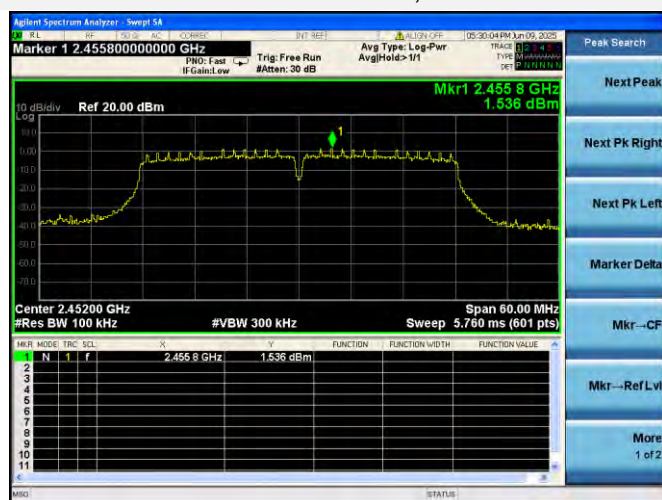

802.11n-40 MHz HIGH CHANNEL, BAND EDGE

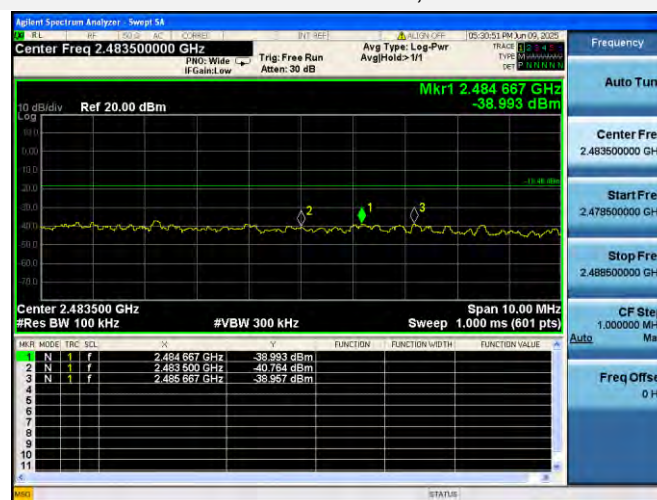

A.5 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

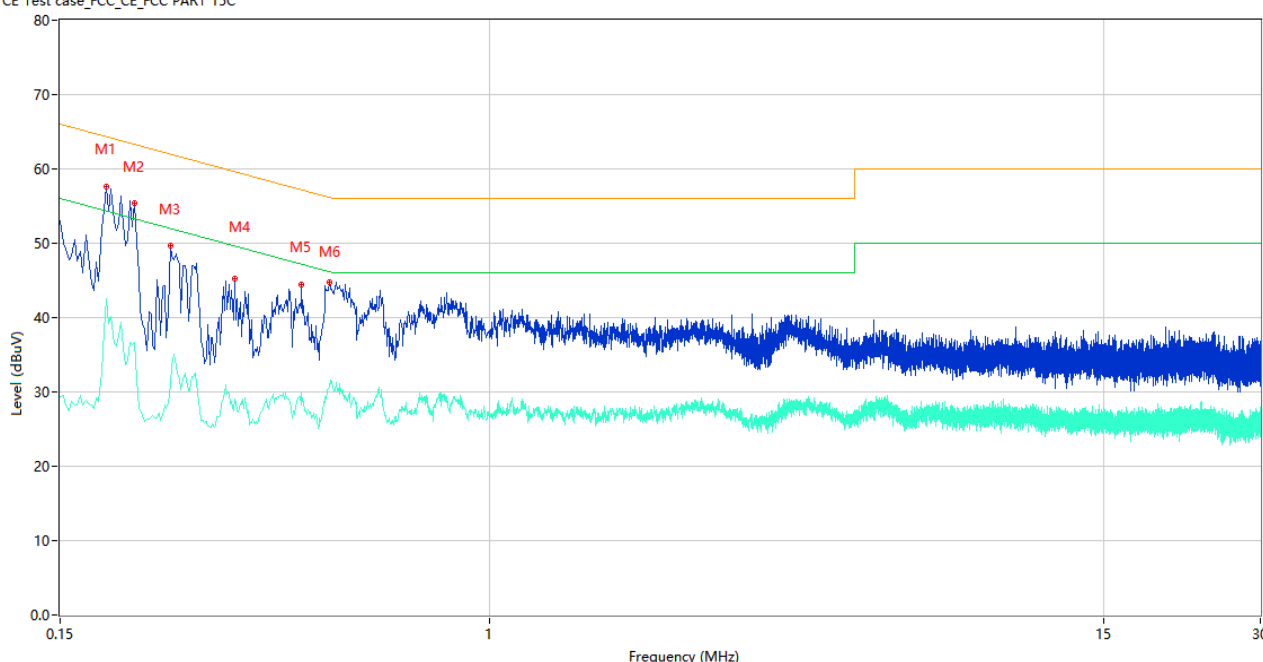

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.184	57.63	9.84	64.30	6.67	Peak	L	Pass
1**	0.184	42.49	9.84	54.30	11.81	AV	L	Pass
2	0.208	55.33	9.84	63.28	7.95	Peak	L	Pass
2**	0.208	36.73	9.84	53.28	16.55	AV	L	Pass
3	0.244	49.65	9.83	61.96	12.31	Peak	L	Pass
3**	0.244	30.95	9.83	51.96	21.01	AV	L	Pass
4	0.324	45.25	10.30	59.60	14.35	Peak	L	Pass
4**	0.324	28.97	10.30	49.60	20.63	AV	L	Pass
5	0.436	44.51	10.23	57.14	12.63	Peak	L	Pass
5**	0.436	29.85	10.23	47.14	17.29	AV	L	Pass
6	0.492	44.75	10.05	56.13	11.38	Peak	L	Pass
6**	0.492	30.69	10.05	46.13	15.44	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

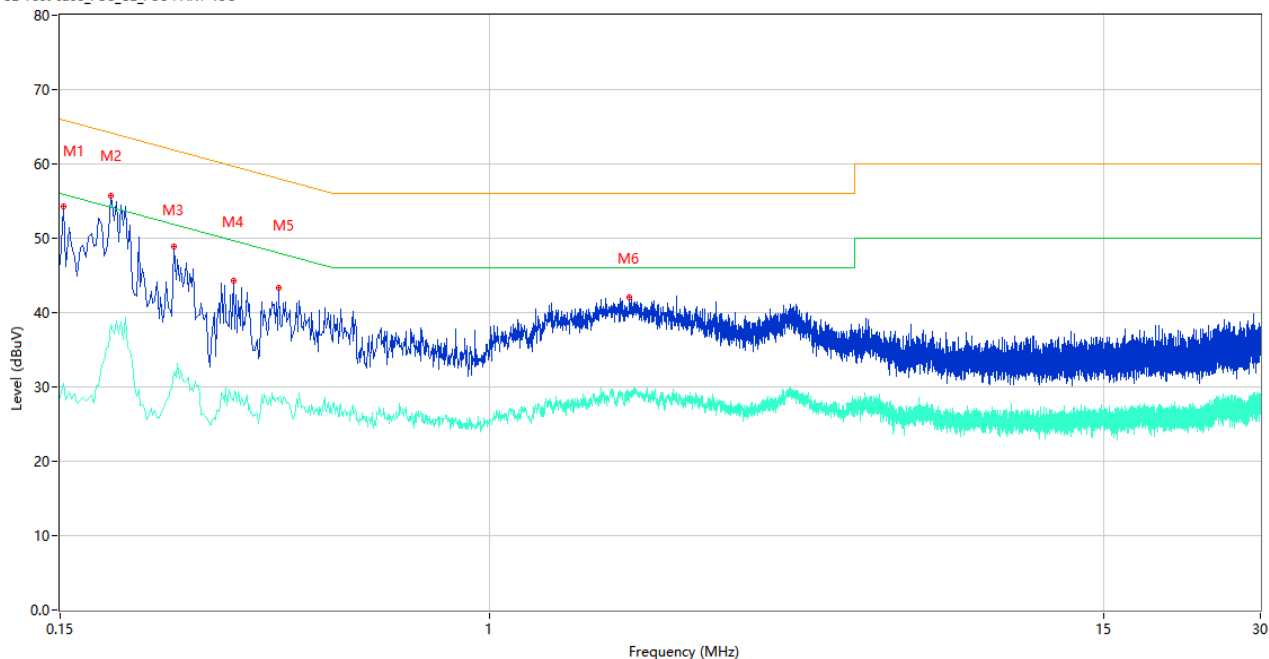

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	54.21	9.86	65.89	11.68	Peak	N	Pass
1**	0.152	30.44	9.86	55.89	25.45	AV	N	Pass
2	0.188	55.70	9.84	64.12	8.42	Peak	N	Pass
2**	0.188	38.46	9.84	54.12	15.66	AV	N	Pass
3	0.248	48.87	9.83	61.82	12.95	Peak	N	Pass
3**	0.248	32.01	9.83	51.82	19.81	AV	N	Pass
4	0.322	44.29	10.26	59.66	15.37	Peak	N	Pass
4**	0.322	28.17	10.26	49.66	21.49	AV	N	Pass
5	0.394	43.38	10.64	57.98	14.60	Peak	N	Pass
5**	0.394	28.14	10.64	47.98	19.84	AV	N	Pass
6	1.852	42.07	10.19	56.00	13.93	Peak	N	Pass
6**	1.852	28.59	10.19	46.00	17.41	AV	N	Pass

A.6 Radiated Emission

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15C 30MHz-1GHz

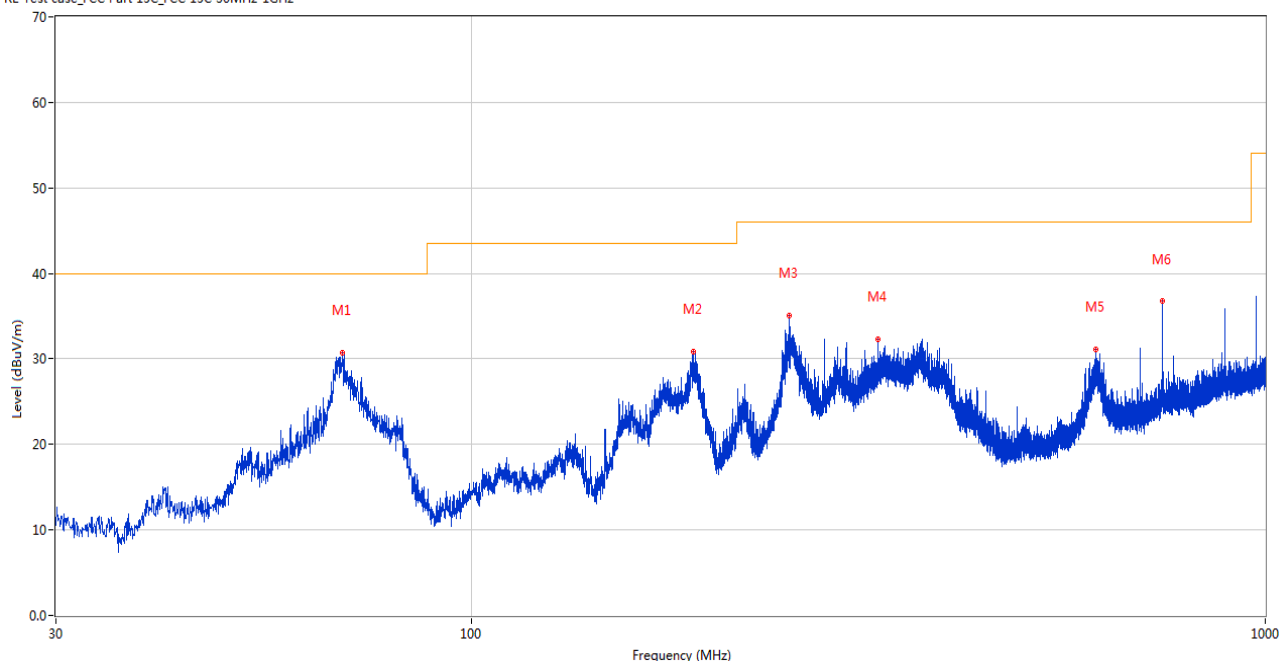

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	68.800	30.68	-29.00	40.0	9.32	Peak	218.40	100	Horizontal	Pass
2	190.535	30.83	-26.53	43.5	12.67	Peak	227.00	100	Horizontal	Pass
3	251.790	35.02	-24.22	46.0	10.98	Peak	149.40	100	Horizontal	Pass
4	325.365	32.27	-22.61	46.0	13.73	Peak	194.50	100	Horizontal	Pass
5	611.273	31.16	-15.16	46.0	14.84	Peak	229.40	100	Horizontal	Pass
6	742.077	36.72	-11.92	46.0	9.28	Peak	357.90	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15C 30MHz-1GHz

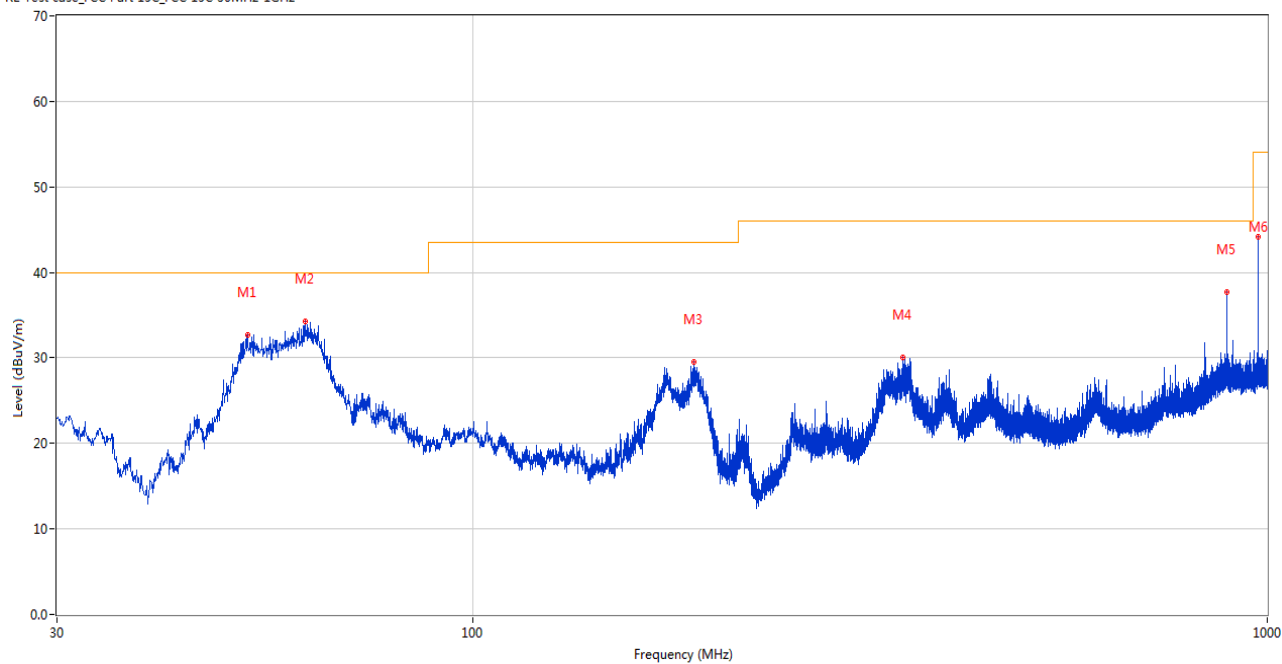

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.068	32.71	-24.77	40.0	7.29	Peak	90.20	100	Vertical	Pass
2	61.622	34.26	-26.40	40.0	5.74	Peak	157.80	100	Vertical	Pass
3	189.759	29.51	-26.56	43.5	13.99	Peak	189.30	100	Vertical	Pass
4	348.112	30.12	-21.12	46.0	15.88	Peak	126.10	100	Vertical	Pass
5	889.857	37.66	-9.31	46.0	8.34	Peak	189.30	100	Vertical	Pass
6	974.683	44.20	-8.01	54.0	9.80	Peak	266.30	100	Vertical	Pass

Note ¹: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note ²: The spurious above 18G is noise only, do not show on the report.

Note ³: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-Antenna 1

Test Data

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1058.198	54.96	74.0	19.05	Peak	245.00	100	Horizontal	Pass
1**	1058.198	50.08	54.0	3.92	AV	245.00	100	Horizontal	Pass
2	2995.889	50.11	74.0	23.89	Peak	348.00	100	Horizontal	Pass
2**	2995.889	41.61	54.0	12.39	AV	348.00	100	Horizontal	Pass
3	3693.868	46.16	74.0	27.84	Peak	11.00	200	Horizontal	Pass
3**	3693.868	40.84	54.0	13.17	AV	11.00	200	Horizontal	Pass
4	4221.342	51.46	74.0	22.54	Peak	139.00	300	Horizontal	Pass
4**	4221.342	49.02	54.0	4.98	AV	139.00	300	Horizontal	Pass
5	5273.800	49.07	74.0	24.93	Peak	305.00	100	Horizontal	Pass
5**	5273.800	44.76	54.0	9.24	AV	305.00	100	Horizontal	Pass
6	11891.087	48.82	74.0	25.18	Peak	355.00	400	Horizontal	Pass
6**	11891.087	38.73	54.0	15.27	AV	355.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1051.648	55.38	74.0	18.62	Peak	217.00	200	Vertical	Pass
1**	1051.648	51.05	54.0	2.95	AV	217.00	200	Vertical	Pass
2	2983.087	50.65	74.0	23.35	Peak	220.00	200	Vertical	Pass
2**	2983.087	41.58	54.0	12.42	AV	220.00	200	Vertical	Pass
3	4218.682	52.63	74.0	21.37	Peak	30.00	200	Vertical	Pass
3**	4218.682	49.16	54.0	4.84	AV	30.00	200	Vertical	Pass
4	4751.221	49.89	74.0	24.11	Peak	295.00	300	Vertical	Pass
4**	4751.221	45.34	54.0	8.66	AV	295.00	300	Vertical	Pass
5	5274.717	48.48	74.0	25.52	Peak	251.00	200	Vertical	Pass
5**	5274.717	44.35	54.0	9.65	AV	251.00	200	Vertical	Pass
6	10550.459	46.87	74.0	27.13	Peak	57.00	200	Vertical	Pass
6**	10550.459	41.76	54.0	12.24	AV	57.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1054.010	54.78	74.0	19.23	Peak	106.00	200	Horizontal	Pass
1**	1054.010	50.26	54.0	3.74	AV	106.00	200	Horizontal	Pass
2	2997.688	50.55	74.0	23.45	Peak	358.00	200	Horizontal	Pass
2**	2997.688	41.31	54.0	12.69	AV	358.00	200	Horizontal	Pass
3	3696.855	46.00	74.0	28.00	Peak	114.00	200	Horizontal	Pass
3**	3696.855	40.97	54.0	13.04	AV	114.00	200	Horizontal	Pass
4	4217.831	51.73	74.0	22.27	Peak	90.00	100	Horizontal	Pass
4**	4217.831	48.87	54.0	5.13	AV	90.00	100	Horizontal	Pass
5	5273.433	49.16	74.0	24.84	Peak	247.00	300	Horizontal	Pass
5**	5273.433	44.55	54.0	9.45	AV	247.00	300	Horizontal	Pass
6	11892.046	48.82	74.0	25.18	Peak	13.00	100	Horizontal	Pass
6**	11892.046	38.23	54.0	15.78	AV	13.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1057.155	54.93	74.0	19.07	Peak	176.00	200	Vertical	Pass
1**	1057.155	51.04	54.0	2.96	AV	176.00	200	Vertical	Pass
2	2985.975	50.29	74.0	23.71	Peak	14.00	100	Vertical	Pass
2**	2985.975	41.85	54.0	12.15	AV	14.00	100	Vertical	Pass
3	4219.824	52.56	74.0	21.44	Peak	315.00	200	Vertical	Pass
3**	4219.824	49.68	54.0	4.32	AV	315.00	200	Vertical	Pass
4	4744.289	50.00	74.0	24.00	Peak	300.00	100	Vertical	Pass
4**	4744.289	45.23	54.0	8.77	AV	300.00	100	Vertical	Pass
5	5275.663	48.62	74.0	25.38	Peak	34.00	100	Vertical	Pass
5**	5275.663	44.13	54.0	9.87	AV	34.00	100	Vertical	Pass
6	10546.798	47.25	74.0	26.75	Peak	340.00	300	Vertical	Pass
6**	10546.798	41.84	54.0	12.16	AV	340.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.412	54.45	74.0	19.55	Peak	25.00	300	Horizontal	Pass
1**	1053.412	50.60	54.0	3.41	AV	25.00	300	Horizontal	Pass
2	2993.882	50.38	74.0	23.62	Peak	289.00	100	Horizontal	Pass
2**	2993.882	41.63	54.0	12.37	AV	289.00	100	Horizontal	Pass
3	3695.620	46.10	74.0	27.90	Peak	64.00	200	Horizontal	Pass
3**	3695.620	41.30	54.0	12.70	AV	64.00	200	Horizontal	Pass
4	4220.076	51.46	74.0	22.54	Peak	72.00	100	Horizontal	Pass
4**	4220.076	48.73	54.0	5.28	AV	72.00	100	Horizontal	Pass
5	5271.477	49.33	74.0	24.67	Peak	106.00	300	Horizontal	Pass
5**	5271.477	44.50	54.0	9.50	AV	106.00	300	Horizontal	Pass
6	11892.031	48.57	74.0	25.43	Peak	30.00	200	Horizontal	Pass
6**	11892.031	38.31	54.0	15.69	AV	30.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1052.407	55.11	74.0	18.89	Peak	72.00	400	Vertical	Pass
1**	1052.407	51.09	54.0	2.91	AV	72.00	400	Vertical	Pass
2	2980.433	50.18	74.0	23.82	Peak	41.00	400	Vertical	Pass
2**	2980.433	41.73	54.0	12.27	AV	41.00	400	Vertical	Pass
3	4219.221	52.64	74.0	21.36	Peak	305.00	200	Vertical	Pass
3**	4219.221	49.29	54.0	4.71	AV	305.00	200	Vertical	Pass
4	4745.678	49.90	74.0	24.10	Peak	348.00	300	Vertical	Pass
4**	4745.678	45.43	54.0	8.57	AV	348.00	300	Vertical	Pass
5	5277.659	48.33	74.0	25.67	Peak	28.00	300	Vertical	Pass
5**	5277.659	44.13	54.0	9.87	AV	28.00	300	Vertical	Pass
6	10546.656	46.83	74.0	27.17	Peak	34.00	300	Vertical	Pass
6**	10546.656	42.15	54.0	11.85	AV	34.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1052.599	54.74	74.0	19.26	Peak	357.00	200	Horizontal	Pass
1**	1052.599	50.08	54.0	3.92	AV	357.00	200	Horizontal	Pass
2	2998.677	50.14	74.0	23.86	Peak	90.00	100	Horizontal	Pass
2**	2998.677	41.54	54.0	12.46	AV	90.00	100	Horizontal	Pass
3	3696.102	46.30	74.0	27.70	Peak	172.00	200	Horizontal	Pass
3**	3696.102	40.77	54.0	13.23	AV	172.00	200	Horizontal	Pass
4	4219.099	51.38	74.0	22.62	Peak	230.00	200	Horizontal	Pass
4**	4219.099	48.81	54.0	5.19	AV	230.00	200	Horizontal	Pass
5	5278.195	48.86	74.0	25.14	Peak	113.00	300	Horizontal	Pass
5**	5278.195	44.78	54.0	9.22	AV	113.00	300	Horizontal	Pass
6	11897.538	48.59	74.0	25.41	Peak	269.00	200	Horizontal	Pass
6**	11897.538	38.60	54.0	15.40	AV	269.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1052.490	54.96	74.0	19.04	Peak	273.00	400	Vertical	Pass
1**	1052.490	51.05	54.0	2.95	AV	273.00	400	Vertical	Pass
2	2980.537	50.64	74.0	23.36	Peak	156.00	300	Vertical	Pass
2**	2980.537	41.82	54.0	12.19	AV	156.00	300	Vertical	Pass
3	4222.486	52.67	74.0	21.33	Peak	132.00	200	Vertical	Pass
3**	4222.486	49.47	54.0	4.53	AV	132.00	200	Vertical	Pass
4	4745.671	50.10	74.0	23.90	Peak	123.00	100	Vertical	Pass
4**	4745.671	45.16	54.0	8.84	AV	123.00	100	Vertical	Pass
5	5274.429	48.64	74.0	25.36	Peak	164.00	300	Vertical	Pass
5**	5274.429	43.88	54.0	10.12	AV	164.00	300	Vertical	Pass
6	10553.357	46.85	74.0	27.15	Peak	91.00	200	Vertical	Pass
6**	10553.357	42.09	54.0	11.91	AV	91.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1058.719	54.68	74.0	19.32	Peak	273.00	100	Horizontal	Pass
1**	1058.719	50.14	54.0	3.86	AV	273.00	100	Horizontal	Pass
2	2996.357	50.03	74.0	23.97	Peak	111.00	400	Horizontal	Pass
2**	2996.357	41.65	54.0	12.35	AV	111.00	400	Horizontal	Pass
3	3693.477	46.39	74.0	27.61	Peak	218.00	200	Horizontal	Pass
3**	3693.477	40.83	54.0	13.17	AV	218.00	200	Horizontal	Pass
4	4220.752	51.25	74.0	22.75	Peak	225.00	300	Horizontal	Pass
4**	4220.752	49.06	54.0	4.94	AV	225.00	300	Horizontal	Pass
5	5275.345	49.20	74.0	24.80	Peak	348.00	200	Horizontal	Pass
5**	5275.345	44.39	54.0	9.61	AV	348.00	200	Horizontal	Pass
6	11893.301	48.70	74.0	25.30	Peak	121.00	100	Horizontal	Pass
6**	11893.301	38.54	54.0	15.46	AV	121.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.686	55.04	74.0	18.96	Peak	143.00	100	Vertical	Pass
1**	1053.686	51.35	54.0	2.65	AV	143.00	100	Vertical	Pass
2	2978.195	50.46	74.0	23.54	Peak	342.00	100	Vertical	Pass
2**	2978.195	42.04	54.0	11.96	AV	342.00	100	Vertical	Pass
3	4220.395	52.98	74.0	21.02	Peak	136.00	200	Vertical	Pass
3**	4220.395	49.43	54.0	4.57	AV	136.00	200	Vertical	Pass
4	4745.389	50.17	74.0	23.83	Peak	62.00	100	Vertical	Pass
4**	4745.389	45.52	54.0	8.48	AV	62.00	100	Vertical	Pass
5	5272.094	48.28	74.0	25.72	Peak	101.00	400	Vertical	Pass
5**	5272.094	44.08	54.0	9.92	AV	101.00	400	Vertical	Pass
6	10550.230	46.70	74.0	27.30	Peak	249.00	200	Vertical	Pass
6**	10550.230	41.73	54.0	12.27	AV	249.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1056.447	54.60	74.0	19.41	Peak	54.00	300	Horizontal	Pass
1**	1056.447	50.36	54.0	3.64	AV	54.00	300	Horizontal	Pass
2	2994.883	50.39	74.0	23.61	Peak	151.00	400	Horizontal	Pass
2**	2994.883	41.13	54.0	12.87	AV	151.00	400	Horizontal	Pass
3	3691.731	45.97	74.0	28.03	Peak	338.00	200	Horizontal	Pass
3**	3691.731	41.09	54.0	12.91	AV	338.00	200	Horizontal	Pass
4	4216.550	51.50	74.0	22.50	Peak	268.00	100	Horizontal	Pass
4**	4216.550	49.03	54.0	4.97	AV	268.00	100	Horizontal	Pass
5	5271.995	48.85	74.0	25.15	Peak	69.00	300	Horizontal	Pass
5**	5271.995	44.74	54.0	9.26	AV	69.00	300	Horizontal	Pass
6	11894.518	48.87	74.0	25.13	Peak	356.00	100	Horizontal	Pass
6**	11894.518	38.79	54.0	15.21	AV	356.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1056.348	55.39	74.0	18.61	Peak	74.00	100	Vertical	Pass
1**	1056.348	51.32	54.0	2.68	AV	74.00	100	Vertical	Pass
2	2983.642	50.44	74.0	23.56	Peak	179.00	300	Vertical	Pass
2**	2983.642	41.52	54.0	12.48	AV	179.00	300	Vertical	Pass
3	4220.554	53.01	74.0	20.99	Peak	76.00	200	Vertical	Pass
3**	4220.554	49.22	54.0	4.78	AV	76.00	200	Vertical	Pass
4	4748.910	50.03	74.0	23.97	Peak	65.00	400	Vertical	Pass
4**	4748.910	45.16	54.0	8.84	AV	65.00	400	Vertical	Pass
5	5272.605	48.38	74.0	25.62	Peak	345.00	400	Vertical	Pass
5**	5272.605	44.29	54.0	9.71	AV	345.00	400	Vertical	Pass
6	10547.634	47.15	74.0	26.85	Peak	270.00	200	Vertical	Pass
6**	10547.634	41.89	54.0	12.11	AV	270.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1054.843	54.67	74.0	19.33	Peak	207.00	300	Horizontal	Pass
1**	1054.843	50.52	54.0	3.48	AV	207.00	300	Horizontal	Pass
2	2996.391	50.22	74.0	23.78	Peak	334.00	100	Horizontal	Pass
2**	2996.391	41.54	54.0	12.46	AV	334.00	100	Horizontal	Pass
3	3690.618	45.94	74.0	28.06	Peak	111.00	200	Horizontal	Pass
3**	3690.618	41.35	54.0	12.65	AV	111.00	200	Horizontal	Pass
4	4221.451	51.49	74.0	22.51	Peak	181.00	100	Horizontal	Pass
4**	4221.451	49.03	54.0	4.97	AV	181.00	100	Horizontal	Pass
5	5278.348	48.86	74.0	25.14	Peak	154.00	200	Horizontal	Pass
5**	5278.348	44.57	54.0	9.43	AV	154.00	200	Horizontal	Pass
6	11897.466	48.87	74.0	25.13	Peak	178.00	300	Horizontal	Pass
6**	11897.466	38.74	54.0	15.26	AV	178.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1051.957	55.47	74.0	18.53	Peak	73.00	200	Vertical	Pass
1**	1051.957	50.90	54.0	3.10	AV	73.00	200	Vertical	Pass
2	2982.688	50.15	74.0	23.85	Peak	243.00	200	Vertical	Pass
2**	2982.688	41.79	54.0	12.21	AV	243.00	200	Vertical	Pass
3	4220.130	53.04	74.0	20.96	Peak	230.00	200	Vertical	Pass
3**	4220.130	49.63	54.0	4.37	AV	230.00	200	Vertical	Pass
4	4748.814	49.84	74.0	24.16	Peak	149.00	300	Vertical	Pass
4**	4748.814	45.41	54.0	8.59	AV	149.00	300	Vertical	Pass
5	5274.464	48.70	74.0	25.31	Peak	166.00	200	Vertical	Pass
5**	5274.464	44.01	54.0	9.99	AV	166.00	200	Vertical	Pass
6	10547.919	46.66	74.0	27.34	Peak	33.00	300	Vertical	Pass
6**	10547.919	41.72	54.0	12.29	AV	33.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1051.894	54.93	74.0	19.07	Peak	73.00	200	Horizontal	Pass
1**	1051.894	50.11	54.0	3.89	AV	73.00	200	Horizontal	Pass
2	2997.270	50.14	74.0	23.86	Peak	301.00	100	Horizontal	Pass
2**	2997.270	41.42	54.0	12.58	AV	301.00	100	Horizontal	Pass
3	3695.842	46.38	74.0	27.62	Peak	227.00	200	Horizontal	Pass
3**	3695.842	40.89	54.0	13.11	AV	227.00	200	Horizontal	Pass
4	4222.513	51.35	74.0	22.65	Peak	82.00	300	Horizontal	Pass
4**	4222.513	48.98	54.0	5.02	AV	82.00	300	Horizontal	Pass
5	5277.469	49.13	74.0	24.87	Peak	184.00	400	Horizontal	Pass
5**	5277.469	44.77	54.0	9.23	AV	184.00	400	Horizontal	Pass
6	11896.706	48.76	74.0	25.24	Peak	281.00	100	Horizontal	Pass
6**	11896.706	38.59	54.0	15.42	AV	281.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1056.644	55.47	74.0	18.53	Peak	92.00	300	Vertical	Pass
1**	1056.644	50.86	54.0	3.14	AV	92.00	300	Vertical	Pass
2	2979.127	50.18	74.0	23.83	Peak	211.00	300	Vertical	Pass
2**	2979.127	41.93	54.0	12.07	AV	211.00	300	Vertical	Pass
3	4220.551	52.83	74.0	21.17	Peak	4.00	200	Vertical	Pass
3**	4220.551	49.68	54.0	4.32	AV	4.00	200	Vertical	Pass
4	4746.746	50.09	74.0	23.91	Peak	351.00	400	Vertical	Pass
4**	4746.746	45.41	54.0	8.59	AV	351.00	400	Vertical	Pass
5	5276.926	48.48	74.0	25.52	Peak	198.00	300	Vertical	Pass
5**	5276.926	44.42	54.0	9.58	AV	198.00	300	Vertical	Pass
6	10552.236	46.88	74.0	27.12	Peak	175.00	200	Vertical	Pass
6**	10552.236	41.71	54.0	12.29	AV	175.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1054.440	54.48	74.0	19.52	Peak	122.00	400	Horizontal	Pass
1**	1054.440	50.21	54.0	3.79	AV	122.00	400	Horizontal	Pass
2	2996.551	50.33	74.0	23.67	Peak	181.00	100	Horizontal	Pass
2**	2996.551	41.22	54.0	12.78	AV	181.00	100	Horizontal	Pass
3	3691.458	45.99	74.0	28.01	Peak	95.00	200	Horizontal	Pass
3**	3691.458	41.19	54.0	12.81	AV	95.00	200	Horizontal	Pass
4	4217.631	51.56	74.0	22.44	Peak	61.00	200	Horizontal	Pass
4**	4217.631	49.05	54.0	4.95	AV	61.00	200	Horizontal	Pass
5	5278.475	48.94	74.0	25.06	Peak	196.00	100	Horizontal	Pass
5**	5278.475	44.64	54.0	9.36	AV	196.00	100	Horizontal	Pass
6	11891.418	48.52	74.0	25.48	Peak	225.00	200	Horizontal	Pass
6**	11891.418	38.70	54.0	15.31	AV	225.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.730	55.14	74.0	18.86	Peak	178.00	300	Vertical	Pass
1**	1053.730	50.95	54.0	3.05	AV	178.00	300	Vertical	Pass
2	2978.137	50.31	74.0	23.69	Peak	123.00	100	Vertical	Pass
2**	2978.137	41.91	54.0	12.09	AV	123.00	100	Vertical	Pass
3	4216.222	52.57	74.0	21.43	Peak	85.00	200	Vertical	Pass
3**	4216.222	49.55	54.0	4.45	AV	85.00	200	Vertical	Pass
4	4748.554	49.68	74.0	24.32	Peak	324.00	200	Vertical	Pass
4**	4748.554	45.47	54.0	8.53	AV	324.00	200	Vertical	Pass
5	5273.419	48.63	74.0	25.37	Peak	159.00	400	Vertical	Pass
5**	5273.419	43.89	54.0	10.11	AV	159.00	400	Vertical	Pass
6	10549.737	47.03	74.0	26.97	Peak	334.00	200	Vertical	Pass
6**	10549.737	42.27	54.0	11.73	AV	334.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1055.661	54.76	74.0	19.24	Peak	86.00	300	Horizontal	Pass
1**	1055.661	50.49	54.0	3.51	AV	86.00	300	Horizontal	Pass
2	2997.131	50.21	74.0	23.79	Peak	216.00	400	Horizontal	Pass
2**	2997.131	41.20	54.0	12.80	AV	216.00	400	Horizontal	Pass
3	3692.257	45.86	74.0	28.14	Peak	259.00	200	Horizontal	Pass
3**	3692.257	40.96	54.0	13.04	AV	259.00	200	Horizontal	Pass
4	4222.703	51.54	74.0	22.46	Peak	287.00	400	Horizontal	Pass
4**	4222.703	48.95	54.0	5.05	AV	287.00	400	Horizontal	Pass
5	5271.835	48.78	74.0	25.22	Peak	304.00	400	Horizontal	Pass
5**	5271.835	44.39	54.0	9.61	AV	304.00	400	Horizontal	Pass
6	11896.653	48.31	74.0	25.69	Peak	239.00	300	Horizontal	Pass
6**	11896.653	38.71	54.0	15.29	AV	239.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1057.819	55.25	74.0	18.75	Peak	359.00	400	Vertical	Pass
1**	1057.819	51.22	54.0	2.78	AV	359.00	400	Vertical	Pass
2	2985.007	50.44	74.0	23.56	Peak	280.00	200	Vertical	Pass
2**	2985.007	41.97	54.0	12.03	AV	280.00	200	Vertical	Pass
3	4219.075	52.96	74.0	21.04	Peak	345.00	200	Vertical	Pass
3**	4219.075	49.22	54.0	4.78	AV	345.00	200	Vertical	Pass
4	4748.747	49.82	74.0	24.18	Peak	15.00	300	Vertical	Pass
4**	4748.747	45.58	54.0	8.42	AV	15.00	300	Vertical	Pass
5	5277.780	48.55	74.0	25.46	Peak	111.00	100	Vertical	Pass
5**	5277.780	43.93	54.0	10.07	AV	111.00	100	Vertical	Pass
6	10549.052	46.99	74.0	27.01	Peak	7.00	300	Vertical	Pass
6**	10549.052	42.13	54.0	11.88	AV	7.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1054.375	54.87	74.0	19.13	Peak	319.00	100	Horizontal	Pass
1**	1054.375	50.13	54.0	3.87	AV	319.00	100	Horizontal	Pass
2	2994.502	50.12	74.0	23.88	Peak	28.00	100	Horizontal	Pass
2**	2994.502	41.67	54.0	12.33	AV	28.00	100	Horizontal	Pass
3	3693.309	45.98	74.0	28.02	Peak	242.00	200	Horizontal	Pass
3**	3693.309	41.11	54.0	12.89	AV	242.00	200	Horizontal	Pass
4	4216.410	51.52	74.0	22.48	Peak	130.00	400	Horizontal	Pass
4**	4216.410	48.96	54.0	5.04	AV	130.00	400	Horizontal	Pass
5	5275.938	49.34	74.0	24.66	Peak	21.00	200	Horizontal	Pass
5**	5275.938	44.55	54.0	9.45	AV	21.00	200	Horizontal	Pass
6	11897.018	48.37	74.0	25.63	Peak	282.00	400	Horizontal	Pass
6**	11897.018	38.77	54.0	15.23	AV	282.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1055.771	55.28	74.0	18.72	Peak	188.00	100	Vertical	Pass
1**	1055.771	50.93	54.0	3.07	AV	188.00	100	Vertical	Pass
2	2979.582	50.35	74.0	23.65	Peak	340.00	200	Vertical	Pass
2**	2979.582	41.83	54.0	12.17	AV	340.00	200	Vertical	Pass
3	4216.975	52.97	74.0	21.03	Peak	270.00	200	Vertical	Pass
3**	4216.975	49.61	54.0	4.39	AV	270.00	200	Vertical	Pass
4	4743.770	49.92	74.0	24.08	Peak	53.00	200	Vertical	Pass
4**	4743.770	45.61	54.0	8.39	AV	53.00	200	Vertical	Pass
5	5274.139	48.25	74.0	25.75	Peak	281.00	300	Vertical	Pass
5**	5274.139	44.43	54.0	9.57	AV	281.00	300	Vertical	Pass
6	10548.923	47.08	74.0	26.92	Peak	92.00	400	Vertical	Pass
6**	10548.923	41.70	54.0	12.30	AV	92.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1055.237	54.56	74.0	19.44	Peak	166.00	400	Horizontal	Pass
1**	1055.237	50.47	54.0	3.53	AV	166.00	400	Horizontal	Pass
2	2997.983	50.08	74.0	23.92	Peak	166.00	200	Horizontal	Pass
2**	2997.983	41.42	54.0	12.58	AV	166.00	200	Horizontal	Pass
3	3694.834	46.01	74.0	27.99	Peak	170.00	200	Horizontal	Pass
3**	3694.834	41.07	54.0	12.93	AV	170.00	200	Horizontal	Pass
4	4222.308	51.61	74.0	22.39	Peak	133.00	400	Horizontal	Pass
4**	4222.308	48.83	54.0	5.17	AV	133.00	400	Horizontal	Pass
5	5274.609	48.93	74.0	25.07	Peak	35.00	200	Horizontal	Pass
5**	5274.609	44.56	54.0	9.44	AV	35.00	200	Horizontal	Pass
6	11892.660	48.30	74.0	25.70	Peak	91.00	400	Horizontal	Pass
6**	11892.660	38.30	54.0	15.70	AV	91.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1056.510	54.96	74.0	19.04	Peak	5.00	200	Vertical	Pass
1**	1056.510	50.83	54.0	3.18	AV	5.00	200	Vertical	Pass
2	2982.801	50.31	74.0	23.69	Peak	299.00	400	Vertical	Pass
2**	2982.801	41.72	54.0	12.28	AV	299.00	400	Vertical	Pass
3	4221.045	52.66	74.0	21.34	Peak	162.00	200	Vertical	Pass
3**	4221.045	49.16	54.0	4.84	AV	162.00	200	Vertical	Pass
4	4747.730	49.83	74.0	24.17	Peak	70.00	400	Vertical	Pass
4**	4747.730	45.58	54.0	8.42	AV	70.00	400	Vertical	Pass
5	5275.191	48.42	74.0	25.58	Peak	121.00	400	Vertical	Pass
5**	5275.191	44.13	54.0	9.87	AV	121.00	400	Vertical	Pass
6	10551.811	46.87	74.0	27.13	Peak	217.00	400	Vertical	Pass
6**	10551.811	41.71	54.0	12.30	AV	217.00	400	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-Antenna 1

Test Data

802.11b LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2331.833	56.85	74.0	17.15	Peak	83.00	100	Horizontal	Pass
1**	2331.833	44.93	54.0	9.07	AV	83.00	100	Horizontal	Pass
2	2389.833	54.88	74.0	19.12	Peak	64.00	100	Horizontal	Pass
2**	2389.833	43.92	54.0	10.08	AV	64.00	100	Horizontal	Pass

802.11b HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.04	74.0	19.96	Peak	360.00	150	Horizontal	Pass
1**	2483.500	44.13	54.0	9.87	AV	360.00	150	Horizontal	Pass
2	2484.700	55.38	74.0	18.62	Peak	102.00	200	Horizontal	Pass
2**	2484.700	44.55	54.0	9.45	AV	102.00	200	Horizontal	Pass

802.11g LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2385.667	60.86	74.0	13.14	Peak	82.00	200	Horizontal	Pass
1**	2385.667	46.17	54.0	7.83	AV	82.00	200	Horizontal	Pass
2	2389.833	59.11	74.0	14.89	Peak	82.00	100	Horizontal	Pass
2**	2389.833	47.41	54.0	6.59	AV	82.00	100	Horizontal	Pass

802.11g HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	63.77	74.0	10.23	Peak	92.00	200	Horizontal	Pass
1**	2483.500	48.08	54.0	5.92	AV	92.00	200	Horizontal	Pass
2	2483.750	65.44	74.0	8.56	Peak	92.00	150	Horizontal	Pass
2**	2483.750	47.31	54.0	6.69	AV	92.00	150	Horizontal	Pass

802.11n20 LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2388.333	61.76	74.0	12.24	Peak	92.00	100	Horizontal	Pass
1**	2388.333	47.23	54.0	6.77	AV	92.00	100	Horizontal	Pass
2	2389.833	60.41	74.0	13.59	Peak	286.00	150	Horizontal	Pass
2**	2389.833	48.02	54.0	5.98	AV	286.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	68.93	74.0	5.07	Peak	99.00	200	Horizontal	Pass
1**	2483.500	47.81	54.0	6.19	AV	99.00	200	Horizontal	Pass
2	2483.900	67.30	74.0	6.70	Peak	95.00	150	Horizontal	Pass
2**	2483.900	48.24	54.0	5.76	AV	95.00	150	Horizontal	Pass

802.11n40 LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2387.333	65.44	74.0	8.56	Peak	92.00	100	Horizontal	Pass
1**	2387.333	49.07	54.0	4.93	AV	92.00	100	Horizontal	Pass
2	2389.833	62.93	74.0	11.07	Peak	90.00	100	Horizontal	Pass
2**	2389.833	49.42	54.0	4.58	AV	90.00	100	Horizontal	Pass
3	2388.000	63.12	74.0	10.88	Peak	87.00	150	Horizontal	Pass
3**	2388.000	49.79	54.0	4.21	AV	87.00	150	Horizontal	Pass

802.11n40 HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	65.15	74.0	8.85	Peak	90.00	200	Horizontal	Pass
1**	2483.550	49.78	54.0	4.22	AV	90.00	200	Horizontal	Pass
2	2484.950	67.24	74.0	6.76	Peak	93.00	100	Horizontal	Pass
2**	2484.950	48.69	54.0	5.31	AV	93.00	100	Horizontal	Pass
3	2484.550	64.28	74.0	9.72	Peak	64.00	150	Horizontal	Pass
3**	2484.550	50.17	54.0	3.83	AV	64.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Note: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.01	8
Middle	-9.90	8
High	-8.13	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.16	8
Middle	-11.62	8
High	-10.73	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-11.37	8
Middle	-11.62	8
High	-11.05	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-13.02	8
Middle	-14.10	8
High	-12.21	8

Test Plots

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

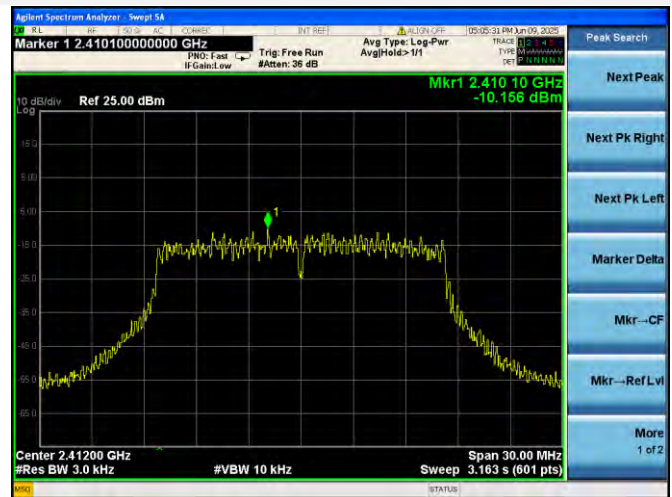


802.11g MIDDLE CHANNEL

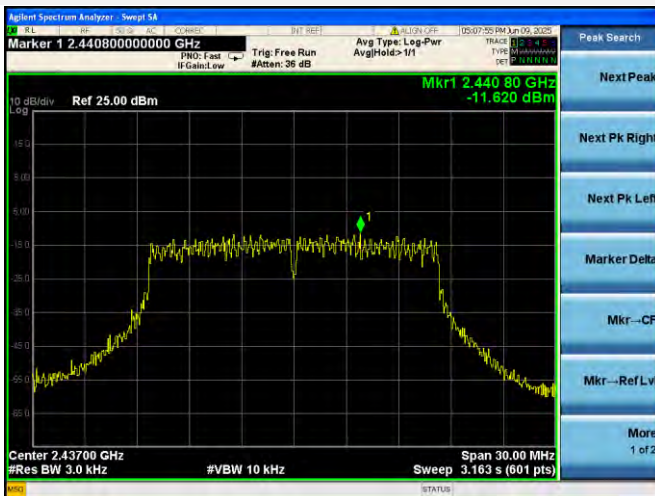


802.11g HIGH CHANNEL

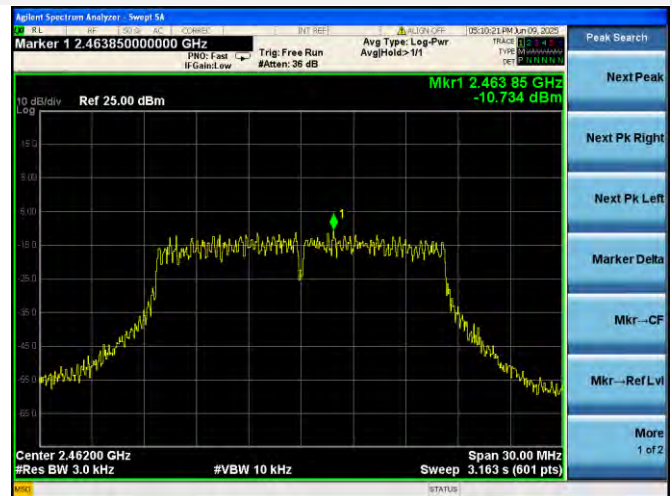


802.11n-20 MHz LOW CHANNEL

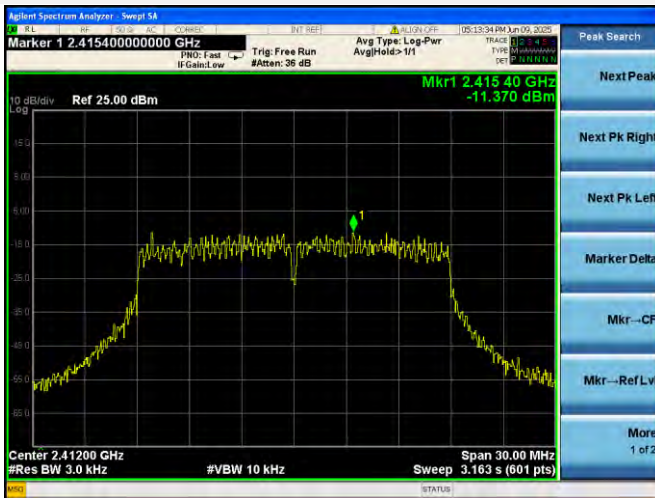

802.11n-20 MHz MIDDLE CHANNEL

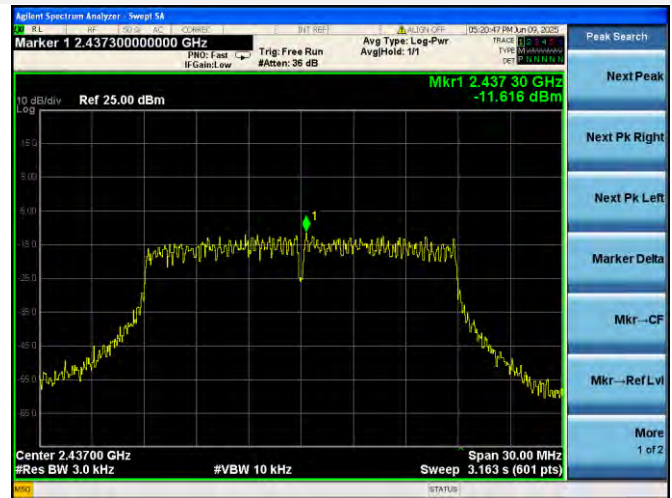

802.11n-20 MHz HIGH CHANNEL

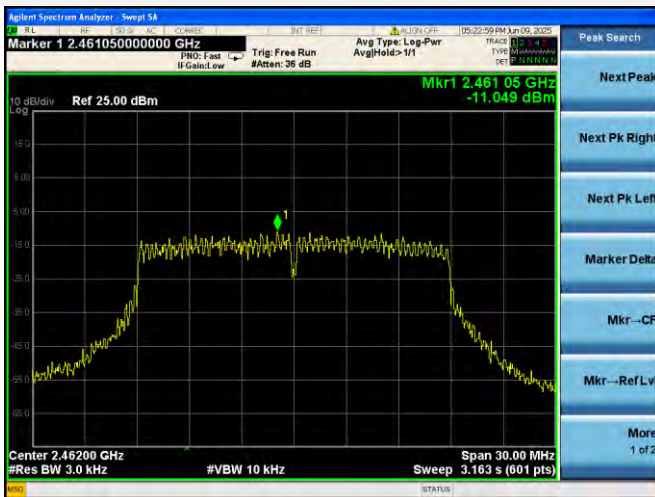

802.11n-40 MHz LOW CHANNEL



802.11n-40 MHz MIDDLE CHANNEL



802.11n-40 MHz HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2541696-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2541696-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2541696-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--