



SAR Test Report

For

Applicant Name: Hunan Greatwall Computer System Co., Ltd.
Hunan Greatwall Industrial Park, Tianyi Science and Technology
Address: City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan
Province China
EUT Name: Laptop
Brand Name: DAMASCO, Great Wall
Model Number: W1523LS-ED
Series Model Number: Refer to Product Information

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial
Address: Park, Tantou Community, Songgang Street, Bao'an District,
Shenzhen, Guangdong, China

Report Number: BTF260710R00101
Test Standards: 47 CFR Part 2.1093 IEEE Std. 1528-2013
IEEE C95.1-2019
FCC ID: 2APUQ-W1523
Test Conclusion: Pass
Test Date: 2026-07-12 to 2026-07-22
Date of Issue: 2026-07-22

Prepared By: 
Birch Zhang / Tester
Date: 2026-07-22

Prepared By: 
Amenda Zhong / Project Engineer
Date: 2026-07-22

Approved By: 
Ryan.CJ / EMC Manager
Date: 2026-07-22

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2026-07-22	Original
Note:		Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	6
2.6 Technical Information	6
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Device Category and SAR Limit	7
3.3 Test Result Summary	8
3.4 Test Uncertainty	9
4. Measurement System	11
4.1 Specific Absorption Rate (SAR) Definition	11
4.2 MVG SAR System	11
5. System Verification	16
5.1 Purpose of System Check	16
5.2 System Check Setup	16
6. TEST POSITION CONFIGURATIONS	17
6.1 Head Exposure Conditions	17
6.2 Body-worn Position Conditions	19
6.3 Hotspot Mode Exposure Position Conditions	20
6.4 Product Specific 10g Exposure Consideration	20
7. Measurement Procedure	21
7.1 Measurement Process Diagram	21
7.2 SAR Scan General Requirement	22
7.3 Measurement Procedure	23
7.4 Area & Zoom Scan Procedure	23
8. Conducted RF Output Power	24
8.1 Wifi	24
8.2 Bluetooth	31
9. Test Exclusion Consideration	32
10. Test Result	33
11. SAR Measurement Variability	35
12. Simultaneous Transmission	36
12.1 Simultaneous Transmission Mode Considerations	36
13. Test Equipment List	37
ANNEX A Simulating Liquid Verification Result	38
ANNEX B System Check Result	38
ANNEX D Test Data	47
ANNEX D SAR Test Setup Photos	71
ANNEX E EUT External and Internal Photos	71
ANNEX F Calibration Information	71

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
FCC Registration Number	518915
Designation Number	CN1409

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	Hunan Greatwall Computer System Co., Ltd.
Address:	Hunan Greatwall Industrial Park, Tianyi Science and Technology City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan Province China

2.2 Manufacturer Information

Company Name:	Hunan Greatwall Computer System Co., Ltd.
Address:	Hunan Greatwall Industrial Park, Tianyi Science and Technology City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan Province China

2.3 Factory Information

Company Name:	Hunan Greatwall Computer System Co., Ltd.
Address:	Hunan Greatwall Industrial Park, Tianyi Science and Technology City, Xiangyun Middle Road, Tianyuan District, Zhuzhou, Hunan Province China

2.4 General Description of Equipment under Test (EUT)

EUT Name	Laptop
Under Test Model Name	W1523LS-ED
Series Model Name	W1523JP-WD, W1523AP-WD, W1523AP-PD , W1523LP-ED, W1523ABP-WD, LP-N45-8-128S, LP-N45-8-256P, LP-R3-8-256P, LP-R3-8-512S, LP-R5-8-512S, LP-R5-16-512S, LP-I5-8-512S, LP-I5-16-512S
Description of Model name differentiation	The product is only different in terms of model name and battery type. It is applicable to different sales regions.
Sample No	BTFSN260710006

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Model	519960-3S1P
	Capacity	4500mAh
	Rated Voltage	11.4V
	Adapter Model	SOY-1900342US-523-A
	Adapter Output	19V= 3.42A
Ancillary Equipment 2	Rechargeable Battery	
	Model	5660100-2S1P
	Capacity	5000mAh
	Rated Voltage	7.6V
	Adapter Model	SOY-1200200US-539
	Adapter Output	12V= 2A

Note: The structure and internal design of these types of printed circuit boards (PCB) are the same, it's just that the model names and battery types are different. So, SAR tests were done on laptops with different battery voltages.

2.6 Technical Information

Network and Wireless connectivity	2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) Bluetooth (EDR+BLE)
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	WLAN, Bluetooth	
Frequency Range	802.11b/g/n(HT20)	2412 ~ 2462 MHz
	802.11n(HT40)	2422 ~ 2452 MHz
	802.11a	5150 ~ 5250 MHz
	/802.11n(HT20/40)	5250 ~ 5350 MHz
	/802.11ac(VHT20/40/80)	5470 ~ 5725 MHz
		5725 ~ 5850 MHz
Antenna Type	WLAN: PIFA Antenna	
	BT: PIFA Antenna	
Hotspot Function	Not Support	
Power Reduction	Not Support	
Exposure Category	General Population/Uncontrolled exposure	
EUT Stage	Portable Device	
Product	Type	
	☒ Production unit	☐ Identical prototype

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB 447498 D01	General RF Exposure Guidance v06
5	KDB 865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB 865664 D02	RF Exposure Reporting v01r02
7	KDB 248227 D01	802.11 Wi-Fi SAR v02r02
8	KDB 616217 D04	SAR for laptop and tablets v01r02
9	KDB 648474 D04	Handset SAR v01r03
10	KDB 690783 D01	SAR Listings on Grant v01r03

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as follows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Body-supported 1-g SAR (0 mm Gap)	WLAN 2.4 GHz ANT1	0.455	DTS	0.503
	RLAN 5.2 GHz ANT2	0.231	NII	
	RLAN 5.3 GHz ANT1	0.503		
	RLAN 5.6 GHz ANT1	0.486		
	RLAN 5.8 GHz ANT2	0.438		
	Bluetooth	0.011	DSS	

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std. 1528-2013.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Body-supported 1-g SAR (0 mm Gap)	Ant.1 5.3G WIFI (SISO) + BT	0.514	1.6	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test (450MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Unc. $u(x_i)=a(x_i)/q_i$	Ci (1g)	Ci (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System									
Probe calibration	16	N (k = 2)	2	8.00	1	1	8.00	8.00	∞
Probe calibration drift	4	R	$\sqrt{3}$	2.31	1	1	2.31	2.31	∞
Probe linearity	4.7	R	$\sqrt{3}$	2.71	1	1	2.71	2.71	∞
detection limit	1	R	$\sqrt{3}$	0.58	1	1	0.58	0.58	∞
Probe isotropy	3.5	R	$\sqrt{3}$	2.02	0.71	0.71	1.43	1.43	∞
Hemispherical Isotropy	5.9	N	1	5.90	0.71	0.71	4.19	4.19	∞
Boundary effect	1	R	1.73	0.58	1	1	0.58	0.58	∞
Integration time	1.4	R	1.73	0.81	1	1	0.81	0.81	∞
Response time	0	R	1.73	0.00	1	1	0.00	0.00	∞
Readout electronics	0.5	N	1	0.50	1	1	0.50	0.50	∞
RF ambient and noise	3	R	$\sqrt{3}$	1.73	1	1	1.73	1.73	∞
Probe positioning errors	3.28	N	1	3.28	0.33	0.33	1.08	1.08	∞
Data processing errors	2.3	R	1	1.33	1	1	1.33	1.33	∞
Conductivity measurement	4.07	N	1	2.35	0.79	0.77	1.86	1.81	∞
Permittivity measurement	5.06	N	1	2.92	0.23	0.26	0.67	0.76	∞
Liquid Conductivity - Temperature Uncertainty	2.5	R	1	1.44	0.79	0.77	1.14	1.11	∞
Liquid Permittivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	1.44	0.23	0.26	0.33	0.38	∞
Shell permittivity	2.9	R	$\sqrt{3}$	1.67	0.25	0.25	0.42	0.42	∞
Repeatability of positioning the DUT or source against the phantom	2.7	N	1	2.70	2	2	5.40	5.40	∞
Uncertainty in accepted power	3	R	1	3.00	1	1	3.00	3.00	∞
Effect of operating mode on probe sensitivity	2.3	R	$\sqrt{3}$	1.33	1	1	1.33	1.33	∞
Variation in SAR due to drift in output of DUT	2.2	N	1	2.20	1	1	2.20	2.20	∞
Phantom deviation from target (ϵ' , σ)	1.9	N	1	1.90	1	1	1.90	1.90	∞
SAR scaling	0	R	$\sqrt{3}$	0.00	1	1	0.00	0.00	∞
Combined uncertainty	/						12.56	12.55	
Expanded Uncertainty (95% Confidence interval)	/						25.11	25.11	

* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Component	Tol (+ - %)	Prob. Dist.	Div.	Unc. $u(x_i)=a(x_i)/q_i$	Ci (1g)	Ci (10 g)	1g Ui (+ - %)	10 g Ui (+ - %)	Vi veff
Measurement System									
Probe calibration	16	N (k = 2)	2	8.00	1	1	8.00	8.00	∞
Probe calibration drift	4	R	1.73	2.31	1	1	2.31	2.31	∞
Probe linearity	4.7	R	1.73	2.72	1	1	2.72	2.72	∞
Detection limit	1	R	1.73	0.58	1	1	0.58	0.58	∞
Axial Isotropy	3.5	R	1.73	2.02	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	1.73	3.41	0.71	0.71	2.42	2.42	∞
Boundary effect	1	R	1.73	0.58	0.71	0.71	0.41	0.41	∞
Integration time	1.4	R	1.73	0.81	1	1	0.81	0.81	∞
Response time	0	R	1.73	0.00	1	1	0.00	0.00	∞
Readout electronics	0.5	N	1	0.50	1	1	0.50	0.50	∞
Noise	3	R	1.73	1.73	1	1	1.73	1.73	∞
Reflections	3	R	1.73	1.73	1	1	1.73	1.73	∞
Positioner Mechanical Tolerance	3.28	R	1.73	1.90	0.33	0.33	0.63	0.63	∞
Positioning with respect to Phantom Shell	3.28	R	1.73	1.90	0.33	0.33	0.63	0.63	∞
Data processing errors	2.3	R	1.73	1.33	1	1	1.33	1.33	∞
Conductivity measurement	4.07	N	1	4.07	0.79	0.77	3.22	3.13	∞
Permittivity measurement	5.06	N	1	5.06	0.23	0.26	1.16	1.32	∞
Liquid Conductivity - Temperature Uncertainty	2.5	R	1.73	1.45	0.79	0.77	1.14	1.11	∞
Liquid Permittivity - Temperature Uncertainty	2.5	R	1.73	1.45	0.23	0.26	0.33	0.38	∞
Shell permittivity	2.9	R	1.73	1.68	0.25	0.25	0.42	0.42	∞
Distance between the radiating element of the DUT and the phantom medium	2.7	N	1	2.70	2	2	5.40	5.40	∞
Deviation of experimental antennas	4.5	N	1.73	2.60	1	1	2.60	2.60	∞
Other uncertainty contributions	2	R	1	2.00	1	1	2.00	2.00	∞
Uncertainty in accepted power	3	R	1.73	1.73	1	1	1.73	1.73	∞
Phantom deviation from target (ϵ', σ)	1.9	N	1	1.90	1	0.87	1.90	1.65	∞
$u(\Delta SAR)$	\						12.51	12.47	
Expanded uncertainty (95% confidence interval)	\						25.02	24.93	

4.2.2 Robot



A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements the Specific Dosimetric E-Field Probe 0125-EPGO-445 with following specifications is used:

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Axial Isotropy: <0.10 dB
- Spherical Isotropy: <0.10 dB
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM Phantom

The thickness of the phantom amounts to $2\text{ mm} \pm 0.2\text{ mm}$. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom

	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2\text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




ELLI Phantom

The shape of the phantom is an ellipse with length $600\text{ mm} \pm 5\text{ mm}$ and width $400\text{ mm} \pm 5\text{ mm}$.
The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan \delta \leq 0.05$ and relative permittivity:
 $\epsilon_r' \leq 5$ for $f \leq 3\text{ GHz}$
 $3 \leq \epsilon_r' \leq 5$ for $f > 3\text{ GHz}$
The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of $\pm 0.2\text{ mm}$.

Technical & mechanical characteristics

Shell thickness	2 mm $\pm$ 0.2 mm
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

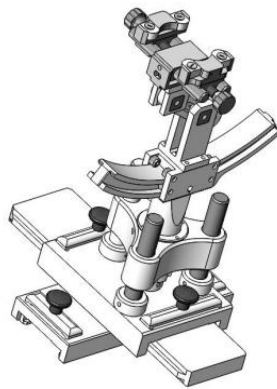


System Material	Permittivity	Loss tangent
Delrin	3.7	0.005

(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028

4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

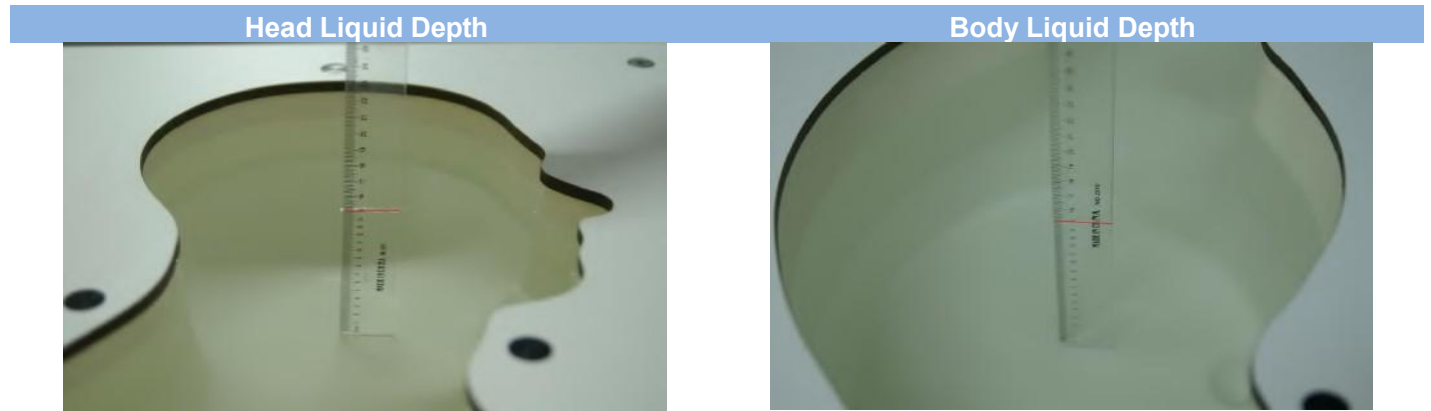

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

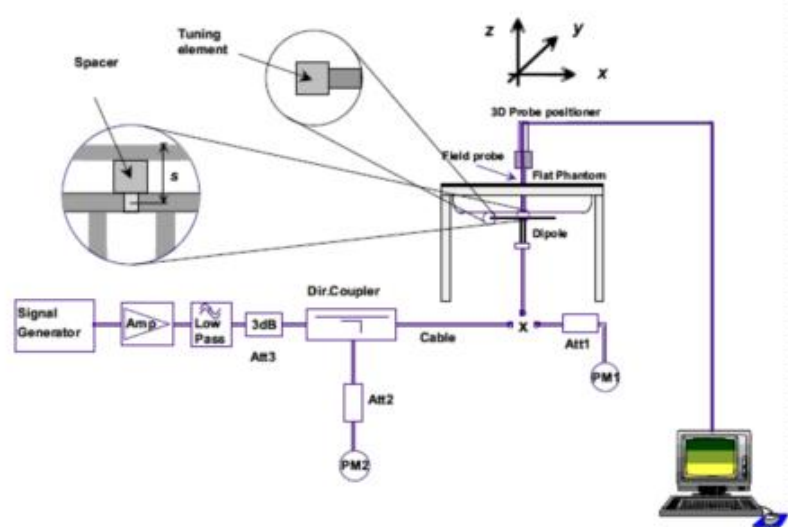

6. TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.


6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical center line and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

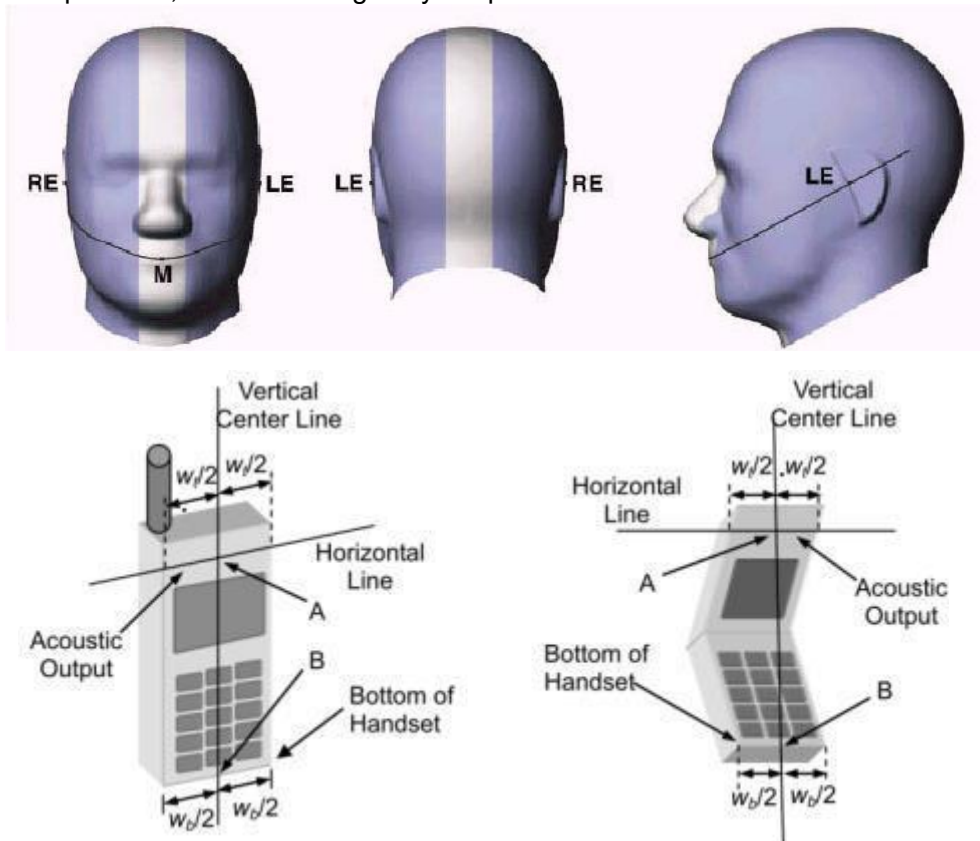


6.1.2 Two Imaginary Lines on the Handset

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

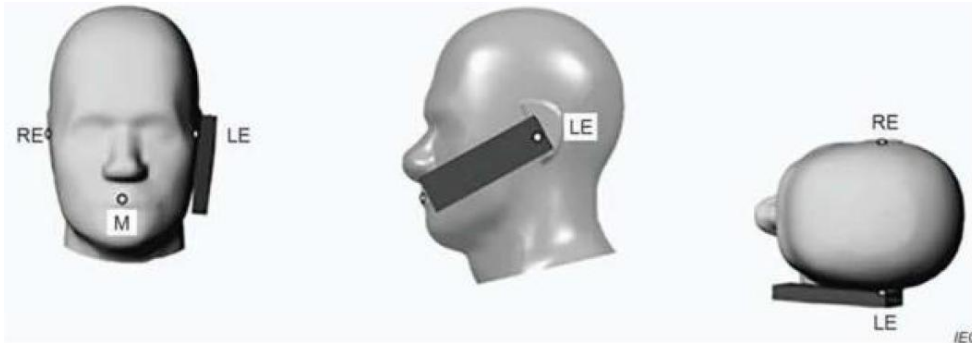

6.1.3 Titled Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

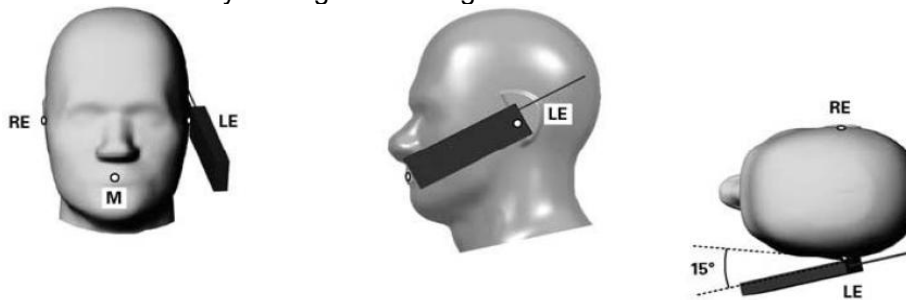


6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

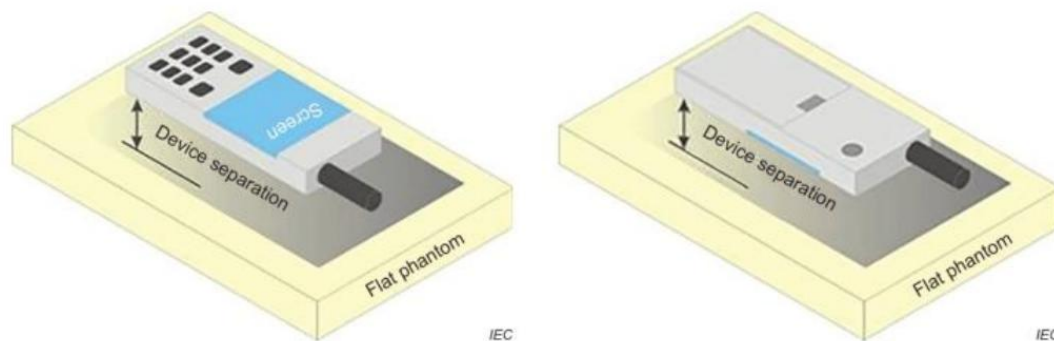

6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

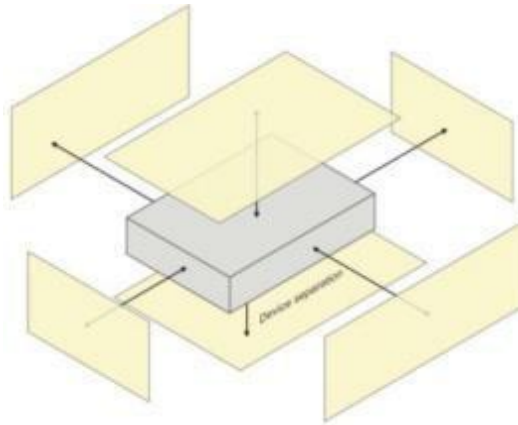

6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

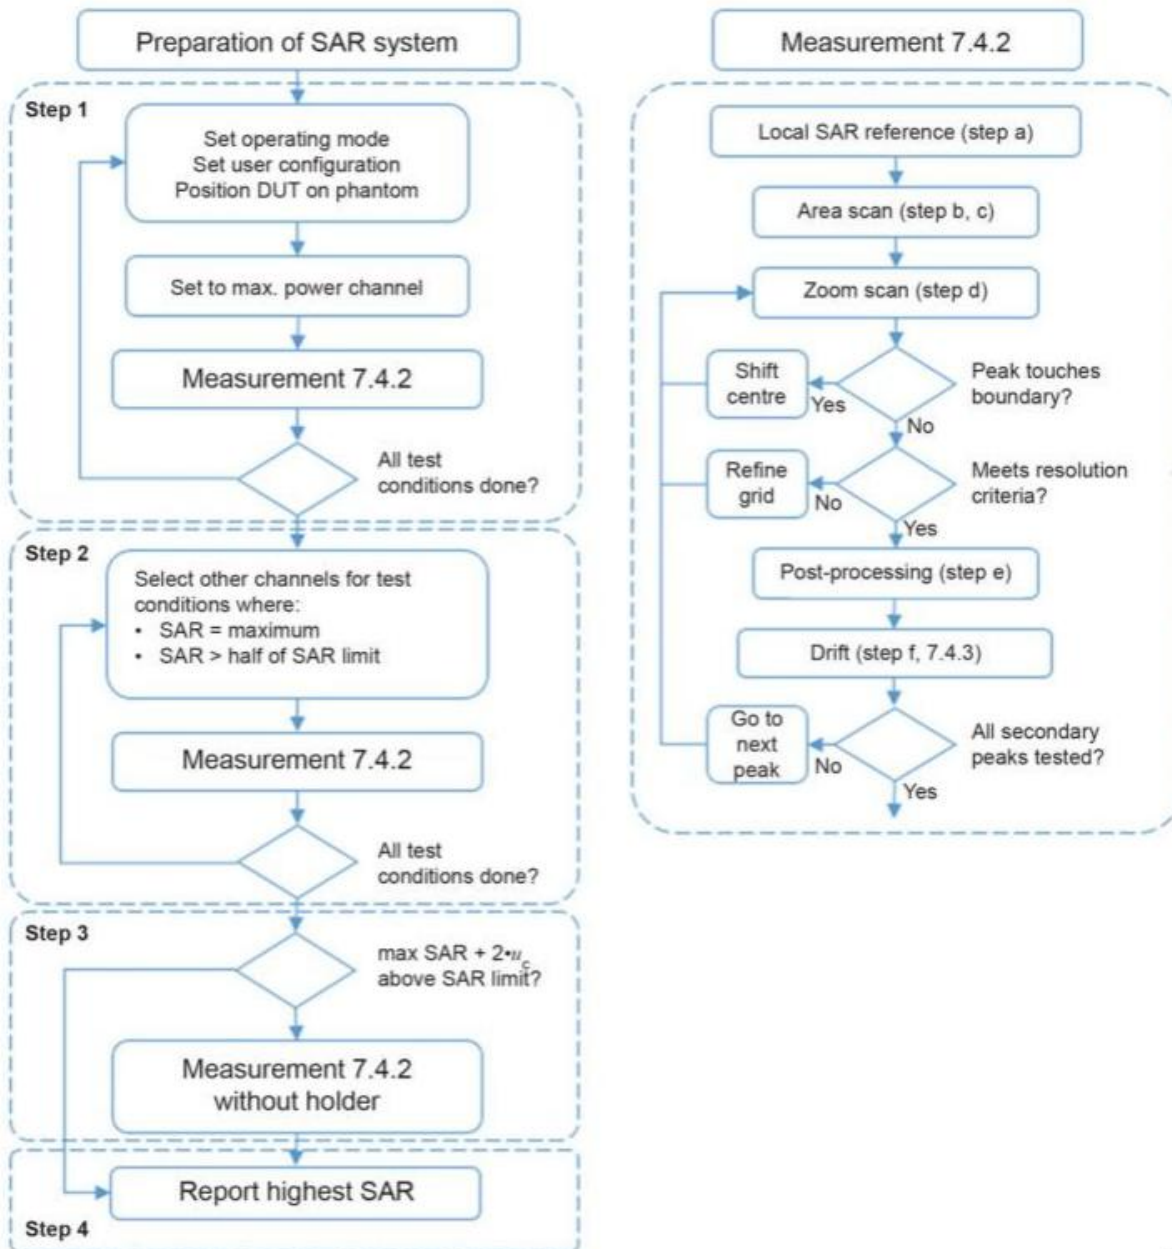

IEC

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	½ ⋅ δ ⋅ ln(2)±0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 –3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		Δz Zoom (n>1): between subsequent points		≤ 1.5⋅Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB				
447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8. Conducted RF Output Power

8.1 Wifi

Battery Model: 519960-3S1P

Ant 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	13.35	13.50	Yes
		7	2442	12.39	12.50	No
		13	2472	12.43	12.50	No
	802.11g	1	2412	13.13	13.50	No
		7	2442	12.20	12.50	No
		13	2472	13.49	13.50	No
	802.11n(HT20)	1	2412	13.17	13.50	No
		7	2442	12.41	12.50	No
		13	2472	12.46	12.50	No
	802.11n(HT40)	3	2422	11.00	11.50	No
		7	2442	11.09	11.50	No
		11	2462	11.29	11.50	No

Ant 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	13.00	13.50	No
		7	2442	13.14	13.50	No
		13	2472	14.18	14.50	Yes
	802.11g	1	2412	13.95	14.00	No
		7	2442	13.58	14.00	No
		13	2472	13.66	14.00	No
	802.11n(HT20)	1	2412	13.31	13.50	No
		7	2442	13.45	13.50	No
		13	2472	13.79	14.00	No
	802.11n(HT40)	3	2422	11.93	12.00	No
		7	2442	11.90	12.00	No
		11	2462	12.07	12.50	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.

Ant 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	9.03	9.50	No
		40	5200	8.61	9.00	No
		48	5240	9.85	10.00	No
	802.11n(HT20)	36	5180	8.51	9.00	No
		40	5200	9.13	9.50	No
		48	5240	9.86	10.00	No
	802.11ac(VHT20)	36	5180	8.51	9.00	No
		40	5200	8.94	9.00	No
		48	5240	10.15	10.50	Yes
	802.11n(HT40)	38	5190	8.75	9.00	No
		46	5230	9.62	10.00	No
	802.11ac(VHT40)	38	5190	8.72	9.00	No
		46	5230	9.62	10.00	No
	802.11ac(VHT80)	42	5210	9.15	9.50	No

Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	10.60	11.00	No
		40	5200	11.42	11.50	No
		48	5240	12.18	12.50	No
	802.11n(HT20)	36	5180	10.41	10.50	No
		40	5200	11.64	12.00	No
		48	5240	12.25	12.50	Yes
	802.11ac(VHT20)	36	5180	10.48	10.50	No
		40	5200	9.35	9.50	No
		48	5240	12.17	12.50	No
	802.11n(HT40)	38	5190	11.21	11.50	No
		46	5230	11.96	12.00	No
	802.11ac(VHT40)	38	5190	11.05	11.50	No
		46	5230	12.06	12.50	No
	802.11ac(VHT80)	42	5210	11.38	11.50	No

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	10.00	10.50	No
		56	5280	9.85	10.00	No
		64	5320	9.84	10.00	No
	802.11n(HT20)	52	5260	9.83	10.00	No
		56	5280	10.15	10.50	Yes
		64	5320	9.69	10.00	No
	802.11ac(VHT20)	52	5260	9.74	10.00	No
		56	5280	9.67	10.00	No
		64	5320	9.66	10.00	No
	802.11n(HT40)	54	5270	7.44	7.50	No
		62	5310	7.33	7.50	No
	802.11ac(VHT40)	54	5270	7.40	7.50	No
		62	5310	7.33	7.50	No
	802.11ac(VHT80)	58	5290	7.22	7.50	No
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	10.01	10.50	No
		56	5280	9.88	10.00	No
		64	5320	9.95	10.00	No
	802.11n(HT20)	52	5260	10.05	10.50	No
		56	5280	10.14	10.50	Yes
		64	5320	10.06	10.50	No
	802.11ac(VHT20)	52	5260	9.86	10.00	No
		56	5280	9.74	10.00	No
		64	5320	9.75	10.00	No
	802.11n(HT40)	54	5270	7.50	8.00	No
		62	5310	7.40	7.50	No
	802.11ac(VHT40)	54	5270	7.48	7.50	No
		62	5310	7.38	7.50	No
	802.11ac(VHT80)	58	5290	7.27	7.50	No

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	10.10	10.50	No
		120	5600	11.49	11.50	No
		140	5700	12.92	13.00	No
	802.11n(HT20)	100	5500	10.15	10.50	No
		120	5600	11.54	12.00	No
		140	5700	13.03	13.50	Yes
	802.11ac(VHT20)	100	5500	7.62	8.00	No
		120	5600	9.14	9.50	No
		140	5700	10.82	11.00	No
	802.11n(HT40)	102	5510	5.46	5.50	No
		118	5590	8.88	9.00	No
		134	5670	10.81	11.00	No
	802.11ac(VHT40)	102	5510	10.70	11.00	No
		118	5590	9.56	10.00	No
		134	5670	10.97	11.00	No
802.11ac(VHT80)	106	5530	6.26	6.50	No	
	122	5610	7.18	7.50	No	
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	12.51	13.00	Yes
		120	5600	10.68	11.00	No
		140	5700	9.20	9.50	No
	802.11n(HT20)	100	5500	9.50	10.00	No
		120	5600	9.59	10.00	No
		140	5700	8.25	8.50	No
	802.11ac(VHT20)	100	5500	9.45	9.50	No
		120	5600	9.50	10.00	No
		140	5700	8.17	8.50	No
	802.11n(HT40)	102	5510	8.95	9.00	No
		118	5590	8.77	9.00	No
		134	5670	7.57	8.00	No
	802.11ac(VHT40)	102	5510	8.90	9.00	No
		118	5590	8.59	9.00	No
		134	5670	8.16	8.50	No
802.11ac(VHT80)	106	5530	6.43	6.50	No	
	122	5610	7.40	7.50	No	

Ant 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	10.83	11.00	No
		157	5785	10.82	11.00	No
		165	5825	12.14	12.50	Yes
	802.11n(HT20)	149	5745	10.72	11.00	No
		157	5785	10.76	11.00	No
		165	5825	11.68	12.00	No
	802.11ac(VHT20)	149	5745	10.47	10.50	No
		157	5785	10.90	11.00	No
		165	5825	11.76	12.00	No
	802.11n(HT40)	151	5755	10.56	11.00	No
		159	5795	11.08	11.50	No
	802.11ac(VHT40)	151	5755	10.67	11.00	No
		159	5795	11.25	11.50	No
	802.11ac(VHT80)	155	5775	10.37	10.50	No

Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	11.45	11.50	No
		157	5785	11.79	12.00	No
		165	5825	12.23	12.50	Yes
	802.11n(HT20)	149	5745	11.32	11.50	No
		157	5785	11.73	12.00	No
		165	5825	12.15	12.50	No
	802.11ac(VHT20)	149	5745	11.39	11.50	No
		157	5785	11.71	12.00	No
		165	5825	12.19	12.50	No
	802.11n(HT40)	151	5755	11.42	11.50	No
		159	5795	11.60	12.00	No
	802.11ac(VHT40)	151	5755	11.01	11.50	No
		159	5795	11.14	11.50	No
	802.11ac(VHT80)	155	5775	10.97	11.00	No

Battery Model: 5660100-2S1P

Ant 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	12.37	12.50	No
		7	2442	12.43	12.50	No
		13	2472	12.48	12.50	Yes
	802.11g	1	2412	12.52	13.00	No
		7	2442	12.10	12.50	No
		13	2472	12.24	12.50	No
	802.11n(HT20)	1	2412	12.55	13.00	No
		7	2442	12.03	12.50	No
		13	2472	12.21	12.50	No
	802.11n(HT40)	3	2422	10.85	11.00	No
		7	2442	10.63	11.00	No
		11	2462	10.54	11.00	No

Ant 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	12.25	12.50	No
		7	2442	12.79	13.00	Yes
		13	2472	12.29	12.50	No
	802.11g	1	2412	12.63	13.00	No
		7	2442	12.76	13.00	No
		13	2472	12.60	13.00	No
	802.11n(HT20)	1	2412	12.31	12.50	No
		7	2442	12.47	12.50	No
		13	2472	12.45	12.50	No
	802.11n(HT40)	3	2422	11.25	11.50	No
		7	2442	11.36	11.50	No
		11	2462	11.87	12.00	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.

Ant.1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	8.44	8.50	No
		40	5200	8.44	8.50	No
		48	5240	8.88	9.00	No
	802.11n(HT20)	36	5180	8.12	8.50	No
		40	5200	8.94	9.00	No
		48	5240	8.37	8.50	No
	802.11ac(VHT20)	36	5180	8.30	8.50	No
		40	5200	8.64	9.00	No
		48	5240	9.75	10.00	Yes
	802.11n(HT40)	38	5190	8.07	8.50	No
		46	5230	8.97	9.00	No
	802.11ac(VHT40)	38	5190	8.27	8.50	No
		46	5230	8.08	8.50	No
	802.11ac(VHT80)	42	5210	8.69	9.00	No
Ant.2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	10.42	10.50	No
		40	5200	11.03	11.50	No
		48	5240	11.89	12.00	Yes
	802.11n(HT20)	36	5180	10.12	10.50	No
		40	5200	11.33	11.50	No
		48	5240	11.87	12.00	No
	802.11ac(VHT20)	36	5180	10.14	10.50	No
		40	5200	9.03	9.50	No
		48	5240	11.85	12.00	No
	802.11n(HT40)	38	5190	10.69	11.00	No
		46	5230	11.57	12.00	No
	802.11ac(VHT40)	38	5190	10.69	11.00	No
		46	5230	11.35	11.50	No
	802.11ac(VHT80)	42	5210	10.89	11.00	No

Ant.1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	9.65	10.00	No
		56	5280	9.32	9.50	No
		64	5320	9.54	10.00	No
	802.11n(HT20)	52	5260	9.63	10.00	No
		56	5280	9.77	10.00	Yes
		64	5320	9.25	9.50	No
	802.11ac(VHT20)	52	5260	9.63	10.00	No
		56	5280	9.24	9.50	No
		64	5320	9.52	10.00	No
	802.11n(HT40)	54	5270	7.02	7.50	No
		62	5310	7.11	7.50	No
	802.11ac(VHT40)	54	5270	7.30	7.50	No
		62	5310	7.05	7.50	No
	802.11ac(VHT80)	58	5290	7.00	7.50	No

Ant.2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	9.63	10.00	No
		56	5280	9.45	9.50	No
		64	5320	9.35	9.50	No
	802.11n(HT20)	52	5260	9.79	10.00	No
		56	5280	9.69	10.00	No
		64	5320	9.88	10.00	Yes
	802.11ac(VHT20)	52	5260	9.25	9.50	No
		56	5280	9.42	9.50	No
		64	5320	9.23	9.50	No
	802.11n(HT40)	54	5270	7.12	7.50	No
		62	5310	7.09	7.50	No
	802.11ac(VHT40)	54	5270	7.13	7.50	No
		62	5310	7.00	7.50	No
	802.11ac(VHT80)	58	5290	6.98	7.00	No

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	9.68	10.00	No
		120	5600	11.02	11.50	No
		140	5700	12.54	13.00	No
	802.11n(HT20)	100	5500	9.89	10.00	No
		120	5600	11.23	11.50	No
		140	5700	12.87	13.00	Yes
	802.11ac(VHT20)	100	5500	7.55	8.00	No
		120	5600	8.99	9.00	No
		140	5700	10.33	10.50	No
	802.11n(HT40)	102	5510	5.15	5.50	No
		118	5590	8.36	8.50	No
		134	5670	10.32	10.50	No
	802.11ac(VHT40)	102	5510	10.28	10.50	No
		118	5590	9.12	9.50	No
		134	5670	10.58	11.00	No
	802.11ac(VHT80)	106	5530	5.99	6.00	No
		122	5610	6.87	7.00	No
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	12.01	12.50	Yes
		120	5600	10.23	10.50	No
		140	5700	8.99	9.00	No
	802.11n(HT20)	100	5500	9.15	9.50	No
		120	5600	9.24	9.50	No
		140	5700	8.02	8.50	No
	802.11ac(VHT20)	100	5500	9.25	9.50	No
		120	5600	9.36	9.50	No
		140	5700	8.04	8.50	No
	802.11n(HT40)	102	5510	8.67	9.00	No
		118	5590	8.36	8.50	No
		134	5670	7.28	7.50	No
	802.11ac(VHT40)	102	5510	8.69	9.00	No
		118	5590	8.27	8.50	No
		134	5670	8.02	8.50	No
	802.11ac(VHT80)	106	5530	6.15	6.50	No
		122	5610	7.32	7.50	No

Ant 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	10.56	11.00	No
		157	5785	10.65	11.00	No
		165	5825	11.98	12.00	Yes
	802.11n(HT20)	149	5745	10.35	10.50	No
		157	5785	10.27	10.50	No
		165	5825	11.38	11.50	No
	802.11ac(VHT20)	149	5745	10.05	10.50	No
		157	5785	10.54	11.00	No
		165	5825	11.31	11.50	No
	802.11n(HT40)	151	5755	10.12	10.50	No
		159	5795	10.88	11.00	No
	802.11ac(VHT40)	151	5755	10.23	10.50	No
		159	5795	10.97	11.00	No
	802.11ac(VHT80)	155	5775	10.02	10.50	No
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	11.12	11.50	No
		157	5785	11.56	12.00	No
		165	5825	12.02	12.50	Yes
	802.11n(HT20)	149	5745	11.18	11.50	No
		157	5785	11.58	12.00	No
		165	5825	11.98	12.00	No
	802.11ac(VHT20)	149	5745	11.13	11.50	No
		157	5785	11.56	12.00	No
		165	5825	12.00	12.50	No
	802.11n(HT40)	151	5755	11.17	11.50	No
		159	5795	11.48	11.50	No
	802.11ac(VHT40)	151	5755	10.78	11.00	No
		159	5795	10.89	11.00	No
	802.11ac(VHT80)	155	5775	10.69	11.00	No

8.2 Bluetooth

Battery Model: 519960-3S1P

EDR	Mode	Maximum Tune-up(dBm)	Peak Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
			5.01	5.88	6.89
	GFSK	7.00	5.94	5.74	7.12
	$\pi/4$ QPSK	7.50	4.99	5.82	7.15
	8DPSK	7.50			
BLE	Mode	Maximum Tune-up(dBm)	Peak Conducted Output Power (dBm)		
			0	19	39
			2402MHz	2440MHz	2480MHz
			5.21	5.98	7.02
	1Mbps	7.50			

Battery Model: 5660100-2S1P

EDR	Mode	Maximum Tune-up(dBm)	Peak Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
			4.23	5.12	6.41
	GFSK	6.50	5.36	5.01	6.55
	$\pi/4$ QPSK	7.00	4.52	5.28	6.75
	8DPSK	7.00			
BLE	Mode	Maximum Tune-up(dBm)	Peak Conducted Output Power (dBm)		
			0	19	39
			2402MHz	2440MHz	2480MHz
			4.86	5.63	6.65
	1Mbps	7.00			

Note

1. Per KDB 447498 D01 General RF Exposure Guidance v06, the 1-g SAR test SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 25 mm (Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table. The equation and threshold in 4.3.1 must be applied to determine SAR test exclusion.) by:


MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

*When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

9. Test Exclusion Consideration

Antenna information:

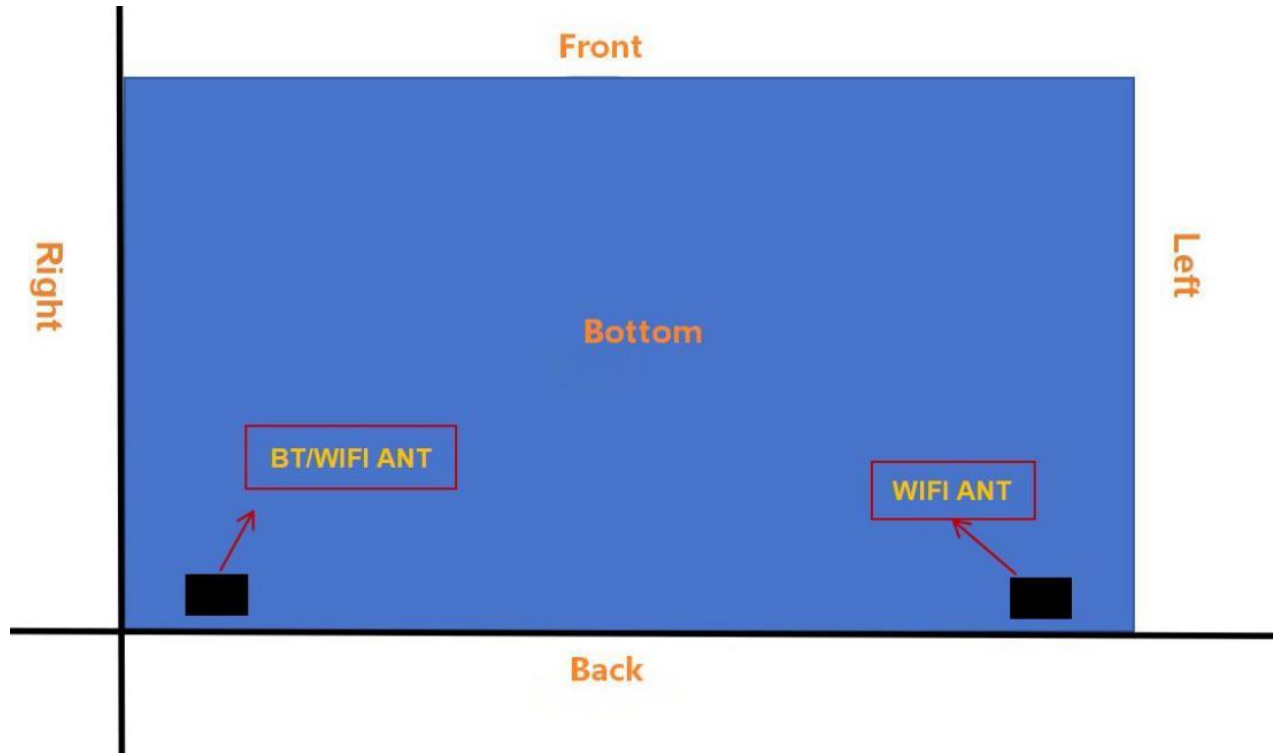

10. Test Result

Battery Model: 519960-3S1P

Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4 (2.4~2.4835) 802.11b ANT1	Back	1	2412	-1.480	0.440	13.35	13.50	1.035	0.455	1#
2.4 (2.4~2.4835) 802.11b ANT2	Back	13	2472	2.480	0.078	14.18	14.50	1.076	0.084	/
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.2g Wifi (5.150~5.250) 802.11ac(VHT20) ANT1	Back	48	5240	-2.000	0.026	10.15	10.50	1.084	0.028	/
5.2g Wifi (5.150~5.250) 802.11ac(VHT20) ANT2	Back	48	5240	-1.640	0.218	12.25	12.50	1.059	0.231	2#
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.3g Wifi (5.250~5.350) 802.11n(HT20) ANT1	Back	56	5280	1.270	0.464	10.15	10.50	1.084	0.503	3#
5.3g Wifi (5.250~5.350) 802.11n(HT20) ANT2	Back	56	5280	-1.830	0.427	10.14	10.50	1.086	0.464	/
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.6g Wifi (5.470~5.725) 802.11n(HT20) ANT1	Back	140	5700	-1.550	0.436	13.03	13.50	1.114	0.486	4#
5.6g Wifi (5.470~5.725) 802.11a ANT2	Back	100	5500	-2.200	0.159	12.51	13.00	1.119	0.178	/
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.8g Wifi (5.725~5.850) 802.11a ANT1	Back	165	5825	-0.050	0.146	12.14	12.50	1.086	0.159	/
5.8g Wifi (5.725~5.850) 802.11a ANT2	Back	165	5825	-2.040	0.412	12.23	12.50	1.064	0.438	5#
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
BLE	Back	78	2482	0.090	0.010	7.15	7.50	1.084	0.011	6#
Note: 1. The maximum SAR Value of each test band is marked bold. 2. SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination. 3. Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary. 4. Per KDB 447498 D01 v06, body-supported use is evaluated with the device positioned at 0mm from a flat phantom filled with body tissue-equivalent medium. 5. Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor=10 ⁴ [(tune-up limit power(dBm) - Ave.power power (dBm))/10], where tune-up limit is the maximum rated power among all production units. Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.										

Battery Model: 5660100-2S1P

Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4 (2.4~2.4835) 802.11b ANT1	Back	13	2472	-1.860	0.397	12.48	12.50	1.005	0.399	7#
2.4 (2.4~2.4835) 802.11b ANT2	Back	7	2442	2.140	0.322	12.79	13.00	1.050	0.338	/
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.2g Wifi (5.150~5.250) 802.11ac(VHT20) ANT1	Back	48	5240	3.630	0.136	9.75	10.00	1.059	0.144	/
5.2g Wifi (5.150~5.250) 802.11a ANT2	Back	48	5240	-2.680	0.174	11.89	12.00	1.026	0.178	8#
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.3g Wifi (5.250~5.350) 802.11n(HT20) ANT1	Back	56	5280	-0.890	0.424	9.77	10.00	1.054	0.447	9#
5.3g Wifi (5.250~5.350) 802.11n(HT20) ANT2	Back	64	5320	1.280	0.316	9.88	10.00	1.028	0.325	/
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.6g Wifi (5.470~5.725) 802.11n(HT20) ANT1	Back	140	5700	-2.200	0.255	12.87	13.00	1.030	0.263	10#
5.6g Wifi (5.470~5.725) 802.11a ANT2	Back	100	5500	1.330	0.133	12.01	12.50	1.119	0.149	/
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
5.8g Wifi (5.725~5.850) 802.11a ANT1	Back	165	5825	2.850	0.287	11.98	12.00	1.005	0.288	/
5.8g Wifi (5.725~5.850) 802.11a ANT2	Back	165	5825	-4.480	0.391	12.02	12.50	1.117	0.437	11#
Body(0mm Gap)										
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
BLE	Back	78	2480	-1.220	0.008	6.75	7.00	1.059	0.008	12#
Note: 1. The maximum SAR Value of each test band is marked bold. 2. SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination. 3. Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary. 4. Per KDB 447498 D01 v06, body-supported use is evaluated with the device positioned at 0mm from a flat phantom filled with body tissue-equivalent medium. 5. Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor=10 ⁴ [(tune-up limit power(dBm) - Ave.power power (dBm))/10], where tune-up limit is the maximum rated power among all production units. Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.										

11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is $0.464 < 0.80$ W/kg, repeated measurement is not required.

12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, one only for wifi, and the other for Wifi&Bluetooth.

Mode	2.4G WIFI 1g simultaneous SAR (W/kg)	5G WIFI MAX 1g simultaneous SAR (W/kg)	BT 1g simultaneous SAR (W/kg)	Σ SAR (W/kg) WIFI 2.4G + BT	Σ SAR (W/kg) WIFI 5G MAX + BT
Antenna 1	0.455	0.503	0.011	0.466	0.514
Antenna 2	0.084	0.438	/	0.084	0.438

13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	0125-EPGO-445	2026/03/03	2027/03/02
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2025/10/20	2026/10/19
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2025/10/17	2026/10/16
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2025/10/17	2026/10/16
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2026/04/02	2027/04/01
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2026/04/02	2027/04/01
MXA Signal Analyzer	KEYSIGHT	N9020A	MY54410409	2025/10/17	2026/10/16
Low Noise Amplifier	Tongyue	N/A	N/A	2025/07/30	2026/07/29
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	N/A	N/A
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2025/05/26	2028/05/25
5200MHz-5800MHz Validation Dipole	MVG	SID5000	07/22 DIP5G000-670	2025/05/26	2028/05/25
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	2026/04/07	2027/04/06
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2025/10/17	2026/10/16
Thermometer	Riters	DT-232	21A11	2026/04/02	2027/04/01
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	N/A	N/A
SAM Phantom	MVG	SAM	07/22 SAM149	N/A	N/A
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	N/A	N/A
Mechanical Calibration Kit	PNA	N/A	N/A	2025/10/21	2026/10/20
Open SAR test software	MVG	N/A	V5.3.5	N/A	N/A
Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria: 1. There is no physical damage on the dipole; 2. System validation with specific dipole is within 10% of calibrated value; 3. Return-loss in within 20% of calibrated measurement. 4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.					

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
2412	39.20	41.02	1.80	1.83	4.64%	1.67%	±5%	22.1	12/7/2026
2450	39.20	41.09	1.80	1.86	4.82%	3.33%	±5%	22.1	12/7/2026
2472	39.20	40.80	1.80	1.88	4.08%	4.44%	±5%	22.1	12/7/2026
2480	39.20	40.71	1.80	1.87	3.85%	3.89%	±5%	22.1	12/7/2026
5200	36.00	34.28	4.66	4.61	-4.78%	-1.07%	±5%	21.5	13/7/2026
5240	36.00	34.55	4.66	4.55	-4.03%	-2.36%	±5%	21.5	13/7/2026
5280	36.00	34.91	4.66	4.71	-3.03%	1.07%	±5%	21.5	13/7/2026
5500	35.50	35.41	5.07	4.88	-0.25%	-3.75%	±5%	21.4	22/7/2026
5600	35.50	34.96	5.07	4.91	-1.52%	-3.16%	±5%	21.4	22/7/2026
5700	35.50	34.77	5.07	4.98	-2.06%	-1.78%	±5%	21.4	22/7/2026
5800	35.30	34.58	5.27	5.06	-2.04%	-3.98%	±5%	21.8	14/7/2026
5825	35.30	34.49	5.27	5.04	-2.29%	-4.36%	±5%	21.8	14/7/2026

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	10g SAR (W/Kg)	1g SAR (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Deviation	1g SAR Deviation
2450	100	2.449	5.061	24.49	50.61	24.55	52.72	-0.24%	-4.00%
5200	100	2.445	8.192	24.45	81.92	22.78	78.16	7.33%	4.81%
5600	100	2.595	7.676	25.95	76.76	23.95	82.72	8.35%	-7.21%
5800	100	2.314	7.833	23.14	78.33	22.71	78.32	1.89%	0.01%

System Performance Check Data (2450 MHz)

System check at 2450 MHz

Date of measurement: 12/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	2450.000
Relative permittivity (real part)	41.091
Relative permittivity (imaginary part)	13.696
Conductivity (S/m)	1.864

C. SAR Surface and Volume

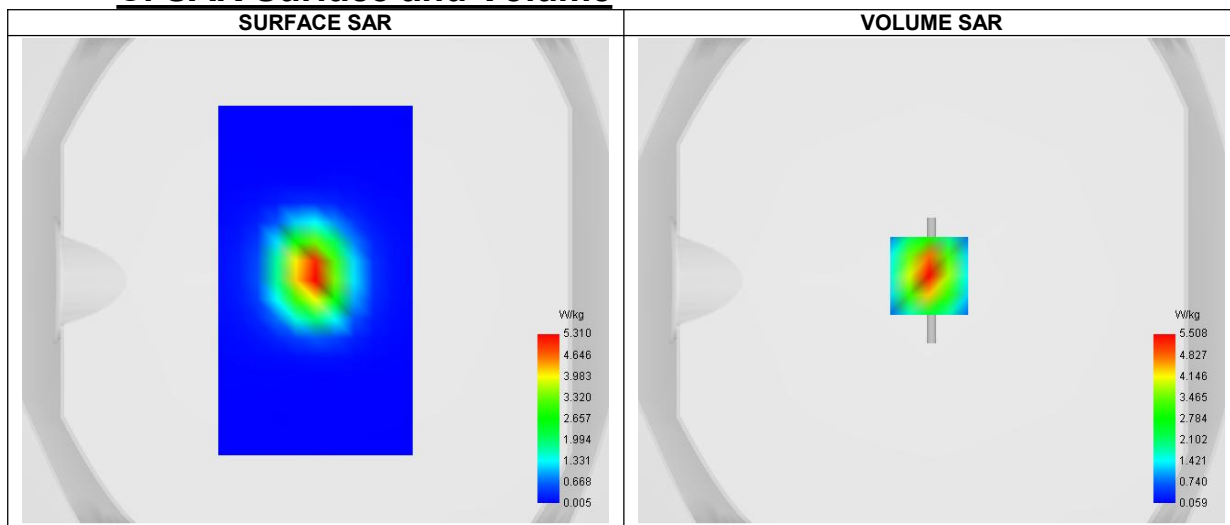


Maximum location: X=-1.00, Y=2.00 ; SAR Peak: 8.84 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.449
SAR 1g (W/Kg)	5.061
Variation (%)	-1.620
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.358504

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	8.887	5.508	2.939	1.634	0.914	0.513	0.290

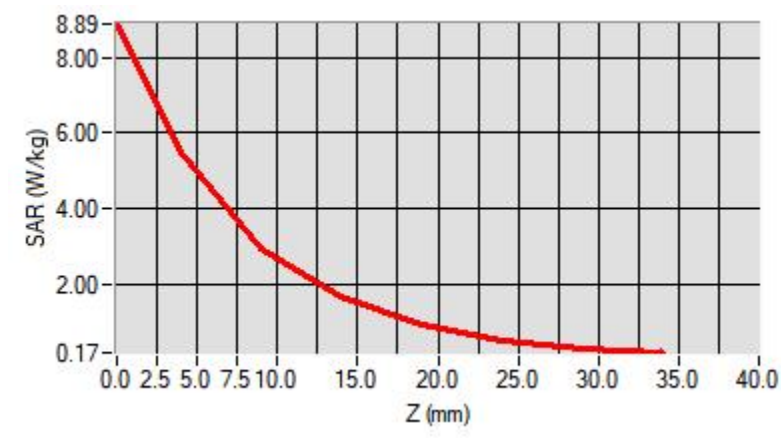

F. 3D Image

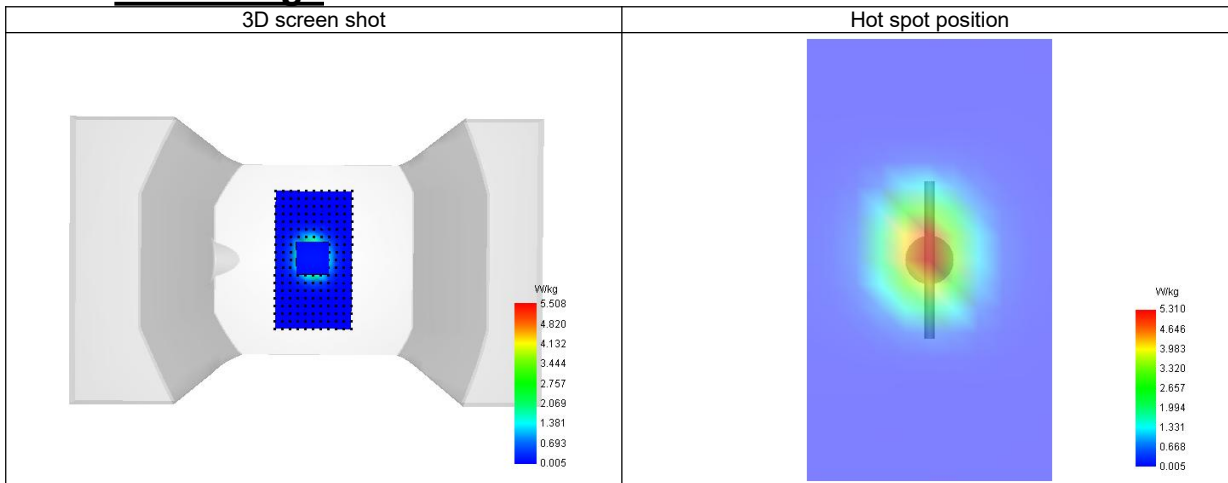

System Performance Check Data (5200 MHz)

System check at 5200 MHz

Date of measurement: 13/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.16
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	5200.000
Relative permittivity (real part)	34.283
Relative permittivity (imaginary part)	15.957
Conductivity (S/m)	4.610

C. SAR Surface and Volume

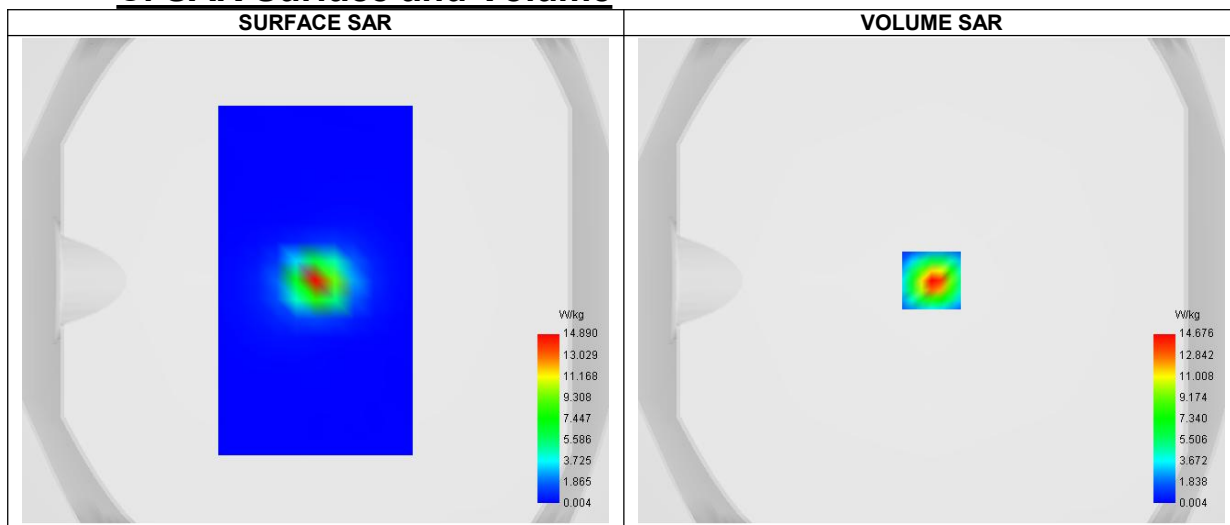


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 25.32 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.445
SAR 1g (W/Kg)	8.192
Variation (%)	-2.000
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.632122

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	23.888	14.676	8.018	4.478	2.464	1.382	0.780	0.419	0.230	0.123	0.061	0.036

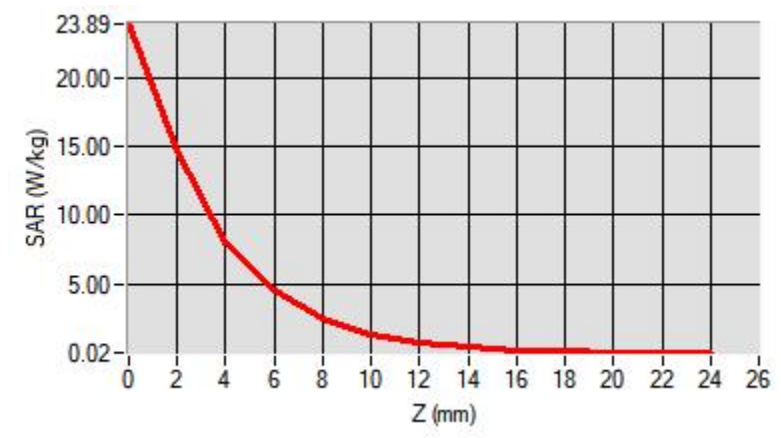

F. 3D Image

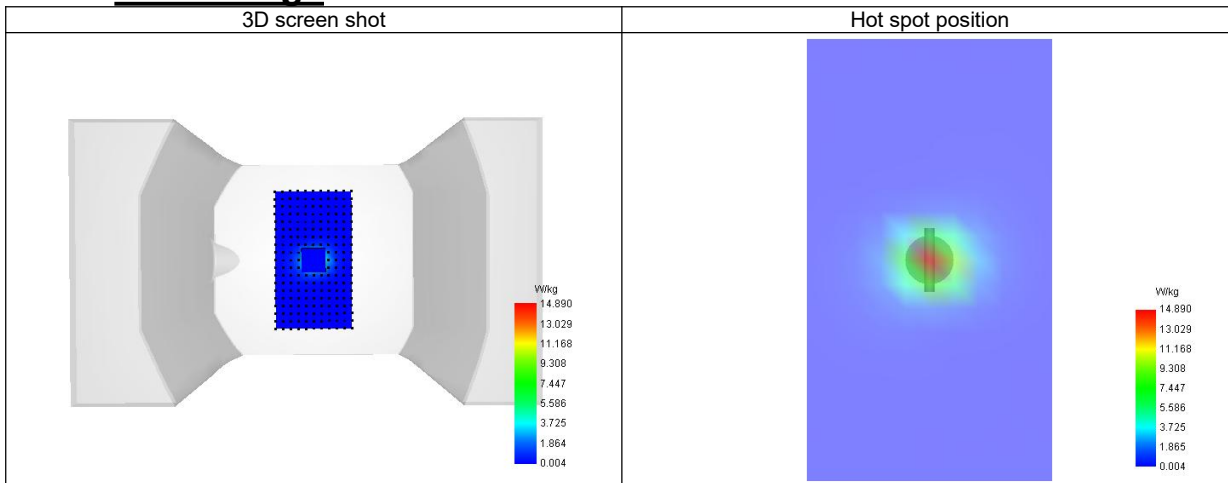

System Performance Check Data (5600 MHz)

System check at 5600 MHz

Date of measurement: 22/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.12
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	5600.000
Relative permittivity (real part)	34.964
Relative permittivity (imaginary part)	15.773
Conductivity (S/m)	4.907

C. SAR Surface and Volume

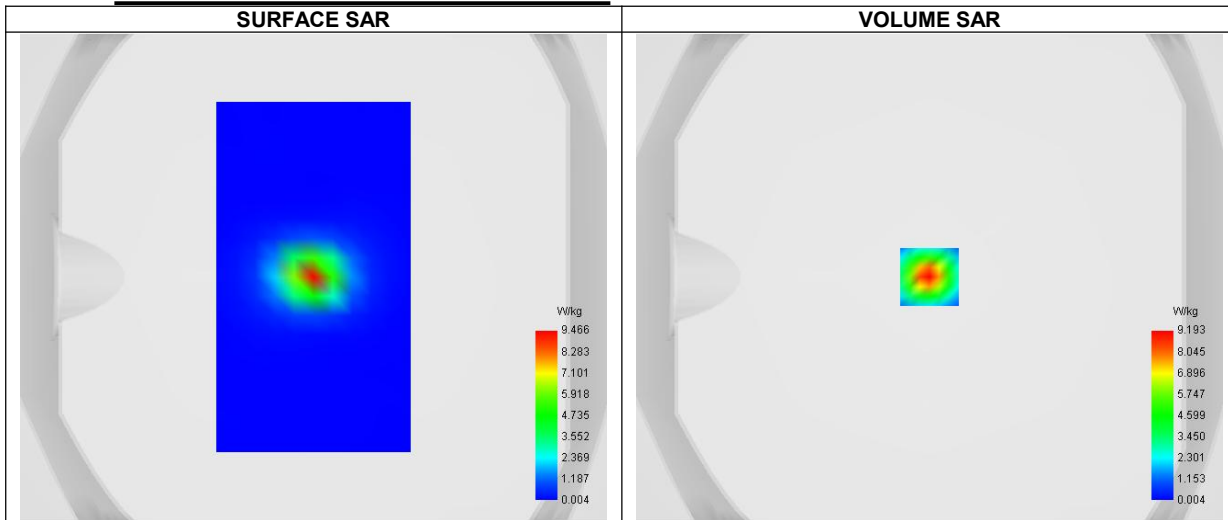


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 16.39 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.595
SAR 1g (W/Kg)	7.676
Variation (%)	1.900
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	50.559636

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	15.564	9.193	4.648	2.370	1.180	0.621	0.322	0.156	0.088	0.034	0.018	0.007

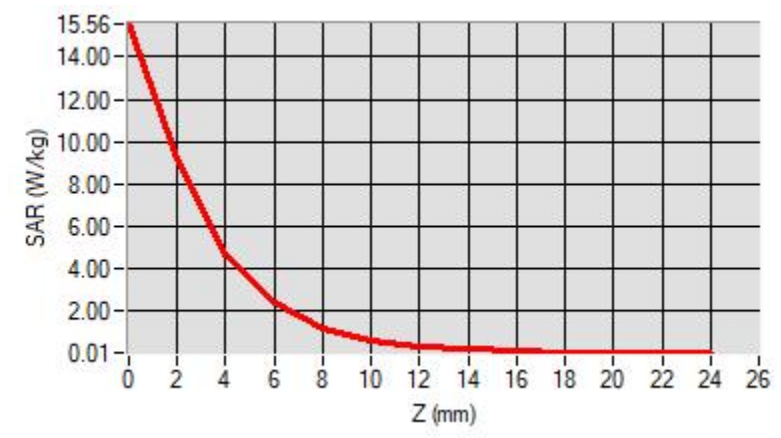

F. 3D Image

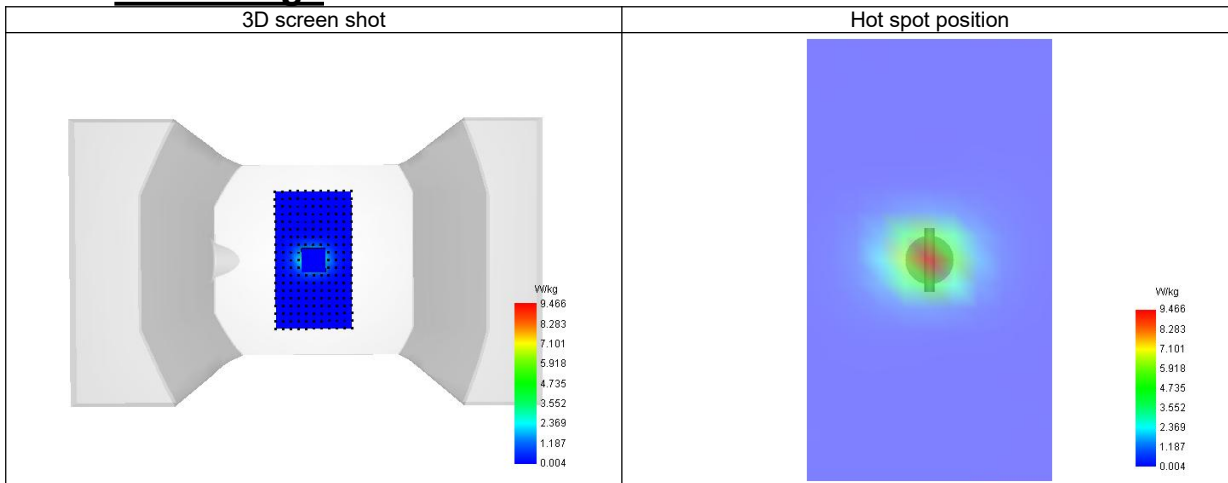

System Performance Check Data (5800 MHz)

System check at 5800 MHz

Date of measurement: 14/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.10
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	5800.000
Relative permittivity (real part)	34.584
Relative permittivity (imaginary part)	15.705
Conductivity (S/m)	5.061

C. SAR Surface and Volume

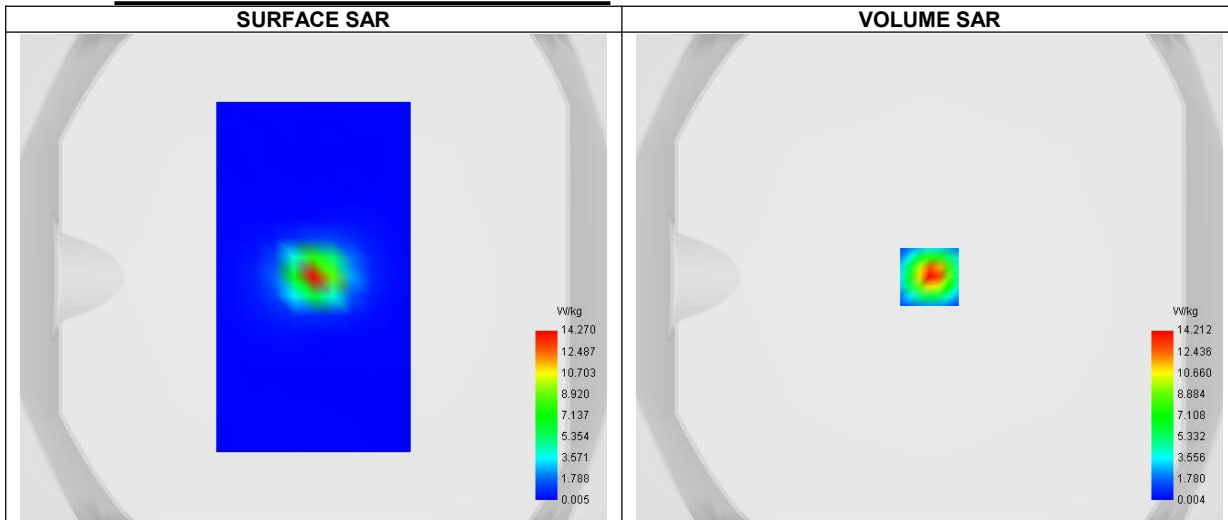


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 25.69 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.314
SAR 1g (W/Kg)	7.833
Variation (%)	-0.320
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	51.074525

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	23.906	14.212	7.259	3.742	1.939	0.990	0.524	0.252	0.131	0.057	0.033	0.017

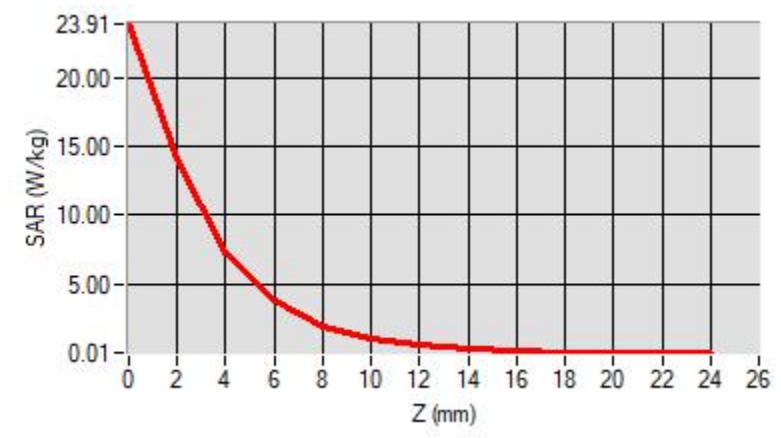

F. 3D Image

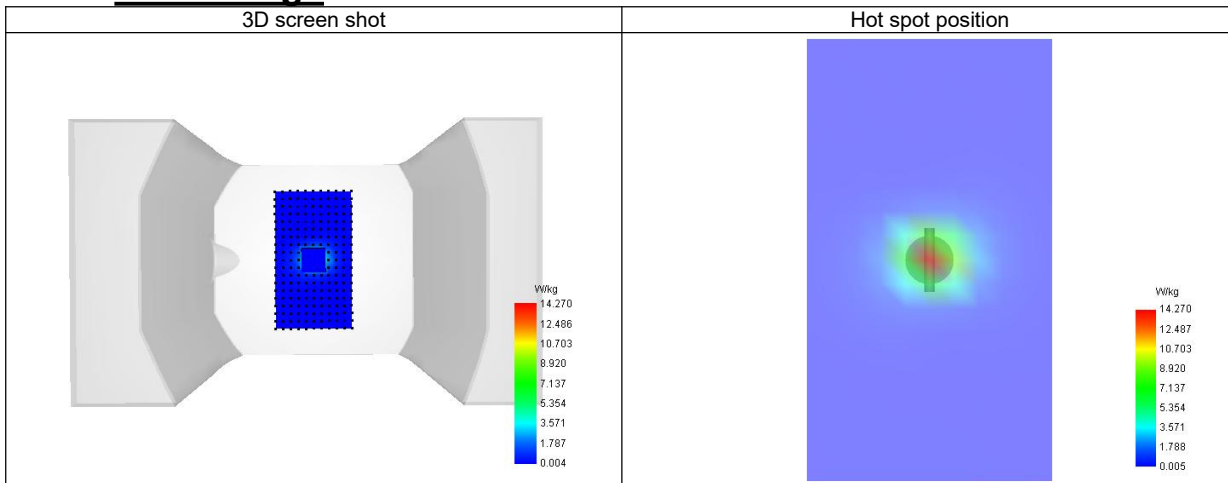

ANNEX D Test Data

1-Body with back position in dist. 0mm on Channel 1 in IEEE 802.11b ISM

SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 12/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Lower (1)/ frequency 2412.000 Mhz
Signal	IEEE 802.11 b

B. Permittivity

Middle TX Frequency (MHz)	2412.000
Relative permittivity (real part)	41.024
Relative permittivity (imaginary part)	13.685
Conductivity (S/m)	1.832

C. SAR Surface and Volume

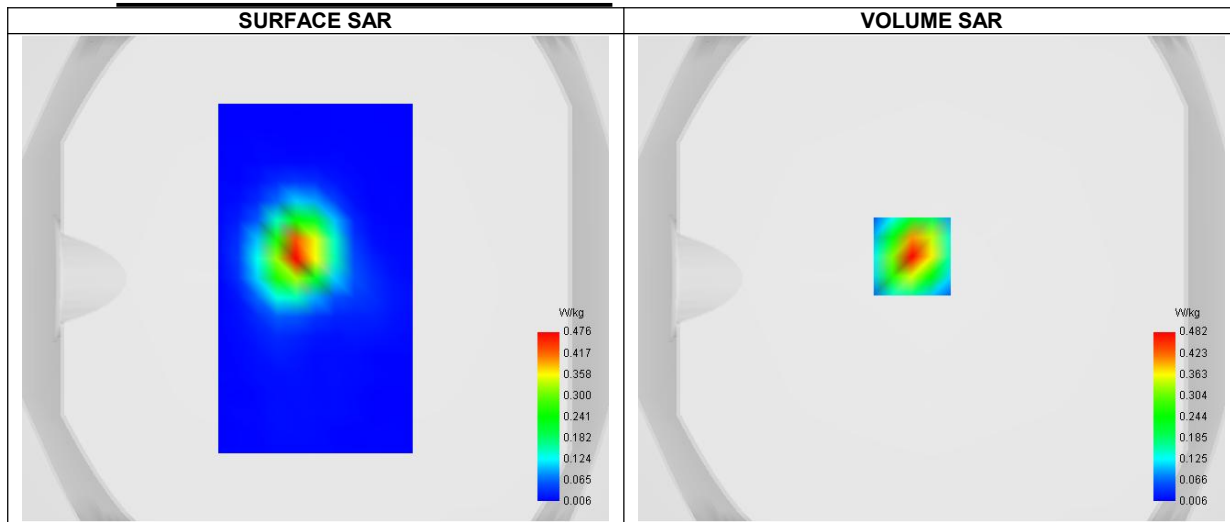


Maximum location: X=-8.00, Y=9.00 ; SAR Peak: 0.76 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.208
SAR 1g (W/Kg)	0.440
Variation (%)	-1.480
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	54.856026

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.755	0.482	0.264	0.146	0.079	0.040	0.022

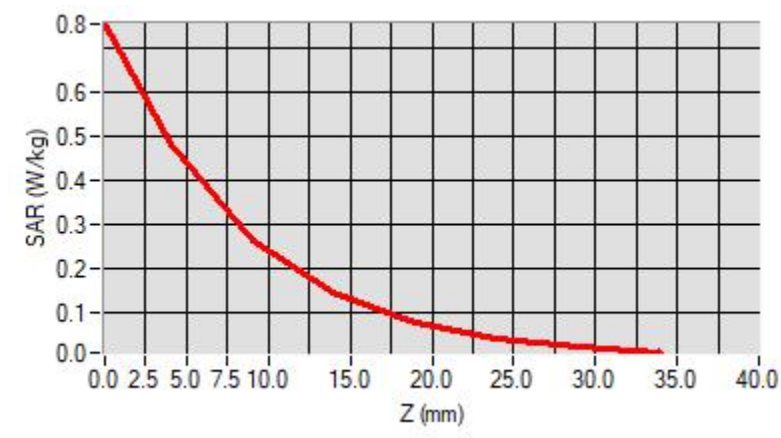

F. 3D Image

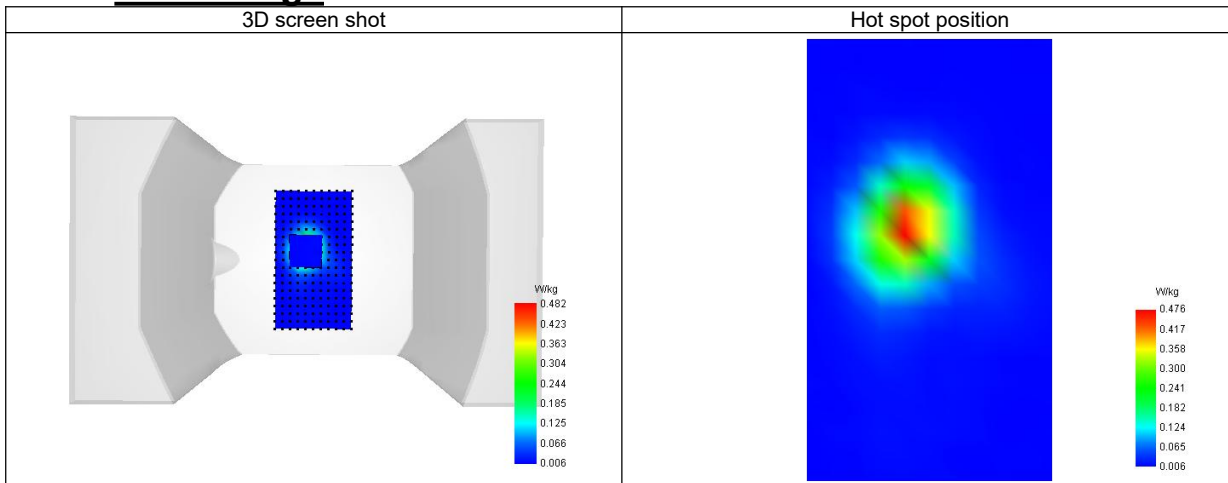

2-Body with back position in dist. 0mm on Channel 48 in IEEE 802.11n U-NII

SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 13/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.16
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Channels/Frequency	Higher (48)/ frequency 5240.000 Mhz
Signal	IEEE 802.11 n

B. Permittivity

Middle TX Frequency (MHz)	5240.000
Relative permittivity (real part)	34.551
Relative permittivity (imaginary part)	16.335
Conductivity (S/m)	4.549

C. SAR Surface and Volume

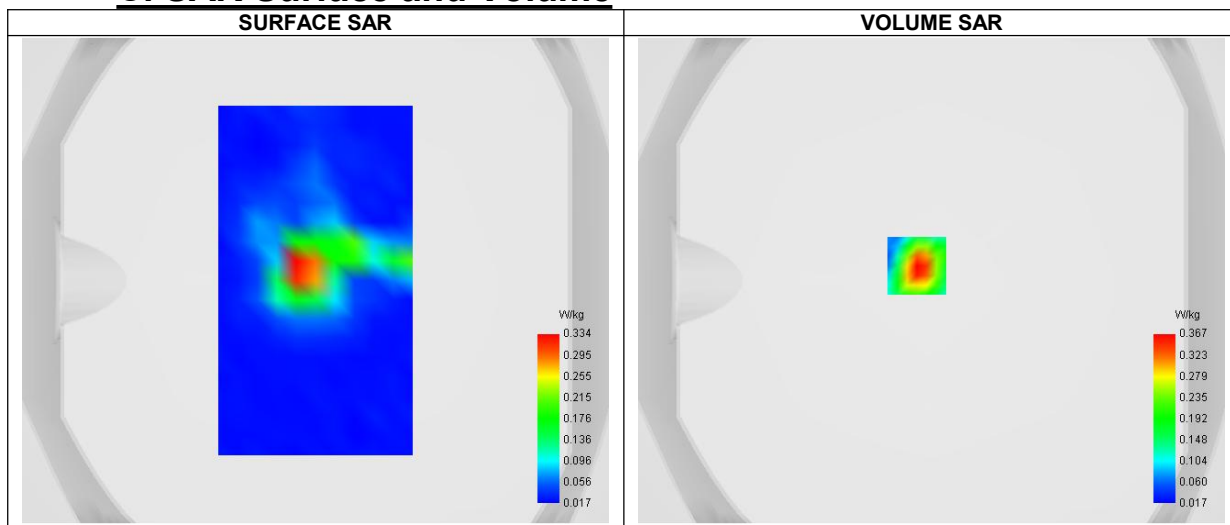


Maximum location: X=-6.00, Y=6.00 ; SAR Peak: 0.61 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.218
Variation (%)	-1.640
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.857140

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.600	0.367	0.212	0.108	0.072	0.042	0.028	0.023	0.026	0.024	0.020	0.018

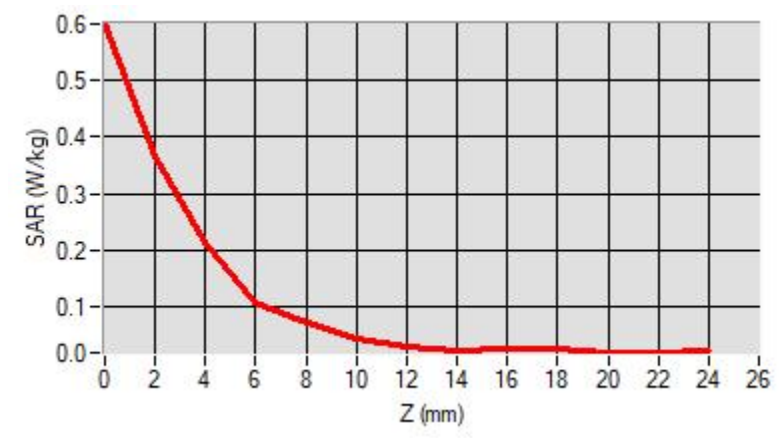

F. 3D Image

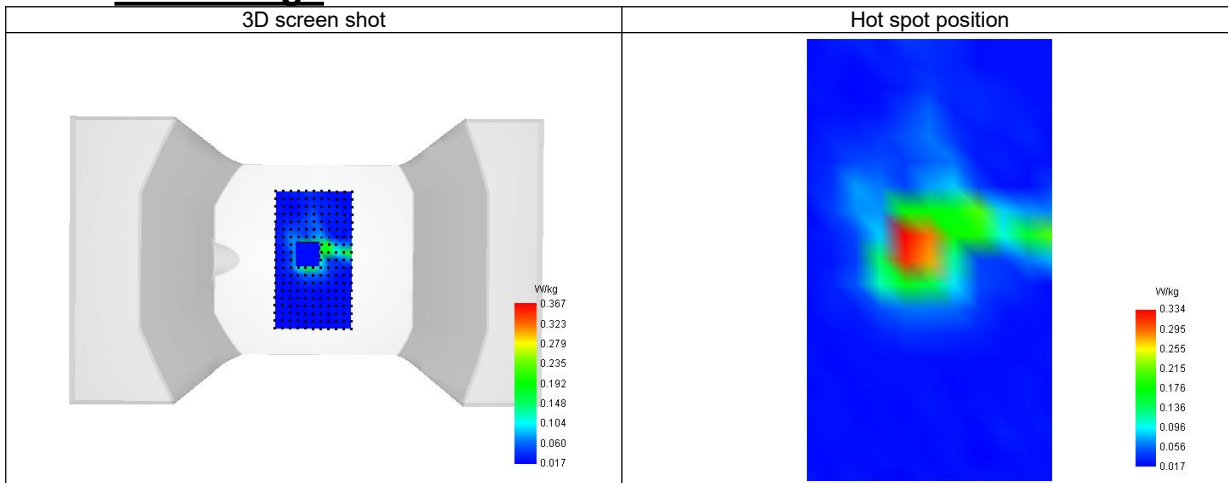

3-Body with back position in dist. 0mm on Channel 56 in IEEE 802.11n U-NII

SAR Measurement at U-NII-2a (Body, Validation Plane)

Date of measurement: 13/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.16
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-2a
Channels/Frequency	Middle (56)/ frequency 5280.000 Mhz
Signal	IEEE 802.11 n

B. Permittivity

Middle TX Frequency (MHz)	5280.000
Relative permittivity (real part)	34.913
Relative permittivity (imaginary part)	16.199
Conductivity (S/m)	4.707

C. SAR Surface and Volume

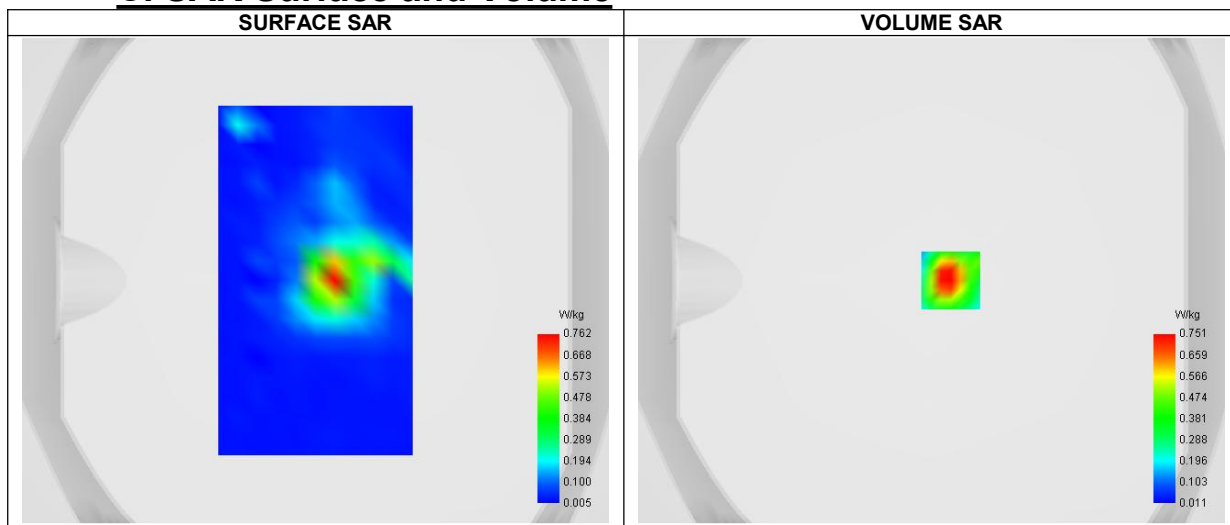


Maximum location: X=8.00, Y=0.00 ; SAR Peak: 1.28 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.170
SAR 1g (W/Kg)	0.464
Variation (%)	1.270
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	58.236607

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.177	0.751	0.437	0.270	0.157	0.095	0.056	0.043	0.038	0.031	0.020	0.023

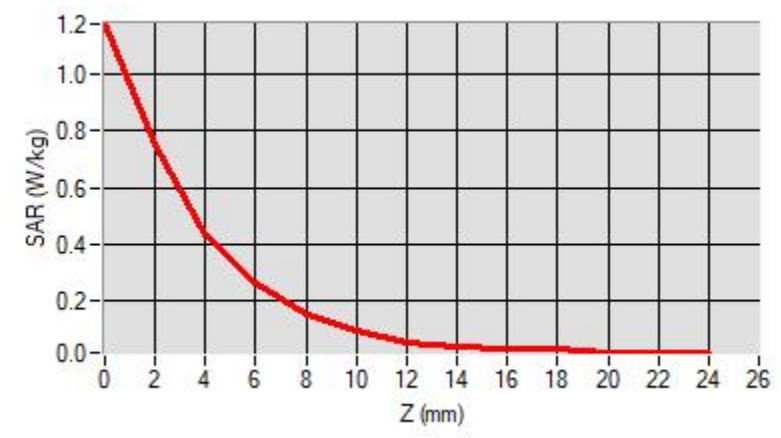

F. 3D Image

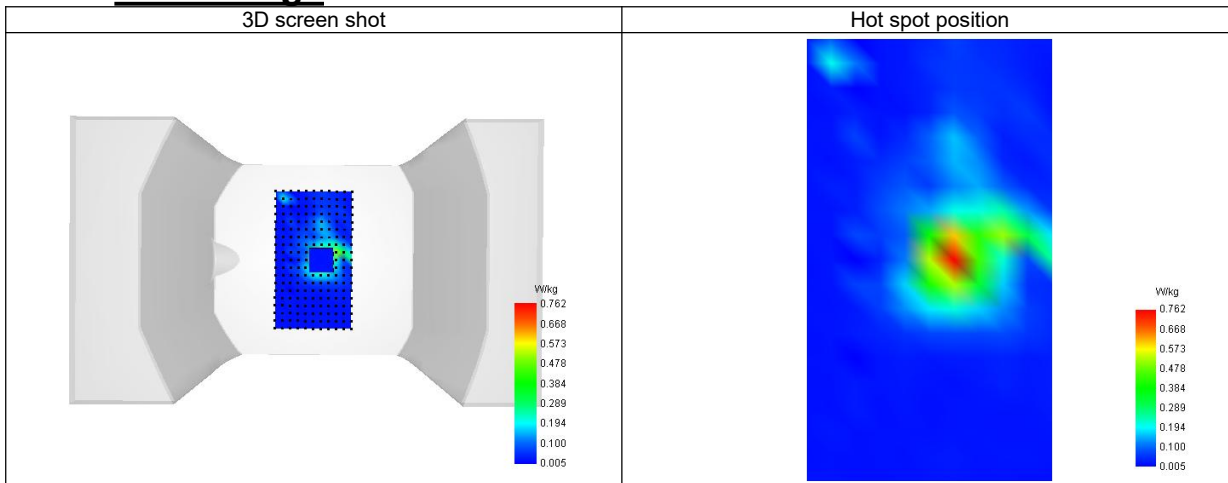

4-Body with back position in dist. 0mm on Channel 140 in IEEE 802.11n U-NII

SAR Measurement at U-NII-2c (Body, Validation Plane)

Date of measurement: 22/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	0.99
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-2c
Channels/Frequency	Higher (140)/ frequency 5700.000 Mhz
Signal	IEEE 802.11 n

B. Permittivity

Middle TX Frequency (MHz)	5700.000
Relative permittivity (real part)	34.774
Relative permittivity (imaginary part)	15.739
Conductivity (S/m)	4.984

C. SAR Surface and Volume

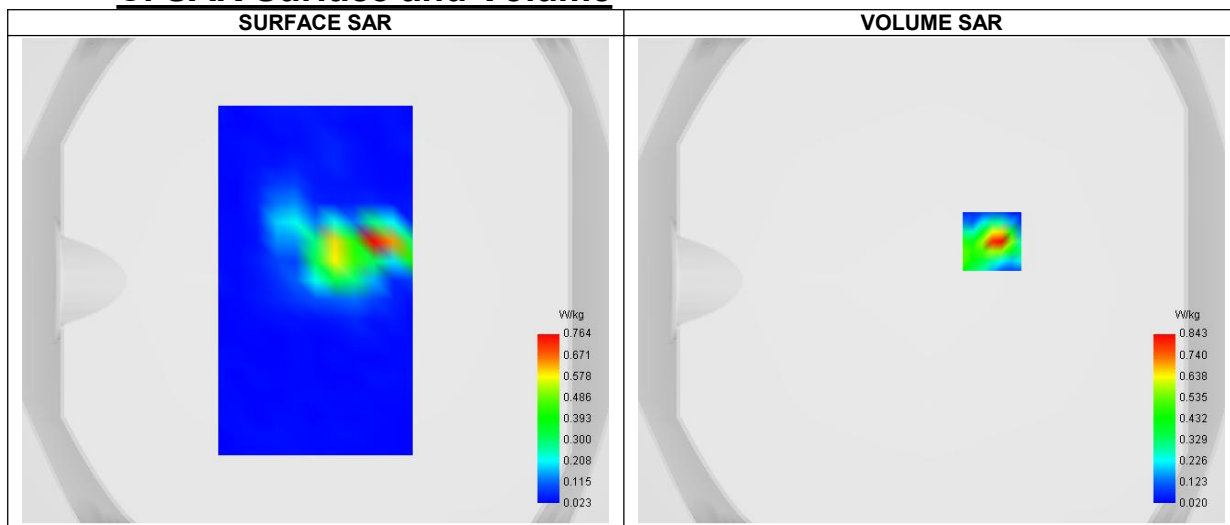


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.436
Variation (%)	-1.550
Horizontal validation criteria: minimum distance (mm)	11.656854
Vertical validation criteria: SAR ratio M2/M1 (%)	50.195610

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.433	0.843	0.309	0.245	0.098	0.073	0.033	0.029	0.026	0.027	0.030	0.023

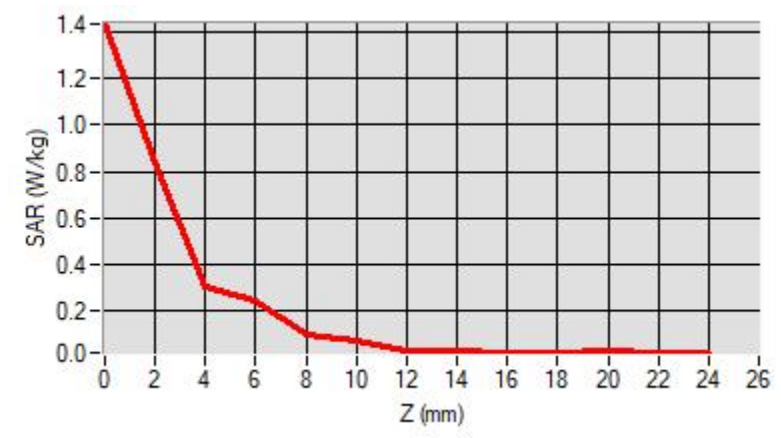

F. 3D Image

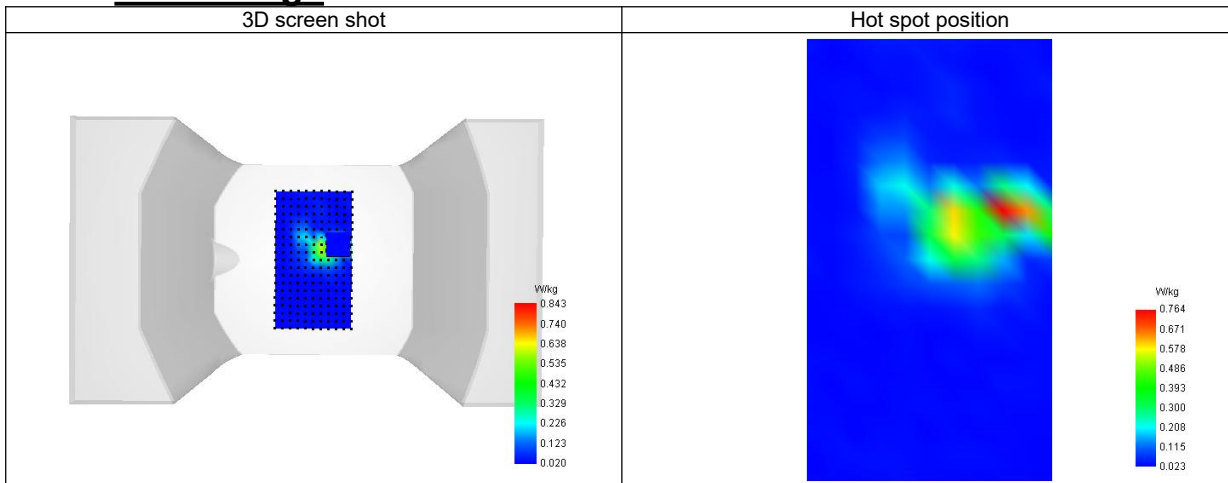

5-Body with back position in dist. 0mm on Channel 165 in IEEE 802.11a U-NII

SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 14/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.10
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Channels/Frequency	Higher (165)/ frequency 5825.000 Mhz
Signal	IEEE 802.11 a

B. Permittivity

Middle TX Frequency (MHz)	5825.000
Relative permittivity (real part)	34.487
Relative permittivity (imaginary part)	16.400
Conductivity (S/m)	5.044

C. SAR Surface and Volume

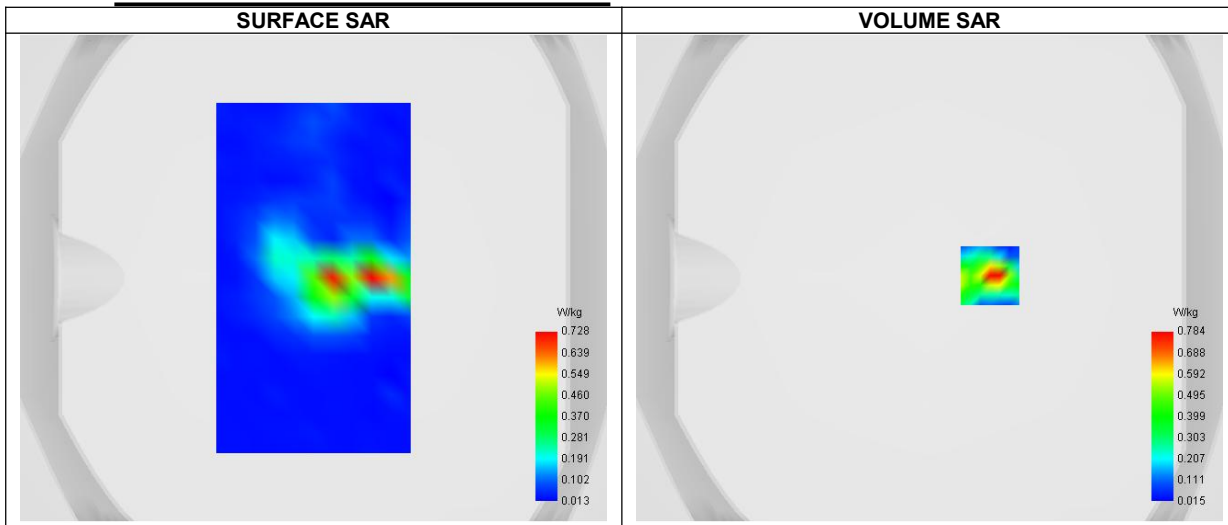


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.412
Variation (%)	-2.040
Horizontal validation criteria: minimum distance (mm)	17.656854
Vertical validation criteria: SAR ratio M2/M1 (%)	52.328845

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.341	0.784	0.314	0.216	0.089	0.056	0.037	0.030	0.028	0.027	0.038	0.024

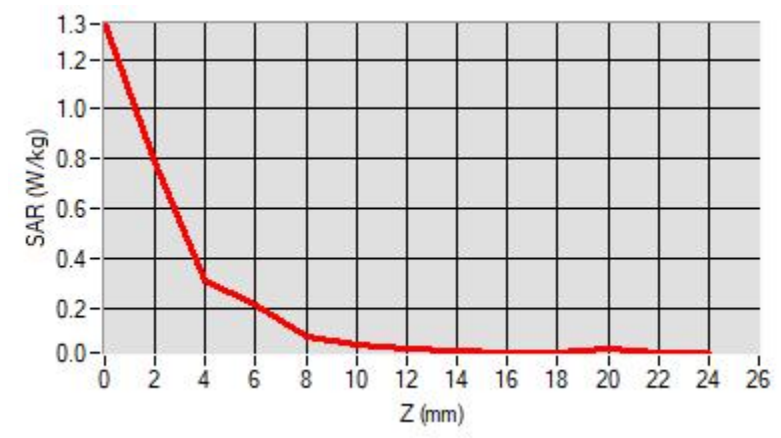

F. 3D Image

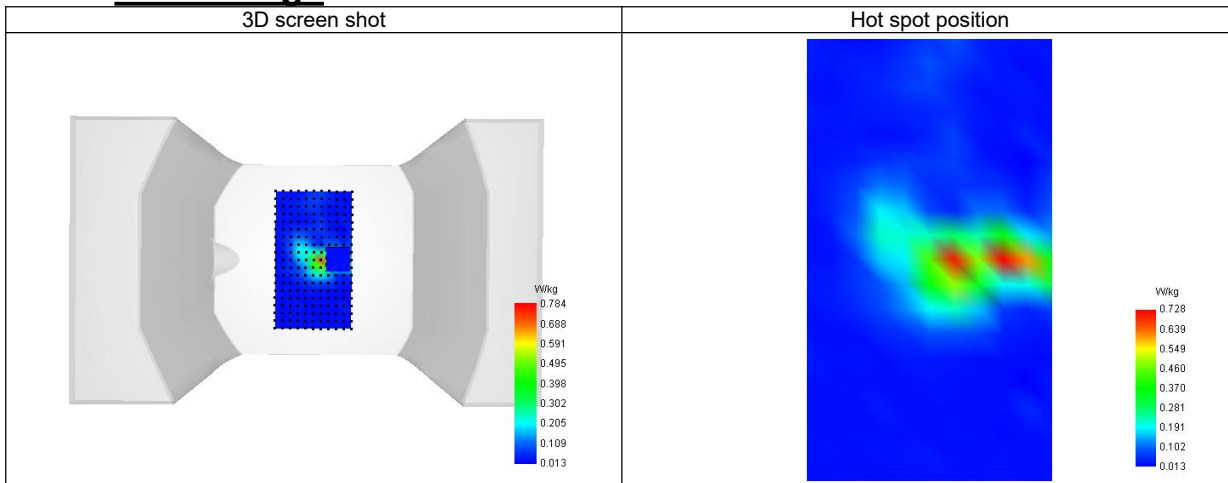

6-Body with back position in dist. 0mm on Channel 78 in Bluetooth

SAR Measurement at Bluetooth (Dipole, Validation Plane)

Date of measurement: 14/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	Bluetooth
Channels/Frequency	Higher (78)/ frequency 2480.000 Mhz
Signal	Bluetooth

B. Permittivity

Middle TX Frequency (MHz)	2480.000
Relative permittivity (real part)	40.714
Relative permittivity (imaginary part)	13.434
Conductivity (S/m)	1.872

C. SAR Surface and Volume

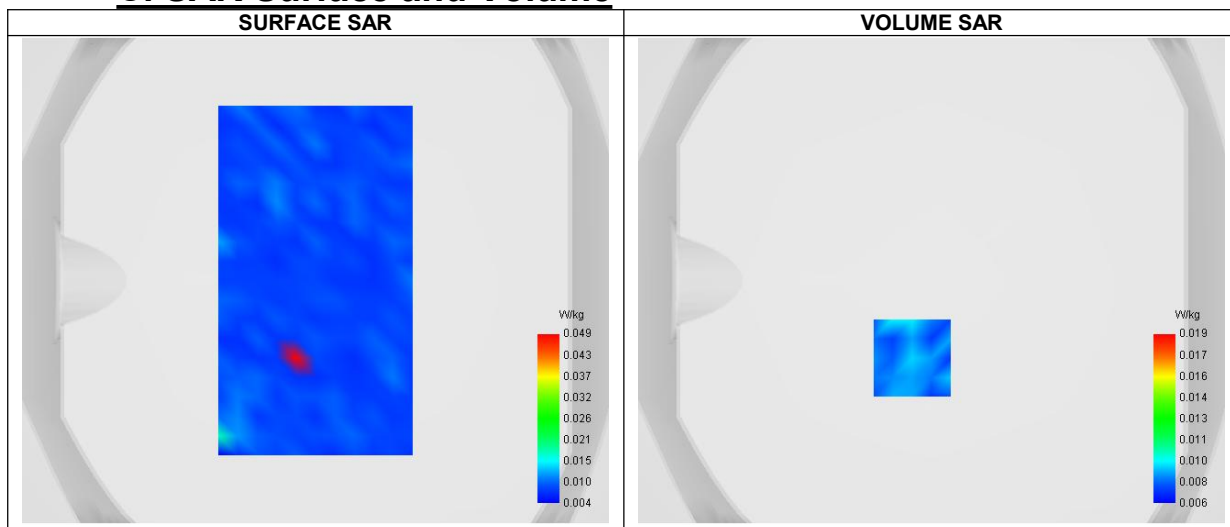


Maximum location: X=-8.00, Y=-32.00 ; SAR Peak: 0.01 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.006
SAR 1g (W/Kg)	0.010
Variation (%)	0.090
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	73.087979

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.014	0.009	0.007	0.007	0.007	0.008	0.008

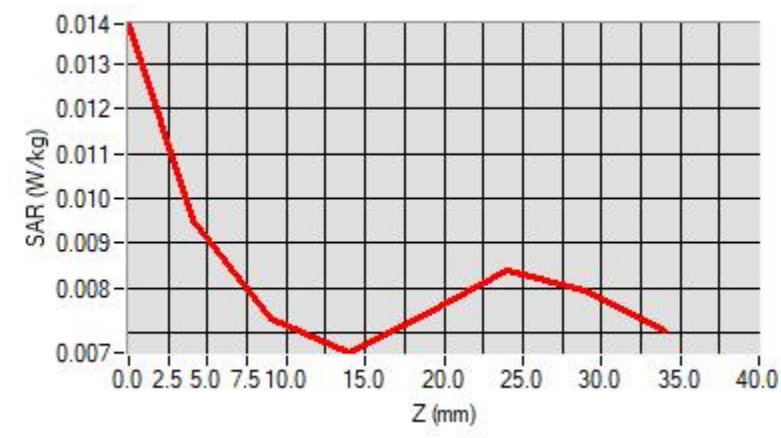

F. 3D Image

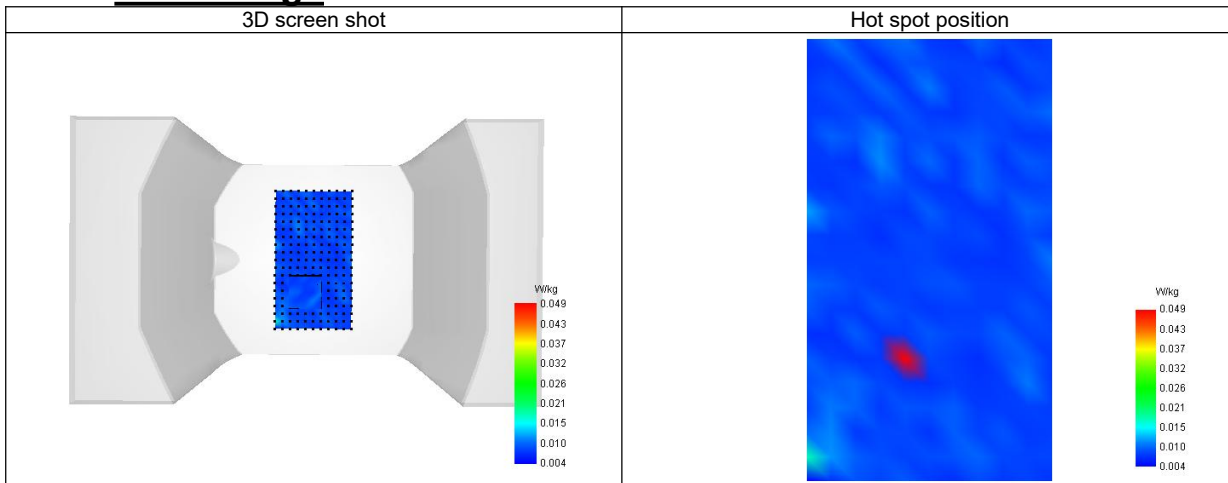

7-Body with back position in dist. 0mm on Channel 13 in IEEE 802.11b ISM

SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 12/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Higher (13)/ frequency 2472.000 Mhz
Signal	IEEE 802.11 b

B. Permittivity

Middle TX Frequency (MHz)	2472.000
Relative permittivity (real part)	40.801
Relative permittivity (imaginary part)	13.466
Conductivity (S/m)	1.875

C. SAR Surface and Volume

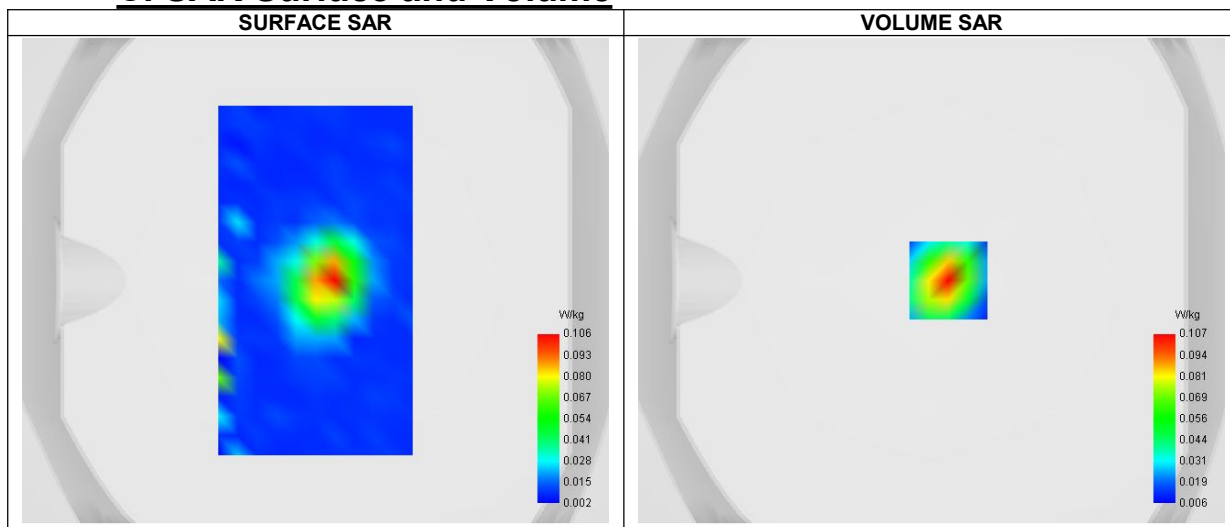


Maximum location: X=7.00, Y=0.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.446
SAR 1g (W/Kg)	0.397
Variation (%)	-1.860
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	53.484760

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.669	0.407	0.357	0.233	0.118	0.108	0.108

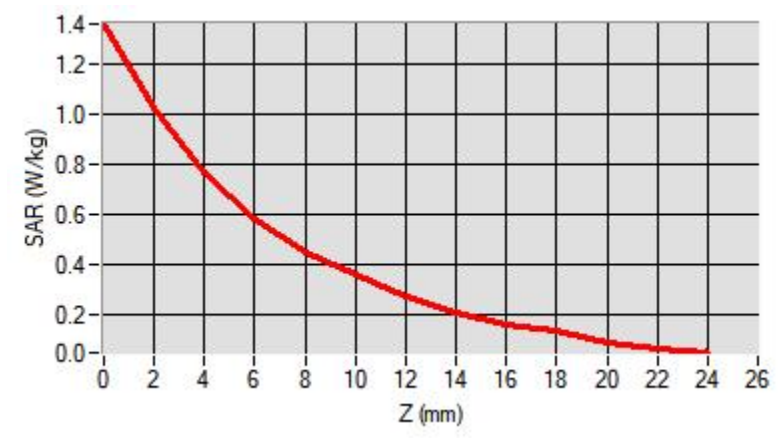

F. 3D Image

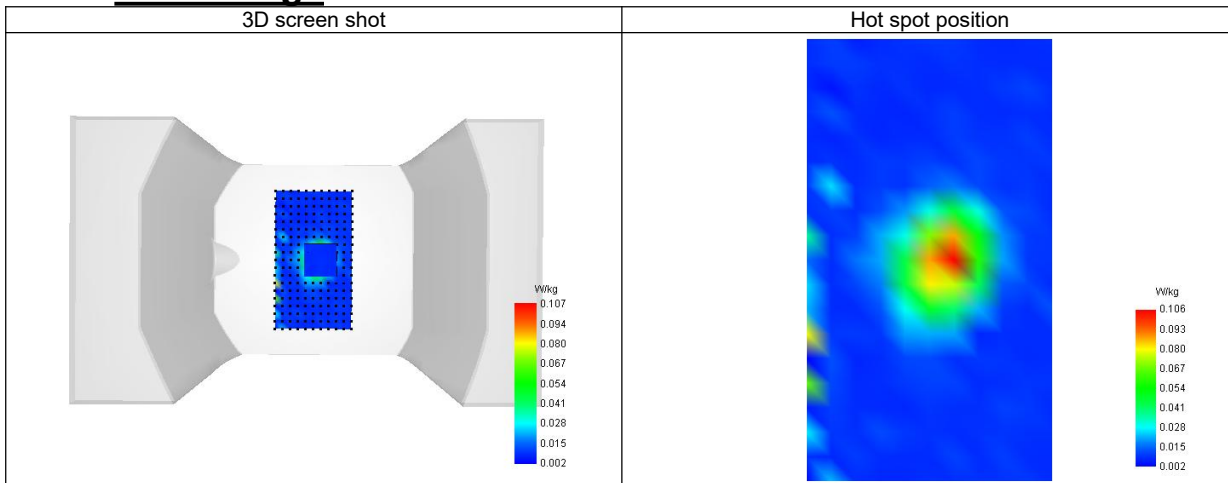

8-Body with back position in dist. 0mm on Channel 48 in IEEE 802.11a U-NII

SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 13/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.16
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Channels/Frequency	Higher (48)/ frequency 5240.000 Mhz
Signal	IEEE 802.11 ac

B. Permittivity

Middle TX Frequency (MHz)	5240.000
Relative permittivity (real part)	34.551
Relative permittivity (imaginary part)	16.335
Conductivity (S/m)	4.549

C. SAR Surface and Volume

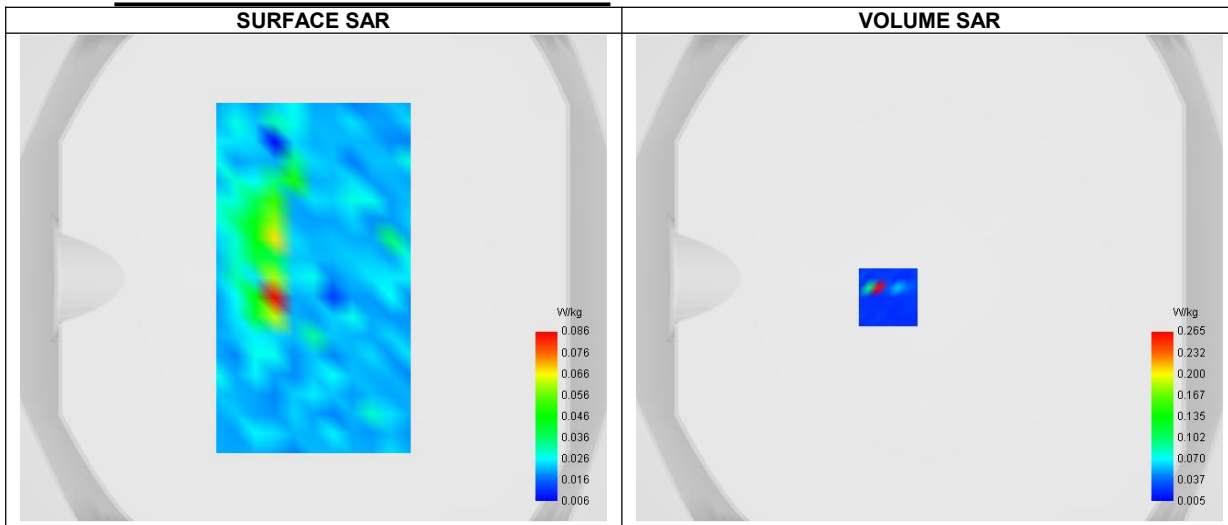


Maximum location: X=-17.00, Y=-8.00 ; SAR Peak: 0.83 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.223
SAR 1g (W/Kg)	0.174
Variation (%)	-2.680
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	46.858943

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.530	0.265	0.019	0.020	0.023	0.024	0.020	0.022	0.021	0.021	0.020	0.021

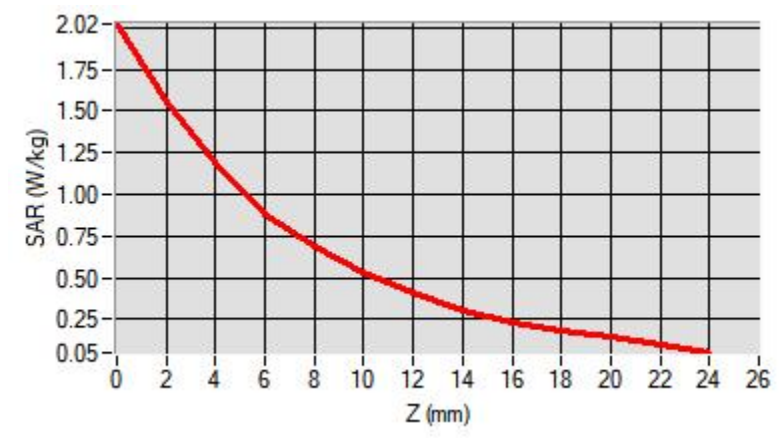

F. 3D Image

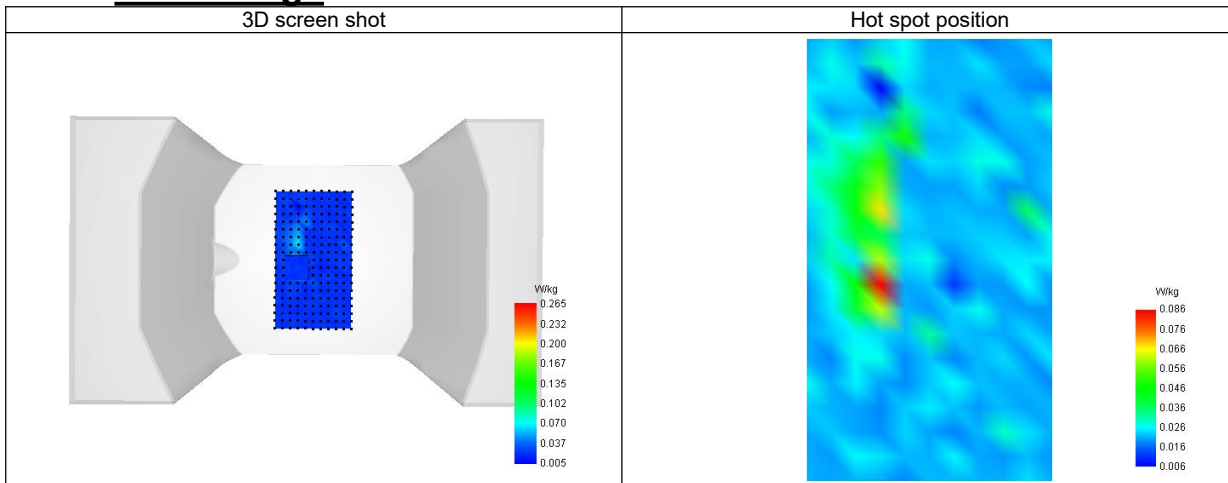

9-Body with back position in dist. 0mm on Channel 56 in IEEE 802.11a U-NII

SAR Measurement at U-NII-2a (Body, Validation Plane)

Date of measurement: 13/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.16
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-2a
Channels/Frequency	Middle (56)/ frequency 5280.000 Mhz
Signal	IEEE 802.11 n

B. Permittivity

Middle TX Frequency (MHz)	5280.000
Relative permittivity (real part)	34.913
Relative permittivity (imaginary part)	16.199
Conductivity (S/m)	4.707

C. SAR Surface and Volume

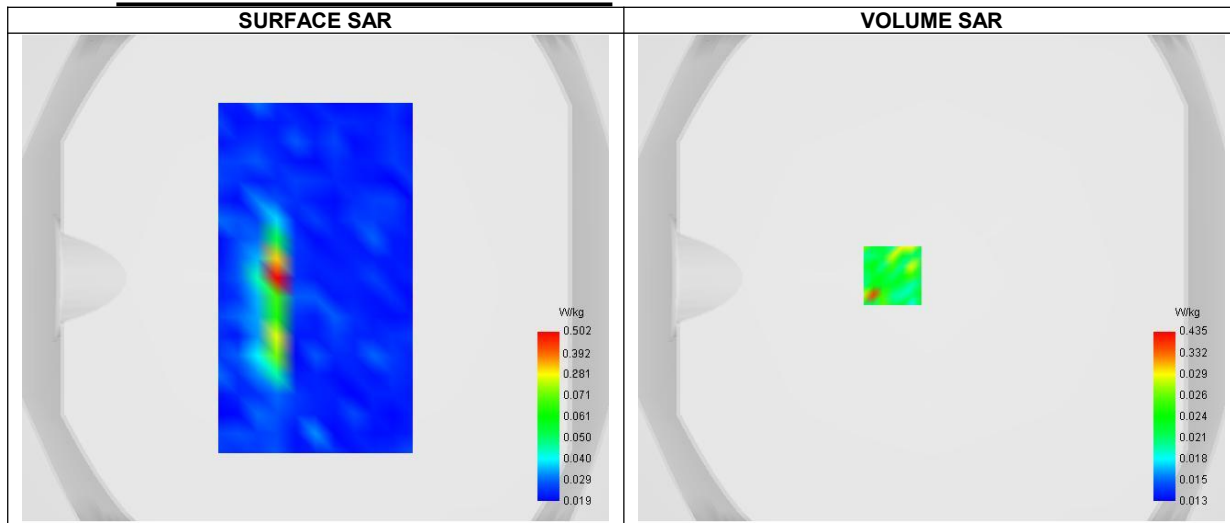


Maximum location: X=-16.00, Y=1.00 ; SAR Peak: 0.07 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.317
SAR 1g (W/Kg)	0.424
Variation (%)	-0.890
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	81.617780

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.747	0.633	0.524	0.420	0.323	0.282	0.224	0.204	0.171	0.128	0.100	0.023

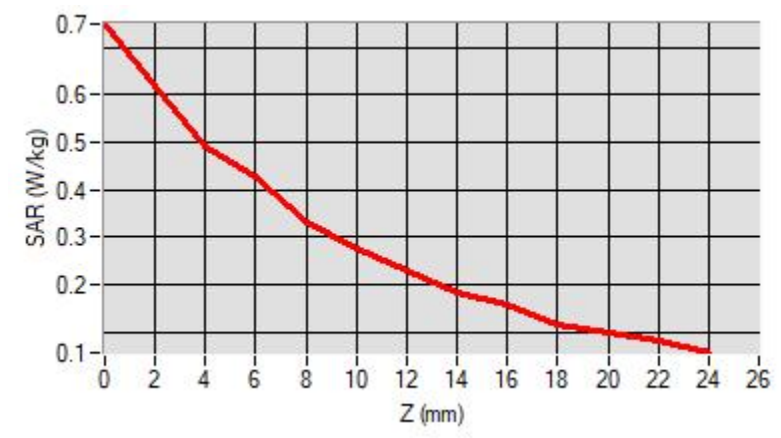

F. 3D Image

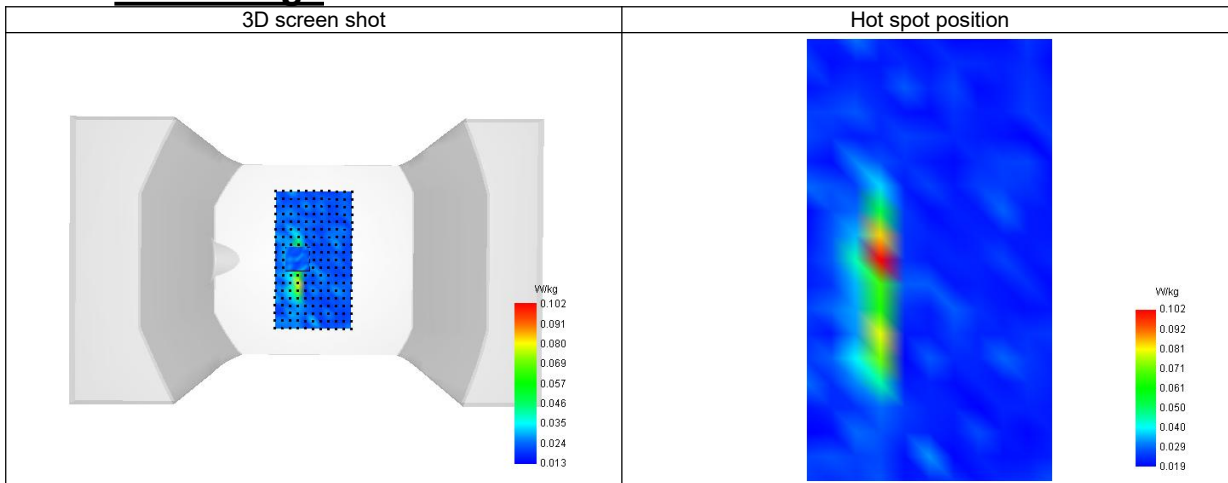

10-Body with back position in dist. 0mm on Channel 140 in IEEE 802.11n U-NII

SAR Measurement at U-NII-2c (Body, Validation Plane)

Date of measurement: 22/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.15
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-2c
Channels/Frequency	Lower (100)/ frequency 5500.000 Mhz
Signal	IEEE 802.11 a

B. Permittivity

Middle TX Frequency (MHz)	5500.000
Relative permittivity (real part)	35.411
Relative permittivity (imaginary part)	16.168
Conductivity (S/m)	4.880

C. SAR Surface and Volume

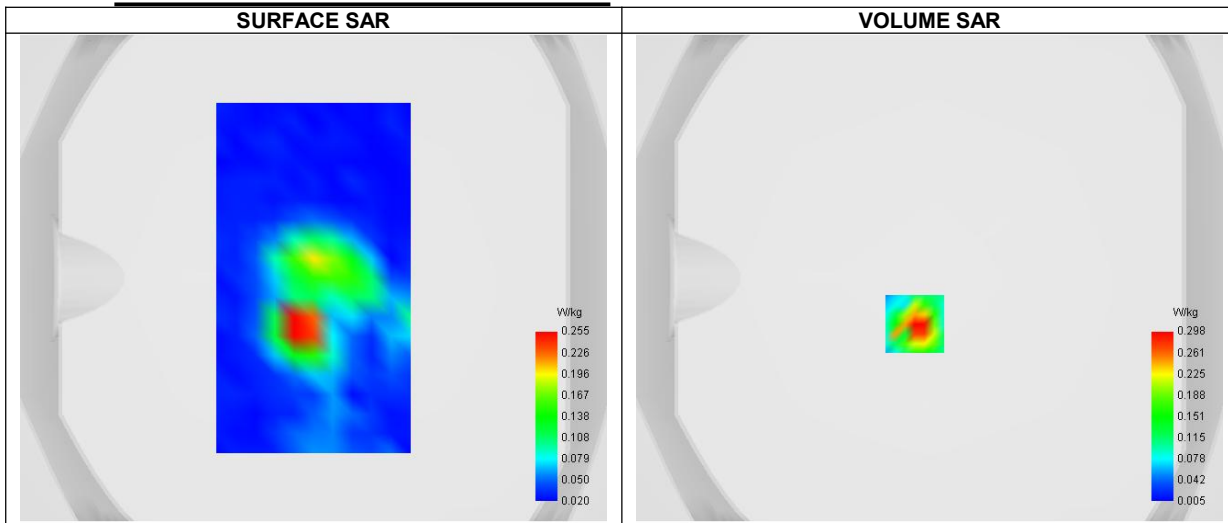


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.255
Variation (%)	-2.200
Horizontal validation criteria: minimum distance (mm)	5.656854
Vertical validation criteria: SAR ratio M2/M1 (%)	55.159820

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.494	0.298	0.164	0.095	0.047	0.041	0.030	0.028	0.023	0.029	0.022	0.020

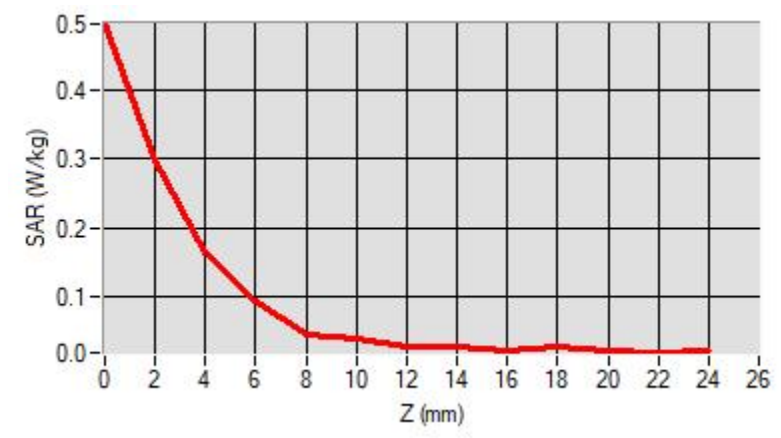

F. 3D Image

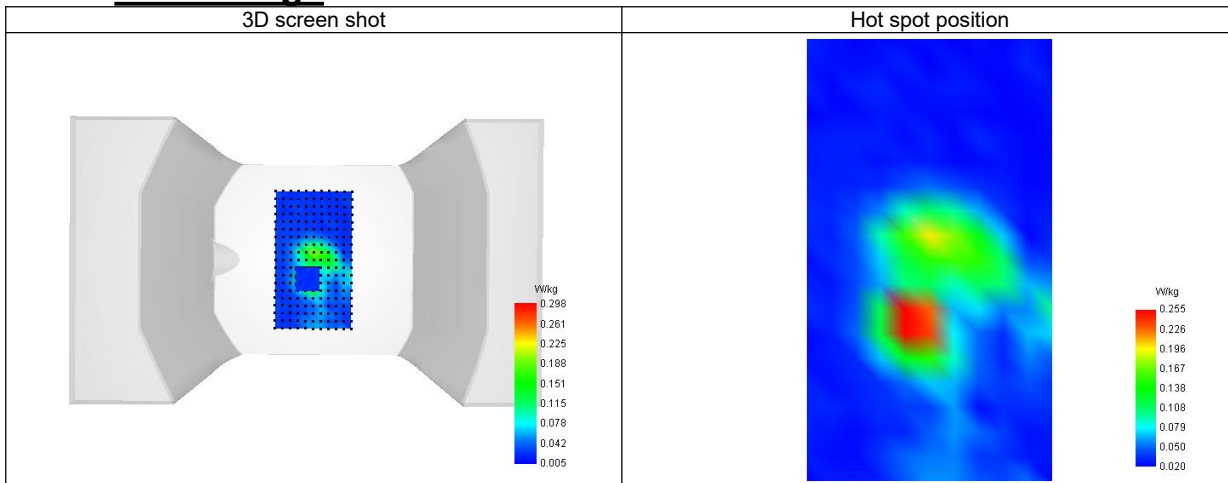

11-Body with back position in dist. 0mm on Channel 165 in IEEE 802.11a U-NII

SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 14/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.10
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Channels/Frequency	Higher (165)/ frequency 5825.000 Mhz
Signal	IEEE 802.11 a

B. Permittivity

Middle TX Frequency (MHz)	5825.000
Relative permittivity (real part)	34.487
Relative permittivity (imaginary part)	16.400
Conductivity (S/m)	5.044

C. SAR Surface and Volume

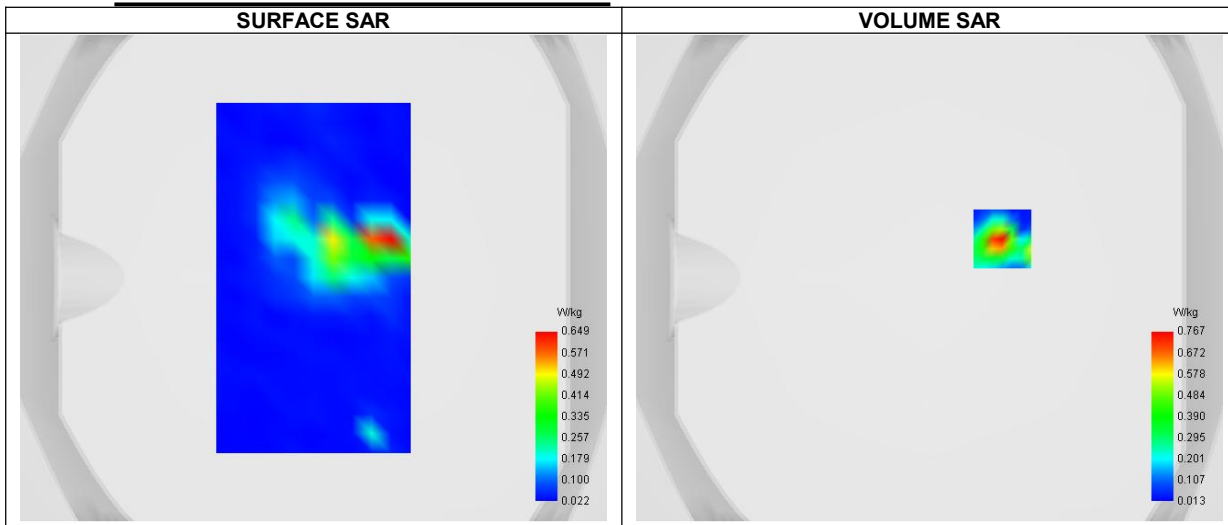


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.391
Variation (%)	-4.480
Horizontal validation criteria: minimum distance (mm)	8.656854
Vertical validation criteria: SAR ratio M2/M1 (%)	49.163700

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.294	0.767	0.377	0.199	0.108	0.054	0.031	0.027	0.023	0.024	0.023	0.028

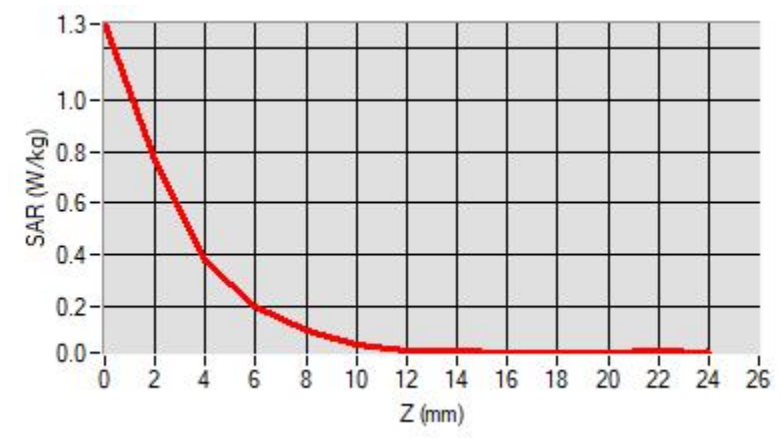

F. 3D Image

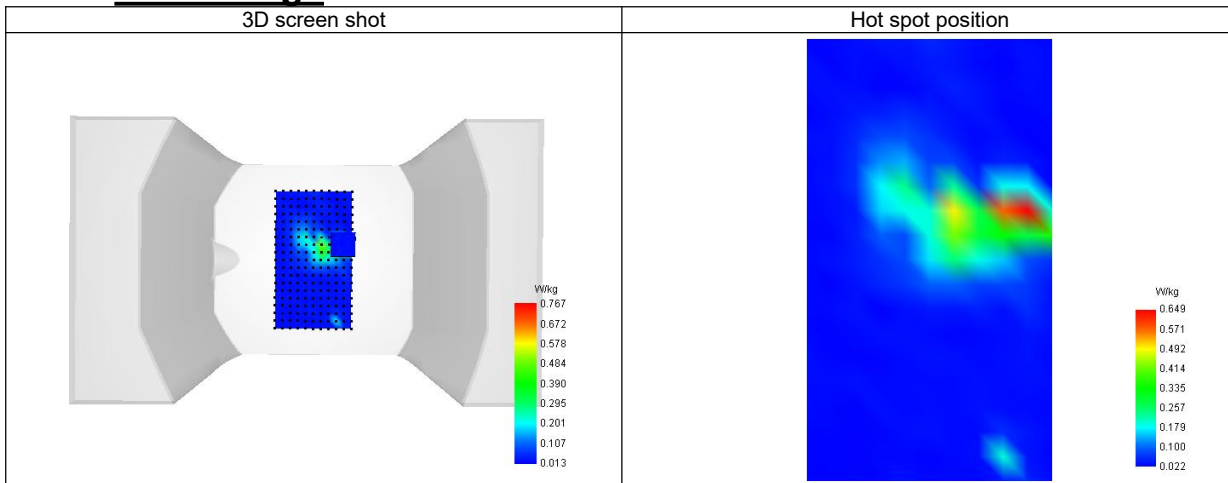

12-Body with back position in dist. 0mm on Channel 78 in Bluetooth

SAR Measurement at Bluetooth (Body, Validation Plane)

Date of measurement: 12/7/2026


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	Bluetooth
Channels/Frequency	Higher (78)/ frequency 2480.000 Mhz
Signal	Bluetooth

B. Permittivity

Middle TX Frequency (MHz)	2480.000
Relative permittivity (real part)	40.714
Relative permittivity (imaginary part)	13.434
Conductivity (S/m)	1.872

C. SAR Surface and Volume

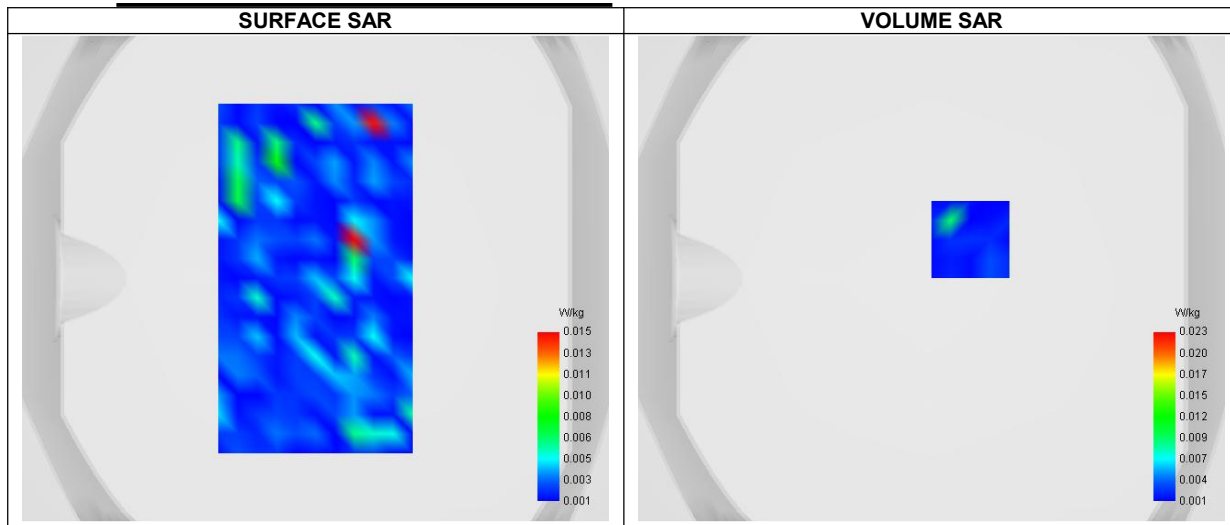


Maximum location: X=16.00, Y=16.00 ; SAR Peak: 0.02 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.003
SAR 1g (W/Kg)	0.008
Variation (%)	-1.220
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.351784

E. Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.023	0.009	0.004	0.001	0.002	0.002	0.001

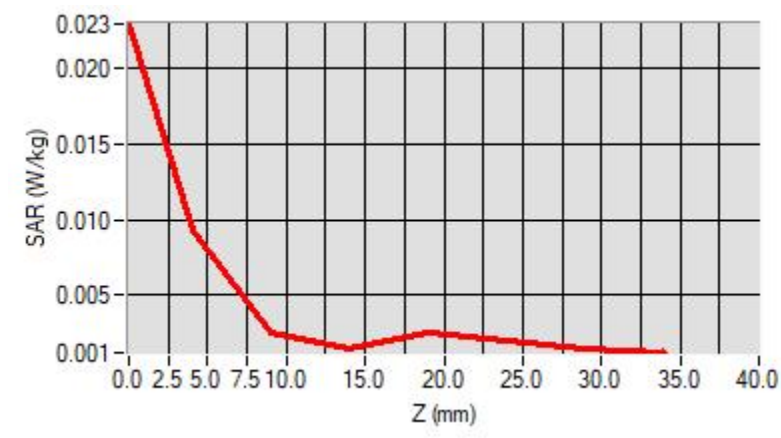

F. 3D Image

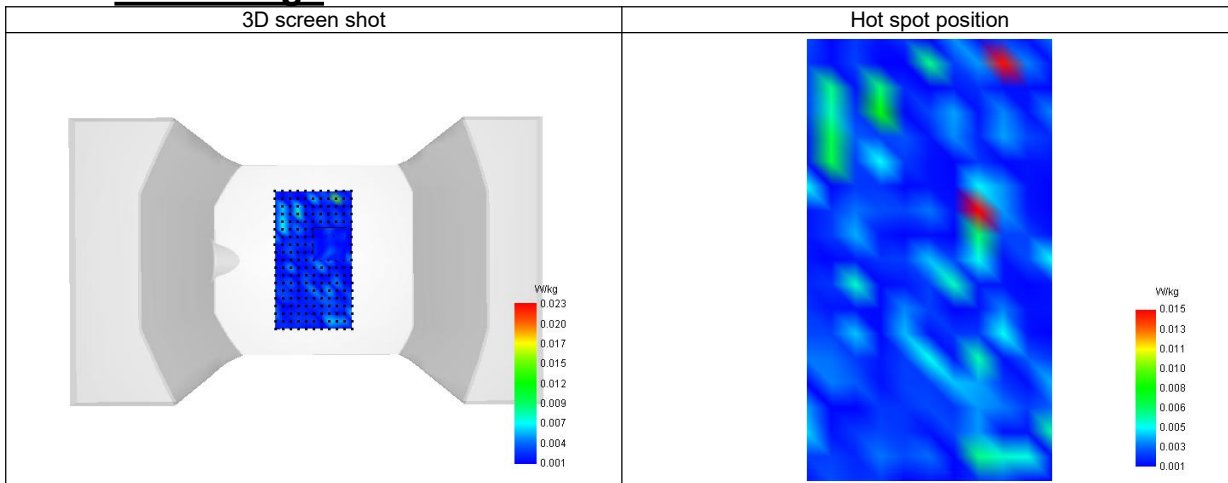

ANNEX D SAR Test Setup Photos

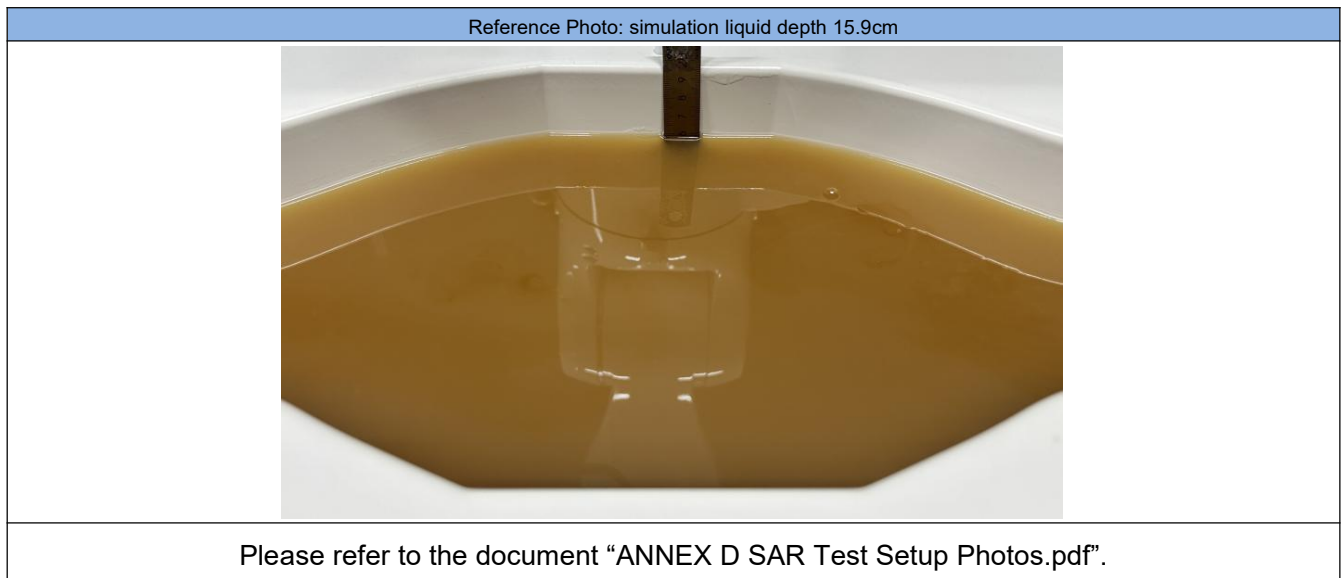

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--