

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 4**

TEST REPORT

For

INFINITY ACTION TABLE

MODEL NUMBER: IAT-I-405800

REPORT NUMBER: 4791547971-1-RF-1

ISSUE DATE: November 19, 2025

**FCC ID: 2APXHIAT
IC: 24128-IAT**

Prepared for

**FCC: WF TASTEMAKERS TRADING LIMITED
IC: Tastemakers, LLC**

**FCC Address: Unit 402-5, 4/F, New East Ocean Centre, 9 Science Museum Road,
Tsim Sha Tsui East, Kowloon Hong Kong 852, China**

**ISED Address: 51 NE 24th Street, Suite 202 Miami FL 33137 United States Of
America**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	November 19, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 6.3.2	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 6.3.1 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 6.3.1 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 6.6 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note: For ISED, this report is also performed according to ANSI C63.10-2020+Cor.1-2023 standards.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 4> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>11</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	12
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>15</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i>	<i>16</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>18</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i>	<i>19</i>
7.5. <i>DUTY CYCLE</i>	<i>21</i>
8. RADIATED TEST RESULTS	22
8.1. <i>RESTRICTED BANDEDGE</i>	<i>30</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>64</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>74</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>114</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>117</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>119</i>
9. ANTENNA REQUIREMENT	121
10. AC POWER LINE CONDUCTED EMISSION	122
11. TEST DATA.....	125

11.1.	<i>APPENDIX A: DTS BANDWIDTH</i>	125
11.1.1.	Test Result.....	125
11.1.2.	Test Graphs	126
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i>	133
11.2.1.	Test Result.....	133
11.2.2.	Test Graphs	134
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER</i>	141
11.3.1.	Test Result.....	141
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</i>	142
11.4.1.	Test Result.....	142
11.4.2.	Test Graphs	143
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS</i>	150
11.5.1.	Test Result.....	150
11.5.2.	Test Graphs	151
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i>	157
11.6.1.	Test Result.....	157
11.6.2.	Test Graphs	159
11.7.	<i>APPENDIX G: DUTY CYCLE</i>	179
11.7.1.	Test Result.....	179
11.7.2.	Test Graphs	180

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: FCC: WF TASTEMAKERS TRADING LIMITED
IC: Tastemakers, LLC
Address: FCC: Unit 402-5, 4/F, New East Ocean Centre, 9 Science
Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong 852,
China
ISED: 51 NE 24th Street, Suite 202, Miami, Florida, FL 33137
United States of America

Manufacturer Information

Company Name: FCC: WF TASTEMAKERS TRADING LIMITED
IC: Tastemakers, LLC
Address: FCC: Unit 402-5, 4/F, New East Ocean Centre, 9 Science
Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong 852,
China
ISED: 51 NE 24th Street, Suite 202, Miami, Florida, FL 33137
United States of America

EUT Information

EUT Name: INFINITY ACTION TABLE
Model: IAT-I-405800
Sample Received Date: December 6, 2024
Sample Status: Normal
Sample ID: 7913580
Date of Tested: December 7, 2024 to November 19, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 4	Pass


Prepared By:



Johnson Liu

Laboratory Engineer

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISSED RSS-247 ISSUE 4, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, ANSI C63.10-2020+Cor.1-2023 and ISSED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
---------------------------	---

Note 1:

All tests measurement facilities use to collect the original measurement data of this report are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China. And the new lab address after relocation is Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	INFINITY ACTION TABLE
Model	IAT-I-405800

Frequency Range:	2412 MHz to 2472 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/11n HT40
Normal Test Voltage:	AC 120V 60Hz

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452	13	2472
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	12	2467	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452	/	/
4	2427	7	2442	10	2457	/	/
5	2432	8	2447	11	2462	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2472	1-11[11]	14.46
g	2412 ~ 2472	1-11[11]	9.93
n HT20	2412 ~ 2472	1-11[11]	8.04
n HT40	2422 ~ 2462	3-9[7]	7.88

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel), CH 12, CH 13	2412 MHz, 2437 MHz, 2462 MHz, 2467 MHz, 2472 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel), CH 12, CH 13	2412 MHz, 2437 MHz, 2462 MHz, 2467 MHz, 2472 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel), CH 12, CH 13	2412 MHz, 2437 MHz, 2462 MHz, 2467 MHz, 2472 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel), CH 10, CH 11	2422 MHz, 2437 MHz, 2452 MHz, 2457 MHz, 2462 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		Engineer Mode					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	13	14	13	/		
802.11g	1	9	9	8			
802.11n HT20	1	7	7	6			
802.11n HT40	1	/			7	7	6

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		Engineer Mode					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 12	CH 13	/	CH 10	CH 11	/
802.11b	1	13	13	/	/		
802.11g	1	8	0	/			
802.11n HT20	1	6	0	/			
802.11n HT40	1	/			6	6	/

WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2472	External antenna	2.2

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒ 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

Note:
1.BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously.
(declared by client)

5.7. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested in engineering mode independently.

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	/	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Software						
Description		Manufacturer	Name			Version
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32			10.60.10
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	/	Dec.27,2024	Dec.26,2025
Software						
Description	Manufacturer	Name			Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22	

Conducted Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Software						
Description			Manufacturer	Name		Version
Test Software for Conducted Emissions			Farad	EZ-EMC		Ver. UL-3A1

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	/	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Horn Antenna	TDK	HRN-0118	130940	/	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Horn Antenna	Schwarzbeck	BBHA9170	697	/	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	/	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Software						
Description			Manufacturer	Name		Version
Test Software for Radiated Emissions			Farad	EZ-EMC		Ver. UL-3A1

Other Instrument						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 6.3.2	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	55.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 8, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 6.3.1(a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5°C	Relative Humidity	55.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 8, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 6.3.1 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$> 1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	55.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 8, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 6.6	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5°C	Relative Humidity	55.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 8, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

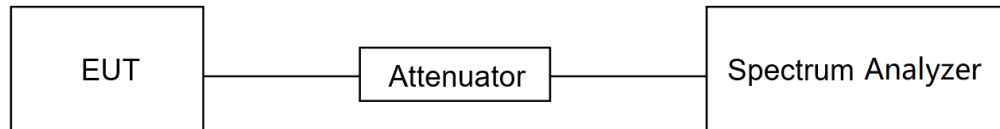

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	55.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 8, 2024	Test By	Walker Yuan
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

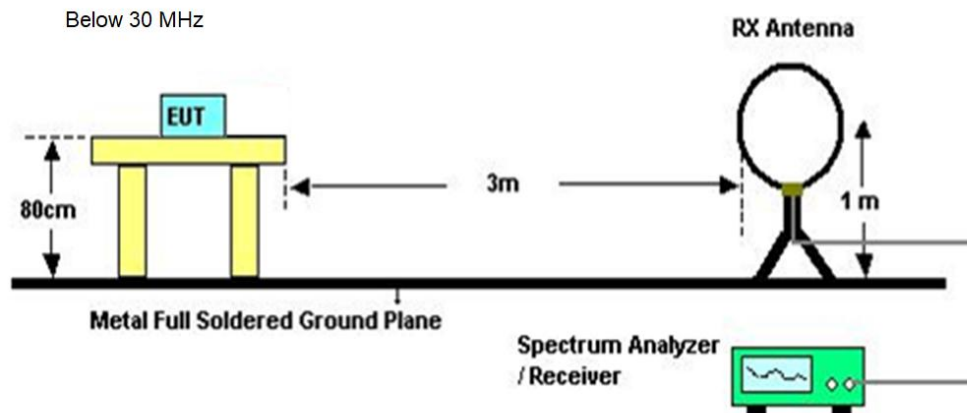

Below 1 GHz and above 30 MHz

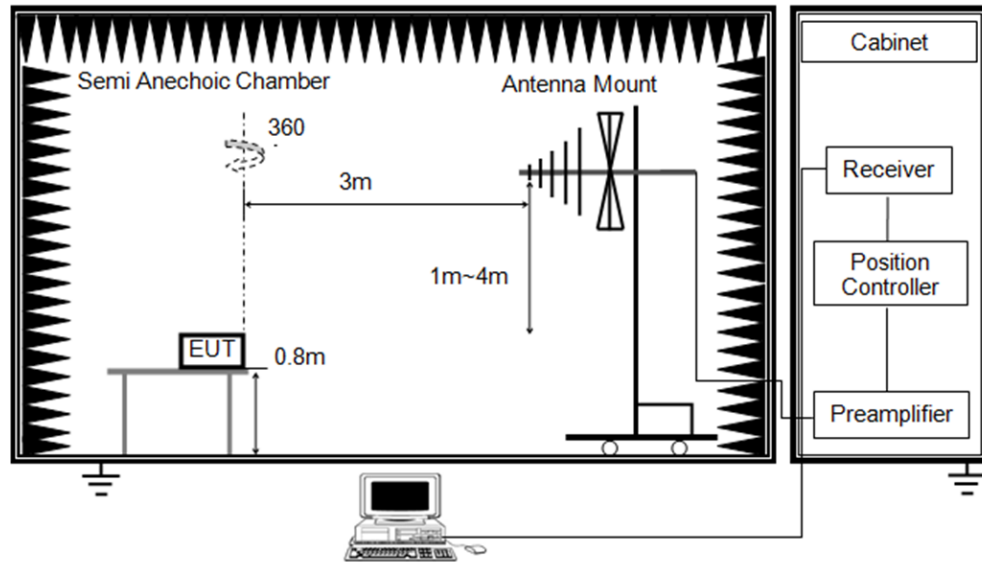

Above 1GHz

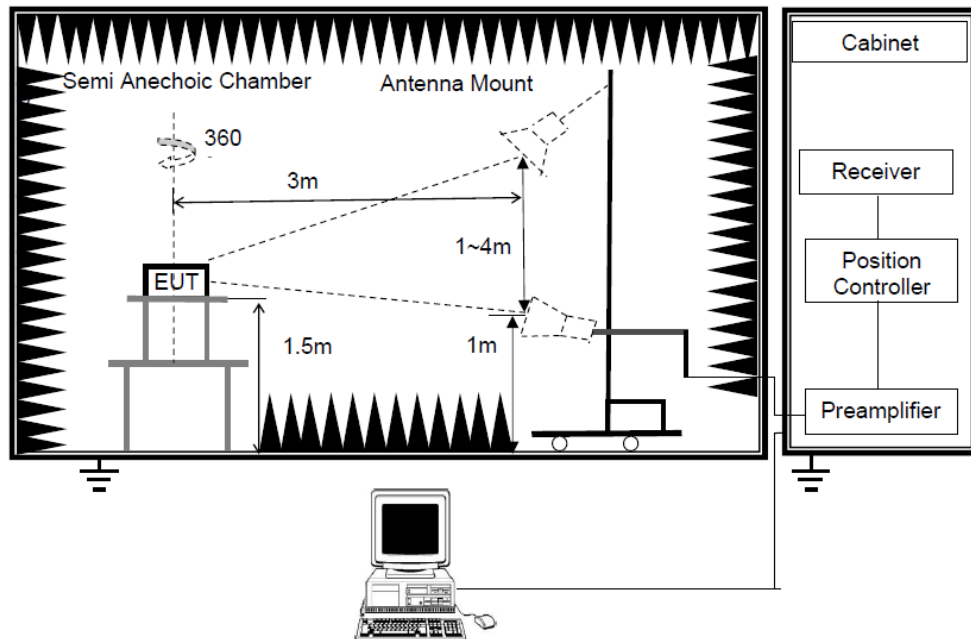

TEST ENVIRONMENT

Temperature	23.4℃	Relative Humidity	53.8%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	December 26, 2024	Test By	Deacon Tan
-----------	-------------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

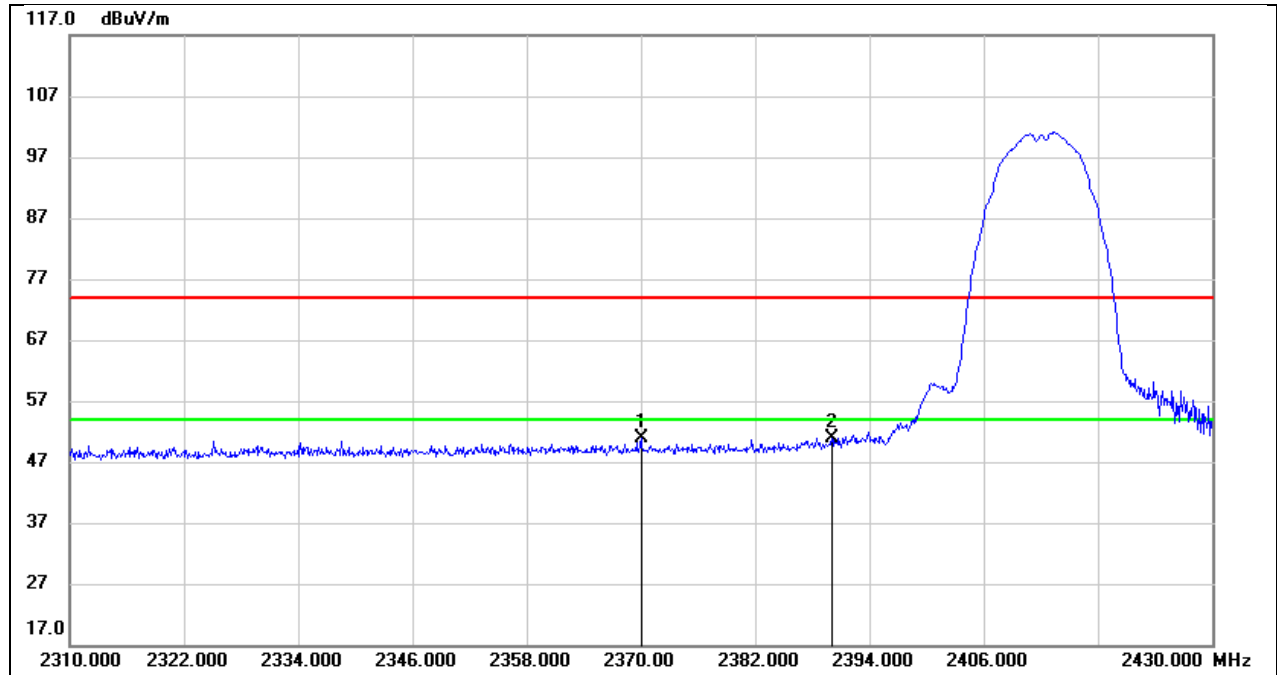


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2370.000	16.52	34.27	50.79	74.00	-23.21	peak
2	2390.000	16.35	34.45	50.80	74.00	-23.20	peak

Test Mode:	802.11b PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

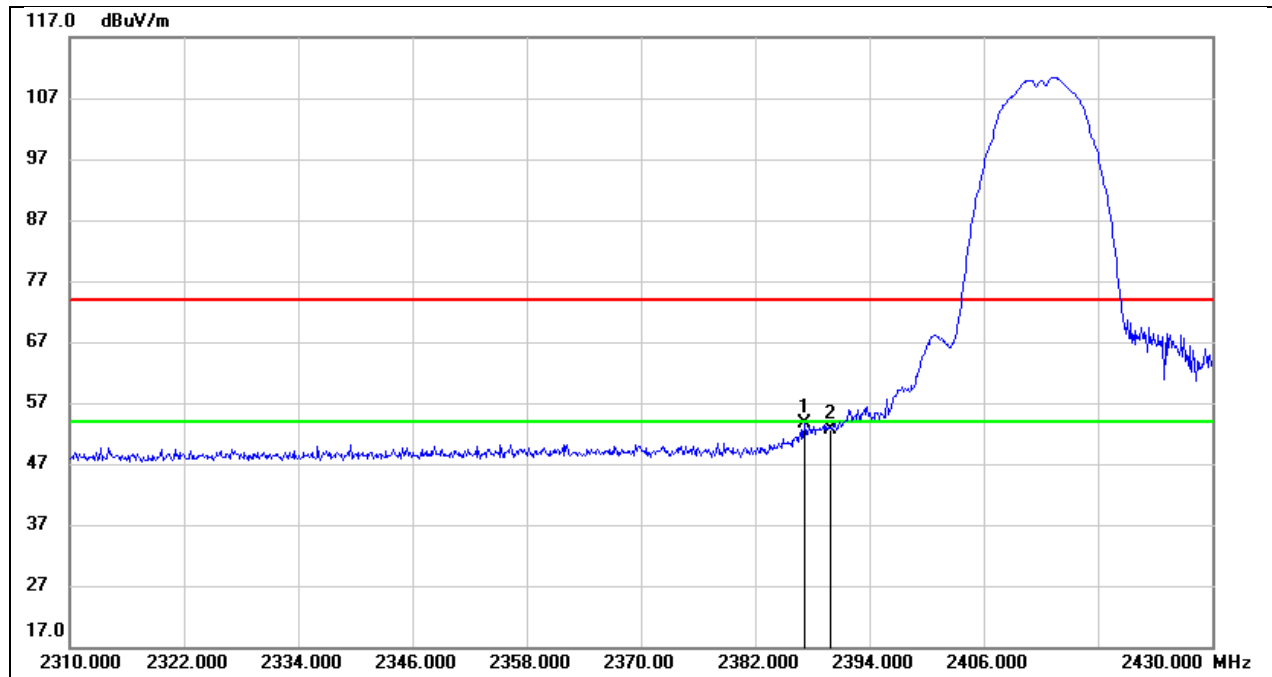


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.160	19.09	34.44	53.53	74.00	-20.47	peak
2	2390.000	18.24	34.45	52.69	74.00	-21.31	peak

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

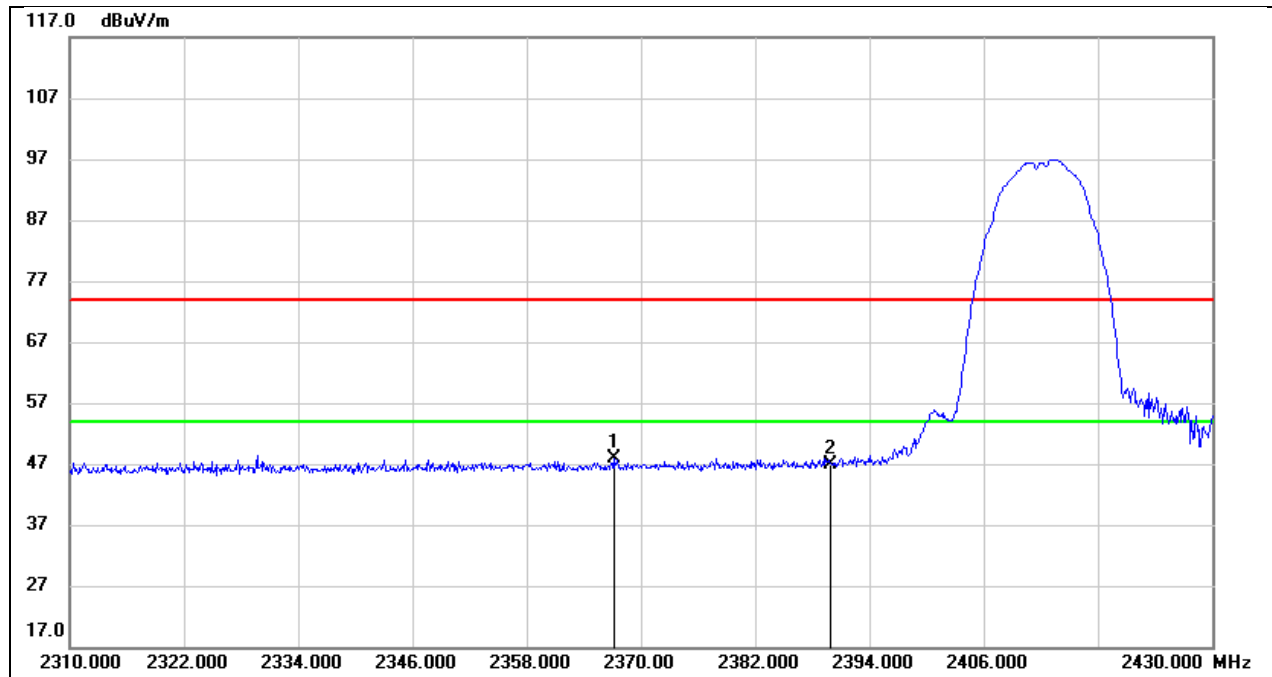


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.120	16.27	31.64	47.91	74.00	-26.09	peak
2	2390.000	15.15	31.73	46.88	74.00	-27.12	peak

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

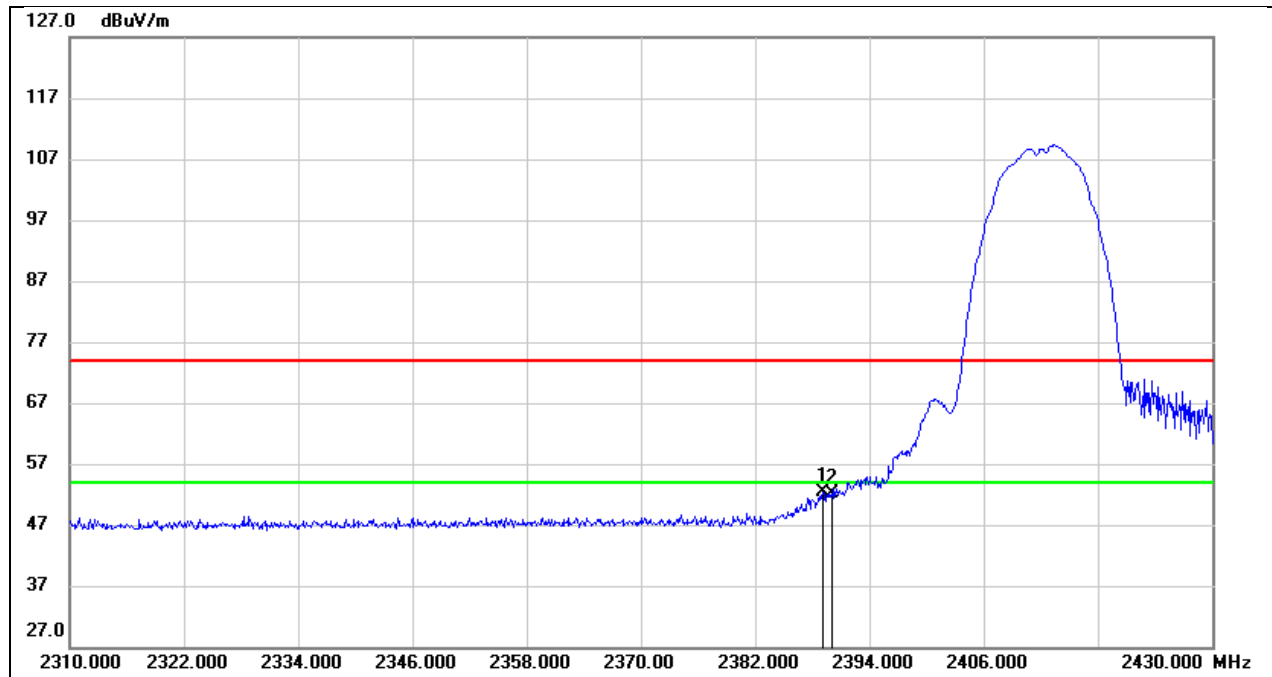


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.080	19.87	32.55	52.42	74.00	-21.58	peak
2	2390.000	19.58	32.55	52.13	74.00	-21.87	peak

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

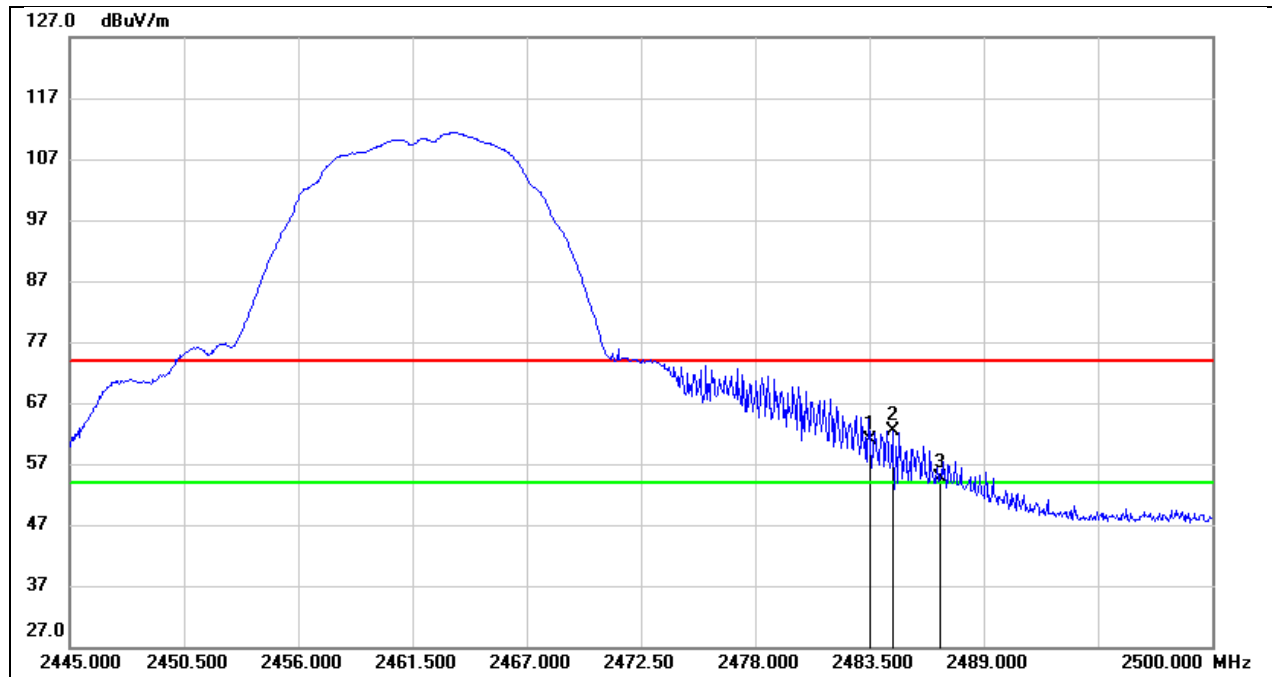


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.03	32.80	60.83	74.00	-13.17	peak
2	2484.600	29.69	32.80	62.49	74.00	-11.51	peak
3	2486.910	21.93	32.81	54.74	74.00	-19.26	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

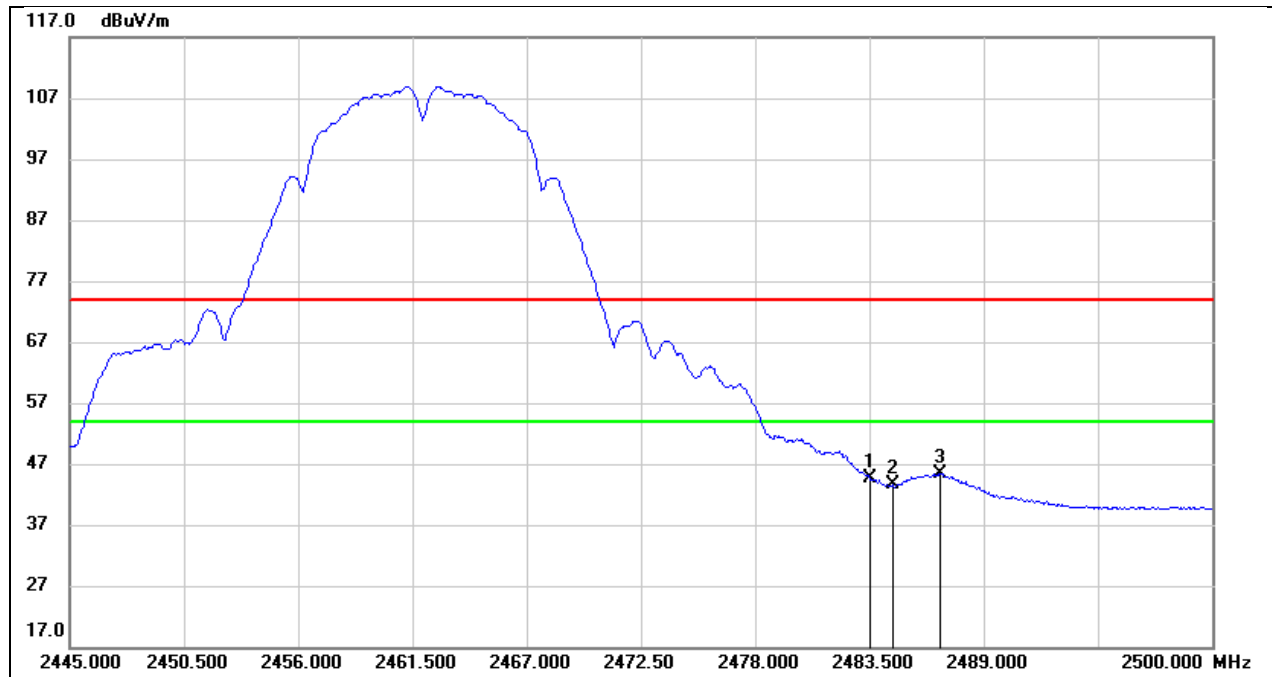


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.88	32.80	44.68	54.00	-9.32	AVG
2	2484.600	10.72	32.80	43.52	54.00	-10.48	AVG
3	2486.910	12.51	32.81	45.32	54.00	-8.68	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

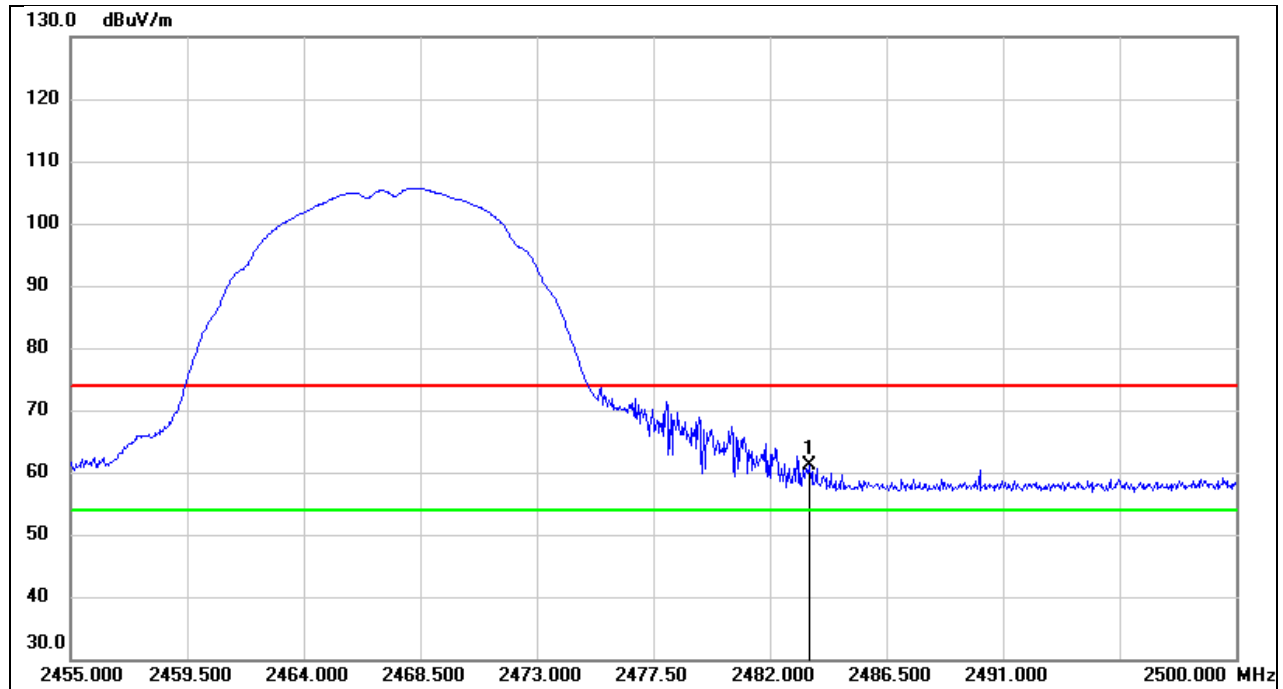


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.47	10.56	61.03	74.00	-12.97	peak

Test Mode:	802.11b AV	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

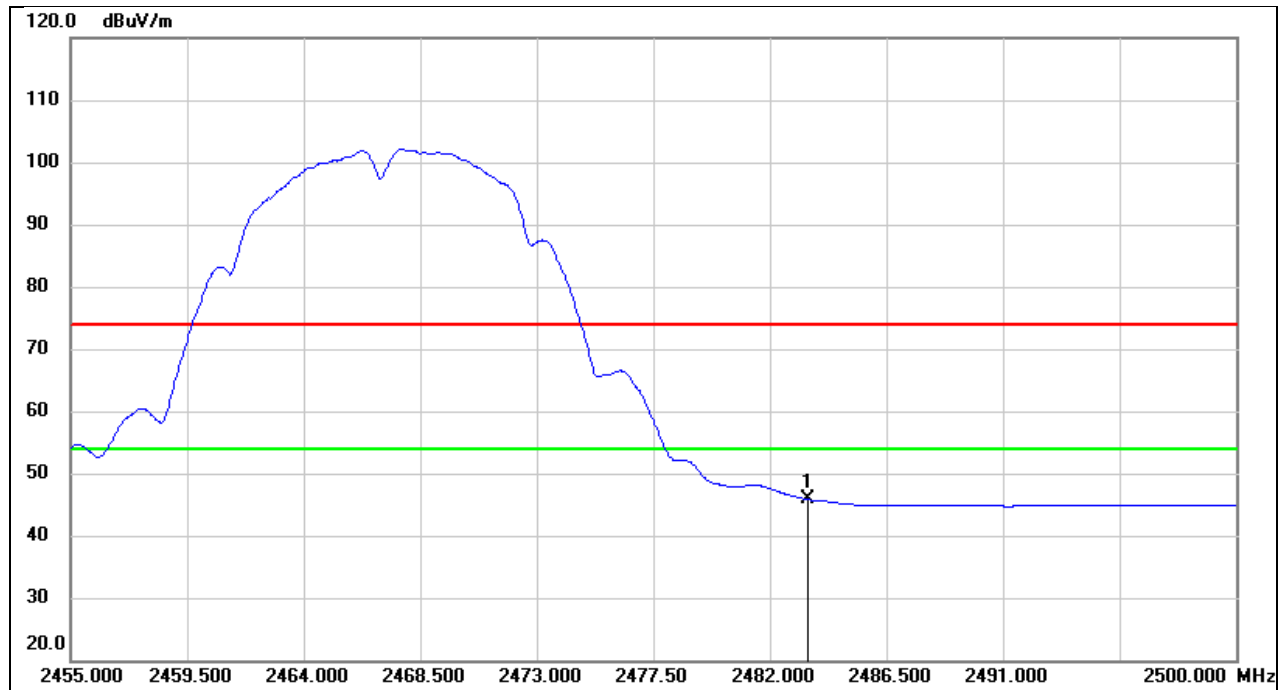


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.23	10.56	45.79	54.00	-8.21	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

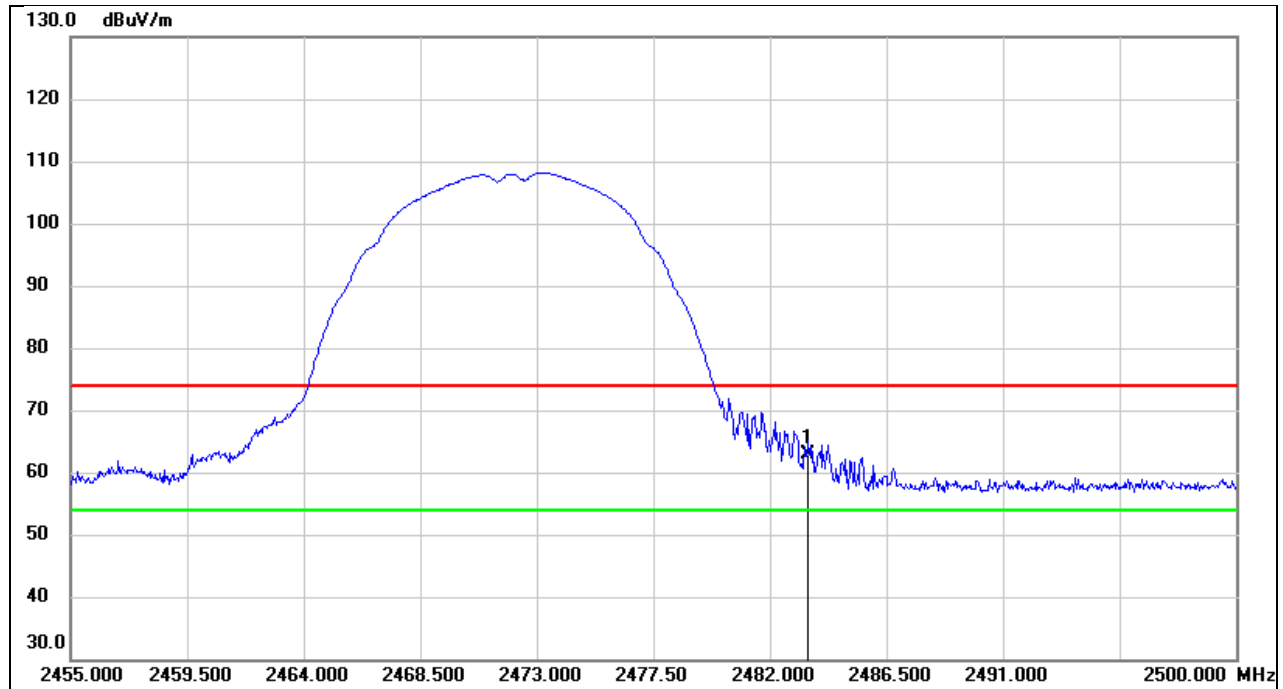


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.38	10.56	62.94	74.00	-11.06	peak

Test Mode:	802.11b AV	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

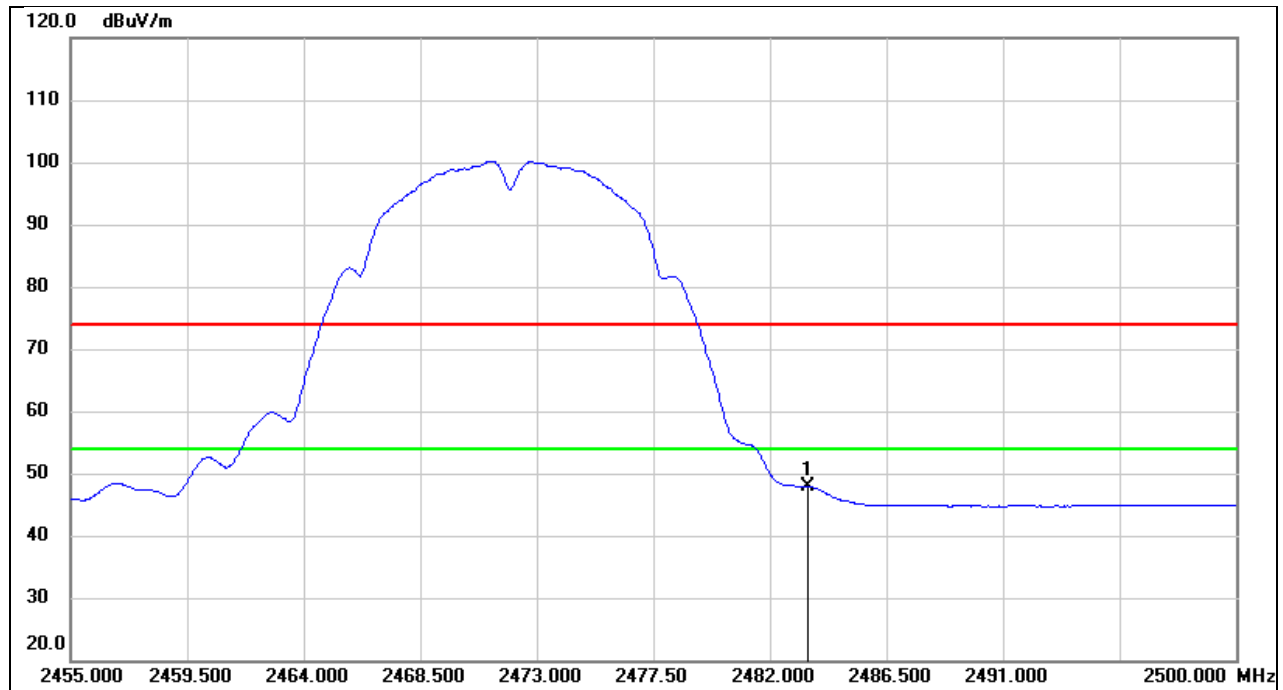


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.30	10.56	47.86	54.00	-6.14	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

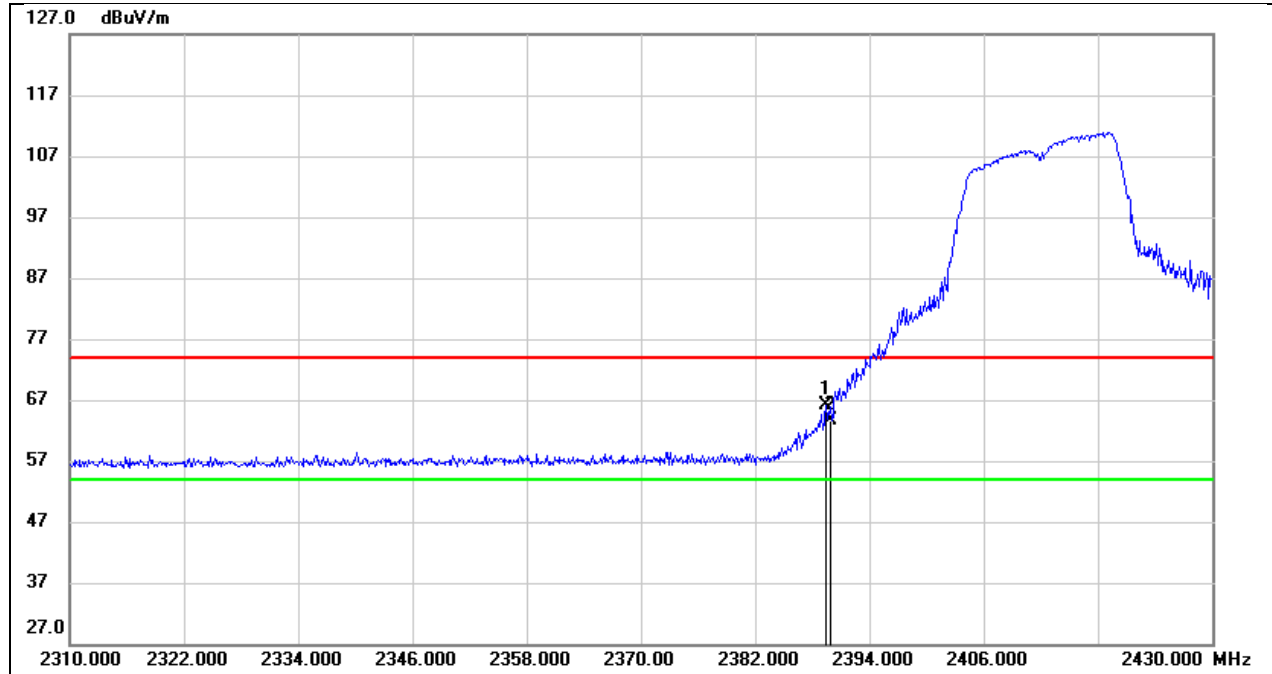


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	33.59	32.55	66.14	74.00	-7.86	peak
2	2390.000	31.11	32.55	63.66	74.00	-10.34	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

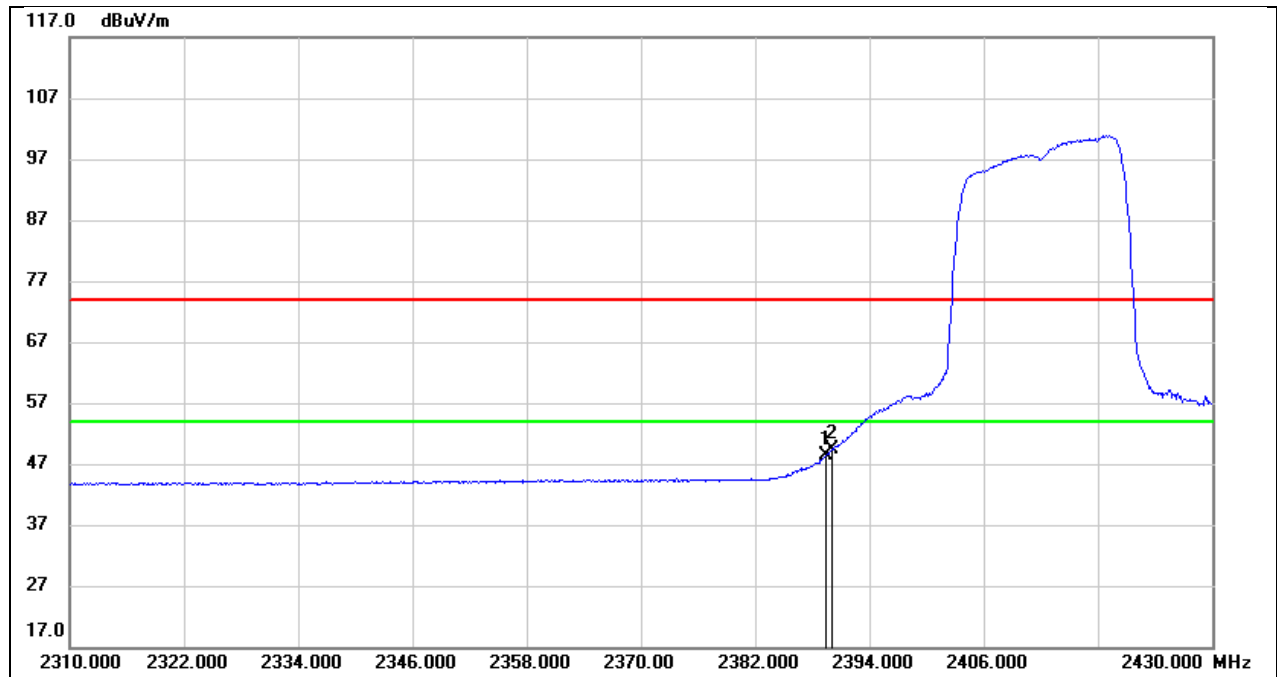


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	15.74	32.55	48.29	54.00	-5.71	AVG
2	2390.000	16.80	32.55	49.35	54.00	-4.65	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

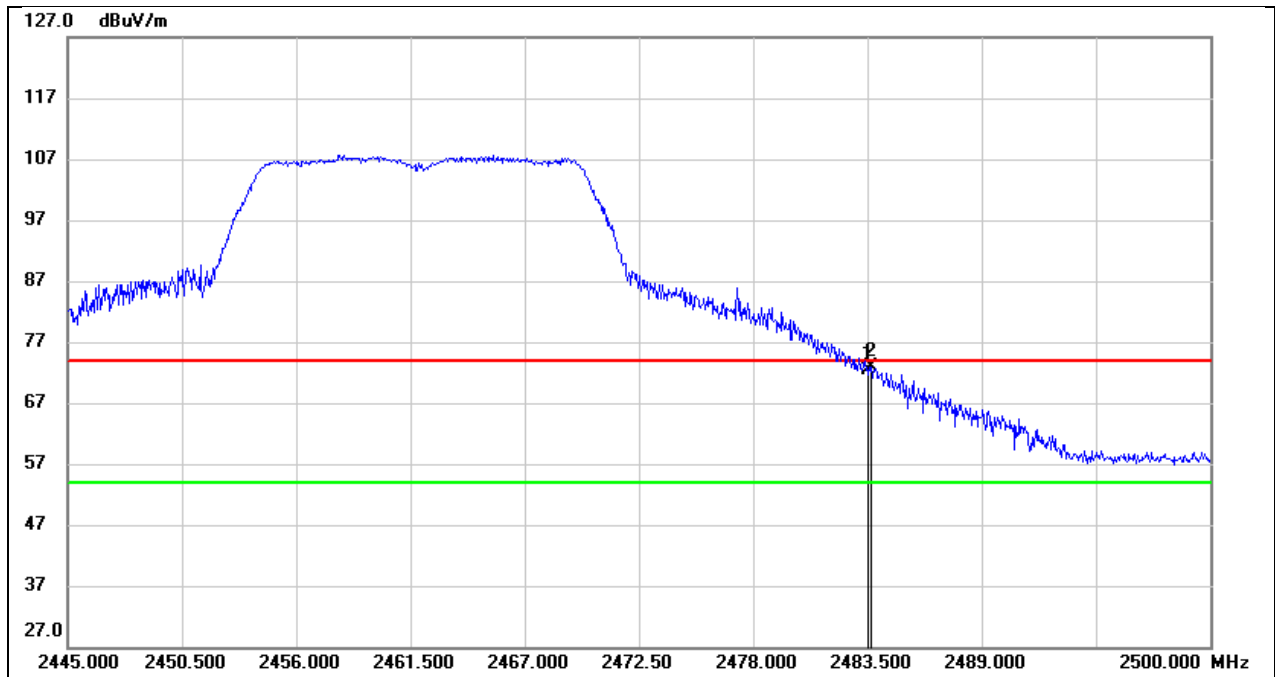


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.56	32.80	72.36	74.00	-1.64	peak
2	2483.665	40.05	32.80	72.85	74.00	-1.15	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

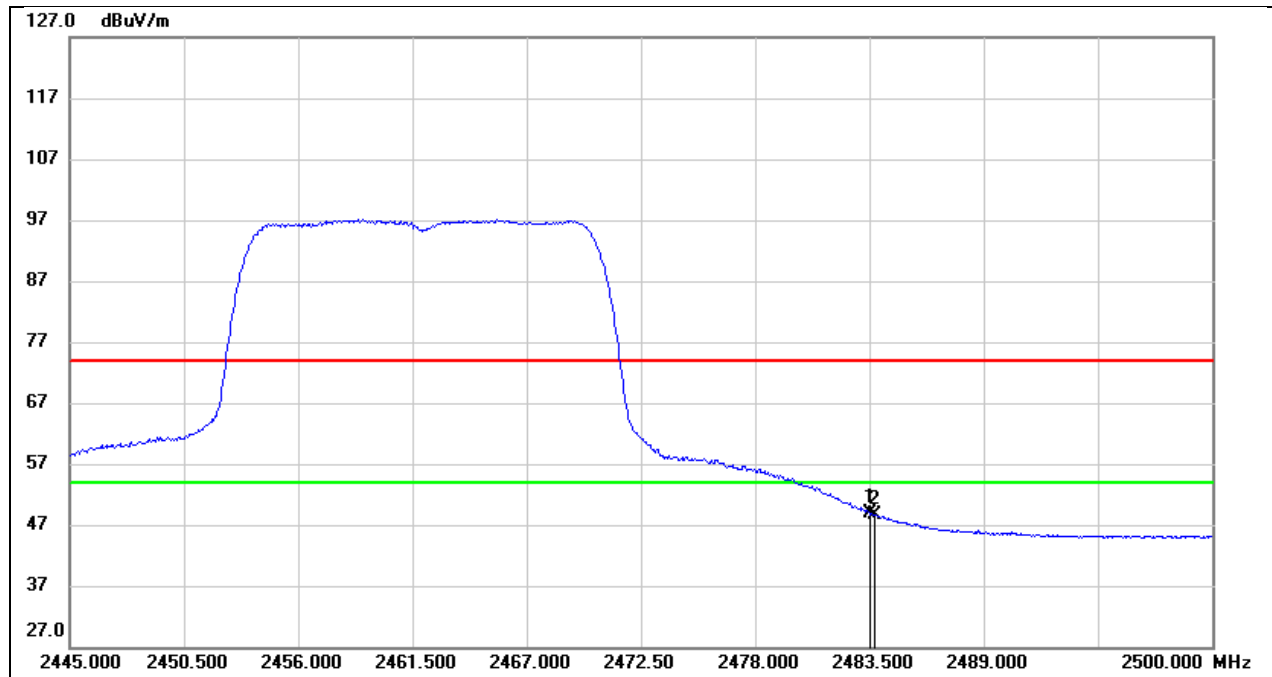


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.99	32.80	48.79	54.00	-5.21	AVG
2	2483.665	15.81	32.80	48.61	54.00	-5.39	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

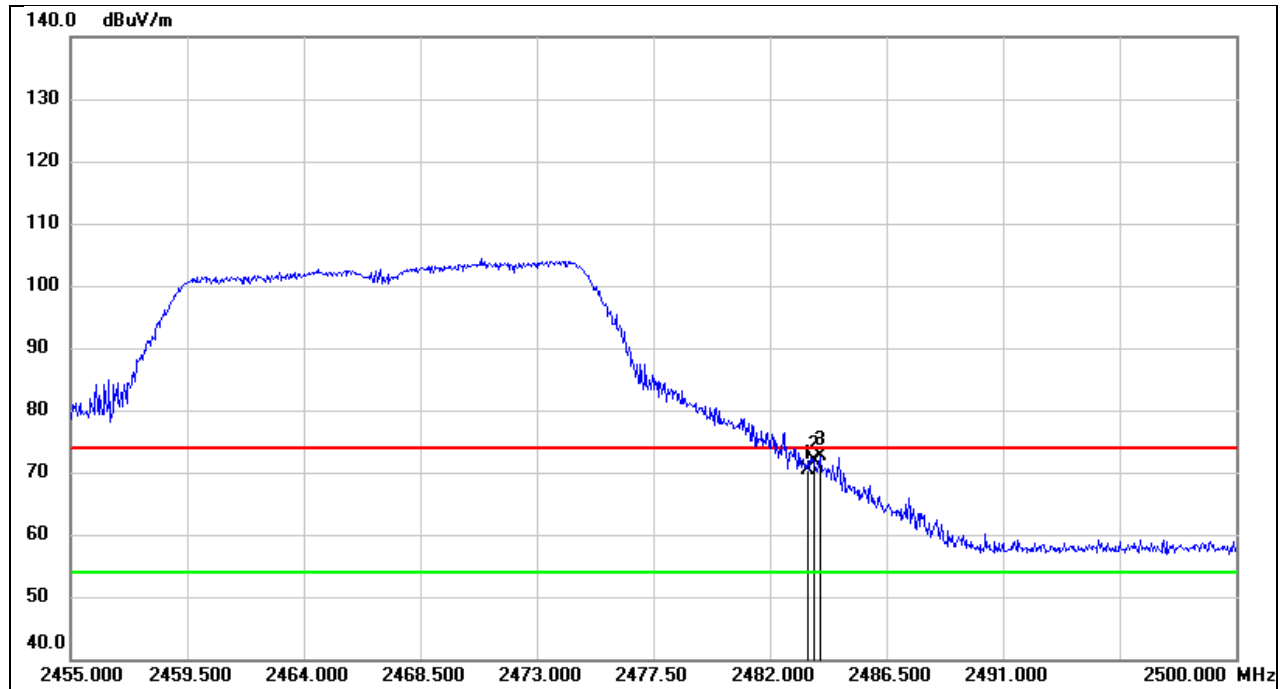


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.86	10.56	70.42	74.00	-3.58	peak
2	2483.710	61.30	10.56	71.86	74.00	-2.14	peak
3	2483.935	61.97	10.56	72.53	74.00	-1.47	peak

Test Mode:	802.11g AV	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

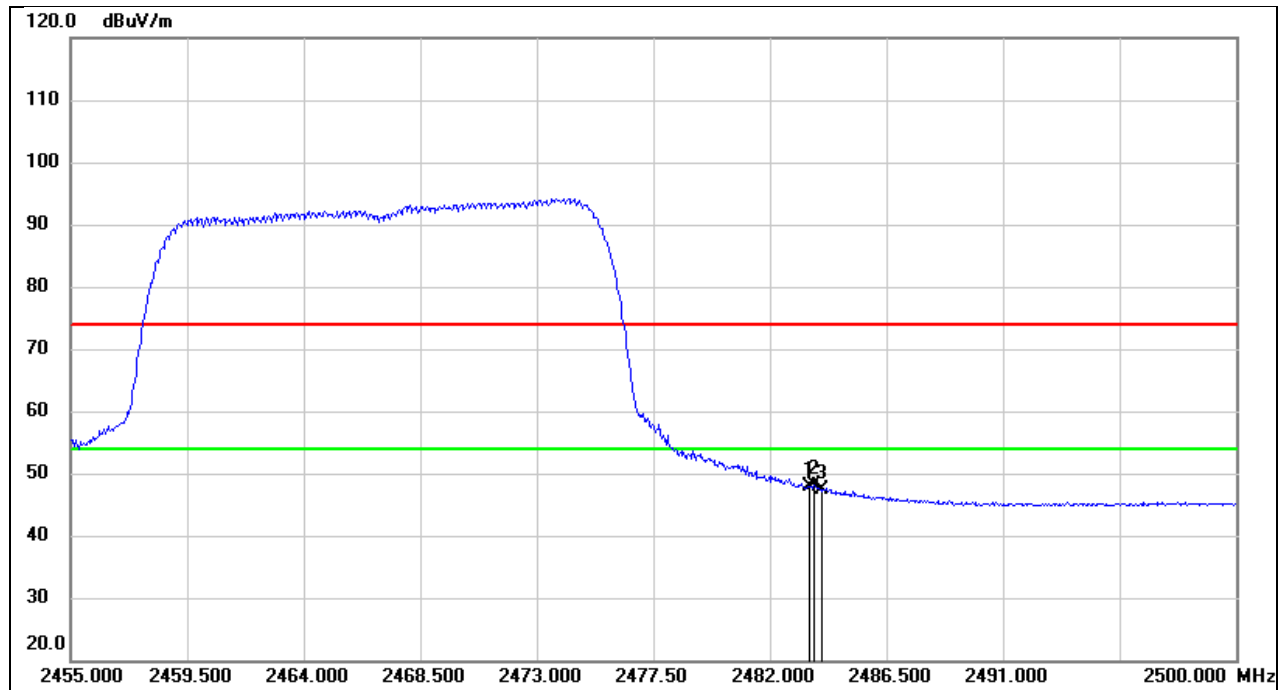


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.25	10.56	47.81	54.00	-6.19	AVG
2	2483.710	37.46	10.56	48.02	54.00	-5.98	AVG
3	2483.935	36.82	10.56	47.38	54.00	-6.62	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

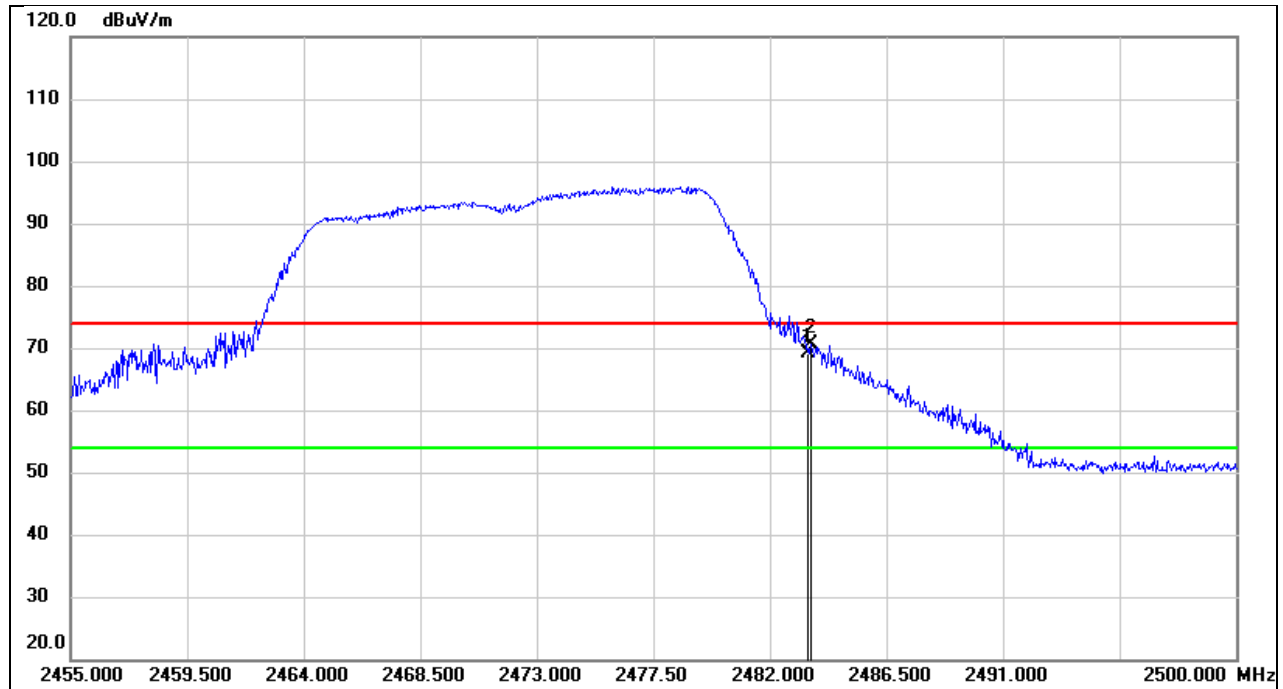


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.63	10.56	69.19	74.00	-4.81	peak
2	2483.575	60.11	10.56	70.67	74.00	-3.33	peak

Test Mode:	802.11g AV	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

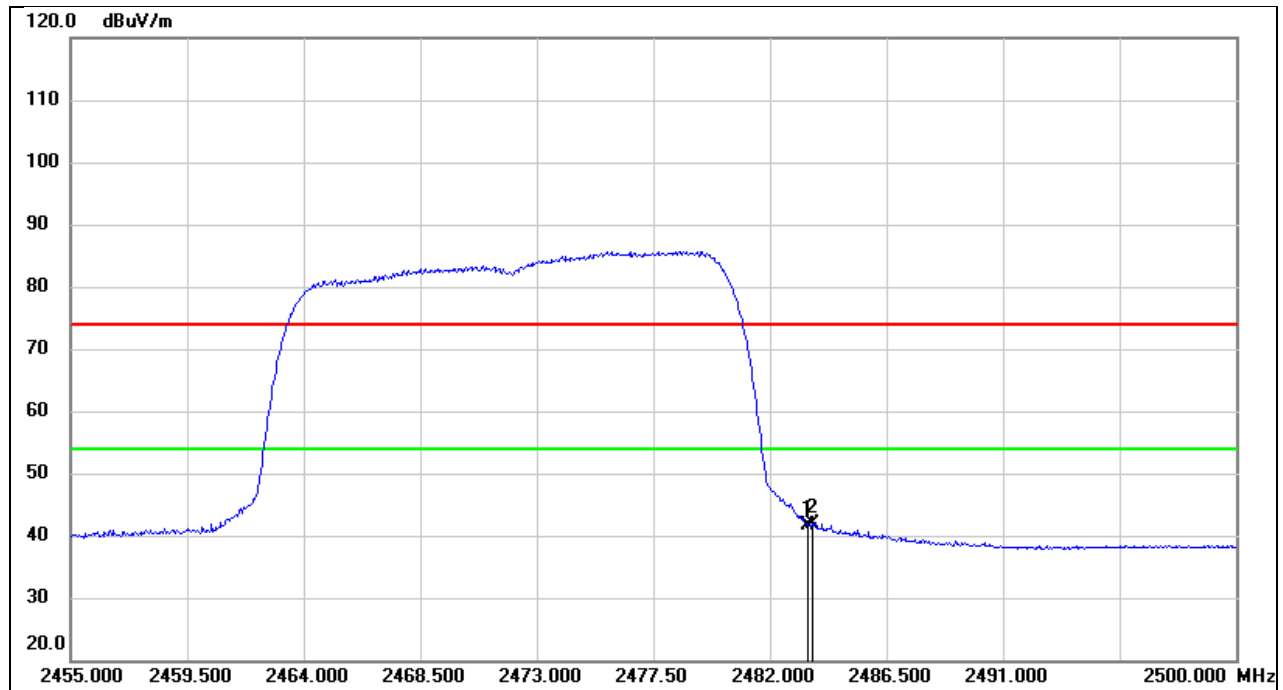


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.96	10.56	41.52	54.00	-12.48	AVG
2	2483.575	31.24	10.56	41.80	54.00	-12.20	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

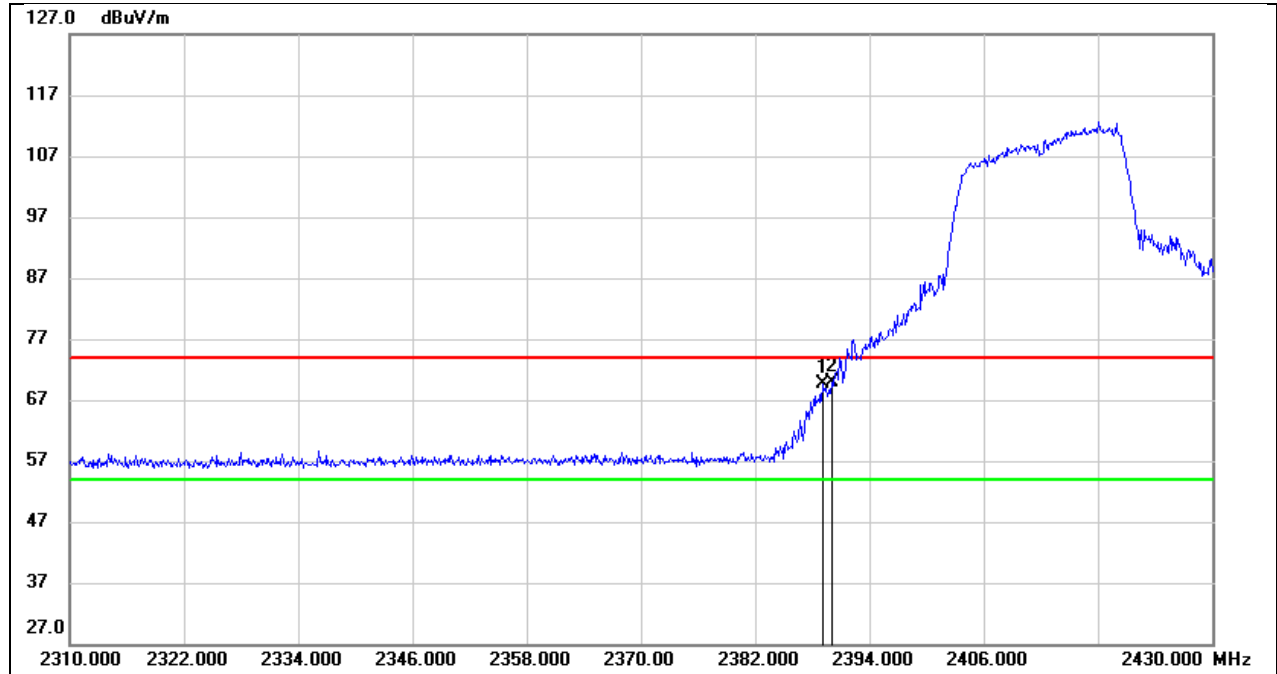


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.080	37.01	32.55	69.56	74.00	-4.44	peak
2	2390.000	37.22	32.55	69.77	74.00	-4.23	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

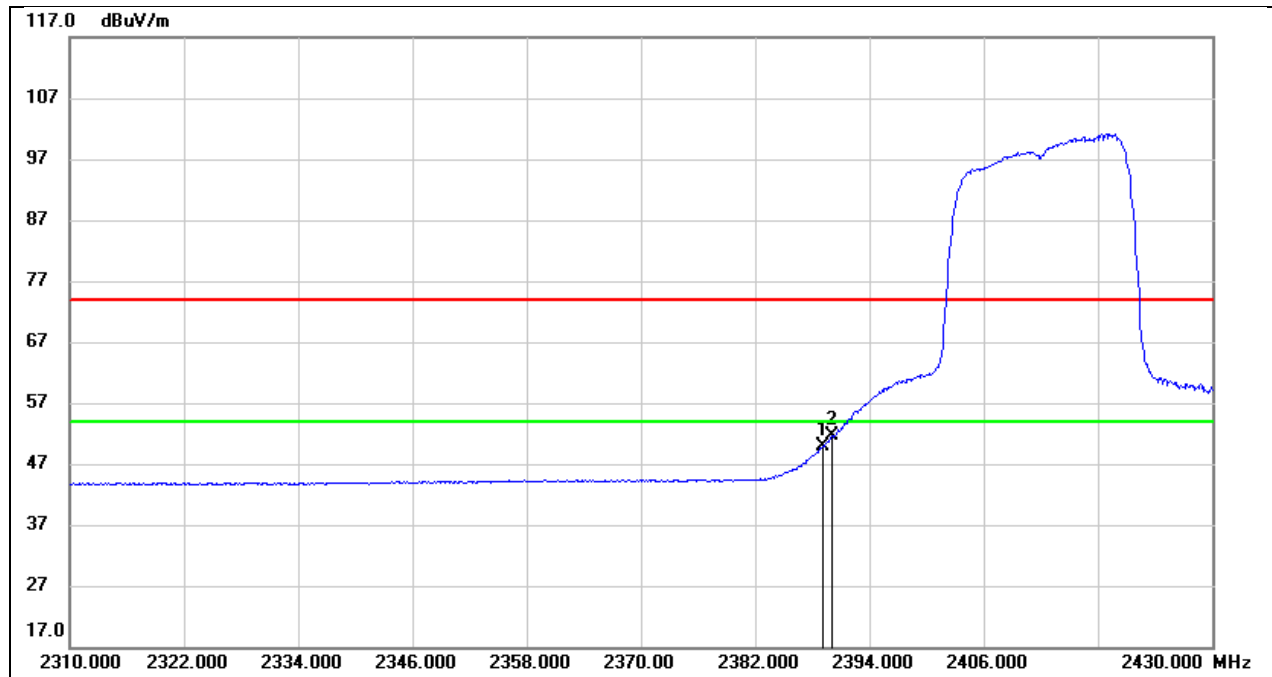


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.080	17.25	32.55	49.80	54.00	-4.20	AVG
2	2390.000	19.00	32.55	51.55	54.00	-2.45	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

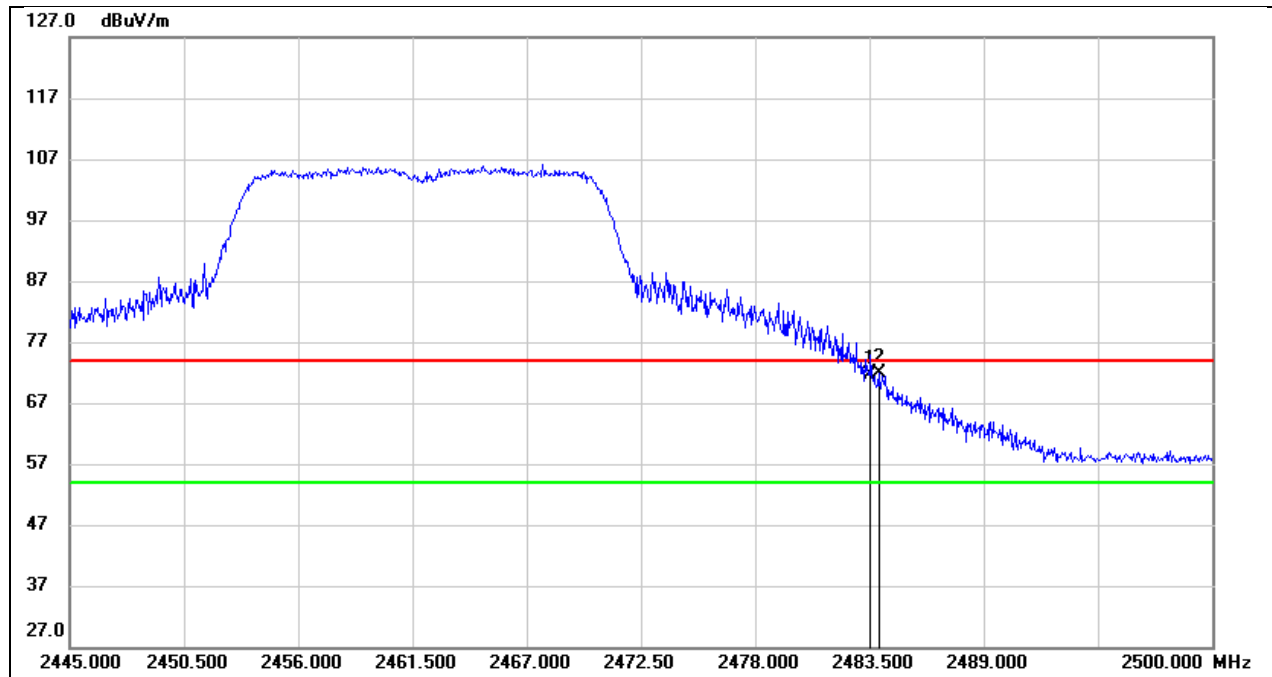


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.94	32.80	71.74	74.00	-2.26	peak
2	2483.940	39.03	32.80	71.83	74.00	-2.17	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

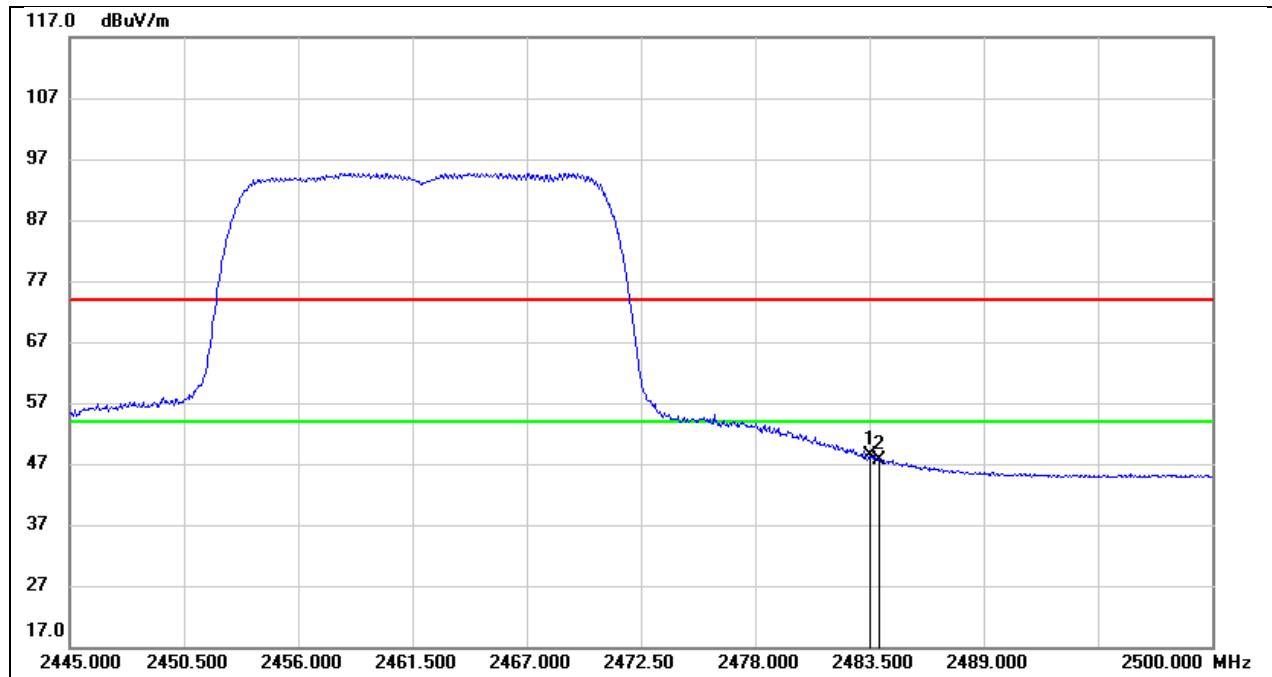


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.53	32.80	48.33	54.00	-5.67	AVG
2	2483.940	14.80	32.80	47.60	54.00	-6.40	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

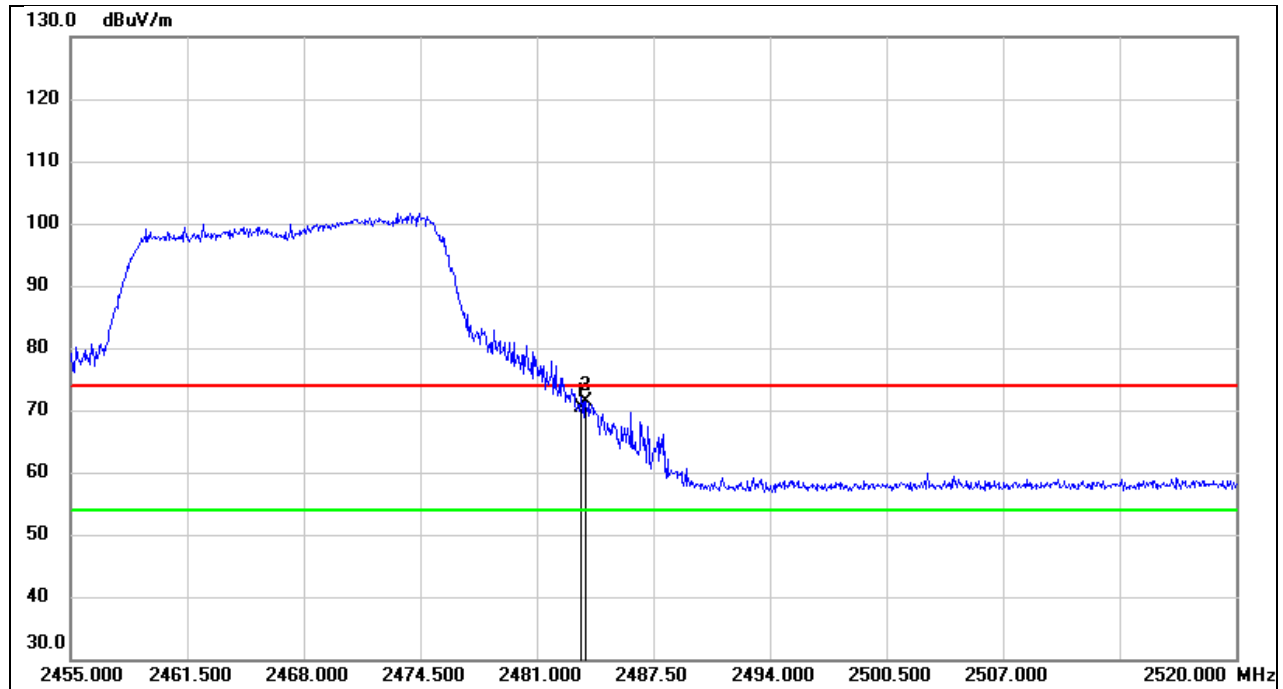


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.79	10.56	70.35	74.00	-3.65	peak
2	2483.665	60.73	10.56	71.29	74.00	-2.71	peak
3	2483.730	60.73	10.56	71.29	74.00	-2.71	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

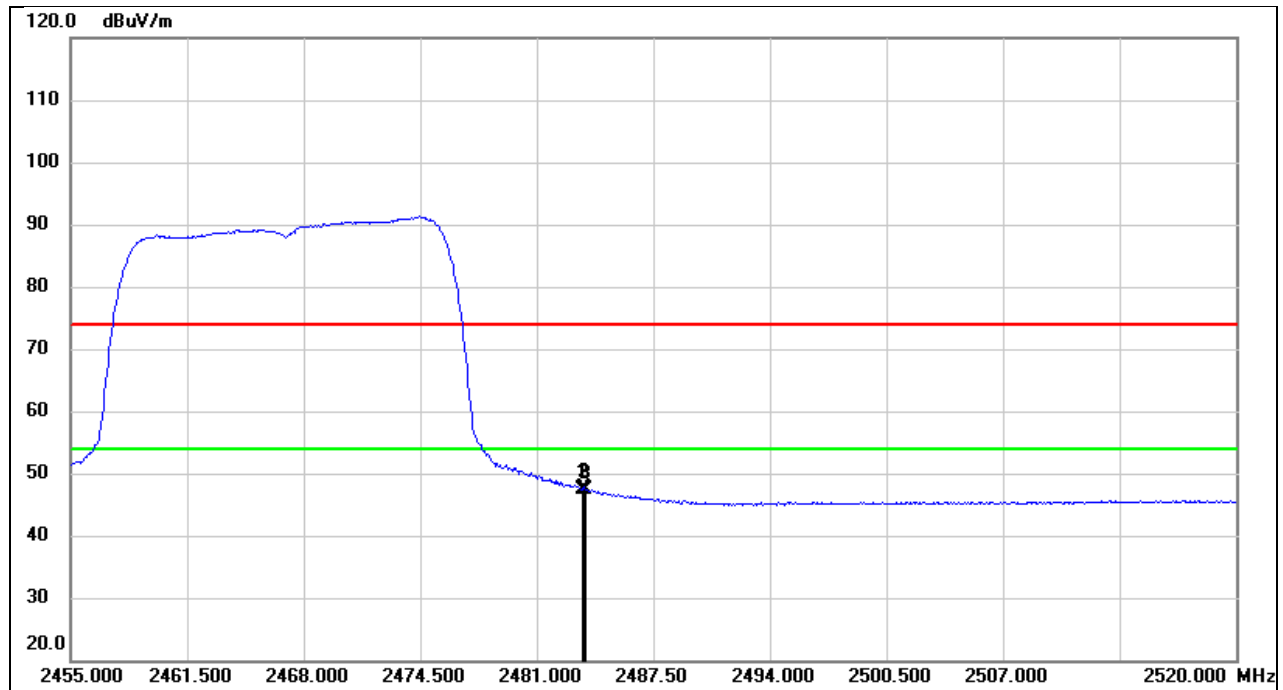


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.94	10.56	47.50	54.00	-6.50	AVG
2	2483.665	36.99	10.56	47.55	54.00	-6.45	AVG
3	2483.730	36.72	10.56	47.28	54.00	-6.72	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

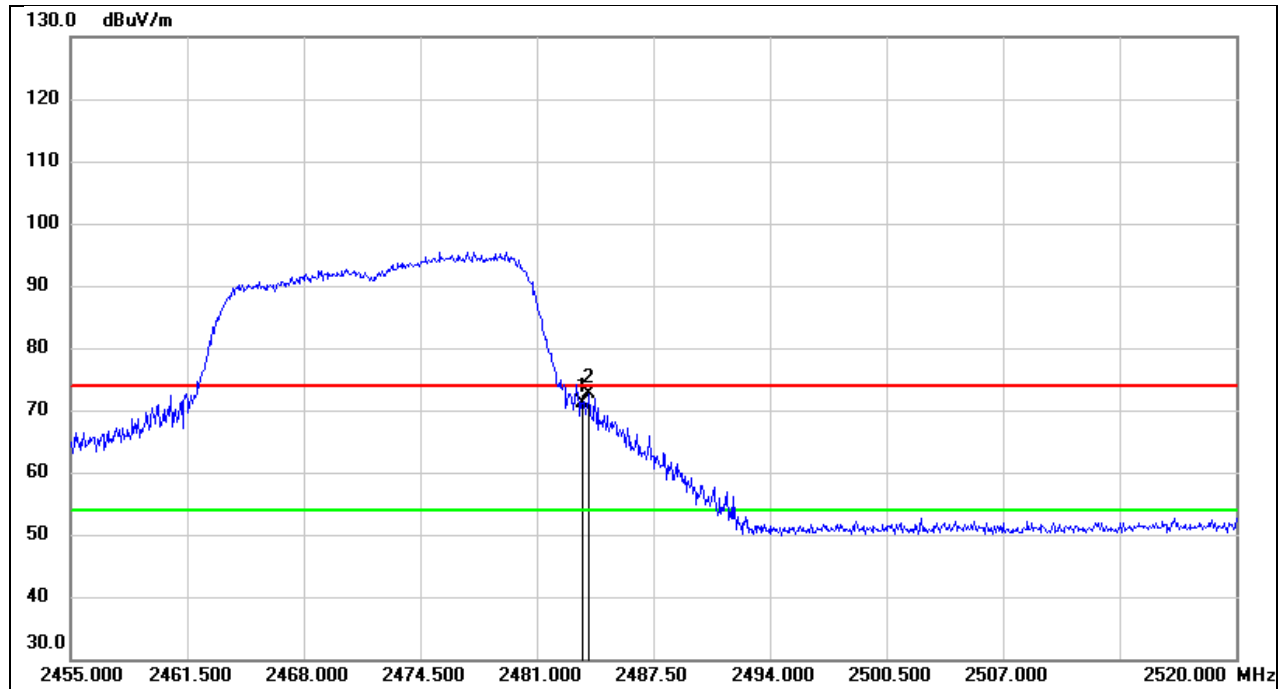


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.52	10.56	71.08	74.00	-2.92	peak
2	2483.925	62.02	10.56	72.58	74.00	-1.42	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

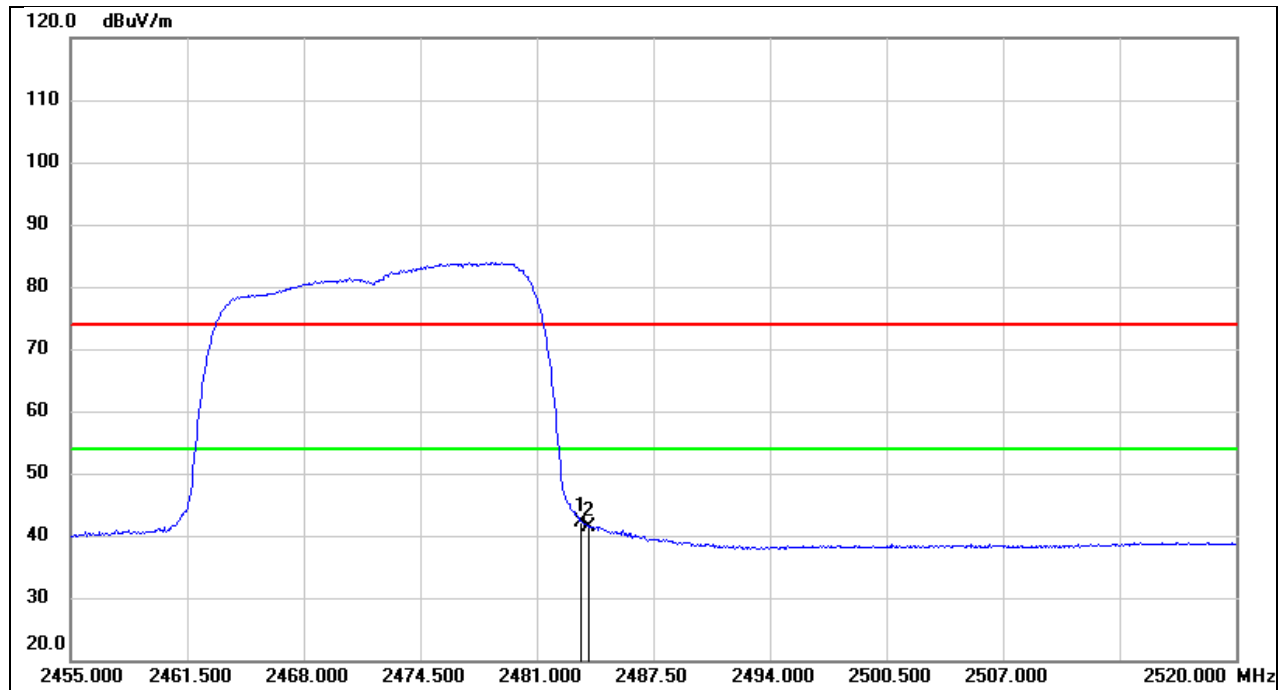


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.47	10.56	42.03	54.00	-11.97	AVG
2	2483.925	30.83	10.56	41.39	54.00	-12.61	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

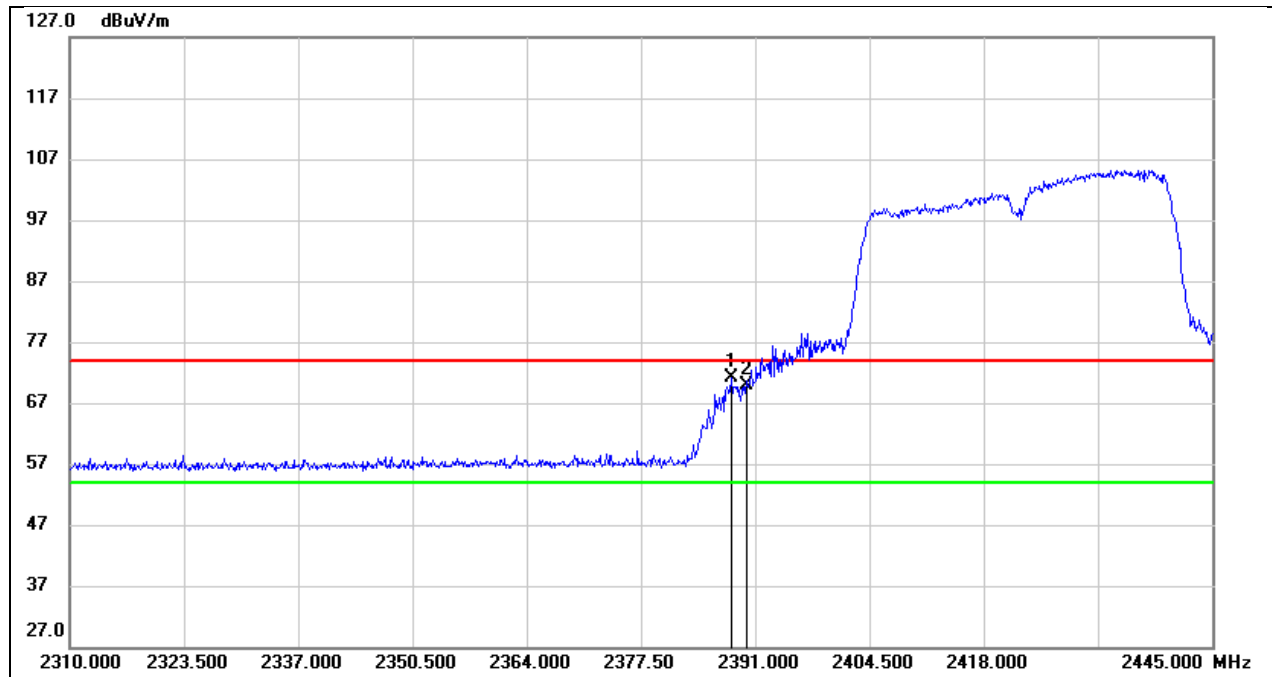


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.165	38.58	32.55	71.13	74.00	-2.87	peak
2	2390.000	37.36	32.55	69.91	74.00	-4.09	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

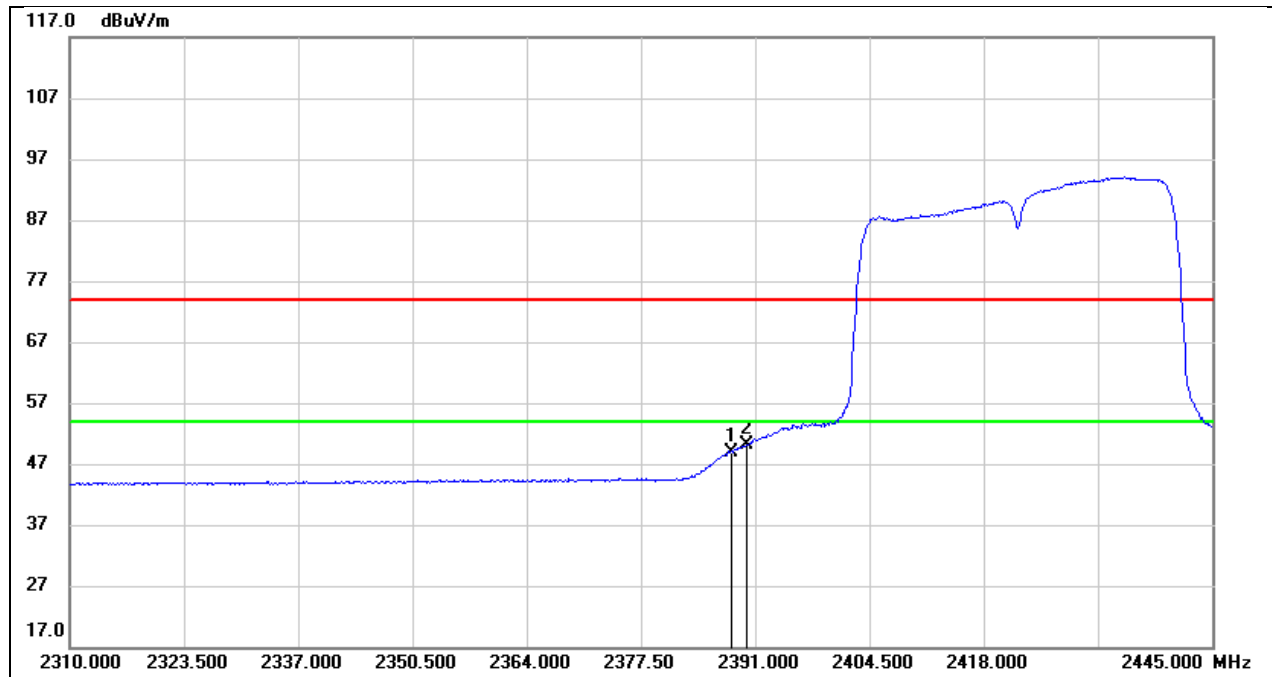


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.165	16.43	32.55	48.98	54.00	-5.02	AVG
2	2390.000	17.64	32.55	50.19	54.00	-3.81	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

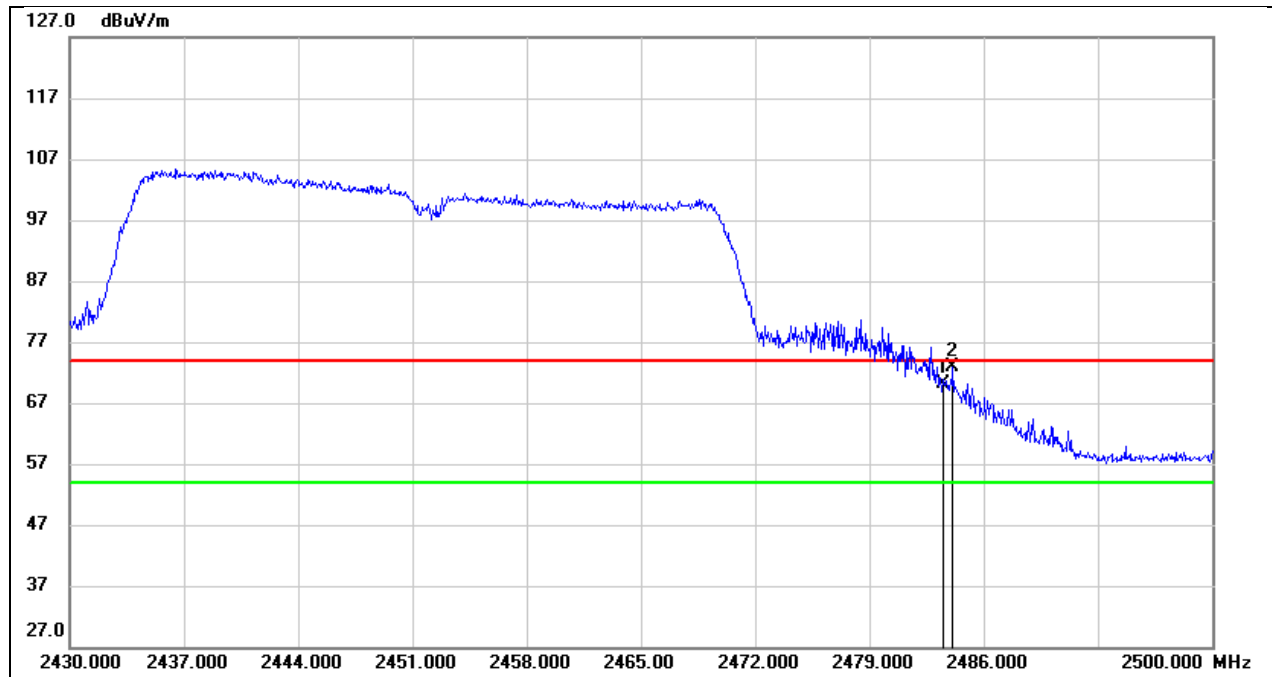


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.37	32.80	70.17	74.00	-3.83	peak
2	2484.110	39.99	32.80	72.79	74.00	-1.21	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

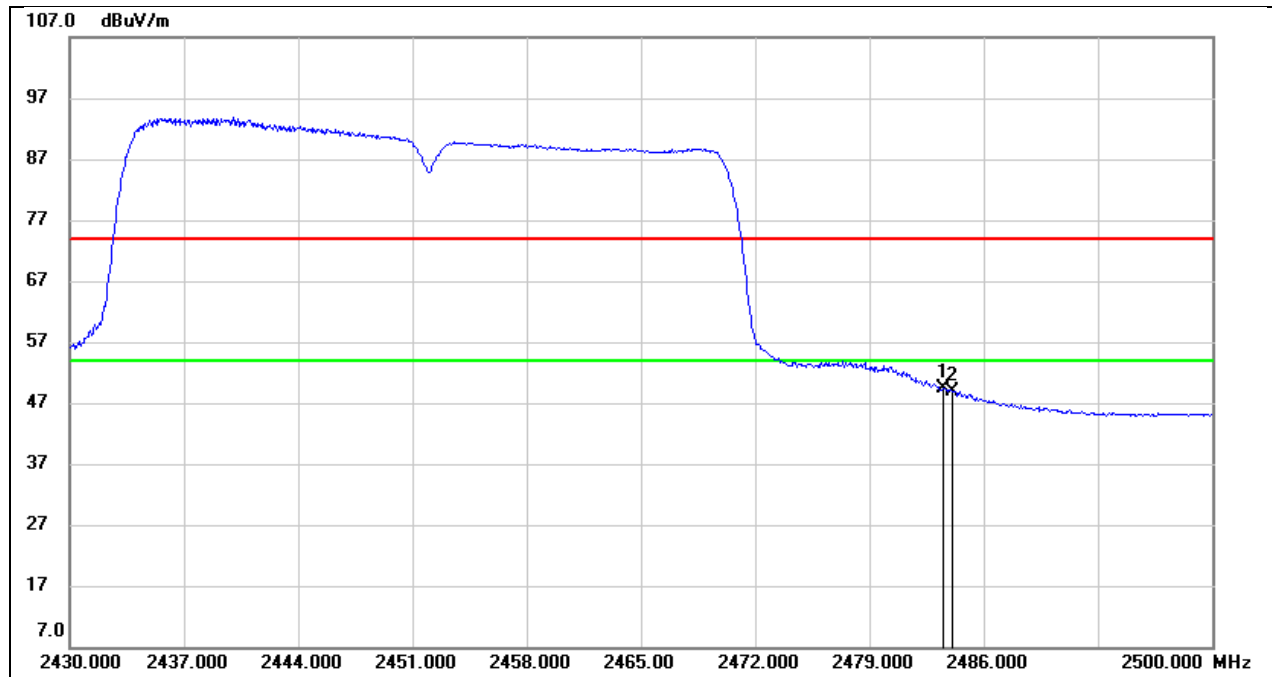


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.65	32.80	49.45	54.00	-4.55	AVG
2	2484.110	16.10	32.80	48.90	54.00	-5.10	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

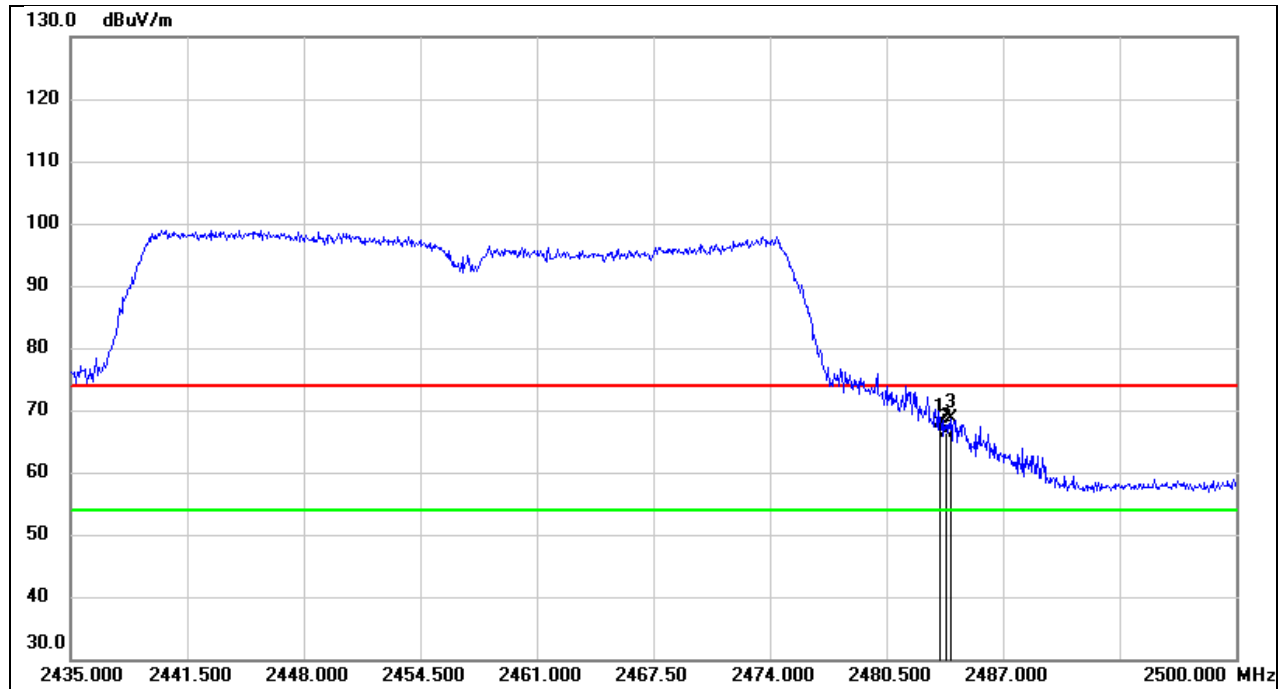


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.33	10.56	67.89	74.00	-6.11	peak
2	2483.880	55.76	10.56	66.32	74.00	-7.68	peak
3	2484.075	58.14	10.56	68.70	74.00	-5.30	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

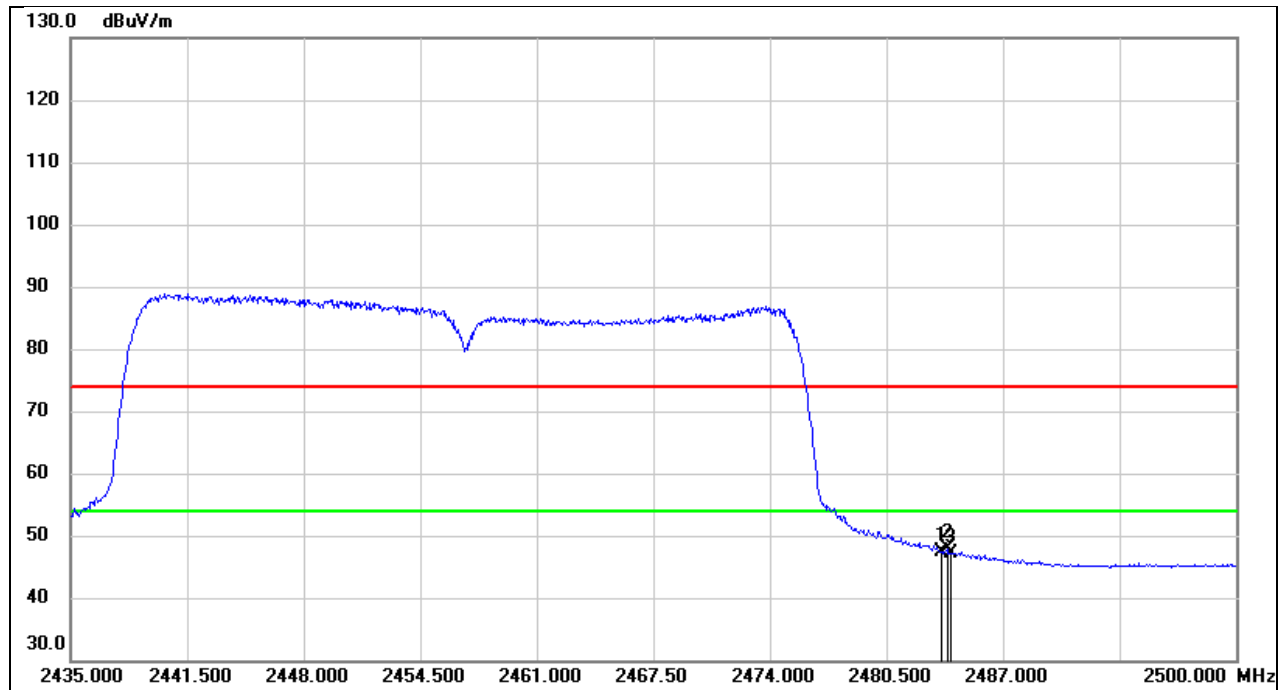


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.90	10.56	47.46	54.00	-6.54	AVG
2	2483.880	37.20	10.56	47.76	54.00	-6.24	AVG
3	2484.075	36.61	10.56	47.17	54.00	-6.83	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

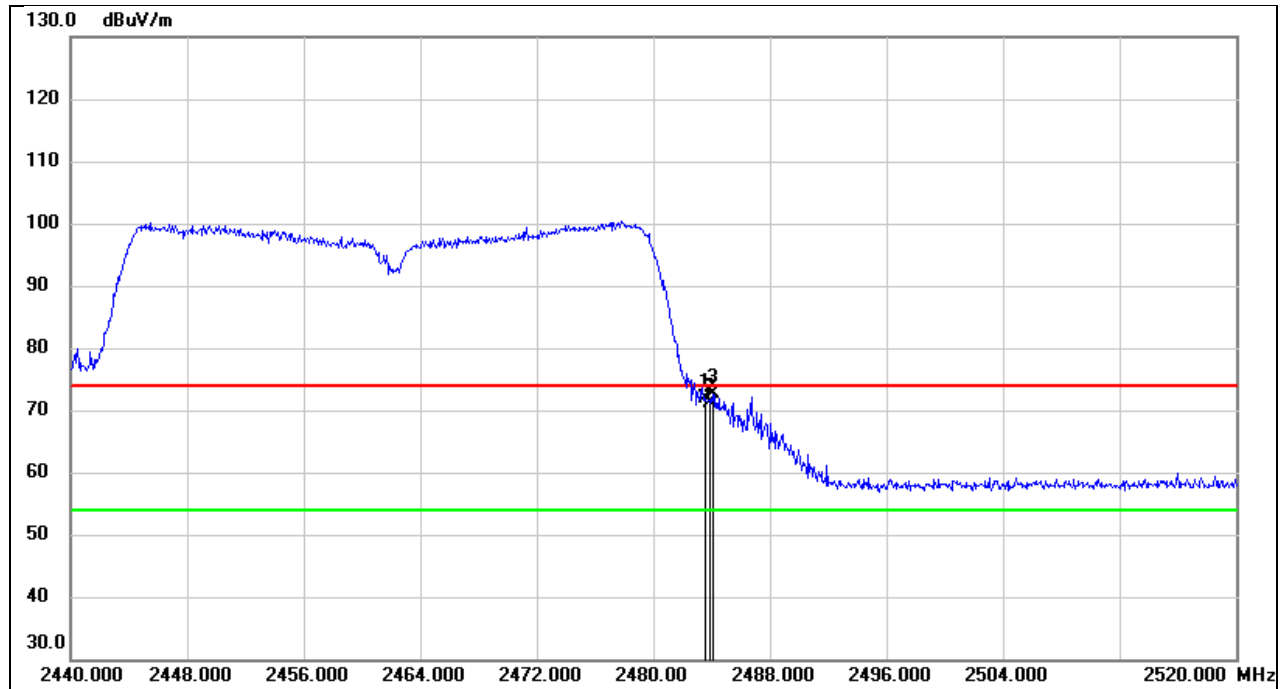

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.22	10.56	71.78	74.00	-2.22	peak
2	2483.920	60.68	10.56	71.24	74.00	-2.76	peak
3	2484.080	62.15	10.56	72.71	74.00	-1.29	peak


Test Mode:	802.11n HT40 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

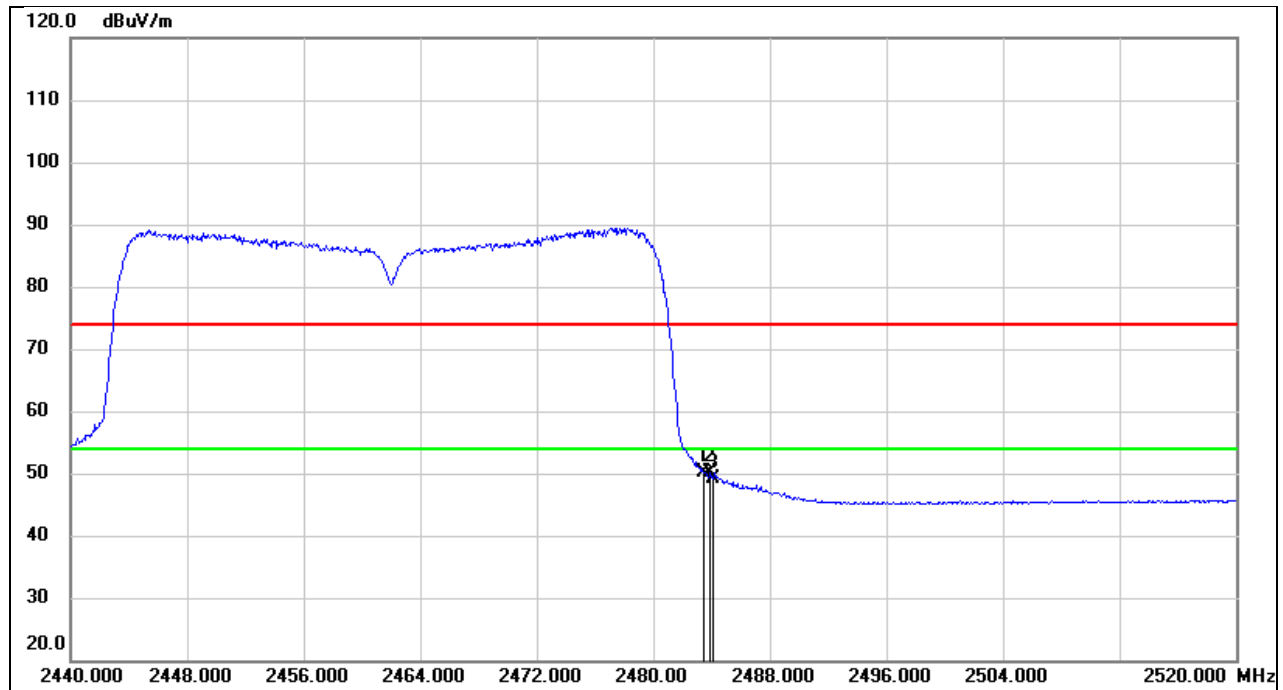

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.45	10.56	50.01	54.00	-3.99	AVG
2	2483.920	39.53	10.56	50.09	54.00	-3.91	AVG
3	2484.080	38.63	10.56	49.19	54.00	-4.81	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

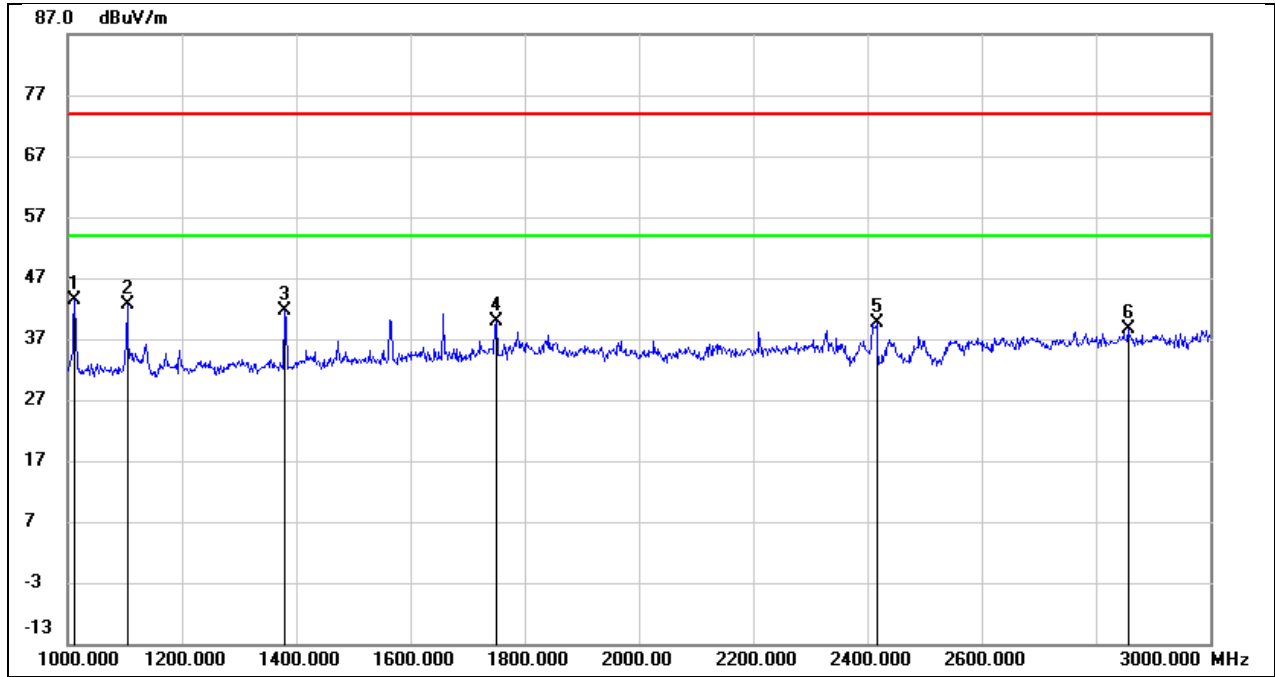


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1012.000	57.77	-14.38	43.39	74.00	-30.61	peak
2	1104.000	56.53	-13.94	42.59	74.00	-31.41	peak
3	1380.000	54.29	-12.56	41.73	74.00	-32.27	peak
4	1750.000	50.27	-10.32	39.95	74.00	-34.05	peak
5	2412.000	48.16	-8.53	39.63	/	/	Fundamental
6	2856.000	45.31	-6.66	38.65	74.00	-35.35	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

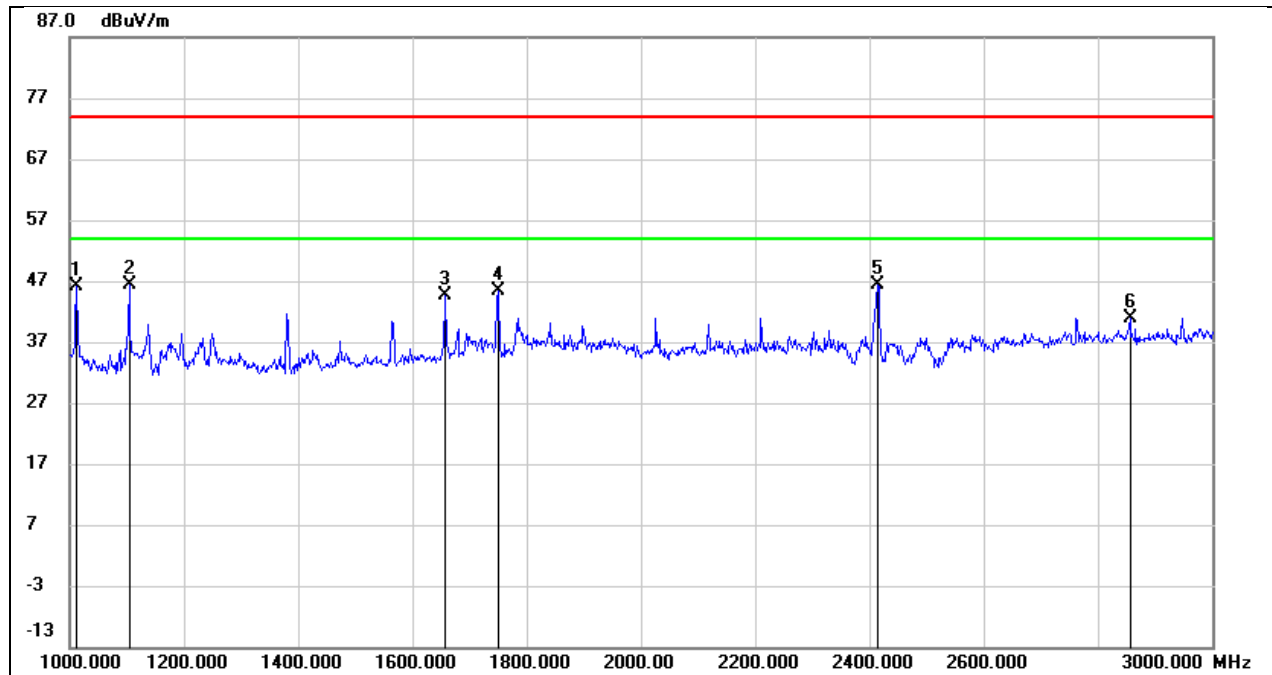


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1012.000	59.84	-13.70	46.14	74.00	-27.86	peak
2	1104.000	59.70	-13.36	46.34	74.00	-27.66	peak
3	1658.000	55.20	-10.62	44.58	74.00	-29.42	peak
4	1750.000	55.14	-9.82	45.32	74.00	-28.68	peak
5	2412.000	54.05	-7.71	46.34	/	/	Fundamental
6	2856.000	46.50	-5.51	40.99	74.00	-33.01	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

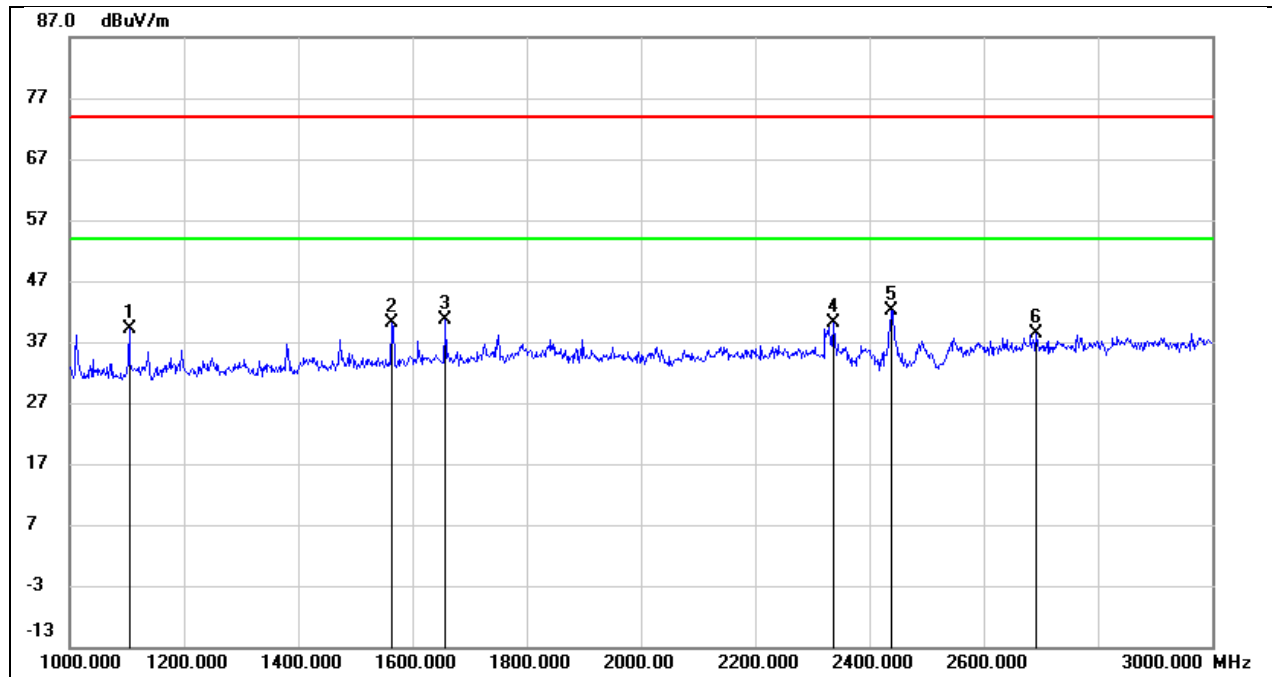


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	53.09	-13.94	39.15	74.00	-34.85	peak
2	1564.000	51.72	-11.56	40.16	74.00	-33.84	peak
3	1658.000	51.68	-10.97	40.71	74.00	-33.29	peak
4	2336.000	49.04	-8.83	40.21	74.00	-33.79	peak
5	2437.000	50.61	-8.44	42.17	/	/	Fundamental
6	2692.000	45.86	-7.37	38.49	74.00	-35.51	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

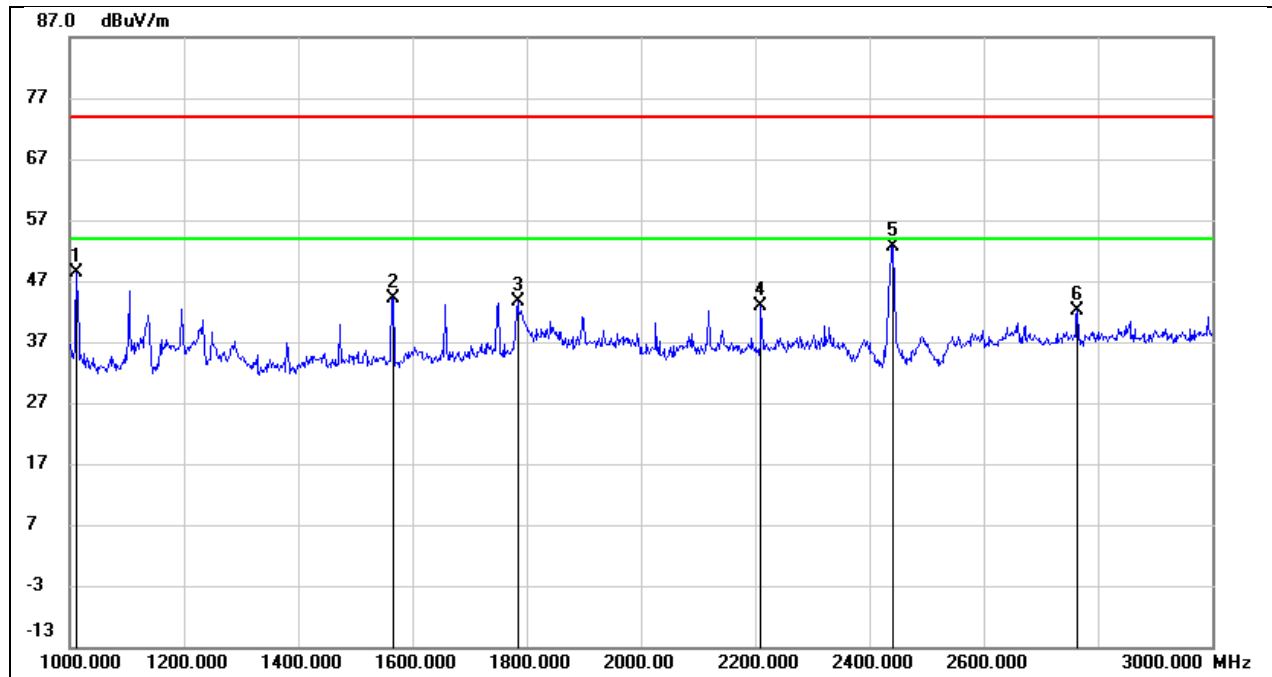


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1012.000	61.98	-13.70	48.28	74.00	-25.72	peak
2	1566.000	55.51	-11.35	44.16	74.00	-29.84	peak
3	1784.000	53.21	-9.52	43.69	74.00	-30.31	peak
4	2210.000	51.31	-8.44	42.87	74.00	-31.13	peak
5	2437.000	60.38	-7.63	52.75	/	/	Fundamental
6	2764.000	48.25	-6.01	42.24	74.00	-31.76	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

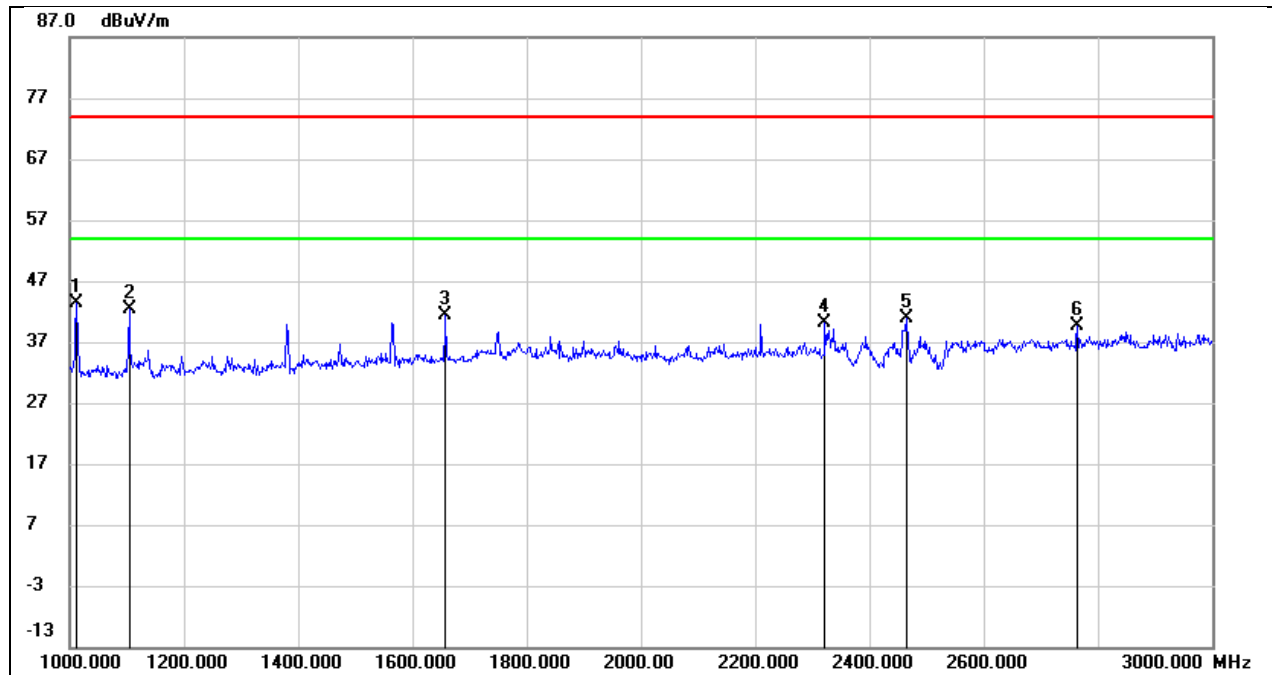


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1012.000	57.72	-14.38	43.34	74.00	-30.66	peak
2	1104.000	56.27	-13.94	42.33	74.00	-31.67	peak
3	1658.000	52.36	-10.97	41.39	74.00	-32.61	peak
4	2322.000	49.07	-8.89	40.18	74.00	-33.82	peak
5	2462.000	49.24	-8.34	40.90	/	/	Fundamental
6	2764.000	46.62	-7.07	39.55	74.00	-34.45	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

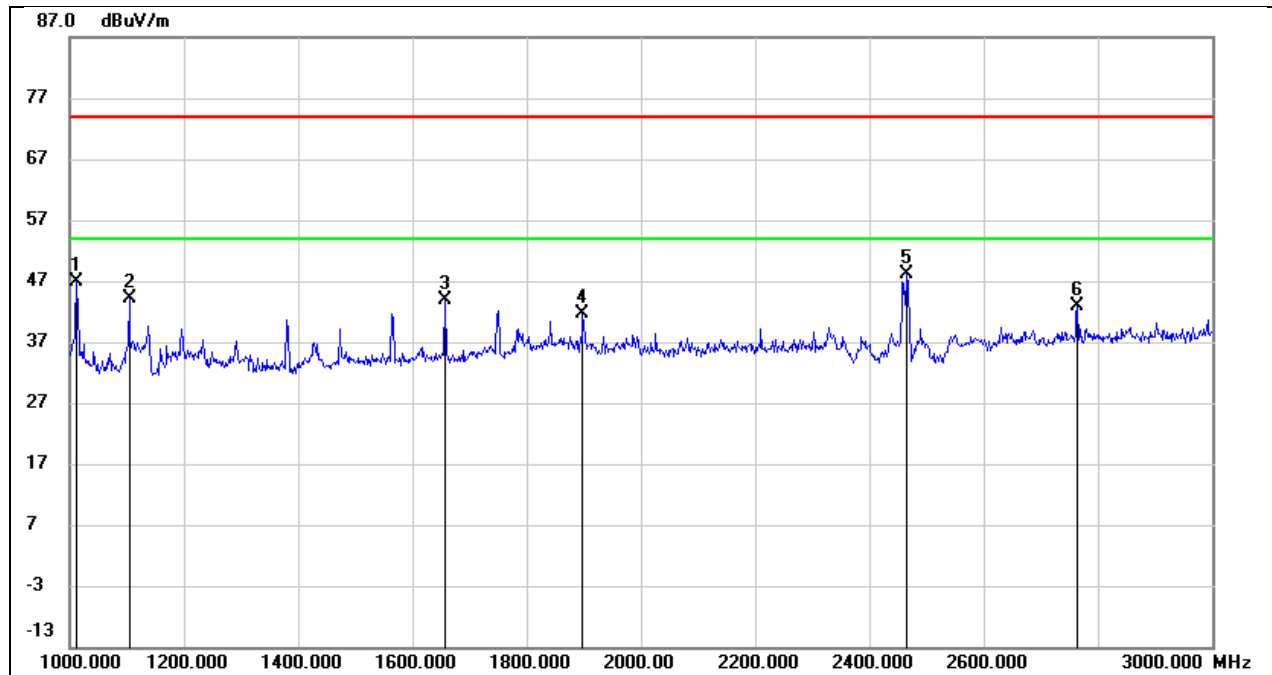


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1012.000	60.59	-13.70	46.89	74.00	-27.11	peak
2	1104.000	57.44	-13.36	44.08	74.00	-29.92	peak
3	1656.000	54.53	-10.64	43.89	74.00	-30.11	peak
4	1898.000	50.91	-9.29	41.62	74.00	-32.38	peak
5	2462.000	55.54	-7.53	48.01	/	/	Fundamental
6	2764.000	48.80	-6.01	42.79	74.00	-31.21	peak

Test Mode:	802.11b	Frequency(MHz):	2467
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

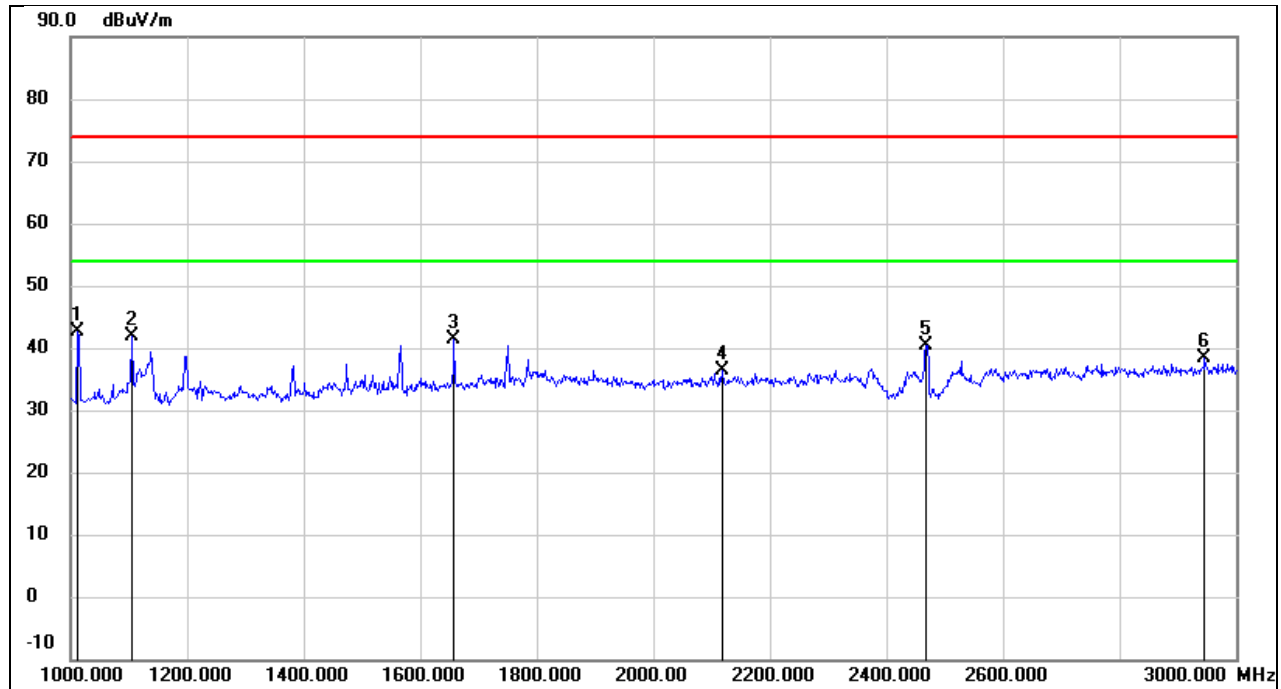


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1012.000	56.80	-14.29	42.51	74.00	-31.49	peak
2	1104.000	55.73	-13.86	41.87	74.00	-32.13	peak
3	1658.000	52.32	-11.04	41.28	74.00	-32.72	peak
4	2118.000	46.20	-9.81	36.39	74.00	-37.61	peak
5	2467.000	48.72	-8.35	40.37	/	/	Fundamental
6	2946.000	44.69	-6.43	38.26	74.00	-35.74	peak

Test Mode:	802.11b	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

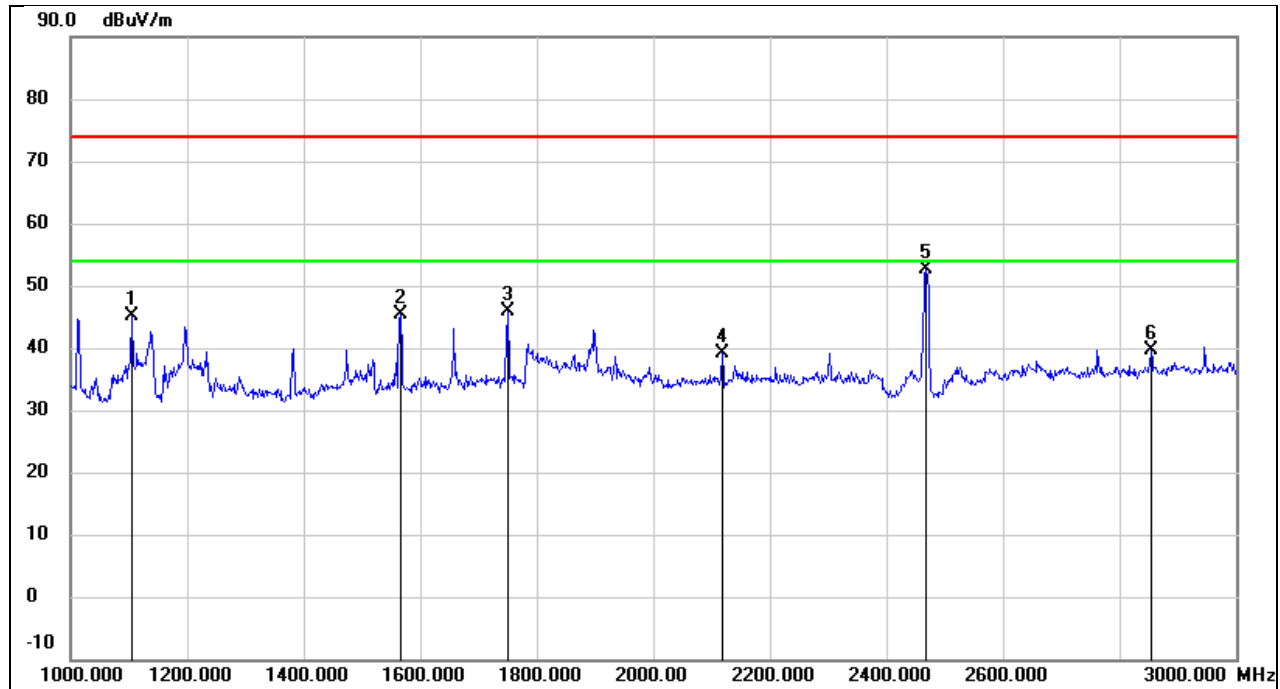


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1106.000	58.95	-13.85	45.10	74.00	-28.90	peak
2	1566.000	57.06	-11.58	45.48	74.00	-28.52	peak
3	1750.000	56.22	-10.42	45.80	74.00	-28.20	peak
4	2118.000	49.03	-9.81	39.22	74.00	-34.78	peak
5	2467.000	60.87	-8.35	52.52	/	/	Fundamental
6	2854.000	46.53	-6.82	39.71	74.00	-34.29	peak

Test Mode:	802.11b	Frequency(MHz):	2472
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

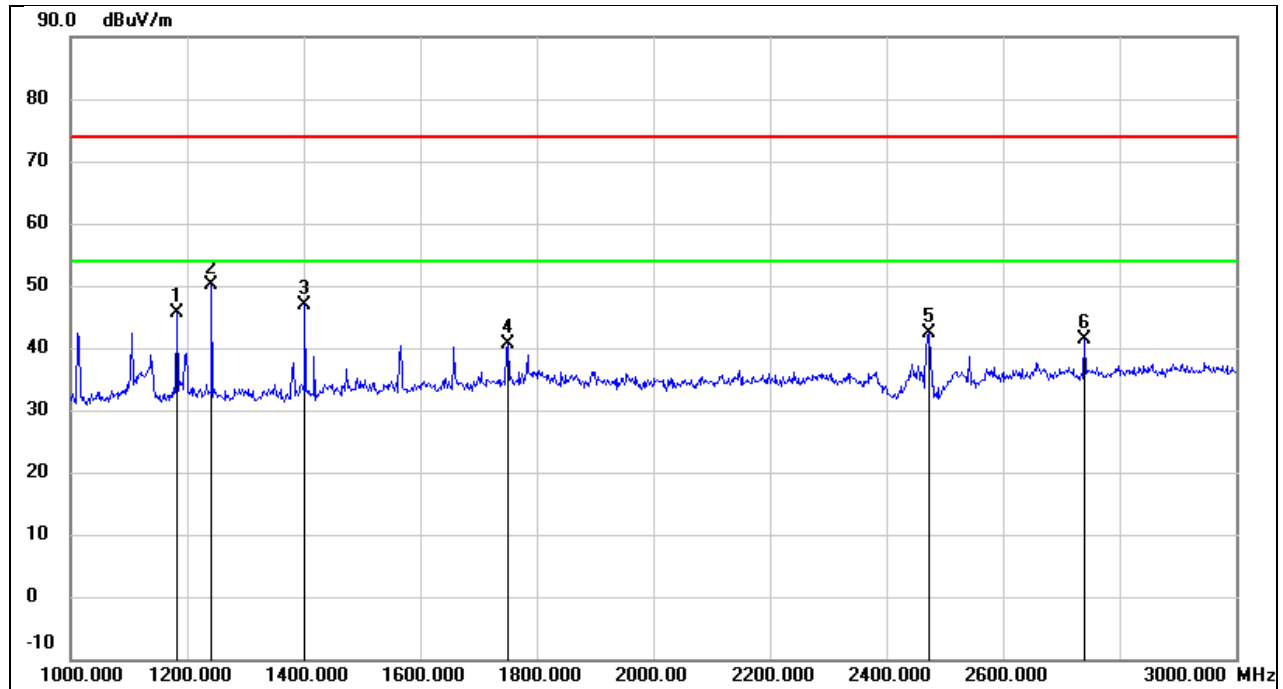

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1182.000	59.18	-13.49	45.69	74.00	-28.31	peak
2	1242.000	63.29	-13.20	50.09	74.00	-23.91	peak
3	1402.000	59.25	-12.42	46.83	74.00	-27.17	peak
4	1750.000	51.01	-10.42	40.59	74.00	-33.41	peak
5	2472.000	50.66	-8.33	42.33	/	/	Fundamental
6	2740.000	48.55	-7.27	41.28	74.00	-32.72	peak


Test Mode:	802.11b	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

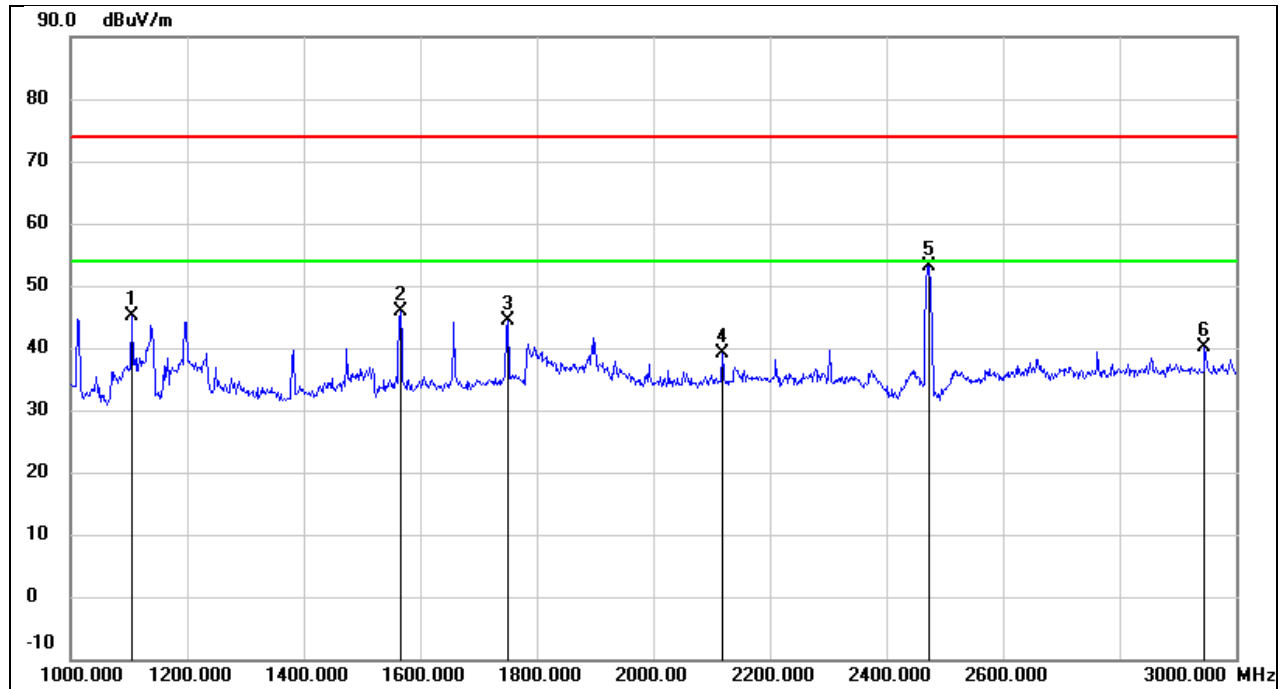

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	58.88	-13.86	45.02	74.00	-28.98	peak
2	1566.000	57.34	-11.58	45.76	74.00	-28.24	peak
3	1750.000	54.89	-10.42	44.47	74.00	-29.53	peak
4	2118.000	49.06	-9.81	39.25	74.00	-34.75	peak
5	2472.000	61.52	-8.33	53.19	/	/	Fundamental
6	2946.000	46.51	-6.43	40.08	74.00	-33.92	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

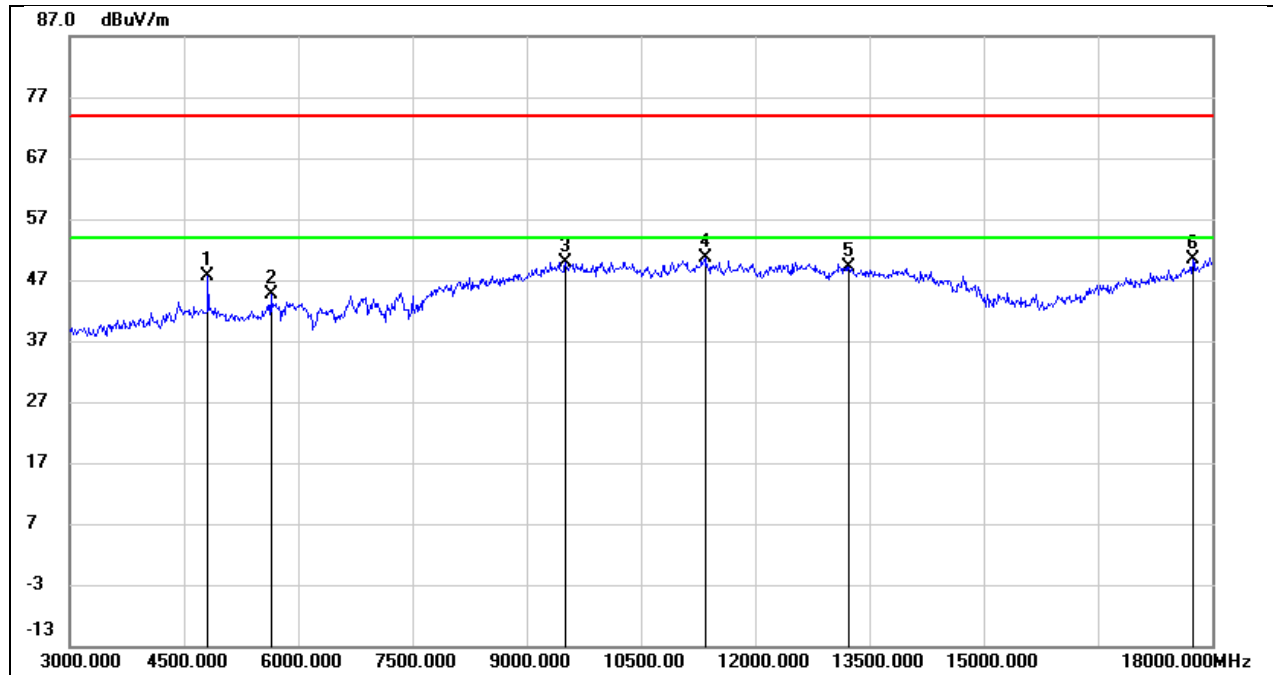


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	47.13	0.50	47.63	74.00	-26.37	peak
2	5640.000	42.12	2.40	44.52	74.00	-29.48	peak
3	9510.000	37.51	12.45	49.96	74.00	-24.04	peak
4	11340.000	33.18	17.46	50.64	74.00	-23.36	peak
5	13230.000	27.91	21.33	49.24	74.00	-24.76	peak
6	17745.000	23.18	27.20	50.38	74.00	-23.62	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

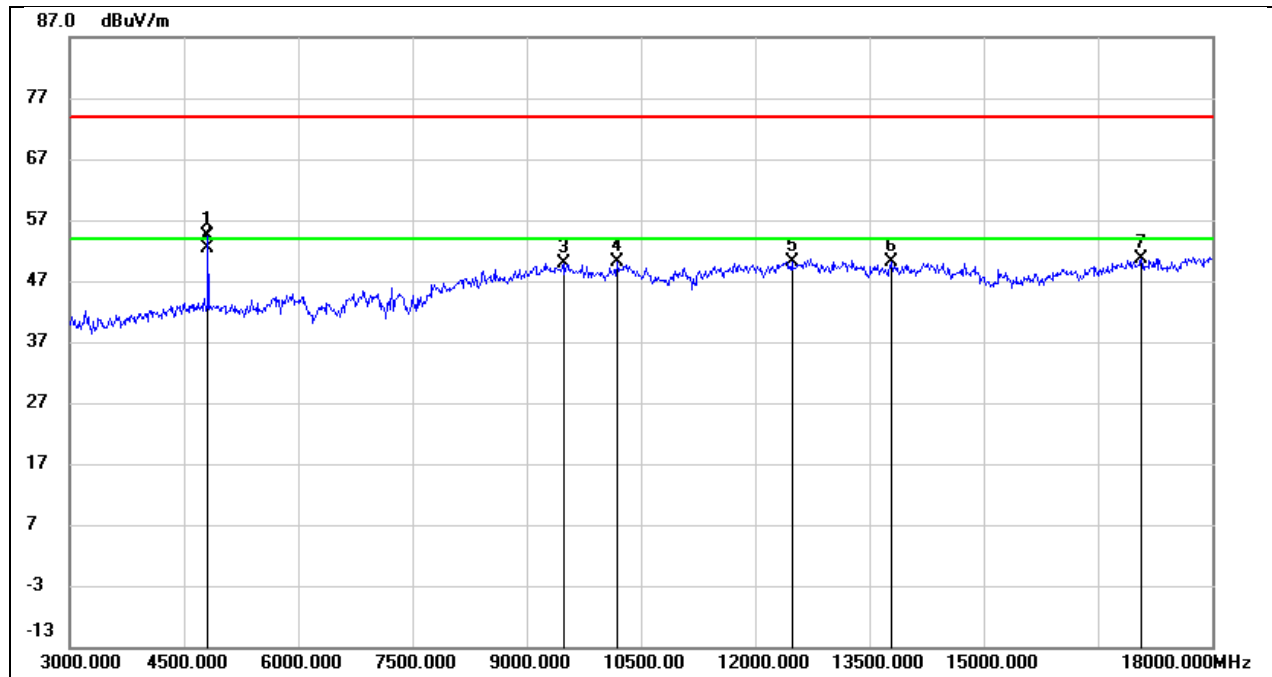


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	52.84	1.59	54.43	74.00	-19.57	peak
2	4815.000	50.71	1.59	52.30	54.00	-1.70	AVG
3	9480.000	37.63	12.33	49.96	74.00	-24.04	peak
4	10185.000	37.42	12.76	50.18	74.00	-23.82	peak
5	12480.000	32.12	18.01	50.13	74.00	-23.87	peak
6	13785.000	28.93	21.26	50.19	74.00	-23.81	peak
7	17070.000	25.49	25.23	50.72	74.00	-23.28	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

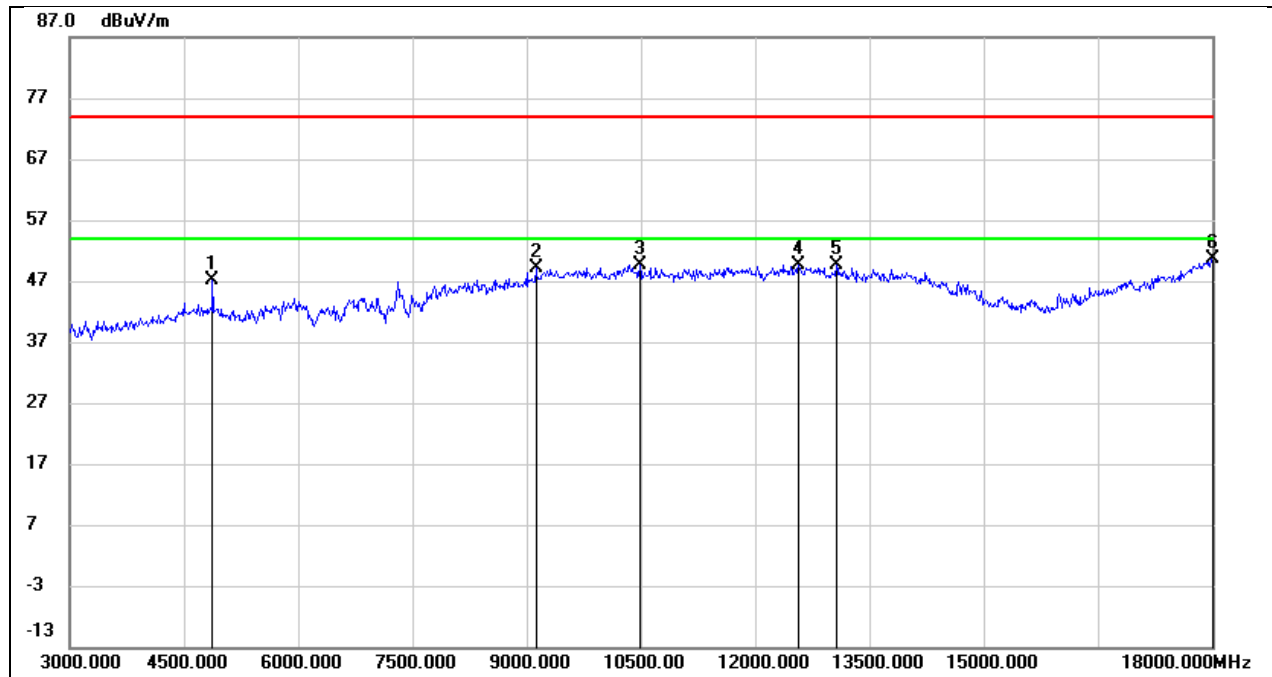


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.50	0.65	47.15	74.00	-26.85	peak
2	9120.000	38.51	10.72	49.23	74.00	-24.77	peak
3	10485.000	35.92	13.67	49.59	74.00	-24.41	peak
4	12570.000	30.77	18.94	49.71	74.00	-24.29	peak
5	13065.000	29.20	20.48	49.68	74.00	-24.32	peak
6	18000.000	21.01	29.64	50.65	74.00	-23.35	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

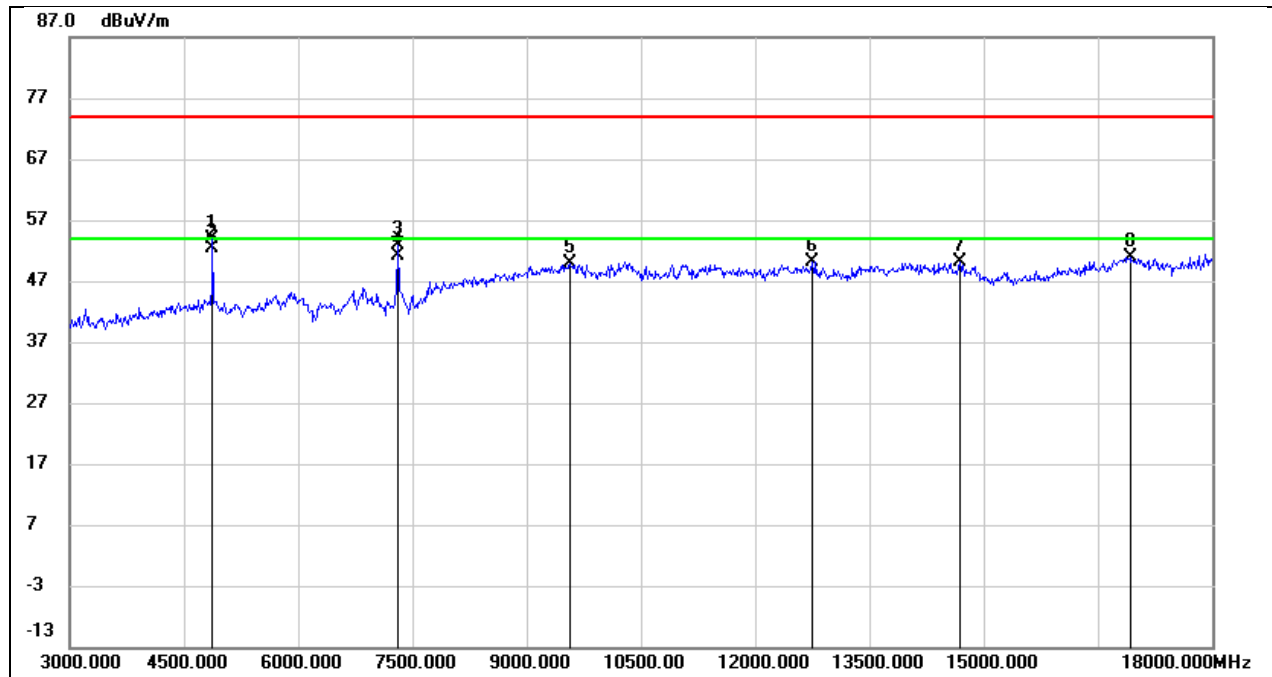


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	52.12	1.78	53.90	74.00	-20.10	peak
2	4875.000	50.69	1.78	52.47	54.00	-1.53	AVG
3	7305.000	45.16	7.68	52.84	74.00	-21.16	peak
4	7305.000	43.52	7.68	51.20	54.00	-2.80	AVG
5	9570.000	37.16	12.60	49.76	74.00	-24.24	peak
6	12750.000	31.89	18.32	50.21	74.00	-23.79	peak
7	14685.000	28.94	21.18	50.12	74.00	-23.88	peak
8	16920.000	25.81	25.08	50.89	74.00	-23.11	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

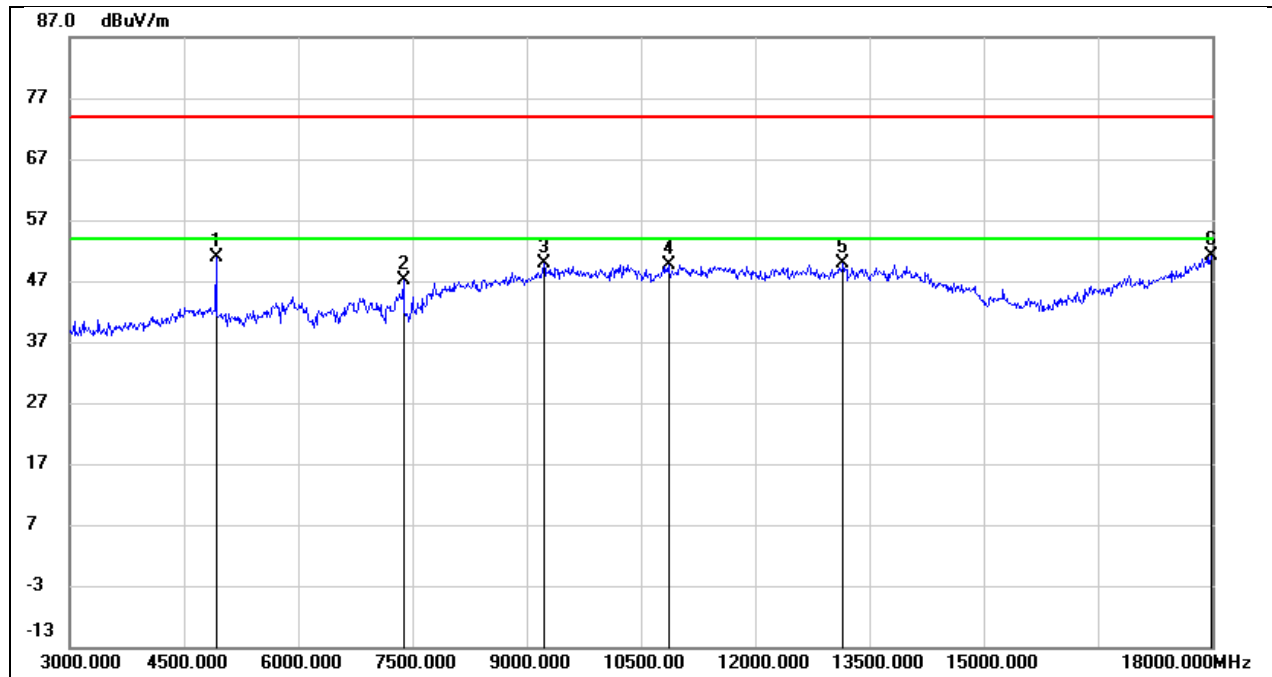


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.16	0.76	50.92	74.00	-23.08	peak
2	7380.000	40.11	7.13	47.24	74.00	-26.76	peak
3	9225.000	38.64	11.19	49.83	74.00	-24.17	peak
4	10860.000	34.44	15.20	49.64	74.00	-24.36	peak
5	13155.000	28.82	20.97	49.79	74.00	-24.21	peak
6	17985.000	21.73	29.49	51.22	74.00	-22.78	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

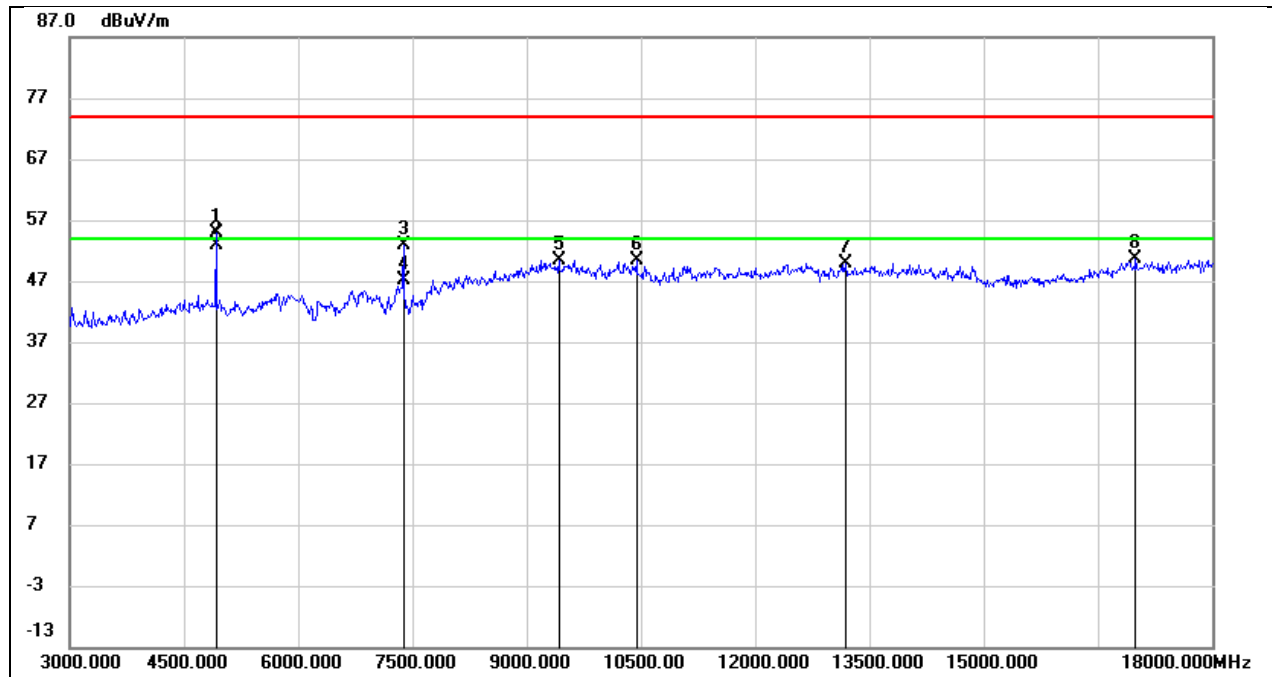


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	53.06	1.91	54.97	74.00	-19.03	peak
2	4920.000	50.98	1.91	52.89	54.00	-1.11	AVG
3	7380.000	45.11	7.73	52.84	74.00	-21.16	peak
4	7380.000	39.32	7.73	47.05	54.00	-6.95	AVG
5	9420.000	38.28	12.11	50.39	74.00	-23.61	peak
6	10440.000	36.96	13.31	50.27	74.00	-23.73	peak
7	13185.000	30.20	19.74	49.94	74.00	-24.06	peak
8	16995.000	25.43	25.18	50.61	74.00	-23.39	peak

Test Mode:	802.11b	Frequency(MHz):	2467
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

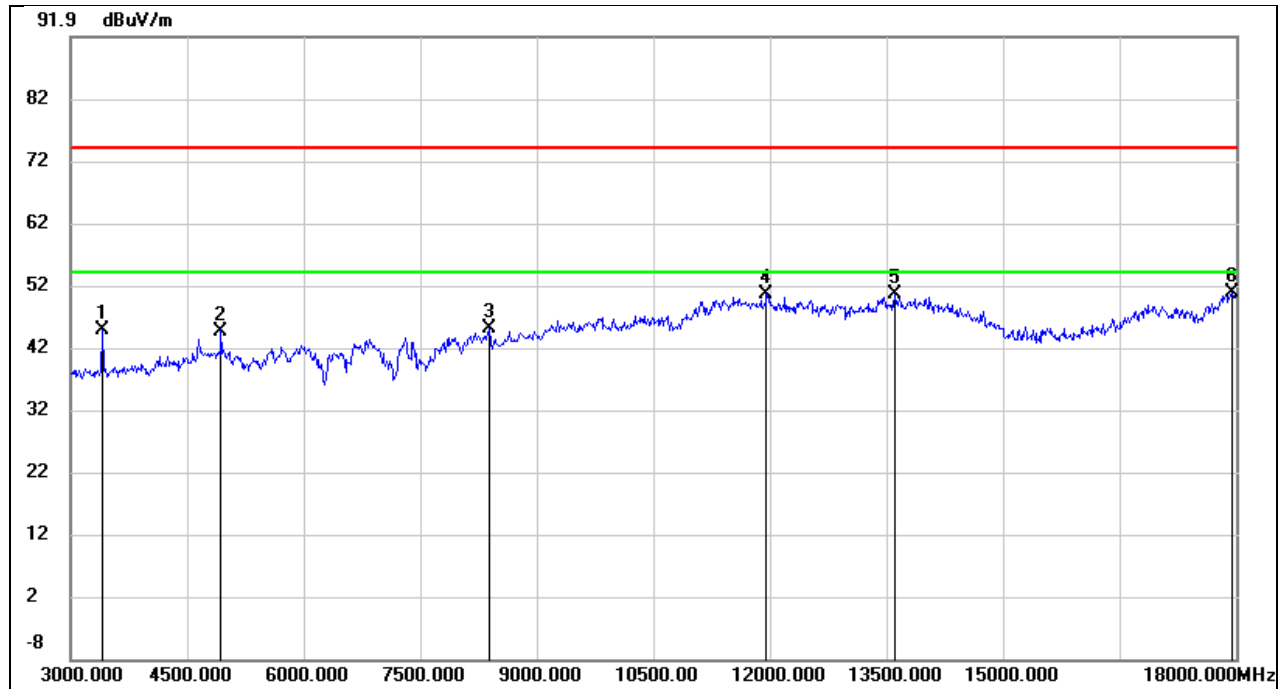


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3405.000	48.73	-4.00	44.73	74.00	-29.27	peak
2	4935.000	43.75	0.90	44.65	74.00	-29.35	peak
3	8385.000	36.14	8.88	45.02	74.00	-28.98	peak
4	11955.000	31.76	18.74	50.50	74.00	-23.50	peak
5	13605.000	27.52	23.01	50.53	74.00	-23.47	peak
6	17955.000	22.67	28.14	50.81	74.00	-23.19	peak

Test Mode:	802.11b	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

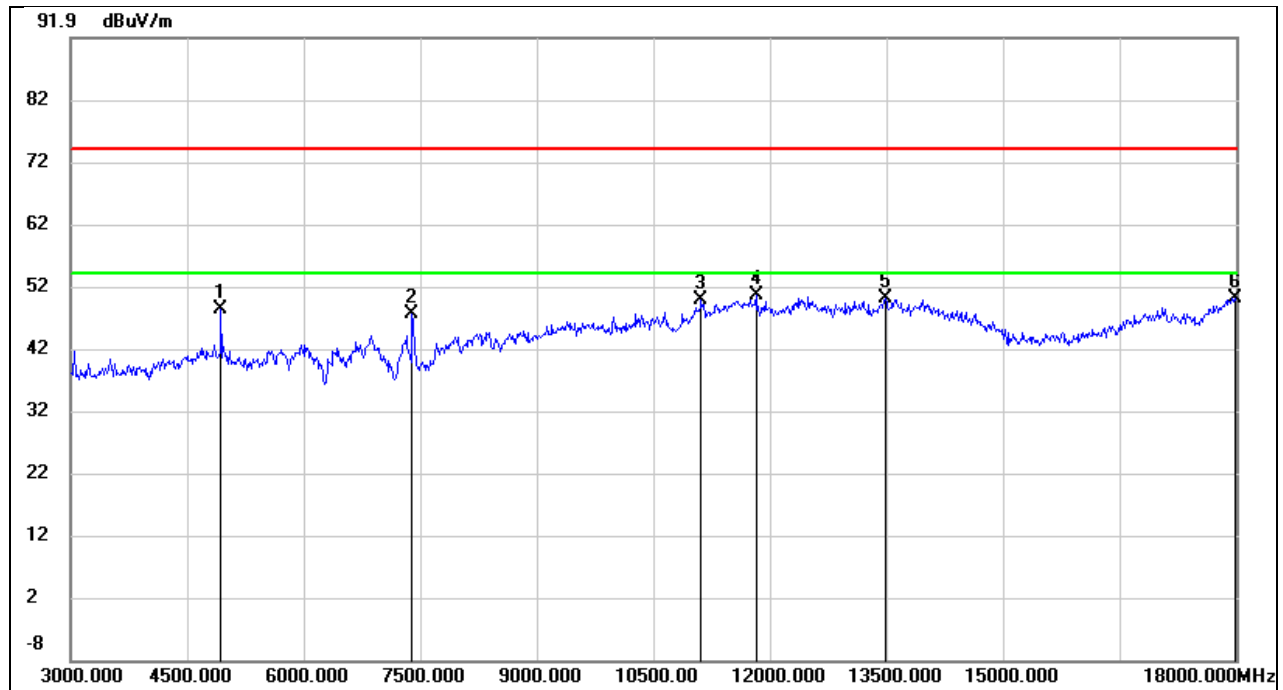


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4935.000	47.34	0.90	48.24	74.00	-25.76	peak
2	7395.000	40.68	6.94	47.62	74.00	-26.38	peak
3	11115.000	32.82	16.88	49.70	74.00	-24.30	peak
4	11820.000	32.06	18.47	50.53	74.00	-23.47	peak
5	13485.000	27.28	22.79	50.07	74.00	-23.93	peak
6	17985.000	21.63	28.41	50.04	74.00	-23.96	peak

Test Mode:	802.11b	Frequency(MHz):	2472
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

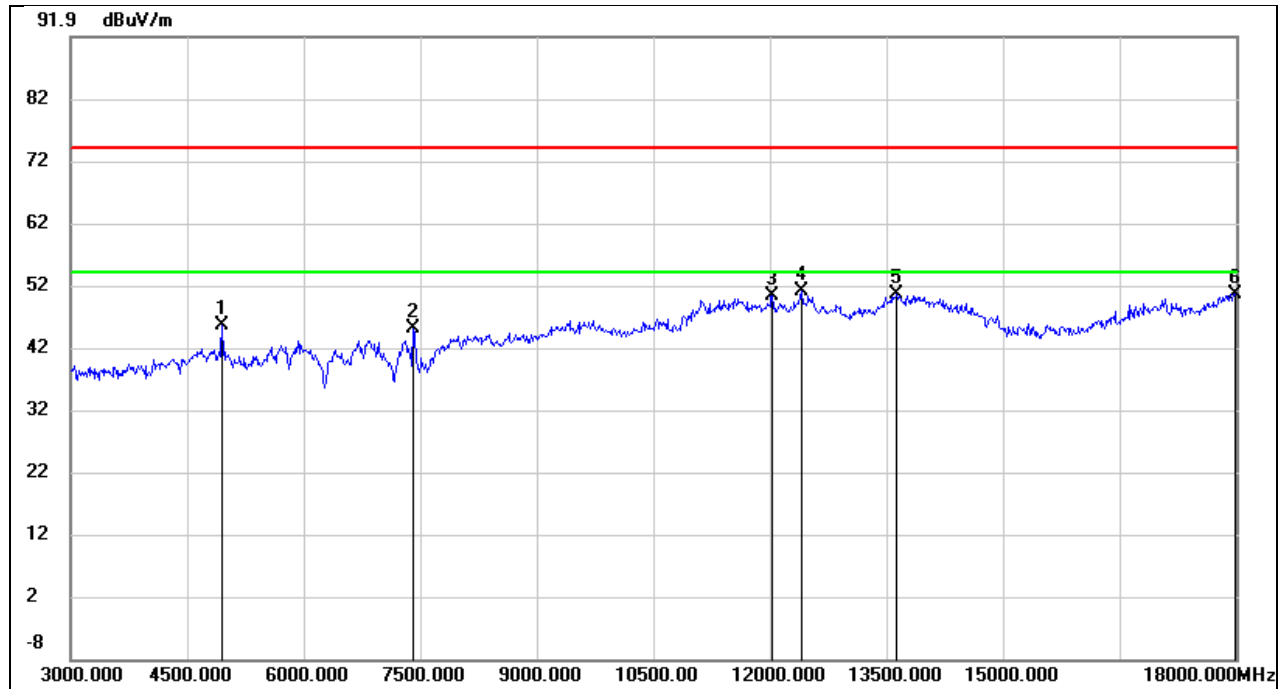


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	44.56	0.93	45.49	74.00	-28.51	peak
2	7410.000	38.13	6.96	45.09	74.00	-28.91	peak
3	12030.000	31.32	18.87	50.19	74.00	-23.81	peak
4	12405.000	31.30	19.64	50.94	74.00	-23.06	peak
5	13635.000	27.39	23.05	50.44	74.00	-23.56	peak
6	17985.000	22.24	28.41	50.65	74.00	-23.35	peak

Test Mode:	802.11b	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

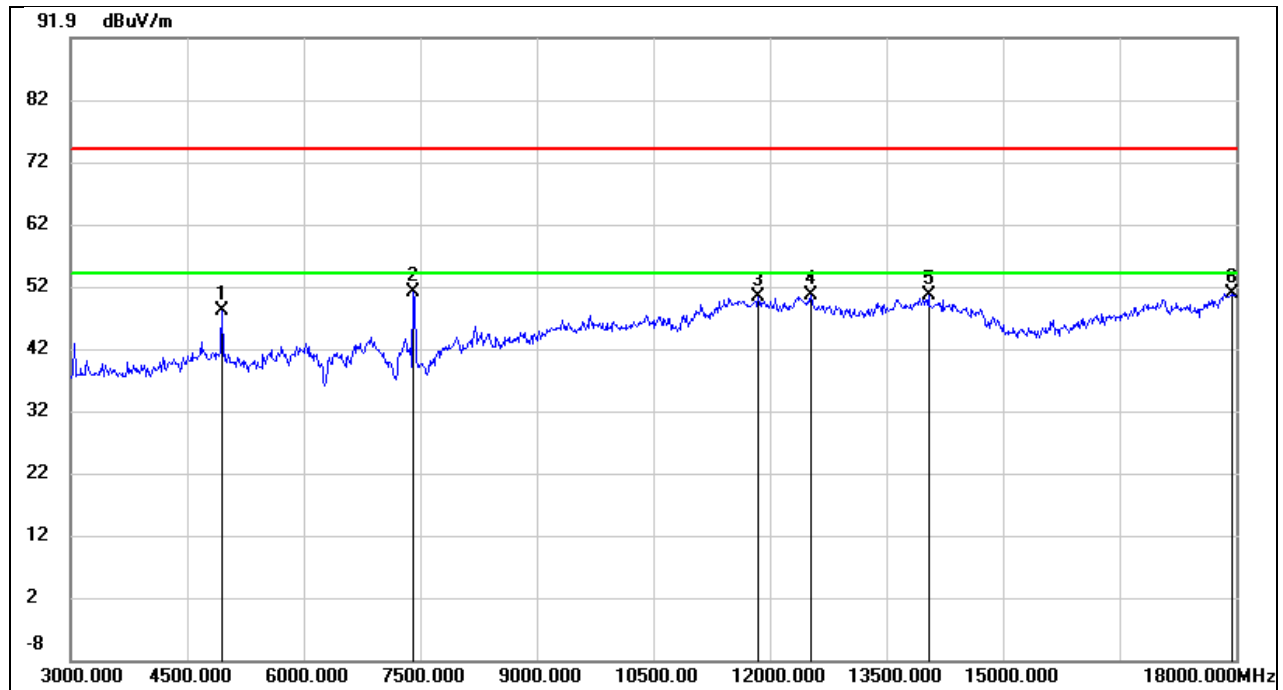


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.08	0.93	48.01	74.00	-25.99	peak
2	7410.000	43.99	6.96	50.95	74.00	-23.05	peak
3	11850.000	31.77	18.53	50.30	74.00	-23.70	peak
4	12525.000	30.77	19.69	50.46	74.00	-23.54	peak
5	14040.000	26.56	23.97	50.53	74.00	-23.47	peak
6	17940.000	22.82	28.02	50.84	74.00	-23.16	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

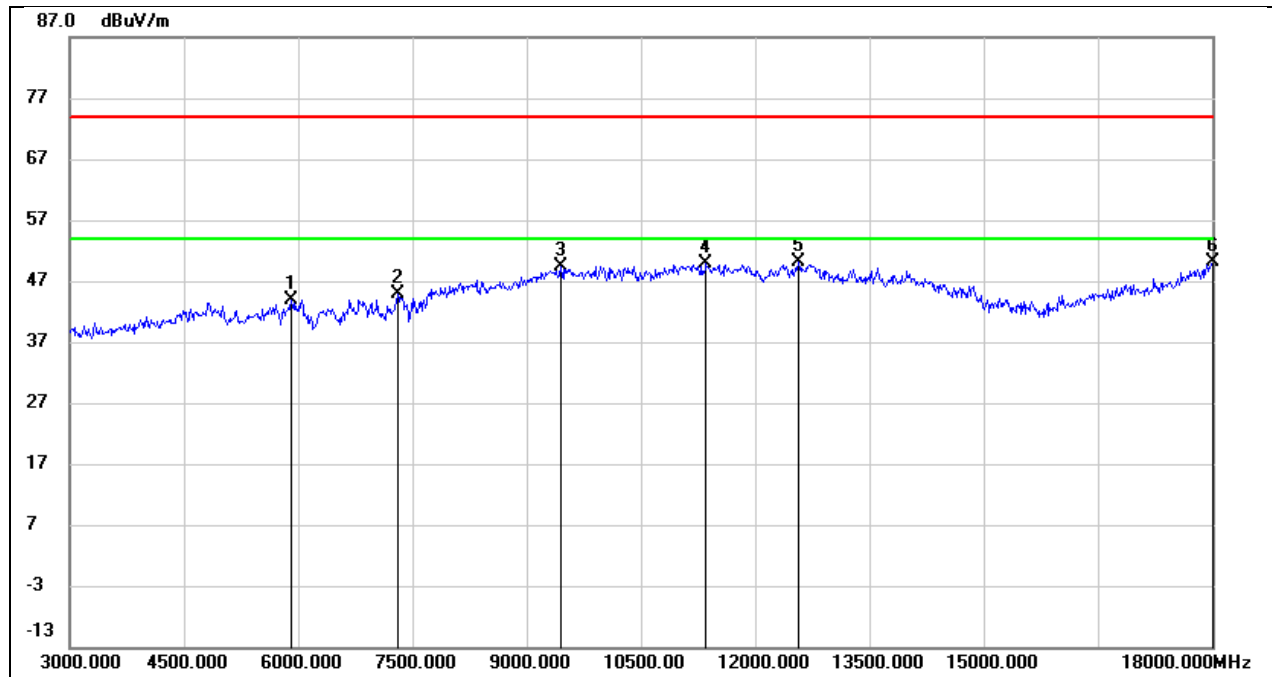


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5910.000	40.84	2.96	43.80	74.00	-30.20	peak
2	7305.000	37.80	7.03	44.83	74.00	-29.17	peak
3	9450.000	37.22	12.18	49.40	74.00	-24.60	peak
4	11355.000	32.35	17.50	49.85	74.00	-24.15	peak
5	12570.000	31.11	18.94	50.05	74.00	-23.95	peak
6	18000.000	20.58	29.64	50.22	74.00	-23.78	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

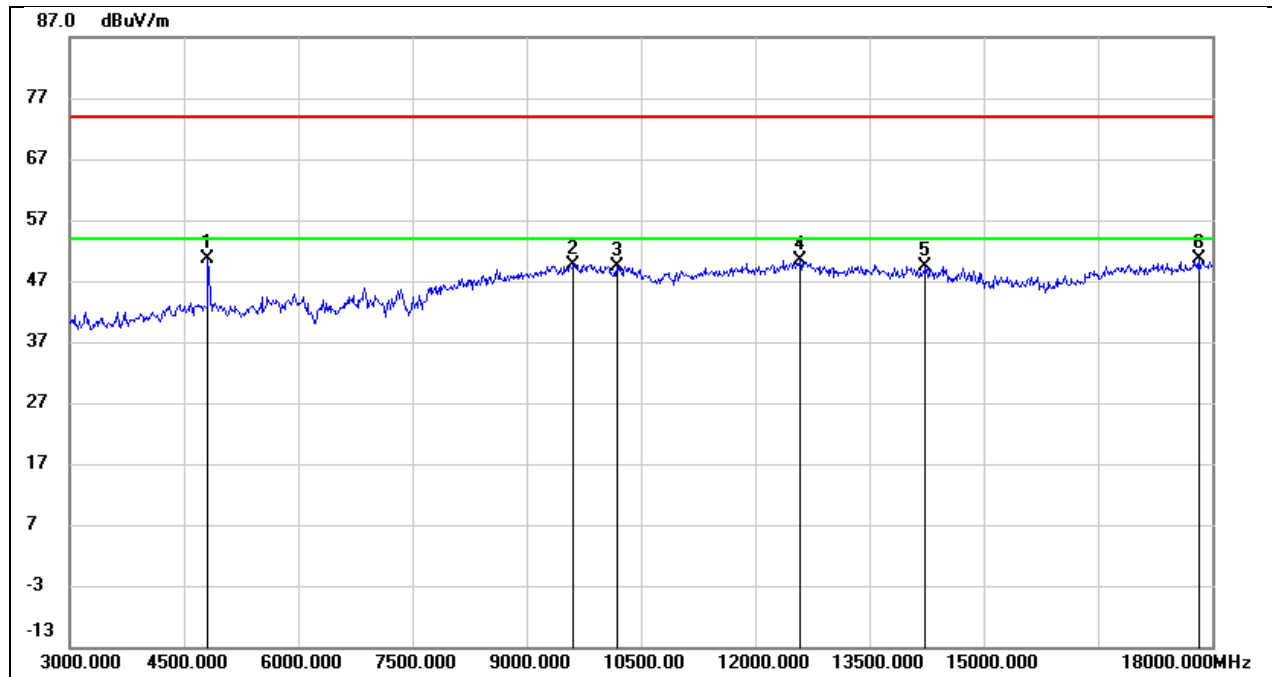


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	49.09	1.59	50.68	74.00	-23.32	peak
2	9615.000	37.05	12.70	49.75	74.00	-24.25	peak
3	10185.000	36.57	12.76	49.33	74.00	-24.67	peak
4	12585.000	32.45	18.01	50.46	74.00	-23.54	peak
5	14235.000	27.27	22.17	49.44	74.00	-24.56	peak
6	17820.000	24.18	26.39	50.57	74.00	-23.43	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

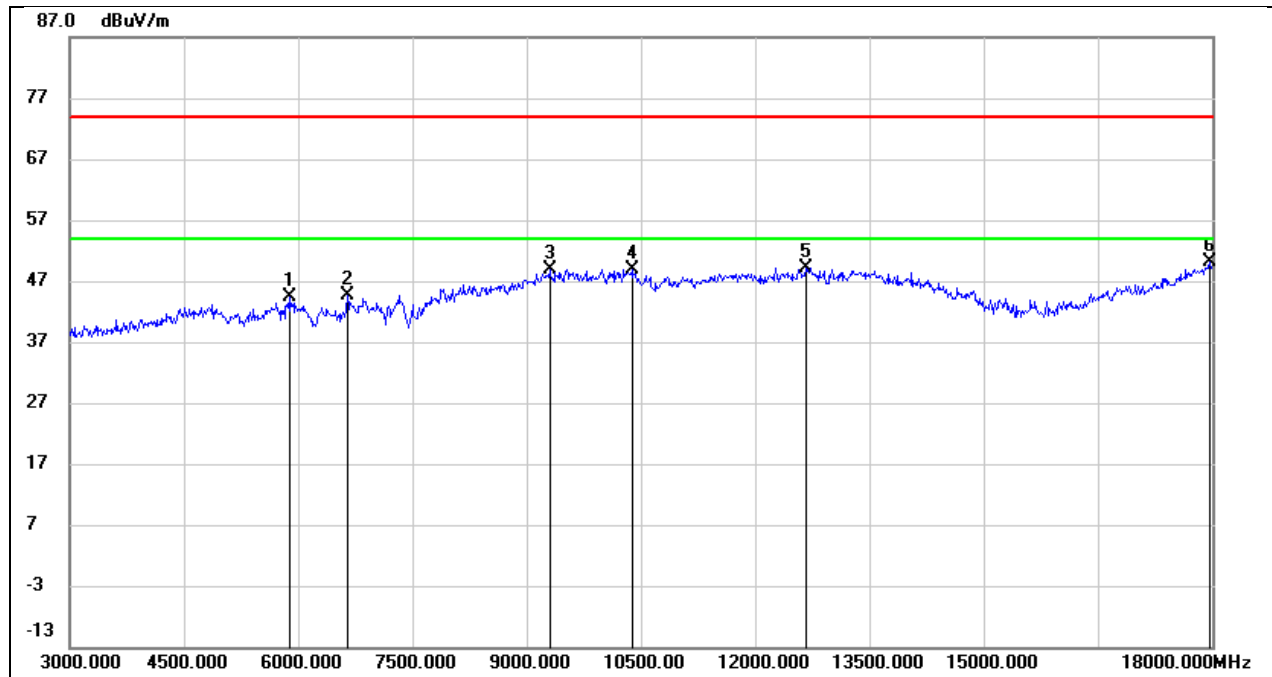


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	41.54	2.90	44.44	74.00	-29.56	peak
2	6645.000	39.41	5.24	44.65	74.00	-29.35	peak
3	9300.000	37.35	11.52	48.87	74.00	-25.13	peak
4	10380.000	35.53	13.46	48.99	74.00	-25.01	peak
5	12660.000	29.99	19.12	49.11	74.00	-24.89	peak
6	17970.000	20.69	29.33	50.02	74.00	-23.98	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

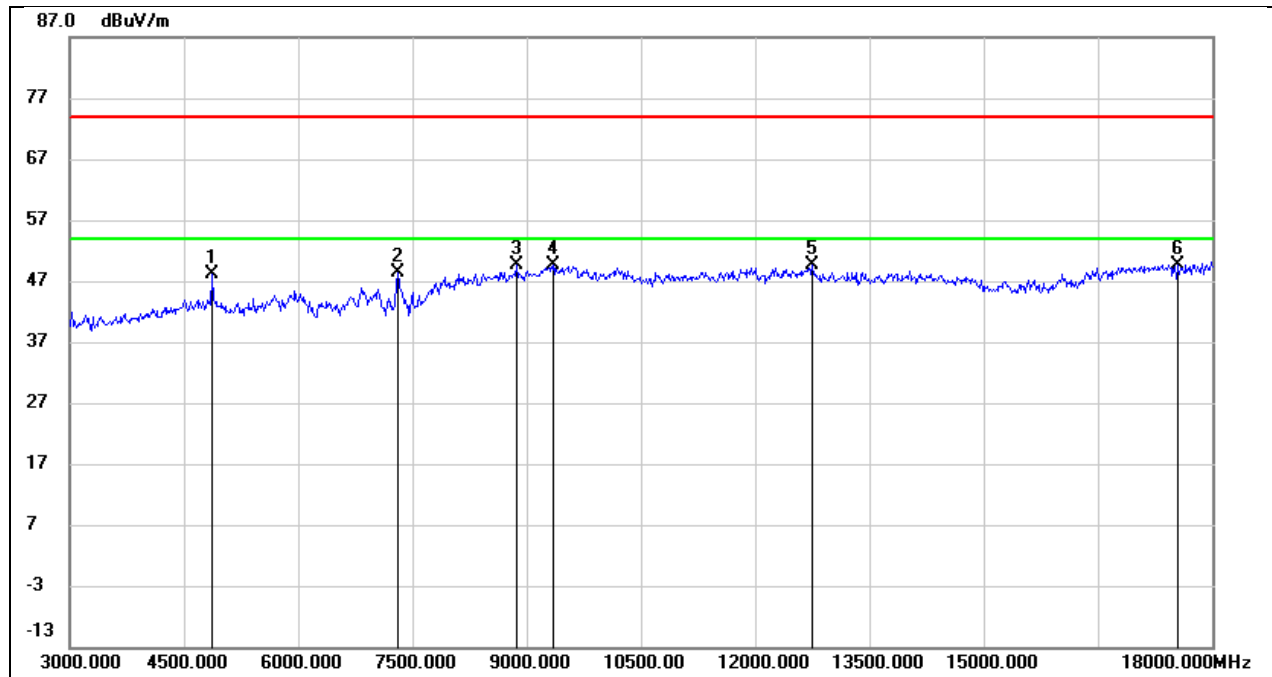


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.32	1.78	48.10	74.00	-25.90	peak
2	7305.000	40.59	7.68	48.27	74.00	-25.73	peak
3	8865.000	39.35	10.21	49.56	74.00	-24.44	peak
4	9345.000	37.78	11.84	49.62	74.00	-24.38	peak
5	12750.000	31.43	18.32	49.75	74.00	-24.25	peak
6	17550.000	24.08	25.58	49.66	74.00	-24.34	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

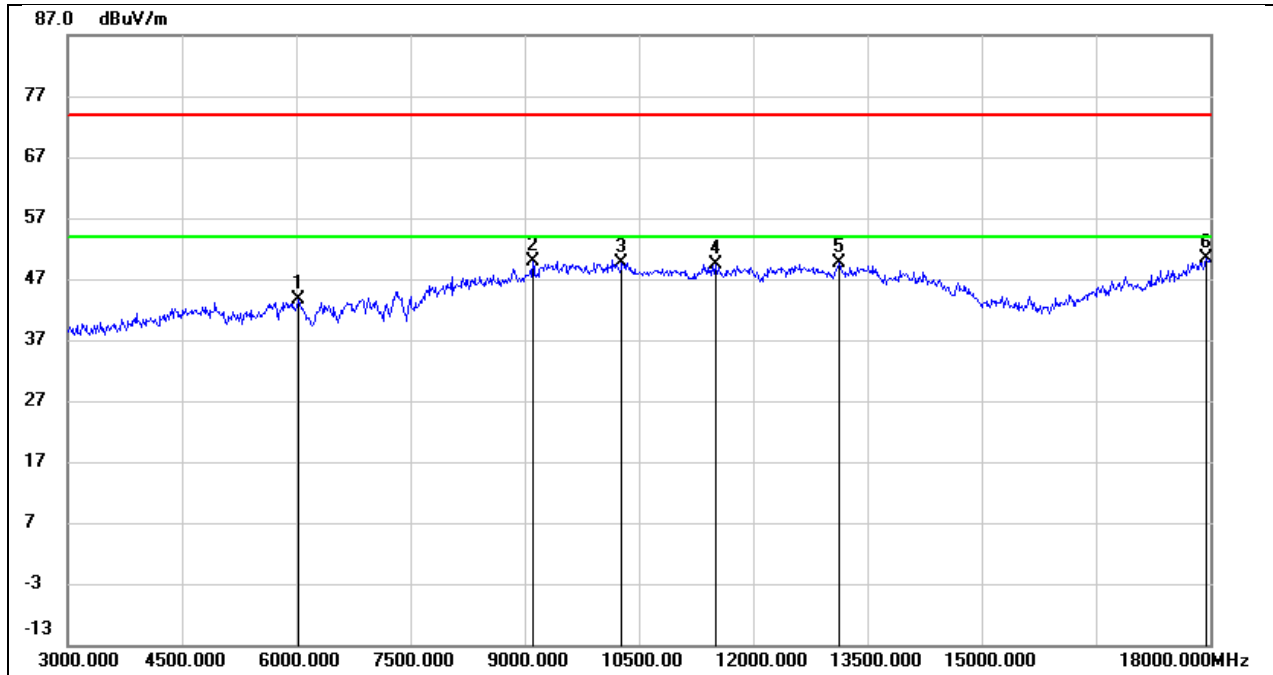


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6030.000	40.46	3.26	43.72	74.00	-30.28	peak
2	9105.000	39.18	10.66	49.84	74.00	-24.16	peak
3	10275.000	36.28	13.36	49.64	74.00	-24.36	peak
4	11505.000	31.42	17.99	49.41	74.00	-24.59	peak
5	13125.000	28.83	20.80	49.63	74.00	-24.37	peak
6	17955.000	21.24	29.18	50.42	74.00	-23.58	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

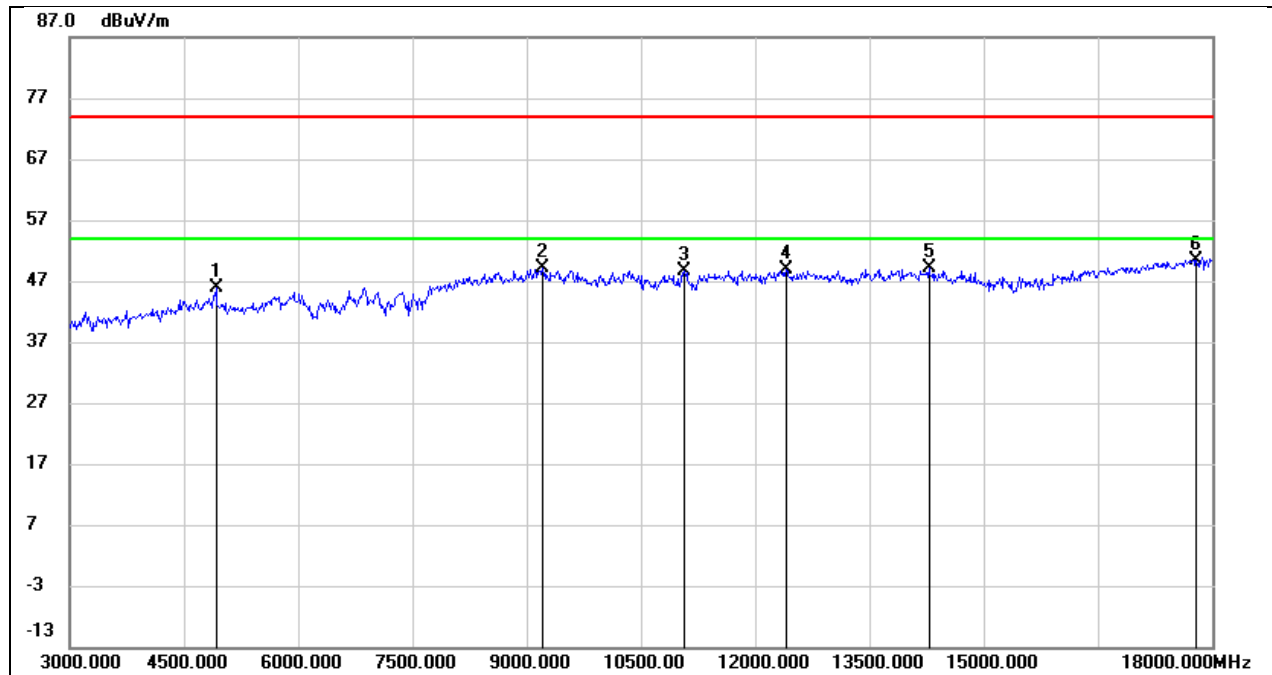


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.05	1.91	45.96	74.00	-28.04	peak
2	9210.000	37.67	11.36	49.03	74.00	-24.97	peak
3	11070.000	33.12	15.47	48.59	74.00	-25.41	peak
4	12405.000	30.95	18.03	48.98	74.00	-25.02	peak
5	14280.000	27.04	22.05	49.09	74.00	-24.91	peak
6	17790.000	24.25	26.25	50.50	74.00	-23.50	peak

Test Mode:	802.11g	Frequency(MHz):	2467
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

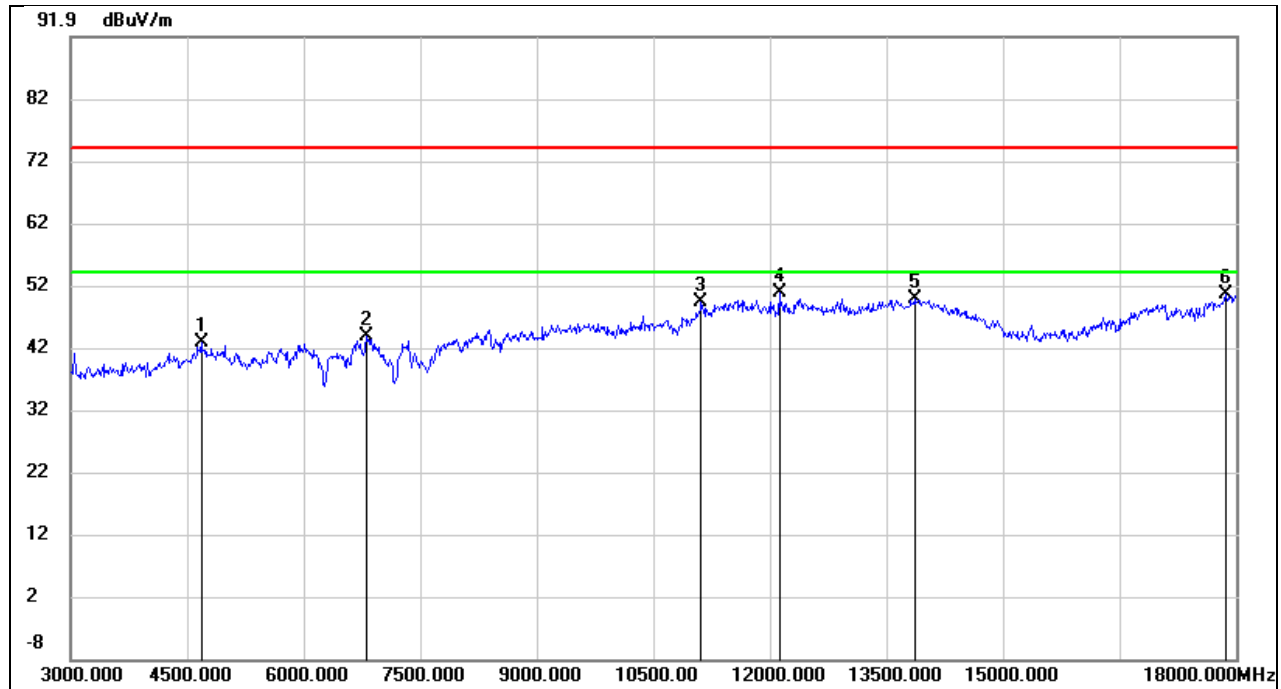


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4680.000	42.46	0.21	42.67	74.00	-31.33	peak
2	6810.000	37.88	5.97	43.85	74.00	-30.15	peak
3	11115.000	32.42	16.88	49.30	74.00	-24.70	peak
4	12120.000	31.70	18.99	50.69	74.00	-23.31	peak
5	13860.000	26.19	23.52	49.71	74.00	-24.29	peak
6	17865.000	23.08	27.35	50.43	74.00	-23.57	peak

Test Mode:	802.11g	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

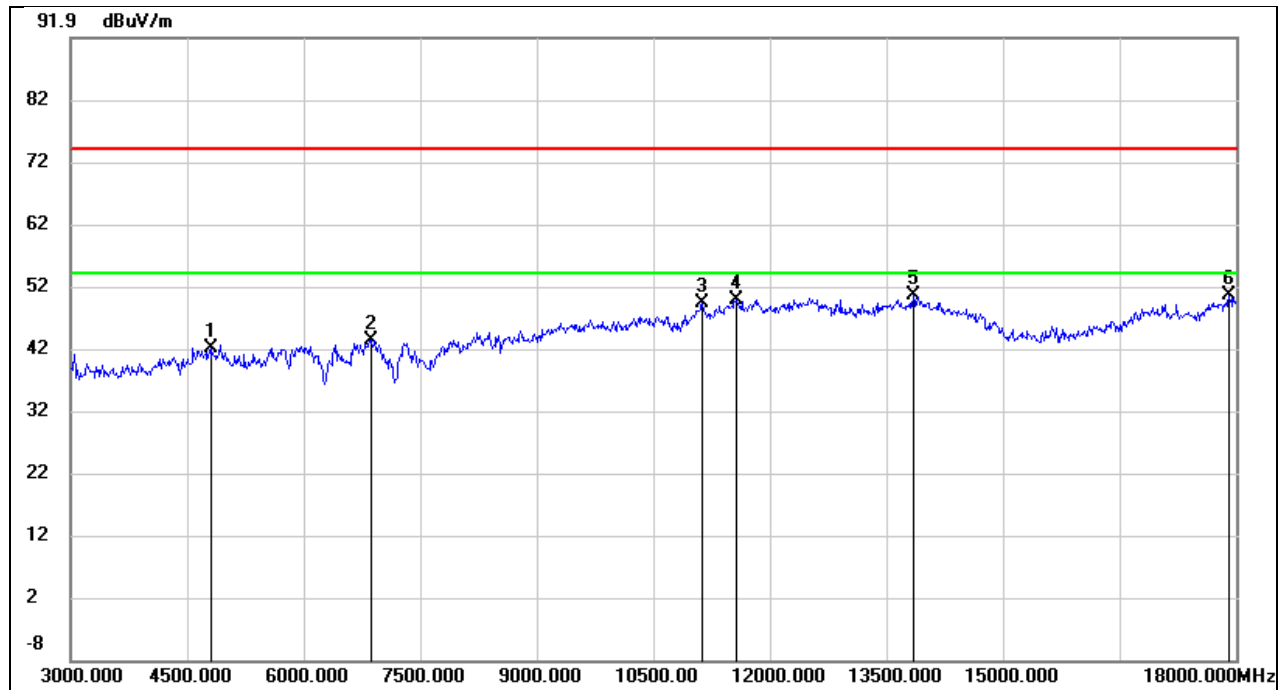


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.44	0.57	42.01	74.00	-31.99	peak
2	6870.000	37.18	6.12	43.30	74.00	-30.70	peak
3	11130.000	32.31	16.94	49.25	74.00	-24.75	peak
4	11565.000	31.97	17.86	49.83	74.00	-24.17	peak
5	13845.000	27.05	23.45	50.50	74.00	-23.50	peak
6	17910.000	22.78	27.75	50.53	74.00	-23.47	peak

Test Mode:	802.11g	Frequency(MHz):	2472
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

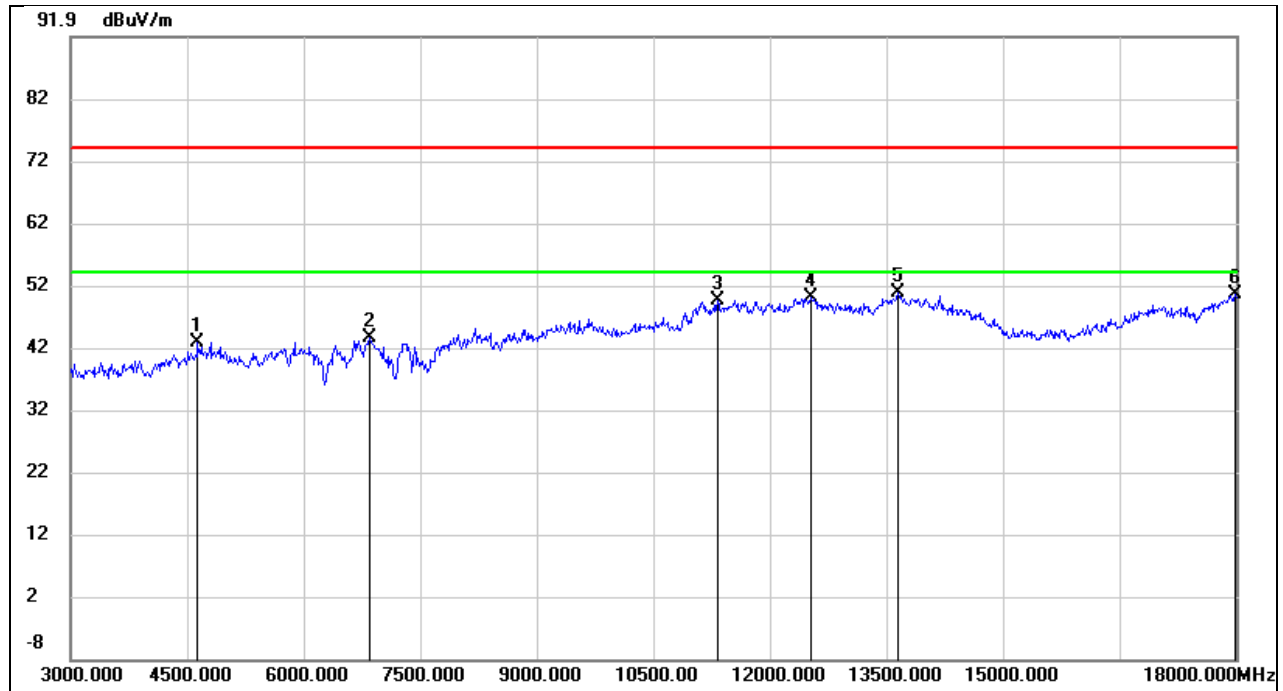


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.000	42.76	0.08	42.84	74.00	-31.16	peak
2	6840.000	37.58	6.04	43.62	74.00	-30.38	peak
3	11325.000	32.06	17.38	49.44	74.00	-24.56	peak
4	12525.000	30.22	19.69	49.91	74.00	-24.09	peak
5	13650.000	27.68	23.06	50.74	74.00	-23.26	peak
6	17985.000	22.24	28.41	50.65	74.00	-23.35	peak

Test Mode:	802.11g	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

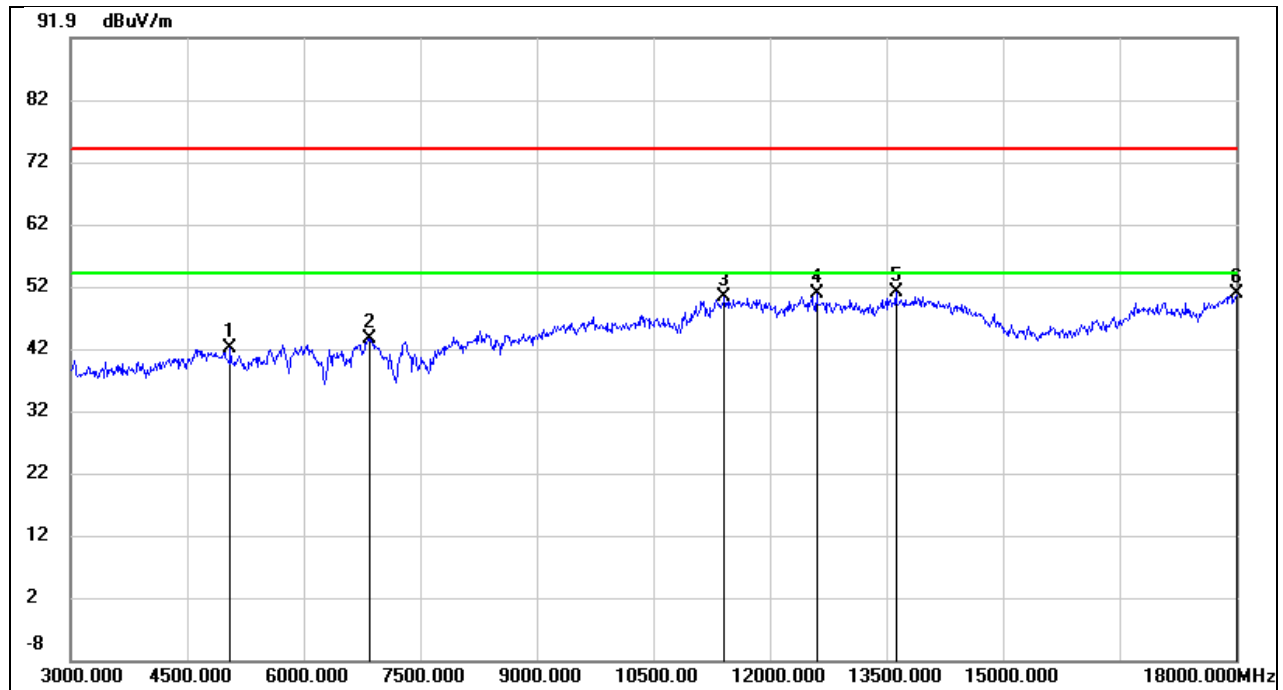


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5055.000	40.92	1.08	42.00	74.00	-32.00	peak
2	6840.000	37.55	6.04	43.59	74.00	-30.41	peak
3	11415.000	32.79	17.48	50.27	74.00	-23.73	peak
4	12600.000	31.05	19.69	50.74	74.00	-23.26	peak
5	13620.000	27.97	23.03	51.00	74.00	-23.00	peak
6	18000.000	22.19	28.54	50.73	74.00	-23.27	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

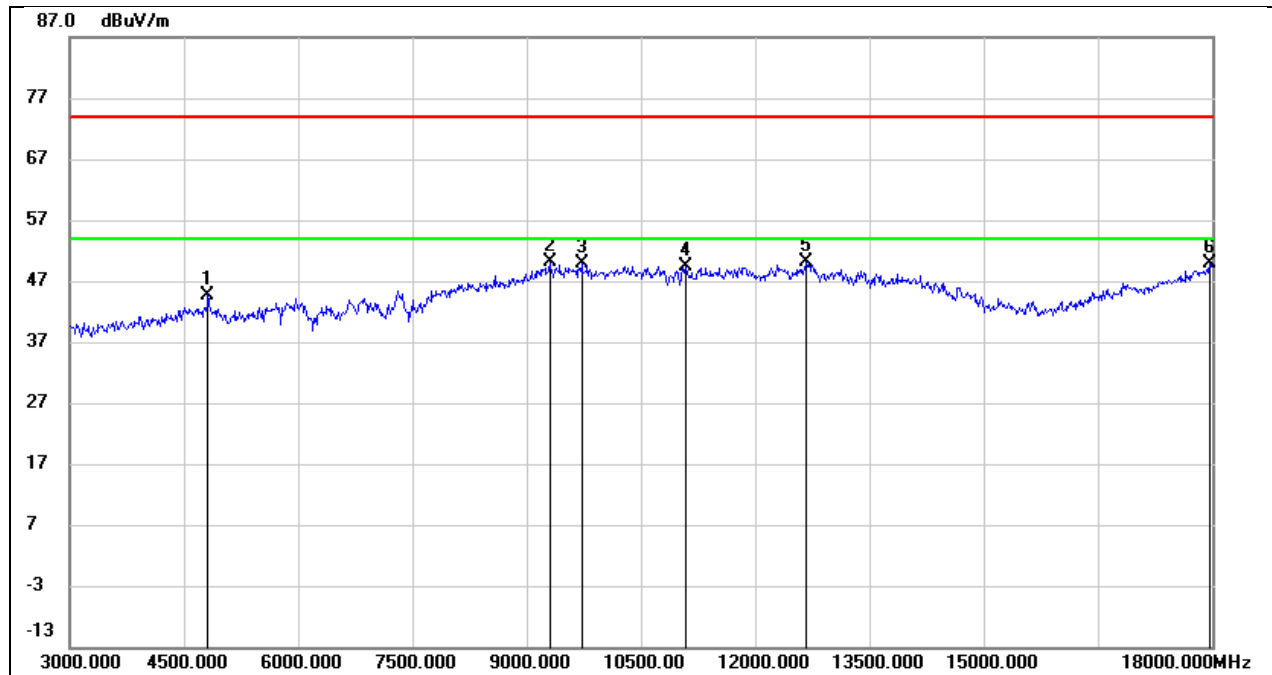


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	44.25	0.50	44.75	74.00	-29.25	peak
2	9300.000	38.51	11.52	50.03	74.00	-23.97	peak
3	9720.000	36.66	13.11	49.77	74.00	-24.23	peak
4	11085.000	32.91	16.46	49.37	74.00	-24.63	peak
5	12675.000	30.86	19.18	50.04	74.00	-23.96	peak
6	17970.000	20.46	29.33	49.79	74.00	-24.21	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

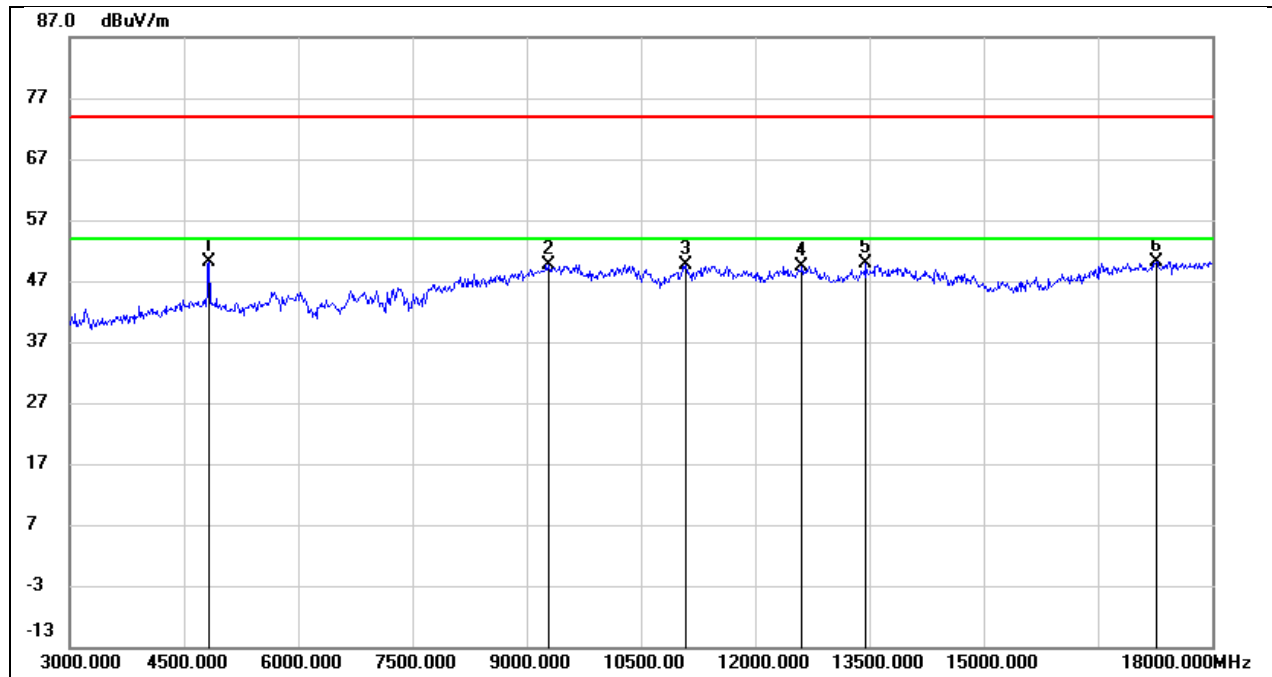


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	48.55	1.64	50.19	74.00	-23.81	peak
2	9285.000	38.10	11.62	49.72	74.00	-24.28	peak
3	11085.000	34.05	15.54	49.59	74.00	-24.41	peak
4	12615.000	31.43	18.04	49.47	74.00	-24.53	peak
5	13455.000	29.30	20.62	49.92	74.00	-24.08	peak
6	17265.000	24.83	25.34	50.17	74.00	-23.83	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

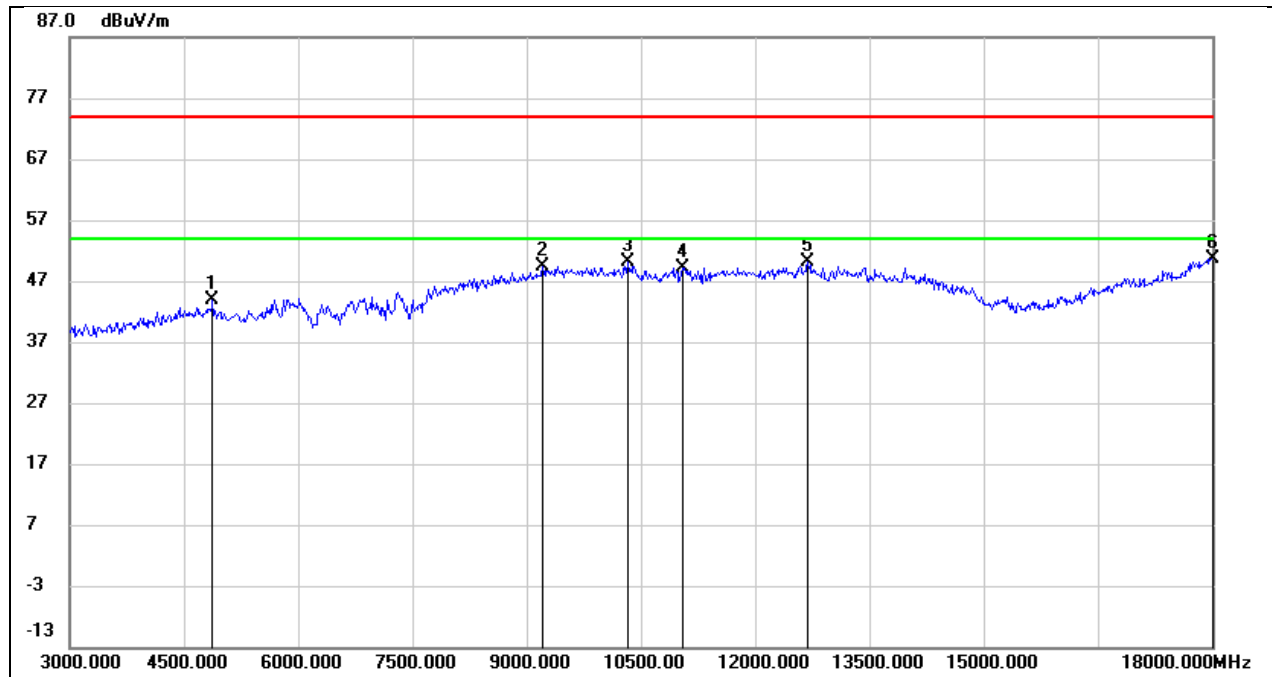


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.33	0.65	43.98	74.00	-30.02	peak
2	9210.000	38.23	11.13	49.36	74.00	-24.64	peak
3	10320.000	36.72	13.39	50.11	74.00	-23.89	peak
4	11040.000	33.04	16.19	49.23	74.00	-24.77	peak
5	12690.000	30.91	19.21	50.12	74.00	-23.88	peak
6	18000.000	21.10	29.64	50.74	74.00	-23.26	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

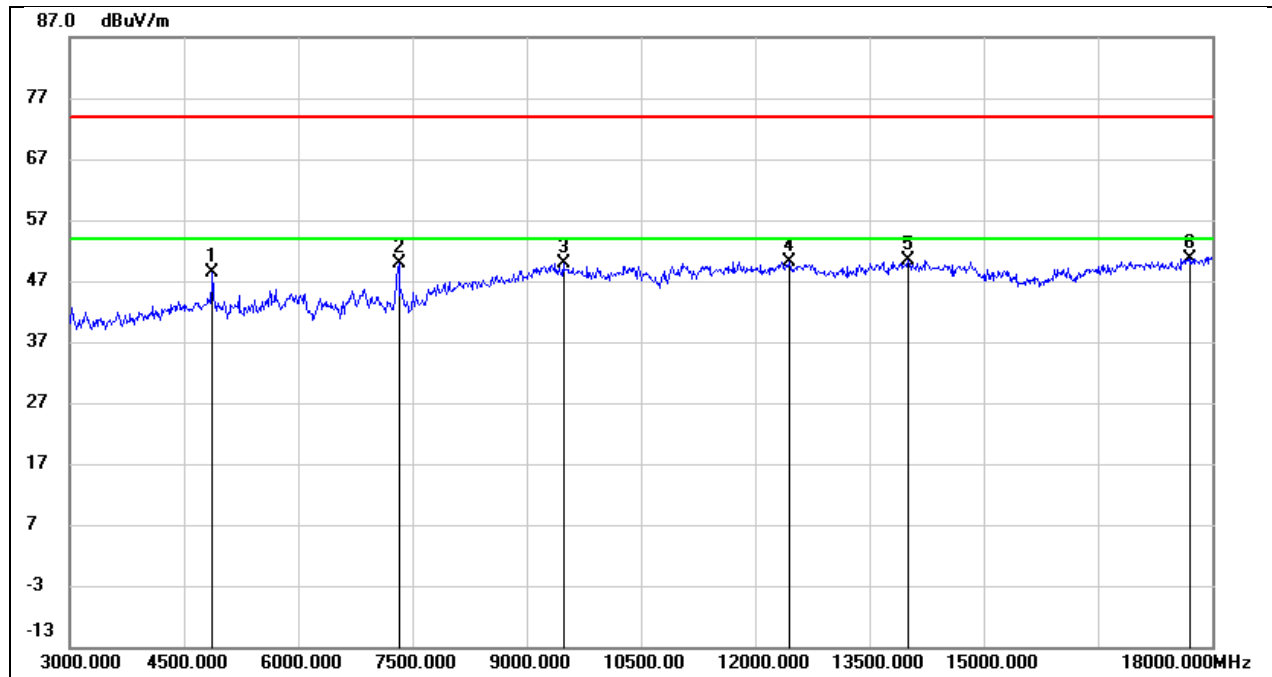


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.53	1.78	48.31	74.00	-25.69	peak
2	7320.000	42.16	7.69	49.85	74.00	-24.15	peak
3	9480.000	37.53	12.33	49.86	74.00	-24.14	peak
4	12450.000	32.20	18.01	50.21	74.00	-23.79	peak
5	14010.000	28.18	22.20	50.38	74.00	-23.62	peak
6	17715.000	24.67	26.04	50.71	74.00	-23.29	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

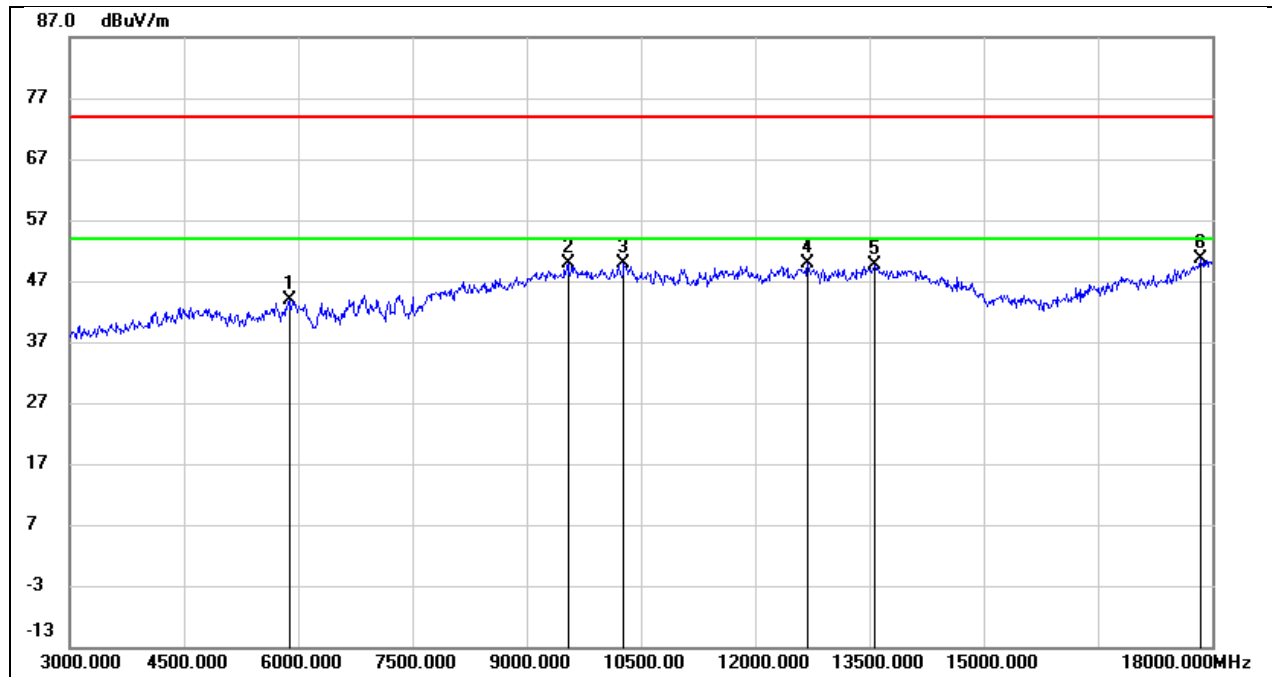


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	40.93	2.90	43.83	74.00	-30.17	peak
2	9540.000	37.22	12.58	49.80	74.00	-24.20	peak
3	10275.000	36.46	13.36	49.82	74.00	-24.18	peak
4	12690.000	30.67	19.21	49.88	74.00	-24.12	peak
5	13575.000	27.16	22.58	49.74	74.00	-24.26	peak
6	17850.000	22.43	28.11	50.54	74.00	-23.46	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

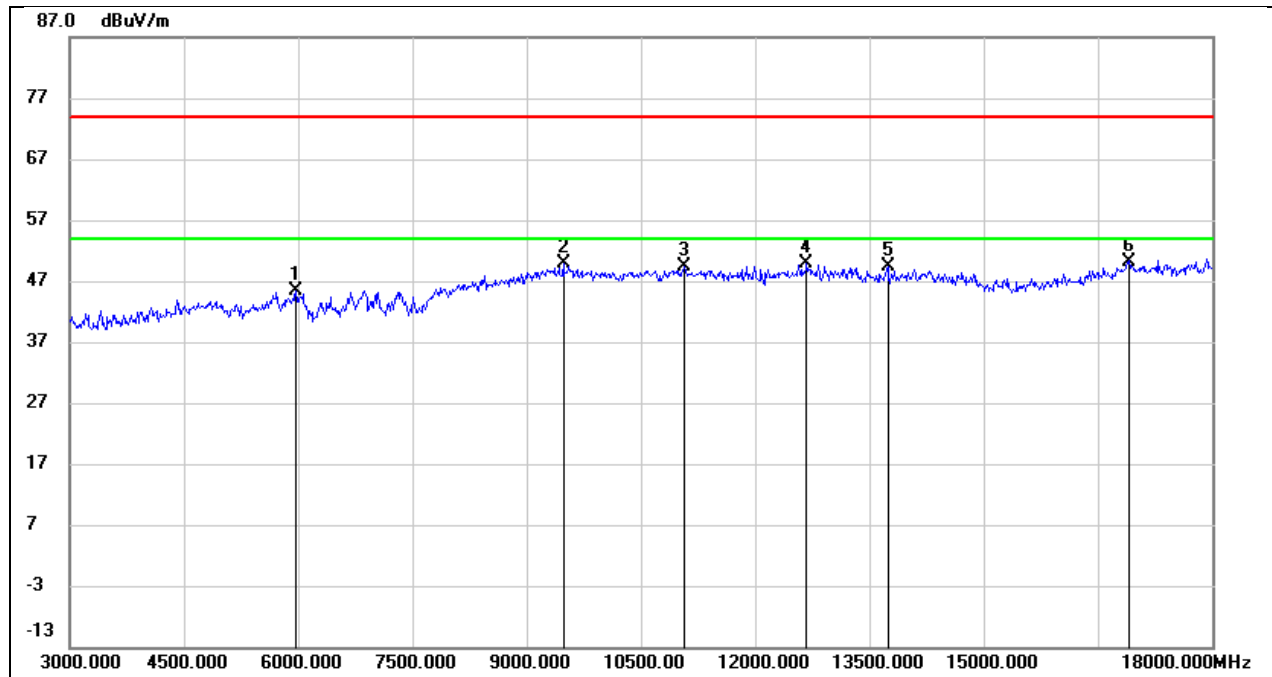


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	41.27	4.08	45.35	74.00	-28.65	peak
2	9480.000	37.46	12.33	49.79	74.00	-24.21	peak
3	11070.000	33.99	15.47	49.46	74.00	-24.54	peak
4	12675.000	31.60	18.17	49.77	74.00	-24.23	peak
5	13740.000	28.23	21.19	49.42	74.00	-24.58	peak
6	16905.000	25.19	25.06	50.25	74.00	-23.75	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2467
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

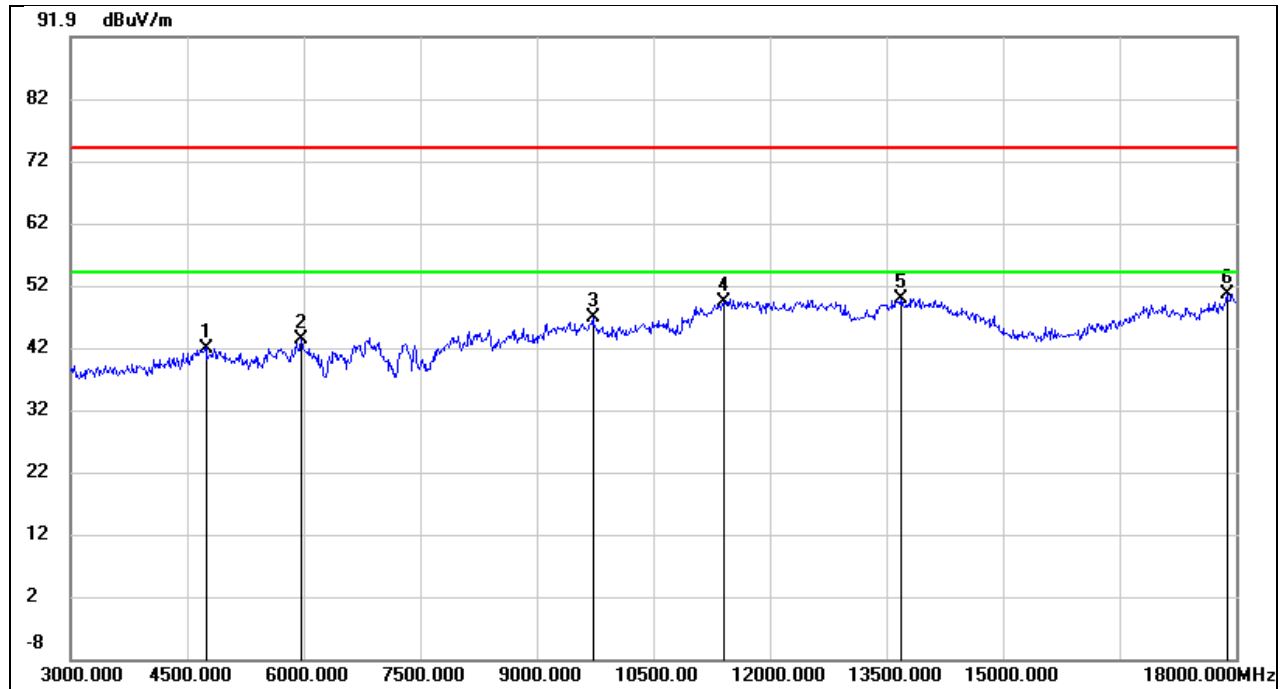


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4740.000	41.51	0.39	41.90	74.00	-32.10	peak
2	5970.000	40.41	2.88	43.29	74.00	-30.71	peak
3	9720.000	33.94	12.95	46.89	74.00	-27.11	peak
4	11415.000	31.87	17.48	49.35	74.00	-24.65	peak
5	13695.000	26.73	23.13	49.86	74.00	-24.14	peak
6	17880.000	23.14	27.49	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2467
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

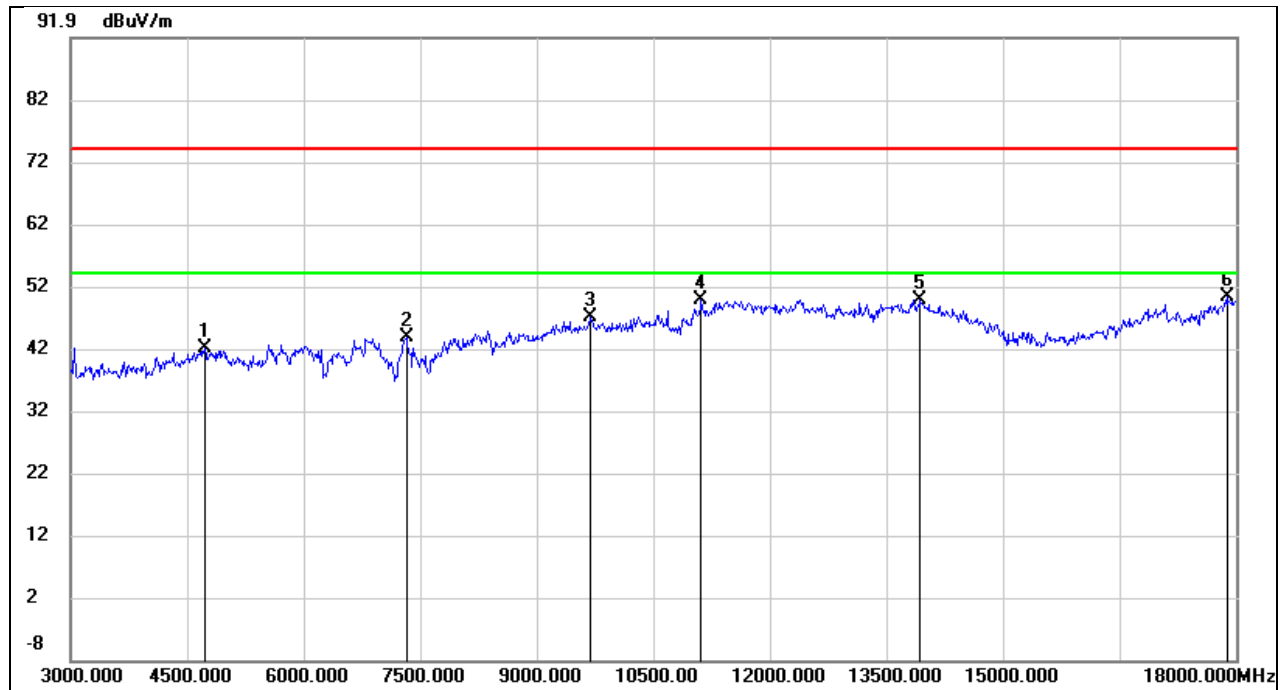


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4725.000	41.70	0.34	42.04	74.00	-31.96	peak
2	7320.000	36.88	6.89	43.77	74.00	-30.23	peak
3	9690.000	34.13	12.88	47.01	74.00	-26.99	peak
4	11115.000	32.87	16.88	49.75	74.00	-24.25	peak
5	13935.000	26.00	23.83	49.83	74.00	-24.17	peak
6	17880.000	22.69	27.49	50.18	74.00	-23.82	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2472
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

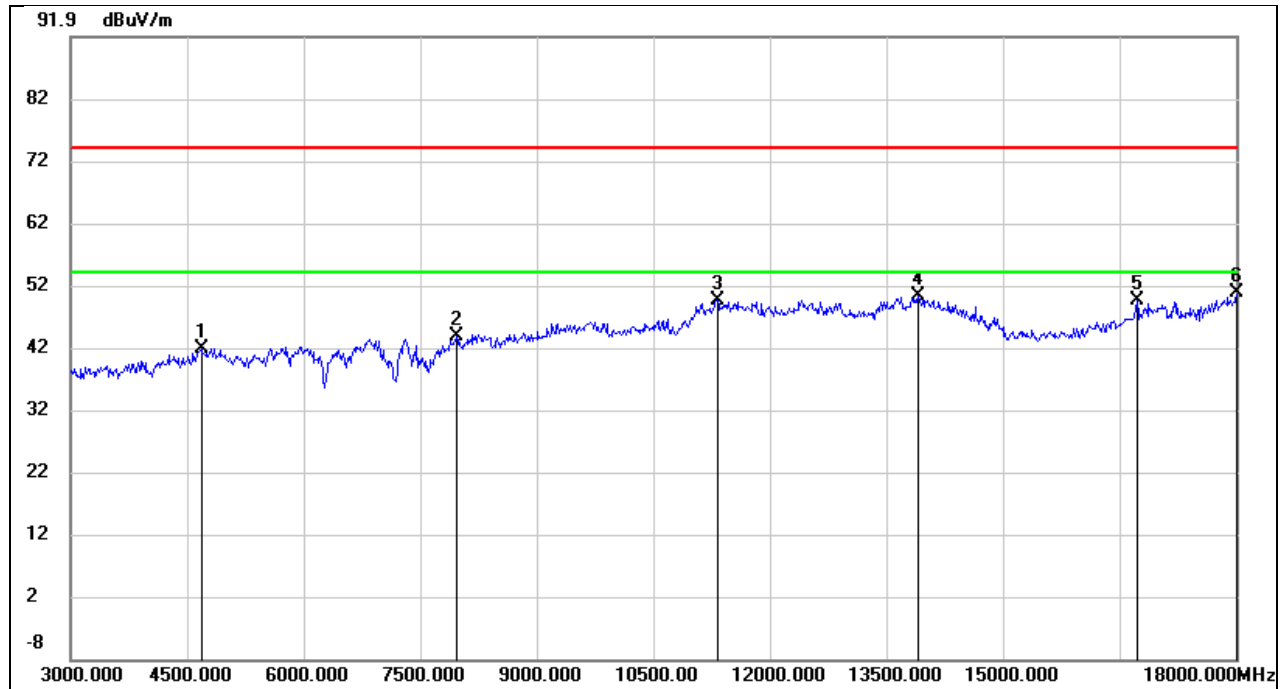


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4680.000	41.56	0.21	41.77	74.00	-32.23	peak
2	7965.000	35.63	8.05	43.68	74.00	-30.32	peak
3	11325.000	32.14	17.38	49.52	74.00	-24.48	peak
4	13905.000	26.47	23.70	50.17	74.00	-23.83	peak
5	16725.000	26.86	22.58	49.44	74.00	-24.56	peak
6	18000.000	22.23	28.54	50.77	74.00	-23.23	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2472
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

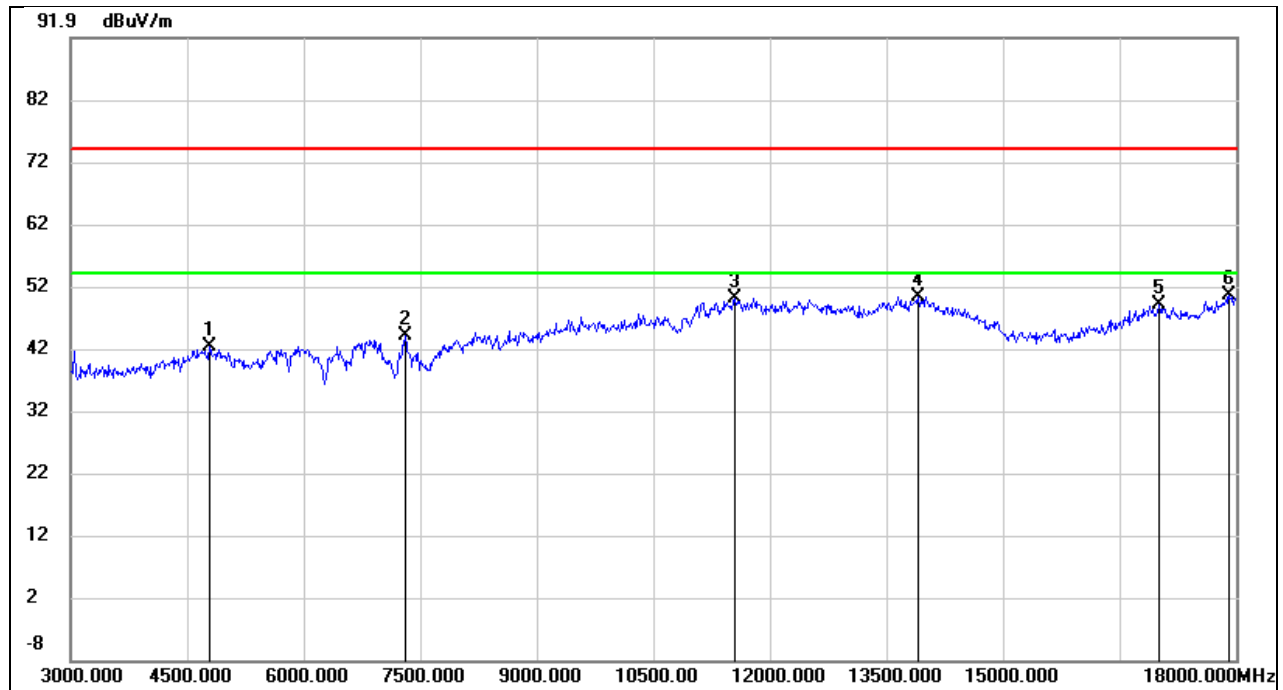


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	41.76	0.53	42.29	74.00	-31.71	peak
2	7305.000	37.09	6.88	43.97	74.00	-30.03	peak
3	11550.000	32.29	17.81	50.10	74.00	-23.90	peak
4	13905.000	26.53	23.70	50.23	74.00	-23.77	peak
5	17010.000	25.51	23.51	49.02	74.00	-24.98	peak
6	17910.000	22.87	27.75	50.62	74.00	-23.38	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

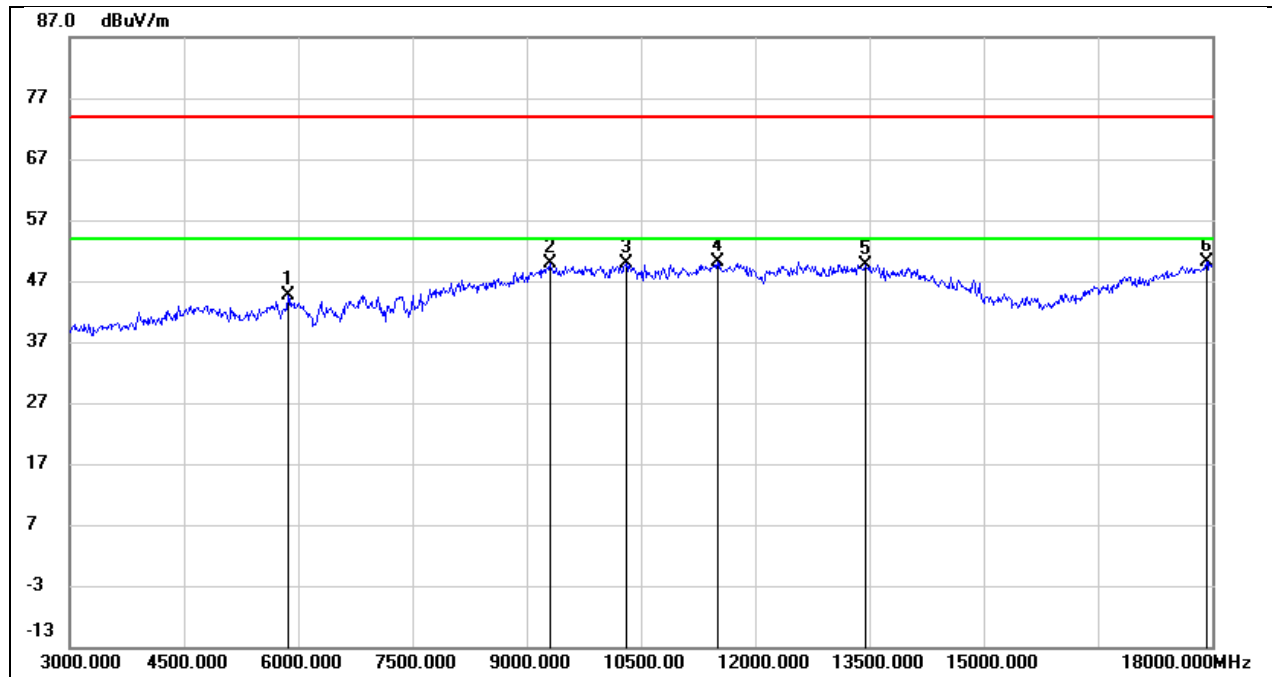


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	41.68	2.86	44.54	74.00	-29.46	peak
2	9300.000	38.46	11.52	49.98	74.00	-24.02	peak
3	10305.000	36.43	13.37	49.80	74.00	-24.20	peak
4	11505.000	32.03	17.99	50.02	74.00	-23.98	peak
5	13440.000	27.51	22.21	49.72	74.00	-24.28	peak
6	17925.000	21.19	28.87	50.06	74.00	-23.94	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

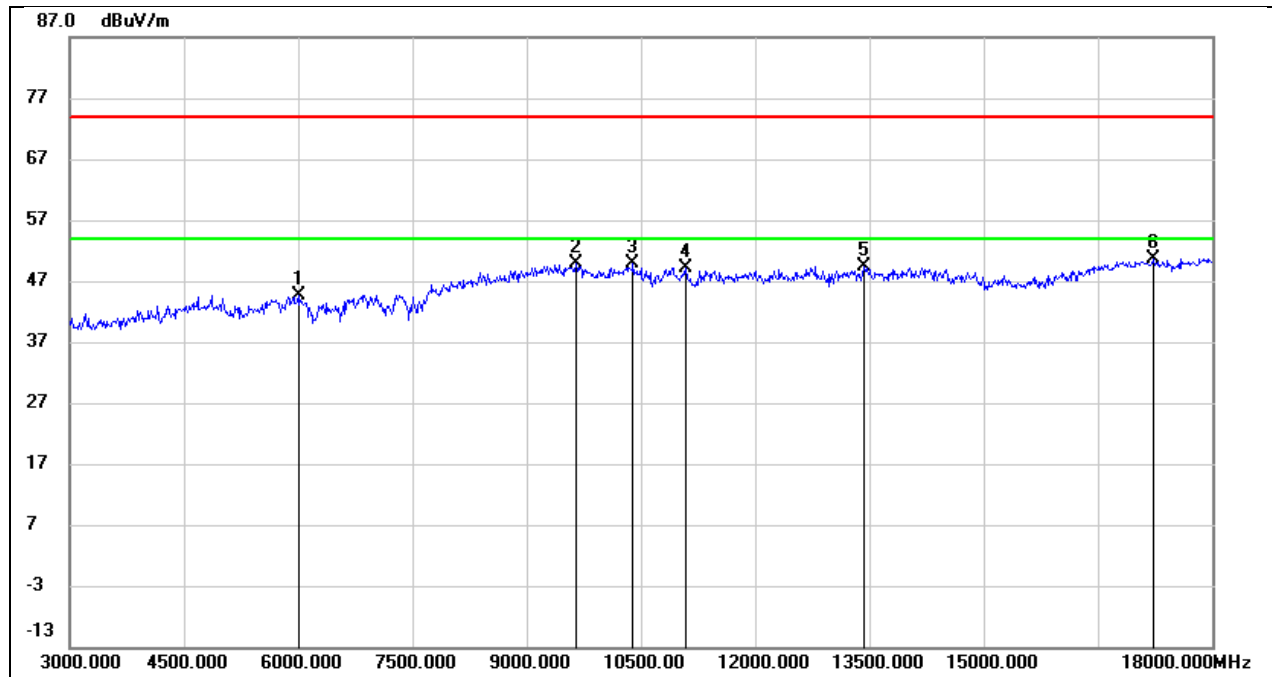


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	40.48	4.13	44.61	74.00	-29.39	peak
2	9645.000	37.16	12.73	49.89	74.00	-24.11	peak
3	10395.000	36.81	13.17	49.98	74.00	-24.02	peak
4	11085.000	33.47	15.54	49.01	74.00	-24.99	peak
5	13425.000	28.74	20.52	49.26	74.00	-24.74	peak
6	17235.000	25.34	25.33	50.67	74.00	-23.33	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

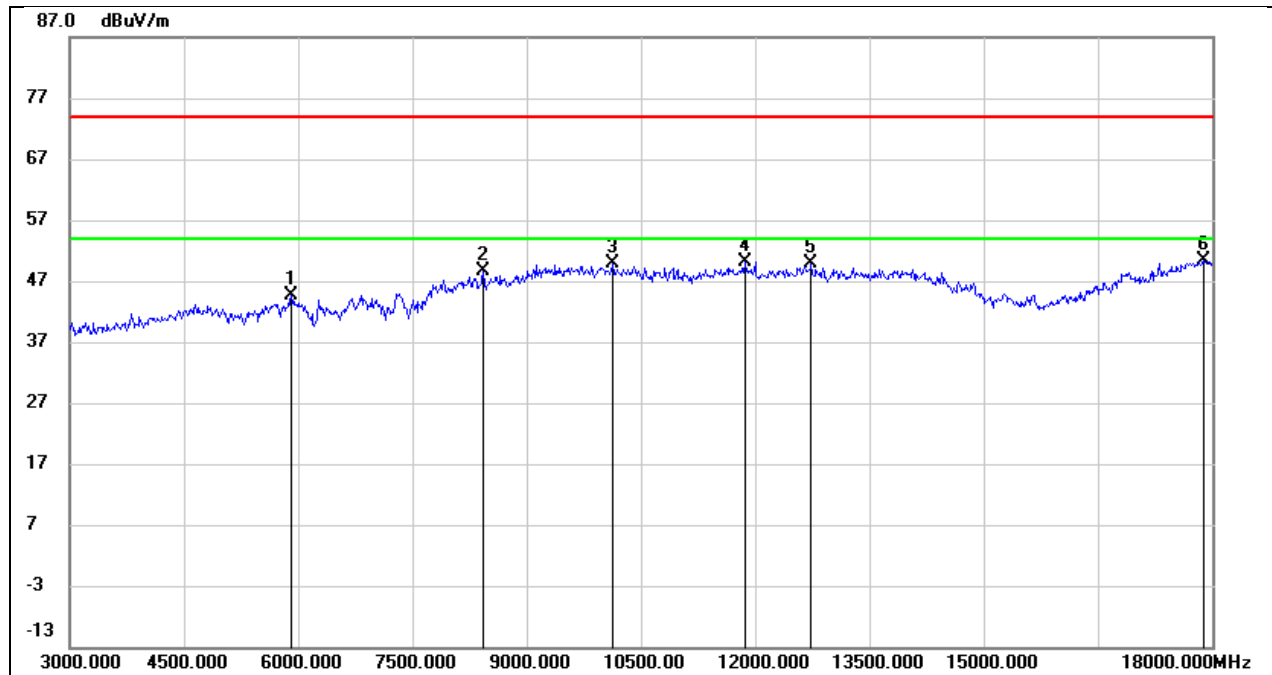


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5910.000	41.60	2.96	44.56	74.00	-29.44	peak
2	8430.000	39.62	8.93	48.55	74.00	-25.45	peak
3	10125.000	36.50	13.30	49.80	74.00	-24.20	peak
4	11865.000	31.60	18.57	50.17	74.00	-23.83	peak
5	12735.000	30.44	19.33	49.77	74.00	-24.23	peak
6	17880.000	21.90	28.42	50.32	74.00	-23.68	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

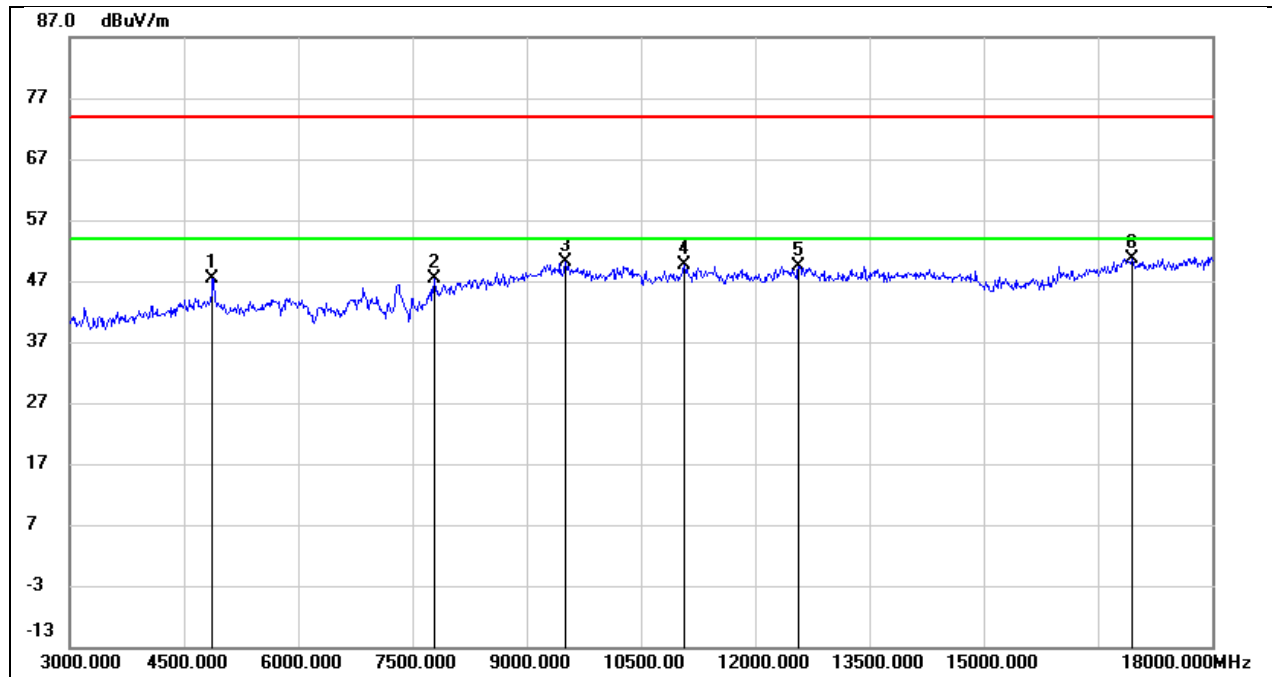


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.53	1.78	47.31	74.00	-26.69	peak
2	7785.000	39.08	8.18	47.26	74.00	-26.74	peak
3	9510.000	37.69	12.44	50.13	74.00	-23.87	peak
4	11070.000	34.07	15.47	49.54	74.00	-24.46	peak
5	12570.000	31.48	18.00	49.48	74.00	-24.52	peak
6	16950.000	25.48	25.12	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

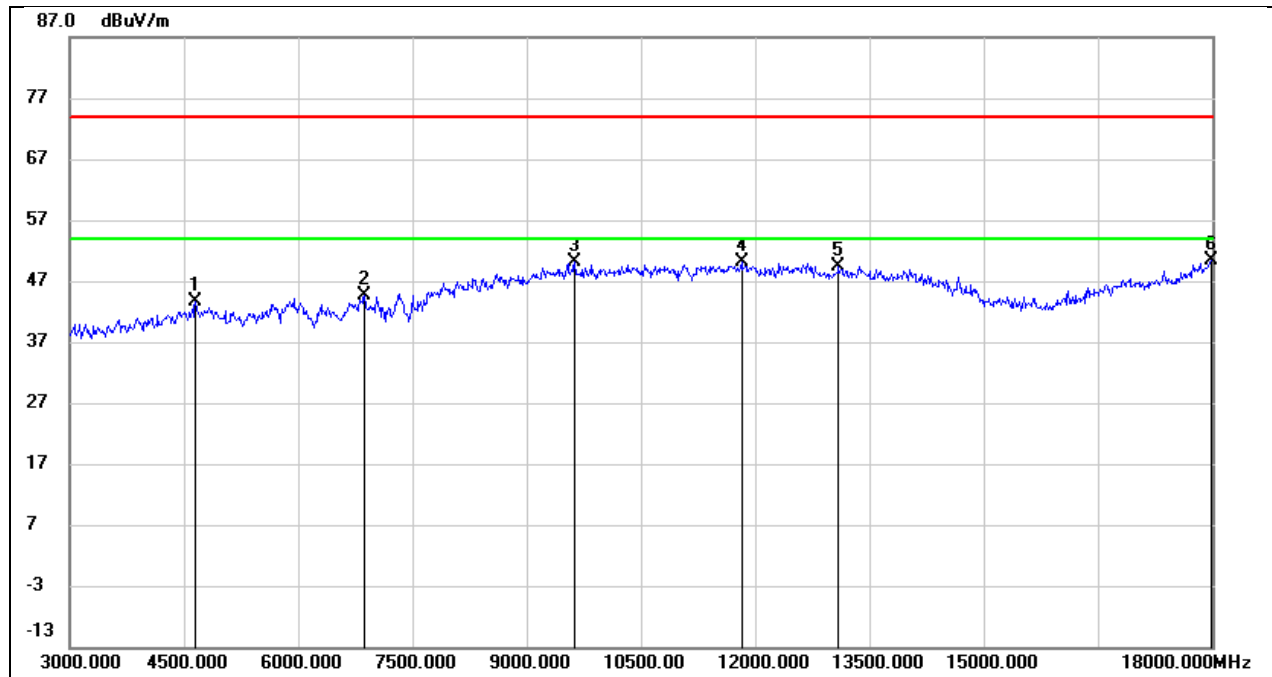


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4650.000	43.59	0.02	43.61	74.00	-30.39	peak
2	6870.000	38.54	6.04	44.58	74.00	-29.42	peak
3	9630.000	37.13	12.90	50.03	74.00	-23.97	peak
4	11820.000	31.67	18.51	50.18	74.00	-23.82	peak
5	13095.000	28.81	20.65	49.46	74.00	-24.54	peak
6	17985.000	20.91	29.49	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

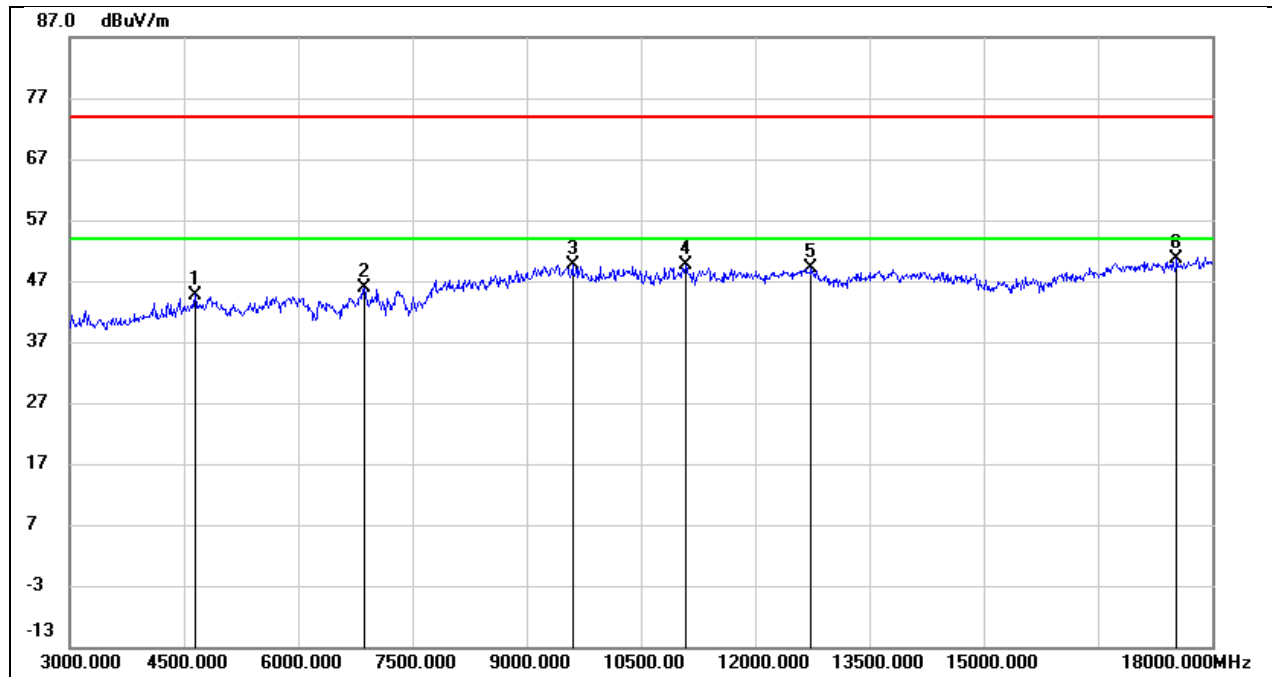


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4650.000	43.74	1.01	44.75	74.00	-29.25	peak
2	6870.000	38.97	6.92	45.89	74.00	-28.11	peak
3	9600.000	36.86	12.69	49.55	74.00	-24.45	peak
4	11085.000	34.09	15.54	49.63	74.00	-24.37	peak
5	12735.000	30.92	18.29	49.21	74.00	-24.79	peak
6	17535.000	25.14	25.53	50.67	74.00	-23.33	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

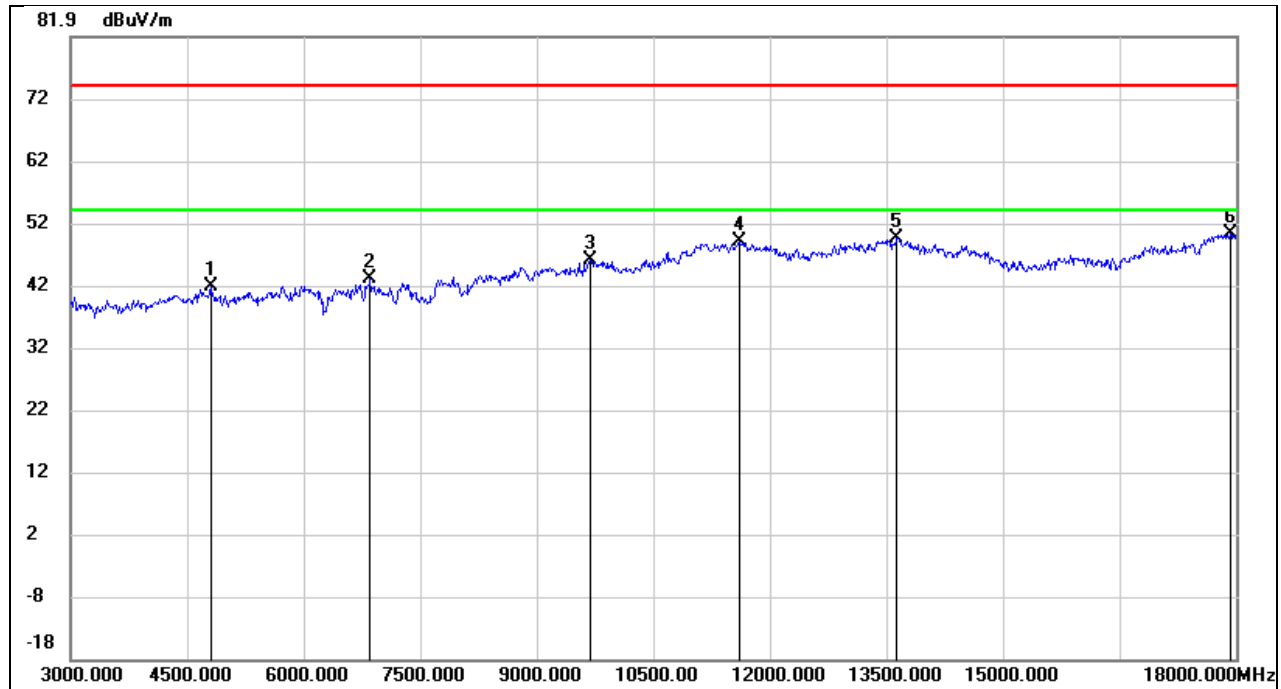


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.29	0.57	41.86	74.00	-32.14	peak
2	6855.000	36.94	6.08	43.02	74.00	-30.98	peak
3	9690.000	33.10	12.88	45.98	74.00	-28.02	peak
4	11610.000	31.10	17.96	49.06	74.00	-24.94	peak
5	13635.000	26.40	23.05	49.45	74.00	-24.55	peak
6	17925.000	22.48	27.87	50.35	74.00	-23.65	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

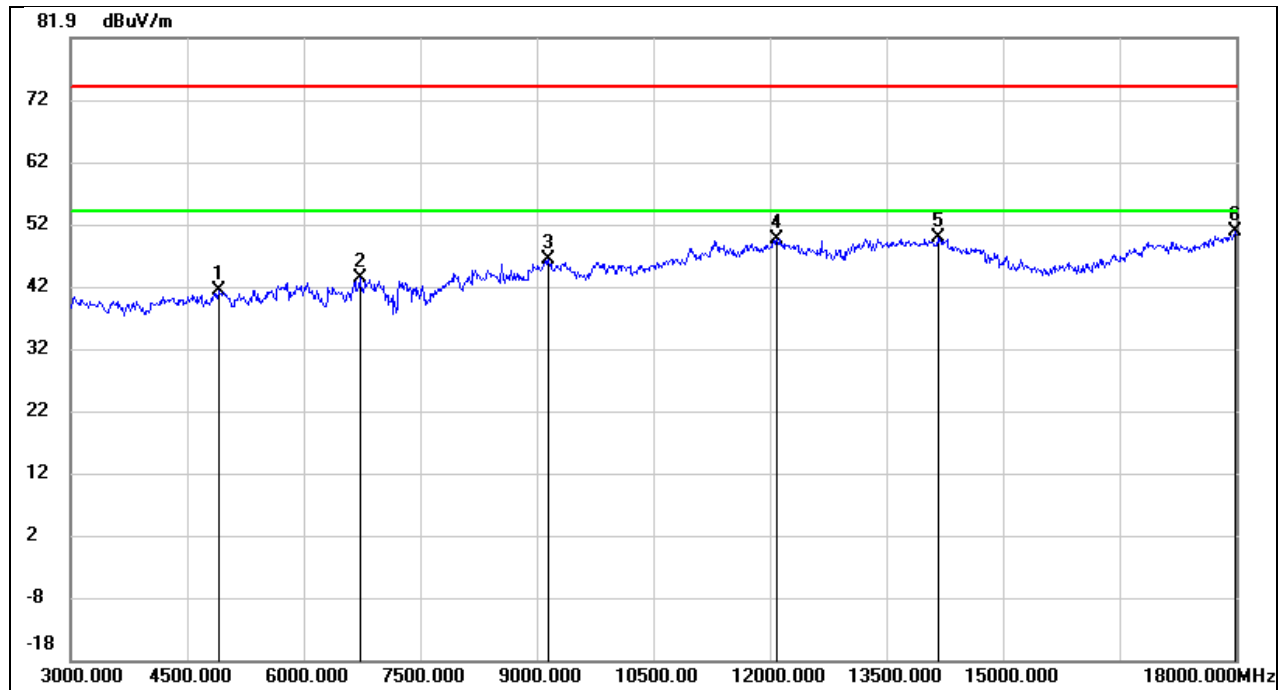


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	40.46	0.82	41.28	74.00	-32.72	peak
2	6720.000	37.64	5.59	43.23	74.00	-30.77	peak
3	9150.000	35.58	10.74	46.32	74.00	-27.68	peak
4	12090.000	30.67	18.95	49.62	74.00	-24.38	peak
5	14160.000	26.09	23.62	49.71	74.00	-24.29	peak
6	17985.000	22.35	28.41	50.76	74.00	-23.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

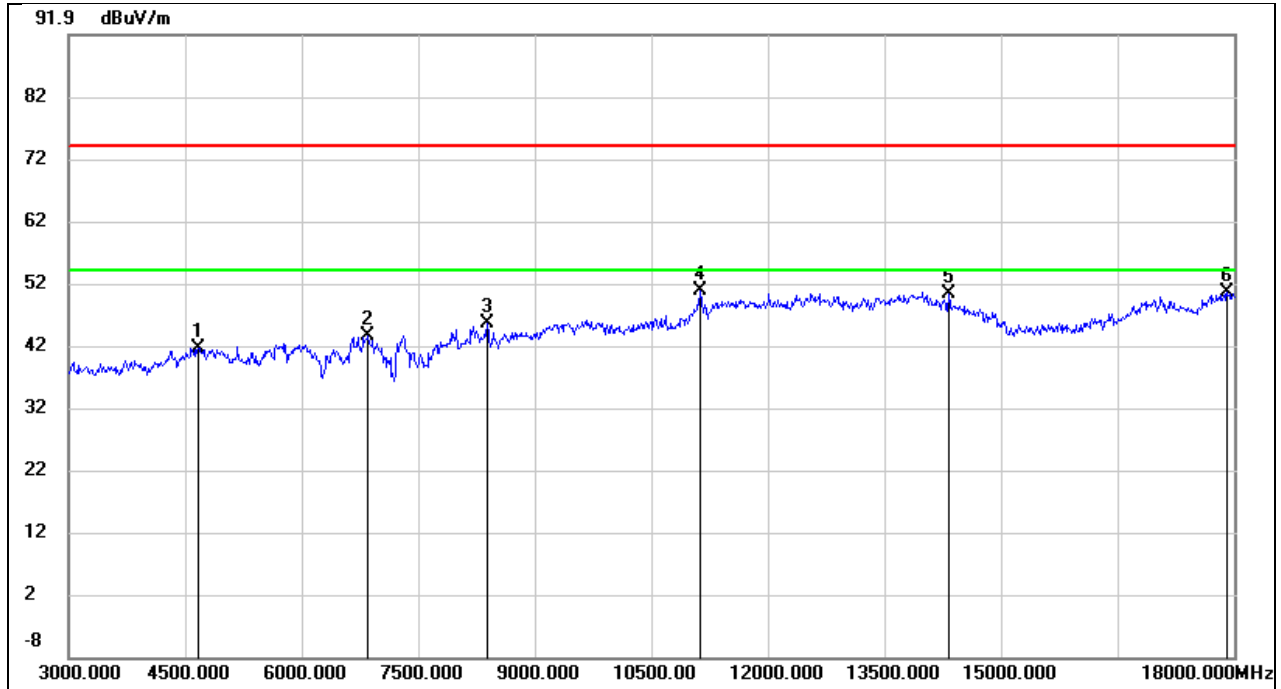

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	41.43	0.16	41.59	74.00	-32.41	peak
2	6855.000	37.54	6.08	43.62	74.00	-30.38	peak
3	8385.000	36.62	8.88	45.50	74.00	-28.50	peak
4	11130.000	33.76	16.94	50.70	74.00	-23.30	peak
5	14325.000	27.61	22.72	50.33	74.00	-23.67	peak
6	17910.000	22.87	27.75	50.62	74.00	-23.38	peak


Test Mode:	802.11n HT40	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

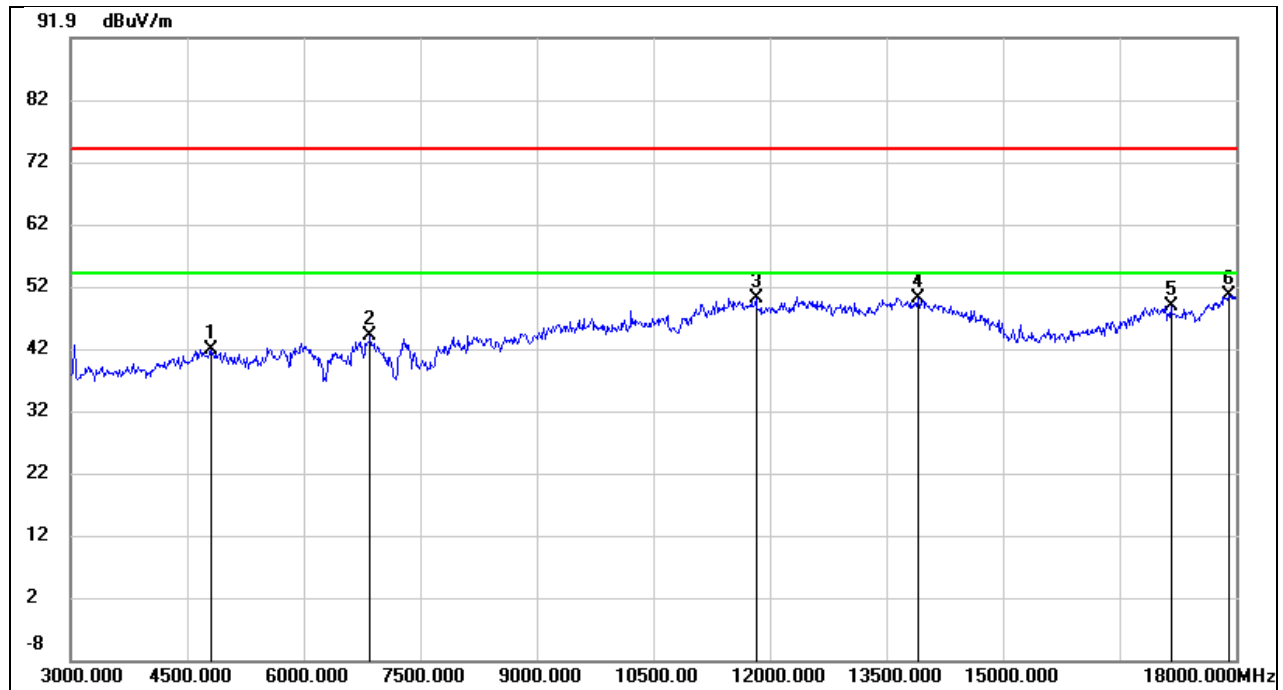

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.29	0.57	41.86	74.00	-32.14	peak
2	6855.000	37.94	6.08	44.02	74.00	-29.98	peak
3	11820.000	31.48	18.47	49.95	74.00	-24.05	peak
4	13905.000	26.32	23.70	50.02	74.00	-23.98	peak
5	17160.000	24.81	24.00	48.81	74.00	-25.19	peak
6	17910.000	22.86	27.75	50.61	74.00	-23.39	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60Hz

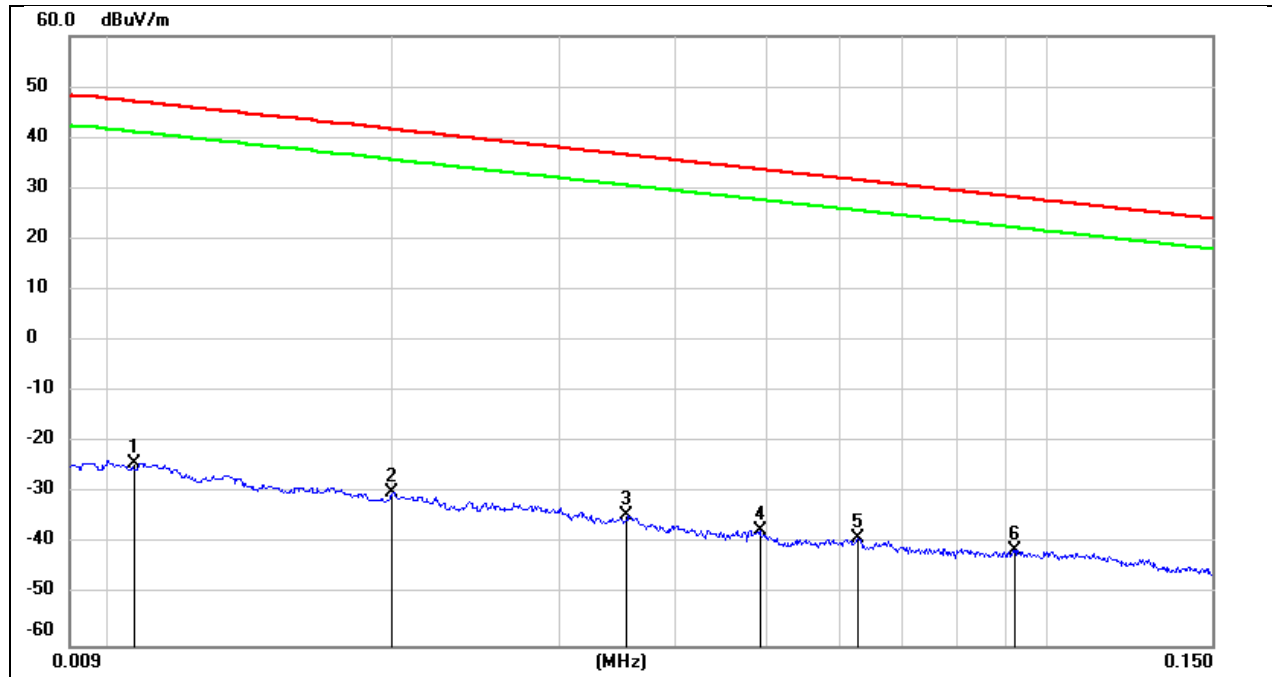


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0106	77.38	-101.39	-24.01	47.09	-75.51	-4.41	-71.10	peak
2	0.0200	71.36	-101.34	-29.98	41.58	-81.48	-9.92	-71.56	peak
3	0.0354	66.97	-101.41	-34.44	36.62	-85.94	-14.88	-71.06	peak
4	0.0492	64.05	-101.47	-37.42	33.76	-88.92	-17.74	-71.18	peak
5	0.0627	62.65	-101.53	-38.88	31.66	-90.38	-19.84	-70.54	peak
6	0.0922	60.51	-101.74	-41.23	28.31	-92.73	-23.19	-69.54	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60Hz

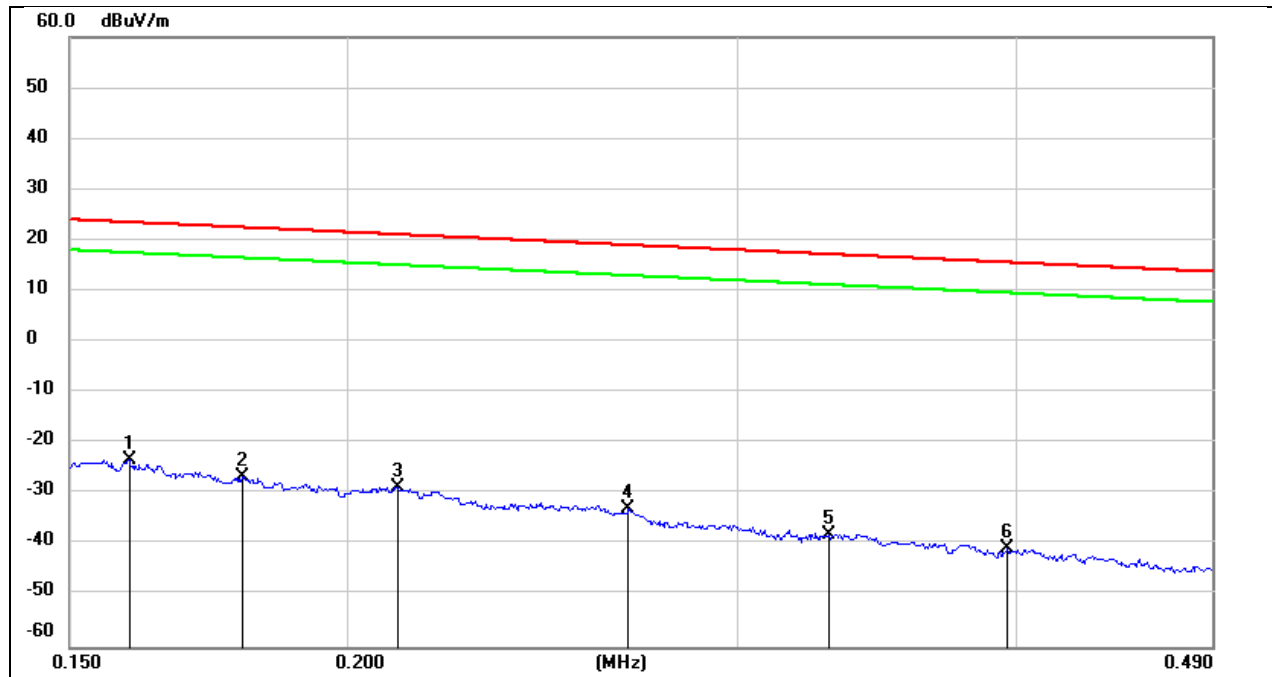

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1595	78.36	-101.65	-23.29	23.55	-74.79	-27.95	-46.84	peak
2	0.1794	75.27	-101.68	-26.41	22.53	-77.91	-28.97	-48.94	peak
3	0.2106	73.02	-101.73	-28.71	21.13	-80.21	-30.37	-49.84	peak
4	0.2676	69.01	-101.82	-32.81	19.05	-84.31	-32.45	-51.86	peak
5	0.3300	63.97	-101.88	-37.91	17.23	-89.41	-34.27	-55.14	peak
6	0.3966	61.18	-101.96	-40.78	15.63	-92.28	-35.87	-56.41	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60Hz

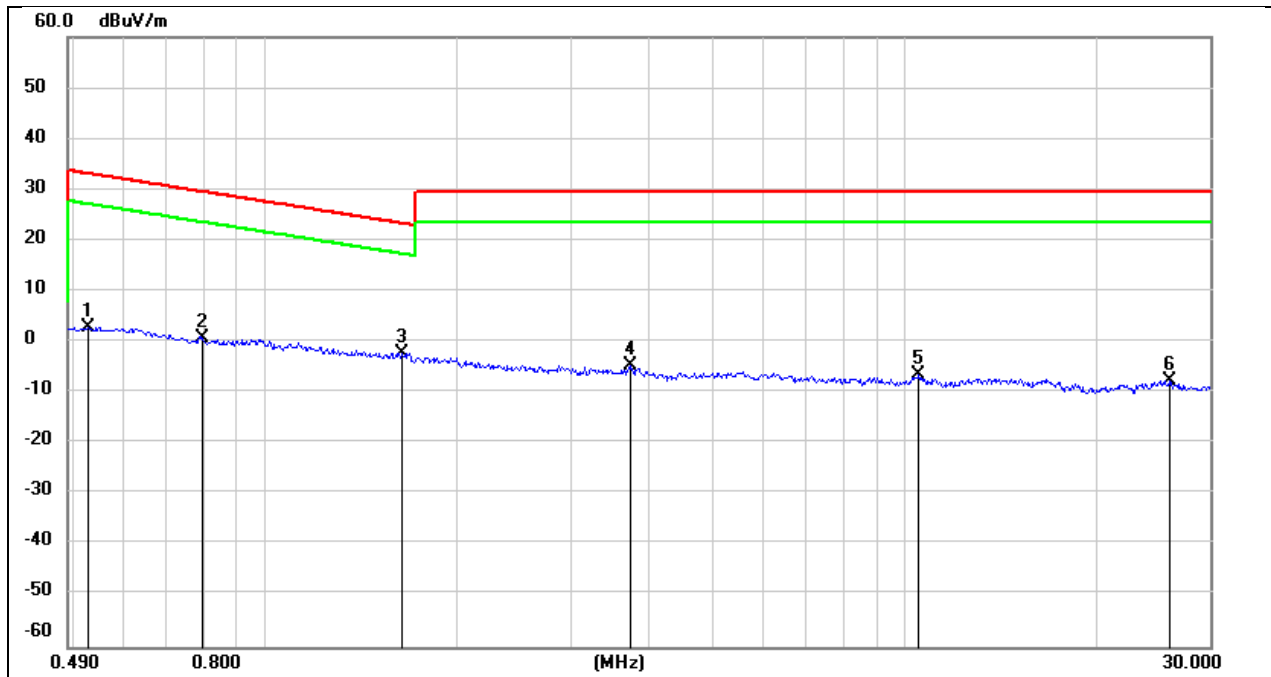

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5272	65.04	-62.07	2.97	33.16	-48.53	-18.34	-30.19	peak
2	0.7963	62.87	-62.14	0.73	29.58	-50.77	-21.92	-28.85	peak
3	1.6409	59.74	-61.98	-2.24	23.3	-53.74	-28.20	-25.54	peak
4	3.7360	56.83	-61.40	-4.57	29.54	-56.07	-21.96	-34.11	peak
5	10.5234	54.31	-60.82	-6.51	29.54	-58.01	-21.96	-36.05	peak
6	25.8978	52.76	-60.36	-7.6	29.54	-59.10	-21.96	-37.14	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V 60Hz

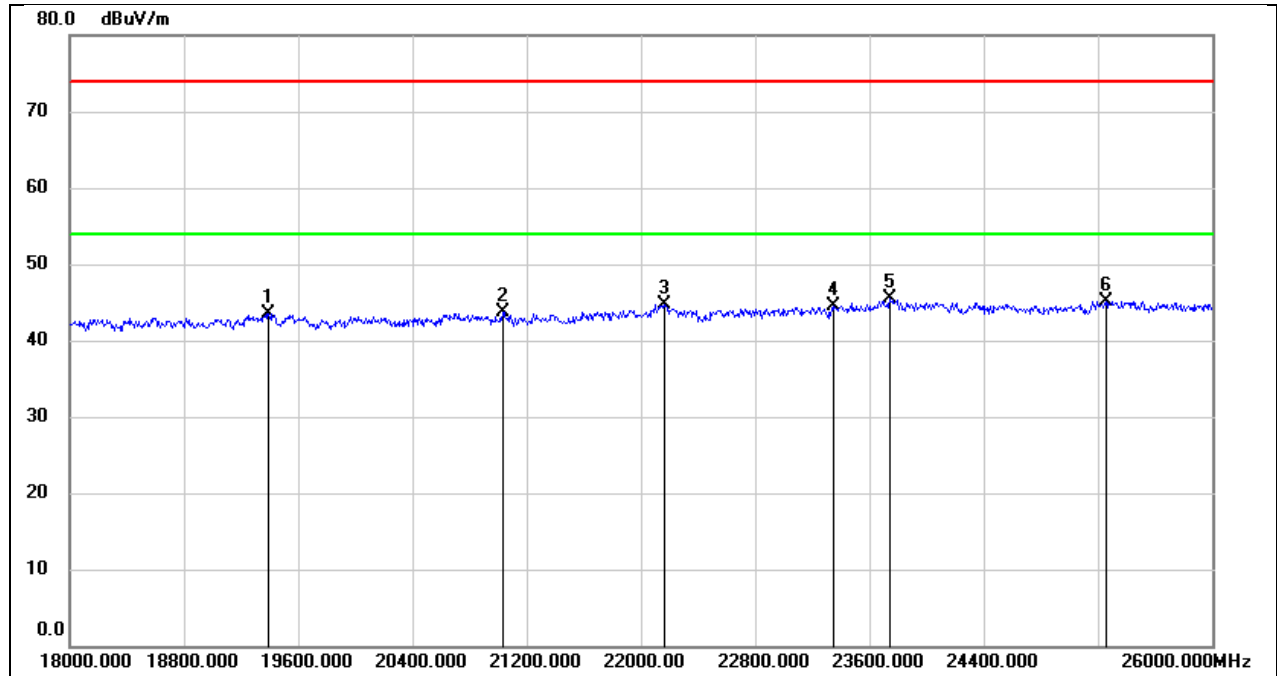

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19392.000	49.12	-5.57	43.55	74.00	-30.45	peak
2	21032.000	48.65	-4.87	43.78	74.00	-30.22	peak
3	22160.000	49.08	-4.31	44.77	74.00	-29.23	peak
4	23344.000	47.73	-3.29	44.44	74.00	-29.56	peak
5	23744.000	48.65	-3.20	45.45	74.00	-28.55	peak
6	25256.000	46.79	-1.67	45.12	74.00	-28.88	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V 60Hz

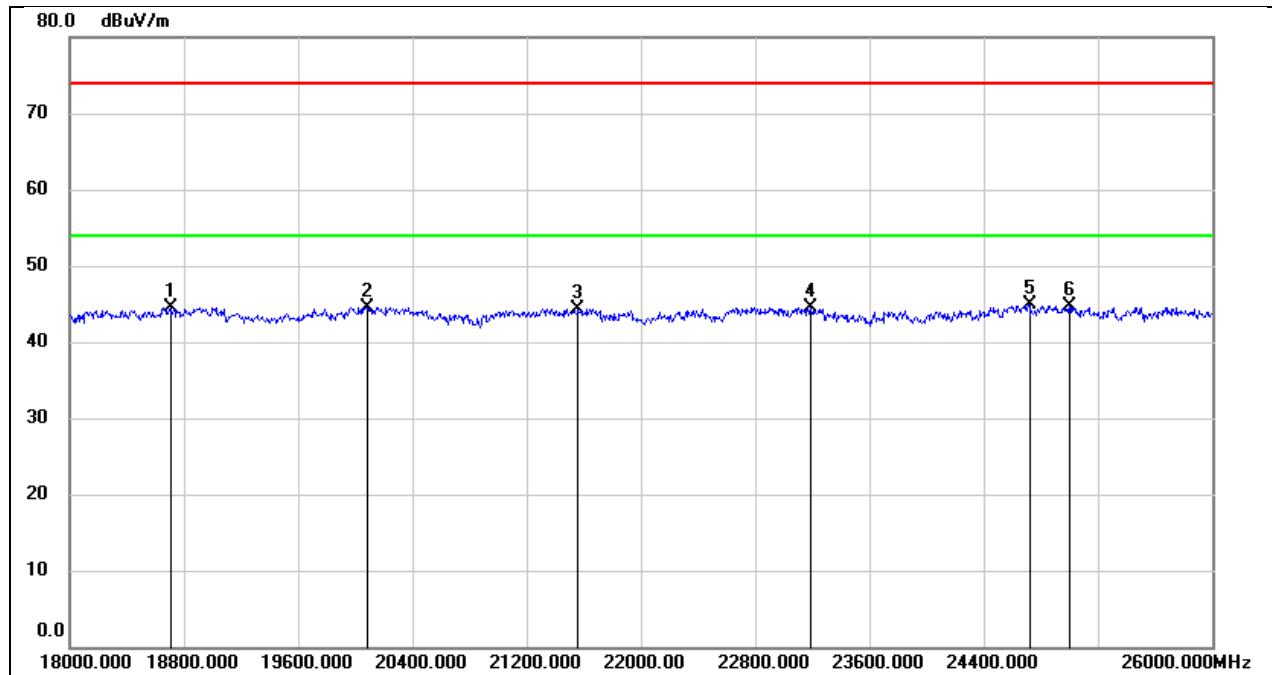

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18712.000	49.90	-5.40	44.50	74.00	-29.50	peak
2	20080.000	49.99	-5.50	44.49	74.00	-29.51	peak
3	21560.000	48.99	-4.60	44.39	74.00	-29.61	peak
4	23184.000	47.86	-3.38	44.48	74.00	-29.52	peak
5	24720.000	47.22	-2.33	44.89	74.00	-29.11	peak
6	25000.000	46.87	-2.10	44.77	74.00	-29.23	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

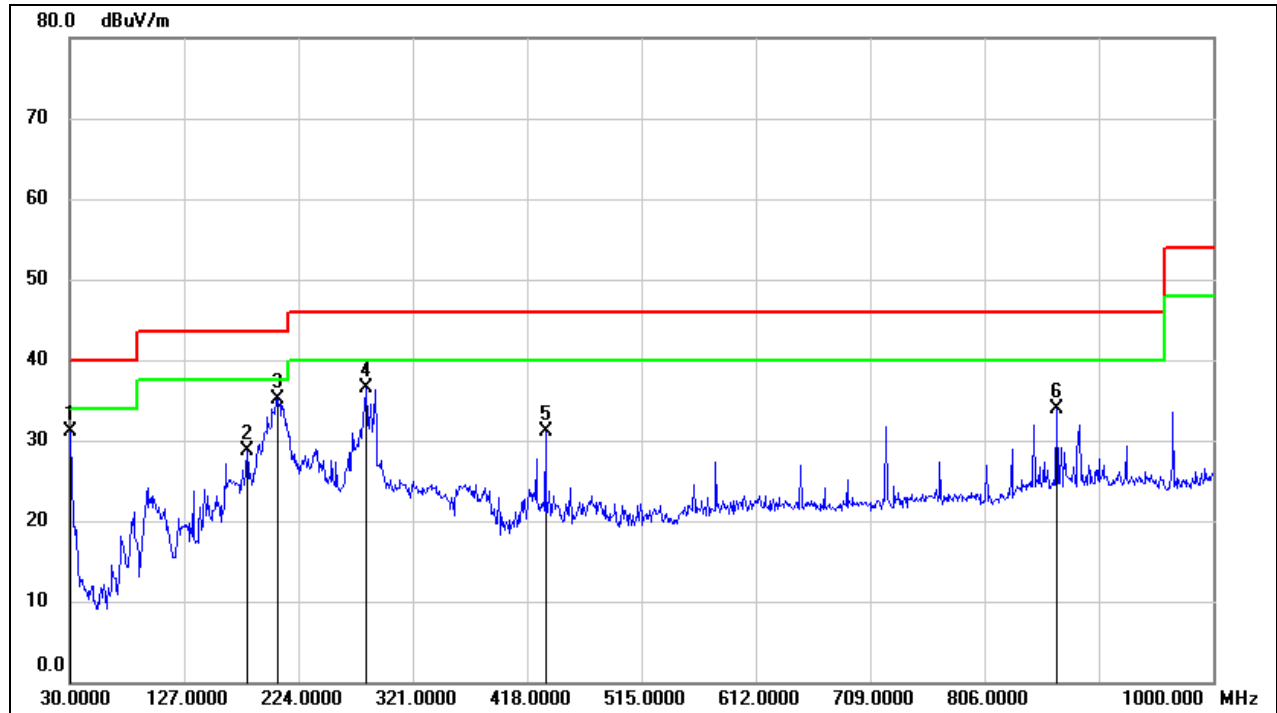

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	45.34	-14.19	31.15	40.00	-8.85	Peak
2	180.3500	39.73	-10.95	28.78	43.50	-14.72	Peak
3	206.5399	46.45	-11.43	35.02	43.50	-8.48	Peak
4	281.2300	48.32	-11.82	36.50	46.00	-9.50	Peak
5	433.5200	38.80	-7.76	31.04	46.00	-14.96	Peak
6	867.1100	34.40	-0.48	33.92	46.00	-12.08	Peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

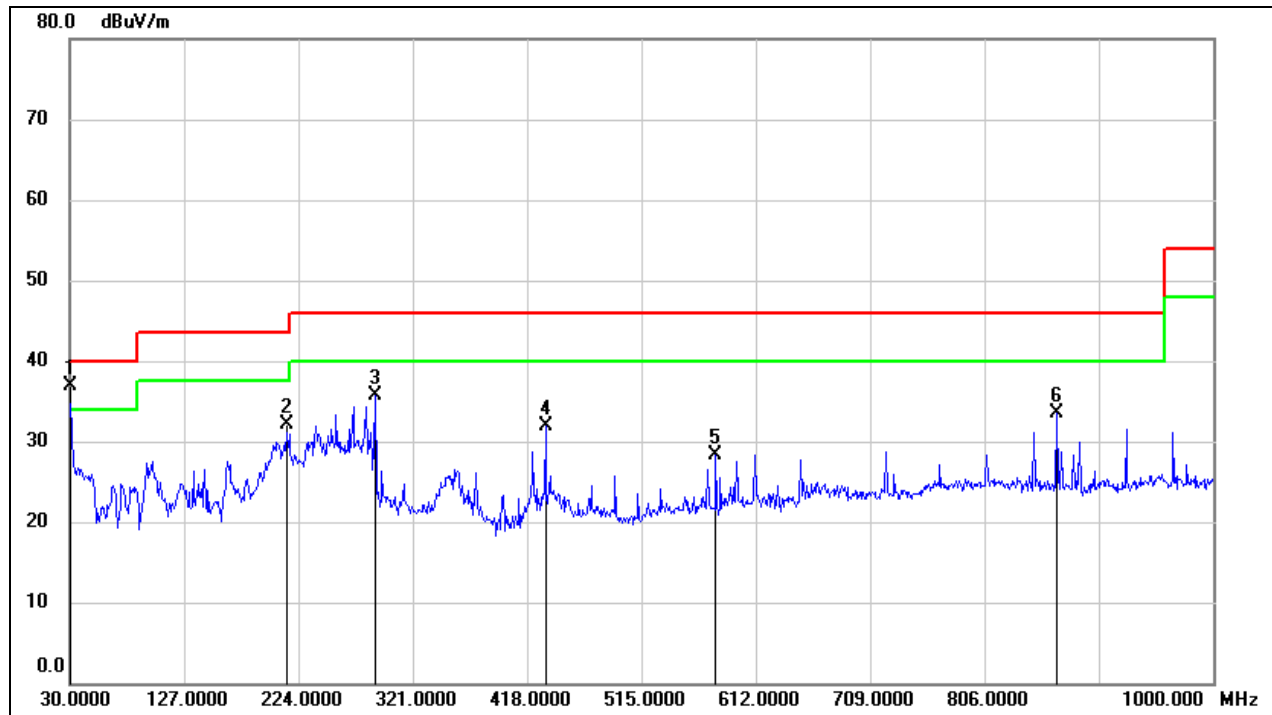

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	51.06	-14.16	36.90	40.00	-3.10	Peak
2	214.3000	43.93	-11.81	32.12	43.50	-11.38	Peak
3	288.9900	47.02	-11.29	35.73	46.00	-10.27	Peak
4	433.5200	39.69	-7.76	31.93	46.00	-14.07	Peak
5	578.0500	33.73	-5.41	28.32	46.00	-17.68	Peak
6	867.1100	34.05	-0.48	33.57	46.00	-12.43	Peak

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

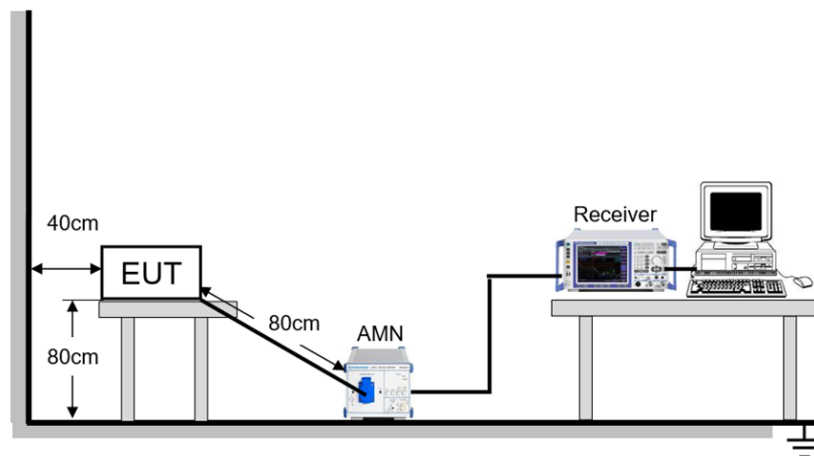

TEST ENVIRONMENT


Temperature	22.1°C	Relative Humidity	45.0%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 24, 2024	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

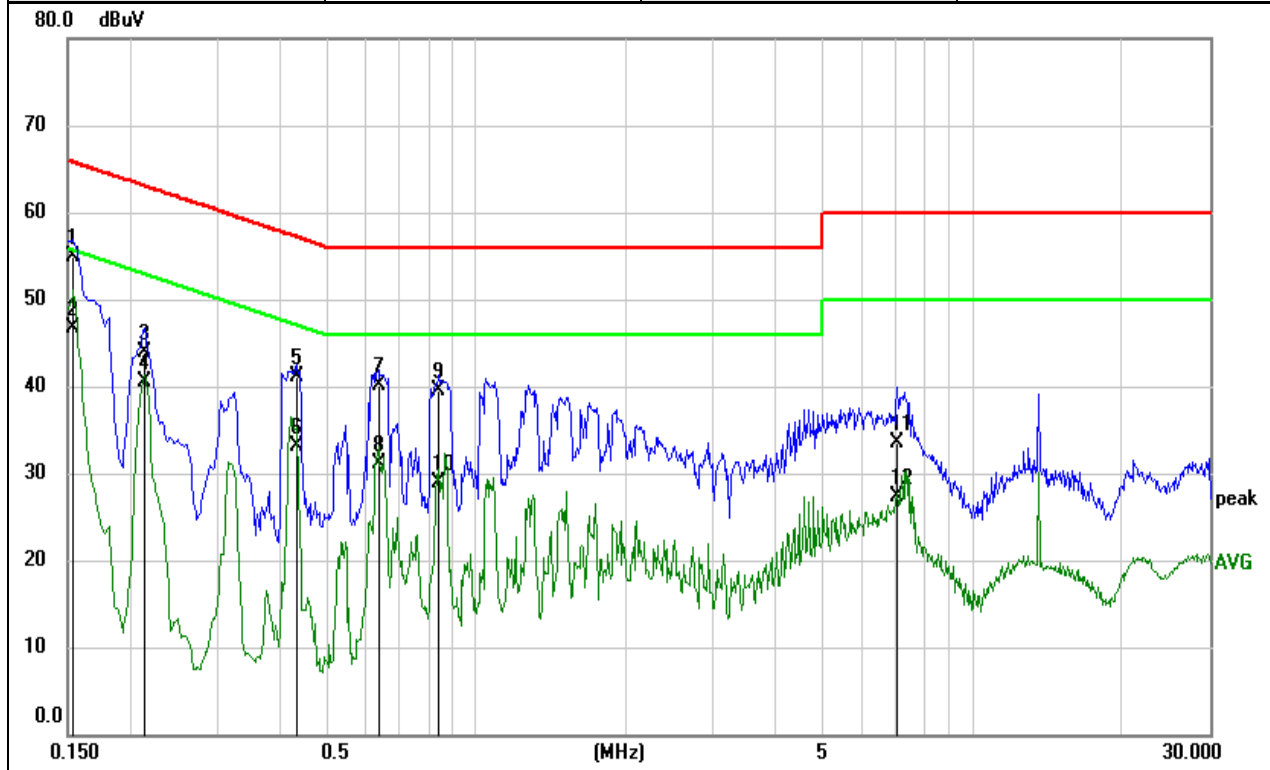


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	45.22	9.64	54.86	65.79	-10.93	QP
2	0.1539	37.11	9.64	46.75	55.79	-9.04	AVG
3	0.2131	34.17	9.64	43.81	63.08	-19.27	QP
4	0.2131	30.92	9.64	40.56	53.08	-12.52	AVG
5	0.4350	31.46	9.64	41.10	57.16	-16.06	QP
6	0.4350	23.38	9.64	33.02	47.16	-14.14	AVG
7	0.6362	30.40	9.63	40.03	56.00	-15.97	QP
8	0.6362	21.39	9.63	31.02	46.00	-14.98	AVG
9	0.8396	29.90	9.63	39.53	56.00	-16.47	QP
10	0.8396	19.29	9.63	28.92	46.00	-17.08	AVG
11	7.0515	23.81	9.73	33.54	60.00	-26.46	QP
12	7.0515	17.55	9.73	27.28	50.00	-22.72	AVG

Note:

1. Result = Reading + Correct Factor.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.
- Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

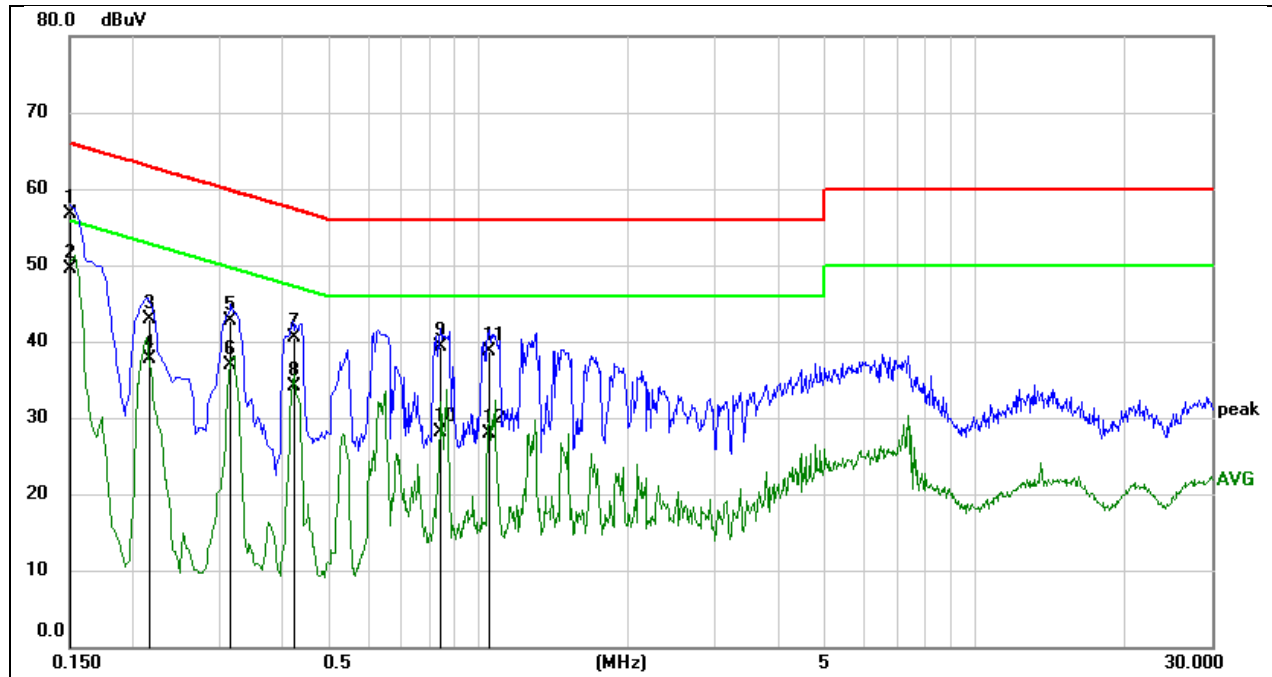

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1505	47.05	9.64	56.69	65.97	-9.28	QP
2	0.1505	39.92	9.64	49.56	55.97	-6.41	AVG
3	0.2180	33.27	9.64	42.91	62.89	-19.98	QP
4	0.2180	28.00	9.64	37.64	52.89	-15.25	AVG
5	0.3159	33.08	9.64	42.72	59.81	-17.09	QP
6	0.3159	27.23	9.64	36.87	49.81	-12.94	AVG
7	0.4239	30.91	9.64	40.55	57.37	-16.82	QP
8	0.4239	24.37	9.64	34.01	47.37	-13.36	AVG
9	0.8378	29.61	9.63	39.24	56.00	-16.76	QP
10	0.8378	18.39	9.63	28.02	46.00	-17.98	AVG
11	1.0522	28.98	9.63	38.61	56.00	-17.39	QP
12	1.0522	18.31	9.63	27.94	46.00	-18.06	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


11. TEST DATA


11.1. APPENDIX A: DTS BANDWIDTH

11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.16	2407.92	2416.08	≥0.5	PASS
		2437	8.16	2432.96	2441.12	≥0.5	PASS
		2462	8.12	2458.44	2466.56	≥0.5	PASS
		2467	8.16	2463.40	2471.56	≥0.5	PASS
		2472	8.16	2467.92	2476.08	≥0.5	PASS
11G	Ant1	2412	16.44	2403.84	2420.28	≥0.5	PASS
		2437	16.12	2428.76	2444.88	≥0.5	PASS
		2462	16.12	2454.20	2470.32	≥0.5	PASS
		2467	16.36	2458.96	2475.32	≥0.5	PASS
		2472	14.80	2465.44	2480.24	≥0.5	PASS
11N20SISO	Ant1	2412	17.52	2403.28	2420.80	≥0.5	PASS
		2437	17.48	2428.32	2445.80	≥0.5	PASS
		2462	16.96	2453.84	2470.80	≥0.5	PASS
		2467	17.40	2458.40	2475.80	≥0.5	PASS
		2472	17.04	2463.72	2480.76	≥0.5	PASS
11N40SISO	Ant1	2422	36.08	2403.92	2440.00	≥0.5	PASS
		2437	36.24	2418.84	2455.08	≥0.5	PASS
		2452	35.92	2434.00	2469.92	≥0.5	PASS
		2457	36.16	2438.76	2474.92	≥0.5	PASS
		2462	36.64	2443.68	2480.32	≥0.5	PASS

11.1.2. Test Graphs

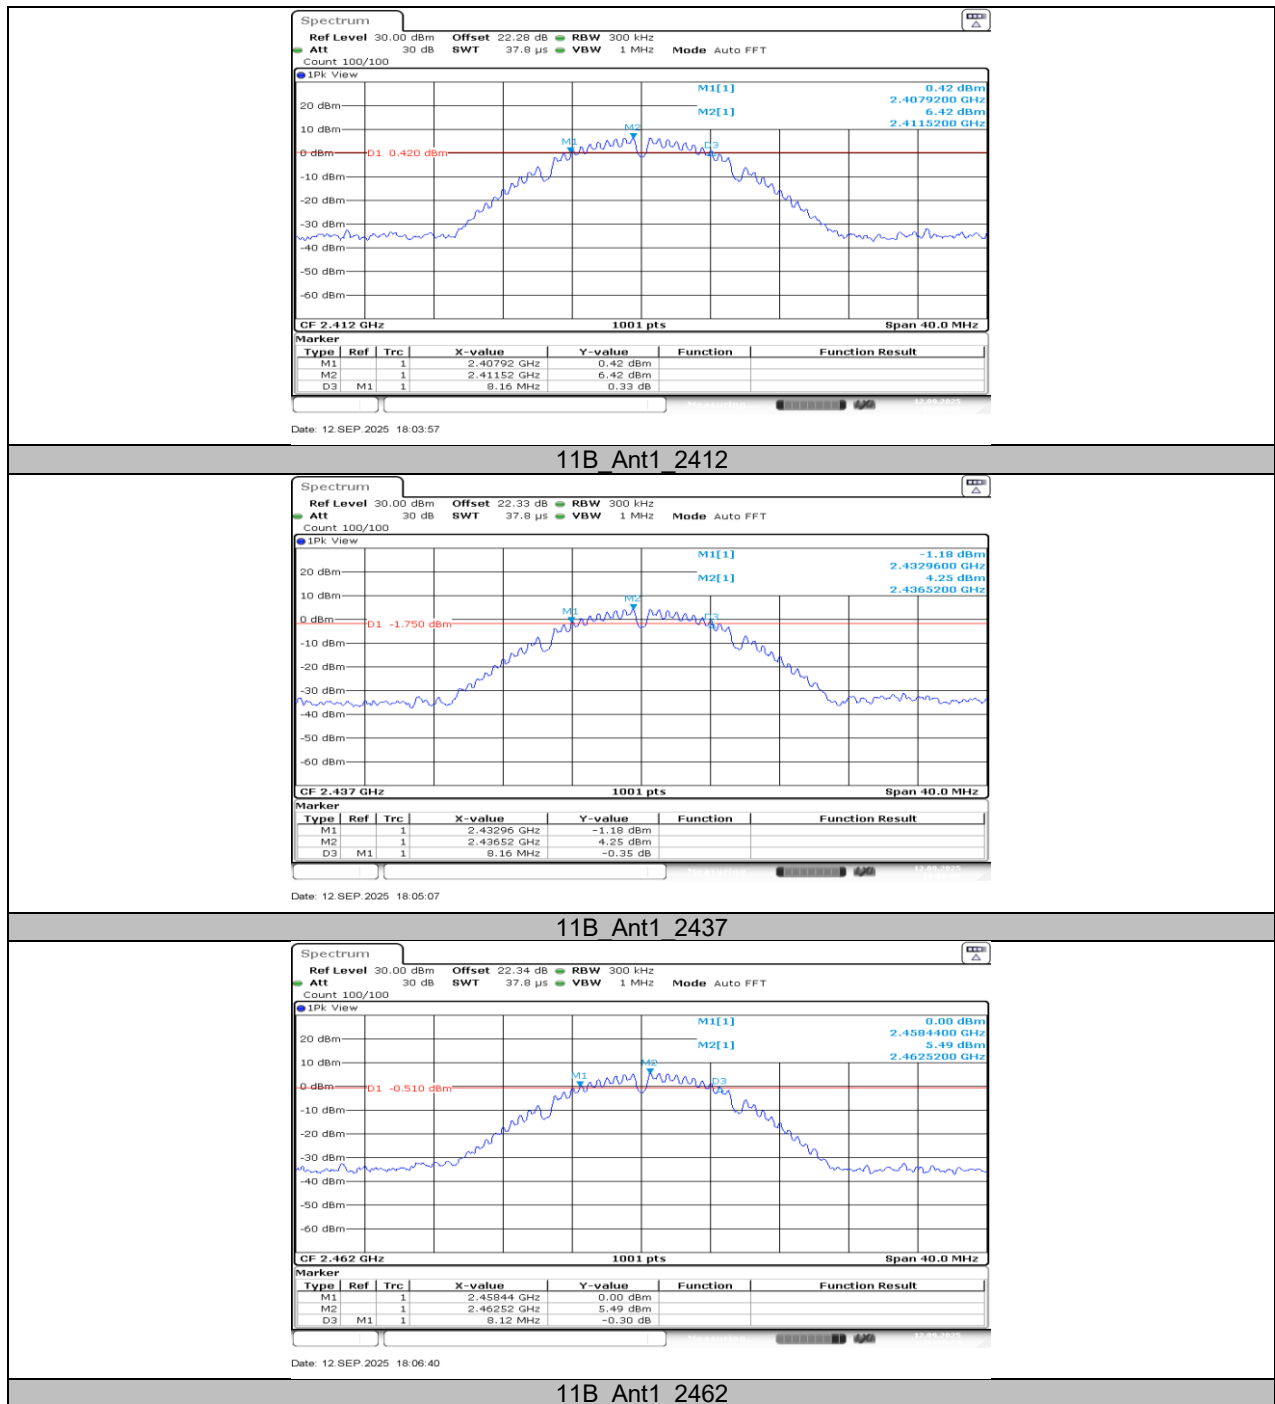


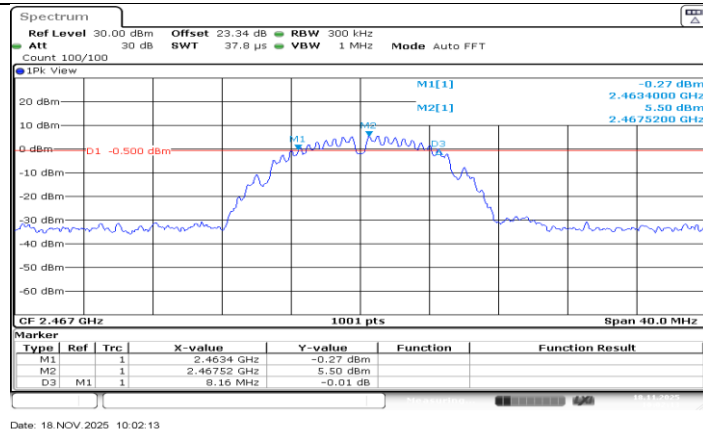


11B_Ant1_2467

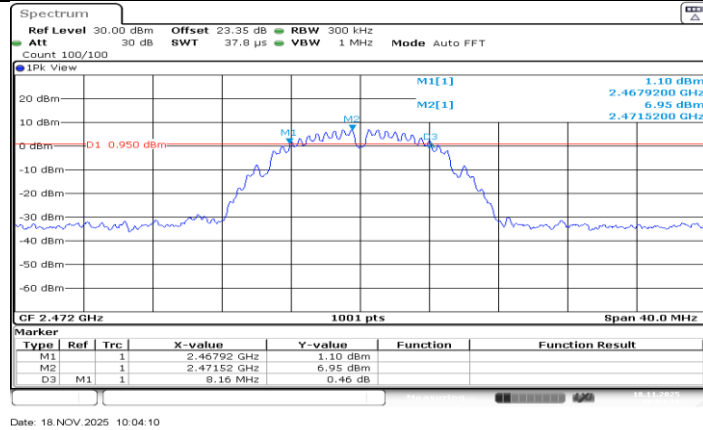


11B_Ant1_2472

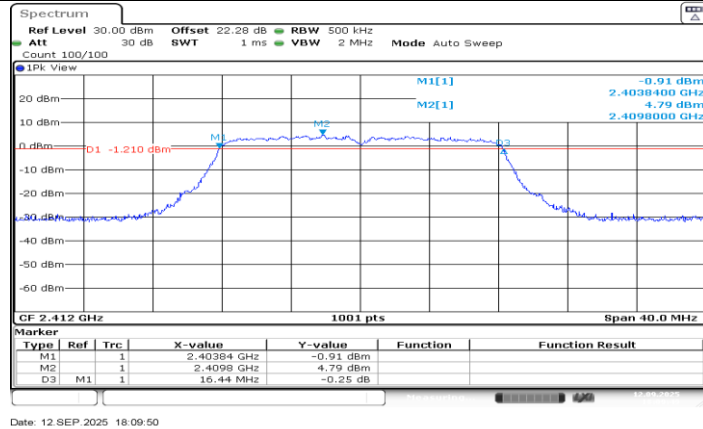


11G_Ant1_2412

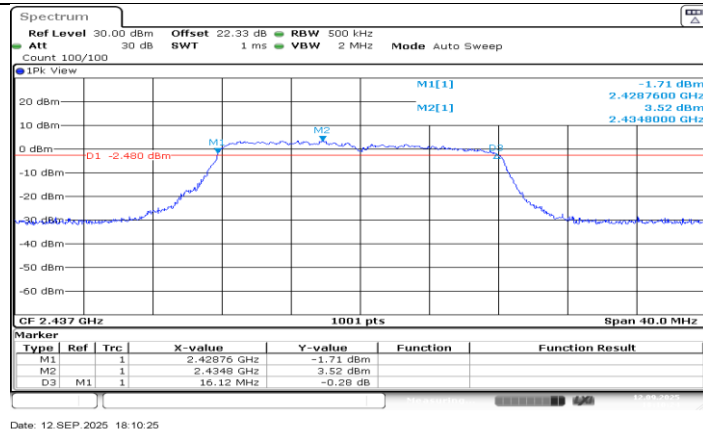


11G_Ant1_2437

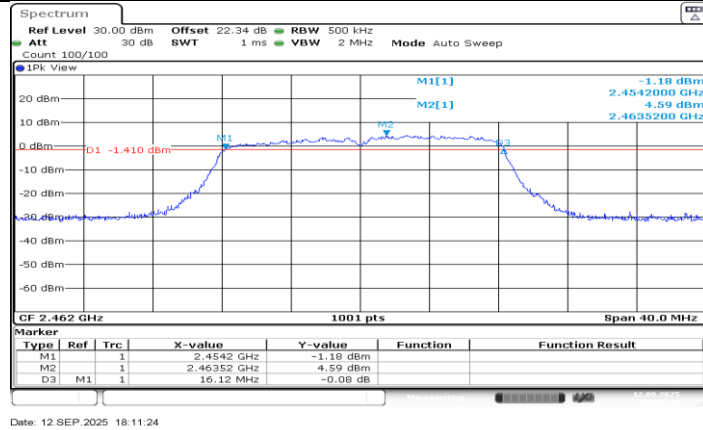


11G_Ant1_2462

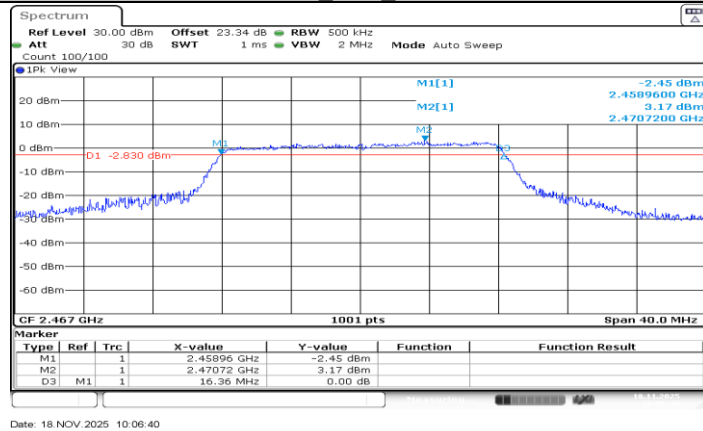


11G_Ant1_2467

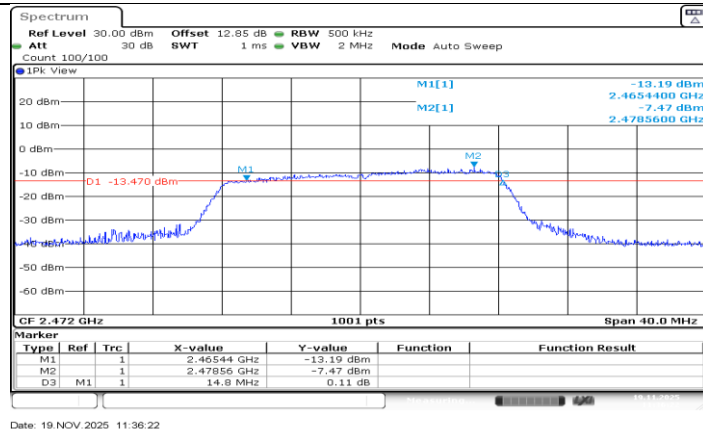


11G_Ant1_2472

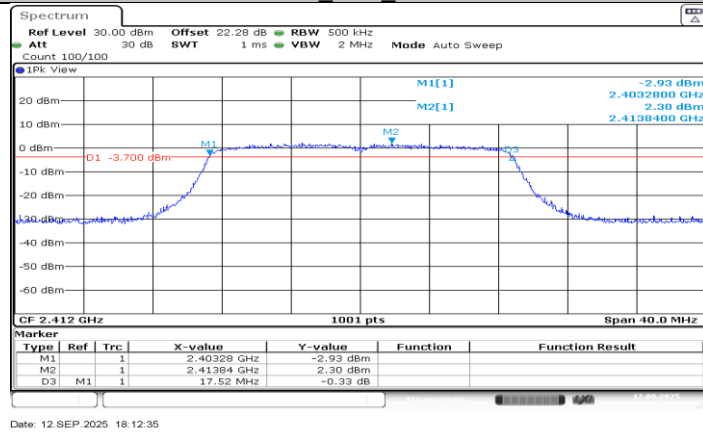


11N20SISO_Ant1_2412

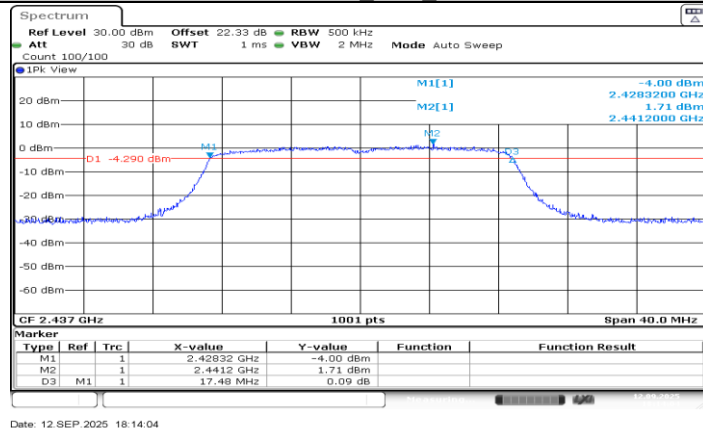


11N20SISO_Ant1_2437

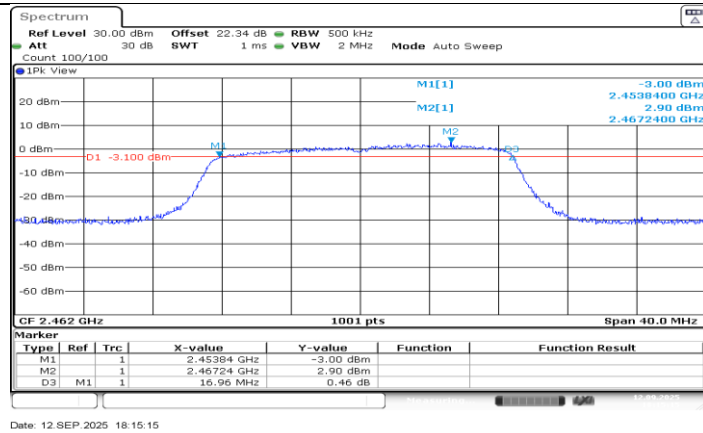


11N20SISO Ant1_2462

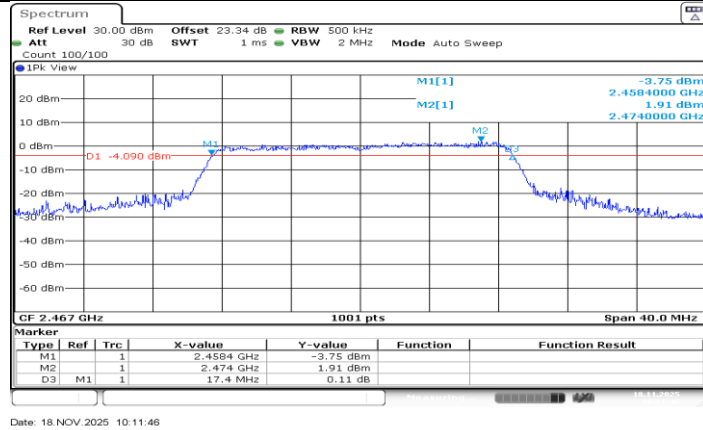


11N20SISO Ant1_2467

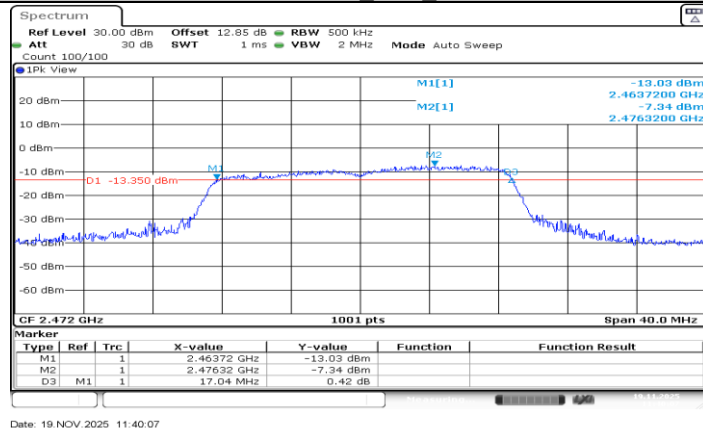


11N20SISO Ant1_2472

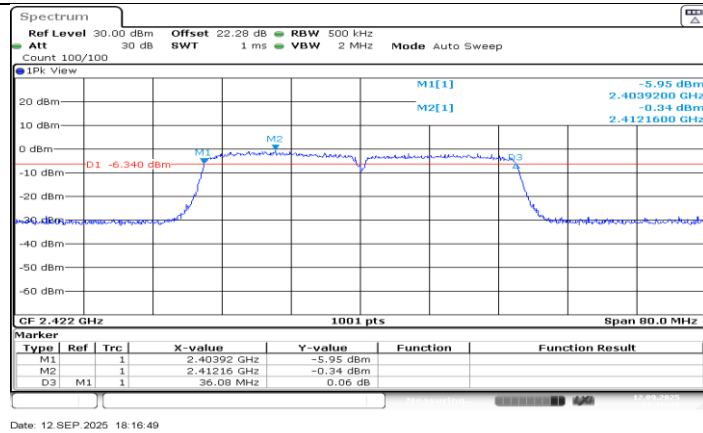


11N40SISO_Ant1_2422

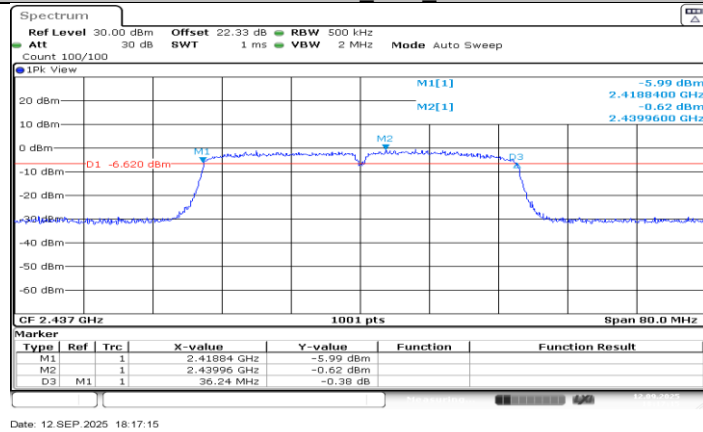


11N40SISO_Ant1_2437

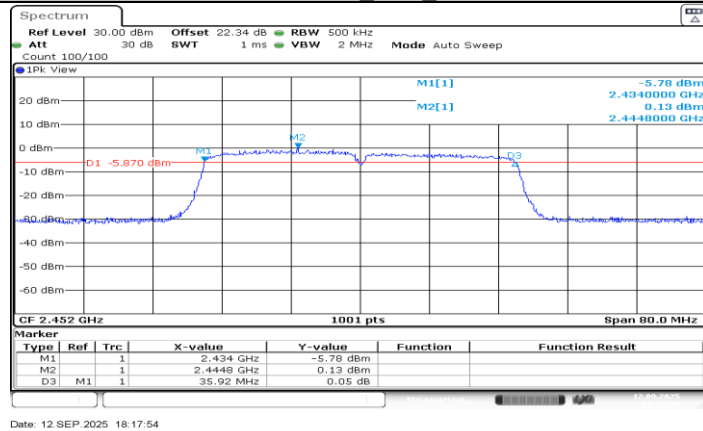

11N40SISO_Ant1_2452

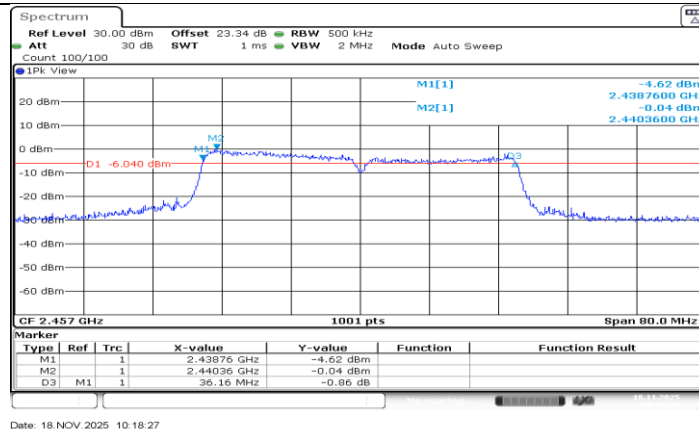

11N40SISO_Ant1_2457

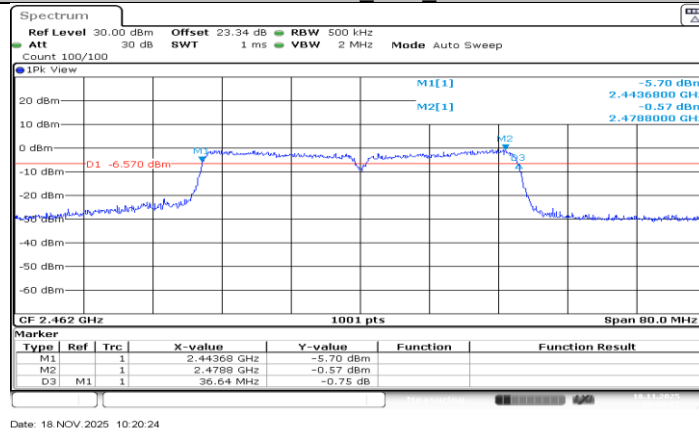


11N40SISO_Ant1_2462


11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

11.2.1. Test Result


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	11.668	2406.2458	2417.9141	PASS
		2437	11.708	2431.0859	2442.7942	PASS
		2462	12.068	2455.9660	2468.0340	PASS
		2467	11.588	2461.4855	2473.0739	PASS
		2472	11.389	2466.2857	2477.6743	PASS
11G	Ant1	2412	17.183	2403.4885	2420.6713	PASS
		2437	17.103	2428.3686	2445.4715	PASS
		2462	17.502	2453.2088	2470.7113	PASS
		2467	17.502	2458.4086	2475.9111	PASS
		2472	17.183	2463.6084	2480.7912	PASS
11N20SISO	Ant1	2412	17.982	2403.0889	2421.0709	PASS
		2437	17.862	2427.9690	2445.8312	PASS
		2462	18.302	2452.8492	2471.1508	PASS
		2467	18.062	2458.0889	2476.1508	PASS
		2472	17.782	2463.2488	2481.0310	PASS
11N40SISO	Ant1	2422	36.364	2403.9381	2440.3017	PASS
		2437	36.284	2418.6983	2454.9820	PASS
		2452	36.843	2433.3786	2470.2218	PASS
		2457	37.483	2438.0589	2475.5415	PASS
		2462	37.323	2443.1389	2480.4615	PASS

11.2.2. Test Graphs

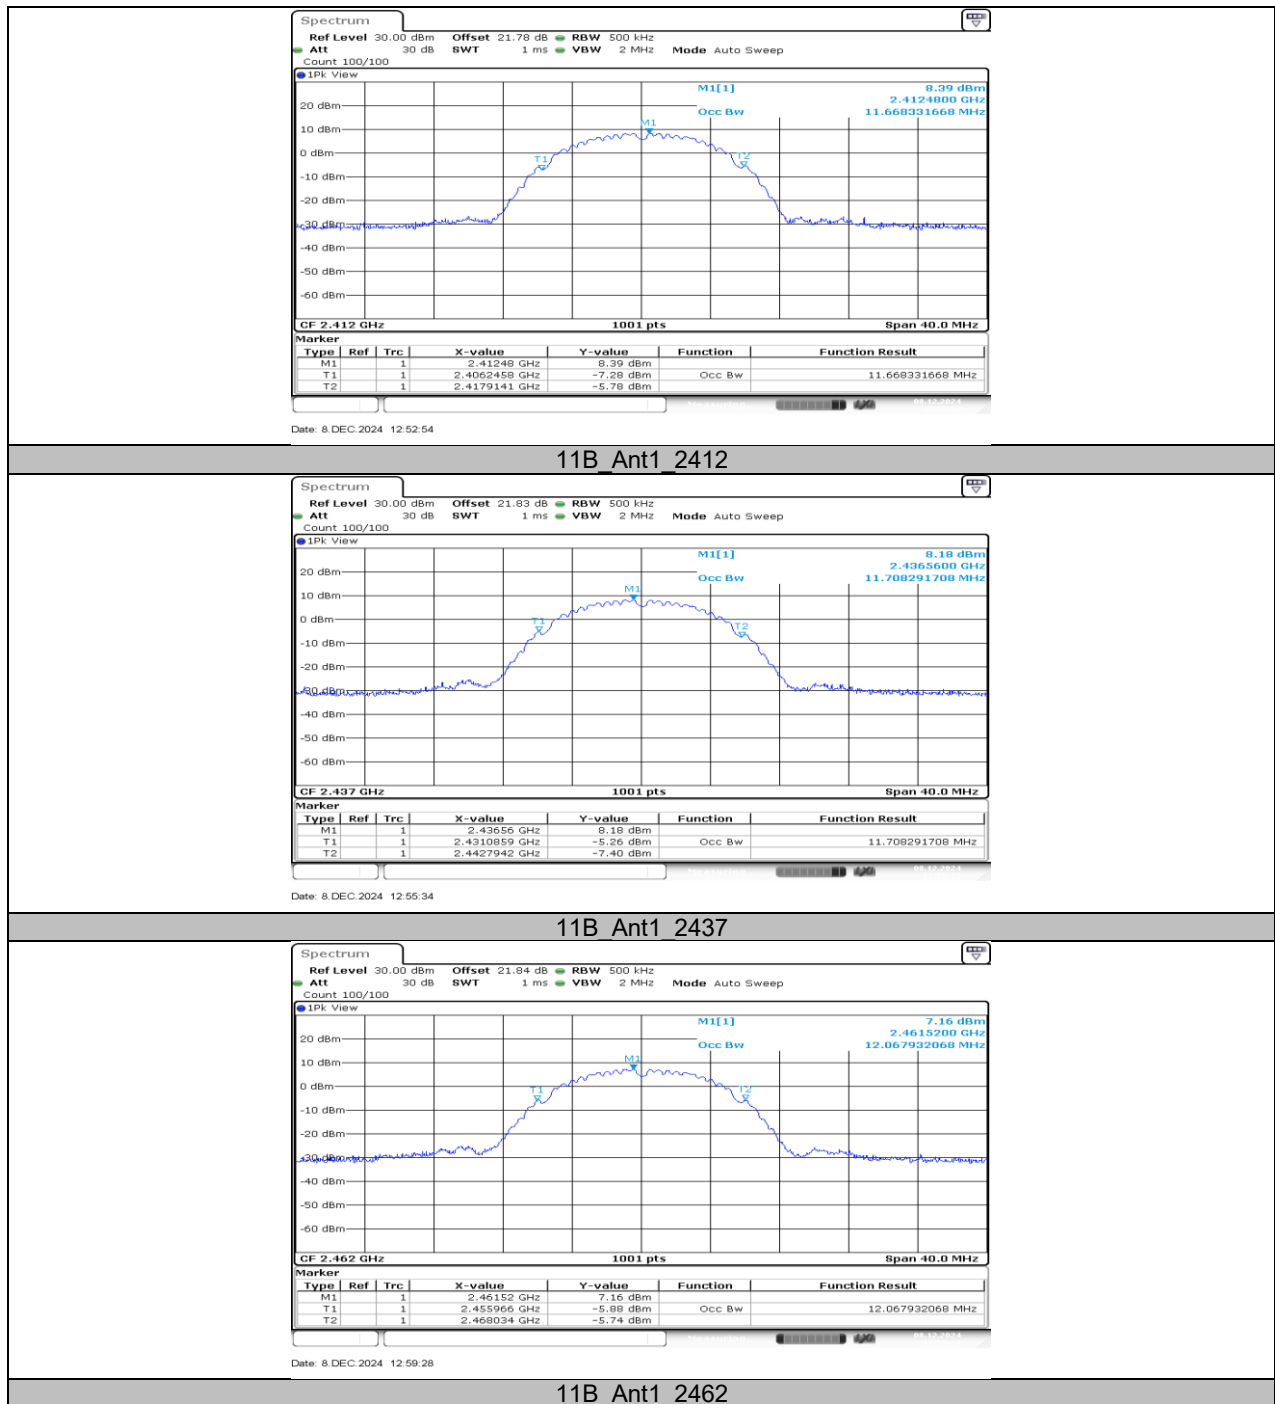


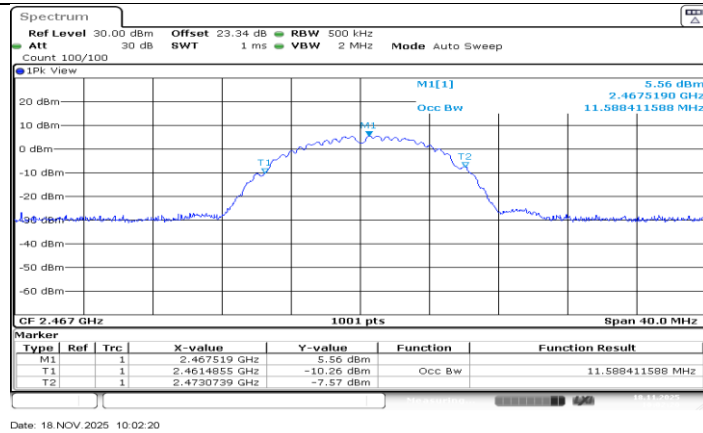


11B_Ant1_2467

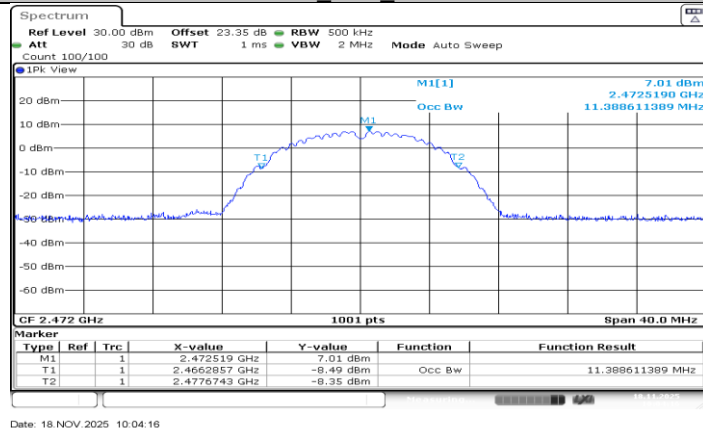


11B_Ant1_2472

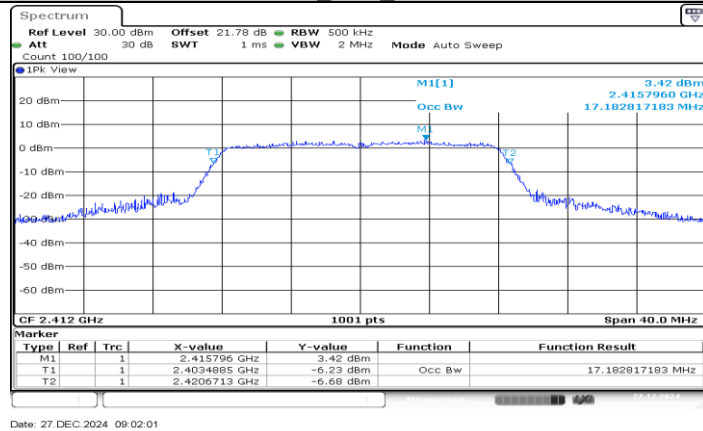


11G_Ant1_2412

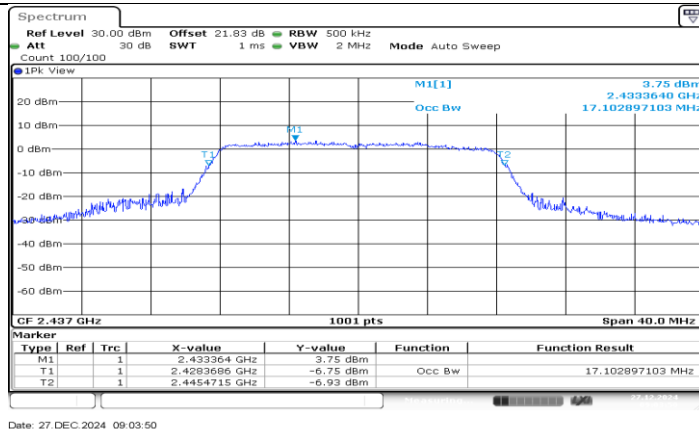


11G_Ant1_2437

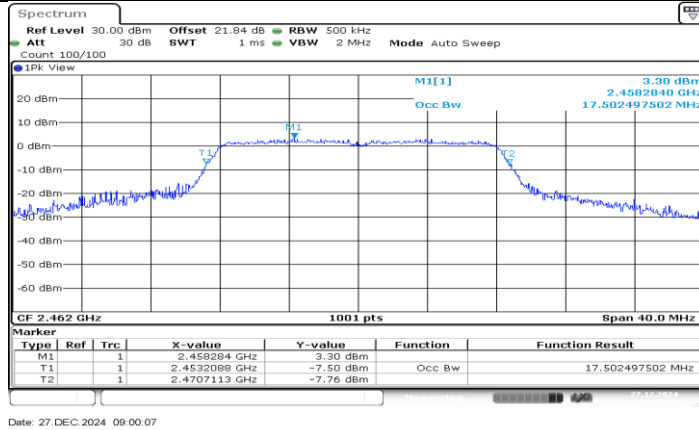


11G_Ant1_2462

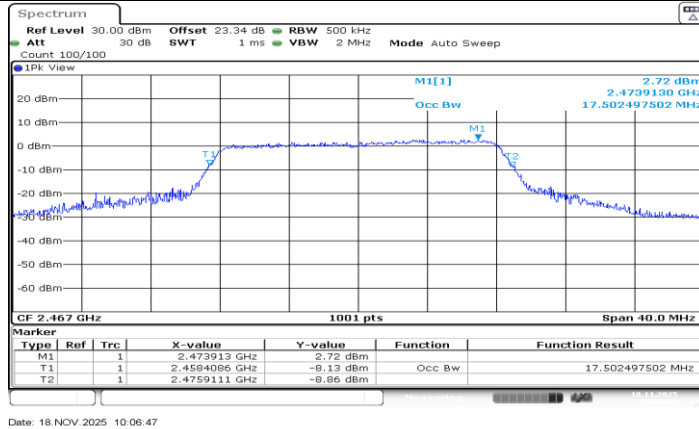


11G_Ant1_2467

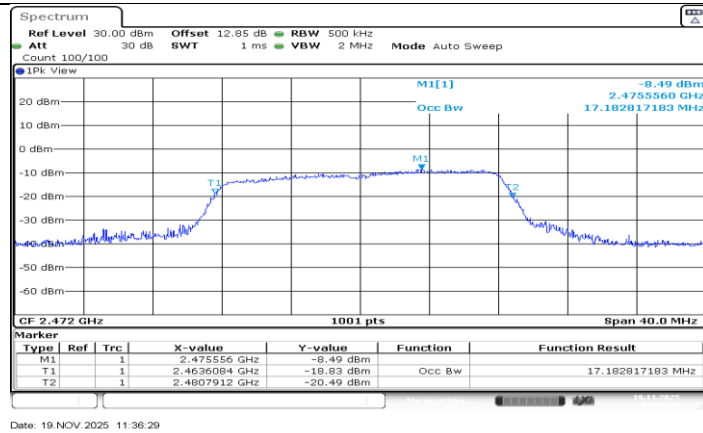

11G_Ant1_2472

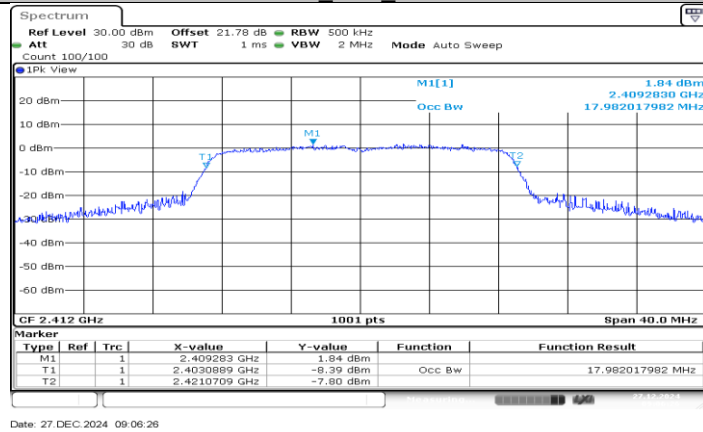

11N20SISO_Ant1_2412

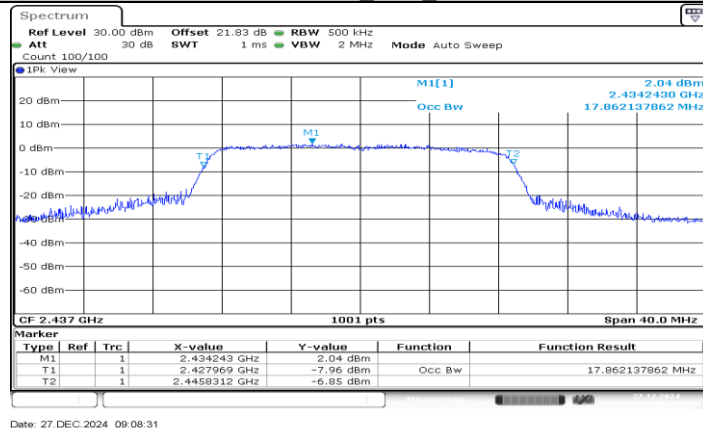

11N20SISO_Ant1_2437