CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

PAC-MANIA™ LEGACY WITH RISER ARCADE1UP /BANDAI NAMCO ENTERTAINMENT LEGACY ARCADE GAME Pac-Man Edition with WIFI/DIG DUG™ LEGACY WITH RISER ARCADE1UP /PAC-MAN LEGACY WITH RISER ARCADE1UP/Ms.PAC-MAN™ LEGACY WITH RISER ARCADE1UP/ BANDAI NAMCO ENTERTAINMENT LEGACY ARCADE Ms. PAC-MAN EDITION WITH WIFI / BANDAI NAMCO ENTERTAINMENT PAC-MAN™ DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT MISS PAC-MAN DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT CLASS OF 81 DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT PAC-MAN CLASSIC ARCADE1UP, BANDAI NAMCO ENTERTAINMENT Ms.PAC-MAN CLASSIC ARCADE1UP, BANDAI NAMCO ENTERTAINMENT PAC-MAN PLUS DELUXE EDITION

MODEL NUMBER: PAC-A-200110, PAC-A-200114, DIG-A-213310，PAC-A-206211, MSP-A-202210, MSP-A-202214, PAC-A-302111, MSP-A-300511, MSP-A-303611, PAC-A-301320, MSP-A-300520, PAC-A-405411

FCC ID: 2APXHPABALE

REPORT NUMBER: 4790284007-14

ISSUE DATE: September 2, 2024

Prepared for

WF TASTEMAKERS TRADING LIMITED
Unit 05 and unit 06, 6th Floor, Greenfield Tower Concordia Plaza, 1 Science Museum Road, TST East, Hong Kong

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881
Fax: +86 769 33244054

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Website: www.ul.com

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	6/6/2022	Initial Issue	Dean Hua
V1	2/8/2023	Added the new EUT name and model name	Kebo Zhang
V2	9/2/2024	Added the new EUT name and model name	Fanny Huang

Note for V1: The new model PAC-A-302111, MSP-A-300511, MSP-A-303611, PAC-A-301320, MSP-A-300520 have the same RF technical construction including circuit diagram, PCB Layout, components, component layout and RF performance with PAC-A-200110, PAC-A-200114, DIG-A-213310，PAC-A-206211, MSP-A-202210, MSP-A-202214. Only different to LCD, games & appearance. The difference lies are the non-RF technical construction. The manufacturer declares that it complies the requirements of Class I permissive changes. Therefore, the new model will be reconsidered testing for SPURIOUS EMISSIONS (30 MHz ~ 18 GHz), and we select “PAC-A-302111” as the representative model for compliance test. For the other data, please refer to the original report.

Note for V2: The new model PAC-A-405411 has the same RF technical construction including circuit diagram, PCB Layout, components, component layout and RF performance with MSP-A-303611. Only different to LCD, Control deck & appearance. The difference lies are the non-RF technical construction. Therefore, the new model will be reconsidered spot check testing for SPURIOUS EMISSIONS (30 MHz ~ 18 GHz).

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Summary of Test Results			
Clause	**Test Items**	**FCC Rules**	**Test Results**
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass

Note:
1.This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when <Accuracy Method> decision rule is applied.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 8

2. TEST METHODOLOGY 10

3. FACILITIES AND ACCREDITATION 10

4. CALIBRATION AND UNCERTAINTY 11

4.1. MEASURING INSTRUMENT CALIBRATION 11

4.2. MEASUREMENT UNCERTAINTY 11

5. EQUIPMENT UNDER TEST 12

5.1. DESCRIPTION OF EUT 12

5.2. CHANNEL LIST 13

5.3. MAXIMUM OUTPUT POWER 14

5.4. TEST CHANNEL CONFIGURATION 14

5.5. THE WORSE CASE POWER SETTING PARAMETER 14

5.6. THE WORSE CASE CONFIGURATIONS 15

5.7. DESCRIPTION OF AVAILABLE ANTENNAS 16

5.8. DESCRIPTION OF TEST SETUP 17

MEASURING INSTRUMENT AND SOFTWARE USED 18

6. ANTENNA PORT TEST RESULTS 22

6.1. ON TIME AND DUTY CYCLE 22

6.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH 23

6.3. CONDUCTED OUTPUT POWER 25

6.4. POWER SPECTRAL DENSITY 26

6.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS 27

7. RADIATED TEST RESULTS 29

7.1. RESTRICTED BANDEDGE - PAC-A-200110 35

7.1.1. 802.11b MODE 35

7.1.2. 802.11g MODE 39

7.1.3. 802.11n HT20 MODE 43

7.2. RESTRICTED BANDEDGE - PAC-A-302111 47

7.2.1. 802.11b MODE 47

7.3. RESTRICTED BANDEDGE - PAC-A-405411 49

7.3.1. 802.11b MODE 49

7.4. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) - PAC-A-200110 51

7.4.1. 802.11b MODE 51

7.5. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) - PAC-A-302111 57

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.5.1. 802.11b MODE 57

7.6. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) - PAC-A-405411 59
7.6.1. 802.11b MODE 59

7.7. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) - PAC-A-200110 61
7.7.1. 802.11b MODE 61
7.7.2. 802.11g MODE 67
7.7.3. 802.11n HT20 MODE 73

7.8. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) - PAC-A-302111 79
7.8.1. 802.11b MODE 79

7.9. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) - PAC-A-405411 81
7.9.1. 802.11b MODE 81

7.10. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz) 83
7.10.1. 802.11b MODE 83

7.11. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz) 85
7.11.1. 802.11b MODE- PAC-A-200110 85
7.11.2. 802.11b MODE- PAC-A-302111 87
7.11.3. 802.11b MODE- PAC-A-405411 89

7.12. SPURIOUS EMISSIONS BELOW 30 MHz 91
7.12.1. 802.11b MODE 91

8. AC POWER LINE CONDUCTED EMISSIONS 94

8.1. 802.11b SISO MODE 96

9. ANTENNA REQUIREMENTS 98

10. Appendix A 99

10.1. Appendix A: DTS Bandwidth 99
10.1.1. Test Result 99
10.1.2. Test Graphs 100

10.2. Appendix B: Occupied Channel Bandwidth 103
10.2.1. Test Result 103
10.2.2. Test Graphs 104

10.3. Appendix C: Maximum Average Conducted Output Power 107
10.3.1. Test Result 107

10.4. Appendix D: Maximum power spectral density 108
10.4.1. Test Result 108
10.4.2. Test Graphs 109

10.5. Appendix E: Band edge measurements 112
10.5.1. Test Result 112
10.5.2. Test Graphs 113

10.6. Appendix F: Conducted Spurious Emission 115
10.6.1. Test Result 115
10.6.2. Test Graphs 116

10.7. Appendix G: Duty Cycle 125
10.7.1. Test Result 125

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.7.2. Test Graphs 126

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name:	WF TASTEMAKERS TRADING LIMITED
Address:	Unit 05 and unit 06, 6th Floor, Greenfield Tower Concordia Plaza, 1 Science Museum Road, TST East, Hong Kong

Manufacturer Information

Company Name:	WF TASTEMAKERS TRADING LIMITED
Address:	Unit 05 and unit 06, 6th Floor, Greenfield Tower Concordia Plaza, 1 Science Museum Road, TST East, Hong Kong

EUT Information

EUT Name:	PAC-MANIA™ LEGACY WITH RISER ARCADE1UP / BANDAI NAMCO ENTERTAINMENT LEGACY ARCADE GAME Pac-Man Edition with WIFI/DIG DUG™ LEGACY WITH RISER ARCADE1UP /PAC-MAN LEGACY WITH RISER ARCADE1UP/Ms.PAC-MAN™ LEGACY WITH RISER ARCADE1UP/ BANDAI NAMCO ENTERTAINMENT LEGACY ARCADE Ms. PAC-MAN EDITION WITH WIFI / BANDAI NAMCO ENTERTAINMENT PAC-MAN™ DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT MISS PAC-MAN DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT CLASS OF 81 DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT PAC-MAN CLASSIC ARCADE1UP, BANDAI NAMCO ENTERTAINMENT Ms.PAC-MAN CLASSIC ARCADE1UP, BANDAI NAMCO ENTERTAINMENT PAC-MAN PLUS DELUXE EDITION
Model:	PAC-A-200110
Series Model:	PAC-A-200114, DIG-A-213310，PAC-A-206211, MSP-A-202210, MSP-A-202214, PAC-A-302111, MSP-A-300511, MSP-A-303611, PAC-A-301320, MSP-A-300520, PAC-A-405411
Model Difference:	Please refer to clause 5.1. Description of EUT
Brand:	ARCADE 1 UP
Sample Received Date for V0:	Feb. 10, 2022
Sample Received Date for V1:	December 7, 2022
Sample Received Date for V2:	June 18, 2024
Sample Status:	Normal
Sample ID for V0:	4662428
Sample ID for V1:	5617297
Sample ID for V2:	7374968
Date of Tested for V0:	Feb. 11 ~ June 6, 2022
Date of Tested for V1:	December 7, 2022 ~ February 8, 2023
Date of Tested for V2:	September 2, 2024

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Fanny Huang

Engineer Project Associate

Checked By:

Kebo Zhang

Senior Project Engineer

Approved By:

Stephen Guo

Operations Manager

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013.
.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	**A2LA (Certificate No.: 4102.01)** UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. **FCC (FCC Designation No.: CN1187)** UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules **ISED (Company No.: 21320)** UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. **VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)** UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	PAC-MANIA™ LEGACY WITH RISER ARCADE1UP / BANDAI NAMCO ENTERTAINMENT LEGACY ARCADE GAME Pac-Man Edition with WIFI/DIG DUG™ LEGACY WITH RISER ARCADE1UP /PAC-MAN LEGACY WITH RISER ARCADE1UP/Ms.PAC-MAN™ LEGACY WITH RISER ARCADE1UP/ BANDAI NAMCO ENTERTAINMENT LEGACY ARCADE Ms. PAC-MAN EDITION WITH WIFI / BANDAI NAMCO ENTERTAINMENT PAC-MAN™ DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT MISS PAC-MAN DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT CLASS OF 81 DELUXE EDITION / BANDAI NAMCO ENTERTAINMENT PAC-MAN CLASSIC ARCADE1UP, BANDAI NAMCO ENTERTAINMENT Ms.PAC-MAN CLASSIC ARCADE1UP, BANDAI NAMCO ENTERTAINMENT PAC-MAN PLUS DELUXE EDITION
Model:	PAC-A-200110
Serial Model:	PAC-A-200114, DIG-A-213310，PAC-A-206211, MSP-A-202210, MSP-A-202214, PAC-A-302111, MSP-A-300511, MSP-A-303611, PAC-A-301320, MSP-A-300520, PAC-A-405411
Model Difference:	PAC-A-200114, DIG-A-213310，PAC-A-206211, MSP-A-202210 have the same technical construction including circuit diagram, PCB Layout, components and component layout, only the color, product name and model name are different. We select “PAC-A-200110” as the representative model for compliance test. MSP-A-202214 has the same technical construction including circuit diagram, PCB Layout, components and component layout, only the outlook are different. We select “PAC-A-200110” as the representative model for compliance test. PAC-A-302111, MSP-A-300511, MSP-A-303611, PAC-A-301320, MSP-A-300520 have the same RF technical construction including circuit diagram, PCB Layout, components, component layout and RF performance with PAC-A-200110, PAC-A-200114, DIG-A-213310，PAC-A-206211, MSP-A-202210, MSP-A-202214. Only different to LCD, games & appearance. PAC-A-405411 has the same RF technical construction including circuit diagram, PCB Layout, components, component layout and RF performance with MSP-A-303611. Only different to LCD, Control deck & appearance.
Radio Technology	IEEE802.11b/g/n HT20
Operation frequency	IEEE 802.11b: 2412 MHz-2462 MHz IEEE 802.11g: 2412 MHz-2462 MHz IEEE 802.11n HT20: 2412 MHz-2462 MHz
Modulation	IEEE 802.11b: DSSS (CCK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK
Rated Input	AC 120 V,60 Hz

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	13.96	20.36
g	2412 ~ 2462	1-11[11]	11.54	17.94
n HT20	2412 ~ 2462	1-11[11]	11.46	17.86

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		putty					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	32	32	32	Not Supported		
802.11g	1	42	42	Default			
802.11n HT20	1	42	42	Default			

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	Monopole	6.4

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Dell	Vostro 3902	8KNDDB2

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	TYPE C	/	1.0	/

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	Switching Power Supply	BIron	BI36-120300-U2	Input: 100-240 V~ 50/60 Hz 1.2 A Output: 12.0 V ⎓ 3.0 A
2	Switching Power Supply	Royal	BI36L-120300-I-LED	Input: 100-240 V~ 50/60 Hz 1.2 A Output: 12.0 V ⎓ 3.0 A

TEST SETUP

The EUT can work in an engineer mode with software through a Laptop.

SETUP DIAGRAM FOR TESTS

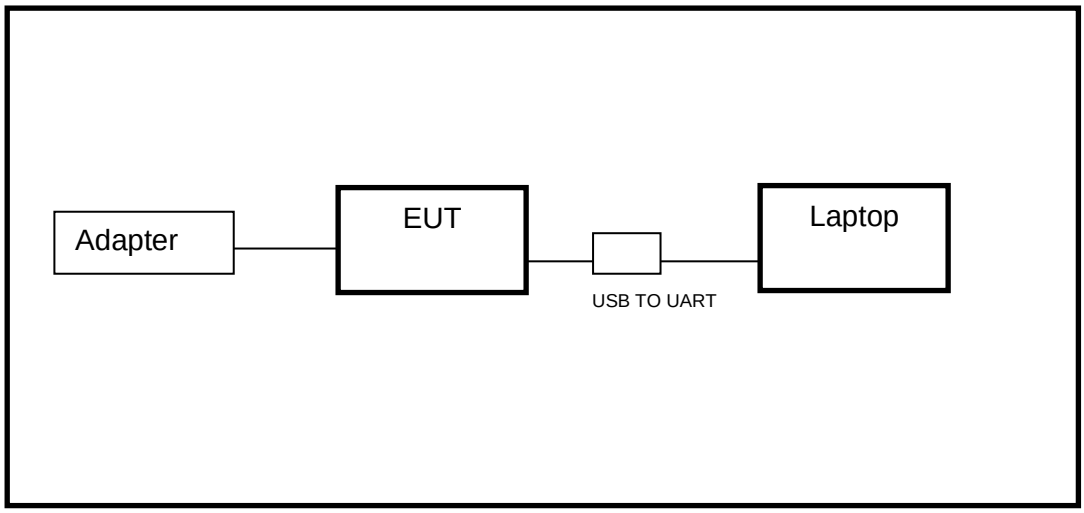

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

MEASURING INSTRUMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.23,2021	Mar.22,2022
Vector Signal Generator	R&S	SMBV100A	261637	Oct.30, 2021	Oct.29, 2022
Signal Generator	R&S	SMB100A	178553	Oct.30, 2021	Oct.29, 2022
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022

Software			
Description	Manufacturer	Name	Version
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32	10.60.10

Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.30, 2021	Oct.29, 2022
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.29, 2021	Sep.28, 2022
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.30, 2021	Oct.29, 2022
DC power supply	Keysight	E3642A	MY55159130	Oct.30, 2021	Oct.29, 2022
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2022

Software			
Description	Manufacturer	Name	Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System	2.6.77.0518

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13,2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022

Software			
Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024

Software			
Description	Manufacturer	Name	Version
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32	10.60.10

Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025

Software			
Description	Manufacturer	Name	Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System	V3.2.22

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	June 28, 2024	June 27, 2027
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130939	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	June 30, 2024	June 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024

Software			
Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only

PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	53.6 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

Please refer to appendix G.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

6.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

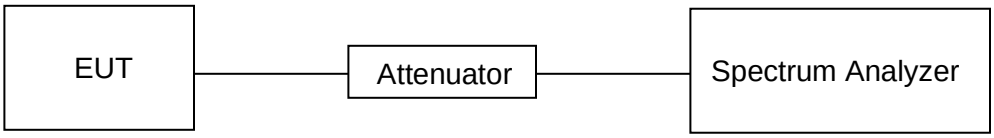

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	53.6 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

Please refer to appendix A & B.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

6.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	0.912 watt or 29.6 dBm	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM
Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).
Measure the average power of the transmitter, the indicated level is the average output power, after any corrections for external attenuators and cables.

TEST SETUP

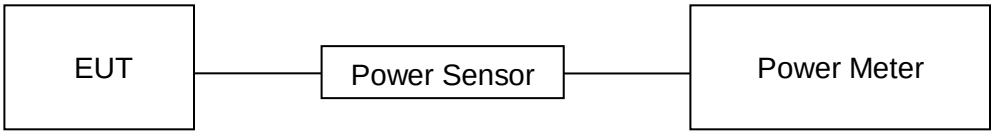

TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	53.6 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

Please refer to appendix C.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

6.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Trace average at least 100 traces
Sweep time	Auto couple

Refer to ANSI C63.10-2013 clause 11.10.3 Method AVGPSD-1
Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

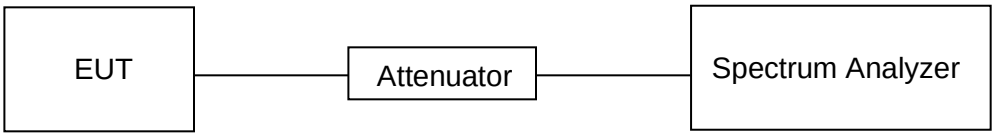

TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	53.6 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

Please refer to appendix D.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

6.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.
Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	≥3 × RBW
measurement points	≥span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST SETUP

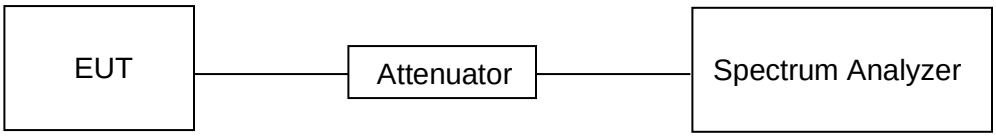

TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	53.6 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

Please refer to appendix E & F.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
[1]0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	([2])
13.36-13.41			

Note: [1]Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
[2]Above 38.6c

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST SETUP AND PROCEDURE

Below 30 MHz

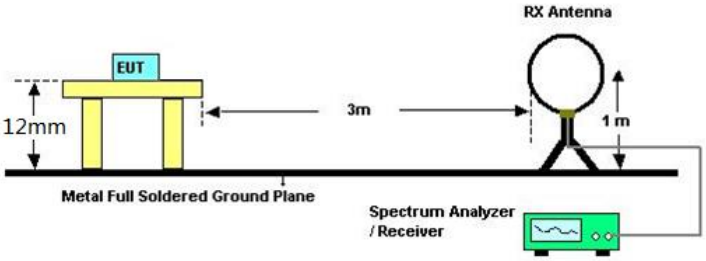

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 12 mm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to Y-51.5 = Z dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Below 1 GHz and above 30 MHz

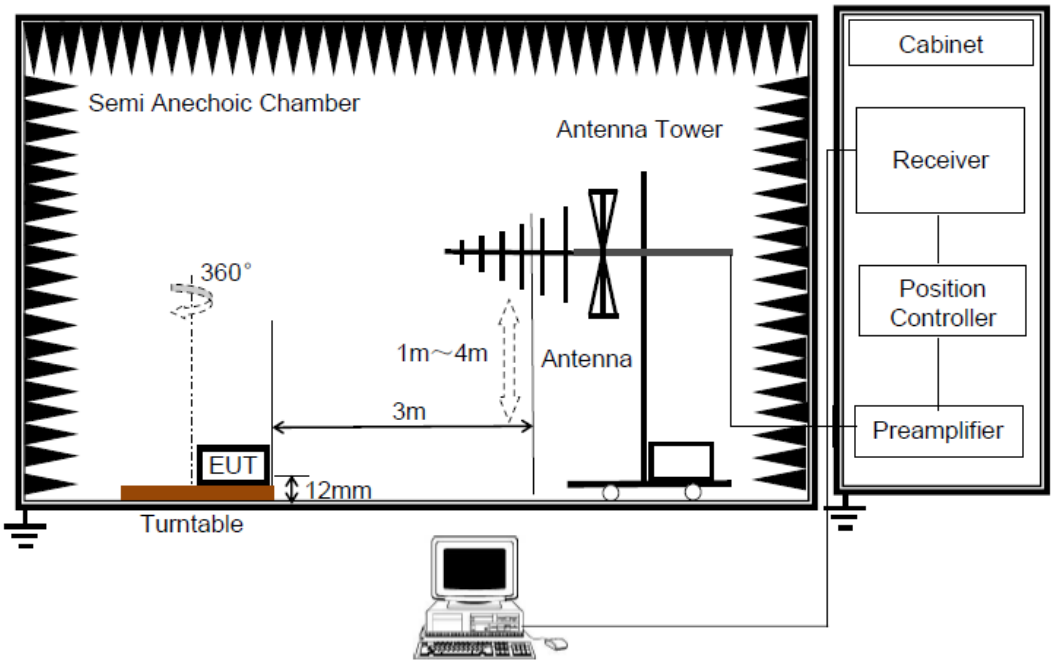

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 12 mm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Above 1 GHz

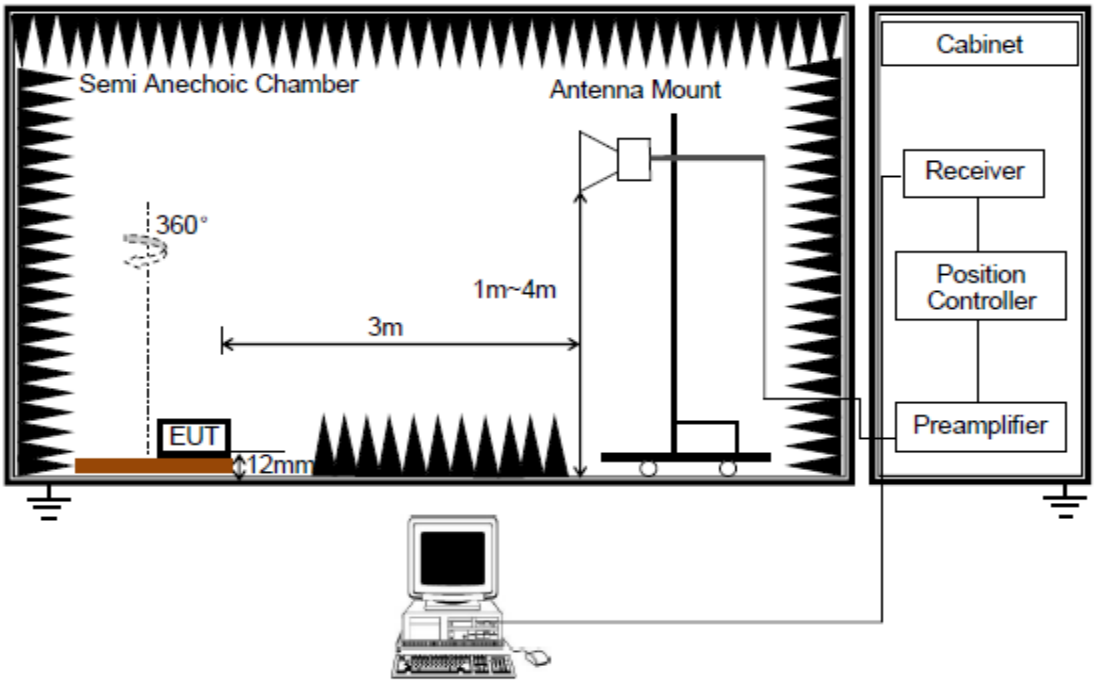

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 12 mm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

X axis, Y axis, Z axis positions:

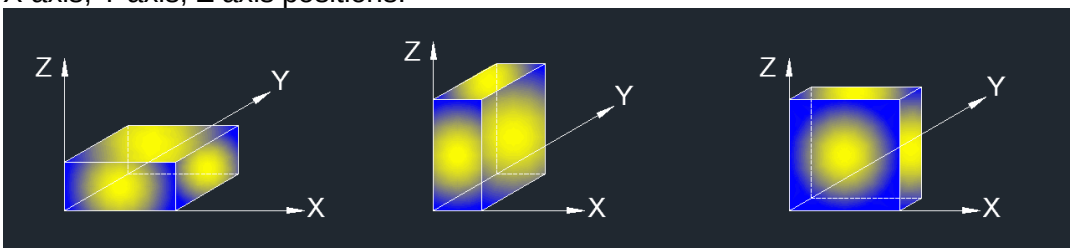

Note: The manufacturer has recommended that the EUT only be used in the Floor-standing orientation; therefore, all radiated testing was performed in the orientation.
The EUT was placed on normal orientation and all radiated emissions were performed with the EUT shown on the setup photo.

TEST ENVIRONMENT

Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.1. RESTRICTED BANDEDGE - PAC-A-200110

7.1.1. 802.11b MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

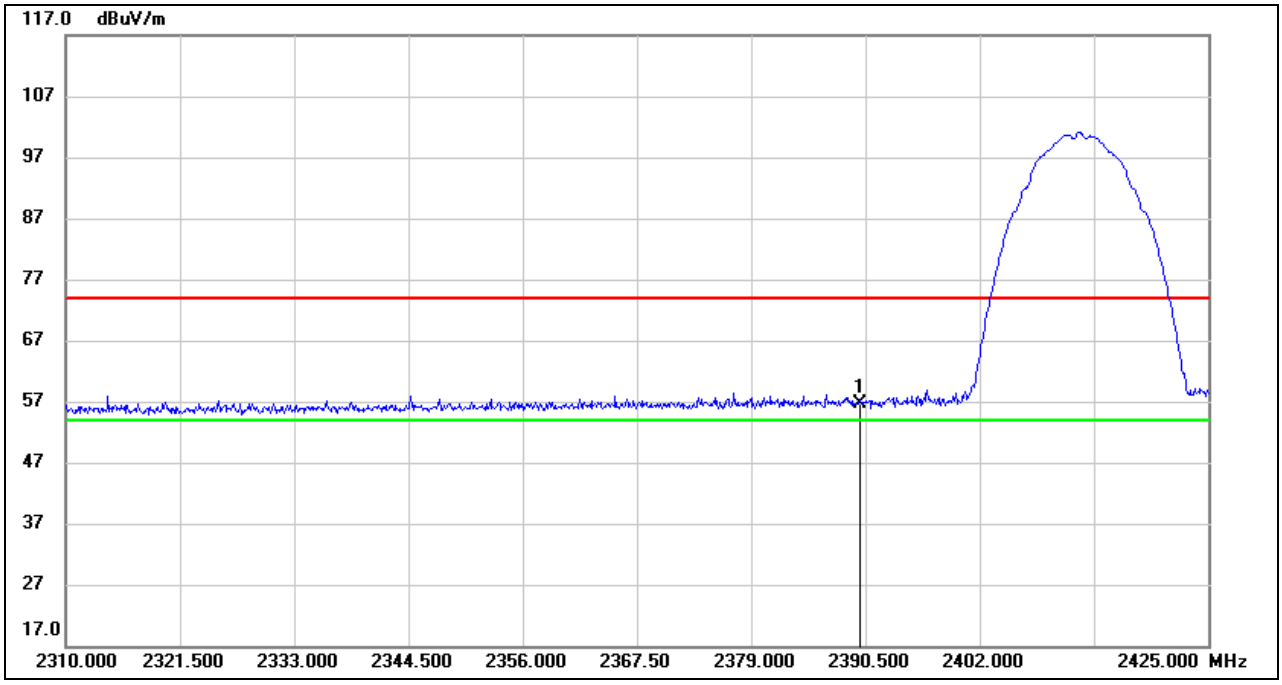

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	23.89	32.66	56.55	74.00	-17.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

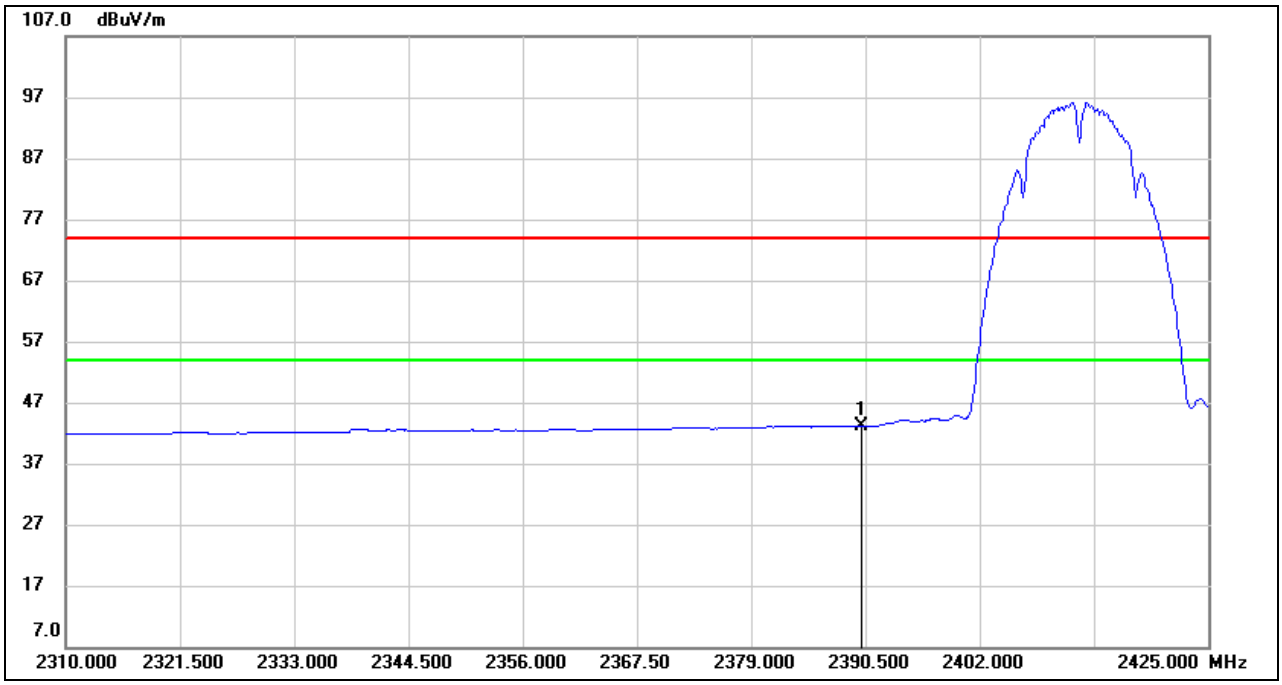

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	10.45	32.66	43.11	54.00	-10.89	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

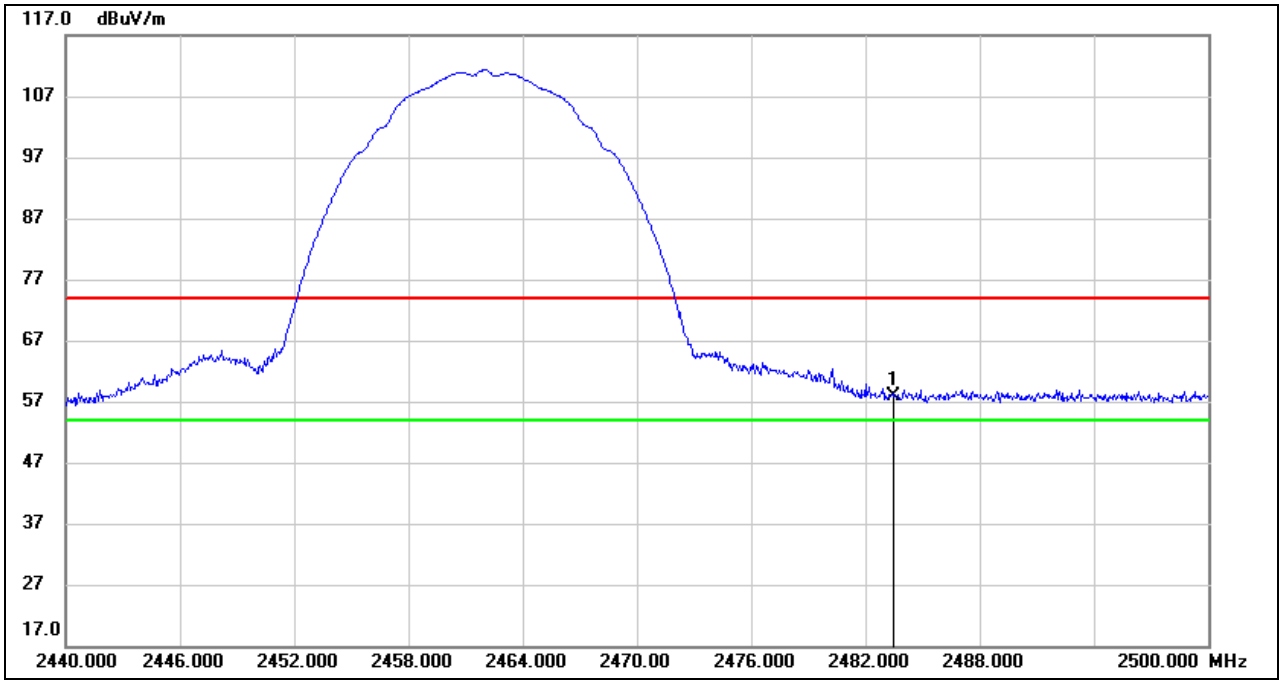

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	24.82	33.10	57.92	74.00	-16.08	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

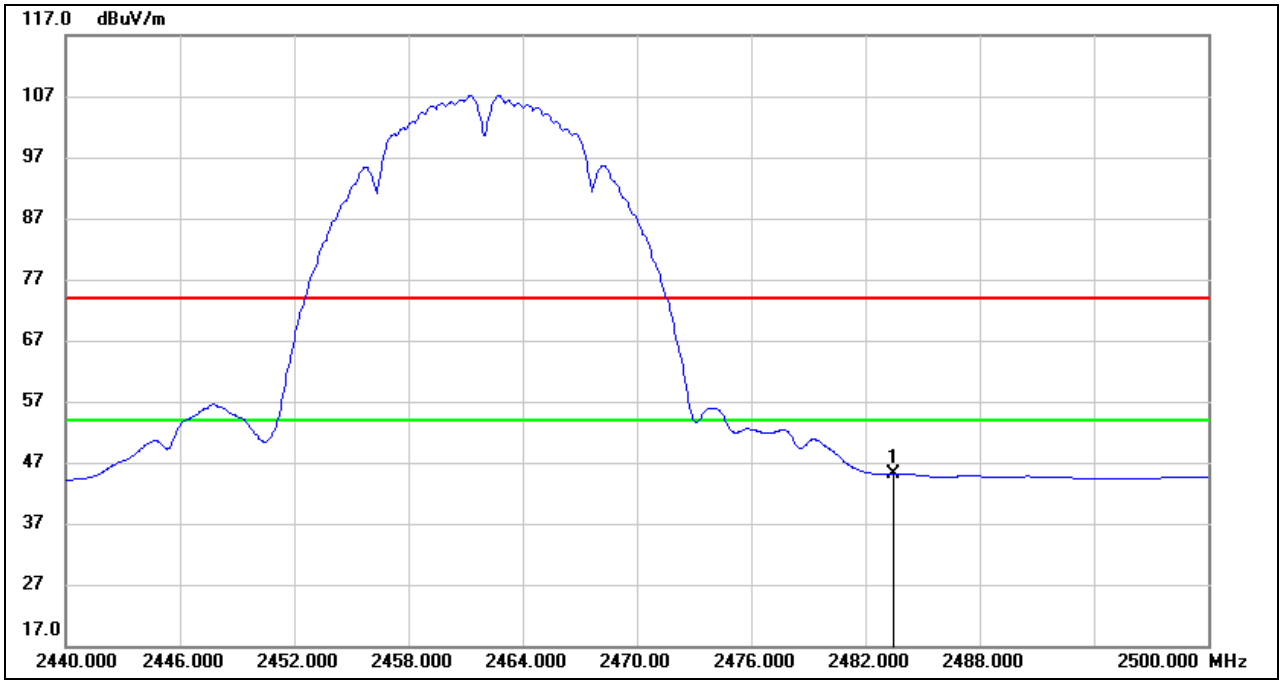

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.95	33.10	45.05	54.00	-8.95	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Both horizontal and vertical had been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.1.2. 802.11g MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

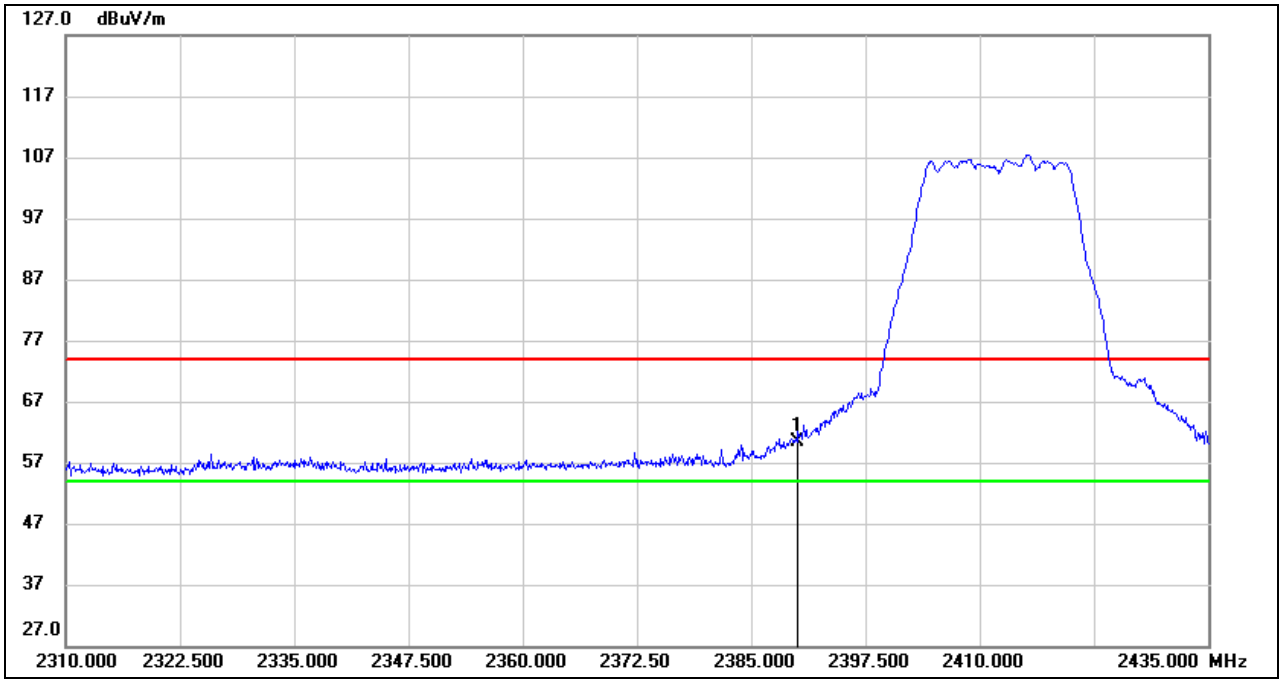

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.81	32.66	60.47	74.00	-13.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

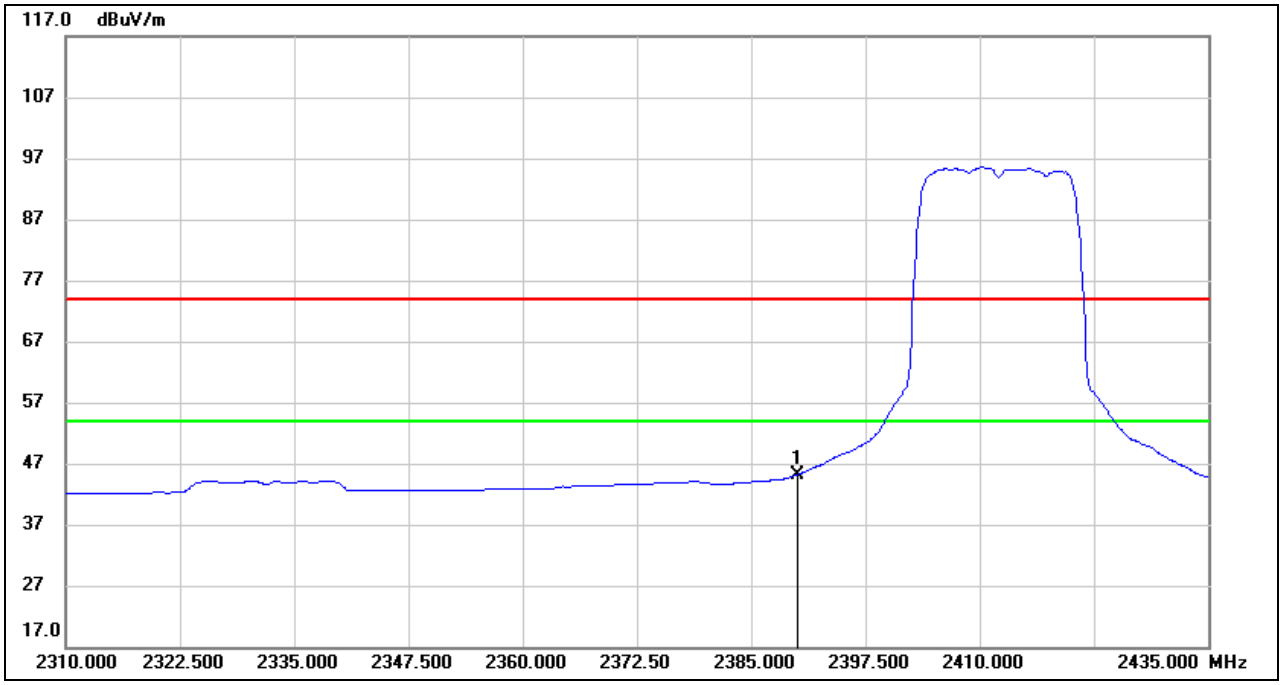

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	12.51	32.66	45.17	54.00	-8.83	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

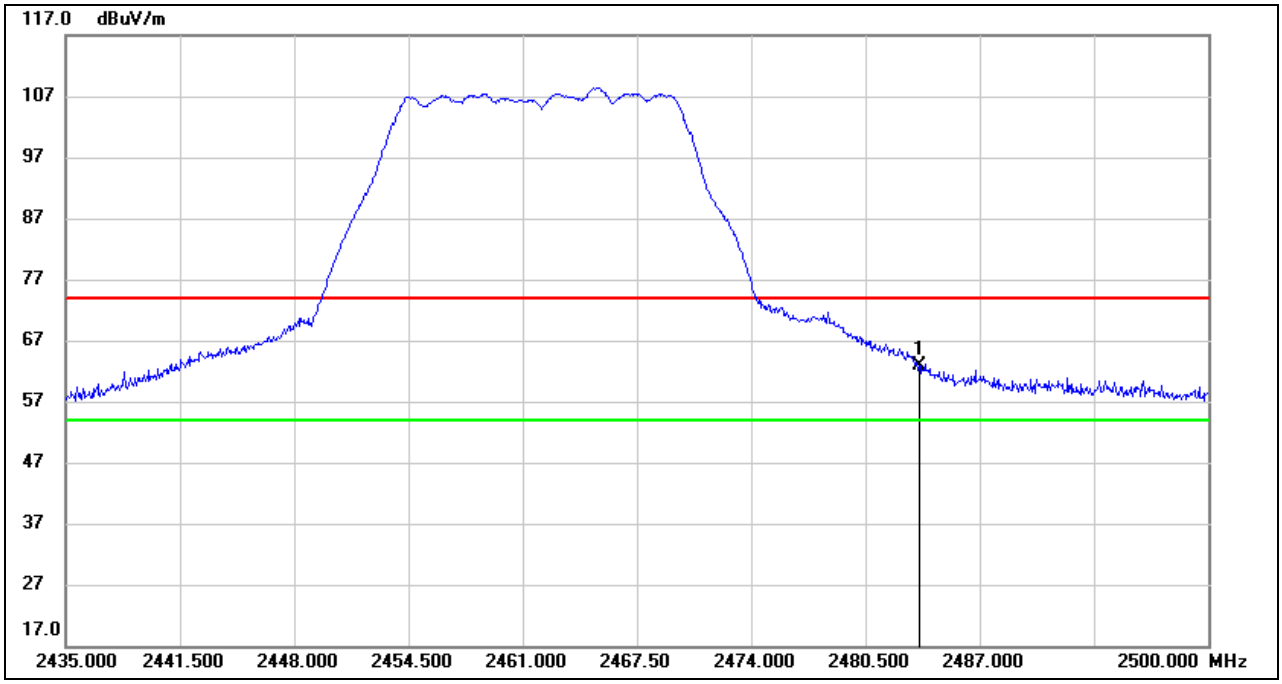

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	29.68	33.10	62.78	74.00	-11.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

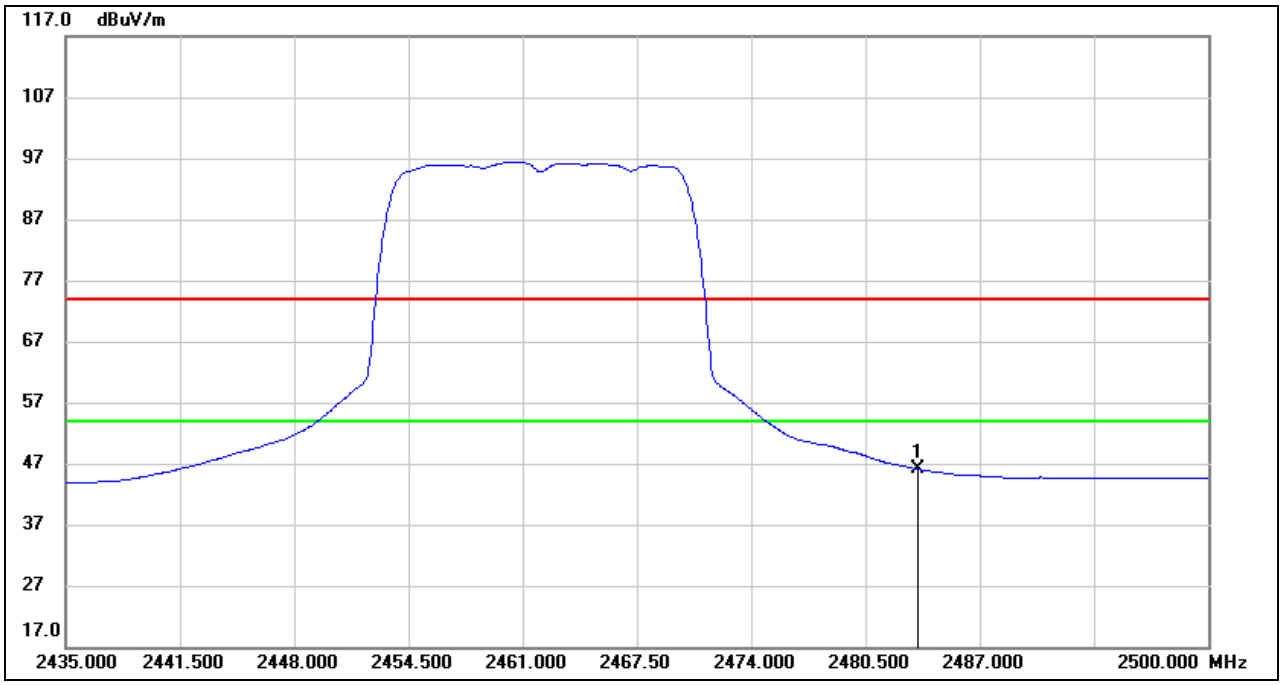

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.96	33.10	46.06	54.00	-7.94	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Both horizontal and vertical had been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.1.3. 802.11n HT20 MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

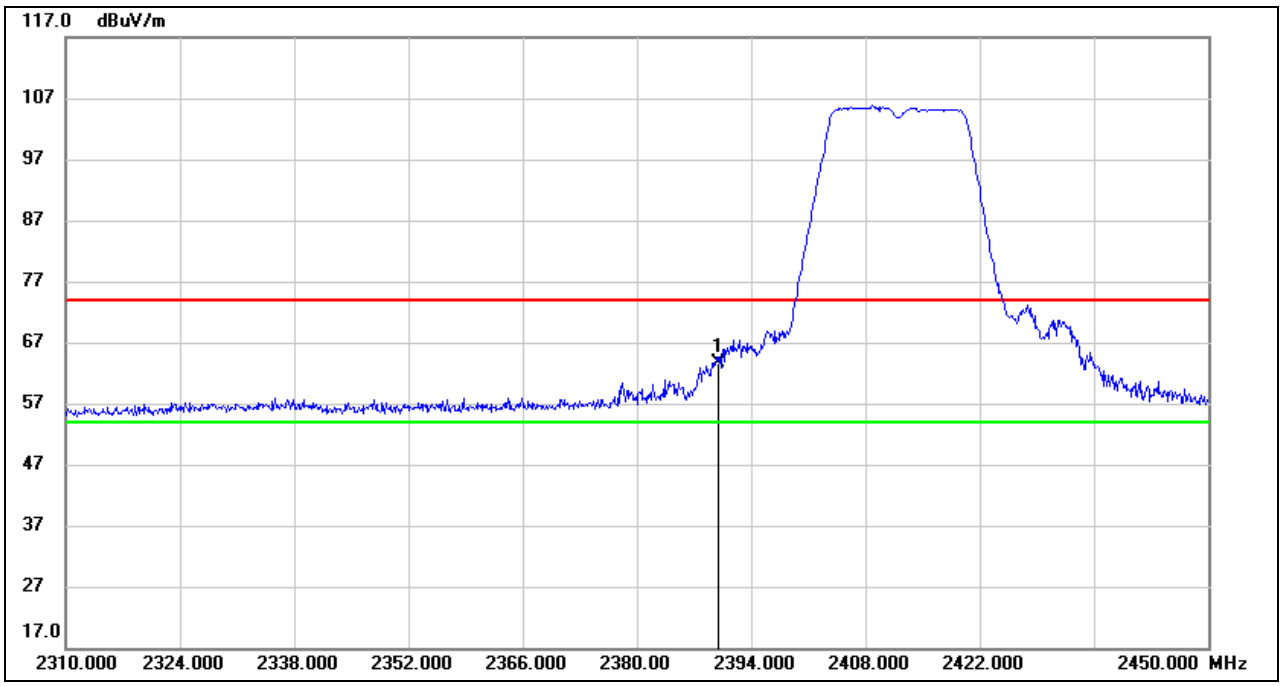

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	31.09	32.66	63.75	74.00	-10.25	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

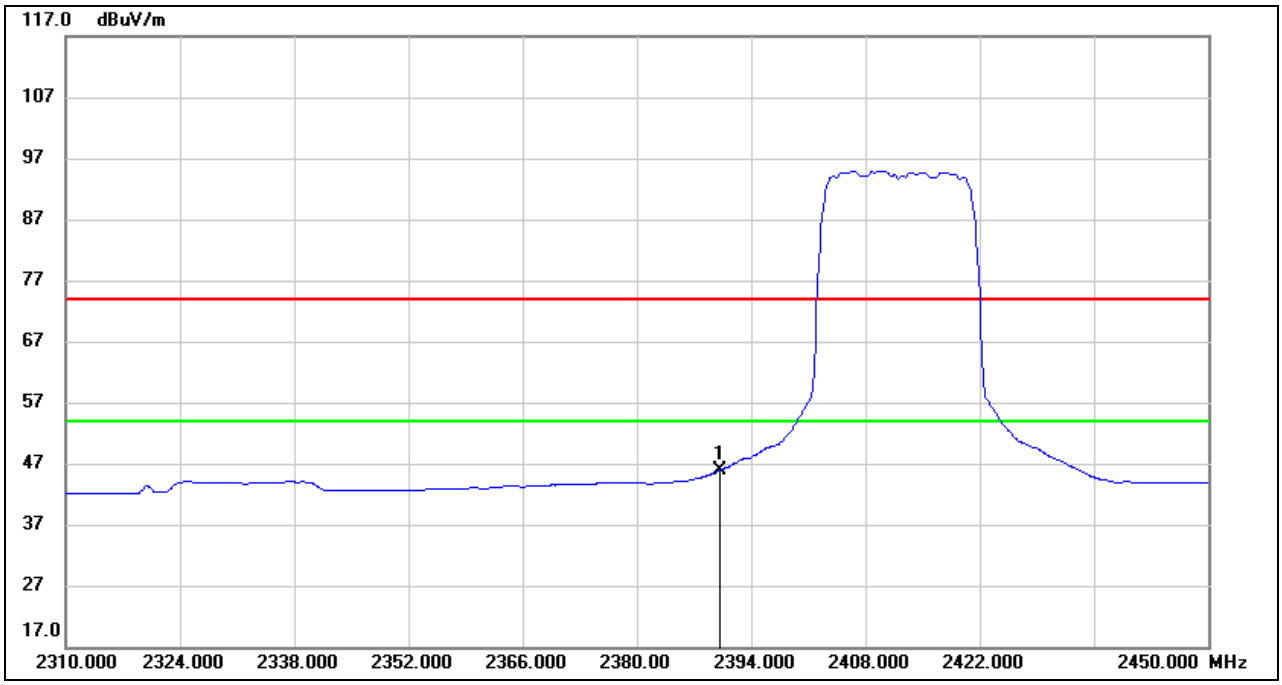

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.22	32.66	45.88	54.00	-8.12	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

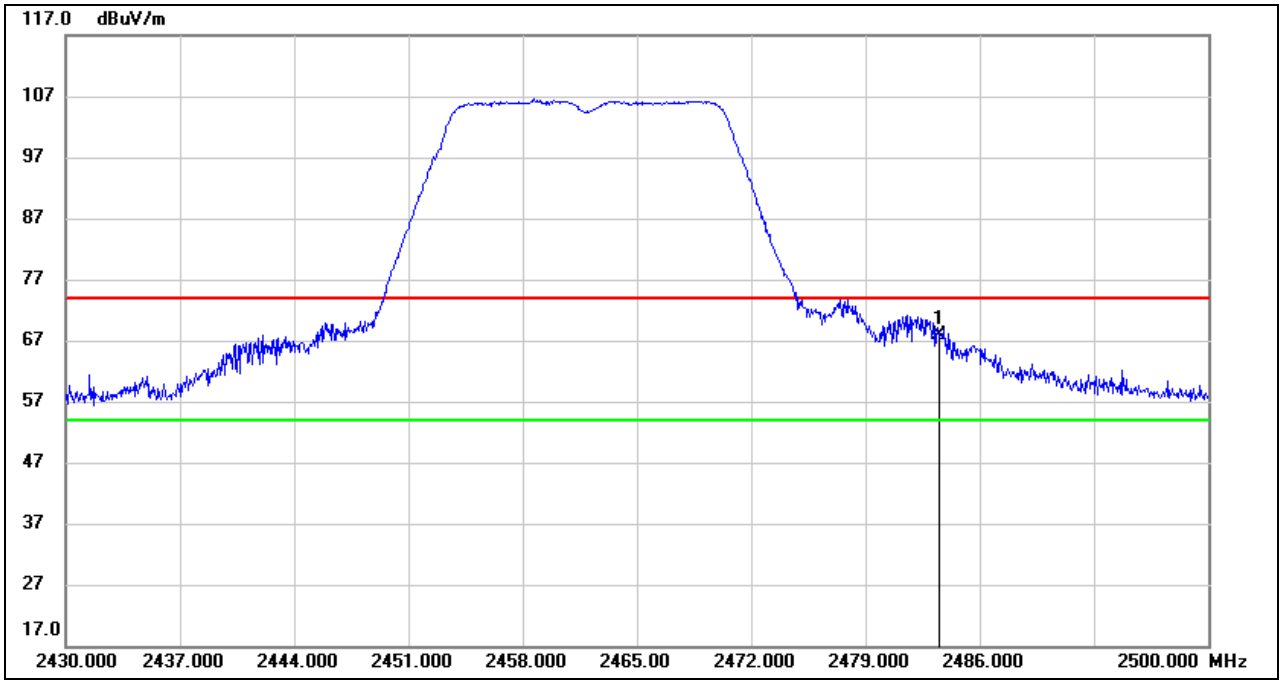

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.87	33.10	67.97	74.00	-6.03	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

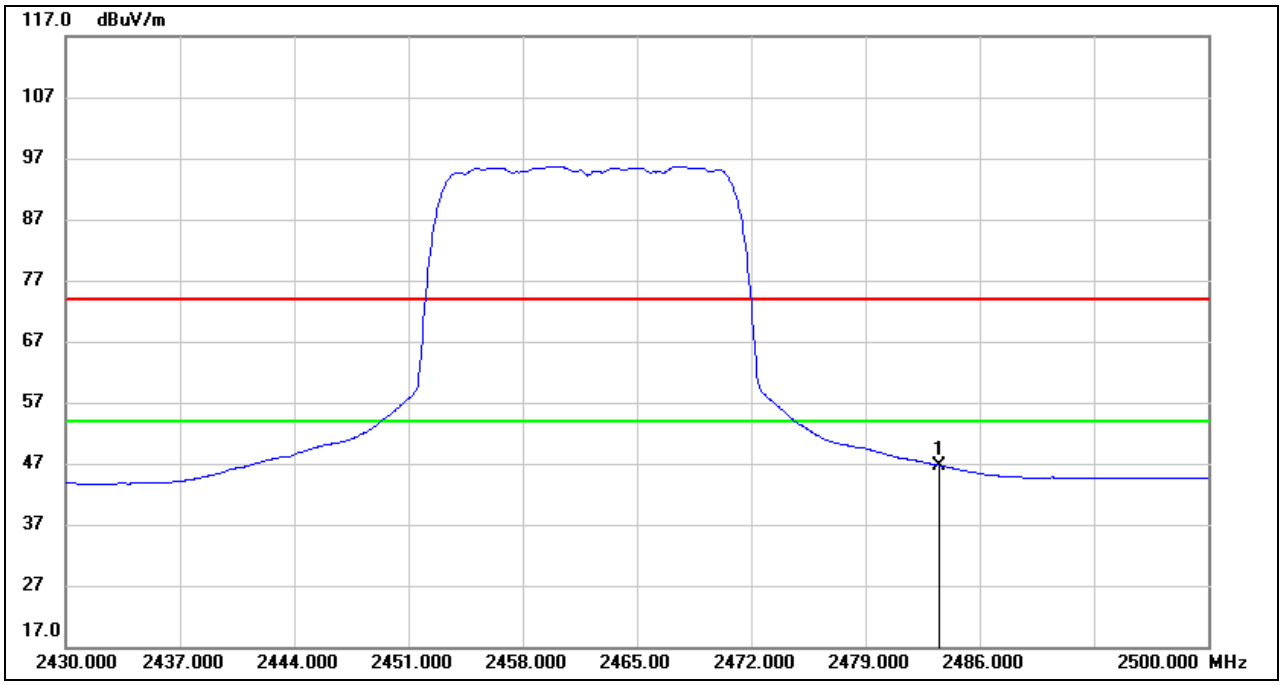

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	13.61	33.10	46.71	54.00	-7.29	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Both horizontal and vertical had been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.2. RESTRICTED BANDEDGE - PAC-A-302111

7.2.1. 802.11b MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

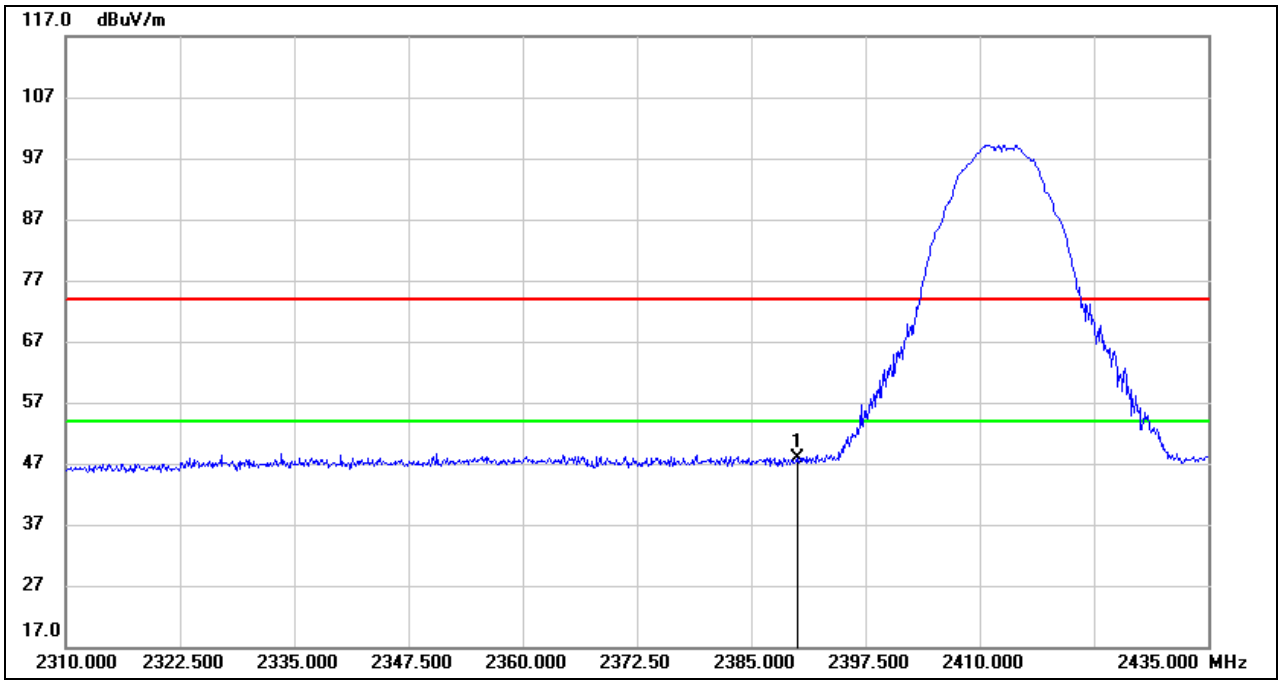

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	15.25	32.66	47.91	74.00	-26.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

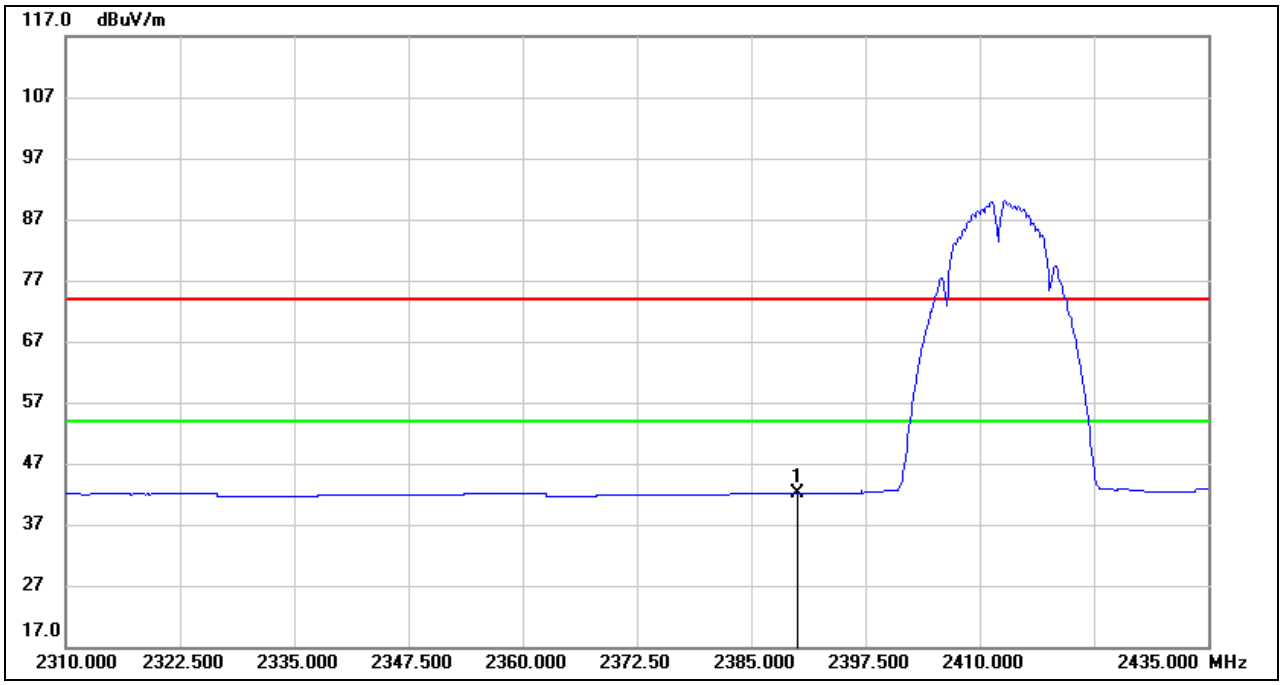

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	9.39	32.66	42.05	54.00	-11.95	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.3. RESTRICTED BANDEDGE - PAC-A-405411

7.3.1. 802.11b MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

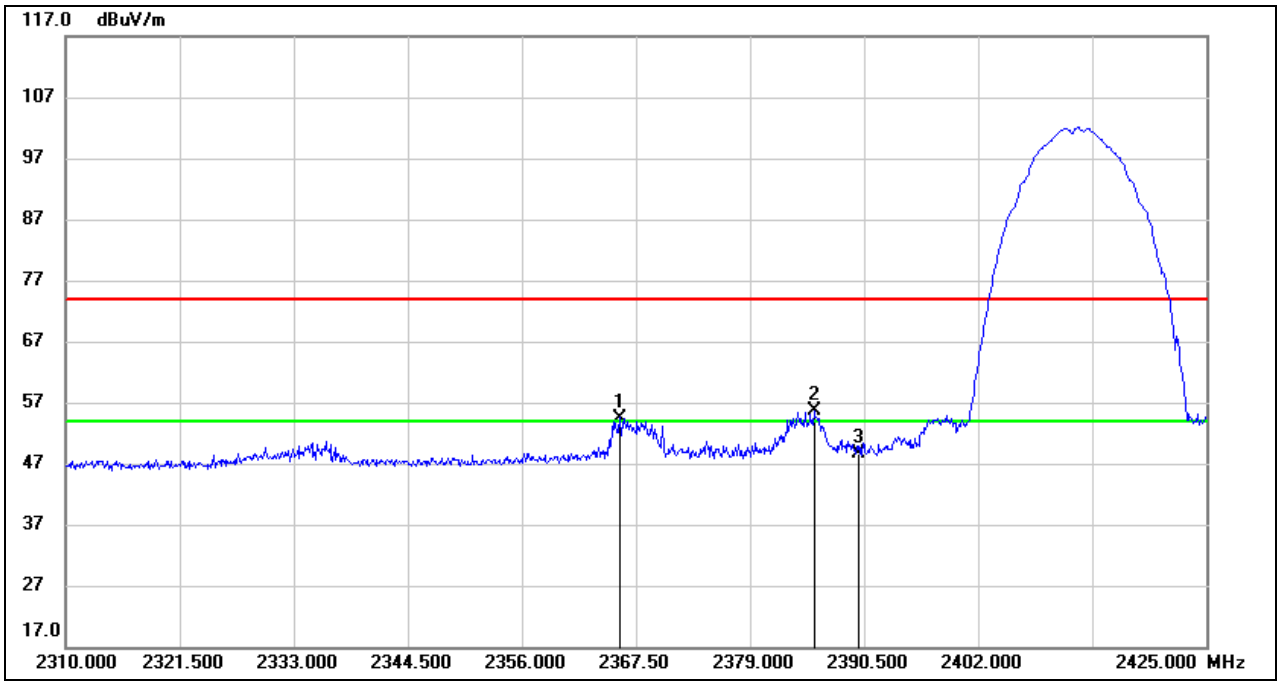

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.890	21.83	32.67	54.50	74.00	-19.50	peak
2	2385.440	22.81	32.77	55.58	74.00	-18.42	peak
3	2390.000	15.88	32.79	48.67	74.00	-25.33	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

AVG

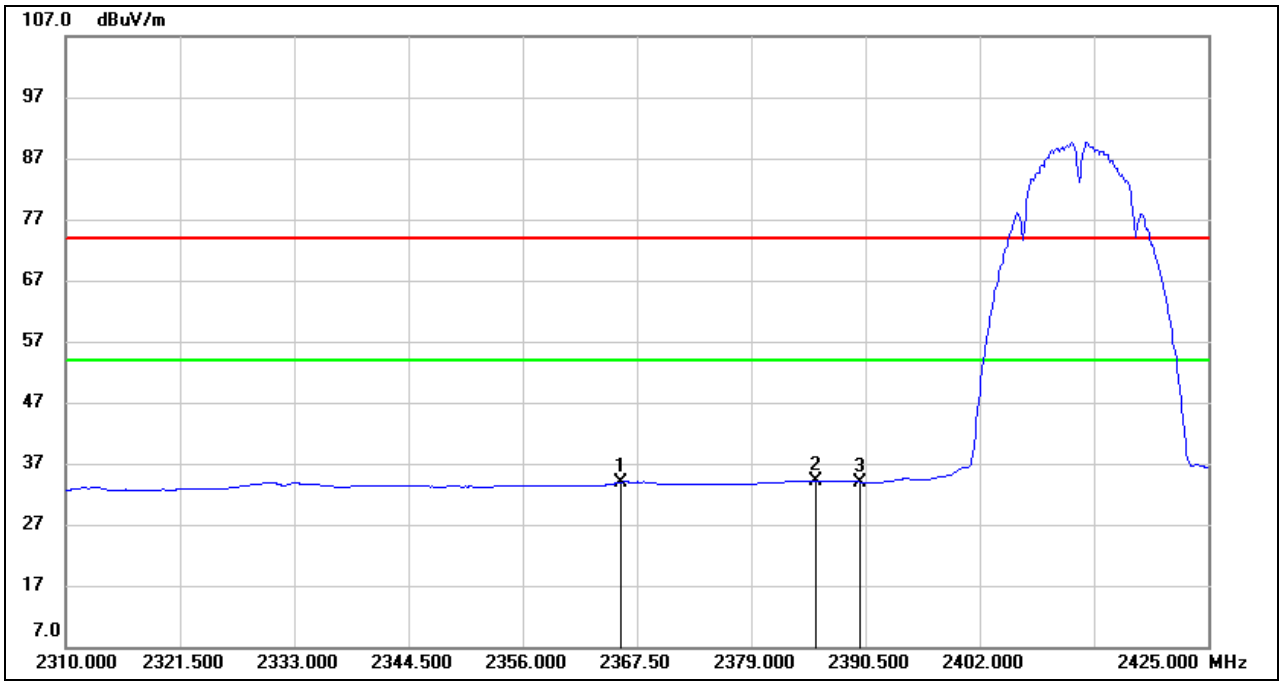

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.890	1.29	32.67	33.96	54.00	-20.04	AVG
2	2385.440	1.44	32.77	34.21	54.00	-19.79	AVG
3	2390.000	1.19	32.79	33.98	54.00	-20.02	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.4. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) - PAC-A-200110

7.4.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

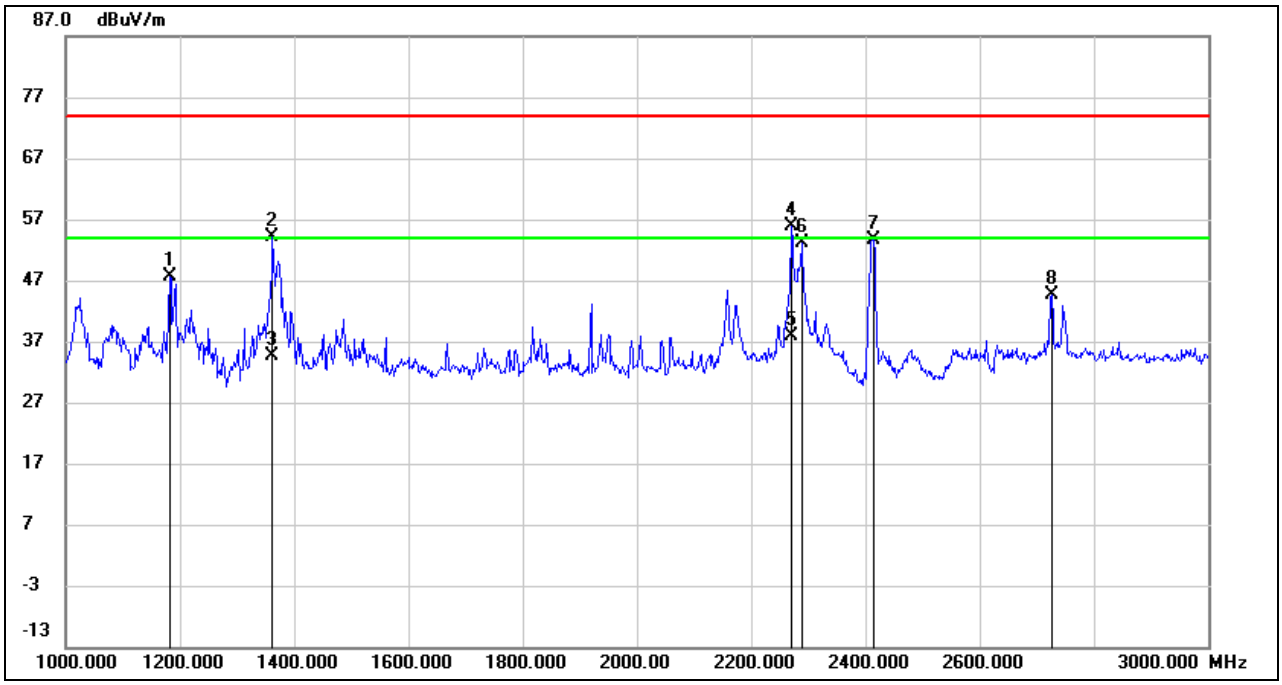

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1183.000	61.57	-13.89	47.68	74.00	-26.32	peak
2	1363.000	67.34	-13.28	54.06	74.00	-19.94	peak
3	1363.000	47.84	-13.28	34.56	54.00	-19.44	AVG
4	2271.000	65.44	-9.60	55.84	74.00	-18.16	peak
5	2271.000	47.56	-9.60	37.96	54.00	-16.04	AVG
6	2289.000	62.70	-9.53	53.17	74.00	-20.83	peak
7	2412.000	62.59	-9.03	53.56	/	/	Fundamental
8	2726.000	52.77	-8.04	44.73	74.00	-29.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

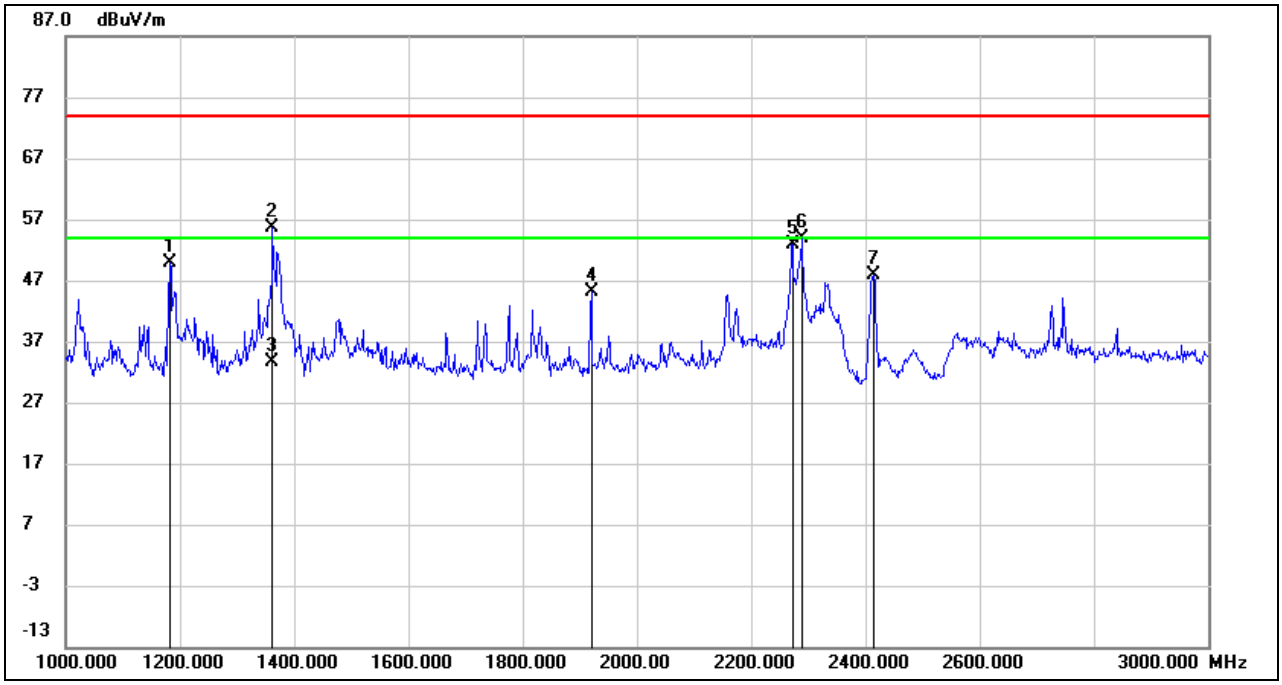

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1182.000	63.87	-13.89	49.98	74.00	-24.02	peak
2	1363.000	69.02	-13.28	55.74	74.00	-18.26	peak
3	1363.000	46.93	-13.28	33.65	54.00	-20.35	AVG
4	1920.000	56.23	-11.02	45.21	74.00	-28.79	peak
5	2272.000	62.46	-9.59	52.87	74.00	-21.13	peak
6	2289.000	63.46	-9.53	53.93	74.00	-20.07	peak
7	2412.000	56.95	-9.03	47.92	/	/	Fundamental

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

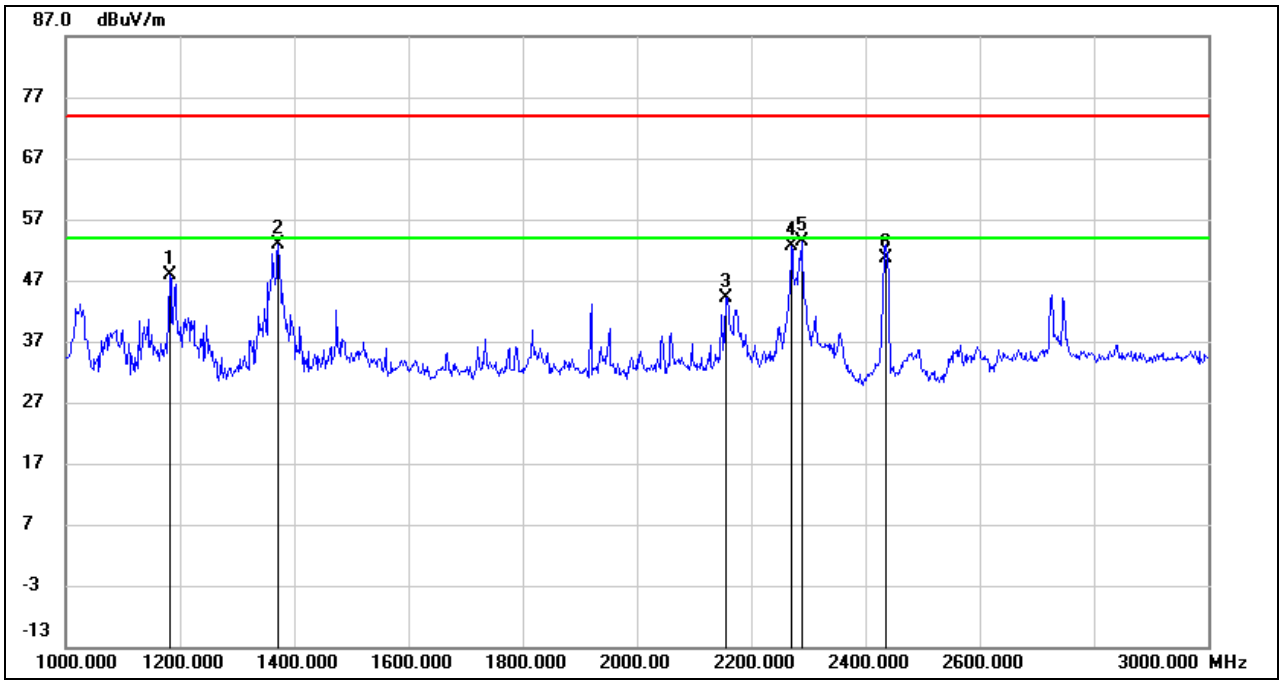

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1183.000	61.87	-13.89	47.98	74.00	-26.02	peak
2	1372.000	66.19	-13.26	52.93	74.00	-21.07	peak
3	2157.000	54.37	-10.17	44.20	74.00	-29.80	peak
4	2271.000	62.34	-9.60	52.74	74.00	-21.26	peak
5	2289.000	62.82	-9.53	53.29	74.00	-20.71	peak
6	2437.000	59.65	-8.98	50.67	/	/	Fundamental

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

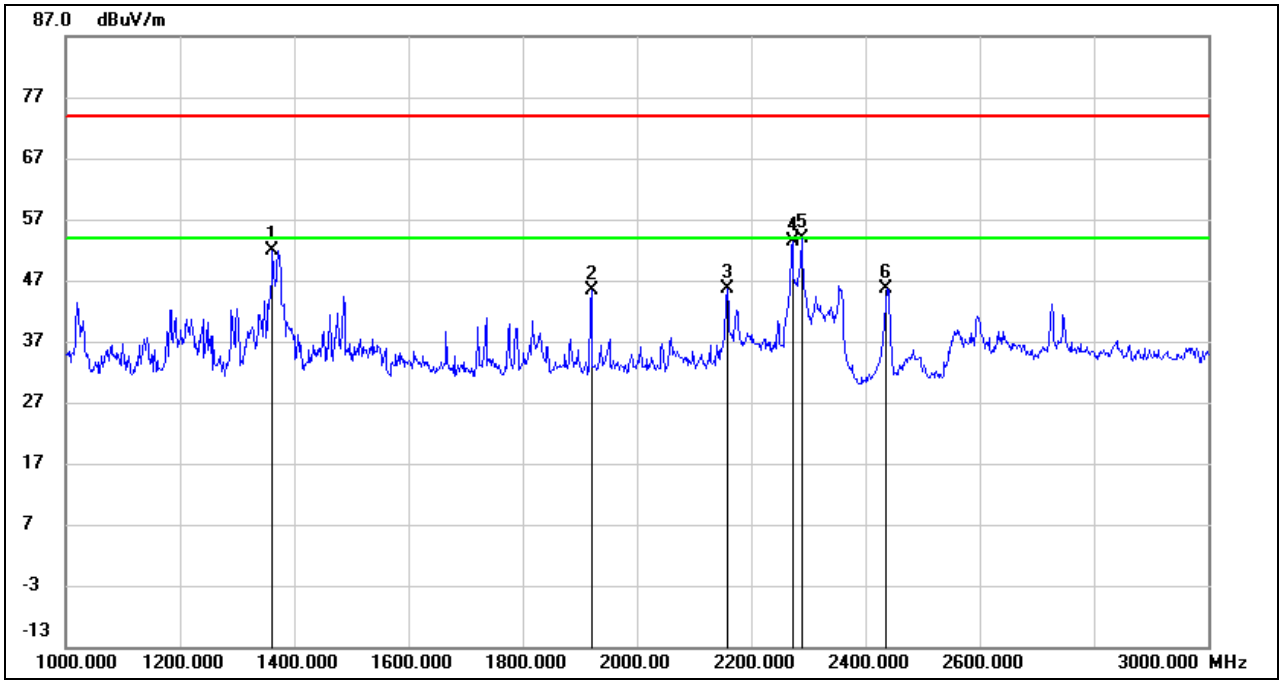

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1363.000	65.19	-13.28	51.91	74.00	-22.09	peak
2	1920.000	56.41	-11.02	45.39	74.00	-28.61	peak
3	2158.000	55.80	-10.16	45.64	74.00	-28.36	peak
4	2272.000	63.05	-9.59	53.46	74.00	-20.54	peak
5	2288.000	63.29	-9.53	53.76	74.00	-20.24	peak
6	2437.000	54.64	-8.98	45.66	/	/	Fundamental

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

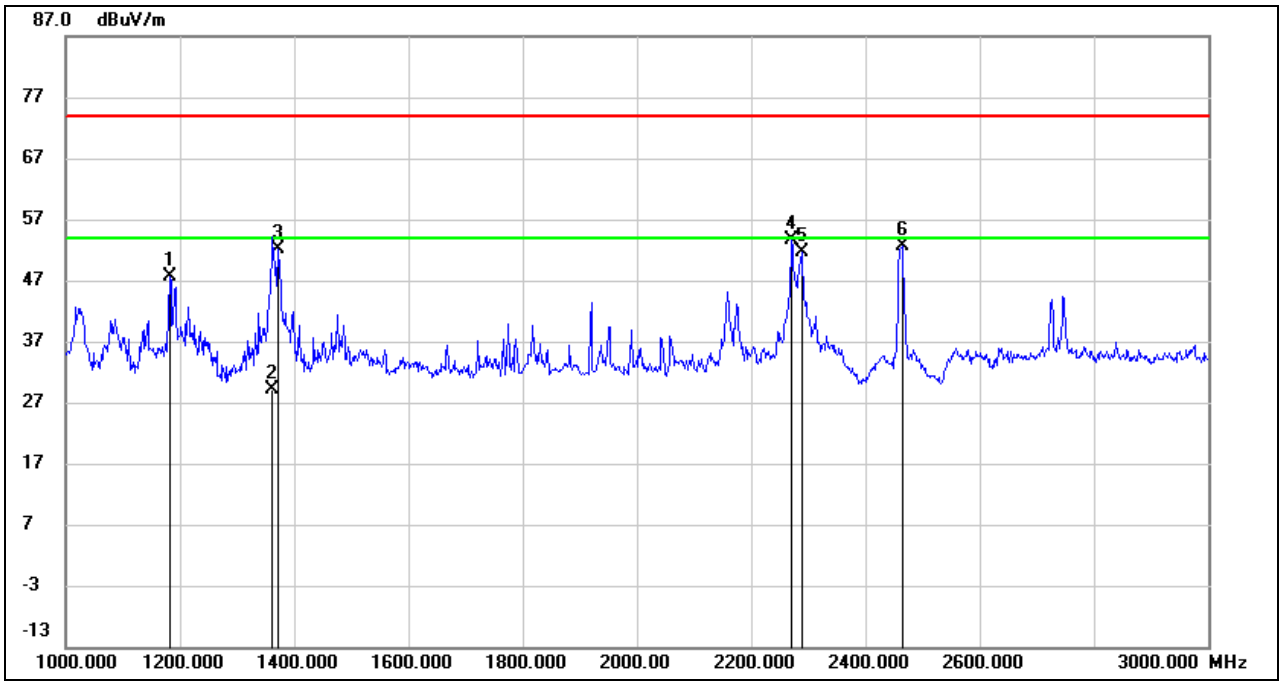

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1183.000	61.58	-13.89	47.69	74.00	-26.31	peak
2	1363.000	42.41	-13.28	29.13	54.00	-24.87	AVG
3	1373.000	65.32	-13.25	52.07	74.00	-21.93	peak
4	2271.000	63.15	-9.60	53.55	74.00	-20.45	peak
5	2289.000	61.04	-9.53	51.51	74.00	-22.49	peak
6	2462.000	61.45	-8.90	52.55	/	/	Fundamental

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

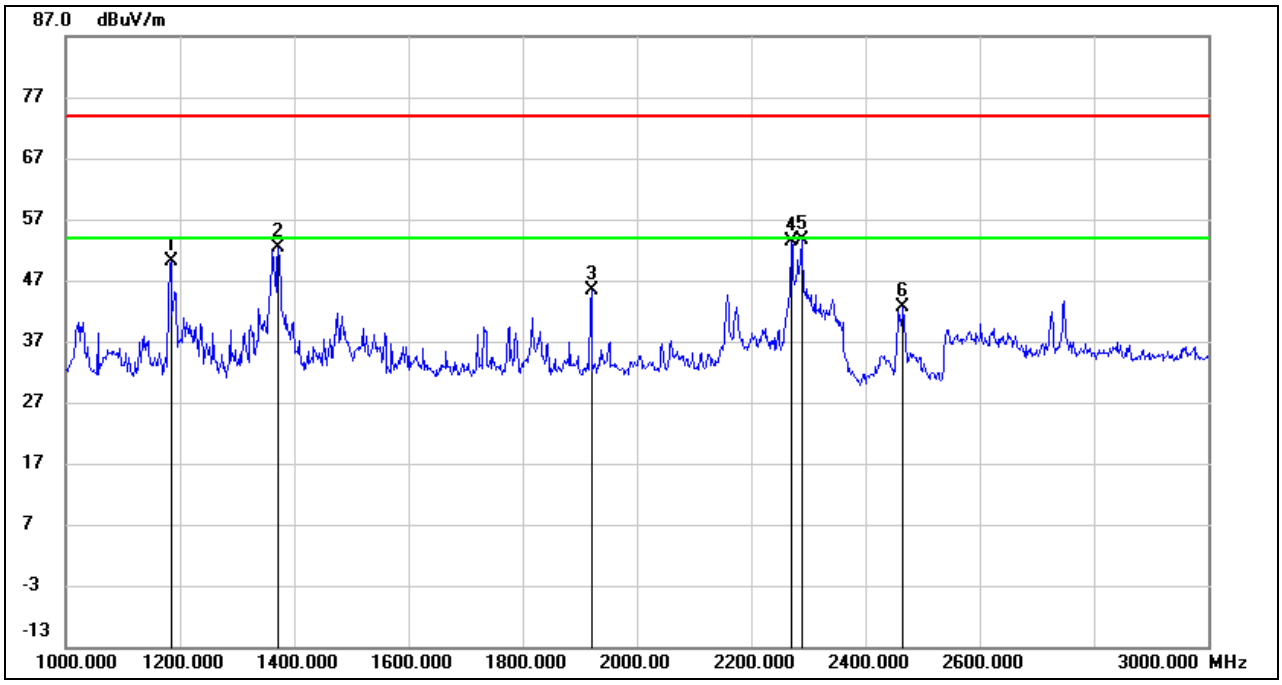

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1184.000	63.91	-13.87	50.04	74.00	-23.96	peak
2	1373.000	65.73	-13.25	52.48	74.00	-21.52	peak
3	1920.000	56.31	-11.02	45.29	74.00	-28.71	peak
4	2271.000	62.96	-9.60	53.36	74.00	-20.64	peak
5	2289.000	63.08	-9.53	53.55	74.00	-20.45	peak
6	2462.000	51.66	-8.91	42.75	/	/	Fundamental

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.5. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) - PAC-A-302111

7.5.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

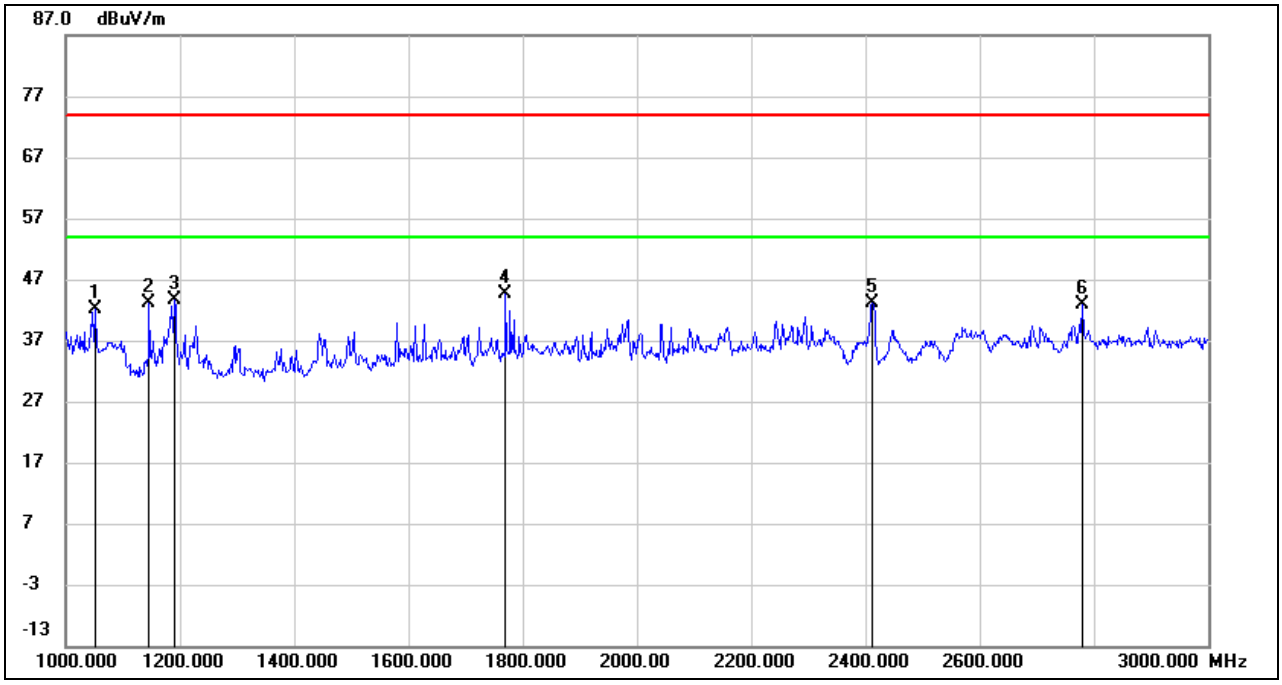

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1053.000	56.86	-14.73	42.13	74.00	-31.87	peak
2	1147.000	57.26	-14.12	43.14	74.00	-30.86	peak
3	1190.000	57.35	-13.83	43.52	74.00	-30.48	peak
4	1770.000	55.58	-10.95	44.63	74.00	-29.37	peak
5	2412.000	52.08	-9.04	43.04	/	/	Fundamental
6	2781.000	50.69	-7.78	42.91	74.00	-31.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

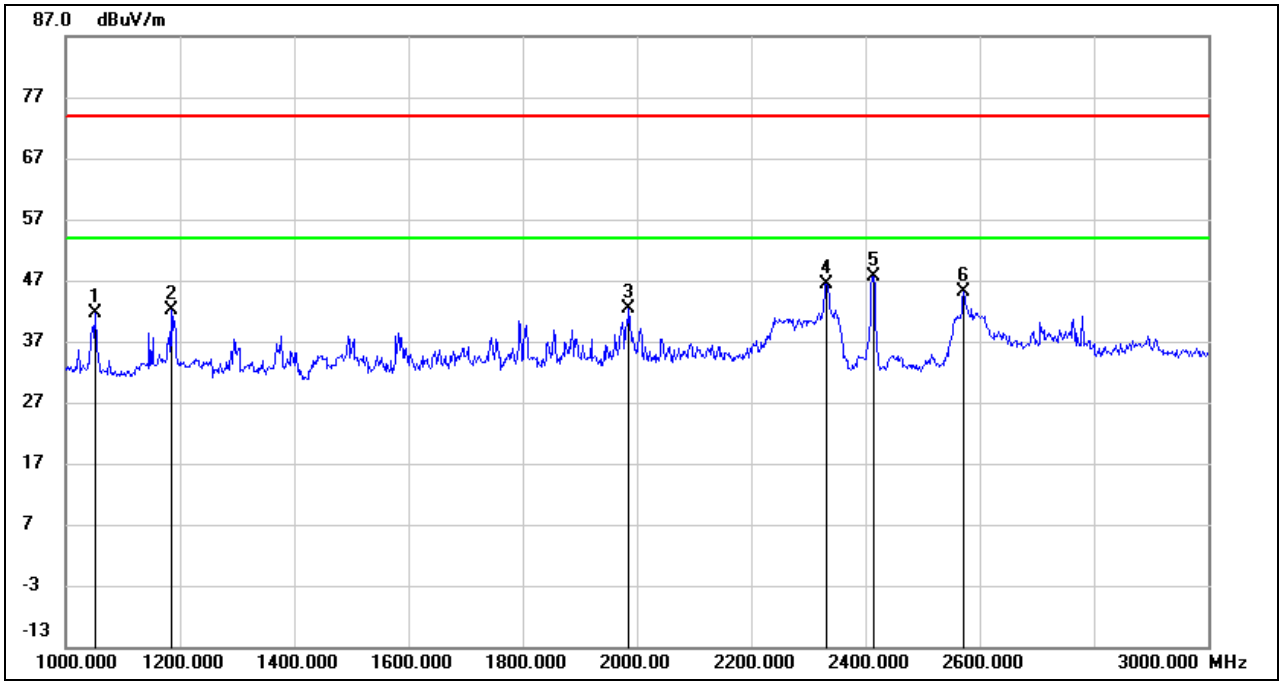

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1052.000	56.39	-14.74	41.65	74.00	-32.35	peak
2	1184.000	55.94	-13.87	42.07	74.00	-31.93	peak
3	1986.000	53.44	-11.16	42.28	74.00	-31.72	peak
4	2333.000	55.80	-9.34	46.46	74.00	-27.54	peak
5	2412.000	56.77	-9.03	47.74	/	/	Fundamental
6	2573.000	53.72	-8.69	45.03	74.00	-28.97	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.6. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) - PAC-A-405411

7.6.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

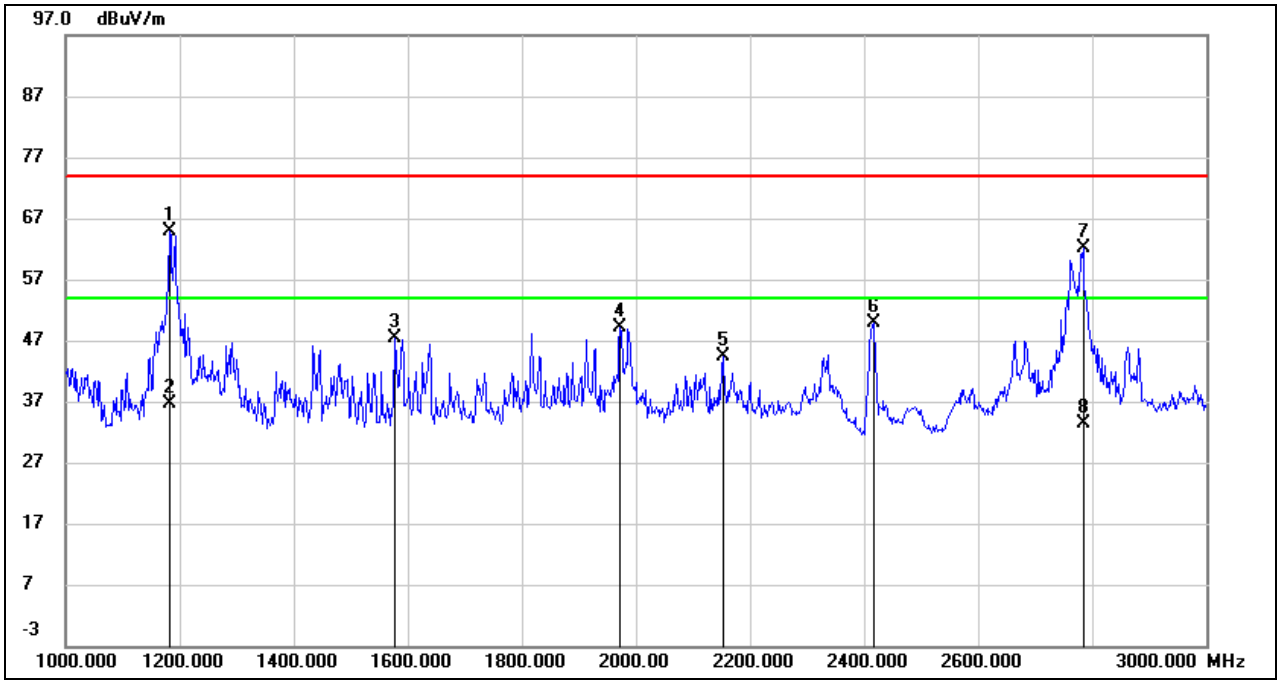

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1182.000	77.40	-12.47	64.93	74.00	-9.07	peak
2	1182.000	49.17	-12.47	36.70	54.00	-17.30	AVG
3	1578.000	58.57	-11.11	47.46	74.00	-26.54	peak
4	1972.000	59.20	-10.02	49.18	74.00	-24.82	peak
5	2152.000	53.46	-9.17	44.29	74.00	-29.71	peak
6	2416.000	57.53	-7.57	49.96	74.00	-24.04	peak
7	2784.000	69.07	-6.84	62.23	74.00	-11.77	peak
8	2784.000	40.24	-6.84	33.40	54.00	-20.60	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

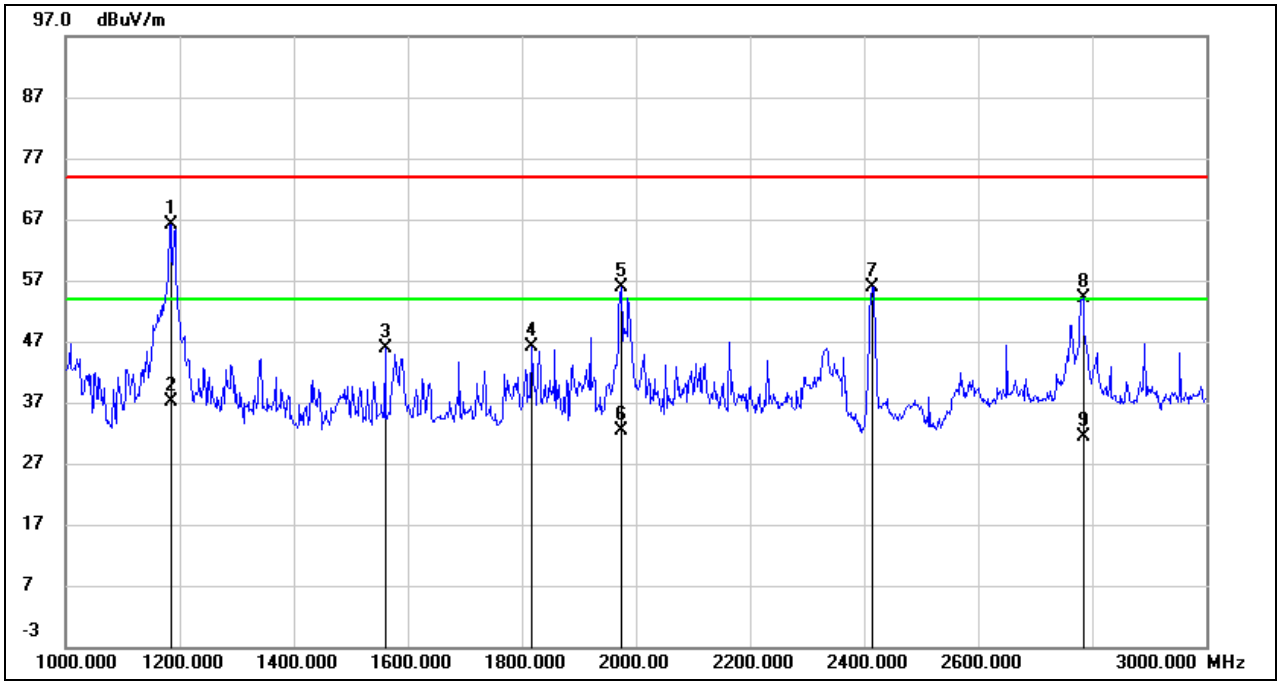

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1184.000	78.21	-11.98	66.23	74.00	-7.77	peak
2	1184.000	49.08	-11.98	37.10	54.00	-16.90	AVG
3	1560.000	56.98	-11.01	45.97	74.00	-28.03	peak
4	1818.000	55.62	-9.48	46.14	74.00	-27.86	peak
5	1974.000	65.11	-9.16	55.95	74.00	-18.05	peak
6	1974.000	41.66	-9.16	32.50	54.00	-21.50	AVG
7	2414.000	62.60	-6.74	55.86	74.00	-18.14	peak
8	2784.000	59.94	-5.76	54.18	74.00	-19.82	peak
9	2784.000	37.06	-5.76	31.30	54.00	-22.70	AVG

V

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.7. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) - PAC-A-200110

7.7.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

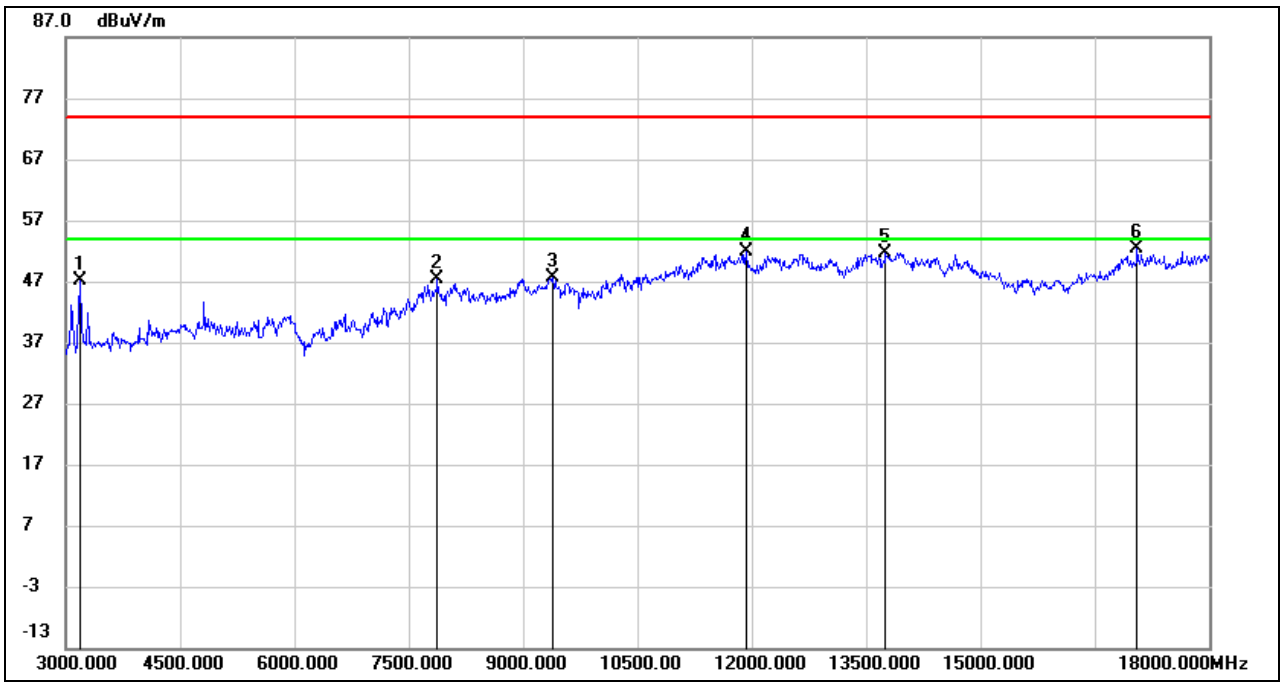

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	52.29	-5.28	47.01	74.00	-26.99	peak
2	7882.500	39.04	8.33	47.37	74.00	-26.63	peak
3	9390.000	36.78	10.73	47.51	74.00	-26.49	peak
4	11932.500	34.66	17.25	51.91	74.00	-22.09	peak
5	13755.000	32.24	19.46	51.70	74.00	-22.30	peak
6	17055.000	32.42	20.01	52.43	74.00	-21.57	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

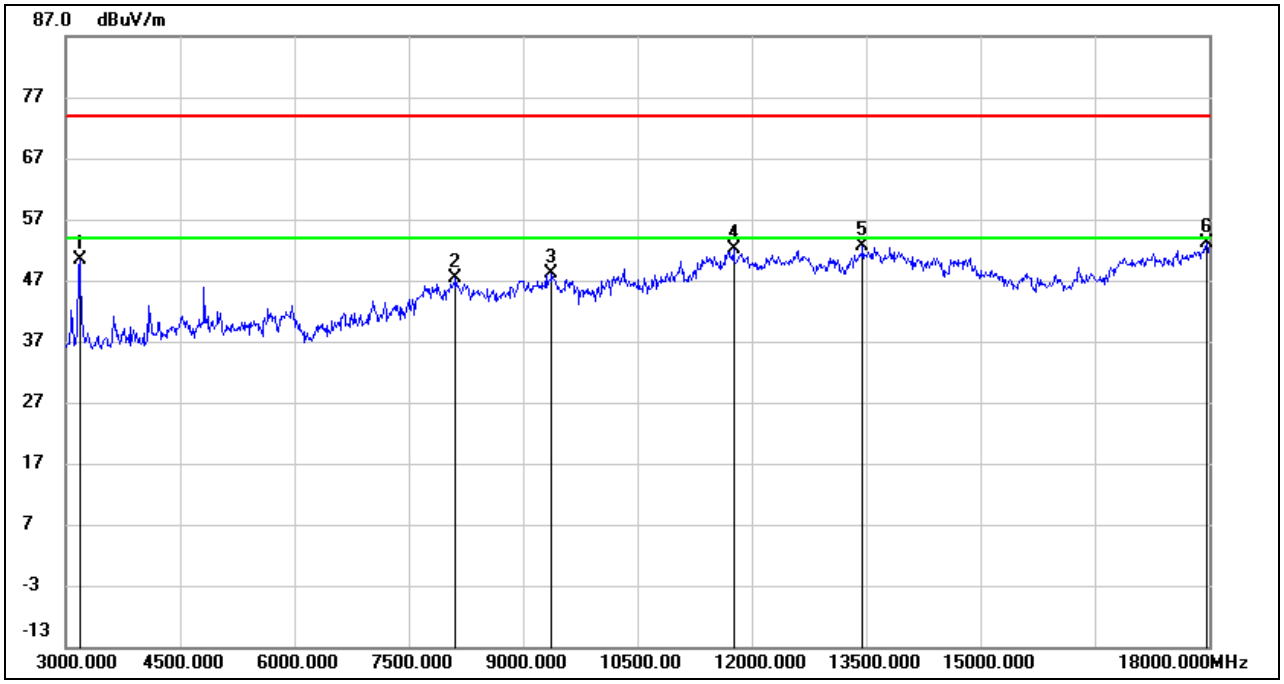

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3180.000	55.57	-5.16	50.41	74.00	-23.59	peak
2	8115.000	37.86	9.50	47.36	74.00	-26.64	peak
3	9382.500	37.53	10.67	48.20	74.00	-25.80	peak
4	11767.500	35.03	17.02	52.05	74.00	-21.95	peak
5	13462.500	33.62	19.11	52.73	74.00	-21.27	peak
6	17970.000	28.39	24.77	53.16	74.00	-20.84	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

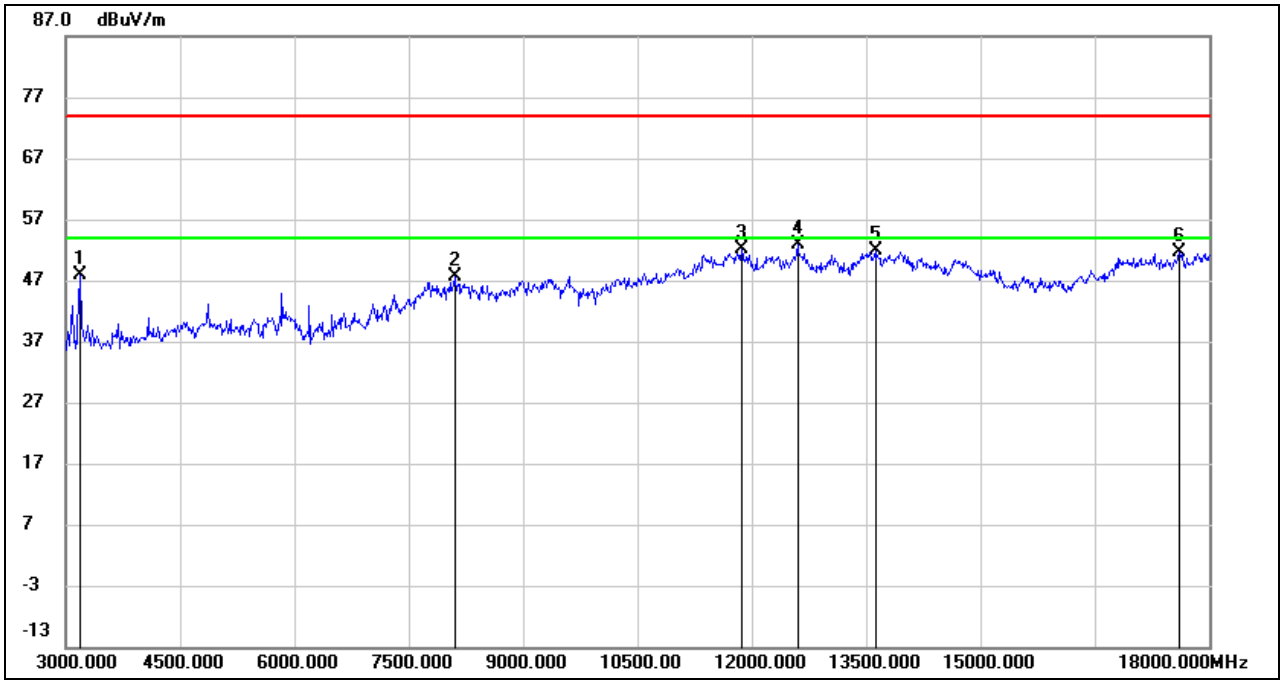

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	53.10	-5.28	47.82	74.00	-26.18	peak
2	8107.500	38.16	9.53	47.69	74.00	-26.31	peak
3	11872.500	34.84	17.17	52.01	74.00	-21.99	peak
4	12600.000	35.70	17.12	52.82	74.00	-21.18	peak
5	13620.000	32.65	19.12	51.77	74.00	-22.23	peak
6	17610.000	29.22	22.41	51.63	74.00	-22.37	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

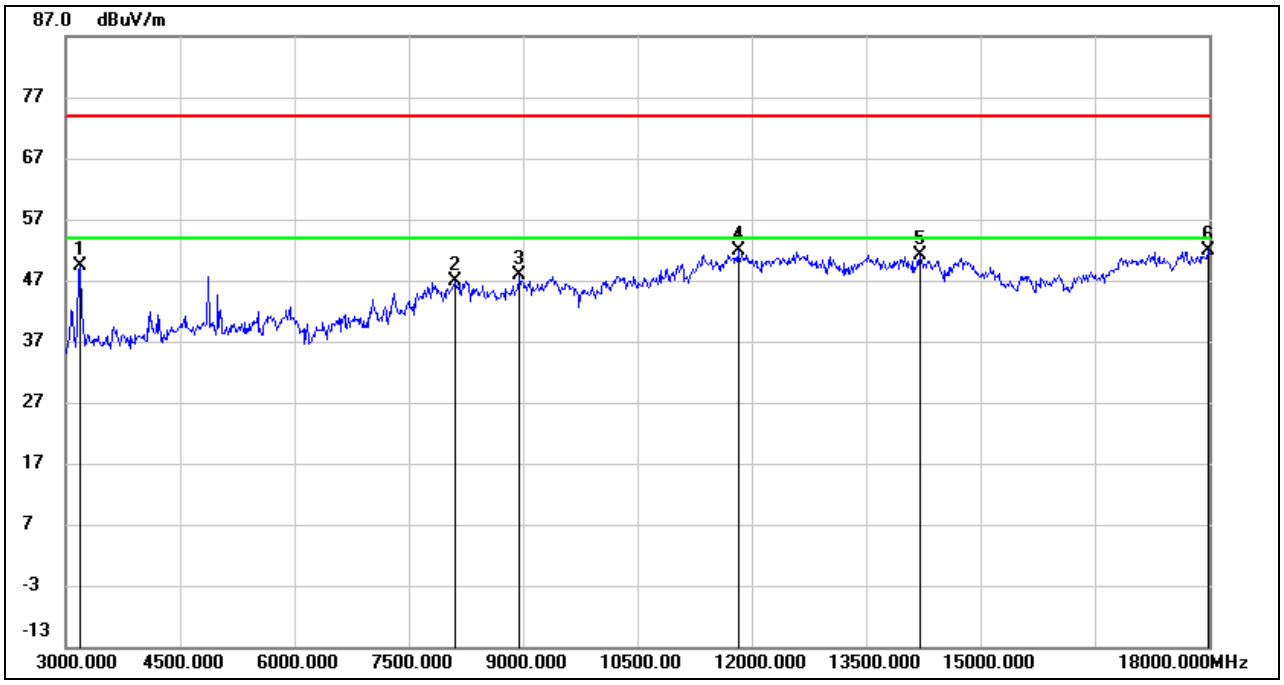

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	54.65	-5.28	49.37	74.00	-24.63	peak
2	8115.000	37.42	9.50	46.92	74.00	-27.08	peak
3	8962.500	37.78	10.04	47.82	74.00	-26.18	peak
4	11827.500	34.88	17.05	51.93	74.00	-22.07	peak
5	14205.000	32.08	18.93	51.01	74.00	-22.99	peak
6	17992.500	27.08	24.92	52.00	74.00	-22.00	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

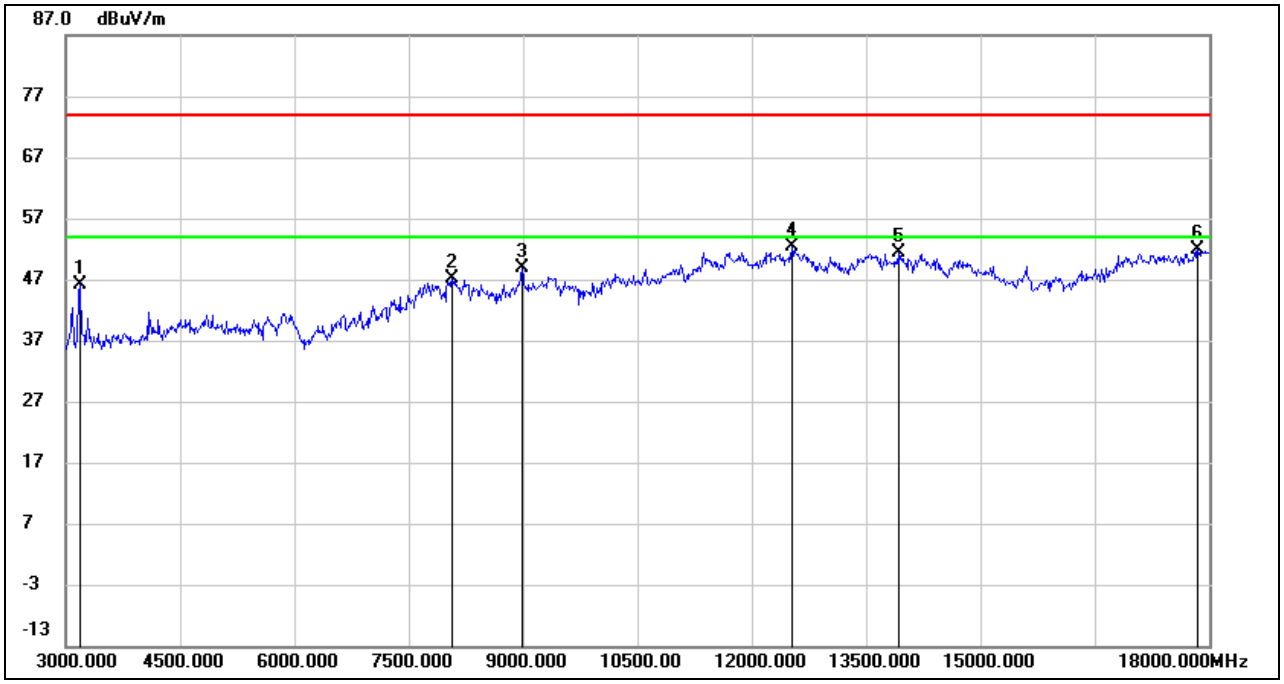

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3180.000	51.19	-5.16	46.03	74.00	-27.97	peak
2	8077.500	37.93	9.22	47.15	74.00	-26.85	peak
3	8992.500	38.16	10.62	48.78	74.00	-25.22	peak
4	12532.500	35.42	17.02	52.44	74.00	-21.56	peak
5	13920.000	32.18	19.30	51.48	74.00	-22.52	peak
6	17857.500	27.58	24.26	51.84	74.00	-22.16	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

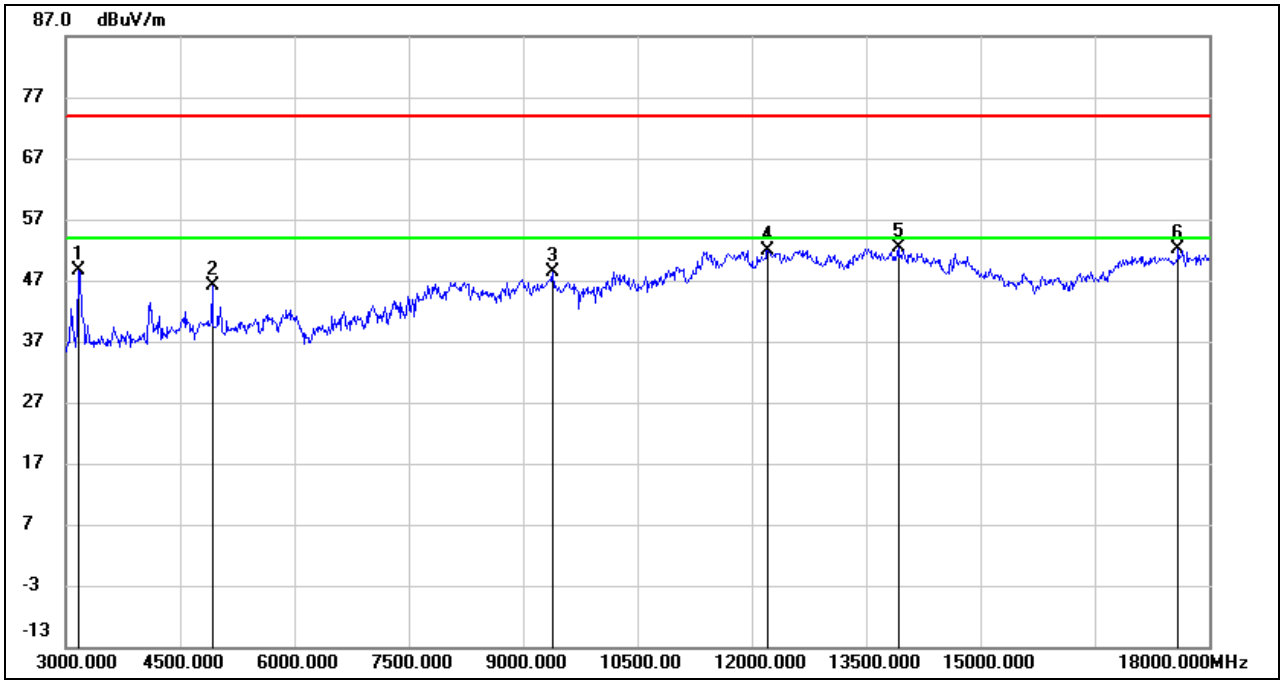

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3172.500	53.78	-5.11	48.67	74.00	-25.33	peak
2	4920.000	45.93	0.12	46.05	74.00	-27.95	peak
3	9390.000	37.56	10.73	48.29	74.00	-25.71	peak
4	12217.500	34.42	17.51	51.93	74.00	-22.07	peak
5	13920.000	33.11	19.30	52.41	74.00	-21.59	peak
6	17595.000	29.83	22.26	52.09	74.00	-21.91	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.7.2. 802.11g MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

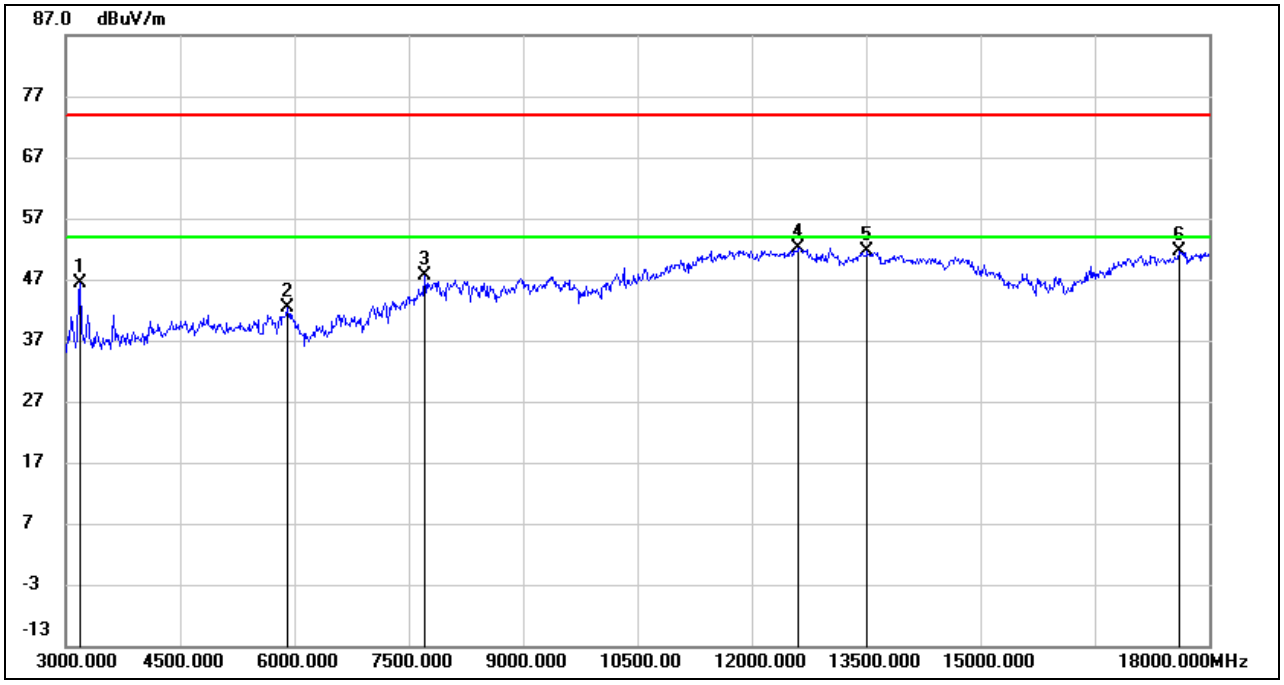

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	51.72	-5.28	46.44	74.00	-27.56	peak
2	5917.500	39.03	3.33	42.36	74.00	-31.64	peak
3	7717.500	39.79	7.95	47.74	74.00	-26.26	peak
4	12622.500	35.02	17.10	52.12	74.00	-21.88	peak
5	13522.500	32.49	19.18	51.67	74.00	-22.33	peak
6	17617.500	29.13	22.48	51.61	74.00	-22.39	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

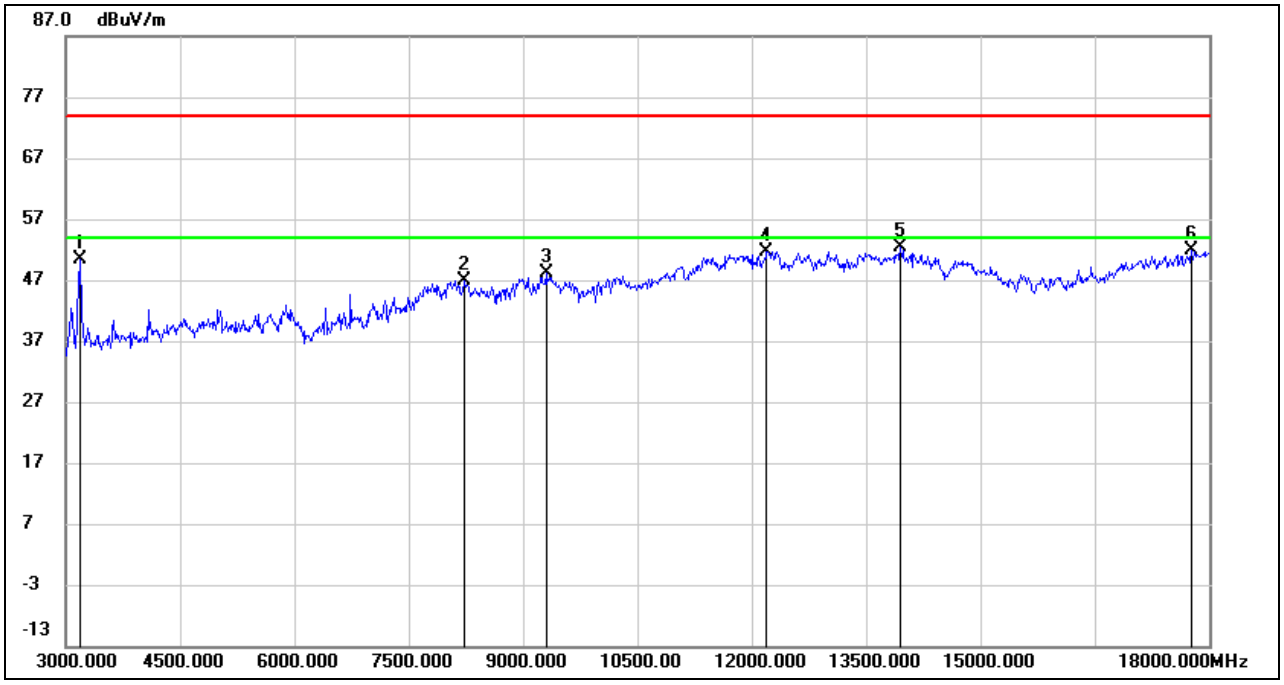

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	55.63	-5.28	50.35	74.00	-23.65	peak
2	8235.000	37.81	9.12	46.93	74.00	-27.07	peak
3	9300.000	37.89	10.14	48.03	74.00	-25.97	peak
4	12202.500	34.20	17.49	51.69	74.00	-22.31	peak
5	13950.000	33.06	19.33	52.39	74.00	-21.61	peak
6	17775.000	27.87	23.98	51.85	74.00	-22.15	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

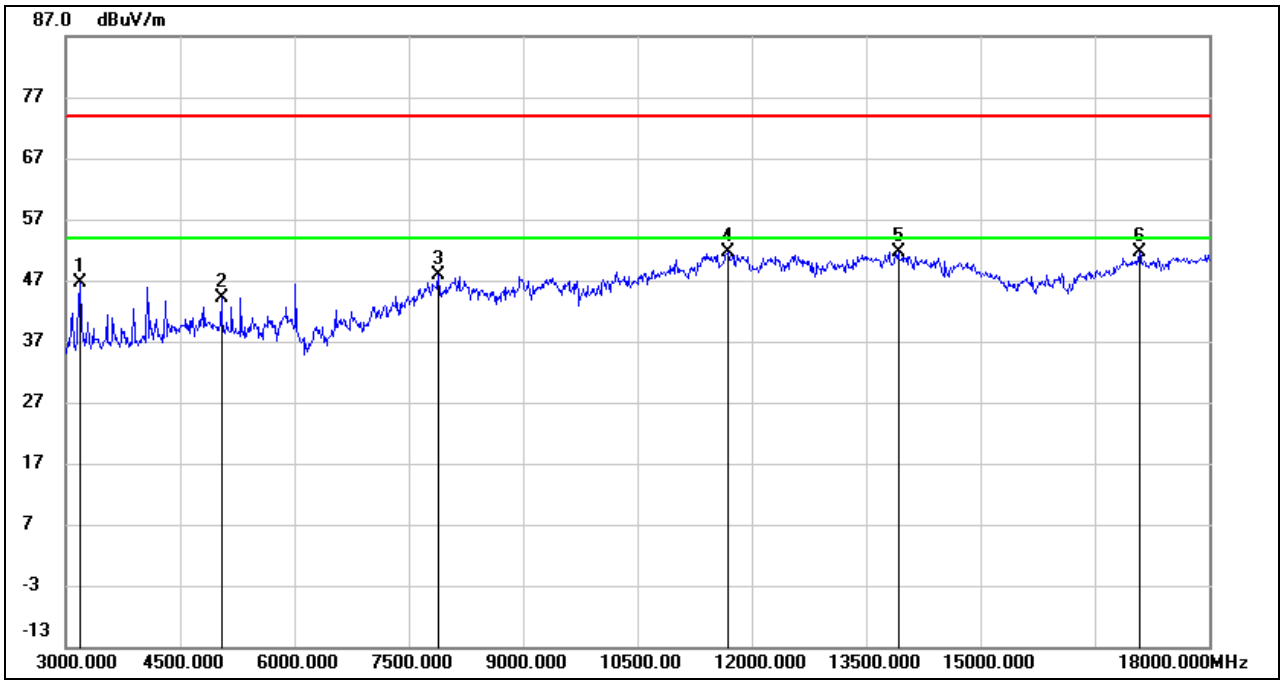

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	51.90	-5.28	46.62	74.00	-27.38	peak
2	5040.000	43.51	0.66	44.17	74.00	-29.83	peak
3	7890.000	39.52	8.28	47.80	74.00	-26.20	peak
4	11692.500	34.52	17.06	51.58	74.00	-22.42	peak
5	13927.500	32.34	19.31	51.65	74.00	-22.35	peak
6	17092.500	31.25	20.34	51.59	74.00	-22.41	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

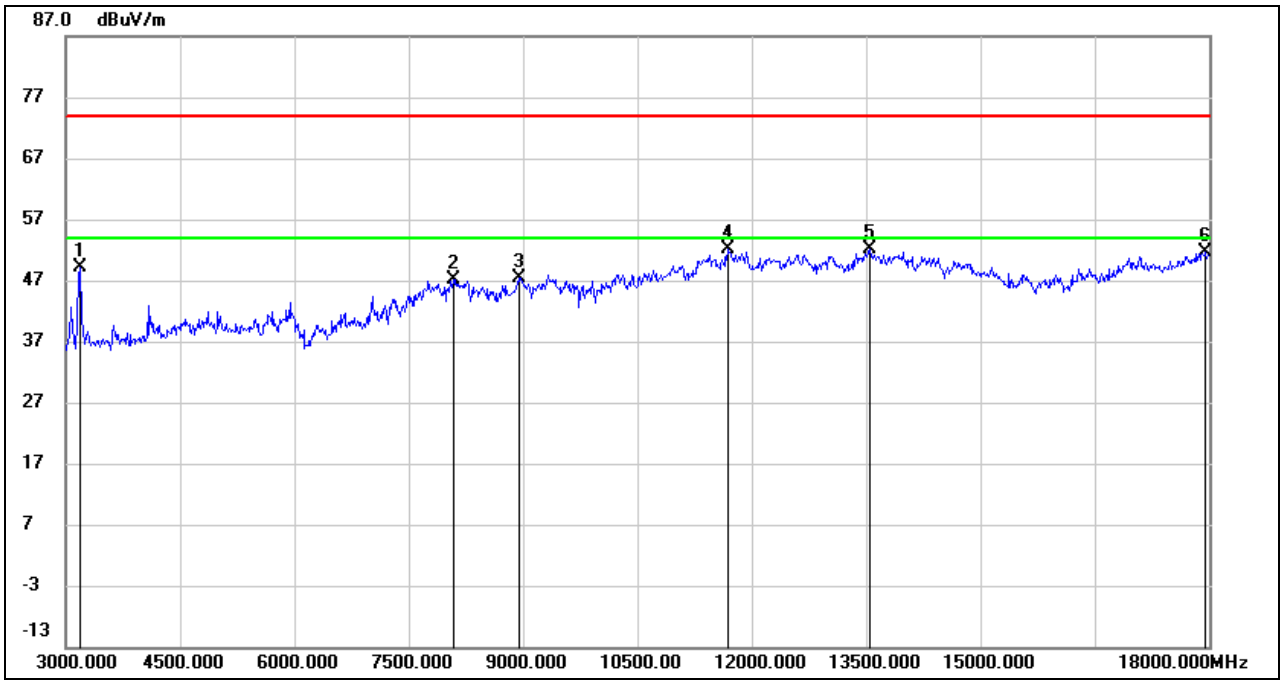

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	54.48	-5.28	49.20	74.00	-24.80	peak
2	8085.000	37.79	9.33	47.12	74.00	-26.88	peak
3	8947.500	37.57	9.75	47.32	74.00	-26.68	peak
4	11685.000	35.15	17.02	52.17	74.00	-21.83	peak
5	13552.500	32.90	19.12	52.02	74.00	-21.98	peak
6	17955.000	27.04	24.67	51.71	74.00	-22.29	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

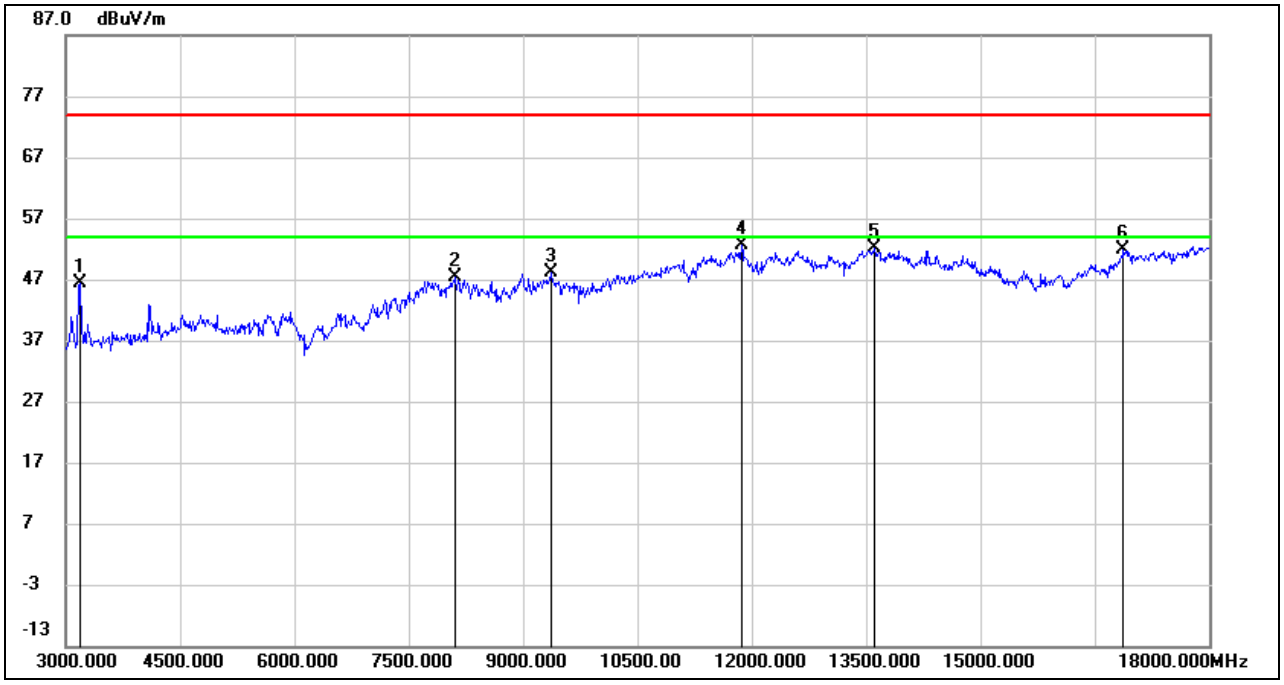

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	51.72	-5.28	46.44	74.00	-27.56	peak
2	8115.000	37.86	9.50	47.36	74.00	-26.64	peak
3	9367.500	37.45	10.58	48.03	74.00	-25.97	peak
4	11872.500	35.35	17.17	52.52	74.00	-21.48	peak
5	13605.000	32.96	19.06	52.02	74.00	-21.98	peak
6	16882.500	32.24	19.55	51.79	74.00	-22.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

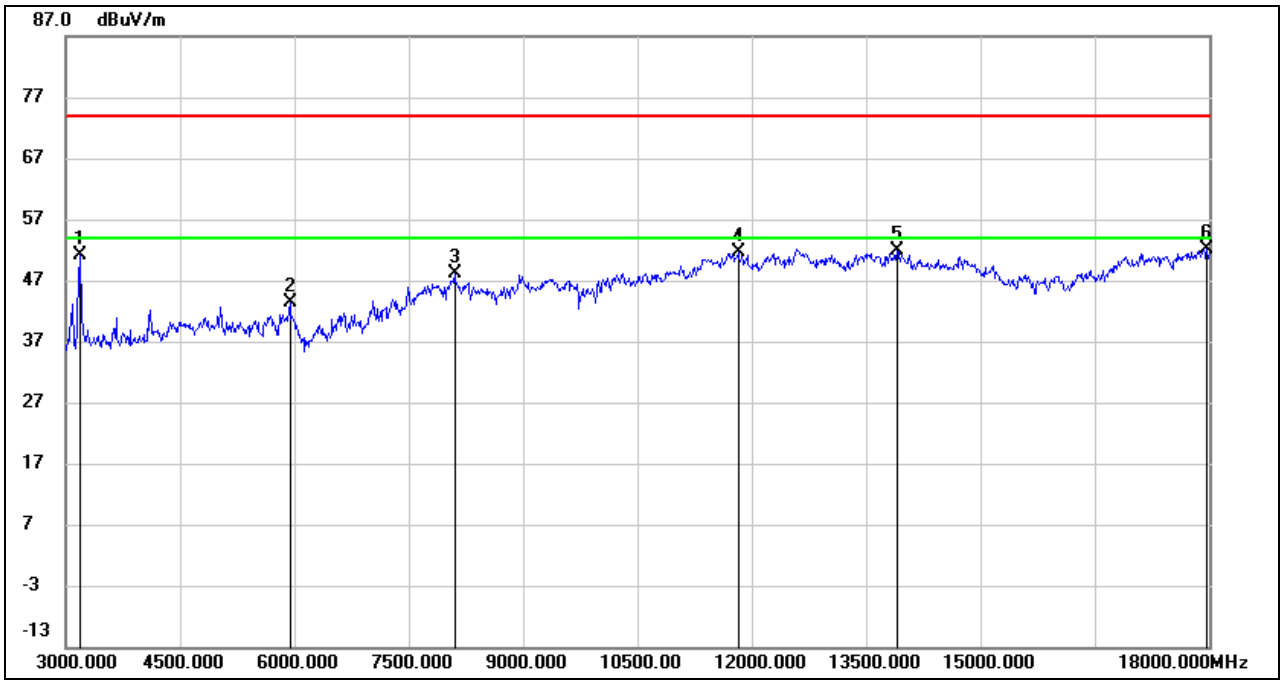

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	56.47	-5.28	51.19	74.00	-22.81	peak
2	5947.500	40.16	3.18	43.34	74.00	-30.66	peak
3	8107.500	38.61	9.53	48.14	74.00	-25.86	peak
4	11820.000	34.61	17.03	51.64	74.00	-22.36	peak
5	13912.500	32.52	19.29	51.81	74.00	-22.19	peak
6	17977.500	27.26	24.83	52.09	74.00	-21.91	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.7.3. 802.11n HT20 MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

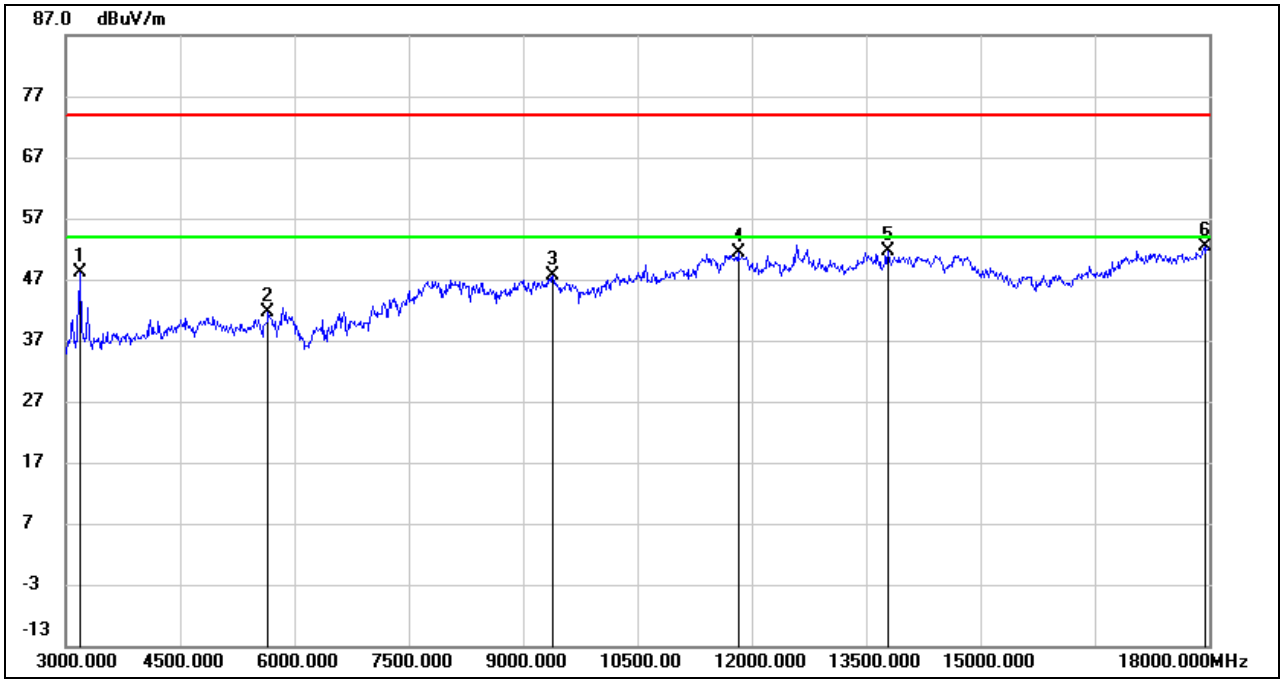

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	53.32	-5.28	48.04	74.00	-25.96	peak
2	5655.000	39.60	2.01	41.61	74.00	-32.39	peak
3	9390.000	36.96	10.73	47.69	74.00	-26.31	peak
4	11827.500	34.24	17.05	51.29	74.00	-22.71	peak
5	13785.000	32.24	19.44	51.68	74.00	-22.32	peak
6	17940.000	27.81	24.57	52.38	74.00	-21.62	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

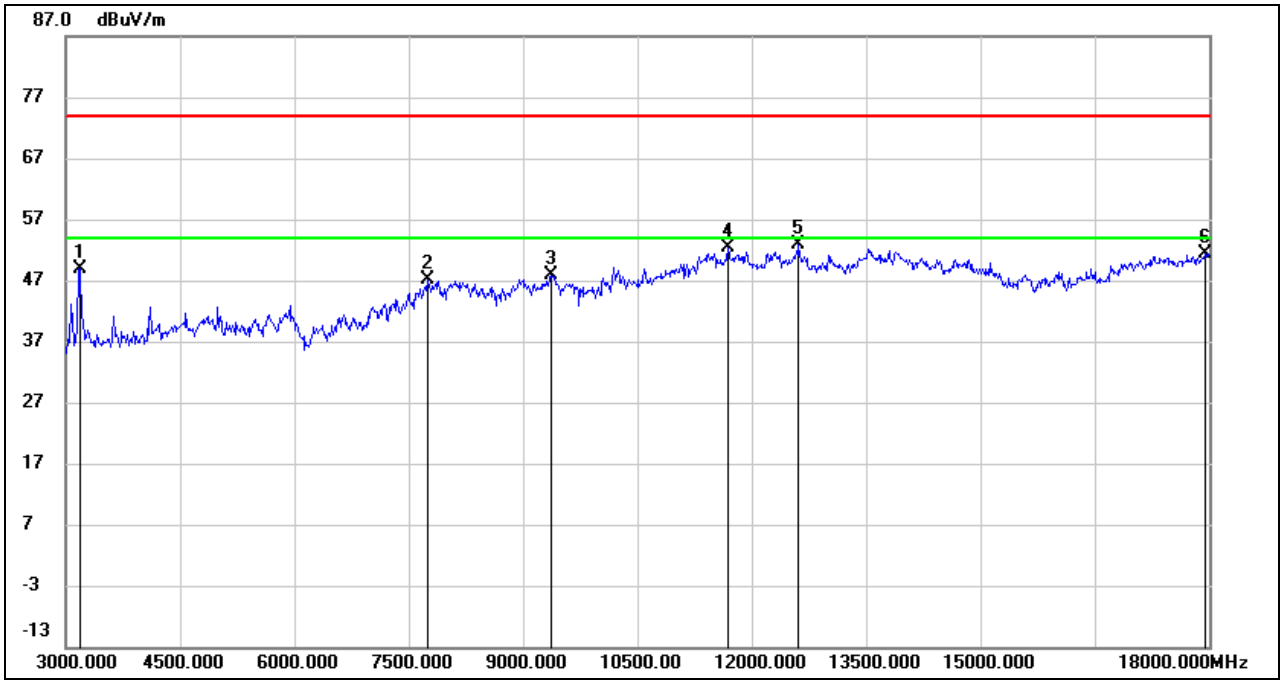

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3180.000	54.07	-5.16	48.91	74.00	-25.09	peak
2	7747.500	38.78	8.23	47.01	74.00	-26.99	peak
3	9360.000	37.36	10.54	47.90	74.00	-26.10	peak
4	11685.000	35.46	17.02	52.48	74.00	-21.52	peak
5	12615.000	35.74	17.10	52.84	74.00	-21.16	peak
6	17962.500	26.60	24.72	51.32	74.00	-22.68	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

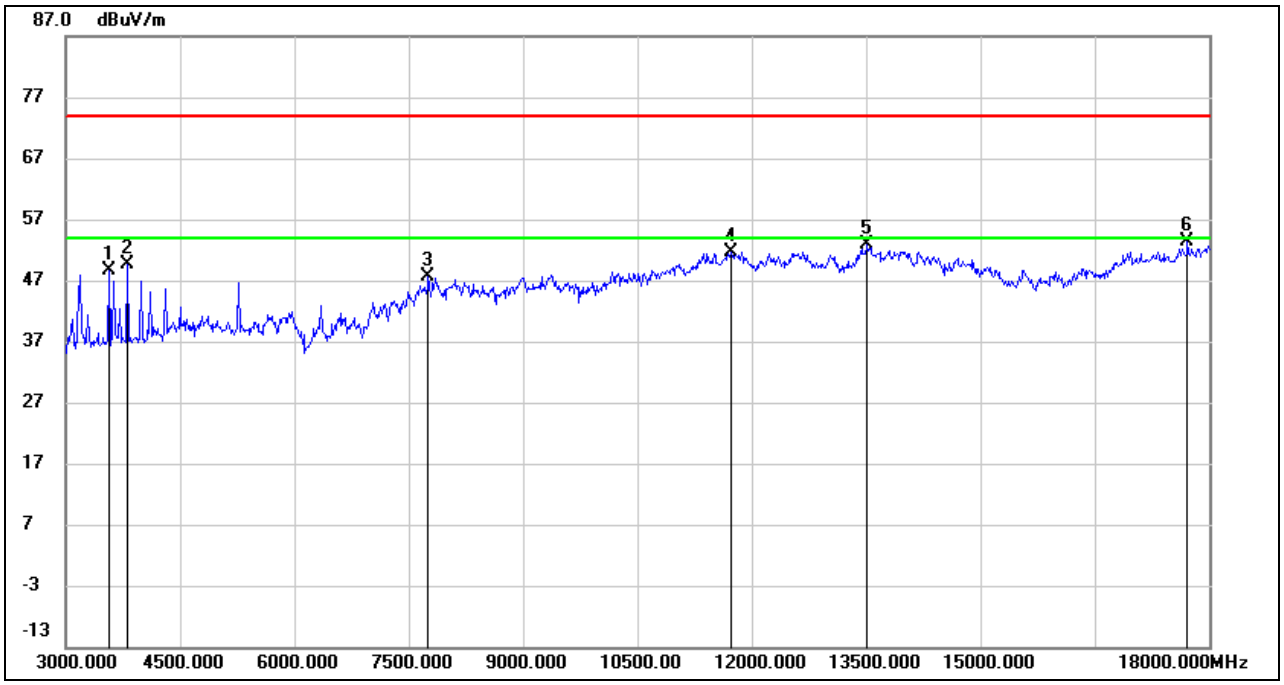

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3570.000	53.17	-4.46	48.71	74.00	-25.29	peak
2	3810.000	53.26	-3.65	49.61	74.00	-24.39	peak
3	7755.000	39.23	8.29	47.52	74.00	-26.48	peak
4	11730.000	34.59	17.07	51.66	74.00	-22.34	peak
5	13515.000	33.74	19.18	52.92	74.00	-21.08	peak
6	17715.000	29.85	23.46	53.31	74.00	-20.69	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

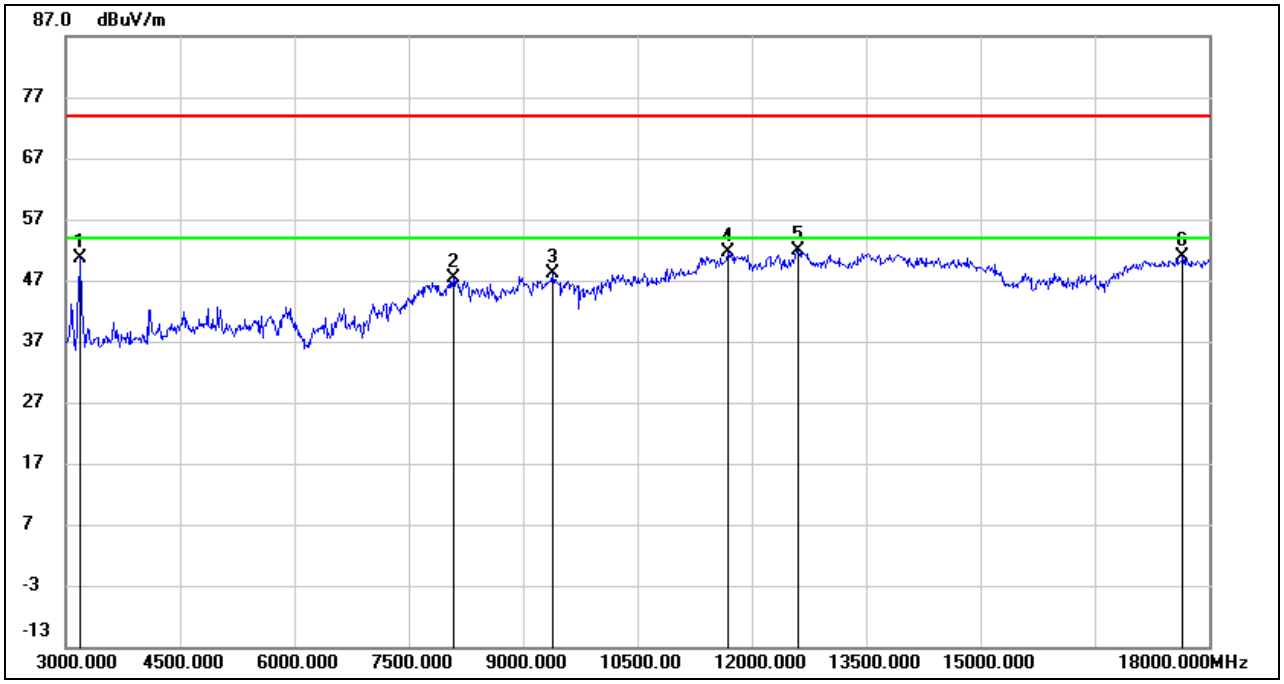

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	55.95	-5.28	50.67	74.00	-23.33	peak
2	8085.000	38.11	9.33	47.44	74.00	-26.56	peak
3	9390.000	37.36	10.73	48.09	74.00	-25.91	peak
4	11685.000	34.56	17.02	51.58	74.00	-22.42	peak
5	12622.500	34.77	17.10	51.87	74.00	-22.13	peak
6	17655.000	27.89	22.87	50.76	74.00	-23.24	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

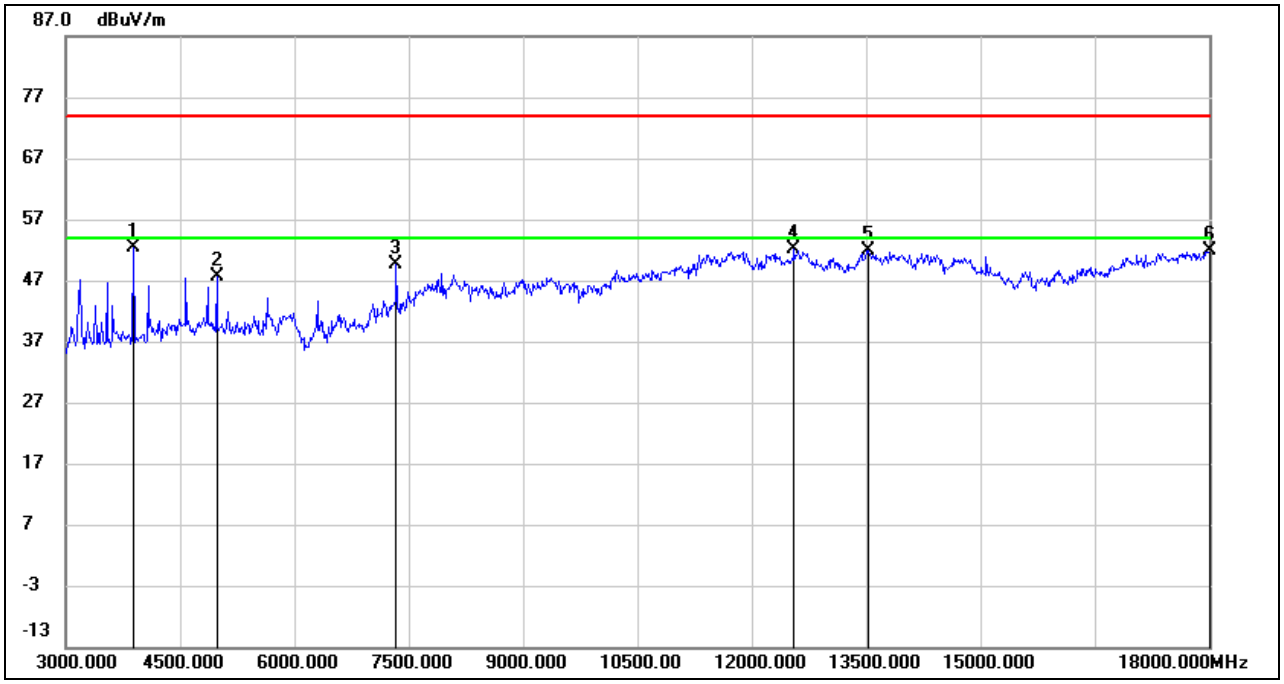

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3885.000	56.34	-3.92	52.42	74.00	-21.58	peak
2	4987.500	46.98	0.65	47.63	74.00	-26.37	peak
3	7335.000	43.05	6.61	49.66	74.00	-24.34	peak
4	12555.000	35.01	17.06	52.07	74.00	-21.93	peak
5	13537.500	32.84	19.15	51.99	74.00	-22.01	peak
6	18000.000	26.82	24.97	51.79	74.00	-22.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

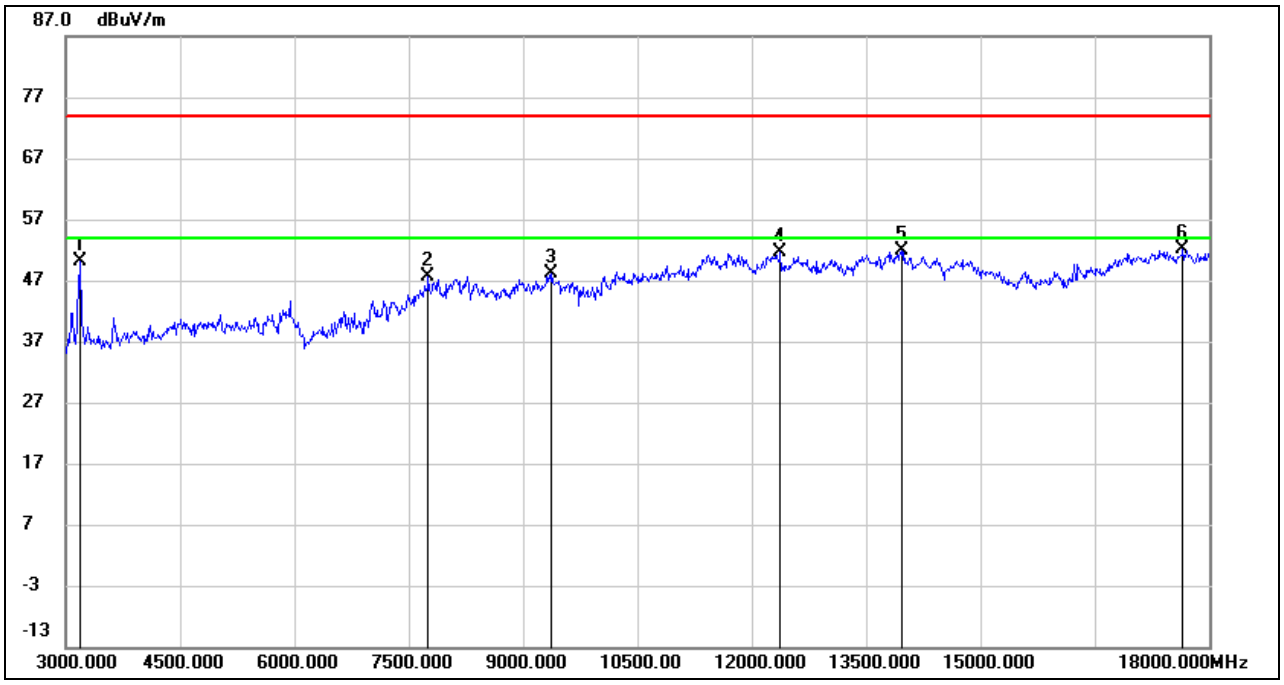

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3202.500	55.42	-5.28	50.14	74.00	-23.86	peak
2	7762.500	39.20	8.37	47.57	74.00	-26.43	peak
3	9375.000	37.46	10.63	48.09	74.00	-25.91	peak
4	12382.500	34.14	17.37	51.51	74.00	-22.49	peak
5	13972.500	32.54	19.34	51.88	74.00	-22.12	peak
6	17662.500	29.17	22.95	52.12	74.00	-21.88	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.8. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) - PAC-A-302111

7.8.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

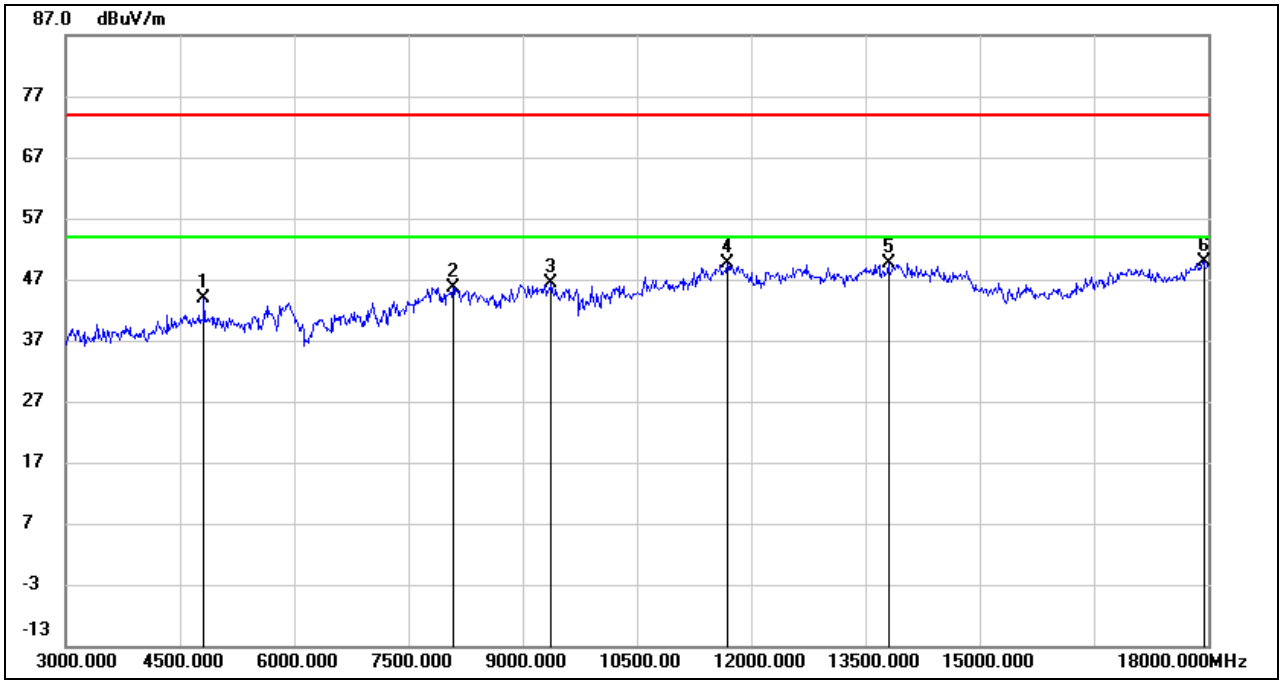

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4822.500	43.66	0.11	43.77	74.00	-30.23	peak
2	8085.000	36.33	9.33	45.66	74.00	-28.34	peak
3	9375.000	35.75	10.63	46.38	74.00	-27.62	peak
4	11685.000	32.73	17.02	49.75	74.00	-24.25	peak
5	13807.500	30.33	19.42	49.75	74.00	-24.25	peak
6	17940.000	25.42	24.57	49.99	74.00	-24.01	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

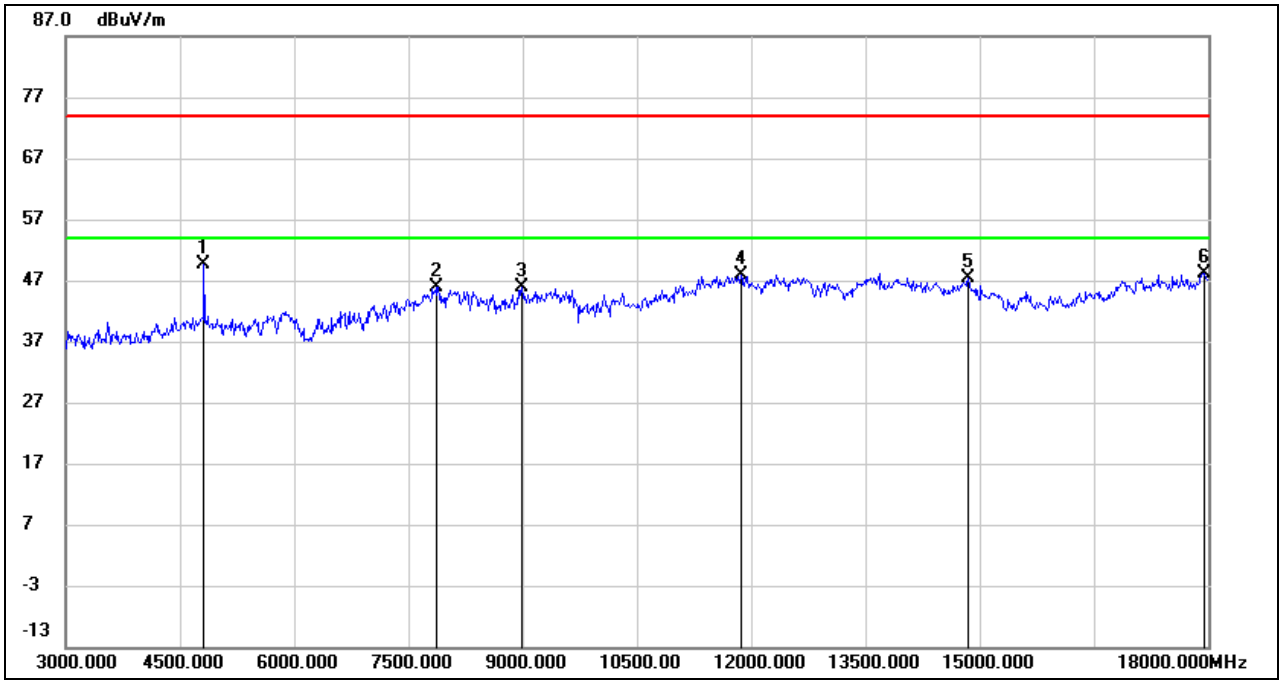

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4822.500	49.49	0.11	49.60	74.00	-24.40	peak
2	7875.000	37.54	8.35	45.89	74.00	-28.11	peak
3	8985.000	35.37	10.48	45.85	74.00	-28.15	peak
4	11865.000	30.81	17.14	47.95	74.00	-26.05	peak
5	14850.000	30.21	17.10	47.31	74.00	-26.69	peak
6	17955.000	23.54	24.67	48.21	74.00	-25.79	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.9. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) - PAC-A-405411

7.9.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

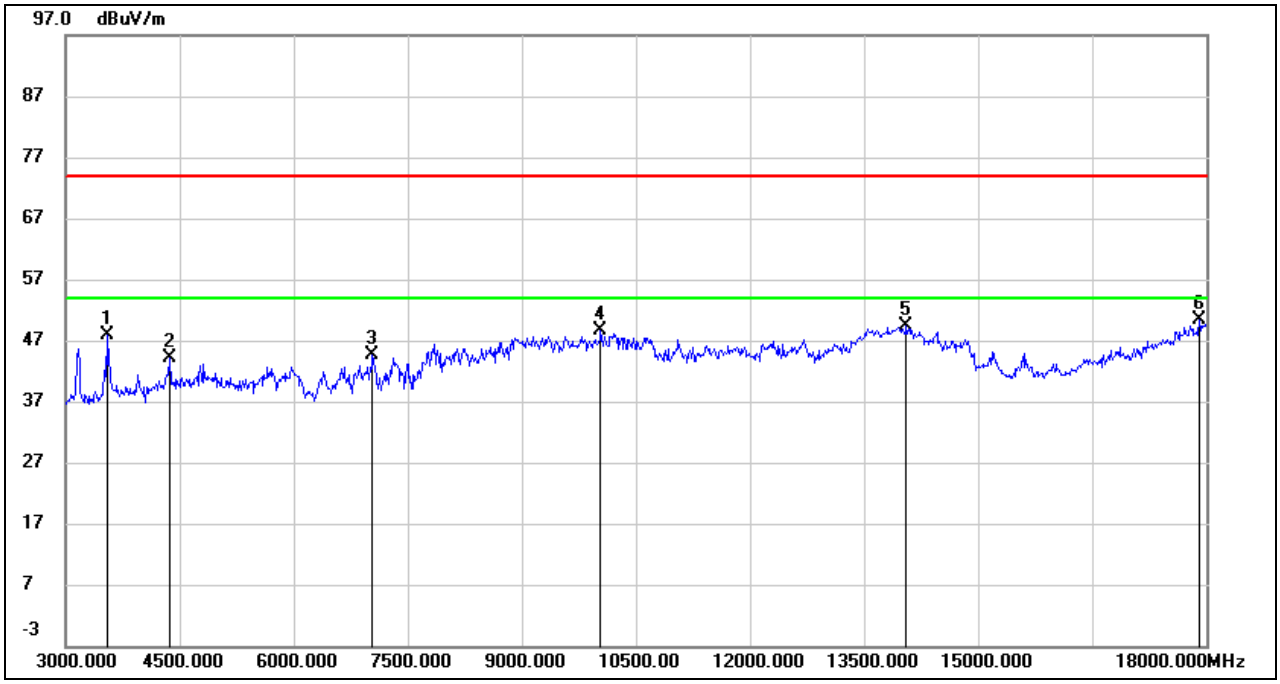

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3540.000	51.38	-3.59	47.79	74.00	-26.21	peak
2	4365.000	45.03	-1.02	44.01	74.00	-29.99	peak
3	7035.000	37.24	7.39	44.63	74.00	-29.37	peak
4	10035.000	35.99	12.55	48.54	74.00	-25.46	peak
5	14055.000	26.88	22.51	49.39	74.00	-24.61	peak
6	17910.000	22.57	27.86	50.43	74.00	-23.57	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

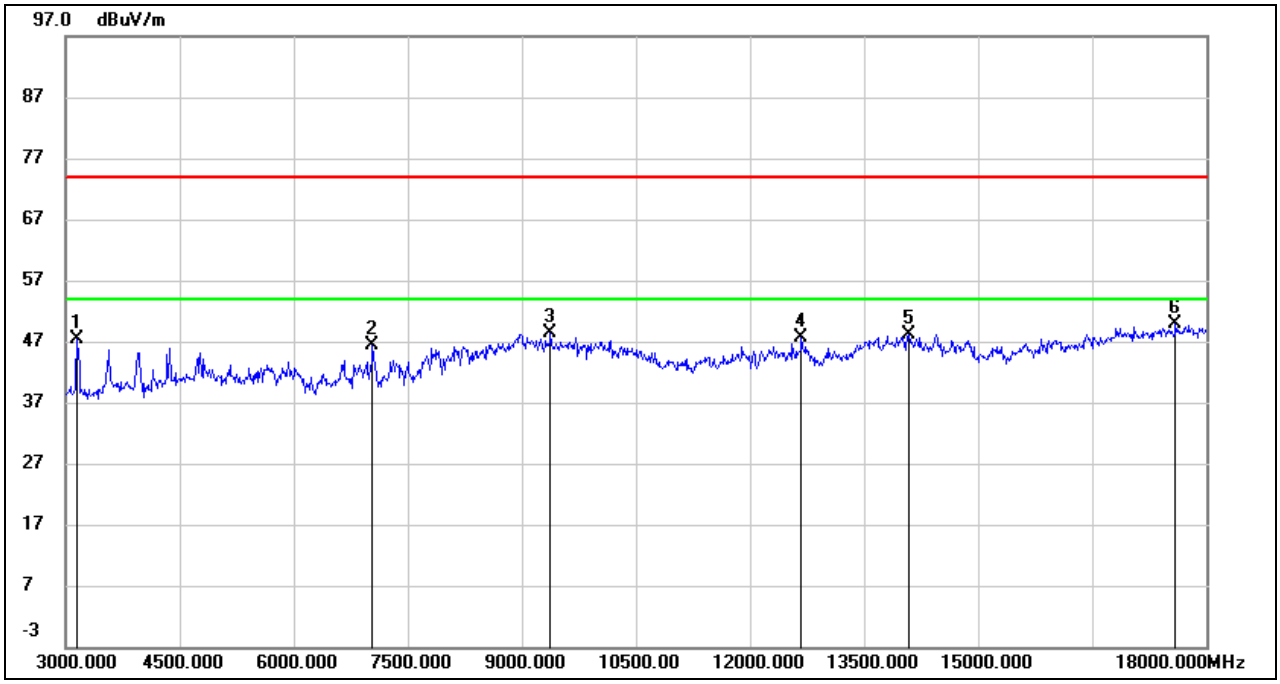

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3150.000	50.41	-3.11	47.30	74.00	-26.70	peak
2	7035.000	38.12	8.26	46.38	74.00	-27.62	peak
3	9375.000	37.66	10.60	48.26	74.00	-25.74	peak
4	12675.000	30.56	17.17	47.73	74.00	-26.27	peak
5	14085.000	27.15	21.05	48.20	74.00	-25.80	peak
6	17595.000	25.13	24.64	49.77	74.00	-24.23	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.10. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

7.10.1. 802.11b MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

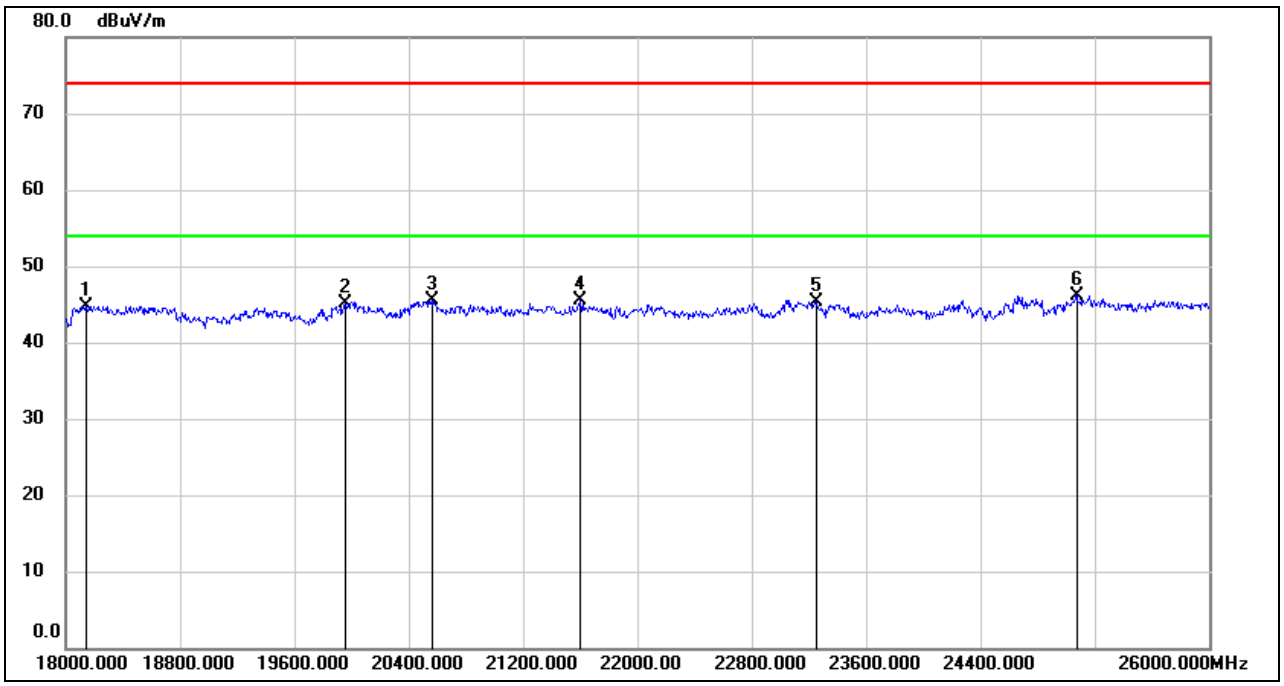

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	19952.000	50.46	-5.41	45.05	74.00	-28.95	peak
3	20560.000	50.73	-5.30	45.43	74.00	-28.57	peak
4	21600.000	50.02	-4.54	45.48	74.00	-28.52	peak
5	23256.000	48.72	-3.35	45.37	74.00	-28.63	peak
6	25072.000	48.17	-1.97	46.20	74.00	-27.80	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

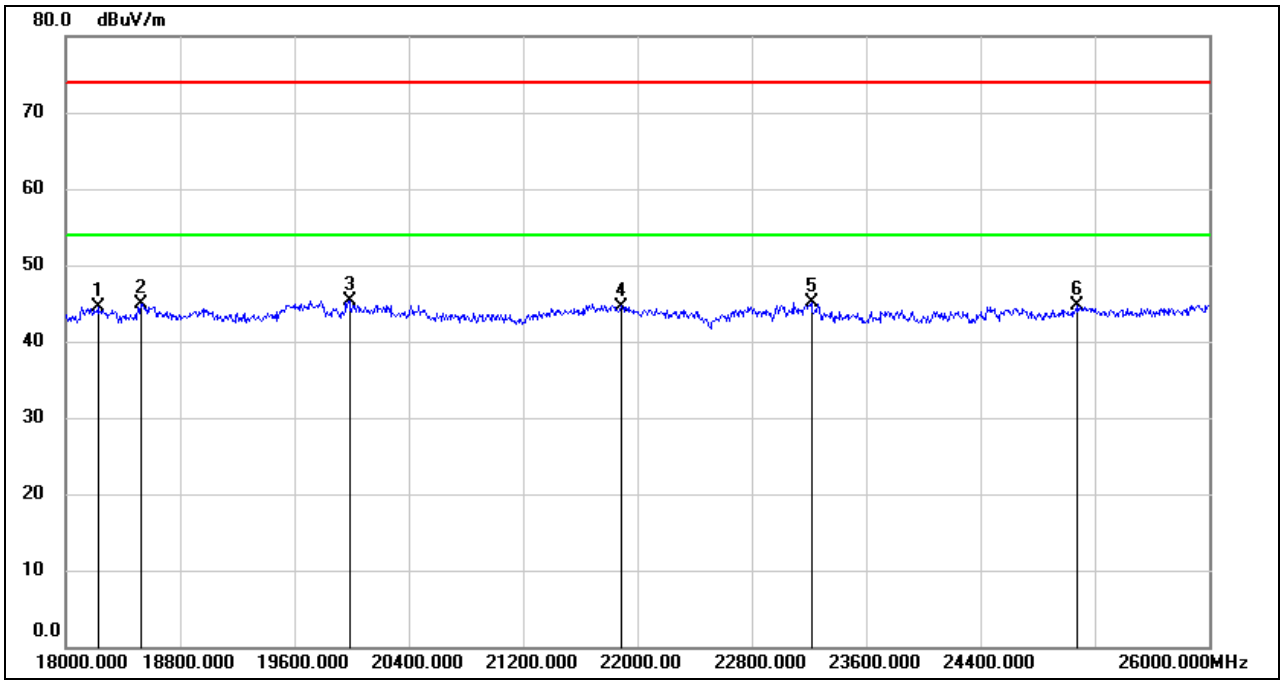

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	50.08	-5.53	44.55	74.00	-29.45	peak
2	18528.000	50.11	-5.26	44.85	74.00	-29.15	peak
3	19984.000	50.71	-5.44	45.27	74.00	-28.73	peak
4	21888.000	49.01	-4.41	44.60	74.00	-29.40	peak
5	23216.000	48.51	-3.38	45.13	74.00	-28.87	peak
6	25080.000	46.60	-1.96	44.64	74.00	-29.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

Note: All the modes and channels have been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.11. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

7.11.1. 802.11b MODE- PAC-A-200110

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

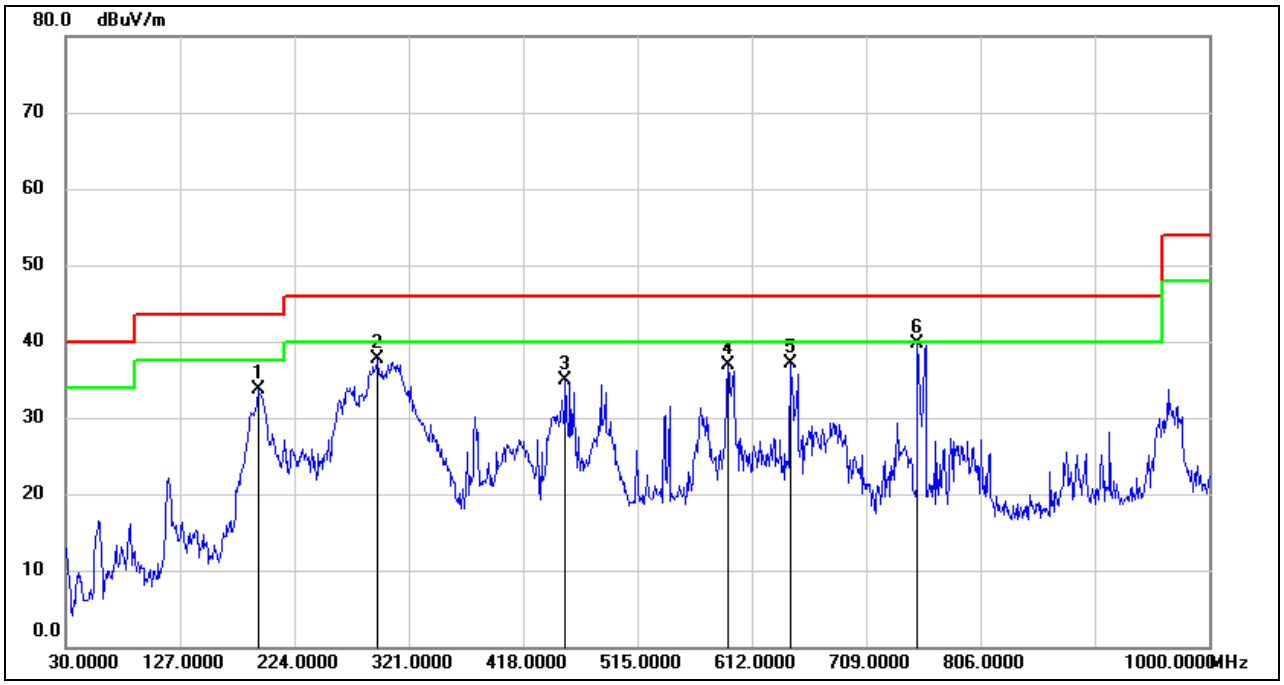

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	192.9600	50.30	-16.53	33.77	43.50	-9.73	QP
2	294.8100	53.34	-15.61	37.73	46.00	-8.27	QP
3	453.8900	47.24	-12.35	34.89	46.00	-11.11	QP
4	591.6300	46.64	-9.77	36.87	46.00	-9.13	QP
5	644.9800	46.10	-9.05	37.05	46.00	-8.95	QP
6	752.6500	47.67	-7.87	39.80	46.00	-6.20	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

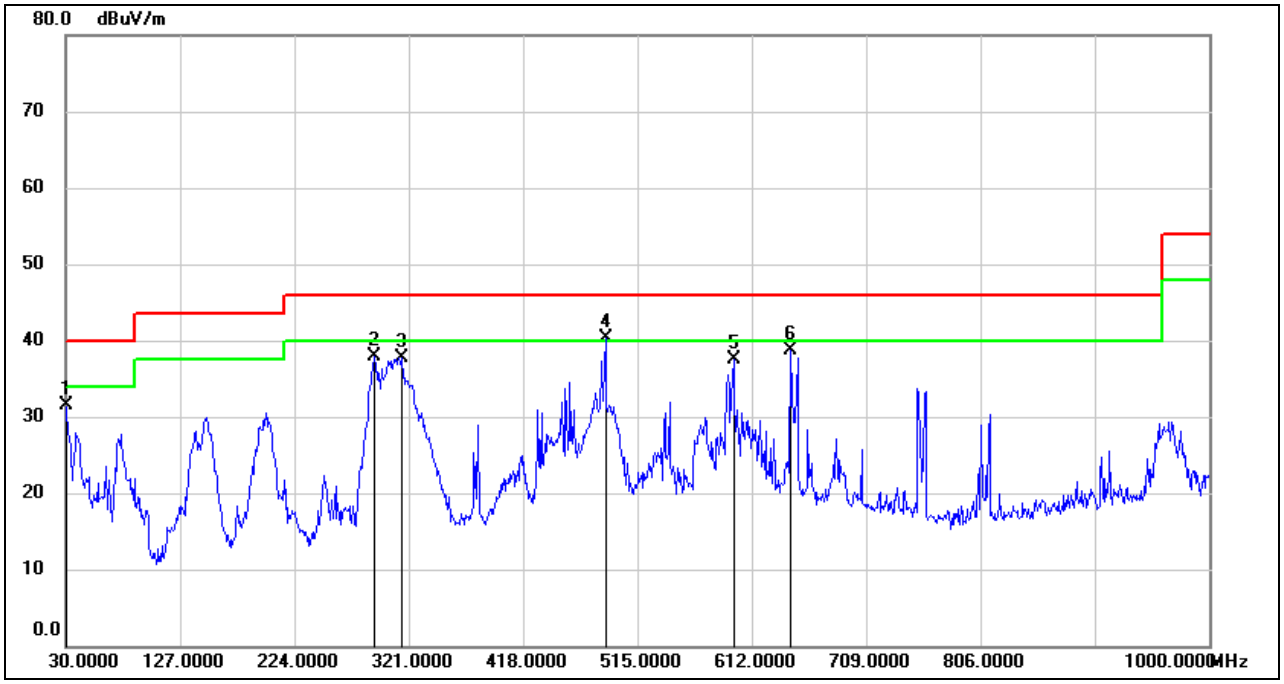

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	50.53	-18.94	31.59	40.00	-8.41	QP
2	291.9000	53.64	-15.80	37.84	46.00	-8.16	QP
3	315.1800	52.64	-14.92	37.72	46.00	-8.28	QP
4	487.8400	52.01	-11.72	40.29	46.00	-5.71	QP
5	596.4800	47.16	-9.64	37.52	46.00	-8.48	QP
6	644.9800	47.80	-9.05	38.75	46.00	-7.25	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modes and channels have been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.11.2. 802.11b MODE- PAC-A-302111

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

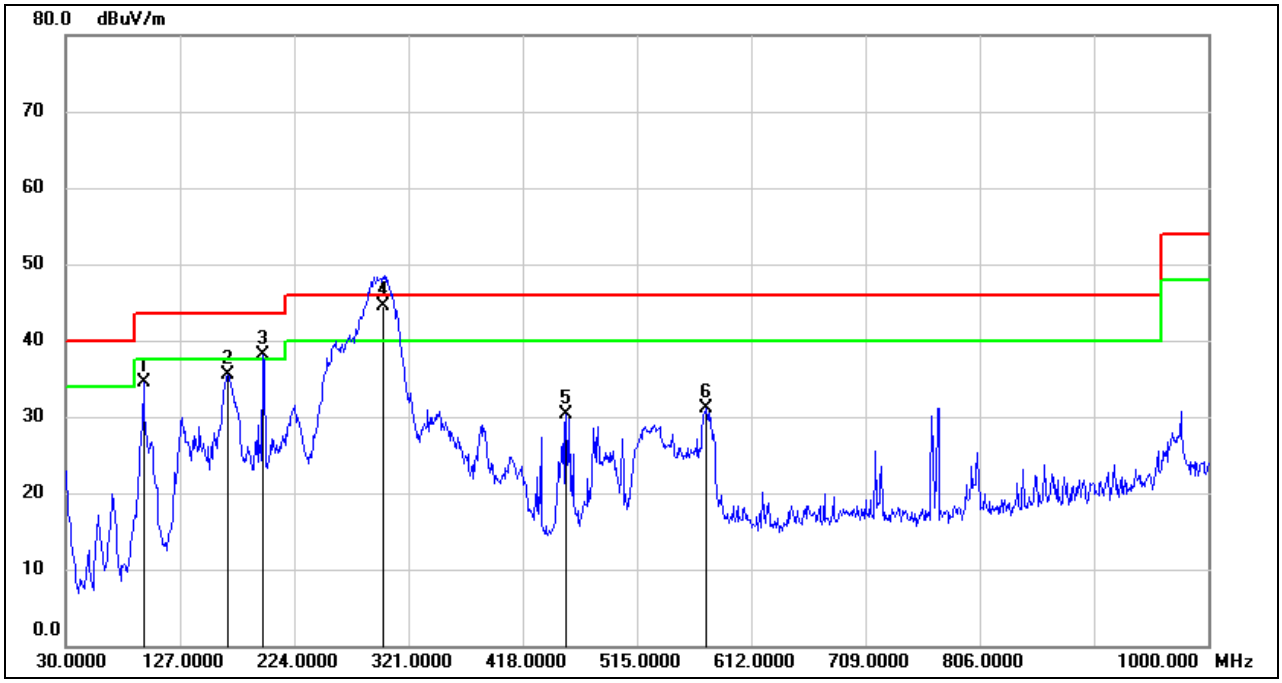

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.9600	55.99	-21.44	34.55	43.50	-8.95	QP
2	167.7400	52.82	-17.41	35.41	43.50	-8.09	QP
3	197.8100	54.45	-16.41	38.04	43.50	-5.46	QP
4	299.5572	59.92	-15.32	44.60	46.00	-1.40	QP
5	454.8600	42.66	-12.31	30.35	46.00	-15.65	QP
6	574.1700	41.16	-10.04	31.12	46.00	-14.88	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

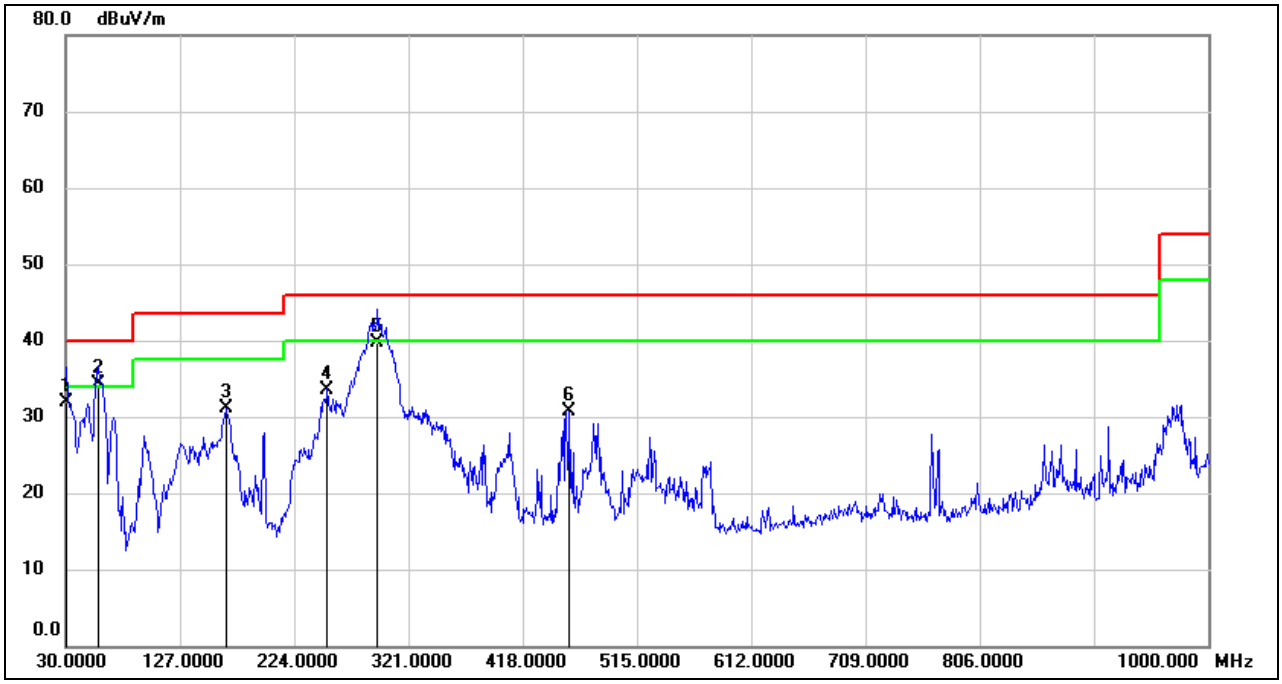

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.7200	50.88	-19.01	31.87	40.00	-8.13	QP
2	57.1600	54.82	-20.58	34.24	40.00	-5.76	QP
3	165.8000	48.68	-17.51	31.17	43.50	-12.33	QP
4	252.1300	52.44	-18.84	33.60	46.00	-12.40	QP
5	293.3599	55.49	-15.70	39.79	46.00	-6.21	QP
6	457.7700	42.90	-12.20	30.70	46.00	-15.30	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modes and channels have been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.11.3. 802.11b MODE- PAC-A-405411

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

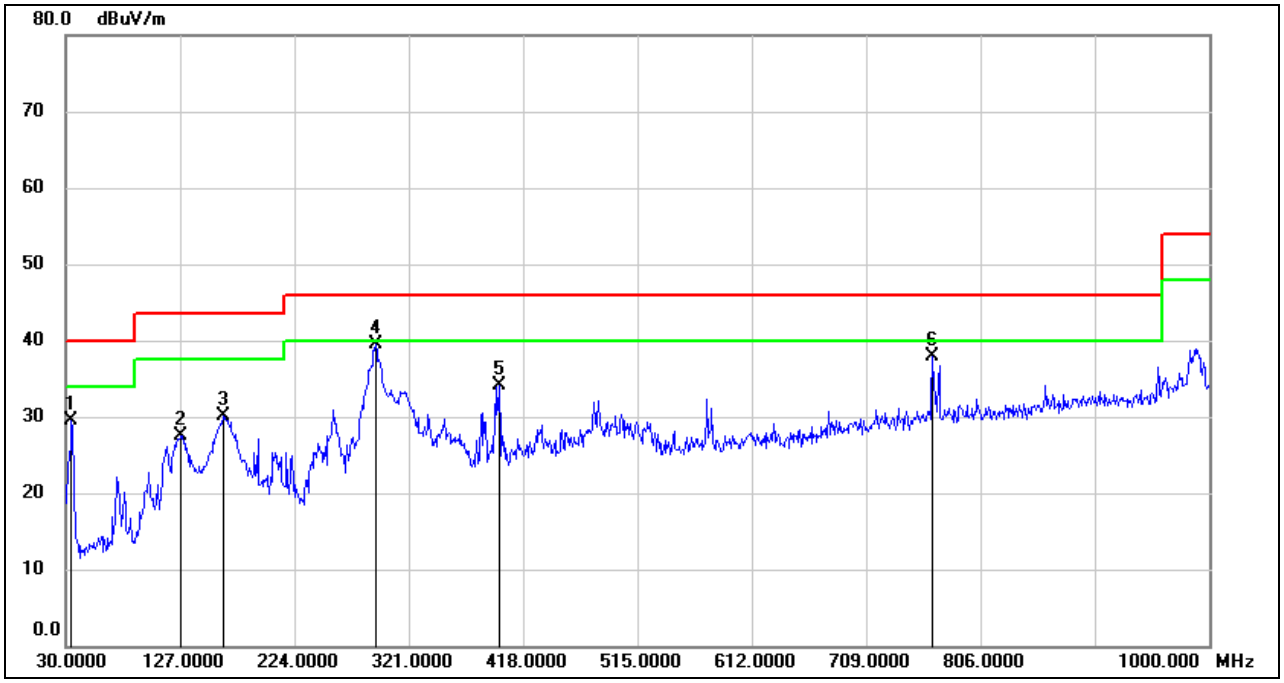

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	38.23	-8.75	29.48	40.00	-10.52	QP
2	127.9700	35.98	-8.46	27.52	43.50	-15.98	QP
3	163.8600	36.63	-6.54	30.09	43.50	-13.41	QP
4	292.8700	45.45	-5.94	39.51	46.00	-6.49	QP
5	397.6300	38.05	-3.90	34.15	46.00	-11.85	QP
6	765.2600	35.29	2.61	37.90	46.00	-8.10	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

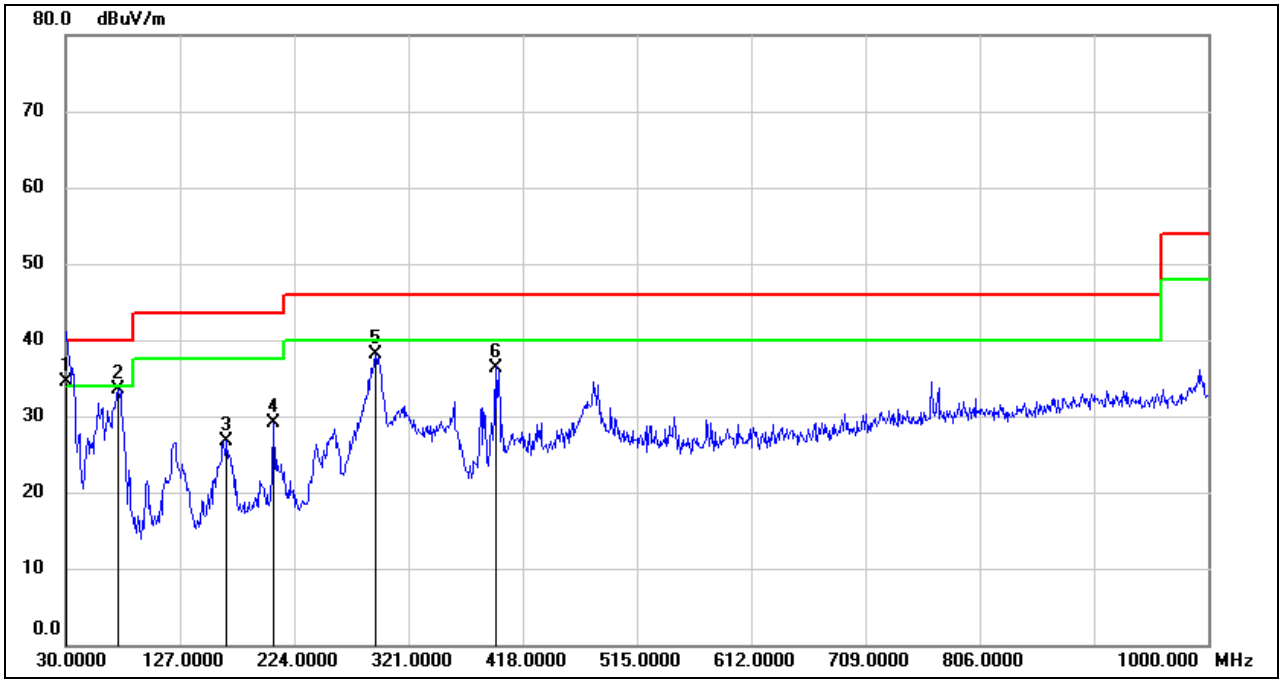

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	42.56	-8.04	34.52	40.00	-5.48	QP
2	74.6200	43.28	-9.79	33.49	40.00	-6.51	QP
3	166.7700	33.05	-6.36	26.69	43.50	-16.81	QP
4	206.5399	35.51	-6.47	29.04	43.50	-14.46	QP
5	292.8700	43.99	-5.94	38.05	46.00	-7.95	QP
6	394.7200	40.28	-3.88	36.40	46.00	-9.60	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modes and channels have been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

7.12. SPURIOUS EMISSIONS BELOW 30 MHz

7.12.1. 802.11b MODE

SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

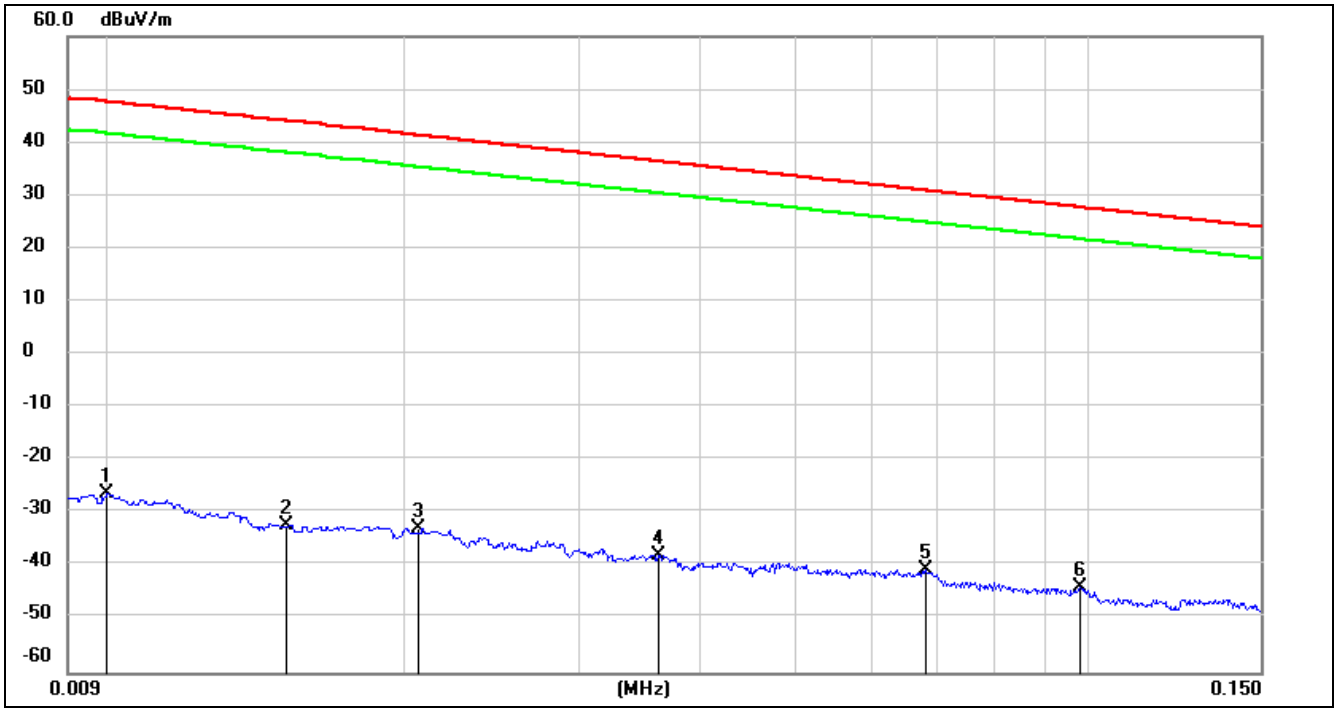

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.6	-73.78	peak
2	0.0151	69.21	-101.37	-32.16	44.02	-76.18	peak
3	0.0206	68.42	-101.35	-32.93	41.32	-74.25	peak
4	0.0362	63.51	-101.42	-37.91	36.43	-74.34	peak
5	0.0680	61.04	-101.56	-40.52	30.95	-71.47	peak
6	0.0981	57.77	-101.78	-44.01	27.77	-71.78	peak

Note:

1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
2. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

150 kHz ~ 490 kHz

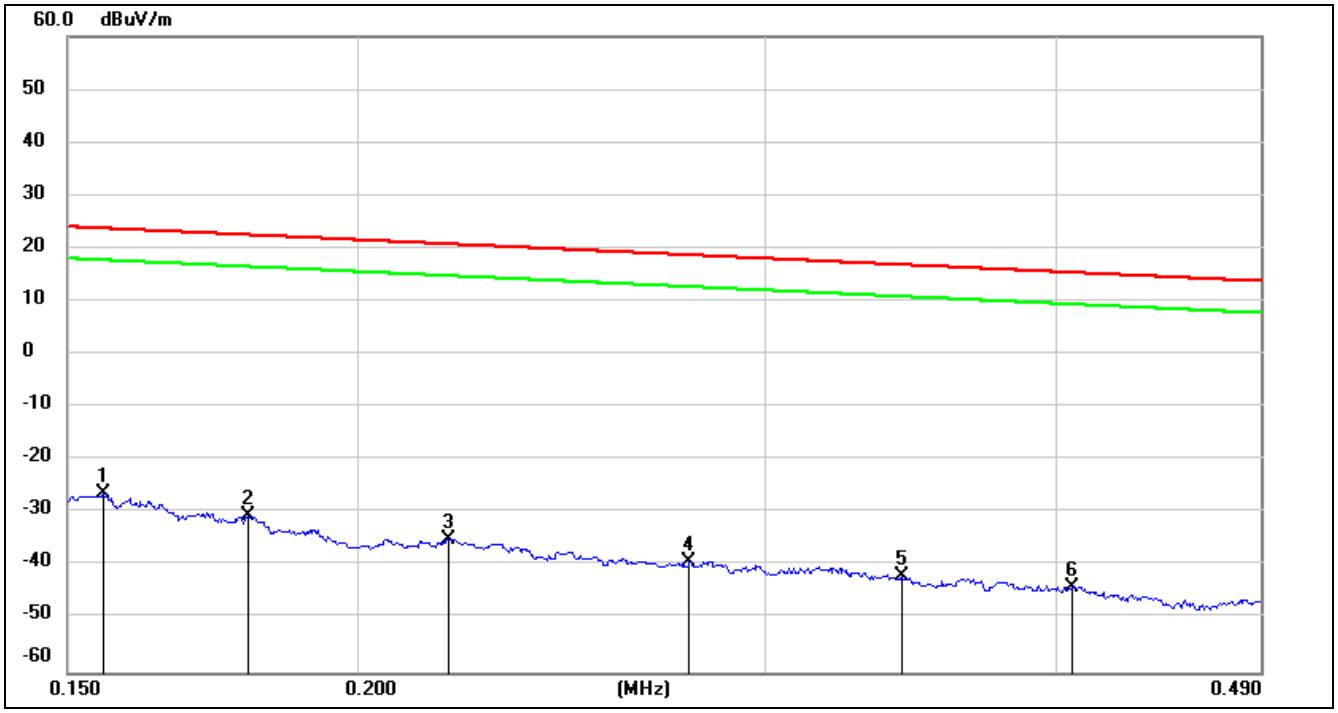

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	75.27	-101.65	-26.38	23.77	-50.15	peak
2	0.1794	71.27	-101.68	-30.41	22.53	-52.94	peak
3	0.2190	66.77	-101.75	-34.98	20.79	-55.77	peak
4	0.2782	62.79	-101.83	-39.04	18.71	-57.75	peak
5	0.3431	60.17	-101.90	-41.73	16.89	-58.62	peak
6	0.4062	58.14	-101.96	-43.82	15.43	-59.25	peak

Note:

1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
2. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

490 kHz ~ 30 MHz

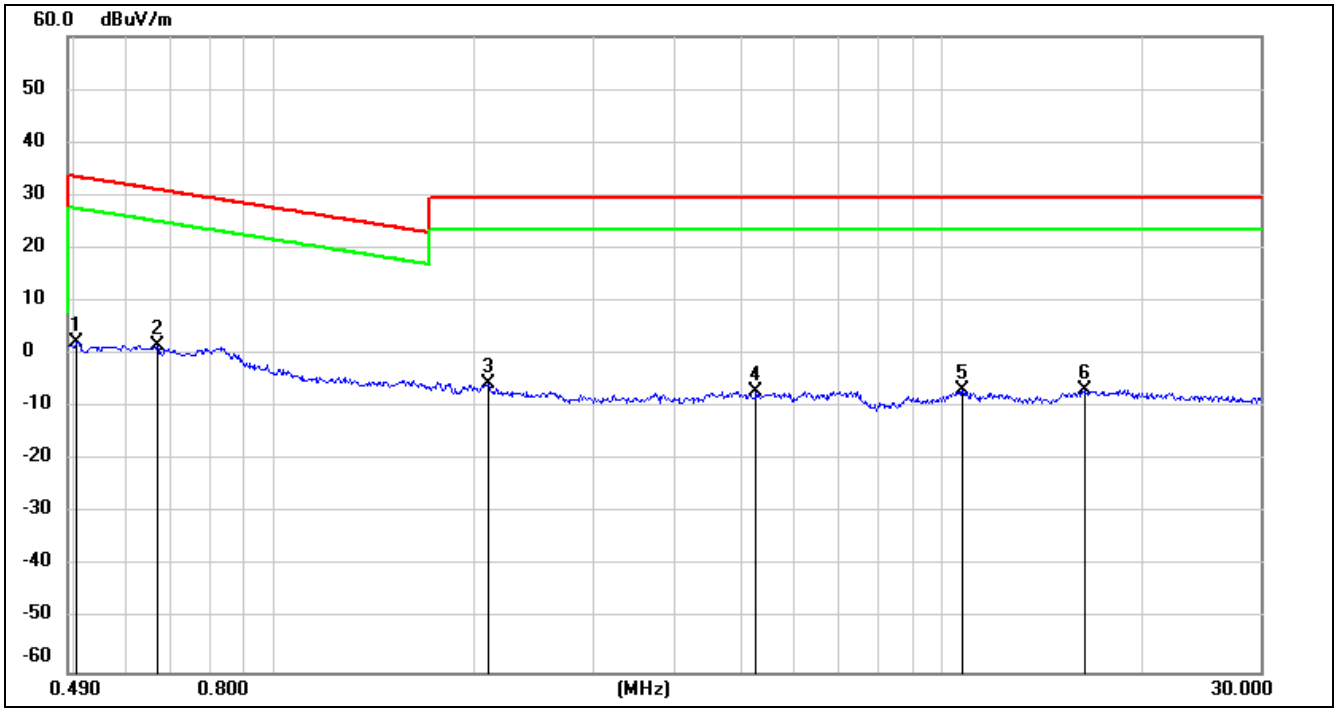

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.5039	64.44	-62.07	2.37	33.56	-31.19	peak
2	0.6671	63.75	-62.10	1.65	31.12	-29.47	peak
3	2.0939	56.39	-61.79	-5.4	29.54	-34.94	peak
4	5.2705	54.54	-61.45	-6.91	29.54	-36.45	peak
5	10.7299	53.98	-60.83	-6.85	29.54	-36.39	peak
6	16.3959	54.17	-60.96	-6.79	29.54	-36.33	peak

Note:

1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
2. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes had been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

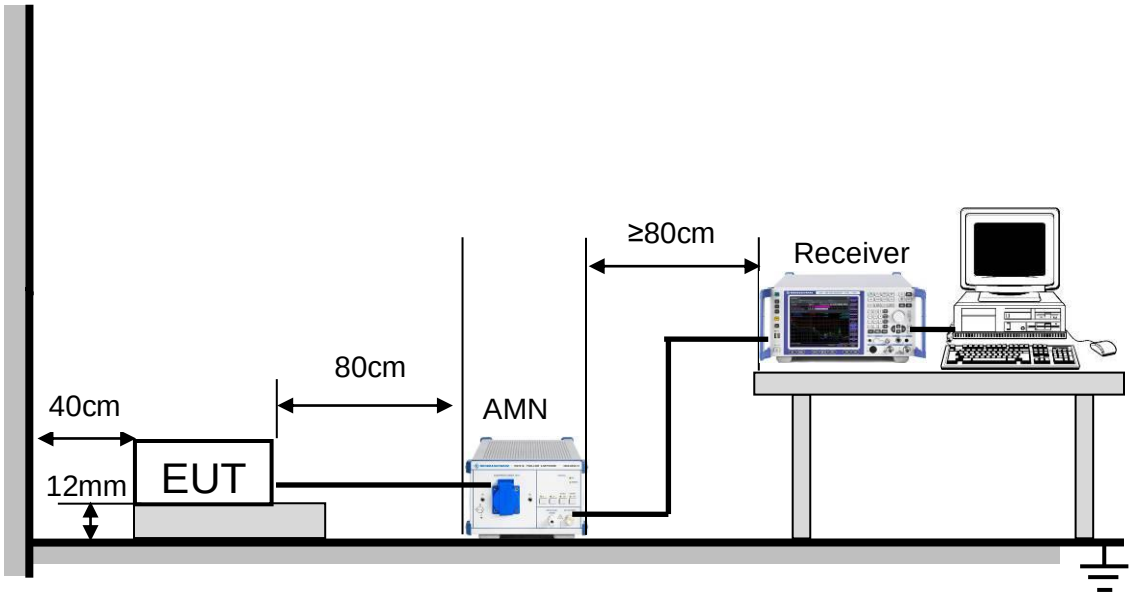

The EUT is put on a table of non-conducting material that is 12 mm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST ENVIRONMENT

Temperature	20.6 °C	Relative Humidity	62.1 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 100-240V, 50/60Hz

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.1. 802.11b SISO MODE

LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

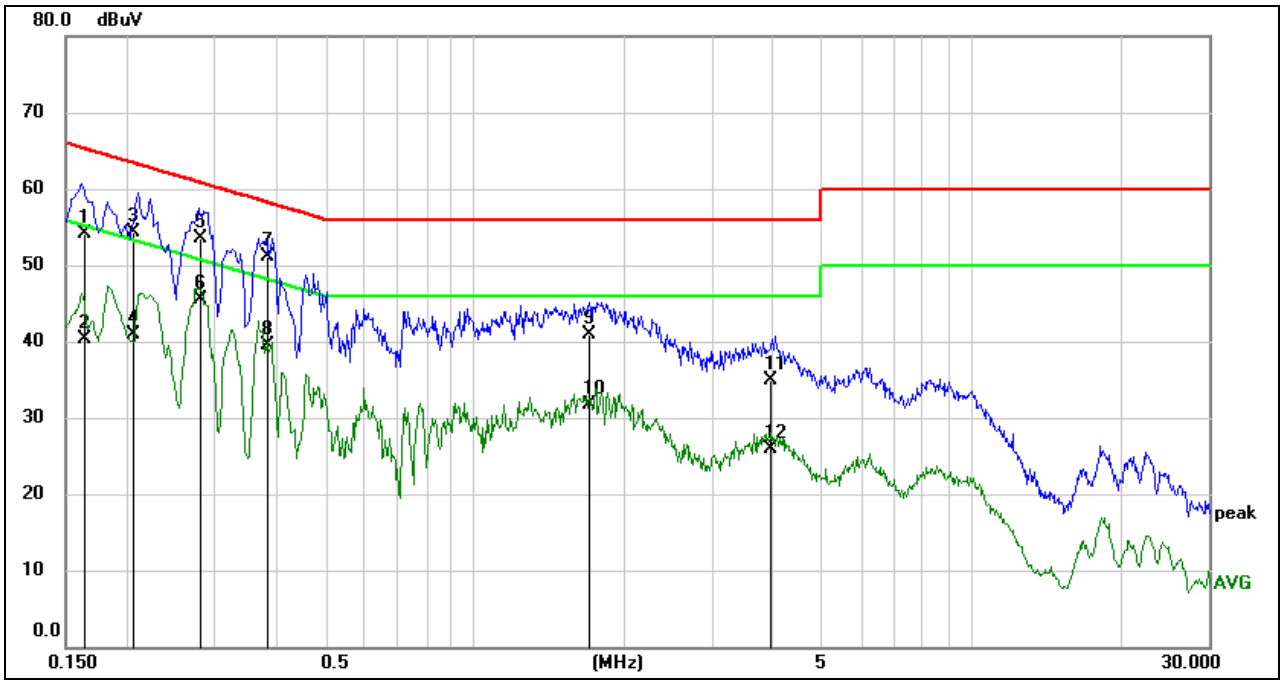

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1642	44.58	9.59	54.17	65.25	-11.08	QP
2	0.1642	30.72	9.59	40.31	55.25	-14.94	AVG
3	0.2058	44.73	9.58	54.31	63.37	-9.06	QP
4	0.2058	31.24	9.58	40.82	53.37	-12.55	AVG
5	0.2813	44.06	9.51	53.57	60.78	-7.21	QP
6	0.2813	35.90	9.51	45.41	50.78	-5.37	AVG
7	0.3836	41.72	9.41	51.13	58.20	-7.07	QP
8	0.3836	30.18	9.41	39.59	48.20	-8.61	AVG
9	1.7021	31.27	9.62	40.89	56.00	-15.11	QP
10	1.7021	22.09	9.62	31.71	46.00	-14.29	AVG
11	3.9354	25.35	9.60	34.95	56.00	-21.05	QP
12	3.9354	16.33	9.60	25.93	46.00	-20.07	AVG

Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the adapters, modes and channels have been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

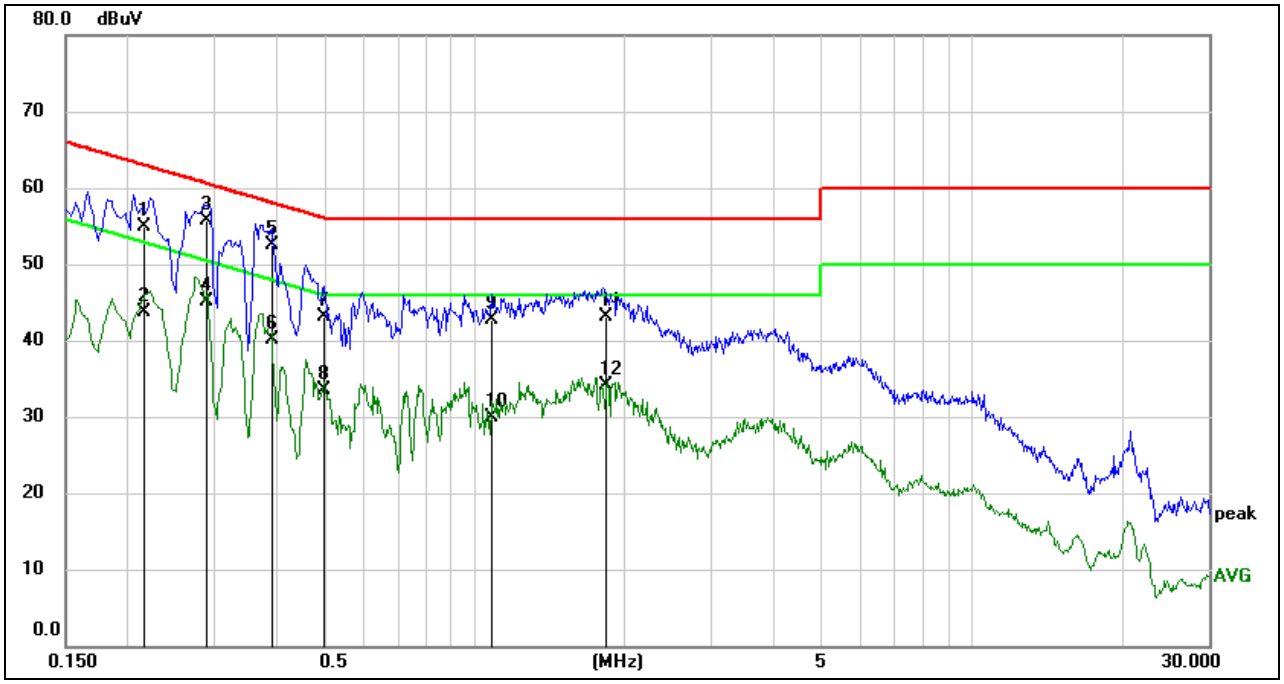

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2170	45.42	9.57	54.99	62.93	-7.94	QP
2	0.2170	34.16	9.57	43.73	52.93	-9.20	AVG
3	0.2880	46.26	9.50	55.76	60.58	-4.82	QP
4	0.2880	35.67	9.50	45.17	50.58	-5.41	AVG
5	0.3878	43.01	9.40	52.41	58.11	-5.70	QP
6	0.3878	30.79	9.40	40.19	48.11	-7.92	AVG
7	0.4974	33.85	9.30	43.15	56.04	-12.89	QP
8	0.4974	24.17	9.30	33.47	46.04	-12.57	AVG
9	1.0844	33.02	9.61	42.63	56.00	-13.37	QP
10	1.0844	20.21	9.61	29.82	46.00	-16.18	AVG
11	1.8494	33.46	9.62	43.08	56.00	-12.92	QP
12	1.8494	24.49	9.62	34.11	46.00	-11.89	AVG

Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the adapters, modes and channels have been tested, but only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)
The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10. Appendix A

10.1. Appendix A: DTS Bandwidth

10.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.08	2407.44	2416.52	0.5	PASS
		2437	9.08	2432.44	2441.52	0.5	PASS
		2462	9.08	2457.44	2466.52	0.5	PASS
11G	Ant1	2412	16.60	2403.68	2420.28	0.5	PASS
		2437	16.52	2428.72	2445.24	0.5	PASS
		2462	16.56	2453.68	2470.24	0.5	PASS
11N20SISO	Ant1	2412	16.60	2403.68	2420.28	0.5	PASS
		2437	16.56	2428.68	2445.24	0.5	PASS
		2462	16.52	2453.68	2470.20	0.5	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.1.2. Test Graphs

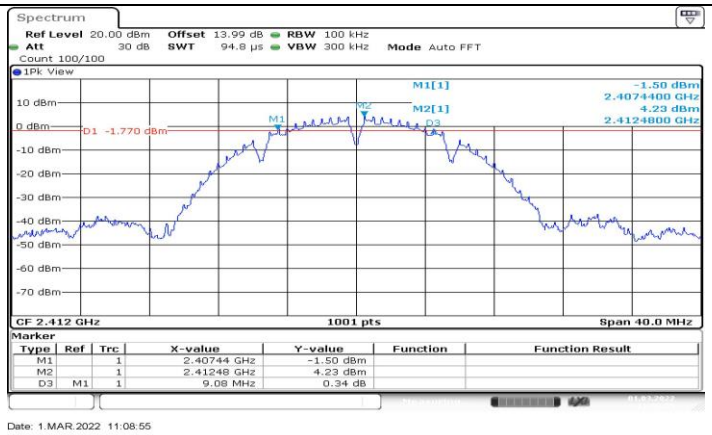

11B_Ant1_2412

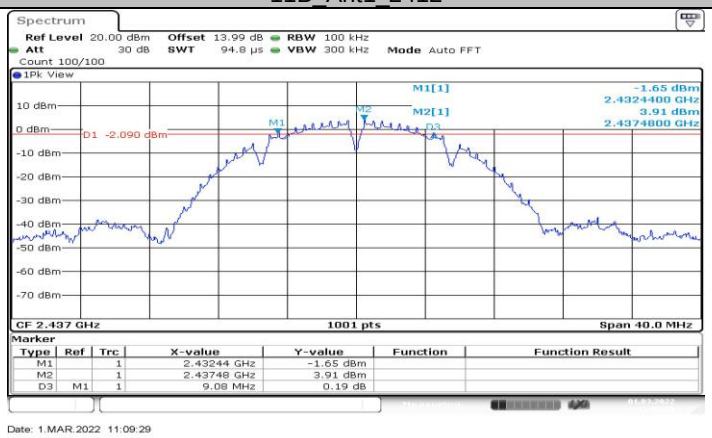

11B_Ant1_2437

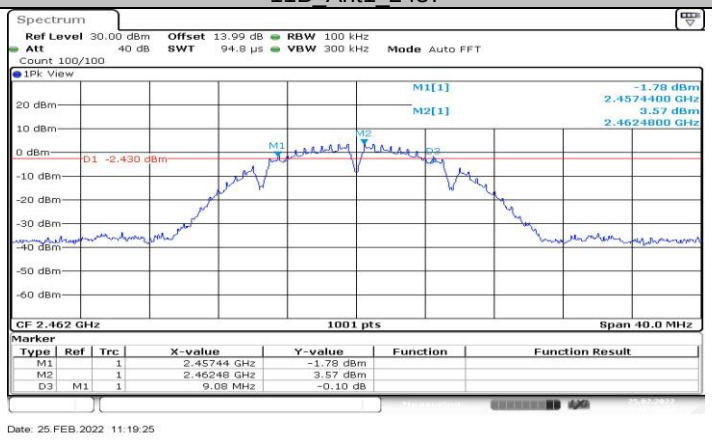

11B_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

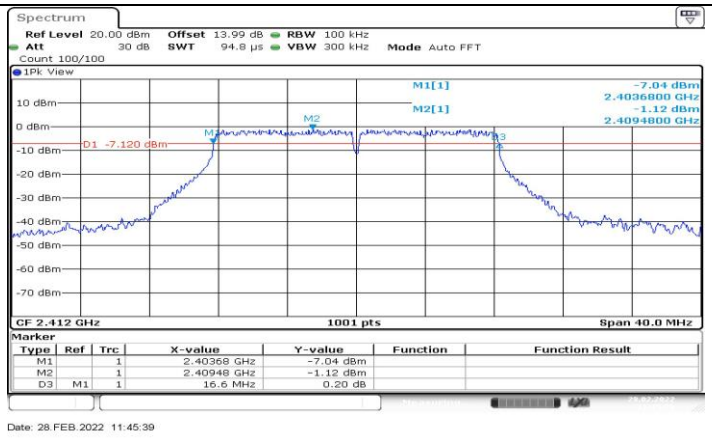

11G_Ant1_2412

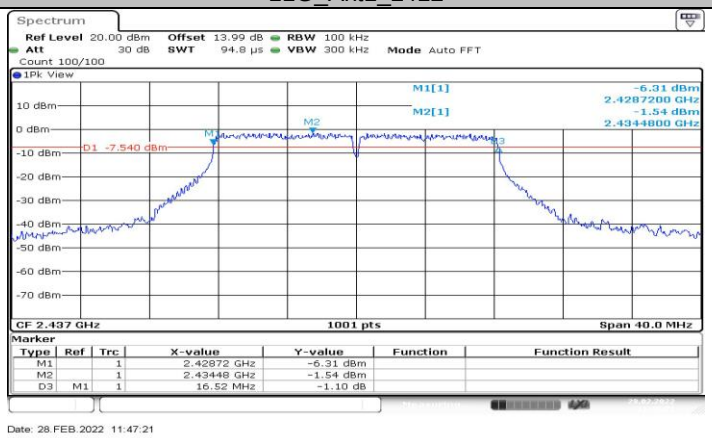

11G_Ant1_2437

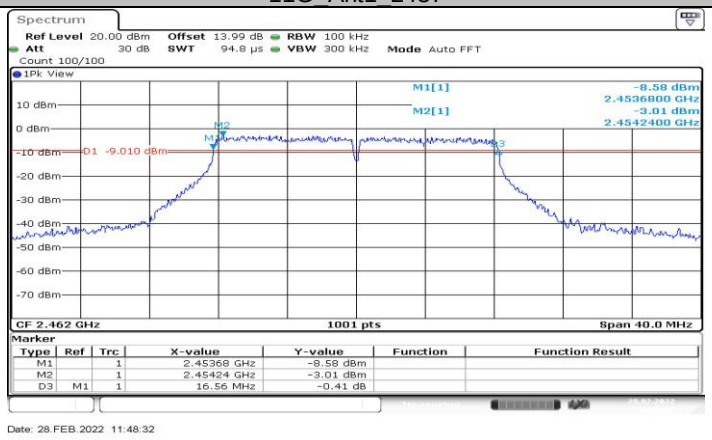

11G_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

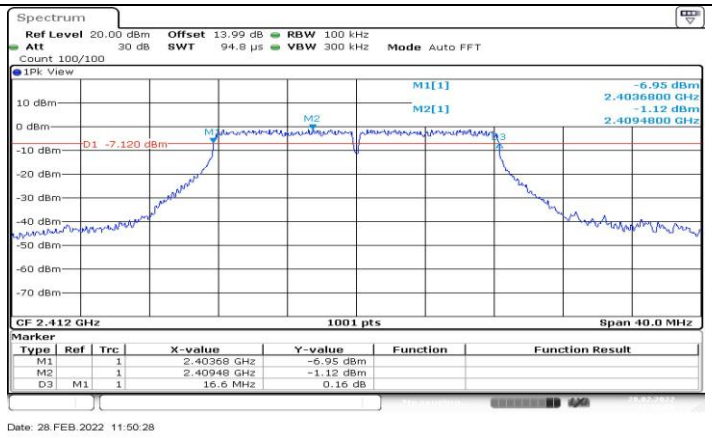

11N20SISO_Ant1_2412

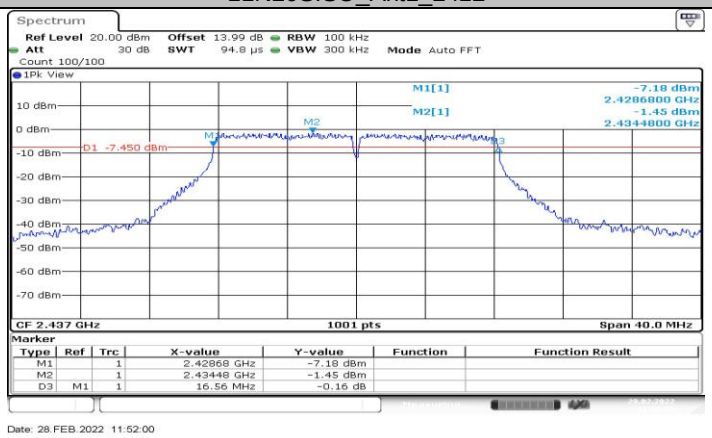

11N20SISO_Ant1_2437

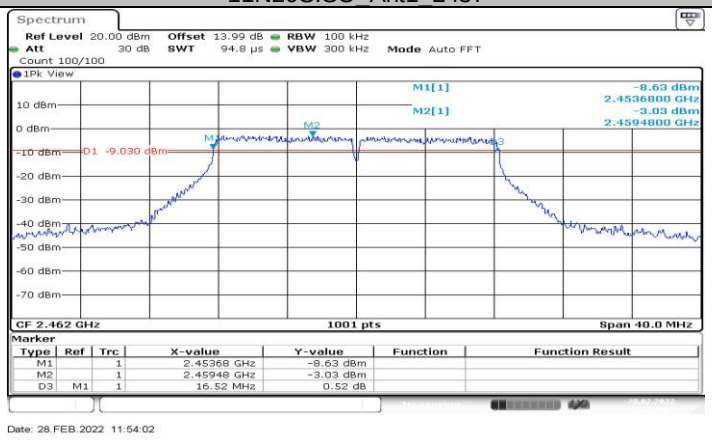

11N20SISO_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.2. Appendix B: Occupied Channel Bandwidth

10.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.226	2404.927	2419.153	PASS
		2437	14.226	2429.927	2444.153	PASS
		2462	14.346	2454.807	2469.153	PASS
11G	Ant1	2412	17.383	2403.129	2420.511	PASS
		2437	17.383	2428.089	2445.472	PASS
		2462	17.423	2453.049	2470.472	PASS
11N20SISO	Ant1	2412	17.383	2403.129	2420.511	PASS
		2437	17.383	2428.089	2445.472	PASS
		2462	17.423	2453.049	2470.472	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.2.2. Test Graphs

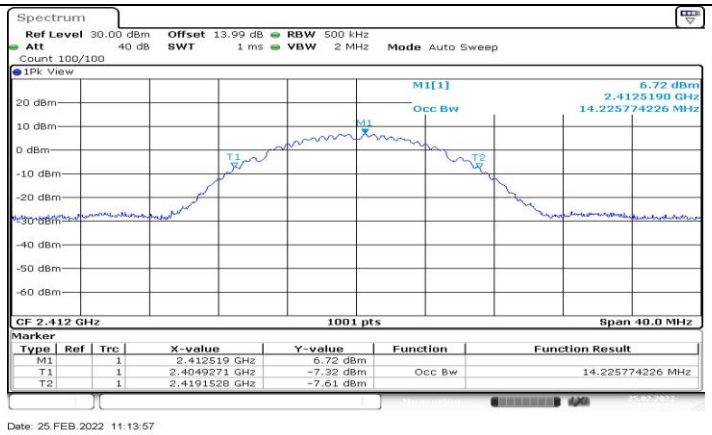

11B_Ant1_2412

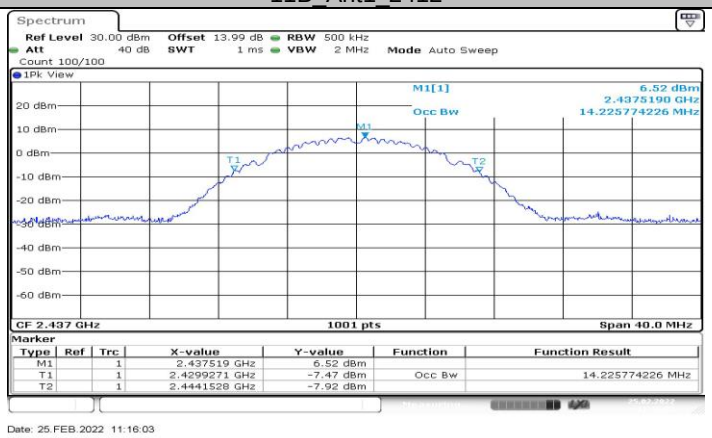

11B_Ant1_2437

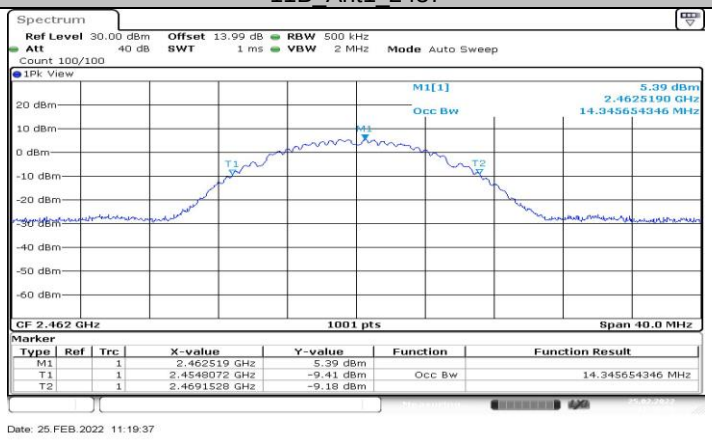

11B_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

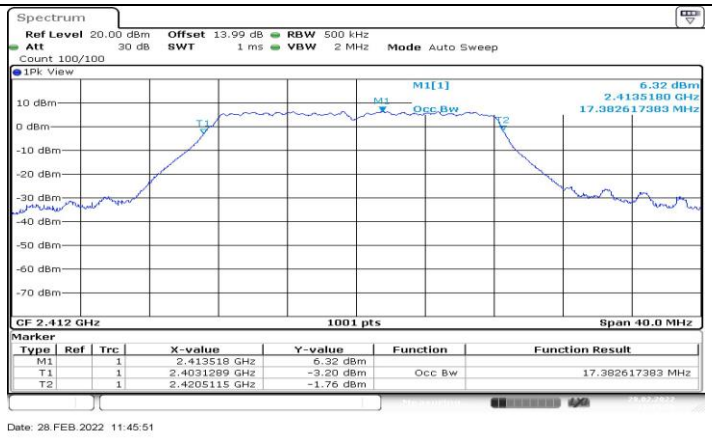

11G_Ant1_2412

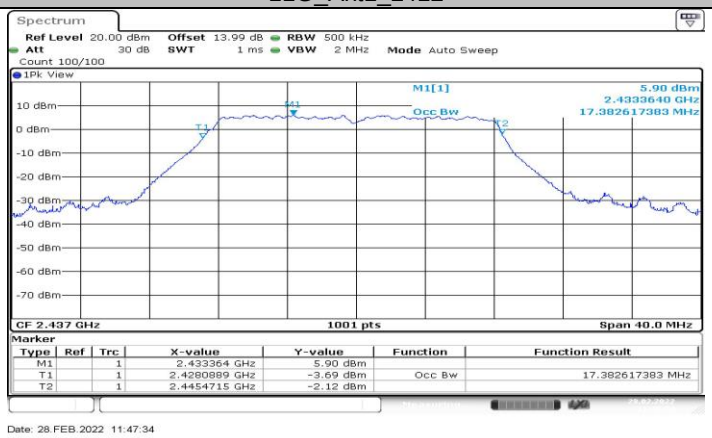

11G_Ant1_2437

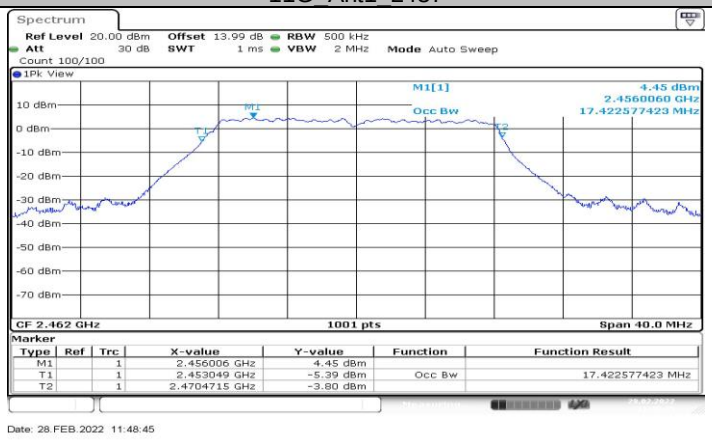

11G_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

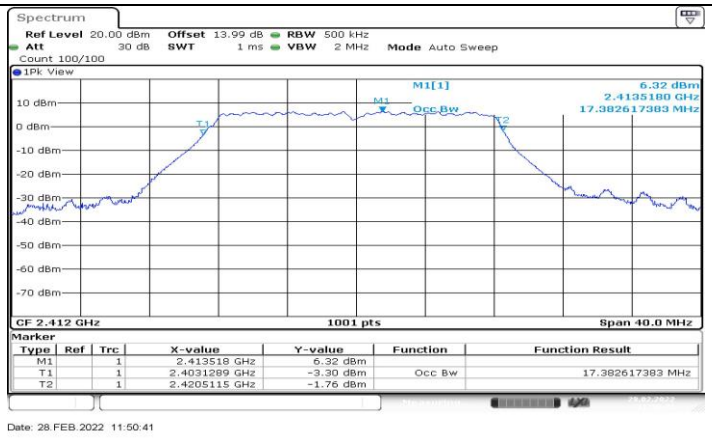

11N20SISO_Ant1_2412

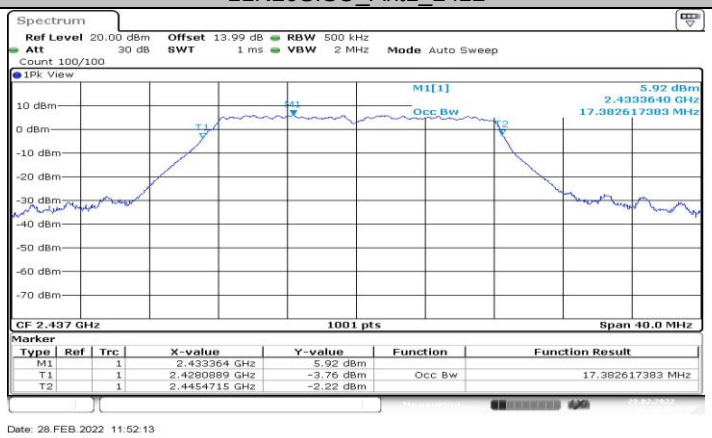

11N20SISO_Ant1_2437

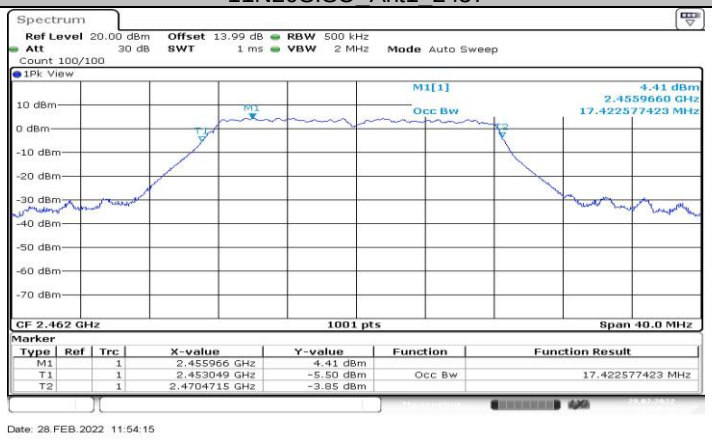

11N20SISO_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.3. Appendix C: Maximum Average Conducted Output Power

10.3.1. Test Result

Test Mode	Antenna	Channel	Power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	13.96	≤29.6	PASS
		2437	13.84	≤29.6	PASS
		2462	12.30	≤29.6	PASS
11G	Ant1	2412	11.54	≤29.6	PASS
		2437	11.21	≤29.6	PASS
		2462	10.86	≤29.6	PASS
11N20SISO	Ant1	2412	11.46	≤29.6	PASS
		2437	11.13	≤29.6	PASS
		2462	10.81	≤29.6	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor
2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.4. Appendix D: Maximum power spectral density

10.4.1. Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-16.89	≤8.00	PASS
		2437	-17.26	≤8.00	PASS
		2462	-18.86	≤8.00	PASS
11G	Ant1	2412	-19.68	≤8.00	PASS
		2437	-20.04	≤8.00	PASS
		2462	-20.26	≤8.00	PASS
11N20SISO	Ant1	2412	-19.8	≤8.00	PASS
		2437	-20.14	≤8.00	PASS
		2462	-21.41	≤8.00	PASS

Note:

1. The Duty Cycle Factor has compensated to the Graph.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.4.2. Test Graphs

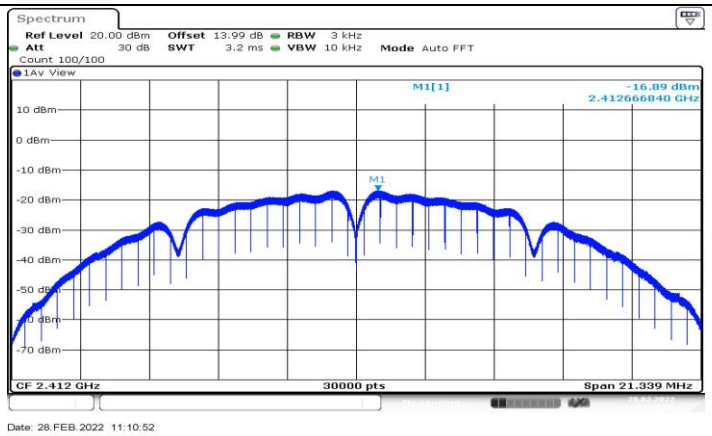

11B_Ant1_2412

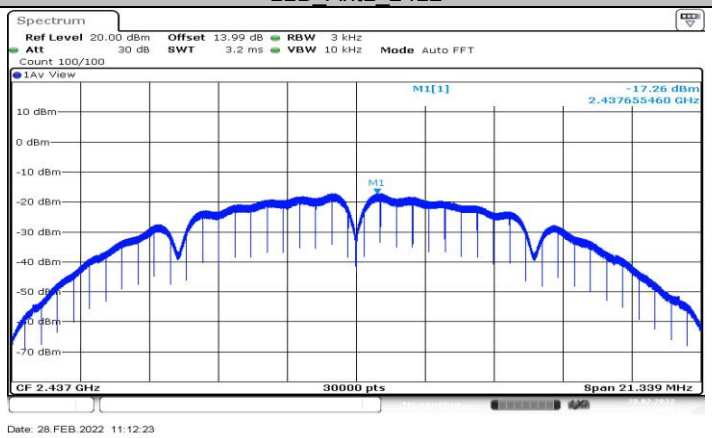

11B_Ant1_2437

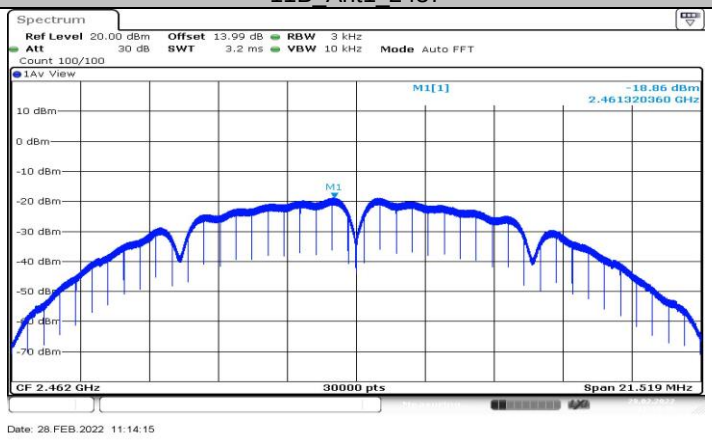

11B_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

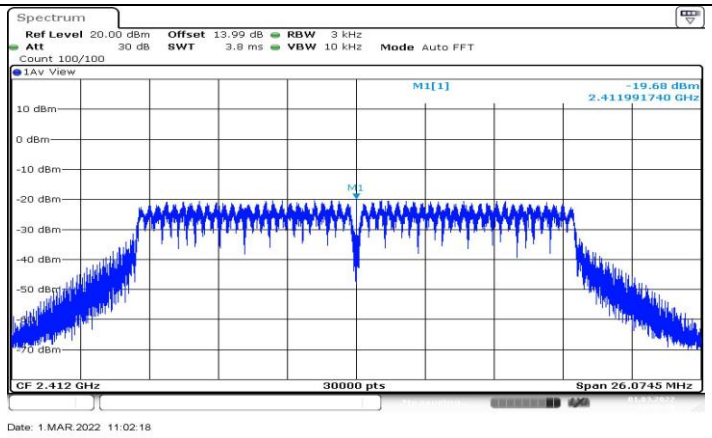

11G_Ant1_2412

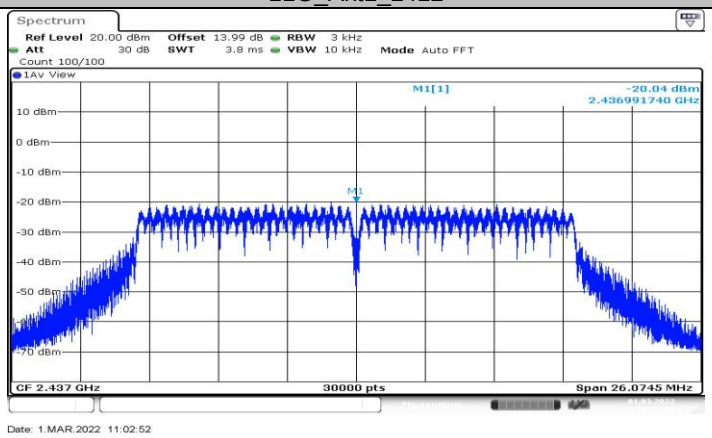

11G_Ant1_2437

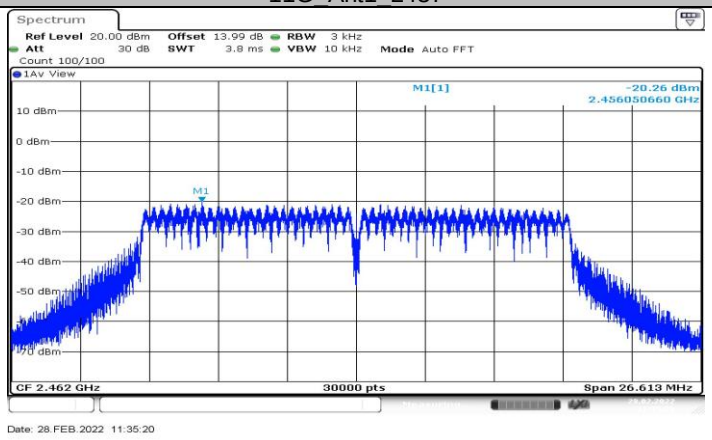

11G_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

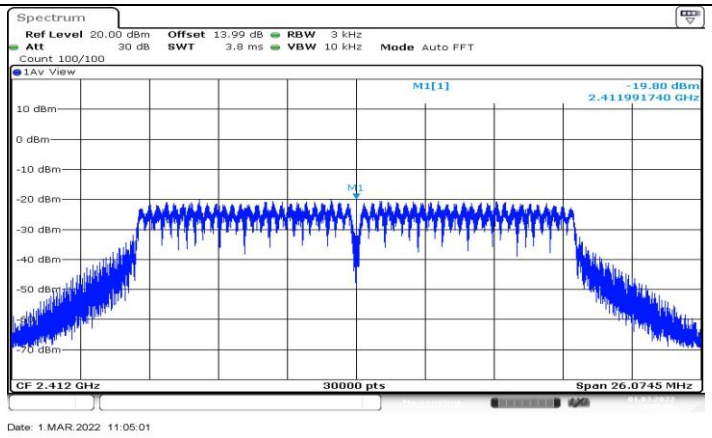

11N20SISO_Ant1_2412

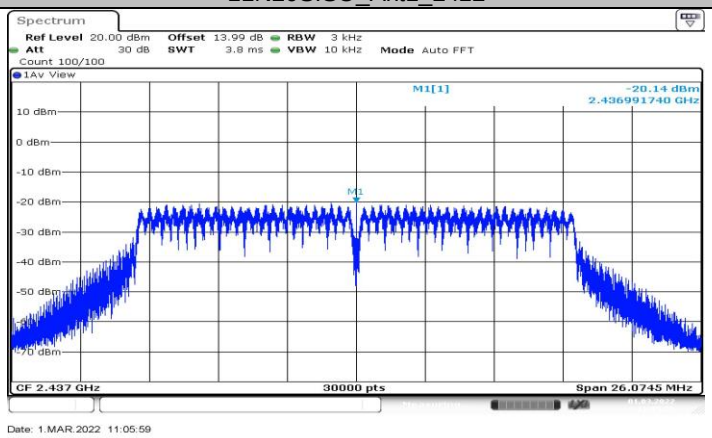

11N20SISO_Ant1_2437

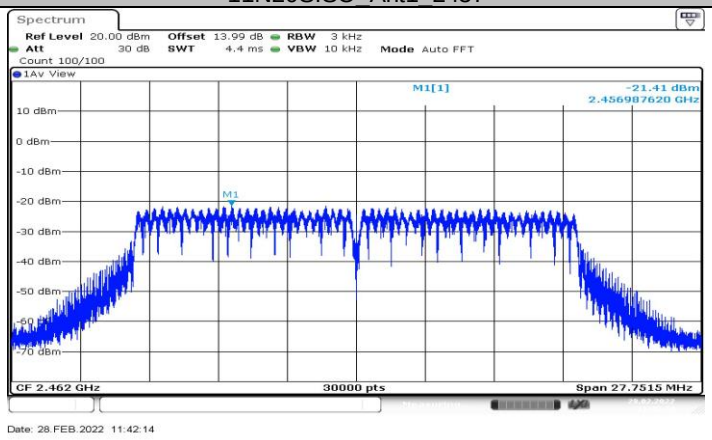

11N20SISO_Ant1_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.5. Appendix E: Band edge measurements

10.5.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.72	-37.66	≤-25.28	PASS
		High	2462	2.34	-38.78	≤-27.66	PASS
11G	Ant1	Low	2412	-1.24	-37.57	≤-31.24	PASS
		High	2462	-3.03	-45.23	≤-33.03	PASS
11N20SISO	Ant1	Low	2412	-1.15	-38.23	≤-31.15	PASS
		High	2462	-2.94	-43.82	≤-32.94	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.5.2. Test Graphs

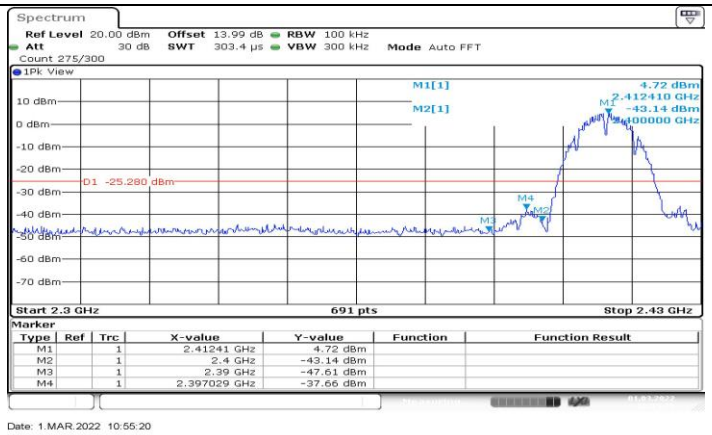

11B_Ant1_Low_2412

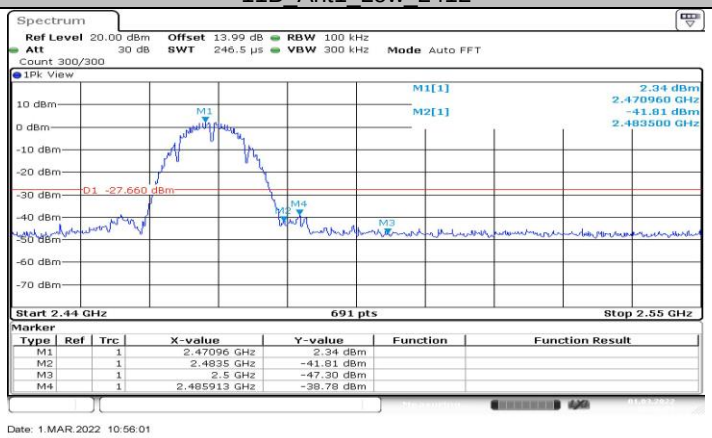

11B_Ant1_High_2462

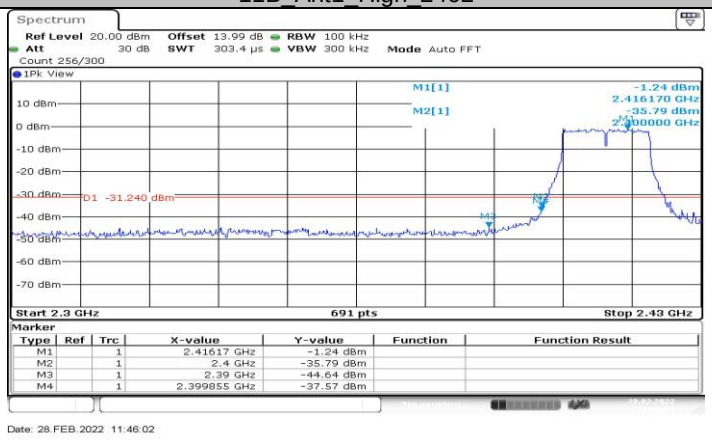

11G_Ant1_Low_2412

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

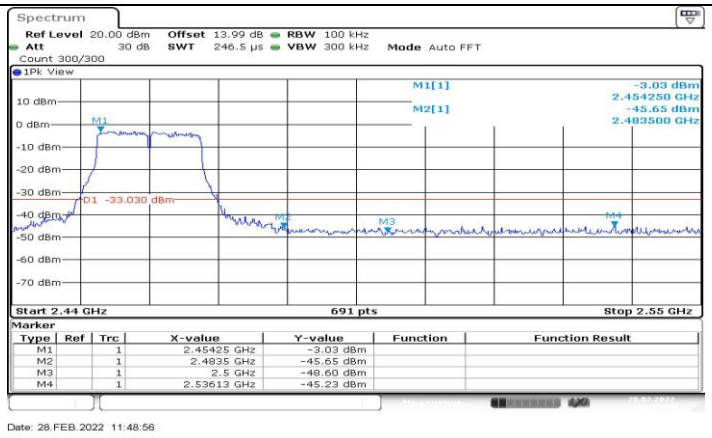

11G_Ant1_High_2462

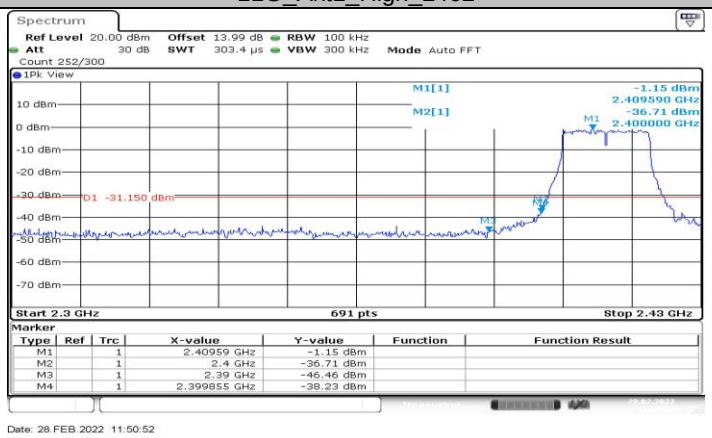

11N20SISO_Ant1_Low_2412

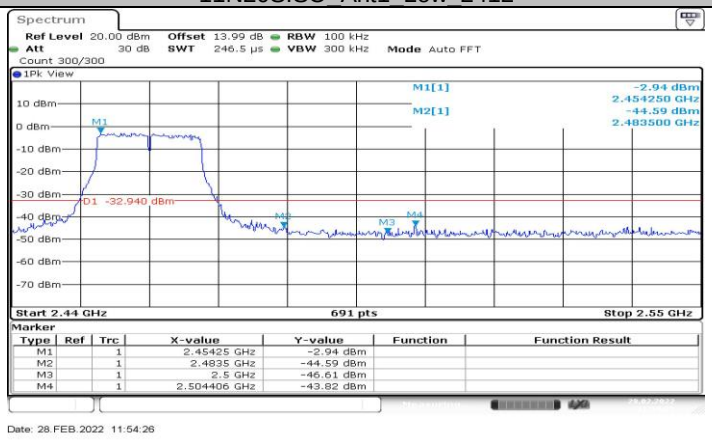

11N20SISO_Ant1_High_2462

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.6. Appendix F: Conducted Spurious Emission

10.6.1. Test Result

Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	5.00	---	PASS
			30~1000	-53.69	≤-25	PASS
			1000~26500	-48.71	≤-25	PASS
		2437	Reference	4.75	---	PASS
			30~1000	-53.55	≤-25.25	PASS
			1000~26500	-48.52	≤-25.25	PASS
		2462	Reference	3.64	---	PASS
			30~1000	-52.92	≤-26.36	PASS
			1000~26500	-48.17	≤-26.36	PASS
11G	Ant1	2412	Reference	-1.13	---	PASS
			30~1000	-53.64	≤-31.13	PASS
			1000~26500	-48.62	≤-31.13	PASS
		2437	Reference	-1.46	---	PASS
			30~1000	-53.79	≤-31.46	PASS
			1000~26500	-49.05	≤-31.46	PASS
		2462	Reference	-2.99	---	PASS
			30~1000	-54.17	≤-32.99	PASS
			1000~26500	-48.16	≤-32.99	PASS
11N20SISO	Ant1	2412	Reference	-1.13	---	PASS
			30~1000	-54.21	≤-31.13	PASS
			1000~26500	-47.87	≤-31.13	PASS
		2437	Reference	-1.49	---	PASS
			30~1000	-53.46	≤-31.49	PASS
			1000~26500	-48.25	≤-31.49	PASS
		2462	Reference	-3.04	---	PASS
			30~1000	-53.94	≤-33.04	PASS
			1000~26500	-48.55	≤-33.04	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.6.2. Test Graphs

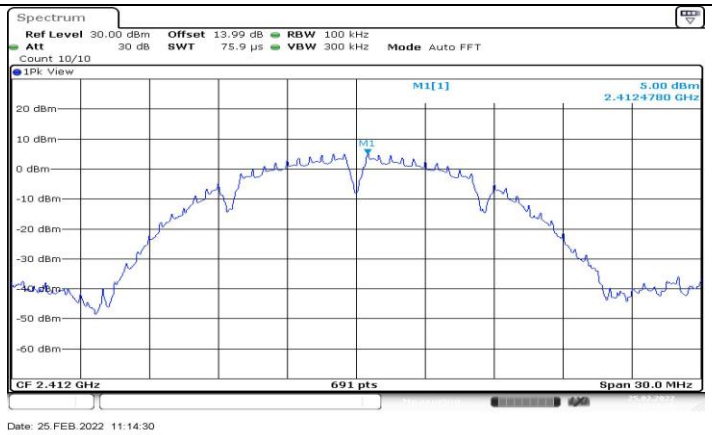

11B_Ant1_2412_0~Reference

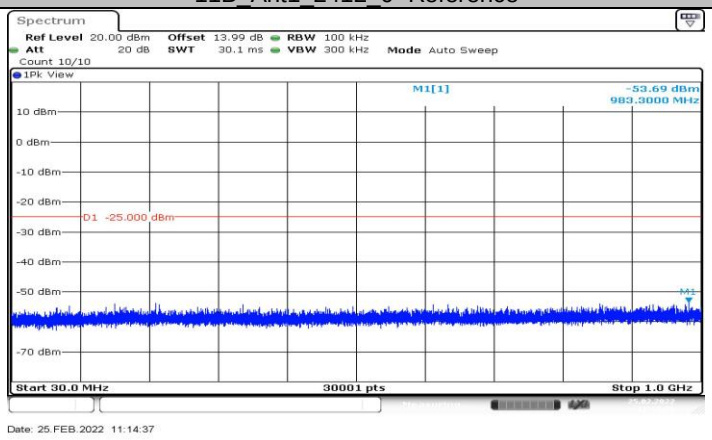

11B_Ant1_2412_30~1000

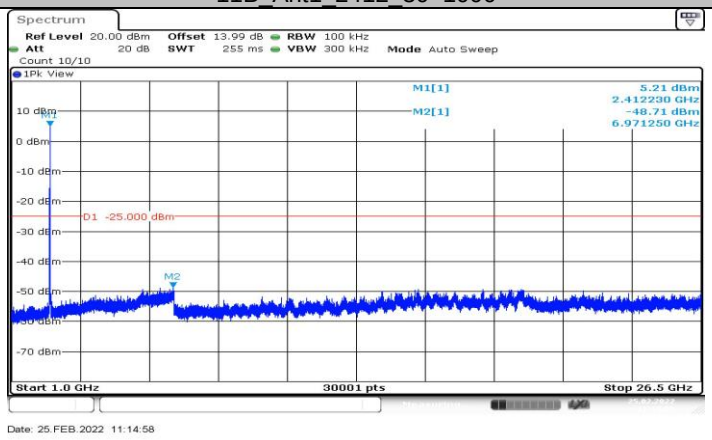

11B_Ant1_2412_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

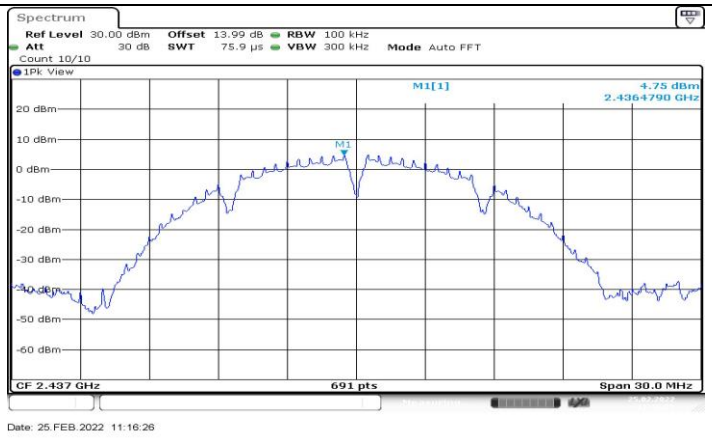

11B_Ant1_2437_0~Reference

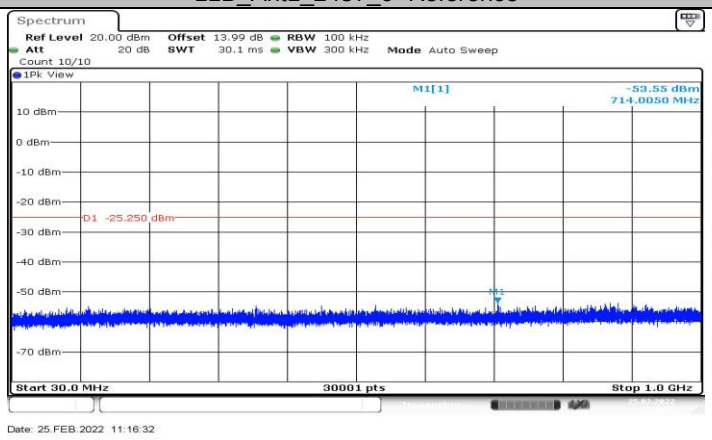

11B_Ant1_2437_30~1000

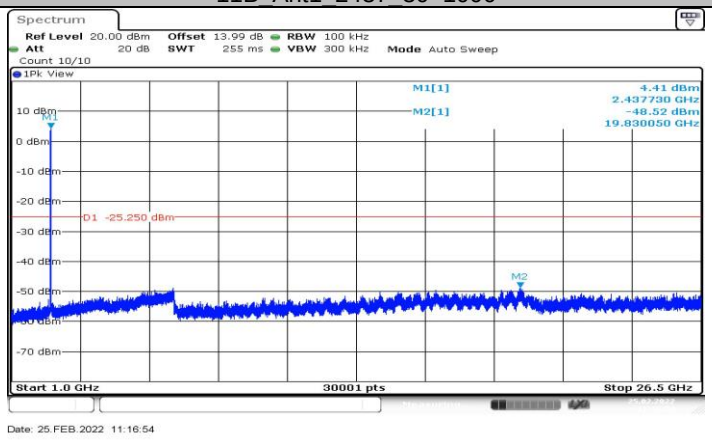

11B_Ant1_2437_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

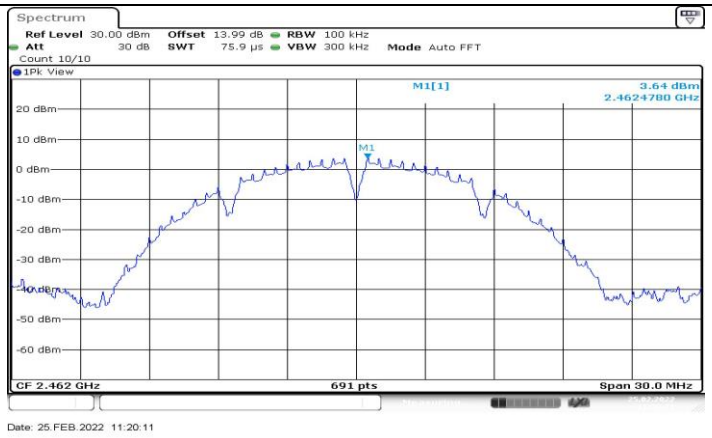

11B_Ant1_2462_0~Reference

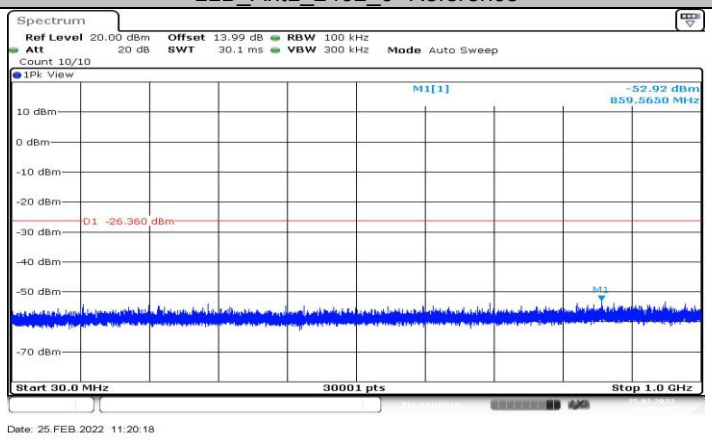

11B_Ant1_2462_30~1000

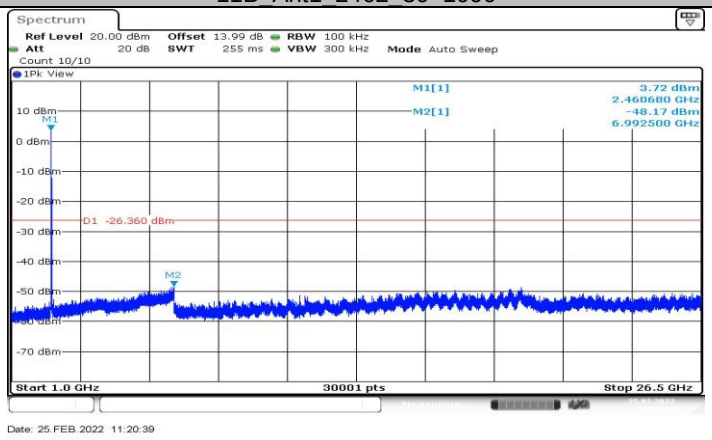

11B_Ant1_2462_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

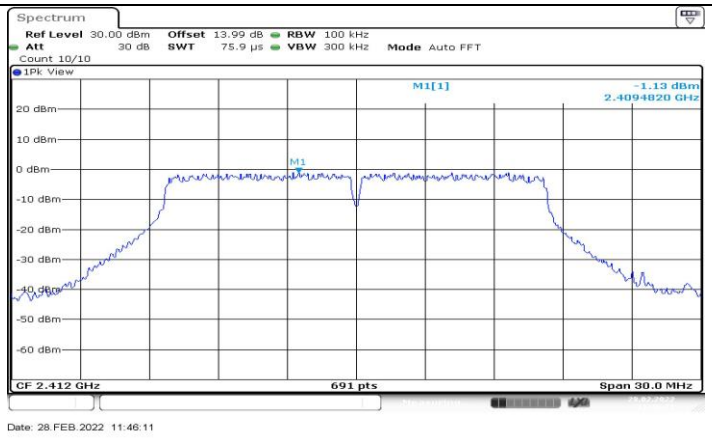

11G_Ant1_2412_0~Reference

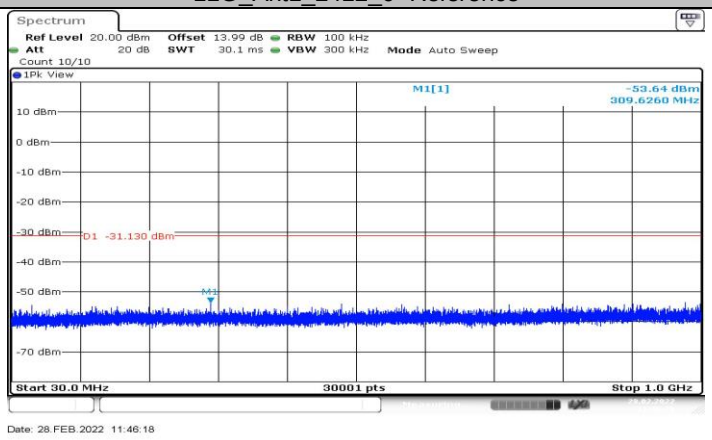

11G_Ant1_2412_30~1000

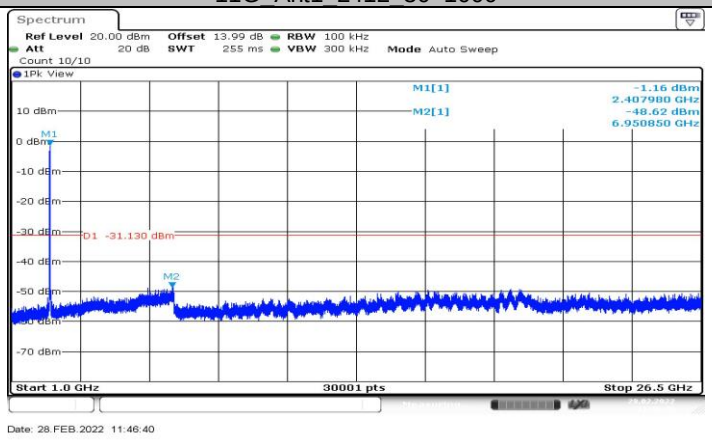

11G_Ant1_2412_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

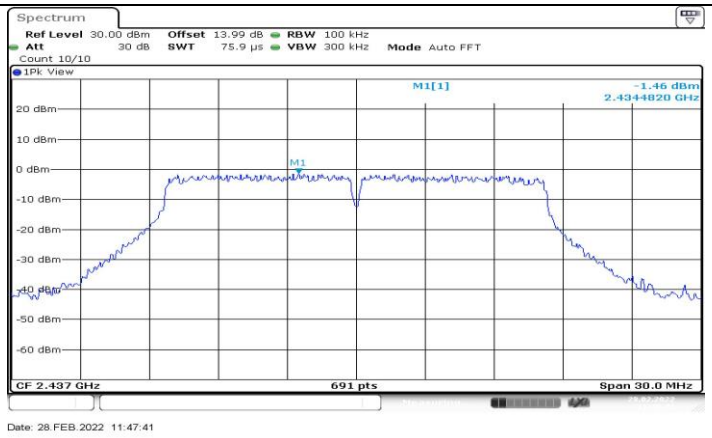

11G_Ant1_2437_0~Reference

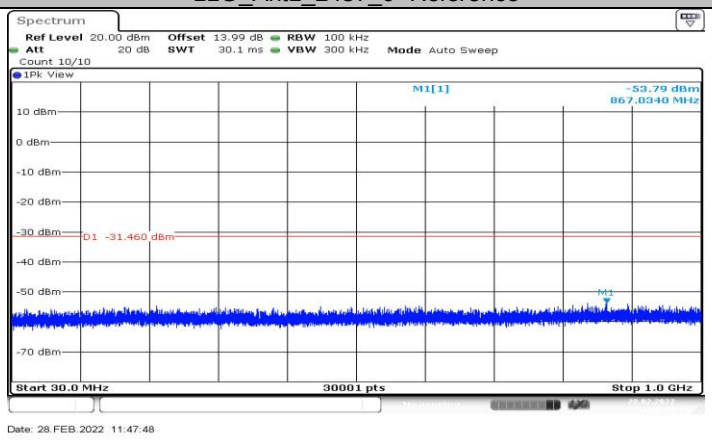

11G_Ant1_2437_30~1000

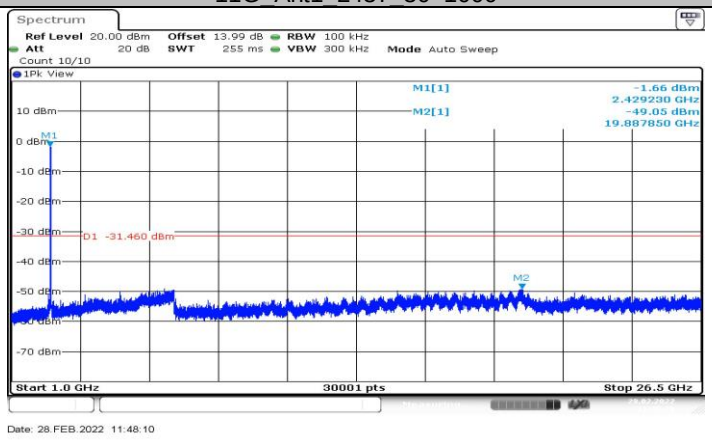

11G_Ant1_2437_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

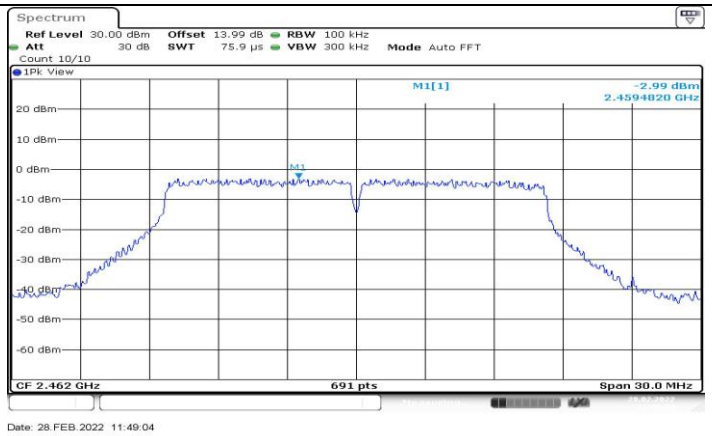

11G_Ant1_2462_0~Reference

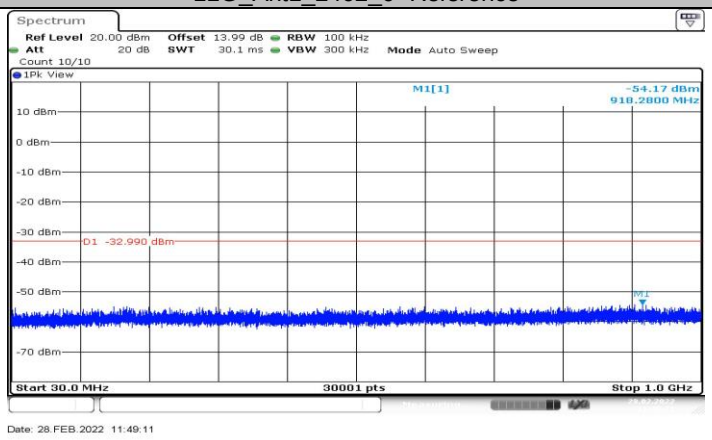

11G_Ant1_2462_30~1000

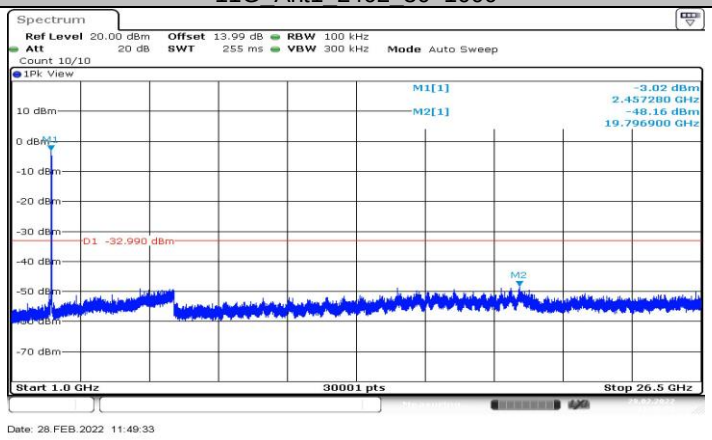

11G_Ant1_2462_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

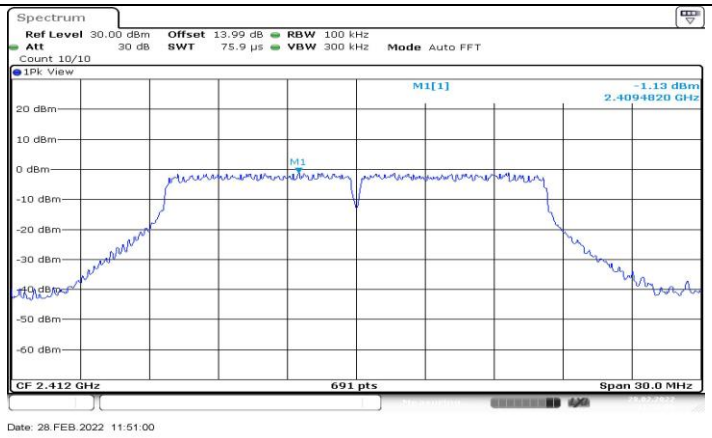

11N20SISO_Ant1_2412_0~Reference

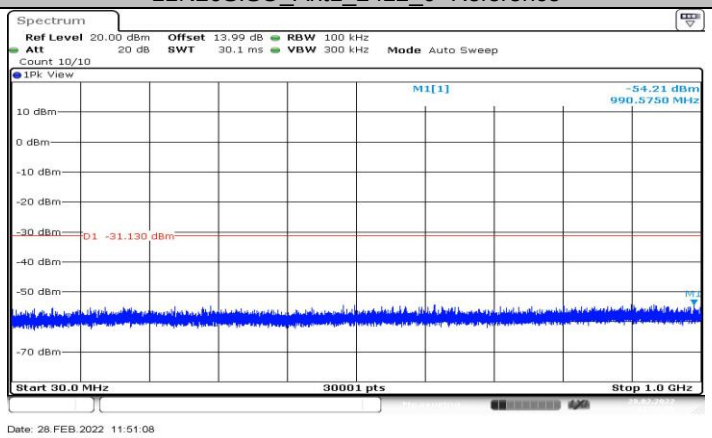

11N20SISO_Ant1_2412_30~1000

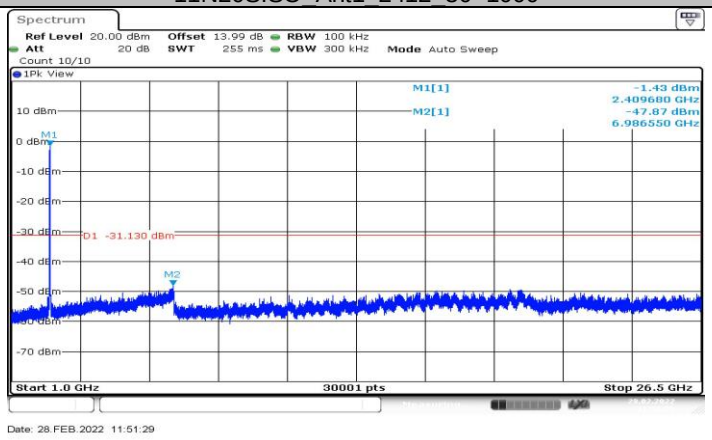

11N20SISO_Ant1_2412_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

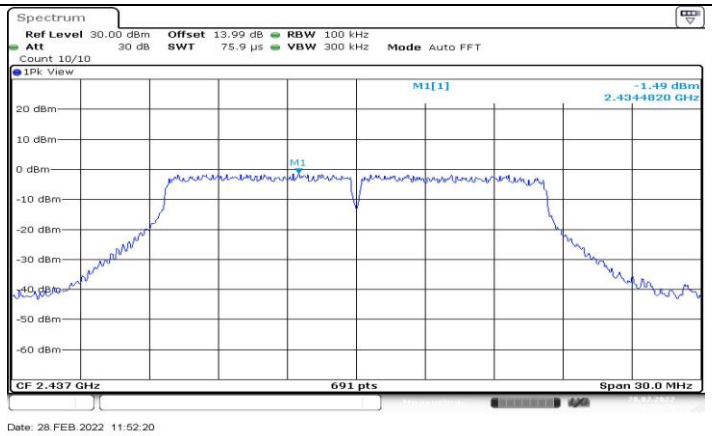

11N20SISO_Ant1_2437_0~Reference

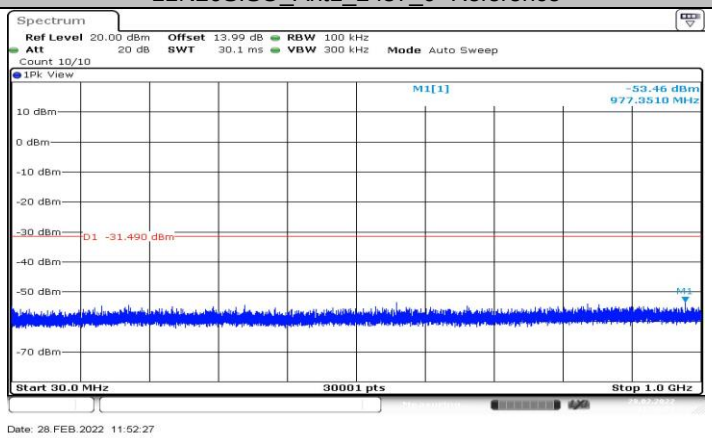

11N20SISO_Ant1_2437_30~1000

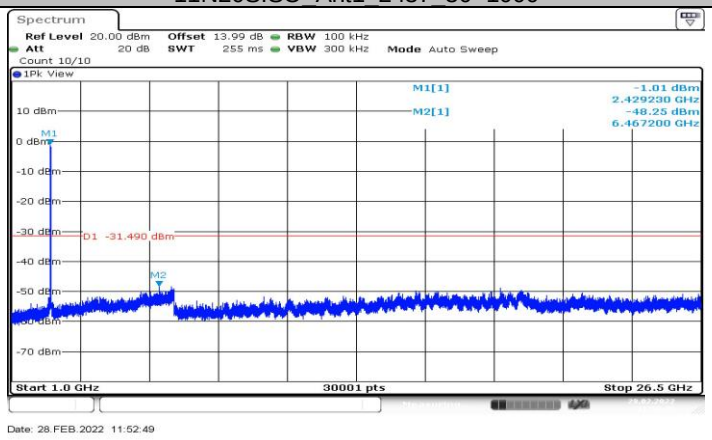

11N20SISO_Ant1_2437_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

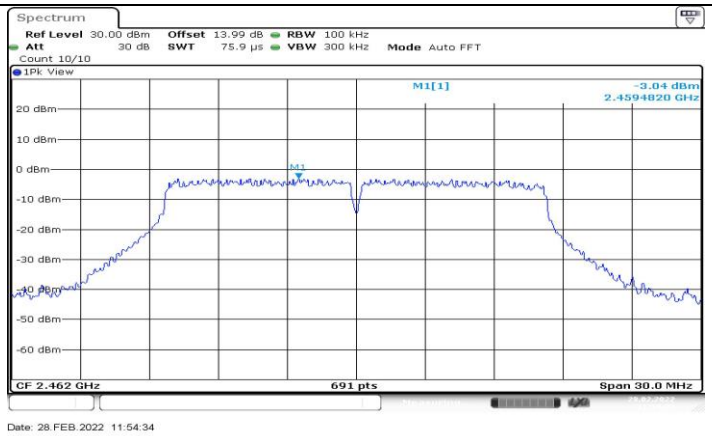

11N20SISO_Ant1_2462_0~Reference

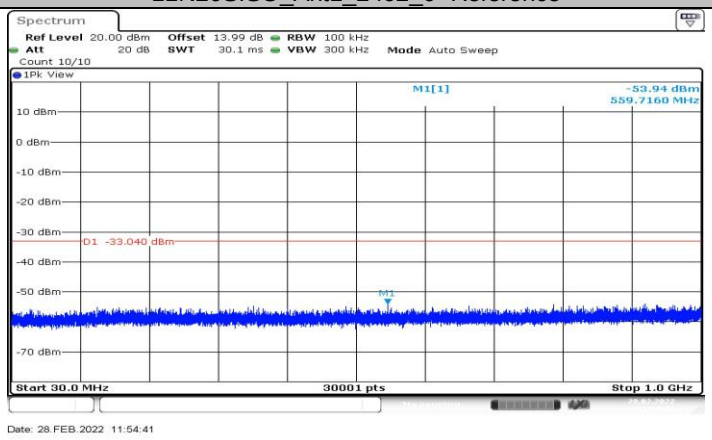

11N20SISO_Ant1_2462_30~1000

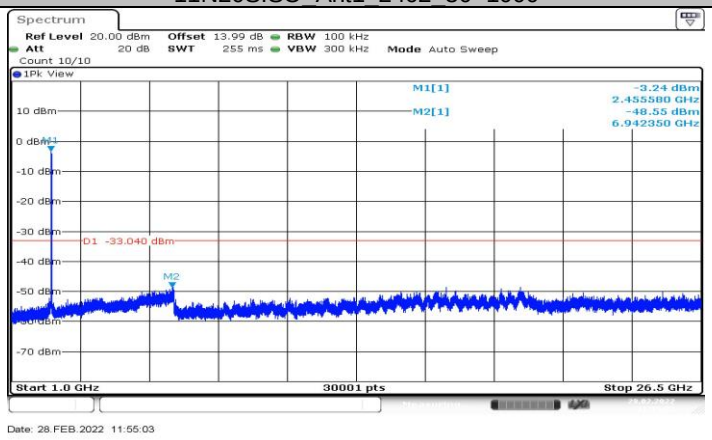

11N20SISO_Ant1_2462_1000~26500

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.7. Appendix G: Duty Cycle

10.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	30.00	30.00	1.0000	100.00	0.00	0.03	0.01
11G	30.00	30.00	1.0000	100.00	0.00	0.03	0.01
11N20SISO	30.00	30.00	1.0000	100.00	0.00	0.03	0.01

Note:
Duty Cycle Correction Factor=10log (1/x).
Where: x is Duty Cycle (Linear)
Where: T is On Time
If that calculated VBW is not available on the analyzer then the next higher value should be used.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10.7.2. Test Graphs

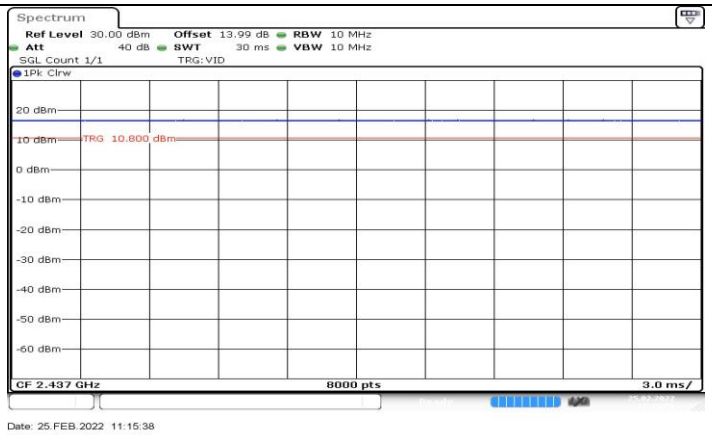

11B_Ant1_2437

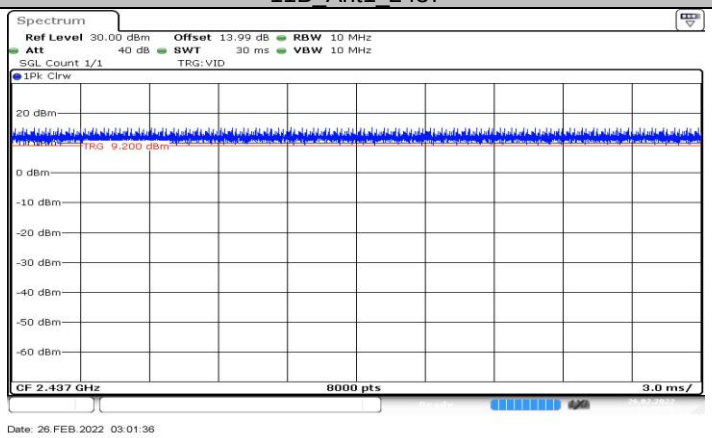

11G_Ant1_2437

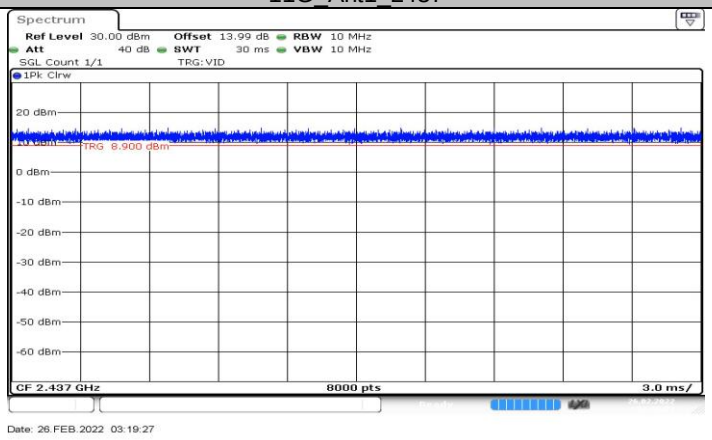

11N20SISO_Ant1_2437

END OF REPORT

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.