

Marking 要求

1. 工艺: 丝印

字体: Arial , 字高: 1.3, 颜色: PMS 430C

2. 2: 1视图尺寸1.3


onn.

Model: WIABLK100008847
Input: DC 5V-12V,1.5A(Max.)
Output: 10W(Max.)
FCC ID: 2APXNLACC1161
MADE IN VIETNAM
22XXB



此处镭雕

3. 镭雕




注: 周别按生产的周别变动而变动


例: 2201B
2202B
2203B

以此类推

无线充, 彩盒, 车充QC镭雕一致

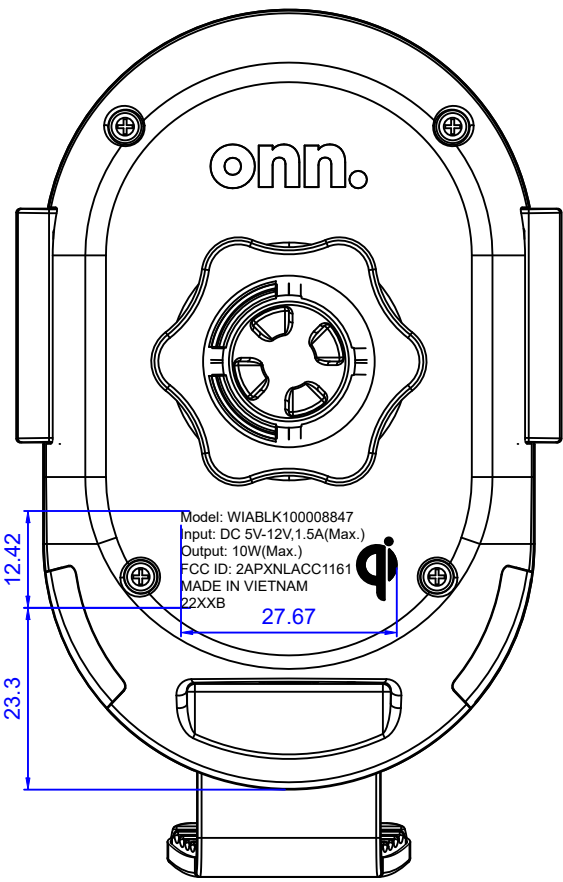


焊线示意图

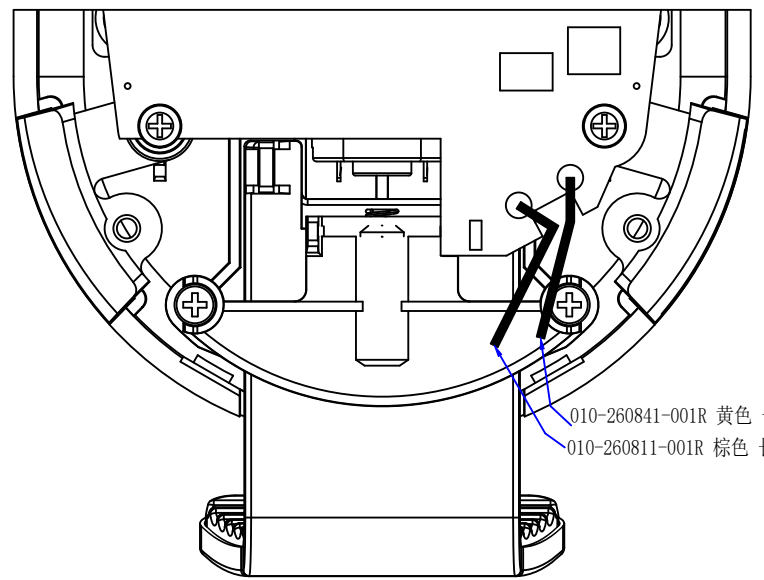

- 1. 线圈焊锡高度不允许超过2.5mm
- 2. 其余焊锡高度不超过1.5mm

规格	项目	规格指标
DC输入特性	输入电压范围	5V-12V
	输入电流	1.5A (Max)
DC输出特性	输出电压电流	5V --- 2A
	输出功率	10W (Max)

X.± 1	X.°±1
.X± 0.3	.X°±0.5
.XX± 0.20	.XX°±0.3
.XXX± 0.100	.XXX°±0.1
UNITS:	mm
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT	

Customer P/N: WIABLK100008847 Customer REV.: D87		LUXSHARE-ICT			
PART NO. L3TWC362-CS-R1		TITLE: 10W车载无线充			
APPD: XIONGWU LI		DWG NO: L3TWC362-CS-R1			
CHKD: DUWEN XIAO					
DRAW: XIN LIU			SCALE	SHEET	REV.
			1:1	2/4	A1