

Test Report

Report Number:

F251882E1

Equipment under Test (EUT):

**Wireless Gateway for On-Blade Sensors
WBSLink**

Applicant:

eologix sensor technology flexco

Manufacturer:

eologix sensor technology flexco



Deutsche
Akkreditierungsstelle
D-PL-17186-01-00

References

- [1] **ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024***, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
*Remark: This standard is not in the annex of the laboratory yet
- [2] **FCC CFR 47 Part 15**, Radio Frequency Devices
- [3] **558074 D01 15.247 Meas Guidance v05r02 (2019-04)**, GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
- [4] **RSS-247 Issue 4 (2025-07)** Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands

Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

“Passed” indicates that the equipment under test conforms with the relevant limits of the testing standard without taking any measurement uncertainty into account as stated in [1]. However, the measurement uncertainty is calculated and shown in this test report.

Tested by:

Signature

Written by:

Signature

Reviewed and
approved by:

Signature

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:	Page
1 Identification	6
1.1 Applicant.....	6
1.2 Manufacturer	6
1.3 Test Laboratory	6
1.4 EUT (Equipment under Test)	7
1.5 Technical Data of Equipment	8
1.6 Ancillary Equipment / Equipment used for testing	9
1.7 Dates	9
2 Operational States	10
2.1 Description of function of the EUT	10
2.1.1 Operation modes	10
2.1.2 Block Diagram (Radiated)	10
2.1.3 Block Diagram (Conducted)	10
3 Additional Information	11
4 Overview.....	11
5 Results.....	12
5.1 Test setups	12
5.1.1 Radiated: 9 kHz to 30 MHz.....	12
5.1.2 Radiated: 30 MHz to 1 GHz.....	14
5.1.3 Radiated: 1 GHz to 40 GHz.....	16
5.1.4 Conducted: Antenna port.....	18
5.1.5 Conducted: AC power line	18
5.2 Transmit antenna performance considerations.....	19
5.3 DTS bandwidth	19
5.3.1 Test setup (DTS bandwidth).....	19
5.3.2 Test method (DTS bandwidth).....	20
5.3.3 Test results (DTS bandwidth)	20
5.4 Occupied bandwidth – power bandwidth (99%).....	21
5.4.1 Test Setup (Occupied bandwidth – power bandwidth (99%))	21
5.4.2 Test method (Occupied bandwidth – power bandwidth (99%))	21
5.4.3 Test results (Occupied bandwidth – power bandwidth (99%)).....	22
5.5 DTS fundamental emission output power	23
5.5.1 Test setup (DTS fundamental emission output power)	23
5.5.2 Test method (DTS fundamental emission output power).....	23

5.5.3	Test results (DTS fundamental emission output power)	24
5.6	DTS maximum power spectral density	26
5.6.1	Test setup (DTS maximum PSD level in the fundamental emission).....	26
5.6.2	Test method (DTS maximum PSD level in the fundamental emission)	26
5.6.3	Test results (DTS maximum PSD level in the fundamental emission).....	27
5.7	DTS band-edge emission measurements.....	29
5.7.1	Test setup (Band edge – unrestricted bands)	29
5.7.2	Test method (Band edge – unrestricted bands)	29
5.7.3	Test results (Band edge – unrestricted bands)	30
5.8	Radiated emissions	32
5.8.1	Test setup (Maximum unwanted emissions)	32
5.8.2	Test method (Maximum unwanted emissions).....	32
5.8.3	Test results (Maximum conducted unwanted emissions).....	32
5.8.4	Test results (Maximum unwanted emissions)	36
5.9	AC power-line conducted emissions	44
5.9.1	Test setup (Conducted emissions on power supply lines)	44
5.9.2	Test method (Conducted emissions on power supply lines)	44
5.9.3	Test results (Conducted emissions on power supply lines)	45
6	Measurement Uncertainties	46
7	Test Equipment used for Tests	47
8	Test site Verification.....	48
9	Report History.....	48
10	List of Annexes	49

1 Identification

1.1 Applicant

Name:	eologix sensor technology flexco
Address:	Waagner-Biro-Str. 124, 8020 Graz
Country:	Austria
Name for contact purposes:	Michael Moser
Phone:	+43-316-931215-100
eMail address:	office@eologix.com
Applicant represented during the test by the following person:	None

1.2 Manufacturer

Name:	eologix sensor technology flexco
Address:	Waagner-Biro-Str. 124, 8020 Graz
Country:	Austria
Name for contact purposes:	Michael Moser
Phone:	+43-316-931215-100
eMail address:	office@eologix.com
Manufacturer represented during the test by the following person:	None

1.3 Test Laboratory

The tests were carried out by: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

accredited by *Deutsche Akkreditierungsstelle GmbH (DAkkS)* according to DIN EN ISO/IEC 17025:2018. The accreditation is only valid for the scope of accreditation listed in the annex of the certificate D-PL-17186-01-00. FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.

1.4 EUT (Equipment under Test)

Test object: *	WBSLink – Wireless Gateway for On-Blade Sensors
Model name: *	WBSLink
Model number: *	Version 2
Order number: *	-
FCC ID: *	2APYI-WBSL22
IC certification number: *	24932-WBSL22
PMN: *	WBSLink
HVIN: *	WBSL22
FVIN: *	WBSL22-W913-26

	EUT number		
	1	2	3
Serial number: *	WBSL22	-	-
PCB identifier: *	-	-	-
Hardware version: *	WBSLink V2.2	-	-
Software version: *	WBSLink-W913-26	-	-

* Declared by the applicant

One EUT was used for all tests.

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

1.5 Technical Data of Equipment

General			
Power supply EUT: *	DC		
Supply voltage EUT: *	U _{nom} = 3.3VDC	U _{min} = 3.0VDC	U _{max} = 3.6VDC
Temperature range: *	-40°C to +85°C		
Lowest / highest internal clock frequency: *	32.768 kHz / 32 MHz		

* Declared by the applicant

Ports / Connectors				
Identification	Connector		Length during test	Shielding (Yes / No)
	EUT	Ancillary		
ANT1	SMA female	-	-	-
ANT2	SMA female	-	-	-
COM	RJ45	-	-	-

Radio frequencies			
Channel 00	913.0 MHz		

Radio part		
Fulfil radio specification: *1	proprietary	
Radio chip: *1	STM32WL55	
Antenna type: *1	Omni Antenna	Panel Antenna with 300mm RG-58 Pigtail
Antenna name: *1	Barracuda OMB.915.B05F21	FG.91.A
Antenna gain: *2	Peak: 5.9 dBi Average: -1.21 dBi	Peak: 7.68 dBi Average: -0.58 dBi
Antenna connector: *1	N male	
Supply voltage radio module: *1	U _{nom} = 3.3 V _{DC}	U _{min} = 3.0 V _{DC} U _{max} = 3.6 V _{DC}
Type of modulation: *1	2-FSK	
Operating frequency range: *1	913.0 MHz	
Number of channels: *1	1	

*1 declared by the applicant

*2 based on the antenna data sheets SPE-22-8-119 – OMB.915.B05F21 dated 2022-08-02 and SPE-24-8-237 – FG.91.A Revision: B dated 2025-06-10 provided by the applicant.

1.6 Ancillary Equipment / Equipment used for testing

Equipment used for testing	
AC adapter * ¹	CONDOR Model: FJ-SW7261201000DU, P/N: S6-121A0V
Laptop * ²	Fujitsu Technology Solutions GmbH, Model: S26391-K471-V100

*¹ Provided by the applicant

*² Provided by the laboratory

Ancillary Equipment	
TS-7680 (eoARM214)	embeddedTS IPC
PS-12VDC-REG-3PB	embeddedTS AC adapter for TS-7680

*¹ Provided by the applicant

1.7 Dates

Date of receipt of test sample:	07.01.2026
Start of test:	08.01.2026
End of test:	12.02.2026

2 Operational States

2.1 Description of function of the EUT

The EUT is a part of a system used for detection of ice and temperature measurement for wind turbines.


The Eologix Wireless Receiver (WBSLink) receives data packets from Eologix wireless blade sensors and can trigger synchronized measurements across multiple sensors for coordinated data acquisition. It is connected to an IPC and features two antenna ports as well as one communication port (CAN and DC power via RJ45). The port 1 is for Transmit and Receive and the port 2 is only for Receive.

2.1.1 Operation modes


Operation mode #	Radio technology	Frequency [MHz]	Modulation / Mode	Ports
1	Proprietary	913	2-FSK	1
2	Proprietary	913	2-FSK	Both ports terminated with 50 Ohm

The radio test modes were activated using a USB connection to the EUT. Using a terminal application (HTerm), commands, which were provided by the applicant, were applied to activate the radio test modes of the EUT.

2.1.2 Block Diagram (Radiated)

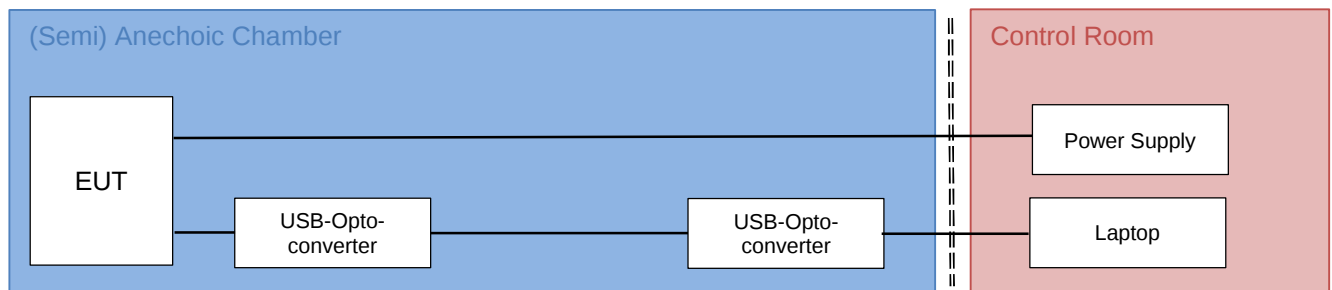

2.1.3 Block Diagram (Conducted)

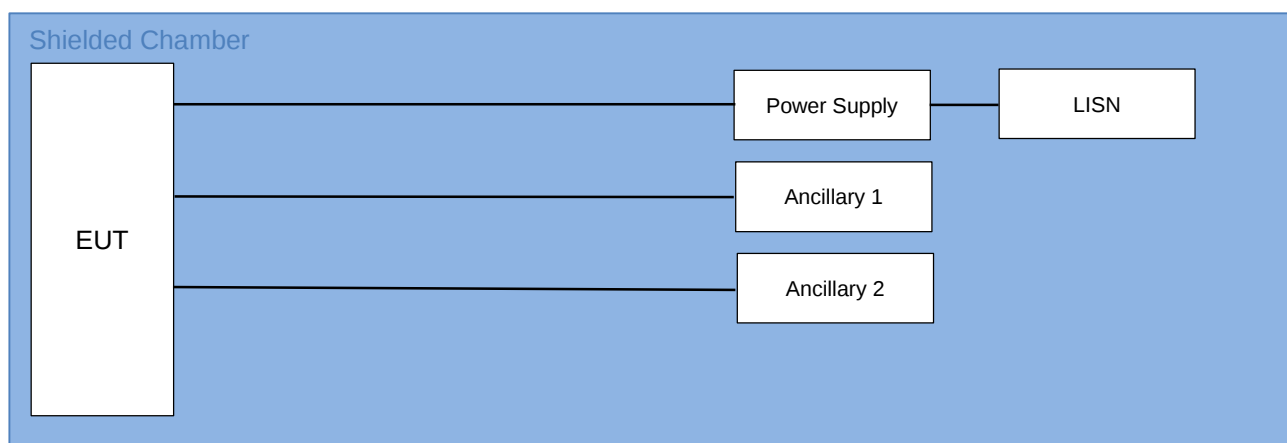

3 Additional Information

The EUT was not labeled as required by FCC / IC.

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS-247 [4] RSS-Gen [5]	Tested EUT	Status
Maximum peak conducted output power	902 - 928	15.247 (b) (3), (4)	6.3.2 [4]	1	Passed
Maximum conducted output power	902 - 928	15.247 (b) (3), (4)	6.3.2 [4]	1	Passed
DTS Bandwidth / 99% Bandwidth	902 - 928	15.247 (a) (2)	6.3.1 [4]	1	Passed
Peak Power Spectral Density	902 - 928	15.247 (e)	6.3.1 [4]	1	Passed
Average Power Spectral Density	902 - 928	15.247 (e)	6.3.1 [4]	1	Passed
Band edge compliance	902 - 928	15.247 (d) 15.205 (a) 15.209 (a)	6.6 [4]	1	Passed
Maximum unwanted emissions	0.009 – 10,000*	15.247 (d) 15.205 (a) 15.209 (a)	8.9 [5]	1	Passed*
Antenna Requirement	-	15.203 15.247 (b) (4)	6.8 [5] 6.5 (c) (ii) [4]	1	Passed
Conducted emissions on supply line	0.15 – 30	15.207 (a)	8.8 [5]	1	Passed

- *: As declared by the applicant the highest radio frequency is 0.913 GHz.
Therefore, the radiated emission measurement must be carried out up to 10th of the highest radio frequency in this case 10 GHz.
The antenna is professionally installed as declared by the applicant.

5 Results

5.1 Test setups

5.1.1 Radiated: 9 kHz to 30 MHz


5.1.1.1 Preliminary measurement 9 kHz to 30 MHz

In the first stage a preliminary measurement is performed in a semi-anechoic chamber at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

The frequency range 9 kHz to 30 MHz is monitored with an EMI receiver while the system and its cables are manipulated to find out the configuration with the maximum emission levels if applicable. The EMI receiver is set to MAX hold mode. The EUT and the measuring antenna are rotated around their vertical axis to find the maximum emission levels.

The resolution bandwidth of the EMI receiver is set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

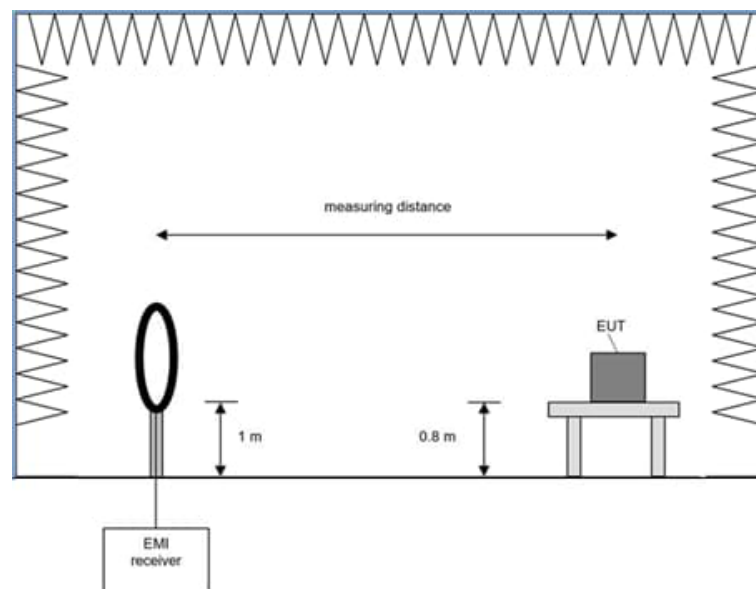

Procedure preliminary measurement:

Pre-scans are performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure is used:

- 1) Monitor the frequency range with the measuring antenna facing the EUT and an EUT / turntable azimuth of 0 °.
- 2) Manipulate the system cables to produce the maximum levels of emissions.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Measure the frequencies of the highest detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency values.
- 5) If the EUT is portable or ceiling mounted, repeat steps 1 to 4 with other orientations (x,y,z) of the EUT.
- 6) Rotate the measuring antenna and repeat steps 1 to 5.


5.1.1.2 Final measurement 9 kHz to 30 MHz

In the second stage a final measurement is performed on an open area test site with no conducting ground plane at a measuring distance of 3 m, 10 m, or 30 m. If the standard requires larger measuring distances for a given frequency, the results are extrapolated according to section 15.31 (f) (2) [2]. The final measurement is performed with an EMI receiver set to Quasi-Peak detector, except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an Average detector is used according to section 15.209 (d) [2].

At the frequencies, which were detected during the preliminary measurements, the final measurement is performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum level value is found.

The resolution bandwidth of the EMI receiver is set to the following values:

Frequency range	Resolution bandwidth	Measuring time
9 kHz to 150 kHz	200 Hz	1 s
150 kHz to 30 MHz	9 kHz	1 s

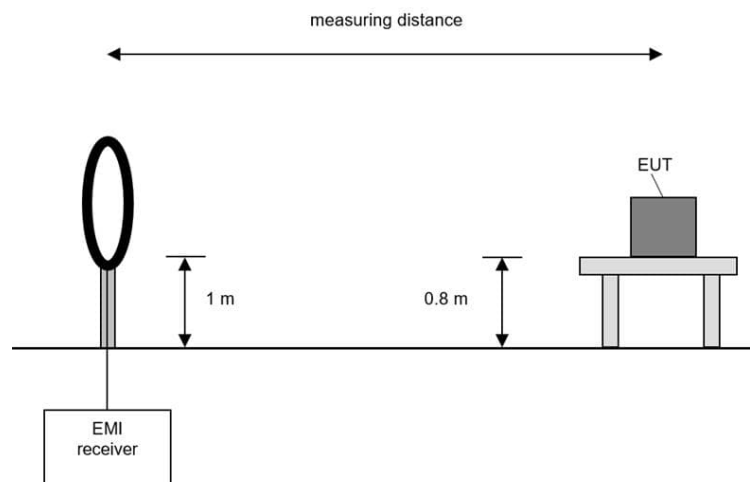

Procedure final measurement:

The following procedure is used:

- 1) Monitor the selected frequencies from the preliminary measurement with the measuring antenna facing the EUT and an EUT azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals.
- 3) Rotate the measuring antenna and repeat steps 1 to 2 until the maximum value is found and note it.
- 4) If the EUT is portable or ceiling mounted, repeat steps 1 to 3 with other orientations (x,y,z) of the EUT.

5.1.2 Radiated: 30 MHz to 1 GHz


5.1.2.1 Preliminary and final measurement 30 MHz to 1 GHz

The preliminary and final measurements are performed in a semi-anechoic chamber with a metal ground plane at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 °, the measuring antenna is set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	30 MHz to 1 GHz	30 kHz	120 kHz	-	Peak Average
Frequency peak search	± 120 kHz	10 kHz	120 kHz	1 s	Peak
Final measurement	30 MHz to 1 GHz	-	120 kHz	1 s	QuasiPeak

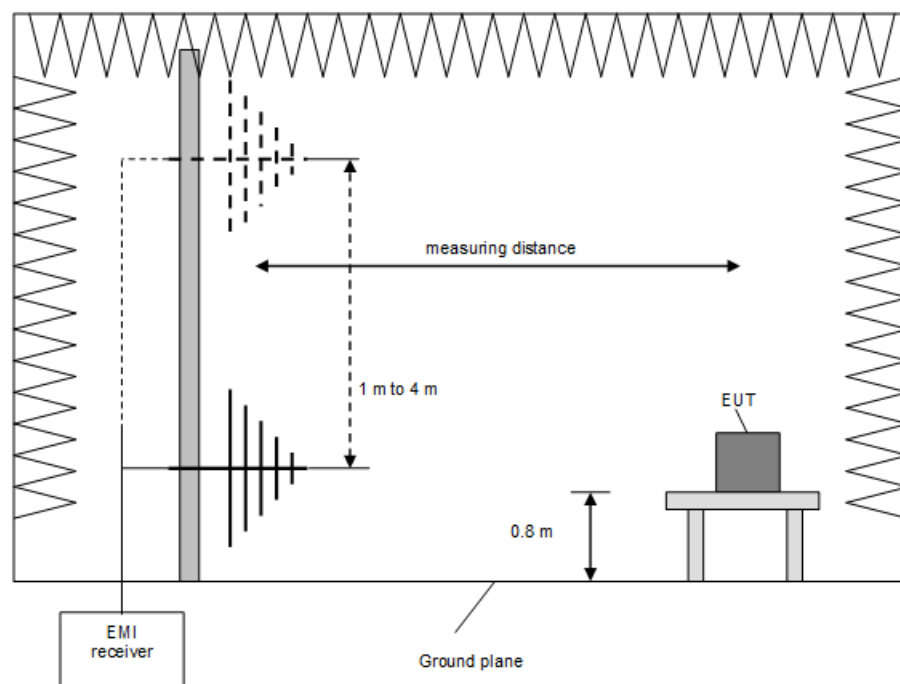

Procedure preliminary measurement:

The following procedure is used:

- 1) Set the measuring antenna to 1 m height.
- 2) Monitor the frequency range at horizontal polarization of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 3) Rotate the EUT by 360° to maximize the detected signals.
- 4) Repeat steps 2 to 3 with the vertical polarization of the measuring antenna.
- 5) Increase the height of the measuring antenna for 0.5 m and repeat steps 2 to 4 until the final height of 4 m is reached.
- 6) The highest values for each frequency are saved by the software, including the measuring antenna height and polarization and the turntable azimuth for that value.

Procedure final measurement:

The following procedure is used:

- 1) Select the highest frequency peaks (lowest margin to the limit) for the final measurement.
- 2) The software determines the exact peak frequencies by doing a partial scan with reduced step size of the pre-scan of the selected peaks.
- 3) If the EUT is portable or ceiling mounted, find the worst-case EUT orientation (x,y,z) for the final test.
- 4) The worst-case measuring antenna height is found via varying the height by +/- 0.5 m from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 6) The final measurement is performed at the worst-case measuring antenna height and the worst-case turntable azimuth.
- 7) Steps 2 to 6 are repeated for each frequency peak selected in step 1.

5.1.3 Radiated: 1 GHz to 40 GHz


5.1.3.1 Preliminary and final measurement 1 GHz to 40 GHz

The preliminary and final measurements are performed in a fully anechoic chamber at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting turn device at the height of 1.5 m. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 ° and the measuring antenna is set to horizontal and vertical polarization to find the maximum level of emissions. After these steps, the measurement is repeated after reorientating the EUT in 30 ° steps.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	1 - 40 GHz	250 kHz	1 MHz	-	Peak Average
Final measurement	1 - 40 GHz	-	1 MHz	100 ms	Peak Average

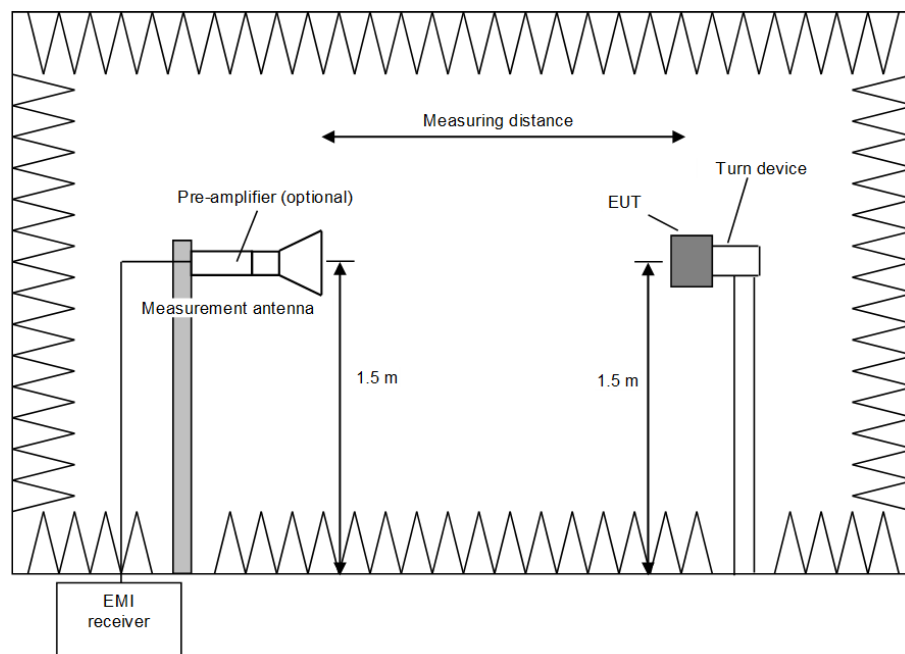

Procedure preliminary measurement:

The following procedure is used:

- 1) Monitor the frequency range at horizontal polarisation of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 2) Rotate the EUT by 360° to maximize the detected signals.
- 3) Repeat steps 1 to 2 with the vertical polarisation of the measuring antenna.
- 4) Repeat steps 1 to 3 with the EUT reorientated by an angle of 30° (60°, 90°, 120° and 150°), according to 6.6.5.4 in [1].
- 5) The highest values for each frequency are saved by the software, including the measuring antenna polarization, the turntable azimuth and the turn device elevation for that value.


Procedure final measurement:

The following procedure is used:

- 1) Set the turntable and the turn device to the position which leads to the highest emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna to the polarisation which leads to the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with Peak and Average detector activated.
- 4) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The final measurement is performed at the worst-case turntable azimuth.
- 6) Repeat steps 1 to 5 for each frequency detected during the preliminary measurements.

5.1.4 Conducted: Antenna port

Test setup (conducted)		
Used	Antenna connector	Comment
☐	Temporary antenna connector	As provided by the applicant
☒	Normal antenna connector	-

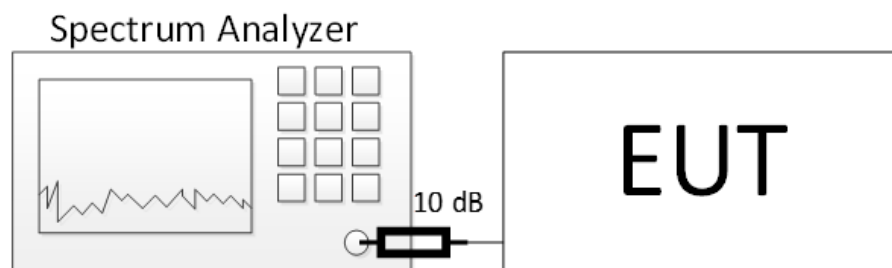


The 10 dB external attenuation are considered in all relevant plots

5.1.5 Conducted: AC power line

The test is carried out in a shielded chamber. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices are placed directly on the ground plane. In case of DC powered equipment, which is not exclusively powered by a battery, it is connected to the LISN via a suitable AC/DC adaptor. The setup of the equipment under test is in accordance with [1].

The frequency range 150 kHz to 30 MHz is measured with an EMI receiver set to MAX hold mode with Peak and Average detectors and a resolution bandwidth of 9 kHz. A scan is carried out on the phase and neutral line of the AC mains network. If emissions less than 10 dB below the appropriable limit are detected, these emissions are measured with an Average and Quasi-Peak detector on all lines.

Frequency range	Resolution bandwidth	Measuring time
150 kHz to 30 MHz	9 kHz	5 s

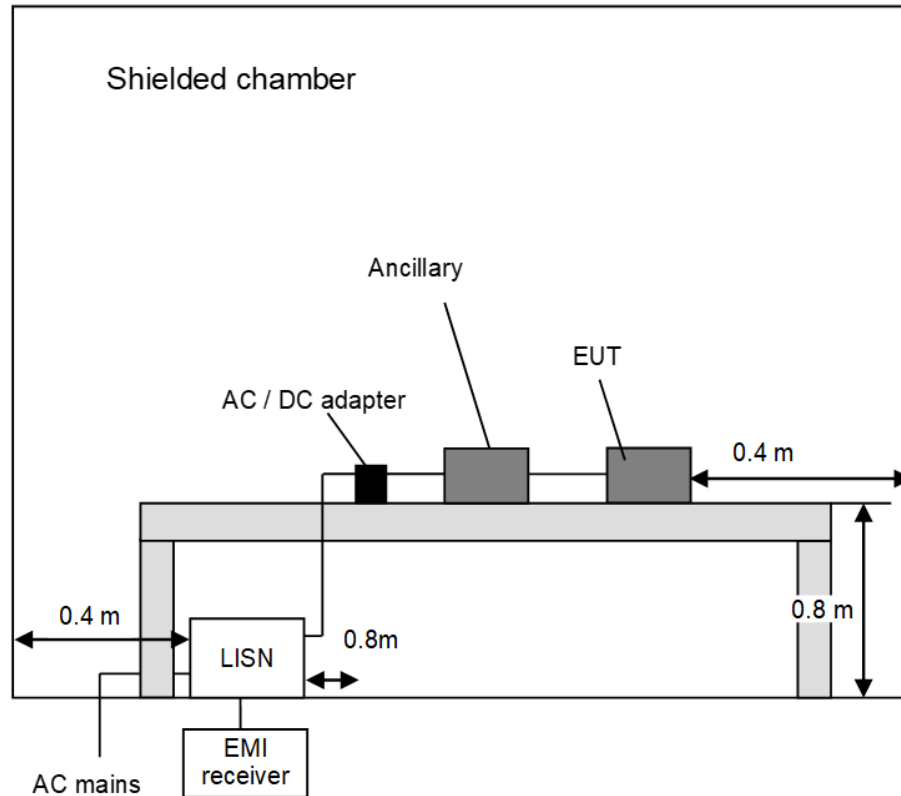

5.2 Transmit antenna performance considerations

Test setup (Transmit antenna performance considerations)		
Integral antenna	Antenna gain $\geq 6\text{dBi}$	Comment
☐	☒	Output power reduction necessary*

*The conducted output power from the intentional radiator shall be reduced below the limit values by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The highest gain supported is 7.68 dBi, so the output power shall be reduced by 1.68 dB.

5.3 DTS bandwidth

5.3.1 Test setup (DTS bandwidth)

Test setup (DTS bandwidth)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	-	-
☒	Conducted: Antenna port	5.1.4	-

5.3.2 Test method (DTS bandwidth)


Test method (DTS bandwidth)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.8.1	Option 1	No limitations	-
☐	11.8.2	Option 2	No limitations	6 dB down function

5.3.3 Test results (DTS bandwidth)

Ambient temperature:	22 °C
Relative humidity:	29 %

Date:	08.01.2026
Tested by:	P. NEUFELD

Plot (operation mode 1):

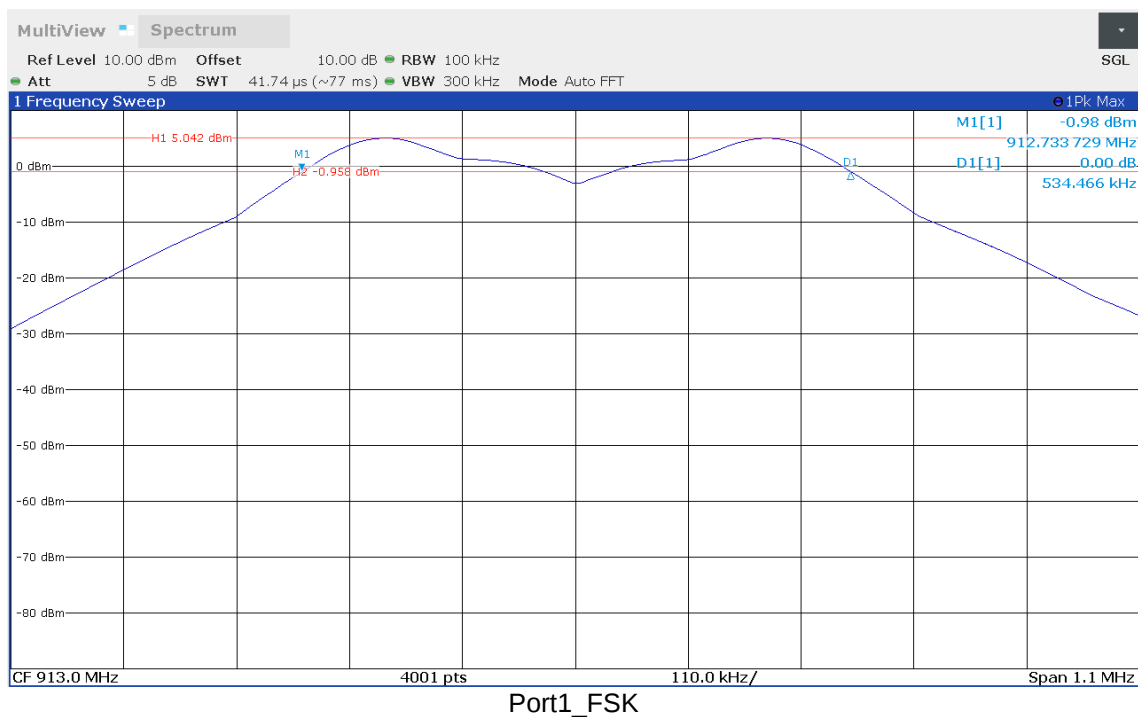

Operation mode #	DTS bandwidth [MHz]	Minimum DTS bandwidth Limit [MHz]
1	0.5345	0.5

Test result: Passed

Test equipment (please refer to chapter 7 for details)
6

5.4 Occupied bandwidth – power bandwidth (99%)

5.4.1 Test Setup (Occupied bandwidth – power bandwidth (99%))

Test setup (Occupied bandwidth – power bandwidth (99%))			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	-	-
☒	Conducted: Antenna port	5.1.4	-

5.4.2 Test method (Occupied bandwidth – power bandwidth (99%))

Test method (Occupied bandwidth – power bandwidth (99%))				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	6.9.2	Relative measurement procedure	-	n-dB down
☒	6.9.3	Power bandwidth (99%)	*1	99% power function


*1 See RSS-GEN Issue 5 (2018-05) sub-clause 6.7 for details.

5.4.3 Test results (Occupied bandwidth – power bandwidth (99%))

Ambient temperature:	22 °C
Relative humidity:	29 %

Date:	08.01.2026
Tested by:	P. NEUFELD

Plot (operation mode 1):

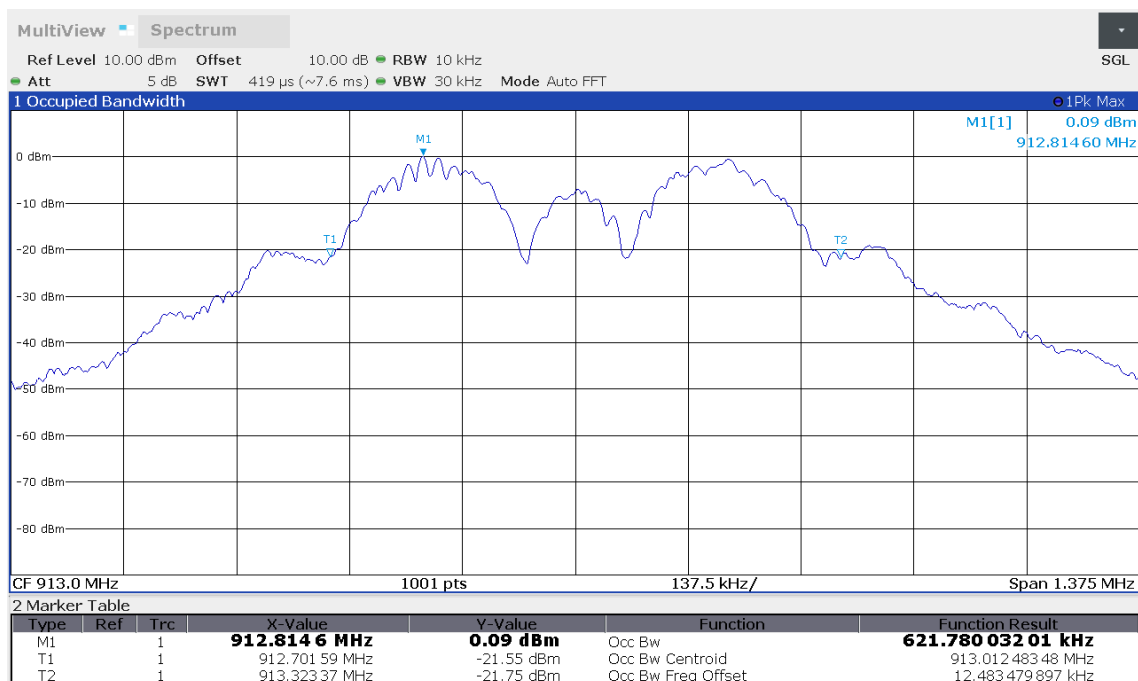

Operation mode #	99% bandwidth [MHz]
1	0.6218

Test result: Passed

Test equipment (please refer to chapter 7 for details)
6

5.5 DTS fundamental emission output power

5.5.1 Test setup (DTS fundamental emission output power)

Test setup (DTS fundamental emission output power)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	-	-
☒	Conducted: Antenna port	5.1.4	-

5.5.2 Test method (DTS fundamental emission output power)

Test method (Maximum peak conducted output power)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.9.1.1	RBW $\geq$ DTS bandwidth	-	-
☐	11.9.1.2	PKPM1 Peak power meter method* ¹	-	-

*¹ VBW of the peak power meter has to be $>$ OBW of the fundamental.

Test method (Maximum conducted (average) output power)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.9.2.2.2	Method AVGSA-1	$D \geq 98\%$	-
☐	11.9.2.2.3	Method AVGSA-1A (alternative)	$D \geq 98\%$	-
☐	11.9.2.2.4	Method AVGSA-2	Constant D ($\pm 2\%$)	-
☐	11.9.2.2.5	Method AVGSA-2A (alternative)	Constant D ($\pm 2\%$)	-
☐	11.9.2.2.6	Method AVGSA-3A	-	-
☐	11.9.2.2.7	Method AVGSA-3A (alternative)	-	-
☐	11.9.2.3.1	Method AVGPM	Constant D ($\pm 2\%$)	-
☐	11.9.2.3.2	Method AVGPM-G	-	-


5.5.3 Test results (DTS fundamental emission output power)

Ambient temperature:	22 °C
Relative humidity:	29 %

Date:	08.01.2026
Tested by:	P. NEUFELD

5.5.3.1 Maximum peak conducted output power

Plot (operation mode 1):

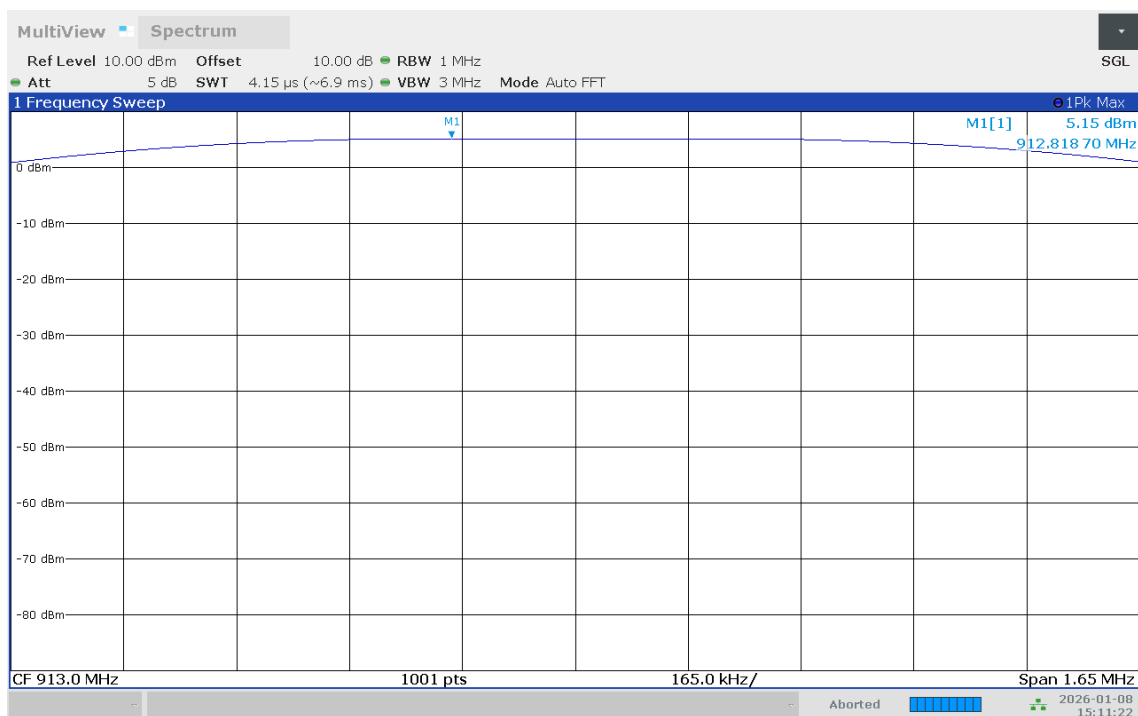

Operation mode	Reading [dBm]	Corr. Fact. [dB]	Result [dBm]	PK power Limit [dBm]
1	5.15	0.0	5.15	28.32*

*Reduced limit, because of the antenna gain over 6 dBi.


Operation mode	PK conducted power [dBm]	Highest antenna Gain [dBi]	Cable loss [dB]	EIRP Result [dBm]	EIRP Limit [dBm]
1	5.15	7.68	0.0	12.83	36.0

Test result: Passed

Test equipment (please refer to chapter 7 for details)
6

5.5.3.2 Maximum conducted (average) output power

Plot (operation mode 1):

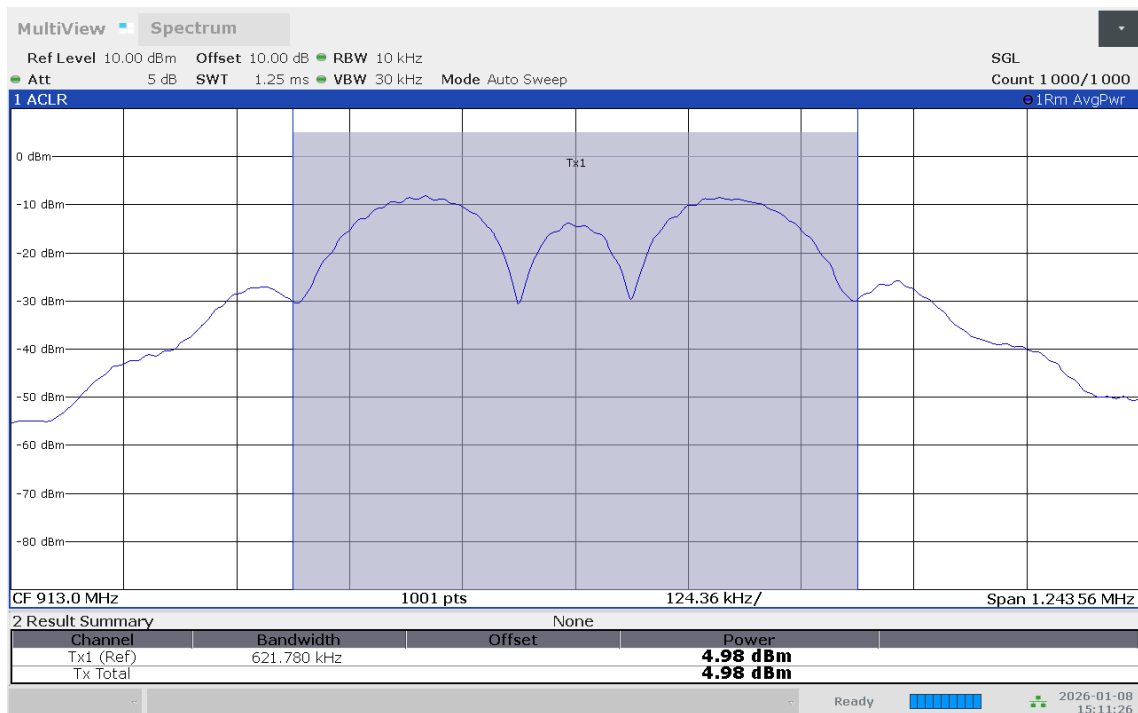

Operation mode	Reading [dBm]	Corr. Fact. [dB]	DCCF [dB]	Result [dBm]	Limit [dBm]
1	4.98	0.0	0.0	4.98	28.32*

*Reduced limit, because of the antenna gain over 6 dBi.

Test result: Passed

Test equipment (please refer to chapter 7 for details)

6

5.6 DTS maximum power spectral density

5.6.1 Test setup (DTS maximum PSD level in the fundamental emission)

Test setup (DTS fundamental emission output power)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	-	-
☒	Conducted: Antenna port	5.1.4	-

5.6.2 Test method (DTS maximum PSD level in the fundamental emission)

Test method (Maximum <i>peak</i> power spectral density level in the fundamental emission)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☐	11.10.2	Method PKPSD (peak PSD)	No limitations	-

Test method (Maximum <i>average</i> power spectral density level in the fundamental emission)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.10.3	Method AVGPSD-1	D ≥ 98%	-
☐	11.10.4	Method AVGPSD-1A (alternative)	D ≥ 98%	-
☐	11.10.5	Method AVGPSD-2	Constant D (±2%)	-
☐	11.10.6	Method AVGPSD-2A (alternative)	Constant D (±2%)	-
☐	11.10.7	Method AVGPSD-3	No limitations	-
☐	11.10.8	Method AVGPSD-3A (alternative)	No limitations	-


5.6.3 Test results (DTS maximum PSD level in the fundamental emission)

Ambient temperature:	22 °C
Relative humidity:	29 %

Date:	08.01.2026
Tested by:	P. NEUFELD

5.6.3.1 Maximum peak PSD


Plot (operation mode 1):

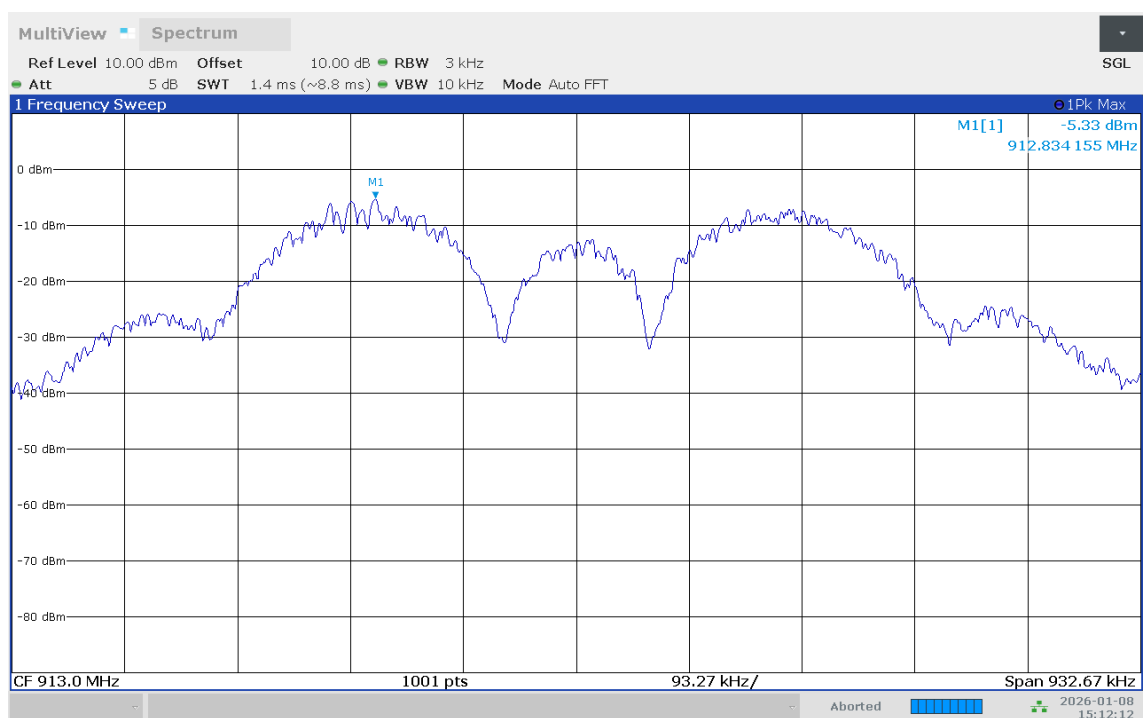

Operation mode	Reading [dBm/3 kHz]	Corr. Fact. [dB]	DCCF [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]
1	- 5.33	0.0	0.0	- 5.33	8.0

5.6.3.2 Maximum average PSD

Plot (operation mode 1):

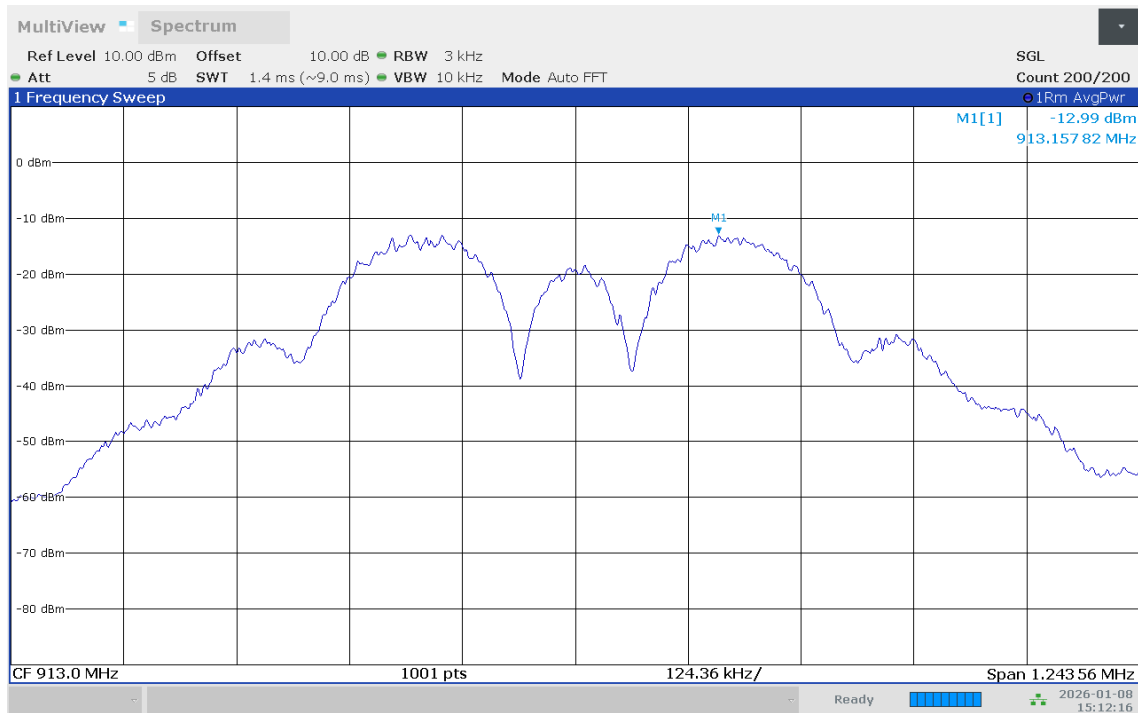

Operation mode	Reading [dBm/3 kHz]	Corr. Fact. [dB]	DCCF [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]
1	- 12.99	0.0	0.0	- 12.99	8.0

Test result: Passed

Test equipment (please refer to chapter 7 for details)

6

5.7 DTS band-edge emission measurements

5.7.1 Test setup (Band edge – unrestricted bands)

Test setup (Band edge – unrestricted bands)			
Used	Setup	See sub-clause	Comment
☐	Radiated: 1 GHz to 40 GHz	-	-
☒	Conducted: Antenna port	5.1.4	-

5.7.2 Test method (Band edge – unrestricted bands)

Test method (Band edge – unrestricted bands)				
Used	Sub-Clause [1]	Name of method	Applicability	Comment
☒	11.11.	20 dBc (Peak)	Peak power	*1
☐	11.11.	30 dBc (Average)	RMS power	*2

*1 As declared in "47 CFR 15.247(d)" In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits


*2 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.7.3 Test results (Band edge – unrestricted bands)


Ambient temperature:	22 °C
Relative humidity:	29 %

Date:	08.01.2026
Tested by:	P. NEUFELD

Plot Lower band edge (operation mode 1):

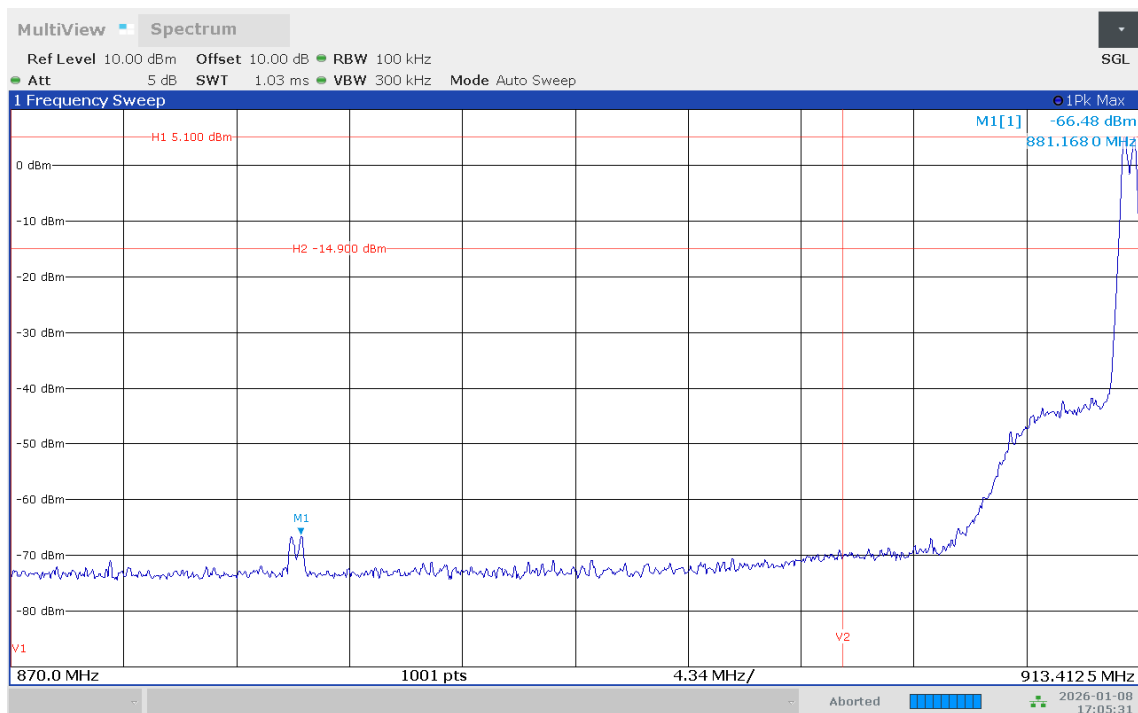

Plot Upper band edge (operation mode 1):

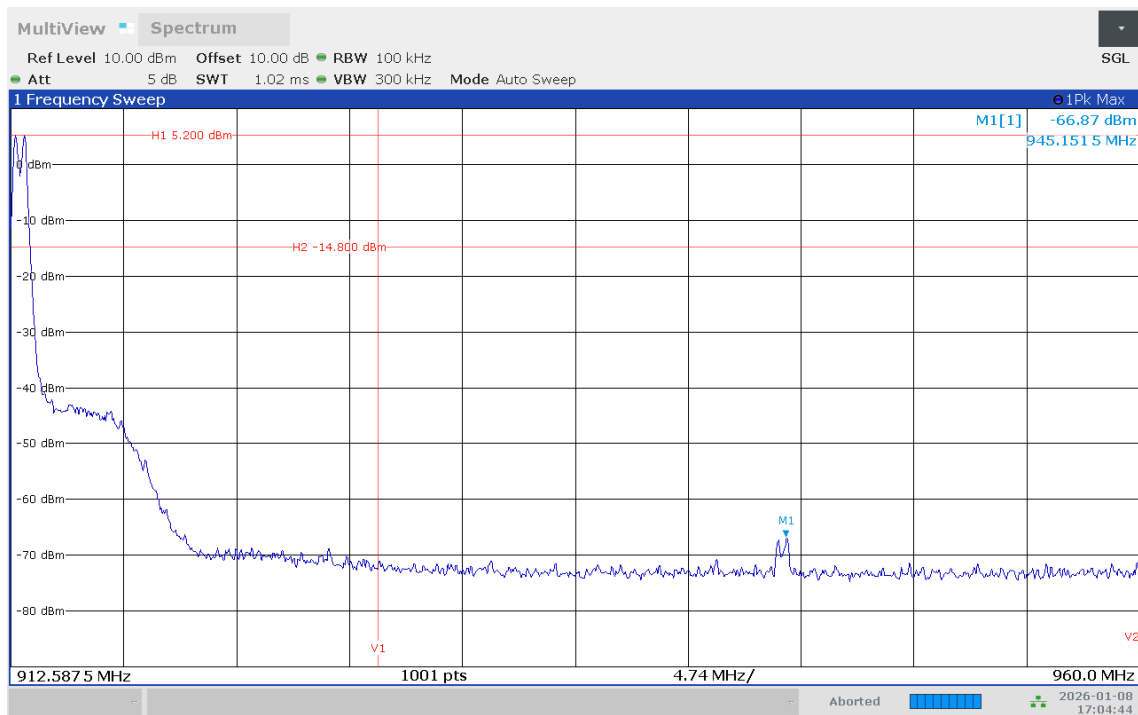

Test result: Passed

Test equipment (please refer to chapter 7 for details)

6

5.8 Radiated emissions

5.8.1 Test setup (Maximum unwanted emissions)


Test setup (Maximum unwanted emissions)			
Used	Setup	See sub-clause	Comment
☒	Radiated: 9 kHz to 30 MHz / 30 MHz to 1 GHz / 1 GHz to 40 GHz	5.1.1, 5.1.2, 5.1.3	Cabinet radiation
☒	Conducted: Antenna port	5.1.4	-

5.8.2 Test method (Maximum unwanted emissions)


☒ Test method (radiated) see sub-clause 5.1.1, 5.1.2, 5.1.3
as described herein

5.8.3 Test results (Maximum conducted unwanted emissions)


Plot (operation mode 1):

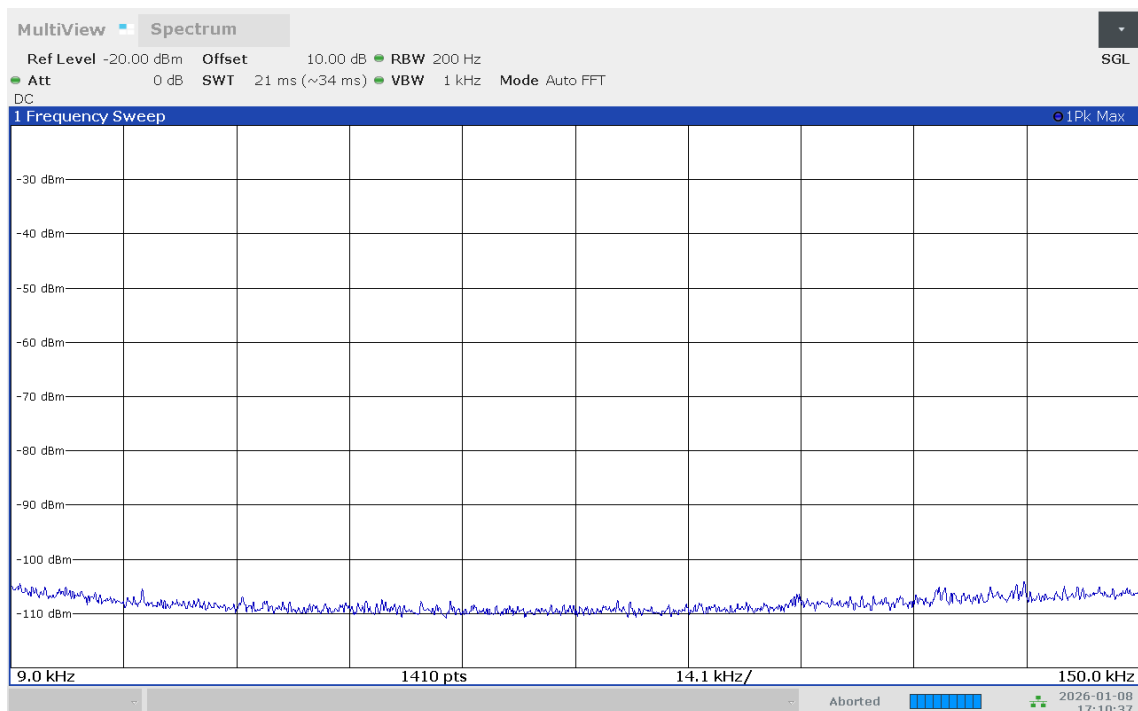


Plot (operation mode 1):

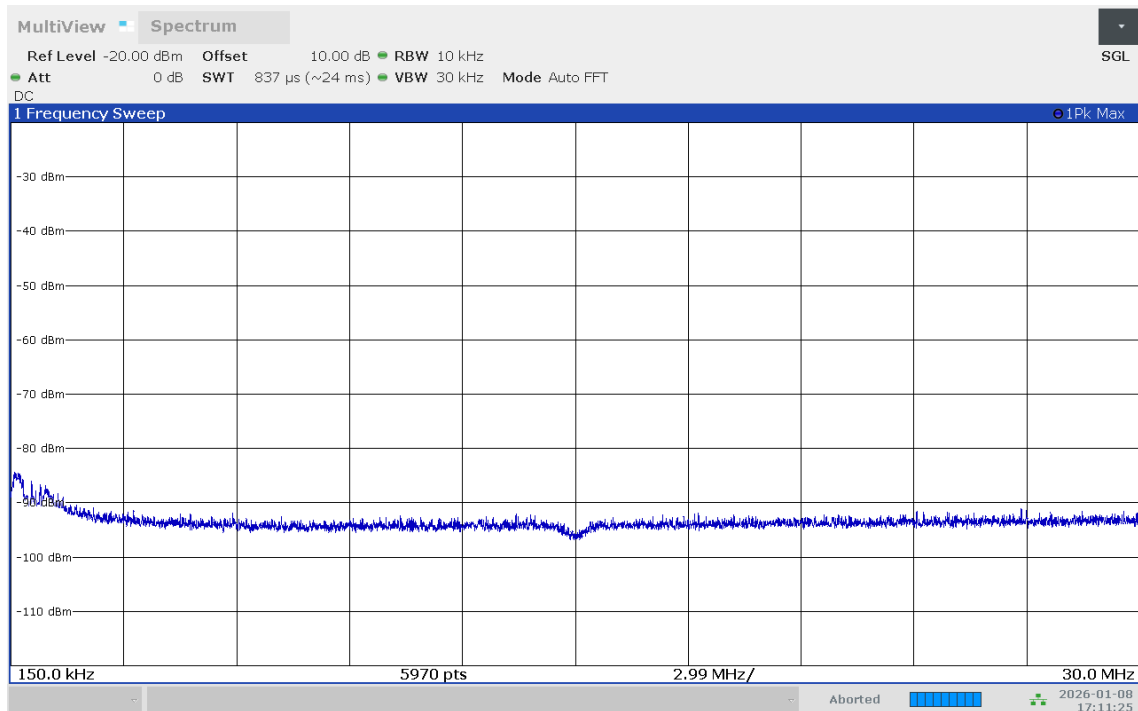


Plot (operation mode 1):

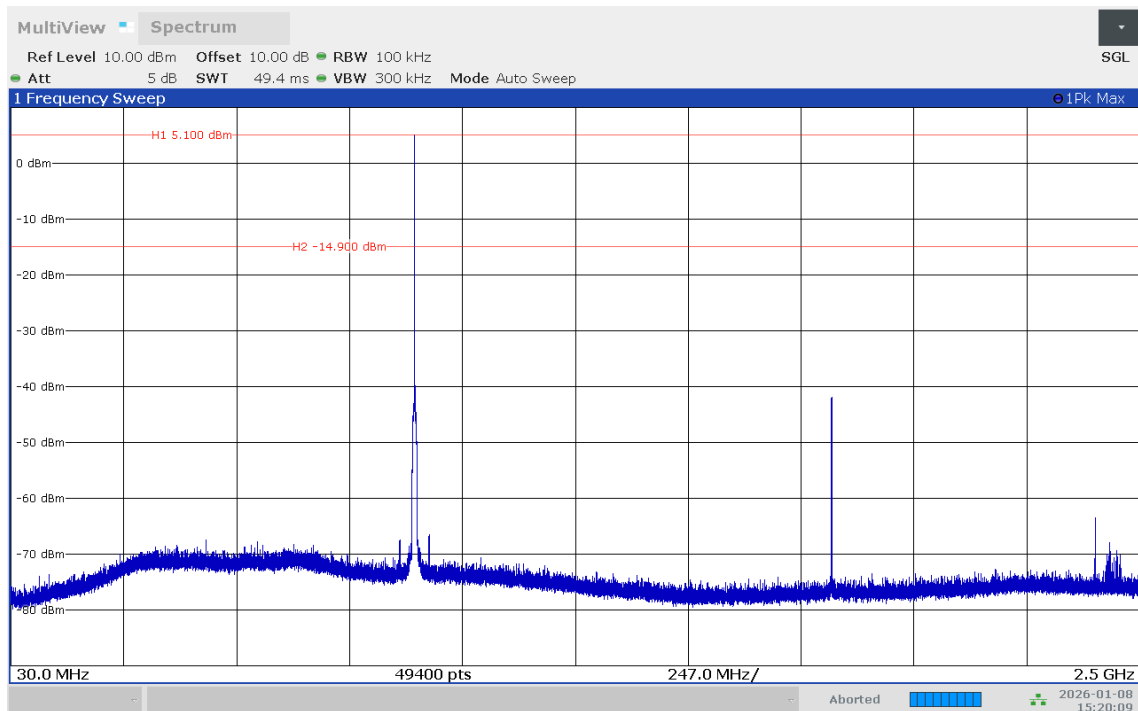

Plot (operation mode 1):

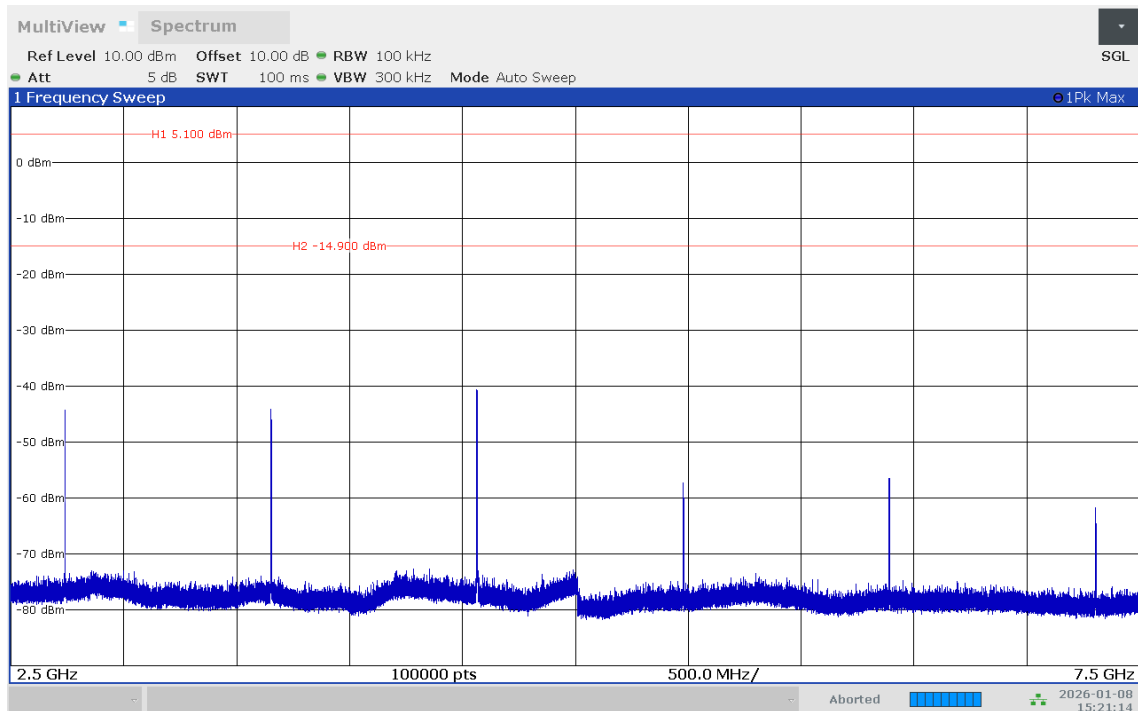

Plot (operation mode 1):

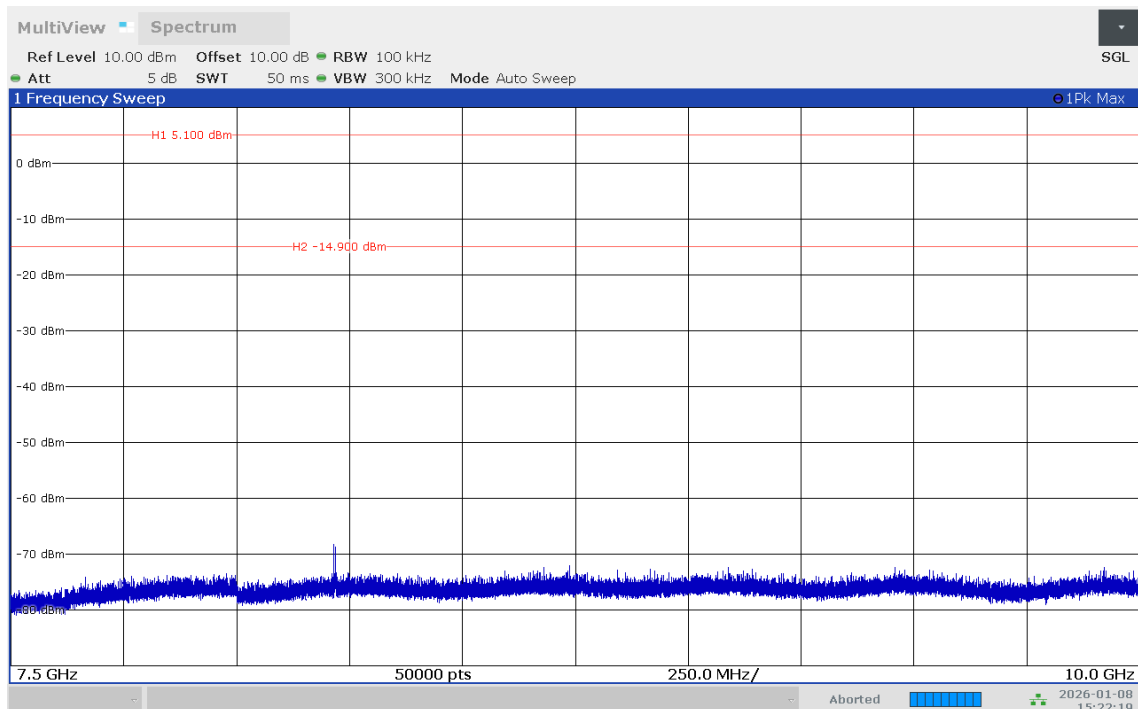

Frequencies in the unrestricted bands:

Frequency [MHz]	Emission Level [dBm]	Reference Level [dBm]	Limit [dBm]	Margin [dB]	Result
1826.375	-42.0	5.1	-14.9	27.1	Passed
5476.9548	-64.4	5.1	-14.9	49.5	Passed
6392.325	-56.5	5.1	-14.9	41.6	Passed

Frequencies in the restricted bands:

To show compliance to §15.209 for the frequencies, which fall into restricted bands, the power values of the conducted emissions have been converted to field strength values using the following formula:

$$E \text{ [dBuV/m]} = P \text{ [dBm]} + \text{AntennaPorts Corr. [dB]} + \text{Antenna gain [dBi]} + 95.2 \text{ [dB]}$$

Frequency [MHz]	Peak P [dBm]	Antenna gain [dBi]	Antenna Ports Corr [dB]	Peak E [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Result
2738.4598	-44.1	7.68	0	58.9	74	15.1	Passed
3651.1866	-43.9	7.68	0	59.1	74	14.9	Passed
4564.0452	-40.7	7.68	0	62.3	74	11.7	Passed

Frequency [MHz]	Average P [dBm]	Antenna gain [dBi]	Antenna Ports Corr. [dB]	Average E [dBuV/m]	Limit [dBuV/]	Margin [dB]	Result
2739.0092	-48.2	7.68	0	54.7	54	-0.7	Failed*
3652.5552	-50.9	7.68	0	52	54	2	Passed
4564.275	-47.3	7.68	0	55.7	54	-1.7	Failed*

*The frequencies that failed to comply with §15. 209 using the arithmetic conversion above have been additionally tested in radiated manner using the antennas FG.91.A and OMB.915.B05F21 and the results are presented in the chapter 5.8.4.3.

Test result: Passed

Test equipment (please refer to chapter 7 for details)
6

5.8.4 Test results (Maximum unwanted emissions)

5.8.4.1 Test results preliminary measurement 9 kHz to 30 MHz

Ambient temperature:	22 °C
Relative humidity:	23 %

Date:	09.01.2026
Tested by:	P. NEUFELD

Position of EUT: For tests for f between 9 kHz to 30 MHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: The measurement value was already corrected by 40 dB/decade as described in 47 CFR 15.31(f)(2) regarding to the measurement distance as requested in 47 CFR 15.209(a)

Remark: Only one position was tested, as described in the test setup photos

Calculations:


Result @ norm. dist. [dBμV/m] = Reading [dBμV] + AF [dB/m] + Distance corr. fact. [dB]

Result @ norm. dist. [dBμA/m] = Result @ norm. dist. [dBμV/m] – 20 x log₁₀(377 Ω)

Margin [dB] = Limit [dB(μV|μA)/m] - Result [dB(μV|μA)/m]

Plot:

Spurious emissions from 9 kHz to 30 MHz (operating mode 2):

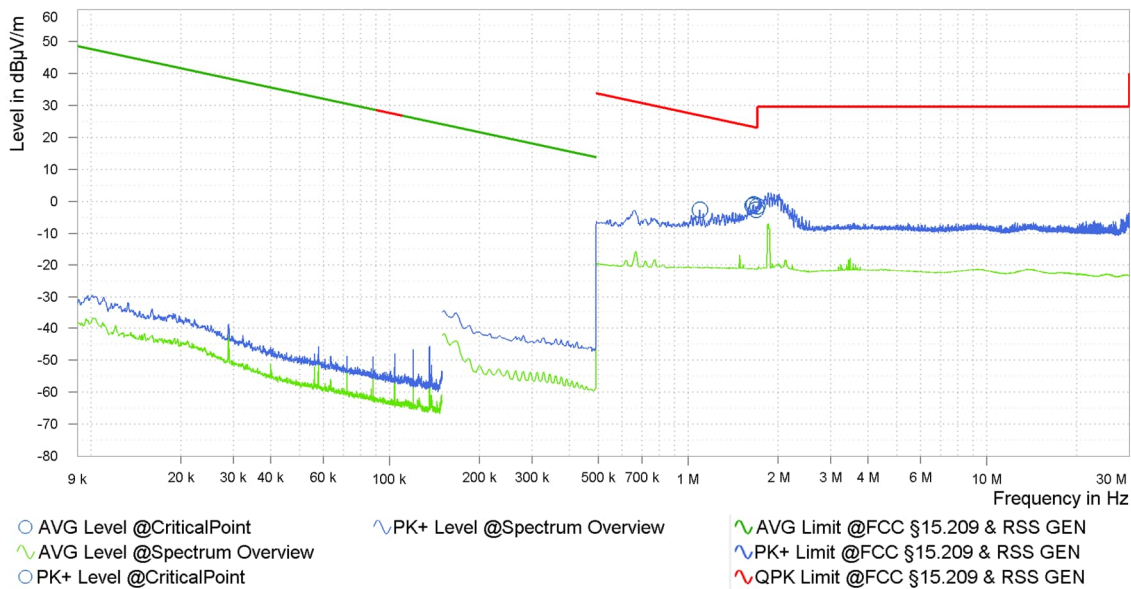

Remark: No emissions closer than 20 dB to the limit, so no final measurement will be carried out.

Test result: Passed

Test equipment (please refer to chapter 7 for details)
5, 7-13

5.8.4.2 Test results (30 MHz – 1 GHz)

Ambient temperature:	22 °C
Relative humidity:	23 %

Date:	09.01.2026
Tested by:	P. NEUFELD

Position of EUT: For tests for f between 30 MHz to 1 GHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: The EUT was only tested in the nominal position as declared by the applicant.

Calculations:

Result [dBμV/m] = Reading [dBμV] + Correction [dB/m]


Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB]

Margin [dB] = Limit [dBμV/m] - Result [dBμV/m]

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with “◇” are the measured results of the standard subsequent measurement in a semi-anechoic chamber.

Plot:

Spurious emissions from 30 MHz to 1 GHz (operation mode 2):

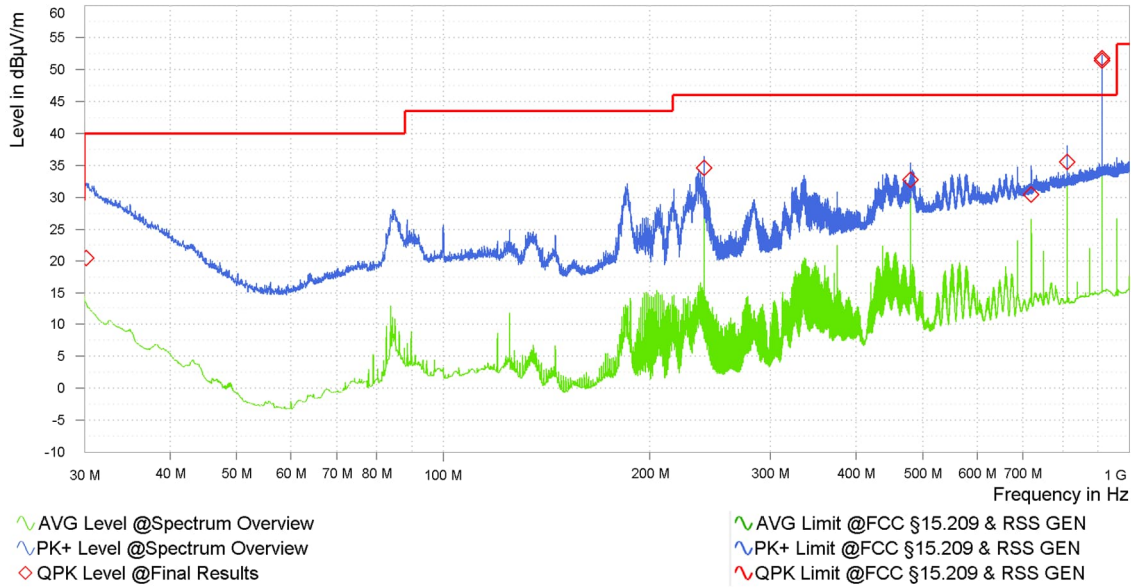

Result tables:

(Operation mode 2):

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
30.190	20.50	40.00	19.50	26.54	V	165	1.23	120.000	1.000
240.010	34.61	46.00	11.39	17.00	H	159	1.00	120.000	1.000
480.010	32.78	46.00	13.22	23.64	H	5	2.20	120.000	1.000
720.010	30.42	46.00	15.58	27.37	H	221	1.03	120.000	1.000
812.500	35.57	46.00	10.43	28.70	H	5	1.12	120.000	1.000

Test result: Passed

Test equipment (please refer to chapter 7 for details)
3-4, 7-13

5.8.4.3 Test results (radiated 1 GHz to 40 GHz)

Ambient temperature:	22 °C
Relative humidity:	23 %

Date:	09.01.2026
Tested by:	P. NEUFELD

Position of EUT: For tests for f between 1 GHz and the 10th harmonic, the EUT was set-up on a positioner device with a height of 150 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: -

Calculation:

Max Peak [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Average [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB] + DCCF* [dB]
* (if applicable – only for Average values, that are fundamental related)


Margin [dB] = Limit [dBμV/m] – Max Peak | Average [dBμV/m]

The curves in the diagram only represent the maximum measured value for each frequency point of all preliminary measurements, which were carried out with various EUT and antenna positions.

The top measured curve represents the peak measurement. The measured points marked with "◇" are frequency points for the final peak detector measurement. These values are indicated in the following table. The bottom measured curve represents the average measurement. The measured points marked with "◊" are frequency points for the final average detector measurement.

Worst case plots:

Spurious emissions from 1 GHz to 10 GHz (operation mode 2):

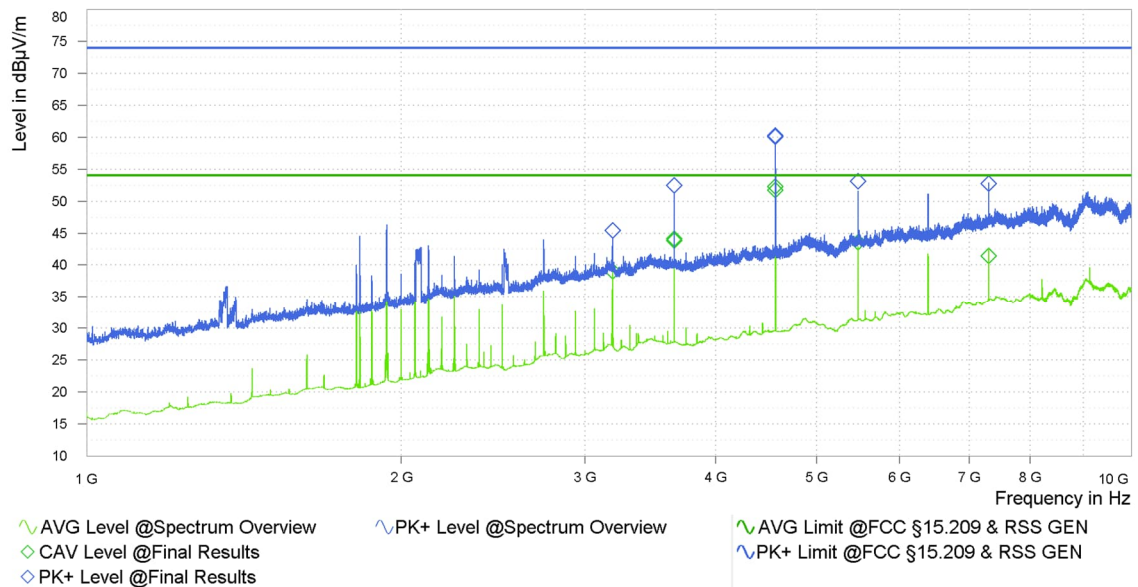


Result tables:


Operation mode 2:

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	CAV Level [dBμV/m]	CAV Limit [dBμV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
3,187.500	45.40	74.00	28.60	39.06	54.00	14.94	3.03	V	120	131	1.50
3,651.250	52.43	74.00	21.57	44.09	54.00	9.91	4.38	V	30	285	1.50
3,652.750	52.44	74.00	21.56	43.86	54.00	10.14	4.37	V	30	289	1.50
4,564.250	60.24	74.00	13.76	52.28	54.00	1.72	7.54	V	30	261	1.50
4,566.000	60.04	74.00	13.96	51.70	54.00	2.30	7.54	V	30	257	1.50
5,477.000	53.08	74.00	20.92	43.55	54.00	10.45	9.96	V	30	261	1.50
7,302.500	52.77	74.00	21.23	41.44	54.00	12.56	13.64	V	60	265	1.50

Plot for radiated measurement results at 2739 MHz with antenna FG.91.A

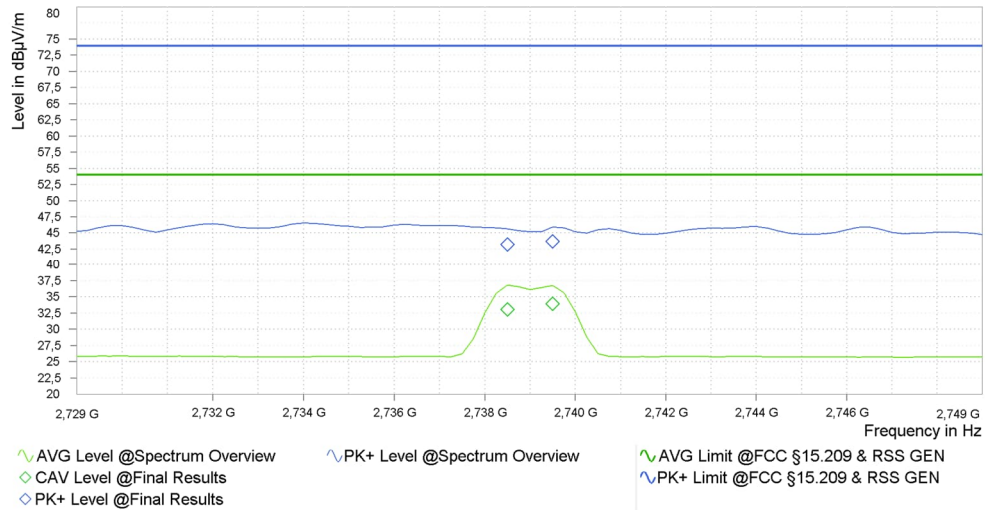


Plot for radiated measurement results at 4565 MHz with antenna FG.91.A

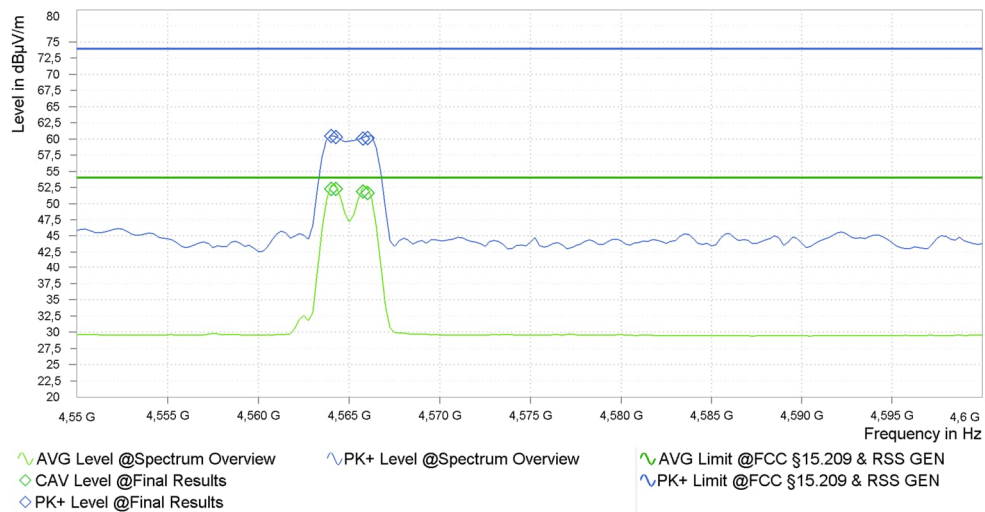


Result tables with antenna FG.91.A :

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	CAV Level [dBμV/m]	CAV: AVG Limit [dBμV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
2,738.500	43.17	74.00	30.83	33.02	54.00	20.98	1.18	V	150	358	1.50
2,739.500	43.67	74.00	30.33	33.88	54.00	20.12	1.20	V	150	333	1.50
4,564.000	60.47	74.00	13.53	52.23	54.00	1.77	7.54	V	30	261	1.50
4,564.250	60.27	74.00	13.73	52.29	54.00	1.71	7.54	V	30	261	1.50
4,565.750	60.06	74.00	13.94	51.84	54.00	2.16	7.54	V	30	262	1.50
4,566.000	60.10	74.00	13.90	51.63	54.00	2.37	7.54	V	30	271	1.50

Plot for radiated measurement results at 2739 MHz with antenna OMB.915.B05F21

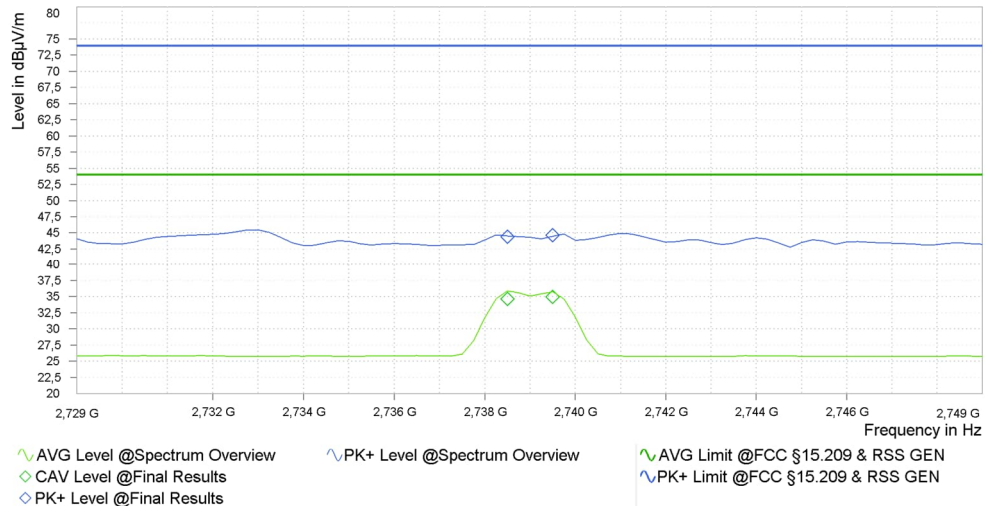

Plot for radiated measurement results at 4565 MHz with antenna OMB.915.B05F21

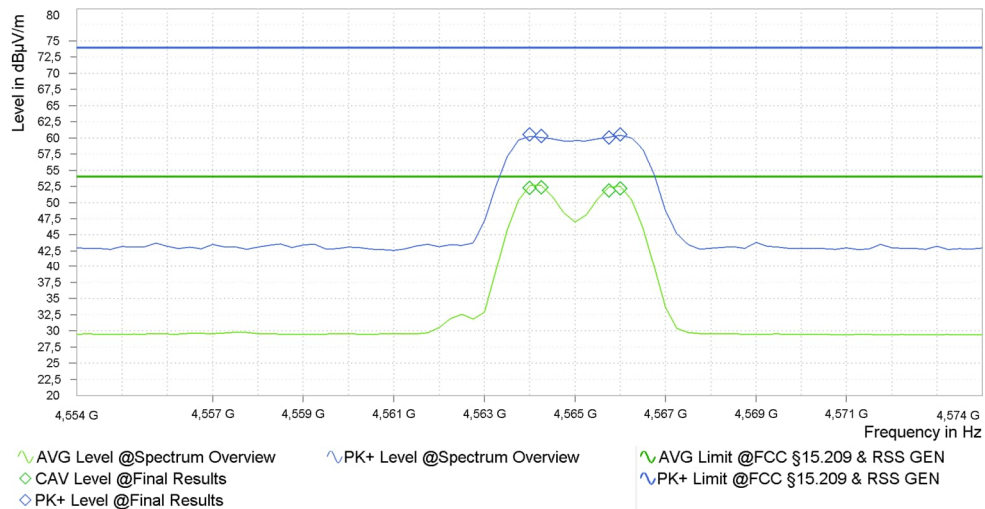

Result tables with antenna OMB.915.B05F21

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	CAV Level [dBμV/m]	CAV: AVG Limit [dBμV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
2,738.500	44.39	74.00	29.61	34.64	54.00	19.36	1.18	V	120	285	1.50
2,739.500	44.62	74.00	29.38	34.93	54.00	19.07	1.20	V	120	272	1.50
4,564.000	60.52	74.00	13.48	52.28	54.00	1.72	7.54	V	30	260	1.50
4,564.250	60.28	74.00	13.72	52.32	54.00	1.68	7.54	V	30	261	1.50
4,565.750	60.08	74.00	13.92	51.85	54.00	2.15	7.54	V	30	262	1.50
4,566.000	60.52	74.00	13.48	52.16	54.00	1.84	7.54	V	30	261	1.50

Test result: Passed

Test equipment (please refer to chapter 7 for details)
3-4, 7-13

5.9 AC power-line conducted emissions

5.9.1 Test setup (Conducted emissions on power supply lines)

Test setup (Conducted emissions on power supply lines)			
Used	Setup	See sub-clause	Comment
☒	Conducted: AC power line	5.1.5	-
☐	Not applicable, because ...	-	-

5.9.2 Test method (Conducted emissions on power supply lines)

Test setup (Conducted emissions on power supply lines)				
Used	Clause [3]	Name of method	Sub-clause	Comment
☒	6.2.3.2	Tabletop equipment testing	5.1.5	Provided AC switching power adaptor
☐	6.2.3.3	Floor-standing equipment testing	-	-

The AC power adaptor provided by the applicant was used for the tests:

CONDOR Model: FJ-SW7261201000DU, P/N: S6-121A0V


The power adaptor itself was supplied by 120V_{AC} 60Hz.

5.9.3 Test results (Conducted emissions on power supply lines)

Ambient temperature:	22 °C
Relative humidity:	40 %

Date:	12.02.2026
Tested by:	P. NEUFELD

The curves in the diagrams below only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by ◆ and the average measured points by ◆.

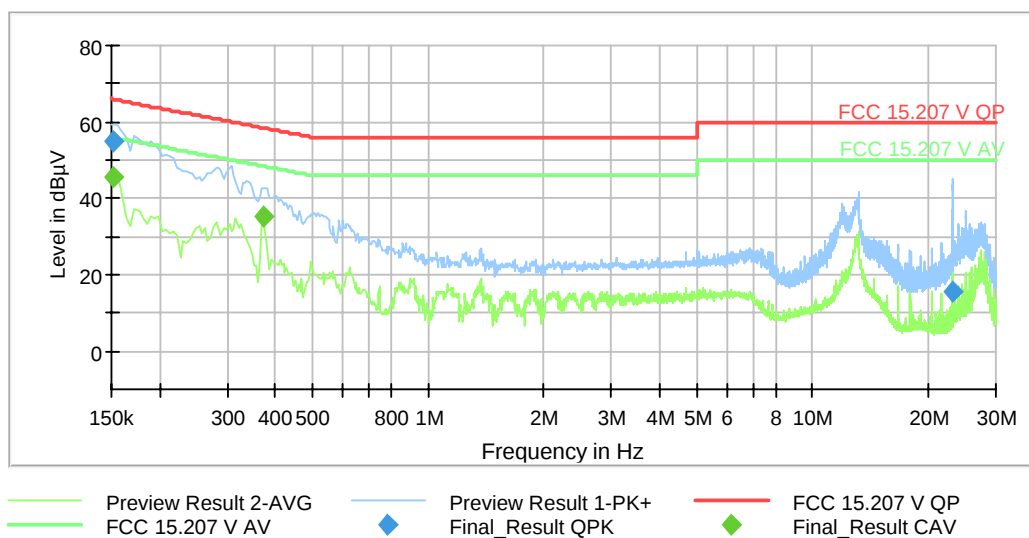

Frequency [MHz]	QuasiPeak [dB(μV)]	Average [dB(μV)]	Limit [dB(μV)]	Margin [dB]	Line	PE	Corr. [dB]
0.1515	54.72	---	65.92	11.20	L1	FLO	9.9
0.1520	---	45.65	55.89	10.24	L1	GND	9.9
0.3735	---	35.24	48.42	13.18	L1	GND	9.9
23.1100	15.36	---	60.00	44.64	N	GND	11.1

Test result: Passed

Test equipment (please refer to chapter 7 for details)
14 - 19

6 Measurement Uncertainties

Conducted measurements		
Measurement method	Standard used for calculating measurement uncertainty	Expanded measurement uncertainty (95 %) U_{lab}
Frequency error	ETSI TR 100 028	4.5×10^{-8}
Bandwidth measurements	-	9.0×10^{-8}
Conducted emissions using a spectrum analyzer		
< 3.6 GHz	ETSI TR 100 028	2.3 dB
3.6 – 8 GHz	ETSI TR 100 028	2.8 dB
8 – 22 GHz	ETSI TR 100 028	3.2 dB
22 – 40 GHz	ETSI TR 100 028	3.6 dB
Power measurements		
Power meter	ETSI TR 100 028	0.9 dB
Conducted emissions from 150 kHz to 30 MHz with LISN		
	CISPR 16-4-2	2.8 dB

Radiated measurements		
Frequency error		
(Semi-) Anechoic chamber	ETSI TR 100 028	4.5×10^{-8}
OATS	ETSI TR 100 028	4.5×10^{-8}
Test fixture	ETSI TR 100 028	4.5×10^{-8}
Bandwidth measurements		
(Semi-) Anechoic chamber	-	9.0×10^{-8}
OATS	-	9.0×10^{-8}
Test fixture	-	9.1×10^{-8}
Radiated field strength M20		
CBL6112B @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	5.3 dB
R&S HL050 @ 3 m		
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 12 – 40 GHz	-	5.9 dB
Radiated field strength M276		
R&S HL562E @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	4.8 dB
R&S HL050 @ 3 m	-	
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 12 – 40 GHz	-	5.9 dB
OATS		
Field strength measurements below 30 MHz on OATS without ground plane	-	4.4 dB

7 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Low Noise Amplifier 10 MHz - 18 GHz	LNA-30-00101800-25-10P	Narda-Miteq	2110917	482967	04.02.2026	02.2028
2	Log.-Per. antenna 850 MHz - 26.5 GHz	HL050	Rohde & Schwarz	100908	482977	10.10.2025	10.2028
3	Attenuator 6 dB	WA2-6	Weinschel		482793	Calibration not necessary	
4	Ultralog antenna 30 MHz - 6 GHz	HL562E	Rohde & Schwarz	101079	482978	24.04.2024	04.2027
5	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	05.02.2026	02.2028
6	Spectrum Analyser	FSW43	Rohde & Schwarz	102954	483957	04.02.2026	02.2027
7	EMC test software	Elektra V5.21	Rohde & Schwarz	---	483755	Calibration not necessary	
8	RF Switch Matrix	OSP220	Rohde & Schwarz	101391	482976	Calibration not necessary	
9	Turntable	TT3.0-3t	Maturo	825/2612/.01	483224	Calibration not necessary	
10	Antenna support tilt mast	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
11	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
12	Semi Anechoic Chamber M276	SAC5-2	Albatross Projects	C62128-A540-A138-10-0006	483227	Calibration not necessary	
13	EMI receiver / Spectrum analyser	ESW44	Rohde & Schwarz	101828	482979	06.02.2026	02.2028
14	LISN	NSLK8128	Schwarzbeck	8128161	480138	04.02.2026	02.2028
15	AC / DC power supply	AC6803A AC Power Source 2000VA	Keysight	JPVJ002509	482350	Calibration not necessary	
16	Software	EMC32 V10.60.20	Rohde & Schwarz	100061	481022	Calibration not necessary	
17	Shielded chamber M4	B83117-S1-X158	Siemens	190075	480088	Calibration not necessary	
18	EMI Receiver / Spectrum Analyser	ESIB 26	Rohde & Schwarz	100292	481182	06.02.2026	02.2028
19	Transient Filter Limiter	CFL 9206A	Teseq GmbH	38268	481982	05.02.2026	02.2028
20	1 GHz Highpass filter	WHKX12-935-1000-15000-40ST	Wainwright Instruments GmbH	12	482908	Calibration not necessary	

8 Test site Verification

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Shielded chamber M4	480088	9 kHz – 30 MHz	GND-Plane	ANSI C63.4-2014	21.05.2025	21.06.2028
Semi anechoic chamber M276	483227	30 MHz– 1000 MHz	NSA	ANSI C63.4-2014 ANSI C63.4a-2017	01.03.2023	28.02.2026
Semi anechoic chamber M276	483227	1 GHz - 18 GHz	SVSWR	CISPR 16-1-4 + Cor1:2010 + A1:2012 +A2:2017	28.02.2023	27.02.2026

9 Report History

Report Number	Date	Comment
F251882E1	09.04.2026	Initial test report
-	-	-
-	-	-

10 List of Annexes

Annex A	Test setup photos	5 pages
Annex B	Void	
Annex C	Void	

----- end of test report -----