

TEST REPORT

Application No.: SUCR2601000015AT
FCC ID: 2APYS-LPS15WPK
Applicant: Lanto Electronic Ltd
Address of Applicant: No 399, Baisheng Road, Jinxi Town, Kunshan City, Jiangsu, China 215234
Manufacturer: Lanto Electronic Ltd
Address of Manufacturer: No 399, Baisheng Road, Jinxi Town, Kunshan City, Jiangsu, China 215234
Equipment Under Test (EUT):
EUT Name: Wireless Charger Module
Model No.: LPS-15WP K
Standard(s) : 47 CFR Part 15, Subpart C
Date of Receipt: 2026-01-13
Date of Test: 2026-01-15 to 2026-01-20
Date of Issue: 2026-01-21

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2026-01-21	/

Authorized for issue by:			
Tested By			
		Eric Liu /Project Engineer	
Approved By			
		Micheal Niu /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart C	ANSI C63.10(2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9.2	47 CFR Part 15, Subpart C 15.215	Pass
Radiated Emissions (9kHz-30MHz)		ANSI C63.10 (2020) Section 6.4	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.10 (2020) Section 6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility	7
4.6 Deviation from Standards.....	7
4.7 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	9
6.1 Antenna Requirement	9
7 Radio Spectrum Matter Test Results	10
7.1 20dB Bandwidth	10
7.2 Conducted Emissions at AC Mains Power Port (150kHz-30MHz).....	12
7.3 Radiated Emissions (9kHz-30MHz)	16
7.4 Radiated Emissions (30MHz-1GHz)	20
8 Test Setup Photo	24
9 EUT Constructional Details (EUT Photos).....	24

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 20V by adapter Model: ADL135SDC3A Input: 100-240V~ 50/60Hz Output: 20.0V, 6.75A
Test Voltage:	AC 120V/60Hz
Operation frequency:	110-148kHz
Wireless Output:	15W Max.
Modulation Type:	Load Modulation
Antenna Type:	Coil Antenna
Host:	ThinkCentre neo 50a 24 Gen 6 LNL, IdeaCentre AIO 24ILL11

Note: There are Host series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the Host model 'ThinkCentre neo 50a 24 Gen 6 LNL' was tested since their differences were the model number.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Load	--	--	--

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions (9kHz-150KHz)	$\pm 2.4\text{dB}$
Conducted Emissions (150kHz-30MHz)	$\pm 2.9\text{dB}$
Conducted Emission at telecommunication port using AAN	$\pm 4.0\text{ dB}$
Radiated Power	$\pm 3.2\text{dB}$
Radiated Emissions (30MHz-1GHz)	$\pm 4.8\text{dB}$
Radiated Emissions (Above 1GHz)	$\pm 4.8\text{dB}$
Voltage Fluctuations and Flicker	$\pm 0.12\%$
Radiated Immunity (80MHz-6GHz)	$\pm 2.8\text{dB}$
Surge open-circuit voltage front time (TfV)	$\pm 0.16\text{ns}$
Surge open-circuit voltage peak value (VP)	$\pm 0.332\text{KV}$
Surge open-circuit voltage duration (Td)	$\pm 0.247\text{ns}$
Conducted Immunity (150kHz-80MHz)	$\pm 2.71\text{dB}$
Electrostatic Discharge	$\pm 5\%$
EFT/B voltage rise time (tr)	$\pm 0.296\text{ns}$
EFT/B peak voltage value (VP)	$\pm 0.44\text{KV}$
EFT/B voltage pulse width (tw)	$\pm 2.8\text{ns}$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch

No. 2, Tongsheng Road, Wuzhong District, Suzhou, Jiangsu, China.

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 6706.01.

- **FCC**

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch has been recognized as an accredited testing laboratory. Designation Number: CN1387.

- **ISED**

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 32369; CAB: CN0177.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
2	LISN	R&S	ENV216	SUWI-01-19-03	2025/5/8	2026/5/7
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	2025/5/8	2026/5/7
4	Test Software	Tonscend	JS32-CE_4.0.0.2	SUWI-02-09-05	N.C.R	N.C.R
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	2025/11/21	2026/11/20
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	2026/1/14	2027/1/13
6	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2025/9/10	2027/9/9
7	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/5/7	2027/5/6
8	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/5/7	2027/5/6
9	Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2025/5/7	2027/5/6
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2026/1/14	2027/1/13
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2026/1/14	2027/1/13
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2026/1/14	2027/1/13
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	2025/11/21	2026/11/20
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2025/8/25	2026/8/24
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	2025/8/26	2026/8/25
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	2025/11/21	2026/11/20
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	2026/1/14	2027/1/13
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2026/1/14	2027/1/13
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Refer to internal photos

7 Radio Spectrum Matter Test Results

7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215

Test Method: ANSI C63.10 (2020) Section 6.9.2

Limit:

For report reference only

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge mode_Keep the EUT charging(15W)


7.1.3 Test Setup Diagram

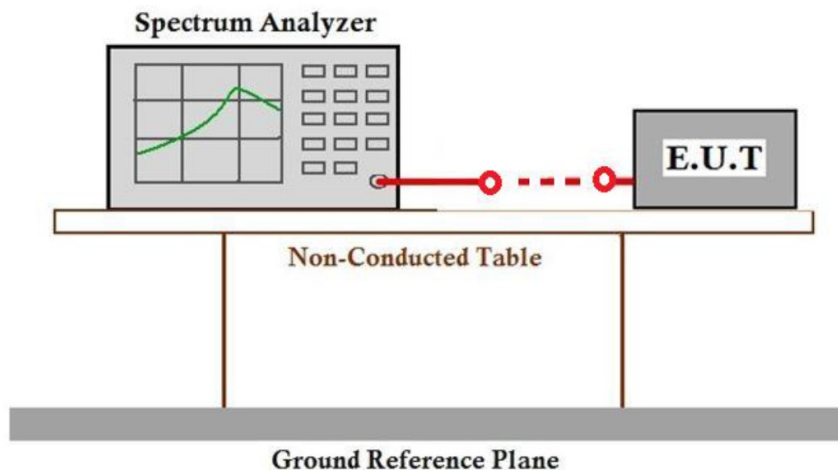

7.1.4 Measurement Procedure and Data

20dB bandwidth (Hz)	Result
249.80	Pass

Test plot as follows:

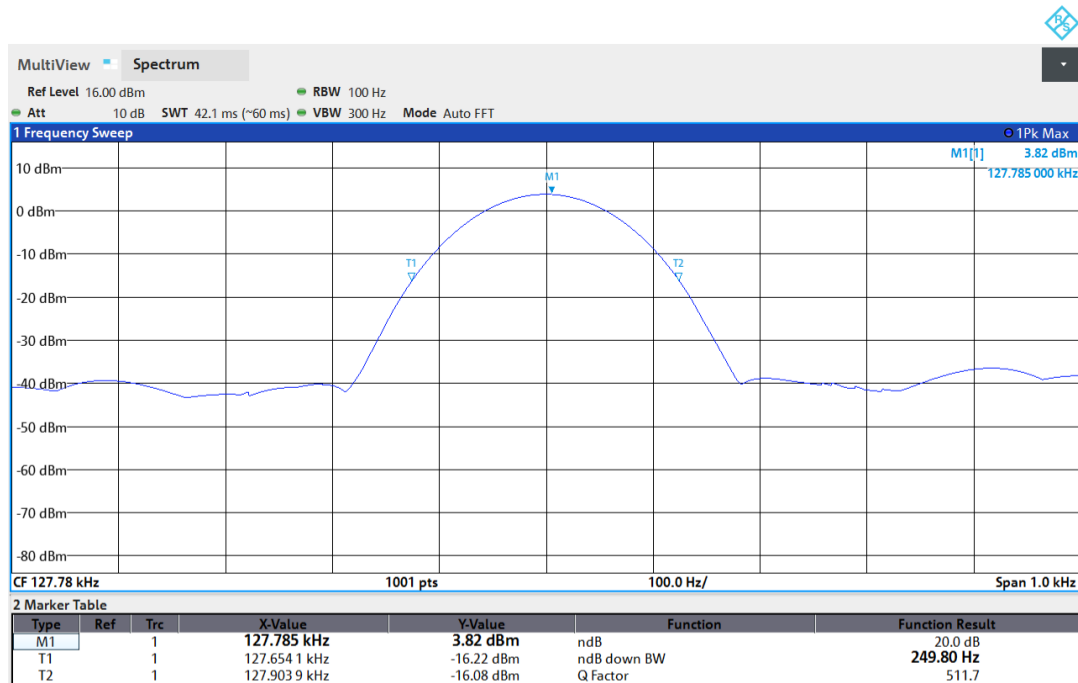

7.2 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge mode_Keep the EUT charging(15W)

7.2.3 Test Setup Diagram

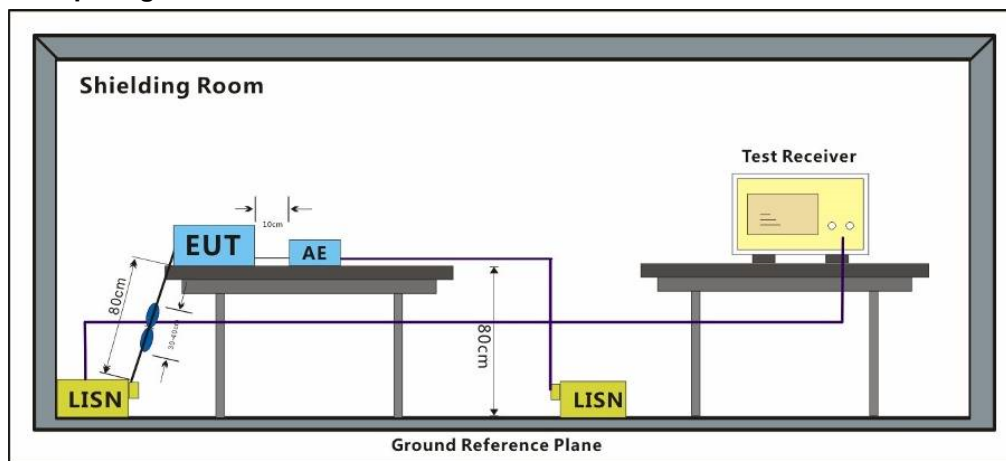


7.2.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


Test Mode: 00; Line: Live line

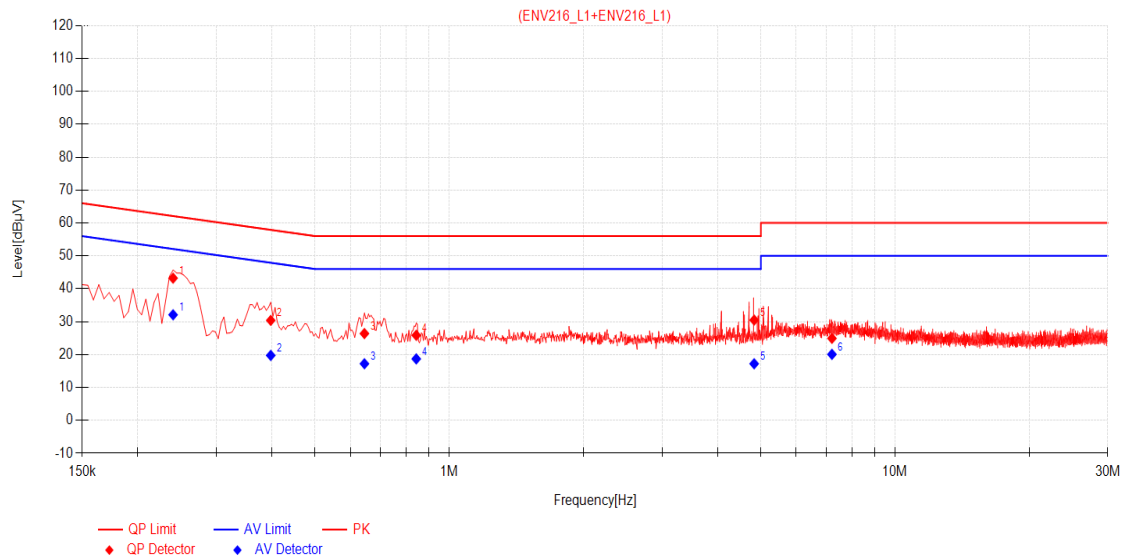

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2400	9.97	33.26	43.23	62.10	18.87	22.13	32.10	52.10	20.00	PASS
2	0.3975	9.95	20.45	30.40	57.91	27.51	9.79	19.74	47.91	28.17	PASS
3	0.6450	9.92	16.47	26.39	56.00	29.61	7.30	17.22	46.00	28.78	PASS
4	0.8430	9.91	15.96	25.87	56.00	30.13	8.79	18.70	46.00	27.30	PASS
5	4.8300	9.90	20.59	30.49	56.00	25.51	7.31	17.21	46.00	28.79	PASS
6	7.2195	9.94	14.98	24.92	60.00	35.08	10.14	20.08	50.00	29.92	PASS

Test Mode: 00; Line: Neutral Line

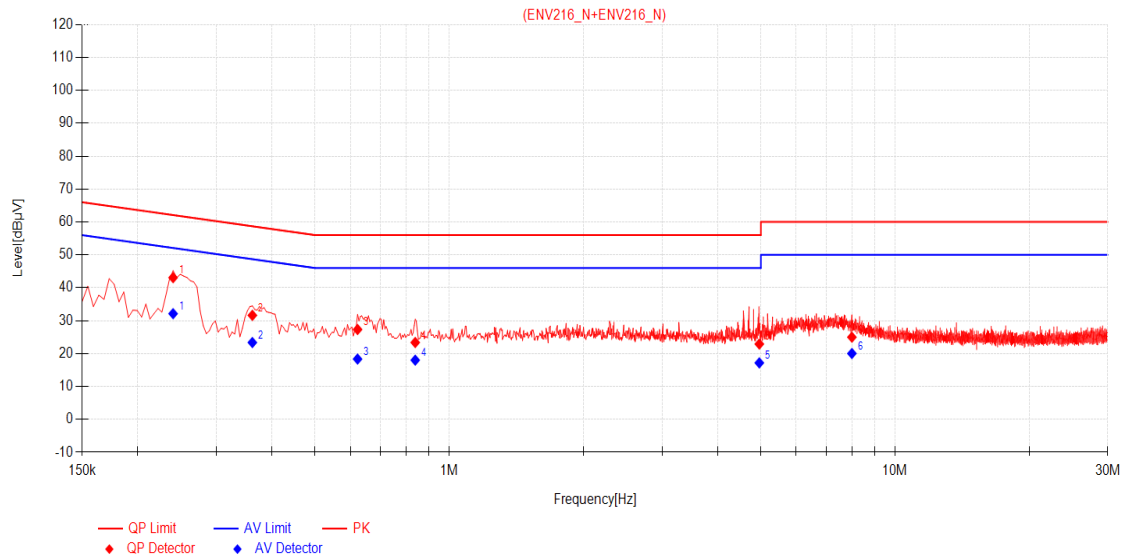

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2400	9.97	33.10	43.07	62.10	19.03	22.16	32.13	52.10	19.97	PASS
2	0.3615	9.96	21.66	31.62	58.69	27.07	13.40	23.36	48.69	25.33	PASS
3	0.6225	9.92	17.40	27.32	56.00	28.68	8.42	18.34	46.00	27.66	PASS
4	0.8385	9.93	13.44	23.37	56.00	32.63	8.07	18.00	46.00	28.00	PASS
5	4.9605	9.94	12.96	22.90	56.00	33.10	7.23	17.17	46.00	28.83	PASS
6	8.0025	9.92	15.06	24.98	60.00	35.02	10.11	20.03	50.00	29.97	PASS

7.3 Radiated Emissions (9kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than $\lambda/2\pi$ and the limit distance is greater than $\lambda/2\pi$, the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the $\lambda/2\pi$ distance, and at a 20 dB/decade of distance rate beyond $\lambda/2\pi$. This shall be accomplished using Equation (2):

$$FS_{(10m)} = FS_{(30/300m)} + 40\log\{d_{(near\ field)}/d_{(10m)}\} + 20\log\{d_{(30/300m)}/d_{(near\ field)}\} \quad (2)$$

If the single point measured is at a distance greater than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (3):

$$FS_{(10m)} = FS_{(30/300m)} + 20\log\{d_{(30/300m)}/d_{(10m)}\} \quad (3)$$

If both the single point and the limit distance are equal to or closer to the EUT than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (4):

$$FS_{(10m)} = FS_{(30/300m)} + 40\log\{d_{(30/300m)}/d_{(10m)}\} \quad (4)$$

Remark:

$$d_{near\ field} = 47.77 / f_{MHz}$$

where f_{MHz} is the frequency of the emission being measured in MHz.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge mode_Keep the EUT charging(15W)


7.3.3 Test Setup Diagram

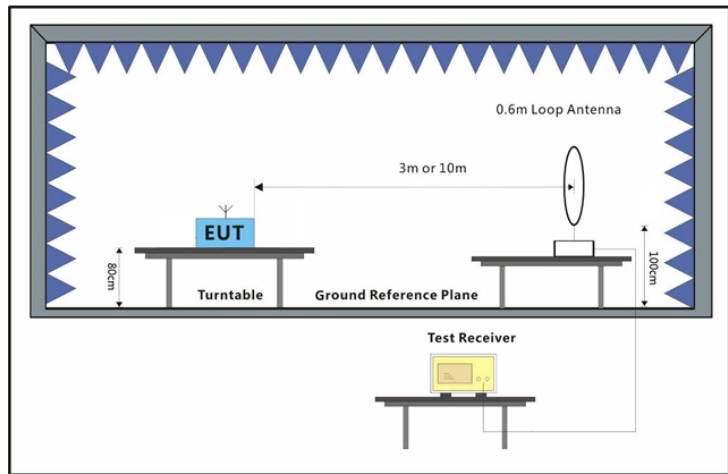

7.3.4 Measurement Procedure and Data

- All radiated emission measurements in terms of magnetic field strength shall be performed with a shielded loop antenna.
- For all radiated emission measurements in terms of magnetic field strength, the loop antenna were placed such that:
 - its centre shall be at 1.3 m height above the ground plane;
 - the projection of its centre onto the ground plane shall be at the specified measurement distance from the projection on the ground plane of the closest point on the boundary of the equipment under test (EUT); and
 - measurements shall be performed with the loop antenna placed vertically, in turn, in two polarizations (the measurement axis specified below is the line segment connecting the projections on the ground plane of the centre of the loop antenna and the centre of the EUT arrangement):
 - coaxial (loop plane perpendicular to the ground plane and to the measurement axis); and
 - coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis).


Coaxial

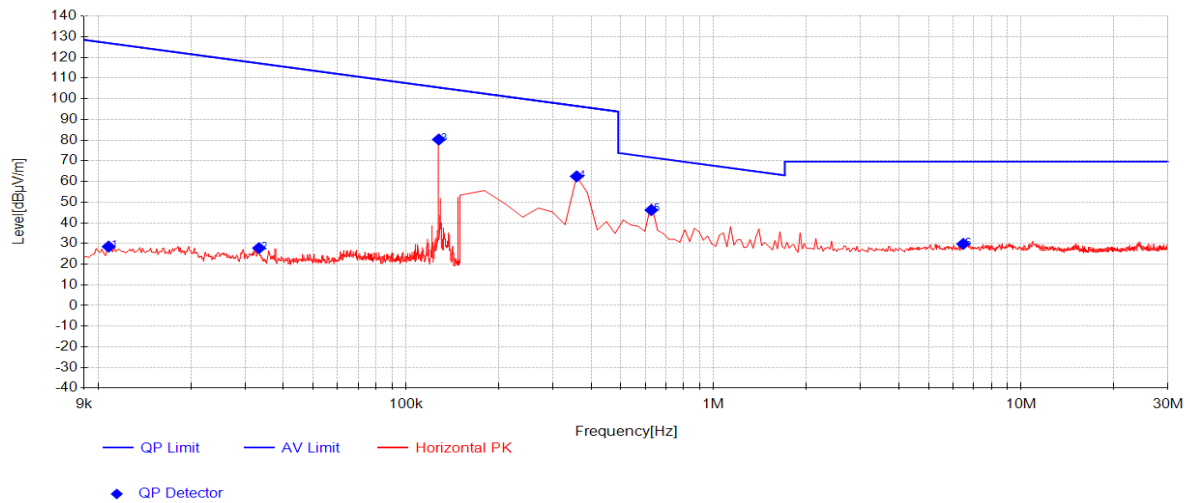

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	0.0108	8.35	19.70	0.43	28.48	126.93	98.45	100	273	Coaxial
2	0.0333	7.63	19.72	0.43	27.78	117.15	89.37	100	175	Coaxial
3	0.1279	59.96	19.91	0.43	80.30	105.46	25.16	100	286	Coaxial
4	0.359	42.05	19.96	0.44	62.45	96.50	34.05	100	275	Coaxial
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
5	0.6276	25.69	20.03	0.44	46.16	71.65	25.49	100	275	Coaxial
6	6.4782	8.95	20.27	0.55	29.78	69.54	39.76	100	95	Coaxial

Coplanar

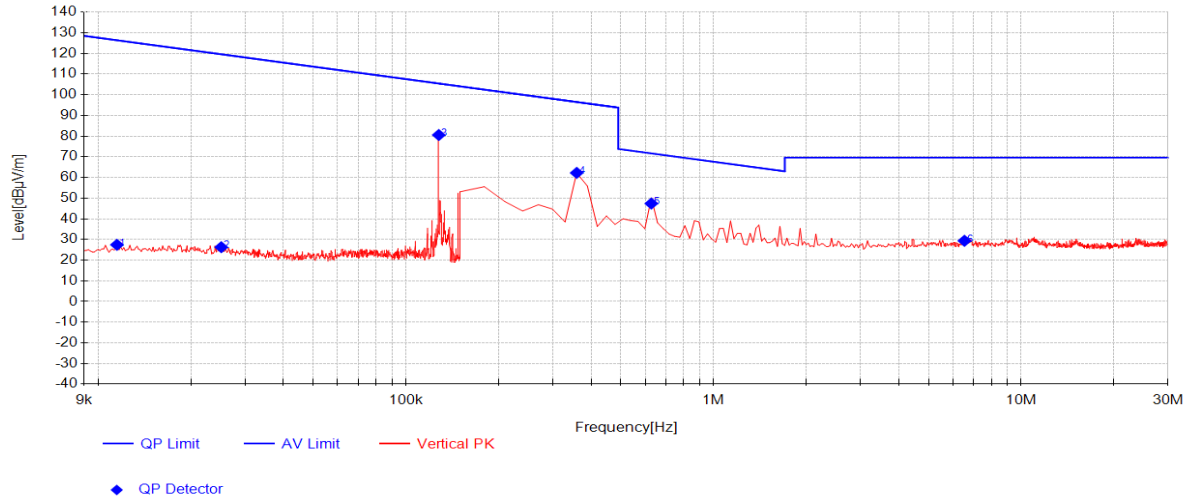

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	0.0115	7.29	19.70	0.43	27.42	126.38	98.96	100	105	Coplanar
2	0.0251	6.12	19.70	0.43	26.25	119.60	93.35	100	16	Coplanar
3	0.1279	60.20	19.91	0.43	80.54	105.46	24.92	100	294	Coplanar
4	0.359	41.81	19.96	0.44	62.21	96.50	34.29	100	282	Coplanar
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
5	0.6276	26.91	20.03	0.44	47.38	71.65	24.27	100	268	Coplanar
6	6.5379	8.53	20.28	0.55	29.36	69.54	40.18	100	172	Coplanar

7.4 Radiated Emissions (30MHz-1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge mode_Keep the EUT charging(15W)

7.4.3 Test Setup Diagram

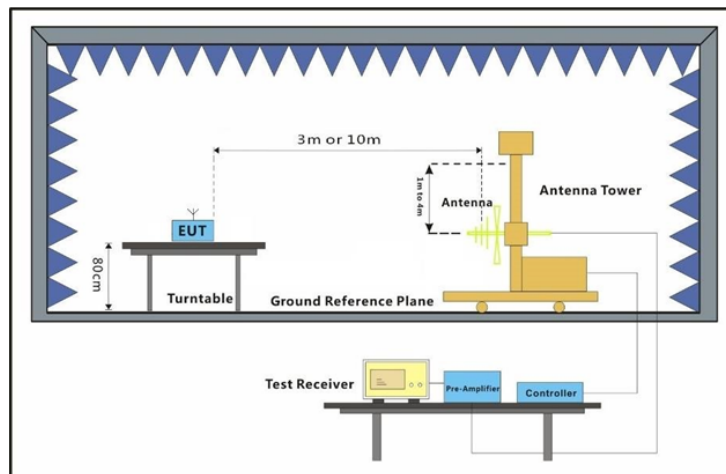


7.4.4 Measurement Procedure and Data

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Horizontal

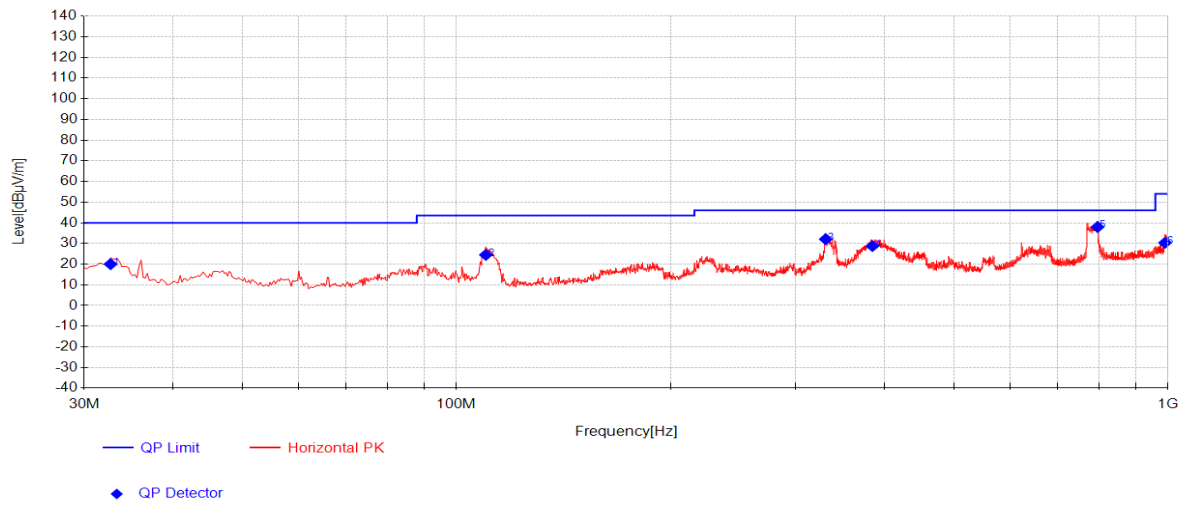

Final Data List

NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.6675	41.31	12.66	-33.98	19.99	40.00	20.01	157	5	Horizontal
2	110.025	47.12	10.35	-32.99	24.48	43.50	19.02	169	0	Horizontal
3	330.4575	49.83	13.71	-31.50	32.05	46.00	13.95	188	67	Horizontal
4	384.2925	44.53	15.33	-31.09	28.76	46.00	17.24	154	51	Horizontal
5	796.3	44.83	22.22	-29.09	37.96	46.00	8.04	131	90	Horizontal
6	990.5425	33.81	24.42	-27.90	30.33	54.00	23.67	125	129	Horizontal

Vertical

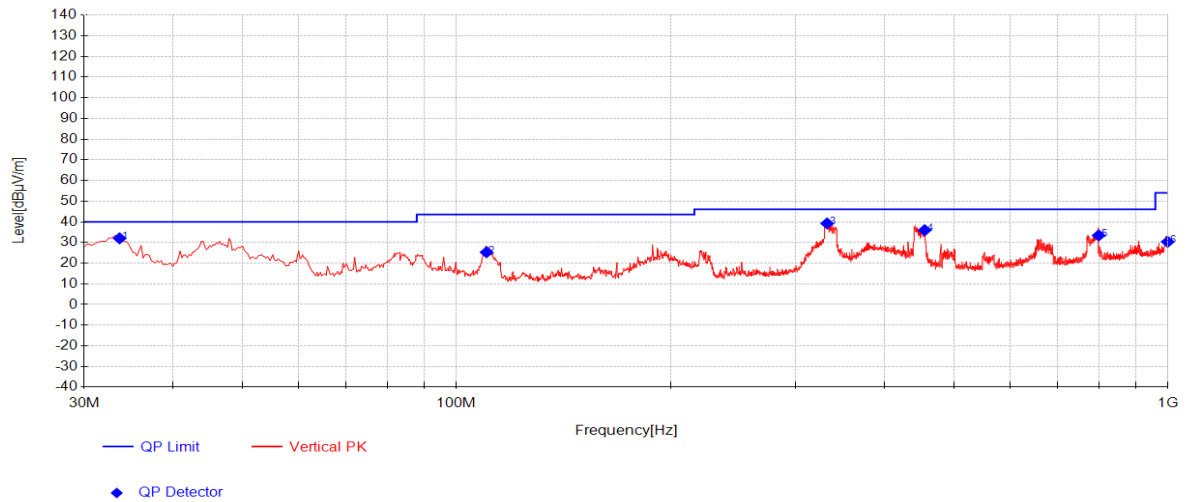

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.6375	53.26	12.72	-33.97	32.01	40.00	7.99	157	172	Vertical
2	110.2675	47.88	10.38	-32.99	25.27	43.50	18.23	180	117	Vertical
3	331.9125	56.93	13.76	-31.49	39.20	46.00	6.80	169	339	Vertical
4	455.1025	49.87	16.68	-30.63	35.92	46.00	10.08	105	317	Vertical
5	799.21	40.19	22.28	-29.07	33.41	46.00	12.59	196	97	Vertical
6	999.03	33.62	24.49	-27.81	30.30	54.00	23.70	194	151	Vertical



Report No.: SUCR260100001501

Page: 24 of 24

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2601000015AT.

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SUCR2601000015AT.

- End of the Report -