

Test Report

Product: Folding Desk Fan with 15W Wireless
Charger
Trade Mark: N/A
Model Number: AB0612
FCC ID: 2APYY-AB0612

Prepared for

LEADER PREMIUMS LIMITED

9/F., Hengfu Mansion, NO.858 Fuming Road, Ningbo, China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	5
1.3	TEST SETUP	5
1.4	POWER SETTING CONFIGURATION PARAMETERS	6
1.5	ANCILLARY EQUIPMENT	6
2	SUMMARY OF TEST RESULT	7
3	TEST FACILITIES AND ACCREDITATIONS	8
3.1	TEST LABORATORY	8
3.2	ENVIRONMENTAL CONDITIONS	8
3.3	MEASUREMENT UNCERTAINTY	8
3.4	TEST SOFTWARE	8
4	LIST OF TEST EQUIPMENT	10
5	TEST ITEM AND RESULTS.....	12
5.1	ANTENNA REQUIREMENT	12
5.2	CONDUCTED EMISSION.....	13
5.3	RADIATED EMISSION	17
5.4	OCCUPIED BANDWIDTH	23
6	PHOTOGRAPHS OF THE TEST SETUP.....	24
7	PHOTOGRAPHS OF THE EUT.....	26

TEST RESULT CERTIFICATION

Applicant's Name..... : LEADER PREMIUMS LIMITED
Address : 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China
Manufacturer's Name : LEADER PREMIUMS LIMITED
Address : 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Product description


Product name : Folding Desk Fan with 15W Wireless Charger
Model Number : AB0612

Standards : FCC Part 15C
Test procedure..... : IEEE/ANSI C63.10-2020

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.


Date of Test..... :
Date (s) of performance of tests..... : Jan 16, 2026~ Jan 30, 2026
Test Result..... : **Pass**

Testing Engineer :



(Z o e S u)

Technical Manager :



(M i n g L i u)

Authorized Signatory :



(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	Folding Desk Fan with 15W Wireless Charger
Model name:	AB0612
Series Model:	N/A
Different of series model:	N/A
Operation frequency:	111–205 kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna
Hardware version:	V 1
Software version:	V1.0
Battery:	N/A
Power supply:	Type-C Input: 5V/3A, 9V/3A Wireless Output: 5V/1A, 9V/1.1A, 9V/1.67A; (5W/10W/15W) USB-A Output: 5V/1A
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	Wireless charging
2	/
3	/

Test Item	Final Test Mode
Conducted Emissions	1
Radiated Emissions	1
20dB bandwidth	1

Note: All modes have been tested, and the report only reflects the test results of the worst mode.

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Power setting configuration parameters

Test Software Version		N/A	
Frequency		111-205kHz	360kHz
Parameters		Default	Default
RF cable			
Description	Connector	Length	Supplied by
Antenna Cable	SMA	10cm	Applicant

Note: Disclaimer: the loss of RF cable is too small and can be ignored.

1.5 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Adapter	CD289	/	Ugreen Group Limited
Phone	MYM93LL/A	HMV3W3W1 9W	Apple Inc.

2 Summary of Test Result

Test procedures according to the technical standards:

FCC Part 15C				
No.	Standard Section	Test Item	Result	Remark
1	FCC Part 15.203	Antenna Requirement	Pass	
2	FCC Part 15.207	Conducted Emission	Pass	
3	FCC Part 15.209	Radiated Emission	Pass	
4	FCC Part 15.215	20dB Bandwidth	Pass	
Note: "N/A" means the test item not applicable.				

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	
Humidity	$\pm 5 \%$	

3.4 Test Software

Software name	Manufacturer	Model	Version
Conducted Emission test Software	Farad	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission test Software	Farad	EZ-EMC	FA-03A2
RF Test System	MWRF	MTS 8310	2.0.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-05-18	2026-05-17
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-05-18	2026-05-17
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 9170	01193	2024-05-18	2026-05-17
4	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2025-05-07	2026-05-06
5	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2025-05-07	2026-05-06
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2025-05-07	2026-05-06
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2025-05-13	2026-05-12
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2024-05-18	2026-05-17
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A02278	2025-05-07	2026-05-06
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2025-05-07	2026-05-06
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2025-05-07	2026-05-06
3	HB-E016	Absorb clamp	ZHINAN	ZN23201	N/A	2025-05-10	2026-05-09
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2025-05-10	2026-05-09
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2025-05-07	2026-05-06
RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Anaio Signal Generator	Agilent	N5181A	MY47070421	2025-05-07	2026-05-06
2	HB-E042	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	132108	2025-05-08	2026-05-07

3	HB-E043	MXG Anaio Signal Generator	Agilent	N5182A	US46240335	2025-05-08	2026-05-07
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2025-05-07	2026-05-06
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	2025-05-08	2026-05-07
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1S	N/A	2025-05-09	2026-05-08

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission


5.2.1 Limits

Limits – Class A		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	79	66
0.5 to 30	73	60
Limits – Class B		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		

5.2.2 Test Procedures


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test setup

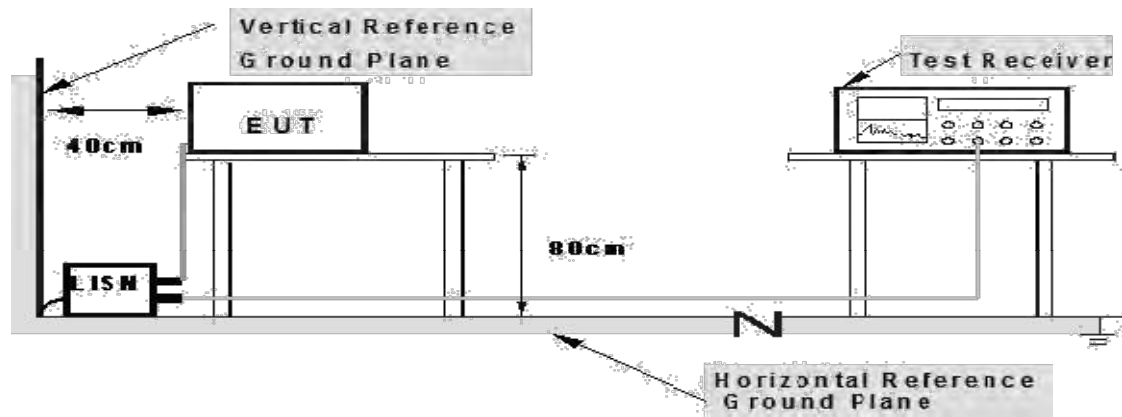

5.2.4 Test Result

EUT:	Folding Desk Fan with 15W Wireless Charger	Model Name:	AB0612
Test Mode:	Wireless charging	Phase:	L
Test Voltage:	AC120V/60Hz		

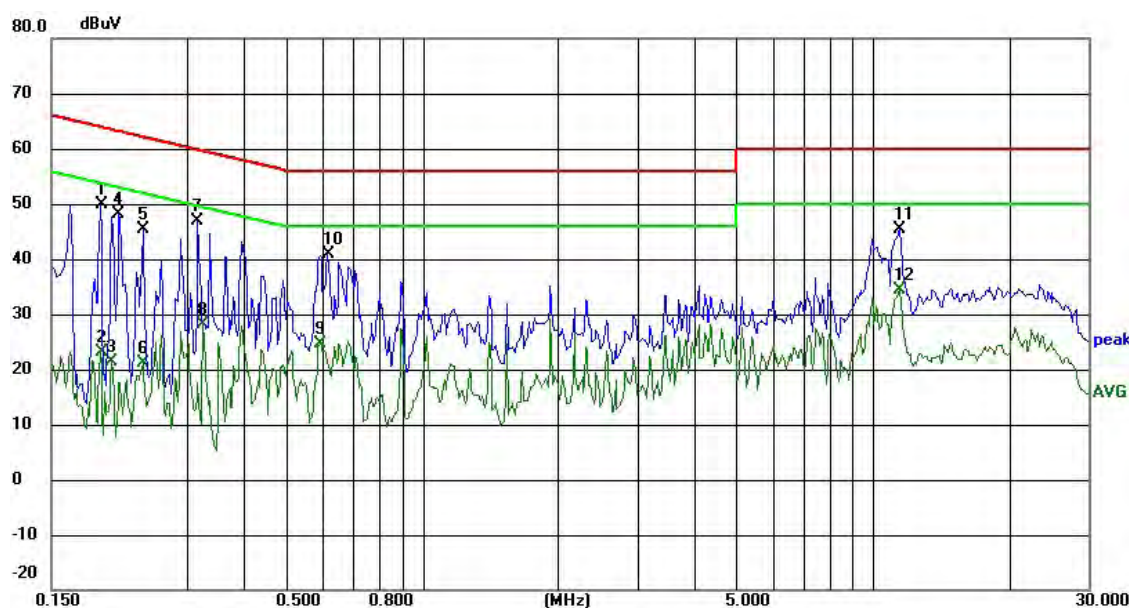


Remark:

1. Factor = Insertion Loss + Cable Loss + Pulse limit.
2. '*' means the worst case

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1928	39.85	10.13	49.98	63.92	-13.94	peak	P
2	0.1928	13.07	10.13	23.20	53.92	-30.72	AVG	P
3	0.2046	11.36	10.12	21.48	53.42	-31.94	AVG	P
4	0.2124	37.94	10.13	48.07	63.11	-15.04	peak	P
5	0.2396	35.24	10.15	45.39	62.11	-16.72	peak	P
6	0.2396	10.94	10.15	21.09	52.11	-31.02	AVG	P
7 *	0.3175	36.56	10.22	46.78	59.77	-12.99	peak	P
8	0.3255	17.99	10.23	28.22	49.57	-21.35	AVG	P
9	0.5946	14.15	10.38	24.53	46.00	-21.47	AVG	P
10	0.6140	30.45	10.38	40.83	56.00	-15.17	peak	P
11	11.4512	23.60	21.84	45.44	60.00	-14.56	peak	P
12	11.4512	12.46	21.84	34.30	50.00	-15.70	AVG	P

EUT:	Folding Desk Fan with 15W Wireless Charger	Model Name:	AB0612
Test Mode:	Wireless charging	Phase:	N
Test Voltage:	AC120V/60Hz		

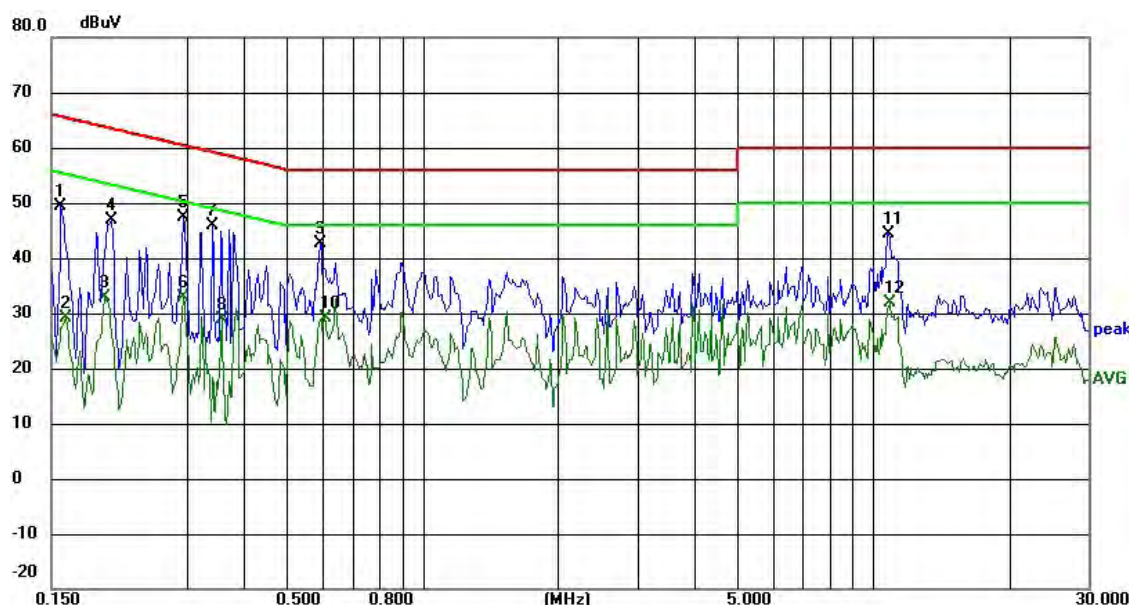

Remark:

1. Factor = Insertion Loss + Cable Loss + Pulse limit.
2. '*' means the worst case

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1577	39.18	10.15	49.33	65.58	-16.25	peak	P
2	0.1617	19.01	10.15	29.16	55.38	-26.22	AVG	P
3	0.1968	22.69	10.12	32.81	53.74	-20.93	AVG	P
4	0.2046	36.77	10.12	46.89	63.42	-16.53	peak	P
5 *	0.2943	37.06	10.20	47.26	60.40	-13.14	peak	P
6	0.2943	22.56	10.20	32.76	50.40	-17.64	AVG	P
7	0.3410	35.56	10.24	45.80	59.18	-13.38	peak	P
8	0.3576	18.63	10.26	28.89	48.78	-19.89	AVG	P
9	0.5946	32.29	10.38	42.67	56.00	-13.33	peak	P
10	0.6062	18.65	10.38	29.03	46.00	-16.97	AVG	P
11	10.7843	23.31	21.16	44.47	60.00	-15.53	peak	P
12	10.8780	10.65	21.26	31.91	50.00	-18.09	AVG	P

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- The radiated emission tests were performed in the 3 meters.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

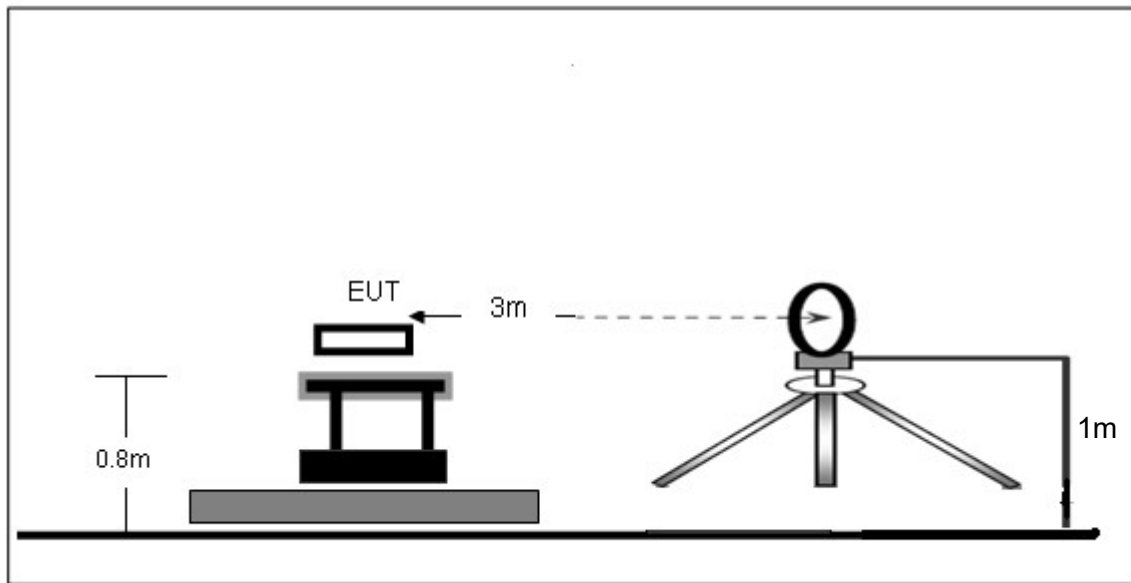


Radiated Emission Test-Up Frequency 30MHz~1GHz

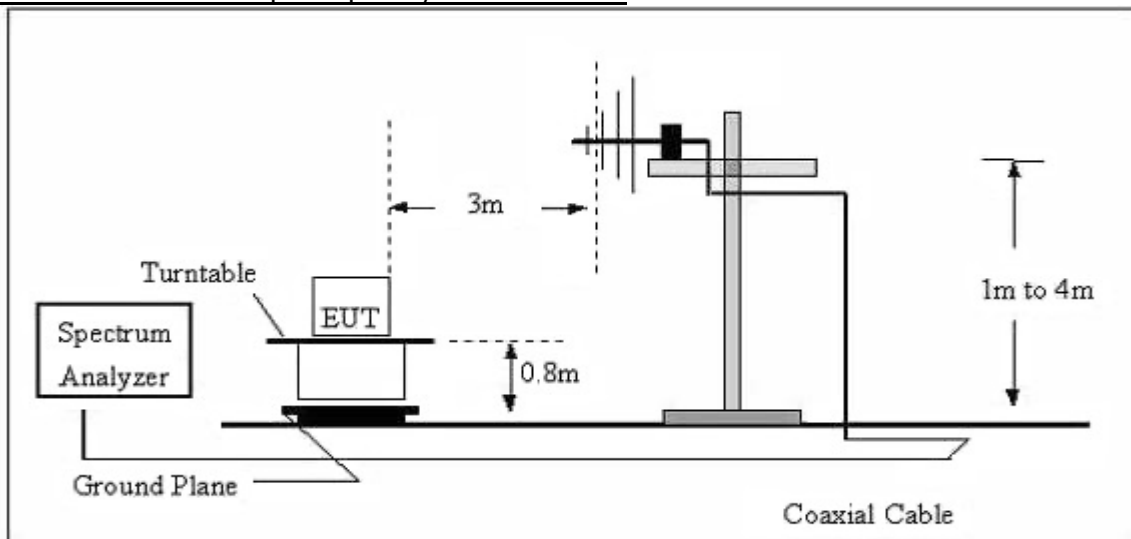


5.3.4 Test Result

Frequency range (9kHz – 30MHz)

EUT:	Folding Desk Fan with 15W Wireless Charger	Model Name:	AB0612
Test Mode:	Wireless charging	Phase:	Coaxial
Test Voltage:	AC 120V/60Hz		

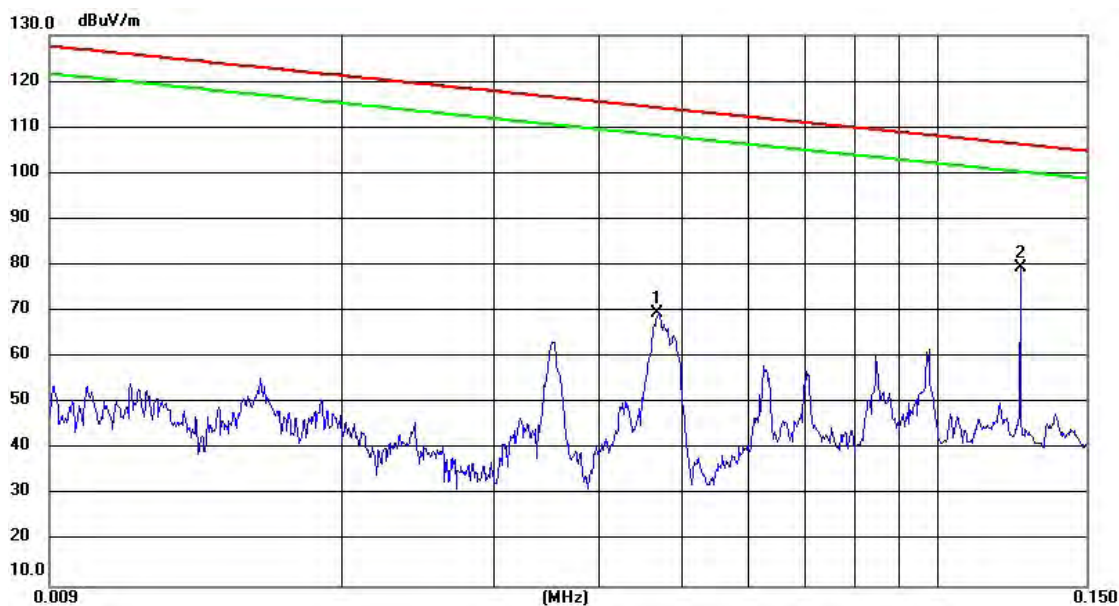


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0468	44.00	25.59	69.59	114.23	-44.64	QP
2 *	0.1252	57.76	21.57	79.33	106.26	-26.93	QP

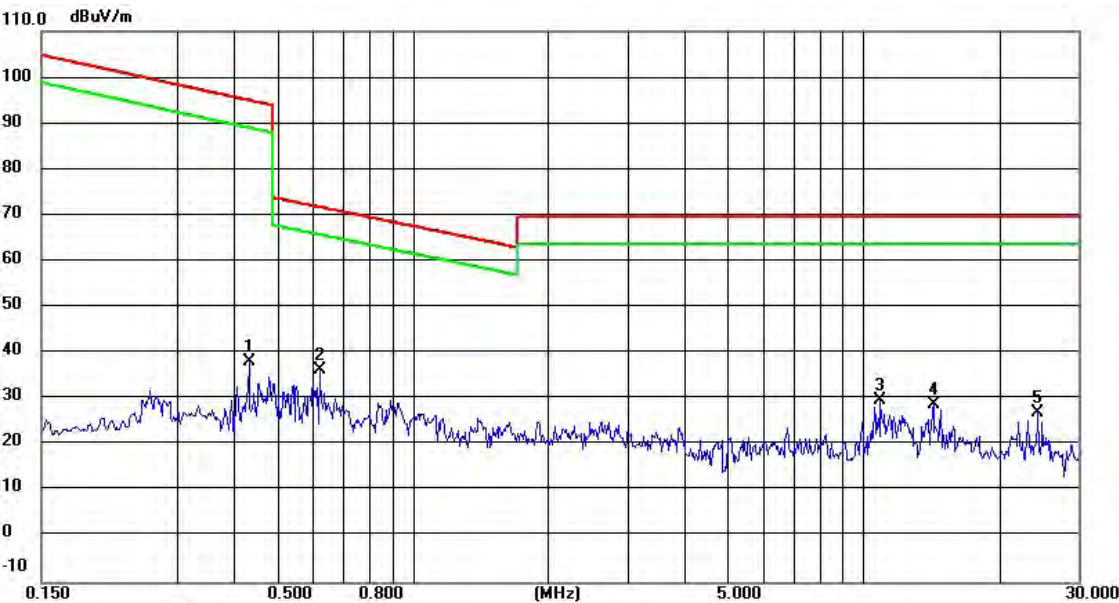

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.4328	17.02	21.00	38.02	94.95	-56.93	QP
2 *	0.6205	15.45	20.98	36.43	71.75	-35.32	QP
3	10.9047	5.34	24.45	29.79	69.54	-39.75	QP
4	14.2881	4.16	24.69	28.85	69.54	-40.69	QP
5	24.3993	2.48	24.67	27.15	69.54	-42.39	QP


Frequency range (30MHz – 1GHz)

EUT:	Folding Desk Fan with 15W Wireless Charger	Model Name:	AB0612
Test Mode:	Mode 1	Phase:	Vertical
Test Voltage:	AC 120V/60Hz		

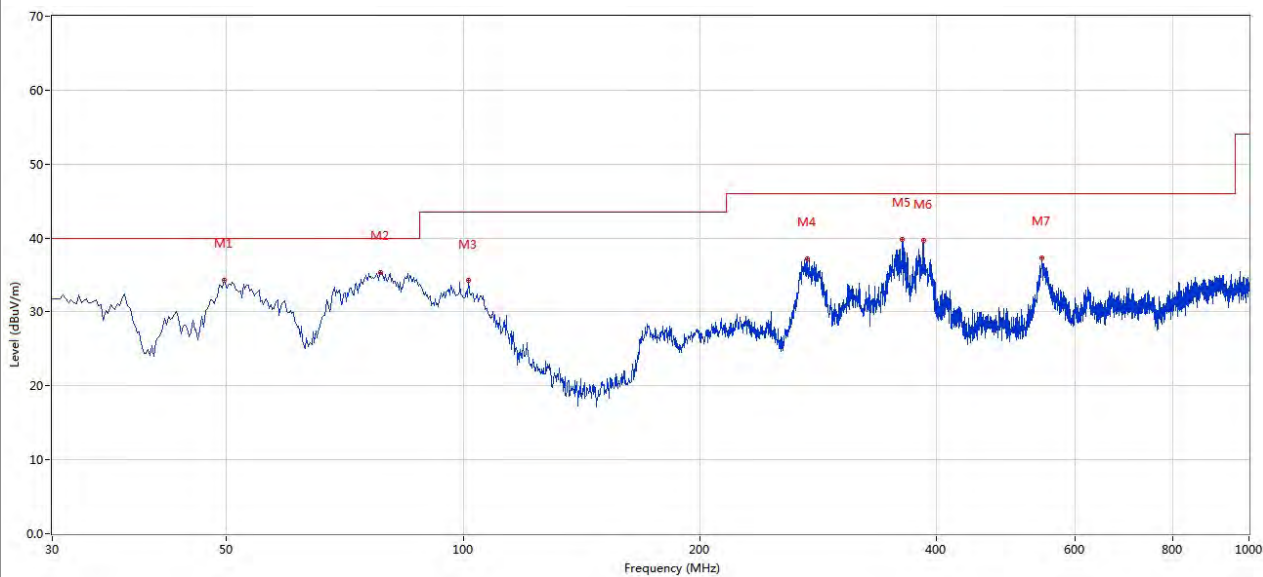

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna	Verdict
1	49.638	34.33	-8.83	40.0	5.67	QP	Vertical	Pass
2	78.488	35.34	-13.42	40.0	4.66	QP	Vertical	Pass
3	101.520	34.21	-9.96	43.5	9.29	QP	Vertical	Pass
4	274.136	37.20	-8.71	46.0	8.80	QP	Vertical	Pass
5	362.142	39.81	-5.04	46.0	6.19	QP	Vertical	Pass
6	385.901	39.62	-5.57	46.0	6.38	QP	Vertical	Pass
7	545.184	37.34	-3.80	46.0	8.66	QP	Vertical	Pass

EUT:	Folding Desk Fan with 15W Wireless Charger	Model Name:	AB0612
Test Mode:	Mode 1	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz		

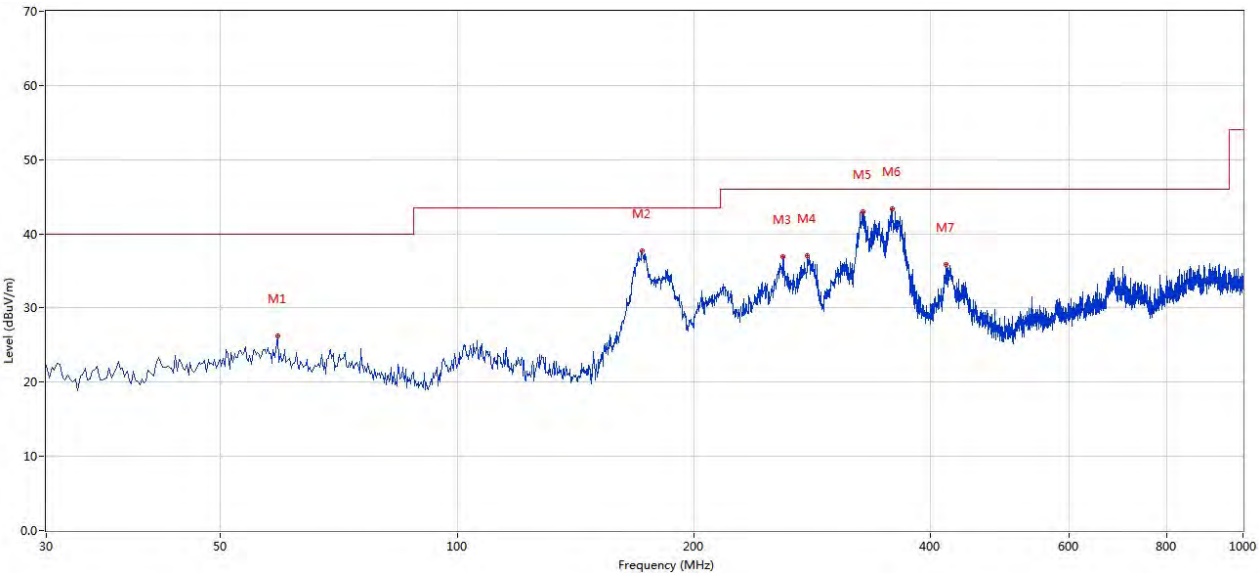

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna	Verdict
1	59.093	26.27	-9.14	40.0	13.73	QP	Horizontal	Pass
2	171.827	37.76	-11.96	43.5	5.74	QP	Horizontal	Pass
3	259.833	36.90	-8.17	46.0	9.10	QP	Horizontal	Pass
4	279.228	37.00	-8.92	46.0	9.00	QP	Horizontal	Pass
5	328.685	42.98	-6.82	46.0	3.02	QP	Horizontal	Pass
6	357.536	43.34	-4.95	46.0	2.66	QP	Horizontal	Pass

5.4 Occupied Bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ to 5% of the OBW

VBW $\geq 3 \times \text{RBW}$

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

5.4.2 Test result


Frequency (kHz)	20dB emission bandwidth (Hz)
125	254

Test plots as below:




6 Photographs of the Test Setup


Radiated Emission Below 30MHz

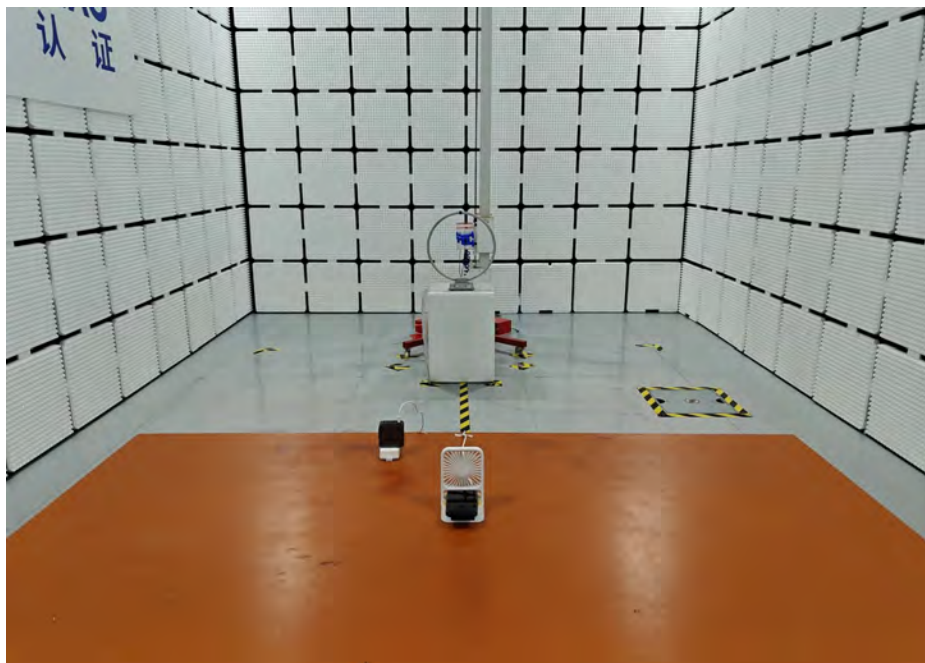

Radiated Emission Above 30MHz

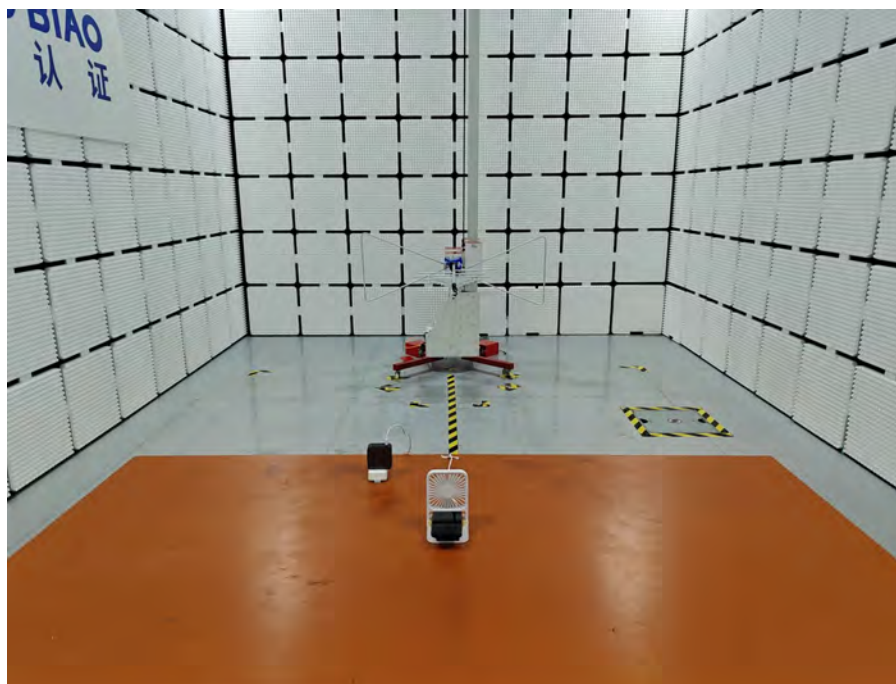

Conducted emission

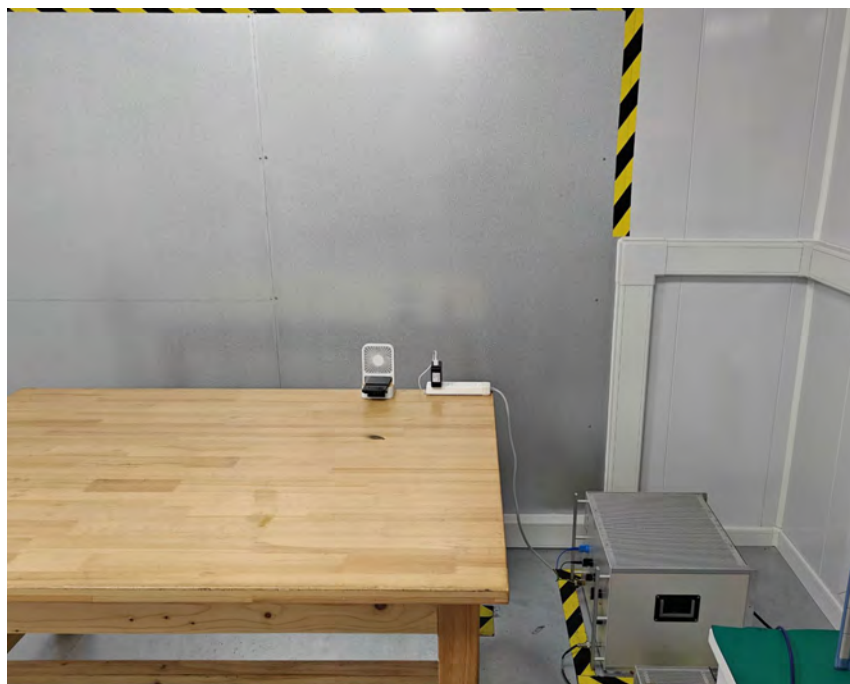

7 Photographs of the EUT

Photo 1



Photo 2

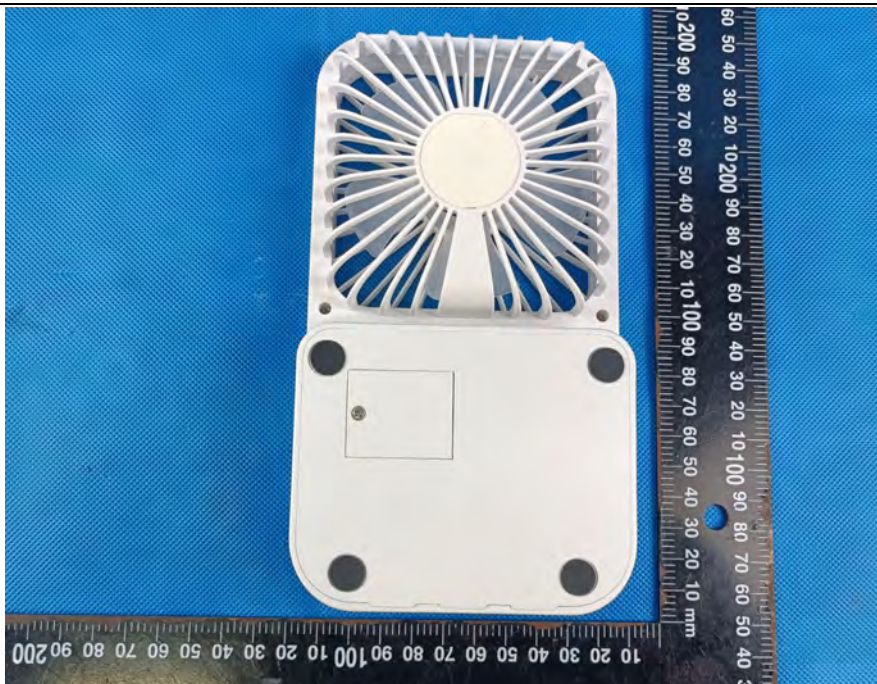


Photo 3



Photo 4

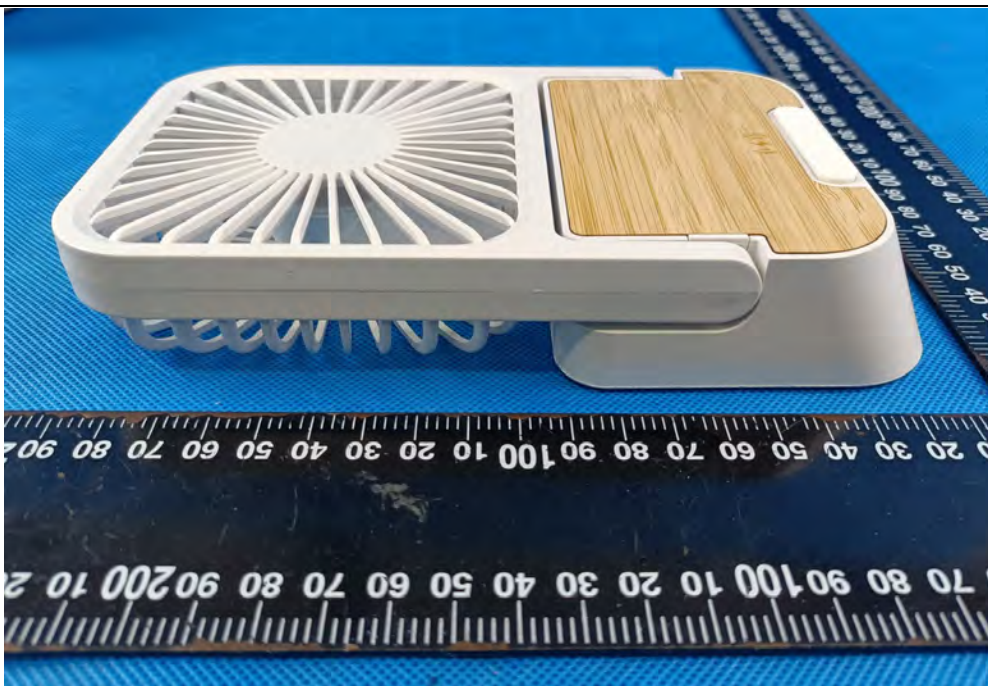


Photo 5

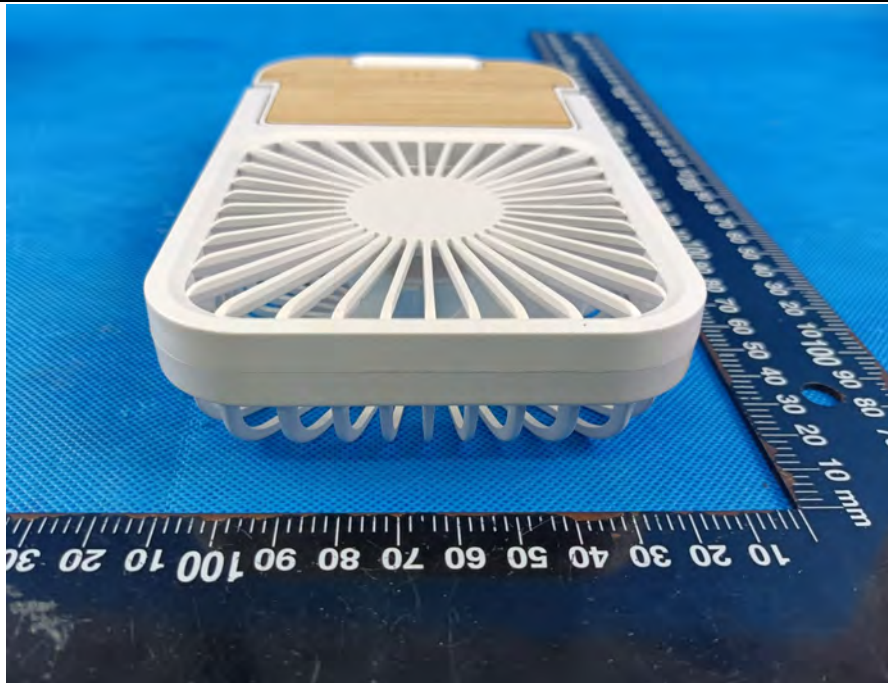


Photo 6


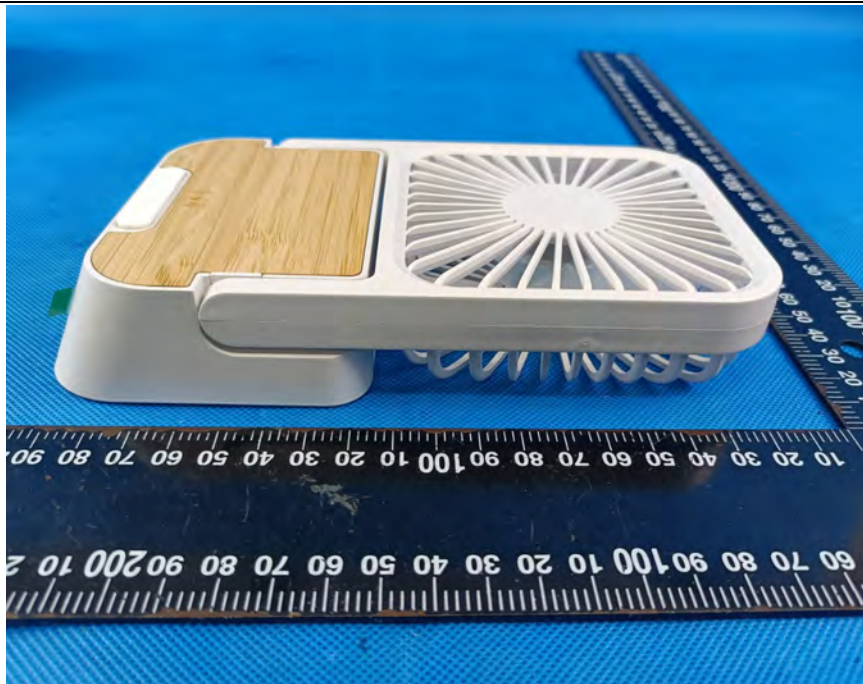


Photo 7



Photo 8

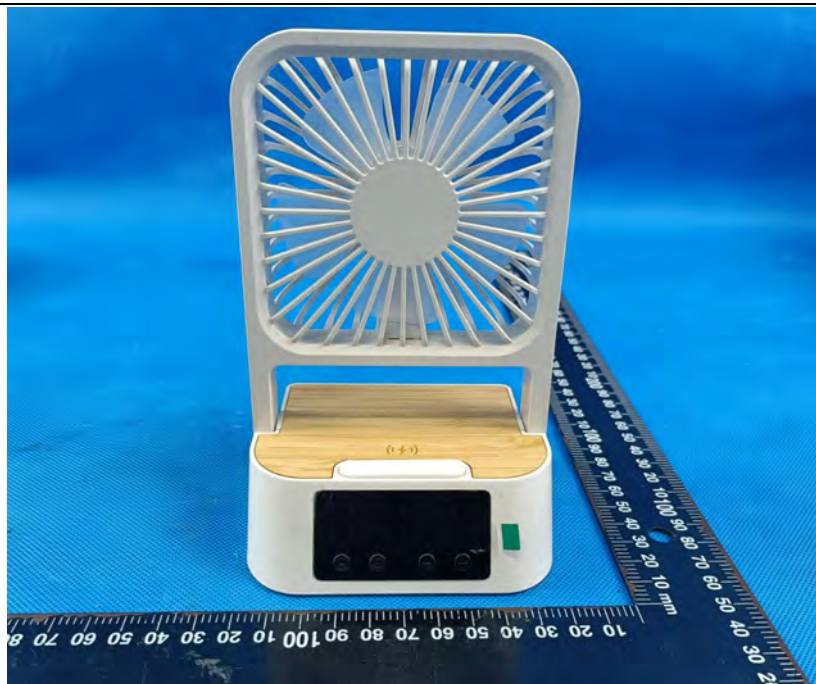

***** END OF REPORT *****