



Radio Test Report

Report No.: STS2601448W02

Issued for

Shenzhen Timekettle Technologies Co., Ltd

801, West Tower, Lepu Building, No.66, Xingke Road,
Nanshan, Shenzhen, China

Product Name: X1 Pro Earbuds

Brand Name: Timekettle

Model Name: TMK019-02

Series Model(s): N/A

FCC ID: 2AQ2G-TMK01902

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name : Shenzhen Timekettle Technologies Co.,Ltd
Address : 801, West Tower, Lepu Building, No.66, Xingke Road, Nanshan, Shenzhen, China
Manufacturer's Name : Shenzhen Timekettle Technologies Co.,Ltd
Address : 801, West Tower, Lepu Building, No.66, Xingke Road, Nanshan, Shenzhen, China

Product Description

Product Name : X1 Pro Earbuds
Brand Name : Timekettle
Model Name : TMK019-02
Series Model(s) : N/A

Test Standards : FCC Part15.247
Test Procedure : ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the IC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item : 31 Jan. 2026
Date (s) of performance of tests : 31 Jan. 2026~18 Mar. 2026
Date of Issue : 18 Mar. 2026
Test Result : **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TEST PROCEDURE	15
3.3 TEST SETUP	15
3.4 EUT OPERATING CONDITIONS	15
3.5 TEST RESULTS	16
4. RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMITS	18
4.2 TEST PROCEDURE	20
4.3 TEST SETUP	21
4.4 EUT OPERATING CONDITIONS	21
4.5 FIELD STRENGTH CALCULATION	22
4.6 TEST RESULTS	23
5. DUTY CYCLE	76
5.1 TEST STANDARD	76
5.2 TEST PROCEDURE	76
5.3 DEVIATION FROM STANDARD	76
5.4 TEST SETUP	76
5.6 TEST RESULTS	76
6. CONDUCTED SPURIOUS & BAND EDGE EMISSION	77
6.1 LIMIT	77
6.2 TEST PROCEDURE	77
6.3 TEST SETUP	77



Table of Contents	Page
6.4 EUT OPERATION CONDITIONS	77
6.5 TEST RESULTS	77
7. POWER SPECTRAL DENSITY TEST	78
7.1 LIMIT	78
7.2 TEST PROCEDURE	78
7.3 TEST SETUP	78
7.4 EUT OPERATION CONDITIONS	78
7.5 TEST RESULTS	78
8. BANDWIDTH TEST	79
8.1 LIMIT	79
8.2 TEST PROCEDURE	79
8.3 TEST SETUP	79
8.4 EUT OPERATION CONDITIONS	79
8.5 TEST RESULTS	79
9. PEAK OUTPUT POWER TEST	80
9.1 LIMIT	80
9.2 TEST PROCEDURE	80
9.3 TEST SETUP	80
9.4 EUT OPERATION CONDITIONS	80
9.5 TEST RESULTS	80
10. ANTENNA REQUIREMENT	81
10.1 STANDARD REQUIREMENT	81
10.2 EUT ANTENNA	81
APPENDIX 1-TEST DATA	82
DUTY CYCLE	82
MAXIMUM PEAK CONDUCTED OUTPUT POWER	86
-6DB BANDWIDTH	90
MAXIMUM POWER SPECTRAL DENSITY LEVEL	94
BAND EDGE	98
CONDUCTED RF SPURIOUS EMISSION	103
APPENDIX 2- EUT TEST PHOTO	110

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	18 Mar. 2026	STS2601448W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	X1 Pro Earbuds	
Brand Name	Timekettle	
Model Name	TMK019-02	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a X1 Pro Earbuds	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Radio Technology:	BLE
	Bluetooth Configuration:	LE(Support 1M PHY, 2M PHY)
	Number Of Channel:	40
	Antenna Type:	FPC
	Antenna Gain:	L:-4.42dBi R:-6.2dBi
Channel List	Please refer to the Note 3.	
Power Rating	Input:5V DC 2A	
Adapter	N/A	
Battery	Model: CH1054AA Brand:N/A Rated Voltage: 3.85V Charge Limit Voltage: 4.4V Capacity: 50mAh	
Hardware version number	R:INC-SKHTMK019-JL7016G3-V01-R L:INC-SKHTMK019-JL7016G3-V01-L	
Software version number	3.0.1	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.
3. Both the left and right ears have been tested, and only the worst mode is shown in the report



4.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1M PHY /GFSK
Mode 2	TX CH19(2440MHz)	1M PHY /GFSK
Mode 3	TX CH39(2480MHz)	1M PHY /GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2M PHY /GFSK
Mode 5	TX CH19(2440MHz)	2M PHY /GFSK
Mode 6	TX CH39(2480MHz)	2M PHY /GFSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 7 : Keeping BT TX




2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
BLE(With 2M PHY)	BLE_1M PHY	GFSK	L:-4.42 R:-6.2	6	FCC_assist1.0.4
	BLE_2M PHY	GFSK		6	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test

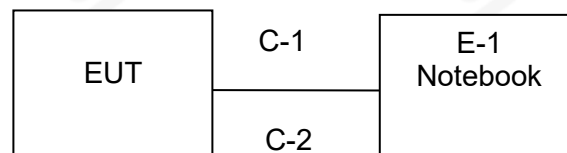

AC Conducted Emission Test

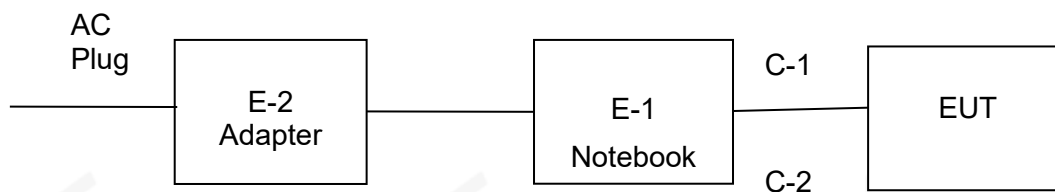

RF Conducted Test

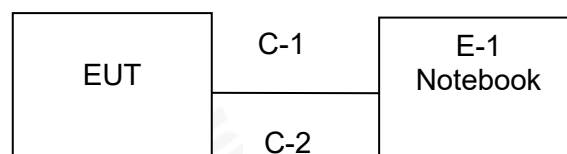



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Notebook	DELL	Inspiron 3501	N/A
E-2	Adapter	DELL	Inspiron 3501	N/A
C-1	Serial port board	XES	WTYZK	N/A
C-2	USB Cable	MI	RYEW3A	N/A

Item	Equipment	Mfr/Brand	Length	Note
C-2	Shielded	NO	150cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
				2026.02.04	2027.02.03
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Pre-Amplifier(1G-18 GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBEC K	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Band 2.4G-2.5G Filter	HX MICROWAVE	HXLBQ-DZA61	N/A	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENG F ENG	DPS-305AF	17064939	2025.09.22	2026.09.21
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
				2026.02.04	2027.02.03
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
				2026.02.04	2027.02.03
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
				2026.02.04	2027.02.03
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

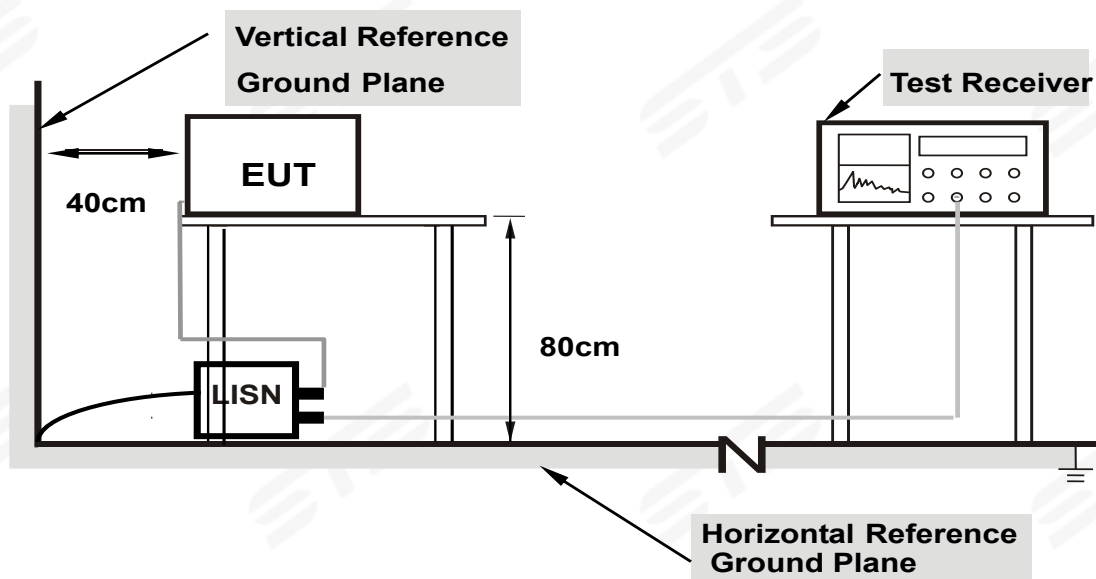

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.5 TEST RESULTS

Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 7		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	32.29	19.37	51.66	65.36	-13.70	QP
2	0.1620	15.51	19.37	34.88	55.36	-20.48	AVG
3	0.2620	24.70	19.37	44.07	61.37	-17.30	QP
4	0.2620	9.45	19.37	28.82	51.37	-22.55	AVG
5	0.4300	20.80	19.39	40.19	57.25	-17.06	QP
6	0.4300	8.16	19.39	27.55	47.25	-19.70	AVG
7	0.5980	21.44	19.38	40.82	56.00	-15.18	QP
8	0.5980	12.67	19.38	32.05	46.00	-13.95	AVG
9	1.1700	19.67	19.35	39.02	56.00	-16.98	QP
10	1.1700	6.15	19.35	25.50	46.00	-20.50	AVG
11	1.4300	20.23	19.35	39.58	56.00	-16.42	QP
12	1.4300	7.21	19.35	26.56	46.00	-19.44	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

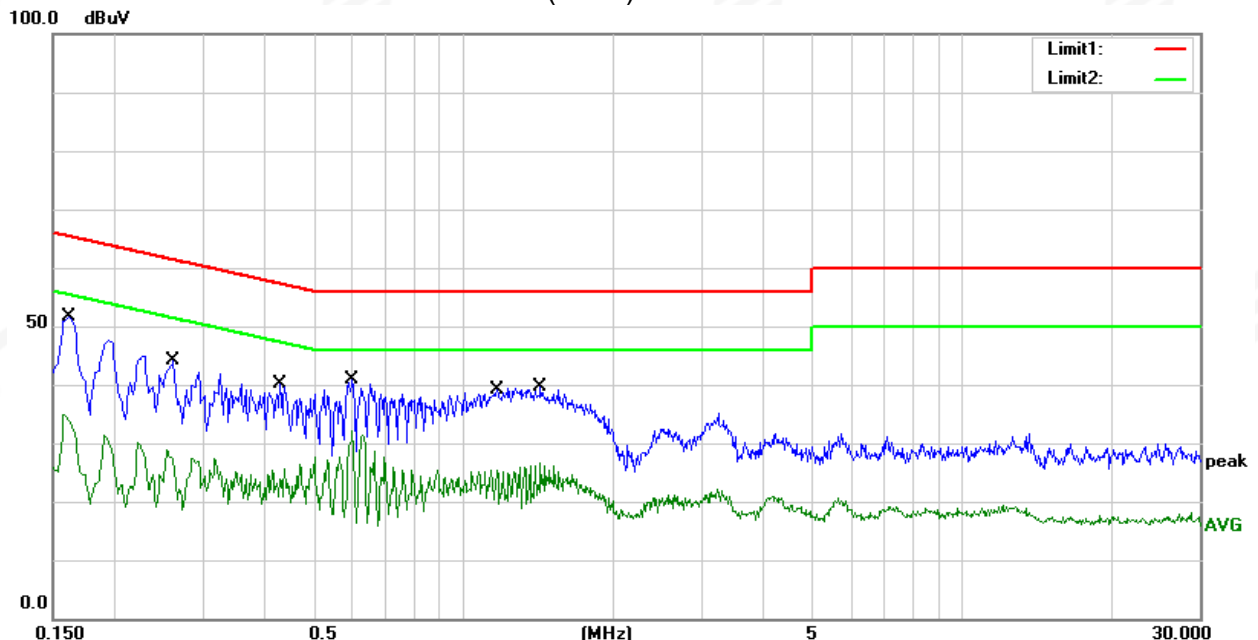




Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 7		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	35.39	19.37	54.76	65.78	-11.02	QP
2	0.1540	16.61	19.37	35.98	55.78	-19.80	AVG
3	0.2140	28.29	19.39	47.68	63.05	-15.37	QP
4	0.2140	12.24	19.39	31.63	53.05	-21.42	AVG
5	0.3420	23.69	19.37	43.06	59.15	-16.09	QP
6	0.3420	11.08	19.37	30.45	49.15	-18.70	AVG
7	0.5940	23.19	19.38	42.57	56.00	-13.43	QP
8	0.5940	11.32	19.38	30.70	46.00	-15.30	AVG
9	0.8100	20.31	19.36	39.67	56.00	-16.33	QP
10	0.8100	7.86	19.36	27.22	46.00	-18.78	AVG
11	1.2980	19.33	19.35	38.68	56.00	-17.32	QP
12	1.2980	7.06	19.35	26.41	46.00	-19.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

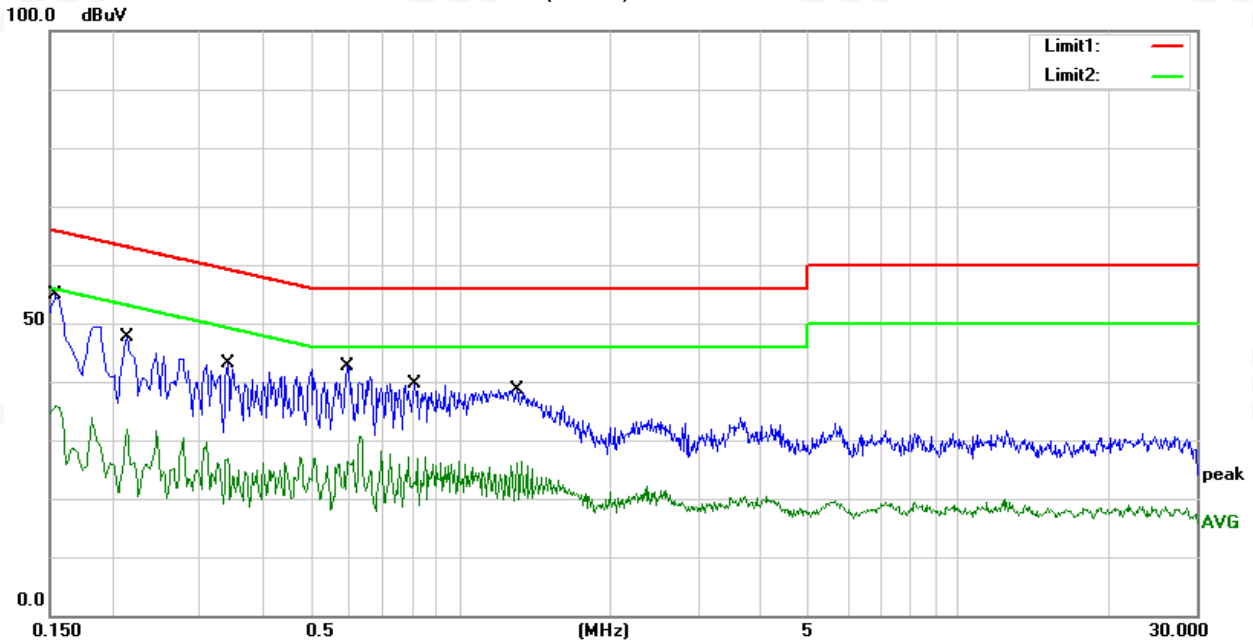



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested with a band-stop filter and performed pretest to three orthogonal axis. The worst-case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

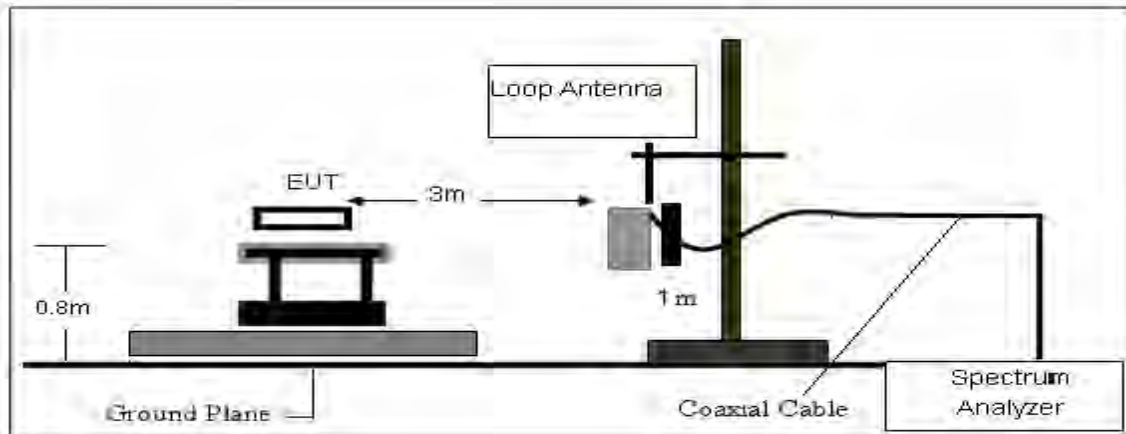

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

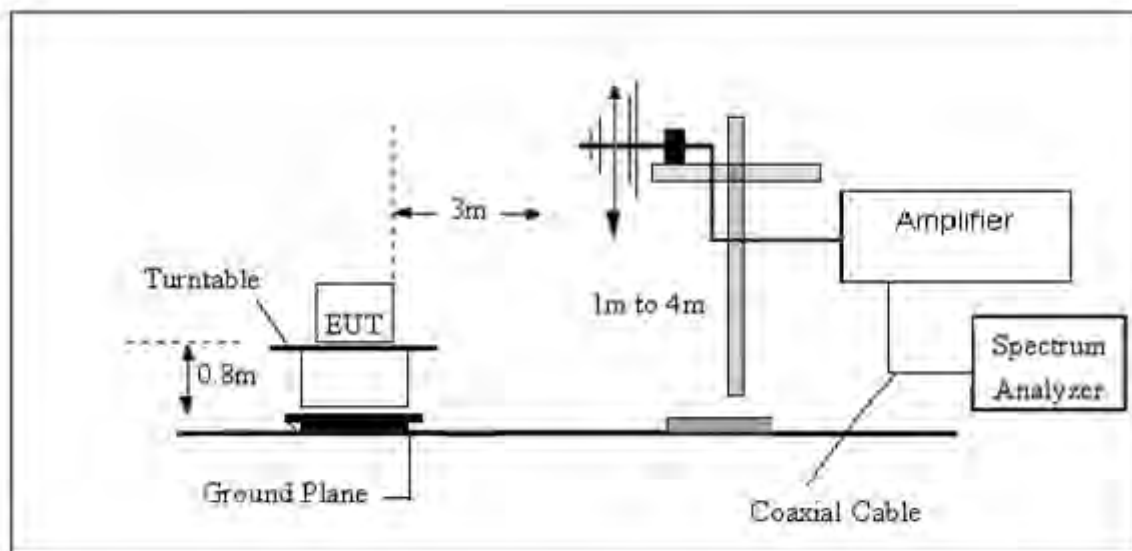

(C) Radiated Emission Test-Up Frequency Above 1GHz

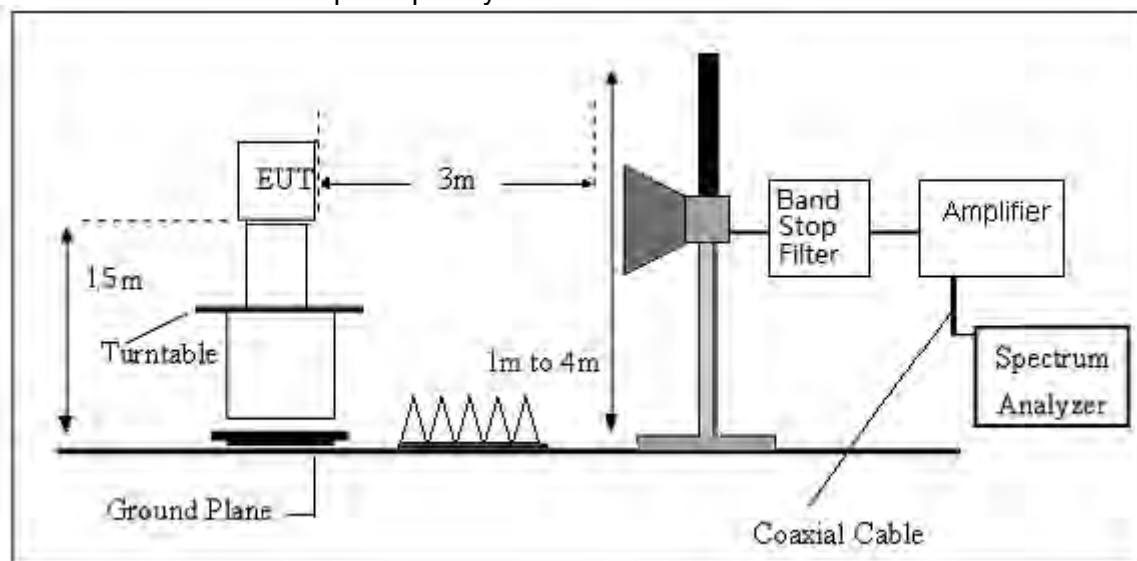

4.4 EUT OPERATING CONDITIONS



Please refer to section 3.4 of this report.

4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



4.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



(30MHz -1000MHz)

Left


1M PHY

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	180.3500	51.66	-20.04	31.62	43.50	-11.88	peak
2	197.8100	54.47	-21.12	33.35	43.50	-10.15	peak
3	227.8800	59.42	-19.20	40.22	46.00	-5.78	peak
4	339.4300	52.53	-13.43	39.10	46.00	-6.90	peak
5	664.3800	37.31	-4.71	32.60	46.00	-13.40	peak
6	992.2400	29.79	2.05	31.84	54.00	-22.16	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

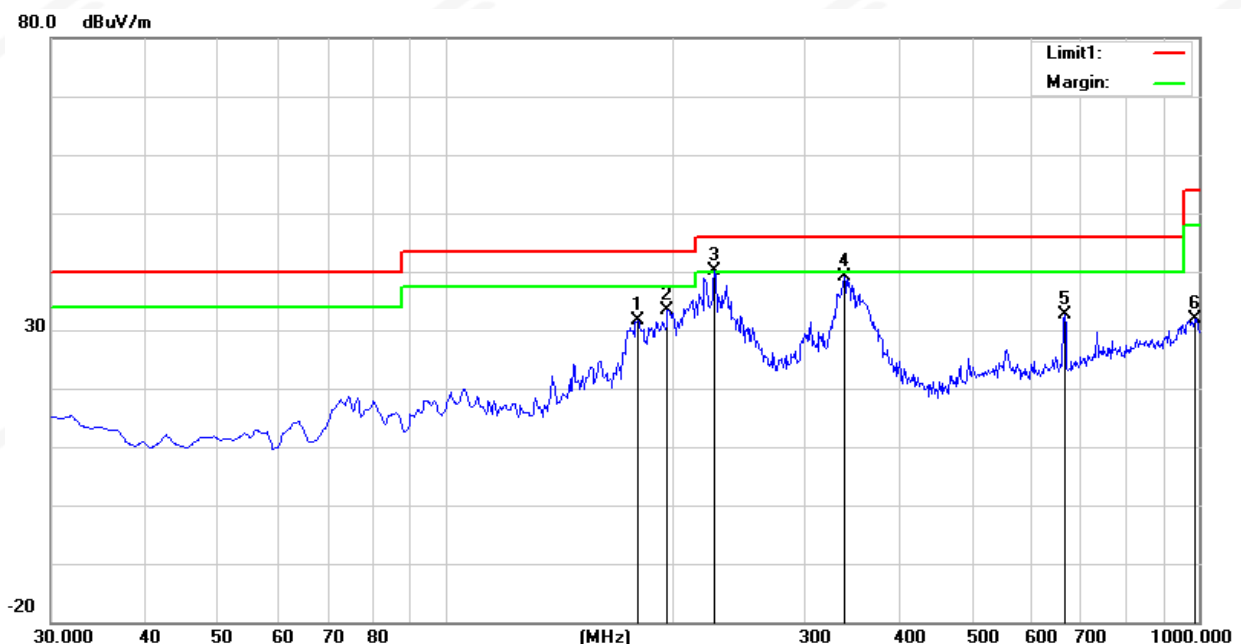




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	194.9000	55.94	-21.14	34.80	43.50	-8.70	peak
2	220.1200	53.27	-19.59	33.68	46.00	-12.32	peak
3	341.3700	51.48	-13.36	38.12	46.00	-7.88	peak
4	487.8400	35.46	-8.32	27.14	46.00	-18.86	peak
5	665.3500	35.17	-4.69	30.48	46.00	-15.52	peak
6	901.0600	38.81	-0.43	38.38	46.00	-7.62	peak

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

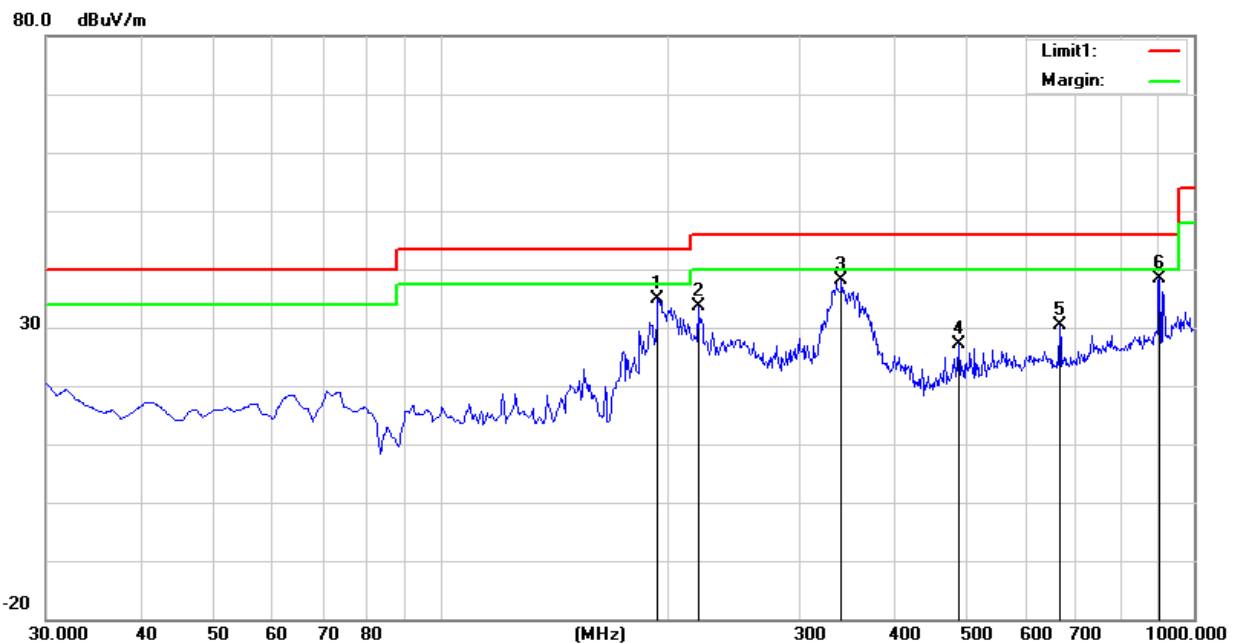




2M PHY

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Horizontal
Test Mode:	Mode 4/5/6 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	160.9500	44.03	-18.91	25.12	43.50	-18.38	peak
2	187.1400	56.46	-20.64	35.82	43.50	-7.68	peak
3	218.1800	60.18	-19.81	40.37	46.00	-5.63	peak
4	348.1600	51.94	-13.13	38.81	46.00	-7.19	peak
5	839.9500	31.66	-0.34	31.32	46.00	-14.68	peak
6	977.6900	33.35	2.52	35.87	54.00	-18.13	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

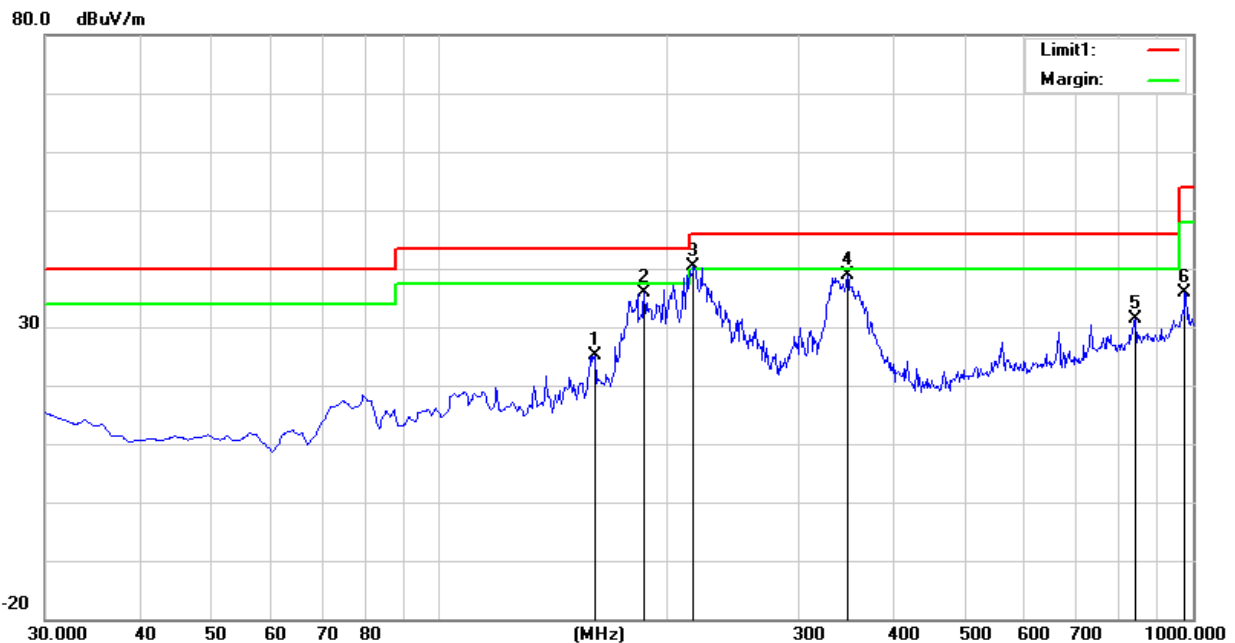




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Vertical
Test Mode:	Mode 4/5/6 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.2111	35.96	-12.95	23.01	40.00	-16.99	peak
2	40.6700	38.30	-18.40	19.90	40.00	-20.10	peak
3	188.1100	51.19	-20.76	30.43	43.50	-13.07	peak
4	339.4300	51.29	-13.43	37.86	46.00	-8.14	peak
5	664.3800	32.48	-4.71	27.77	46.00	-18.23	peak
6	963.1400	30.86	1.84	32.70	54.00	-21.30	peak

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

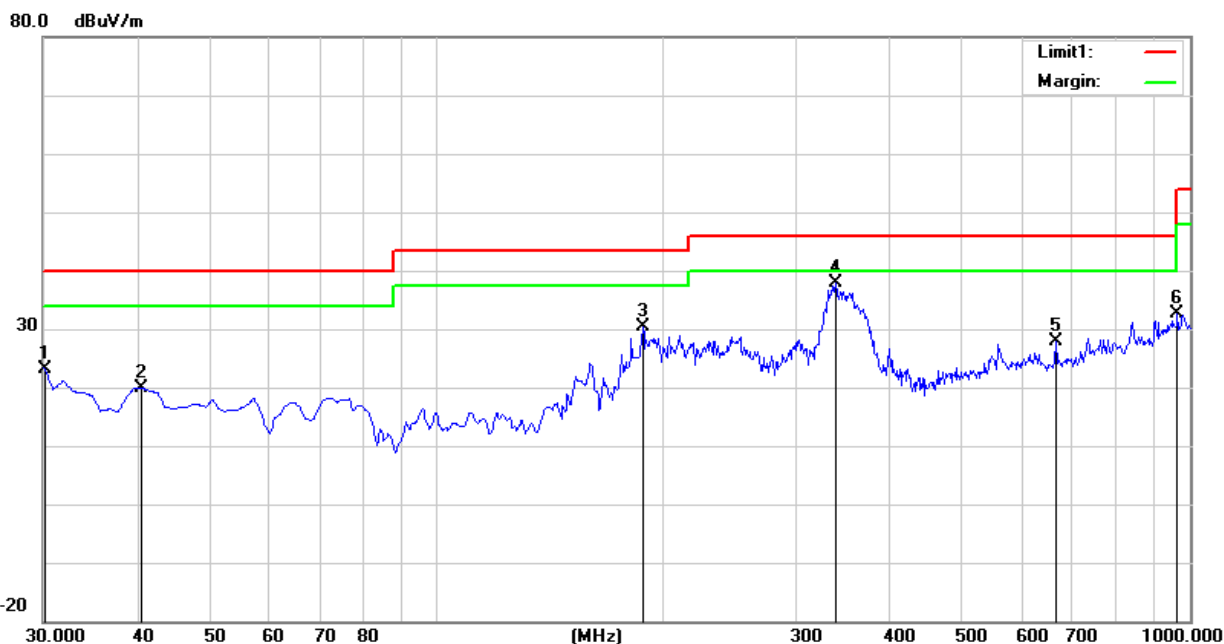



Right

1M PHY


Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.4400	53.54	-20.03	33.51	43.50	-9.99	peak
2	199.7500	57.92	-21.11	36.81	43.50	-6.69	peak
3	225.9400	58.16	-19.28	38.88	46.00	-7.12	peak
4	341.3700	54.36	-13.36	41.00	46.00	-5.00	peak
5	433.5200	47.92	-10.13	37.79	46.00	-8.21	peak
6	910.7600	37.86	-0.17	37.69	46.00	-8.31	peak

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
- All modes have been tested, only show the worst case.

80.0 dBuV/m

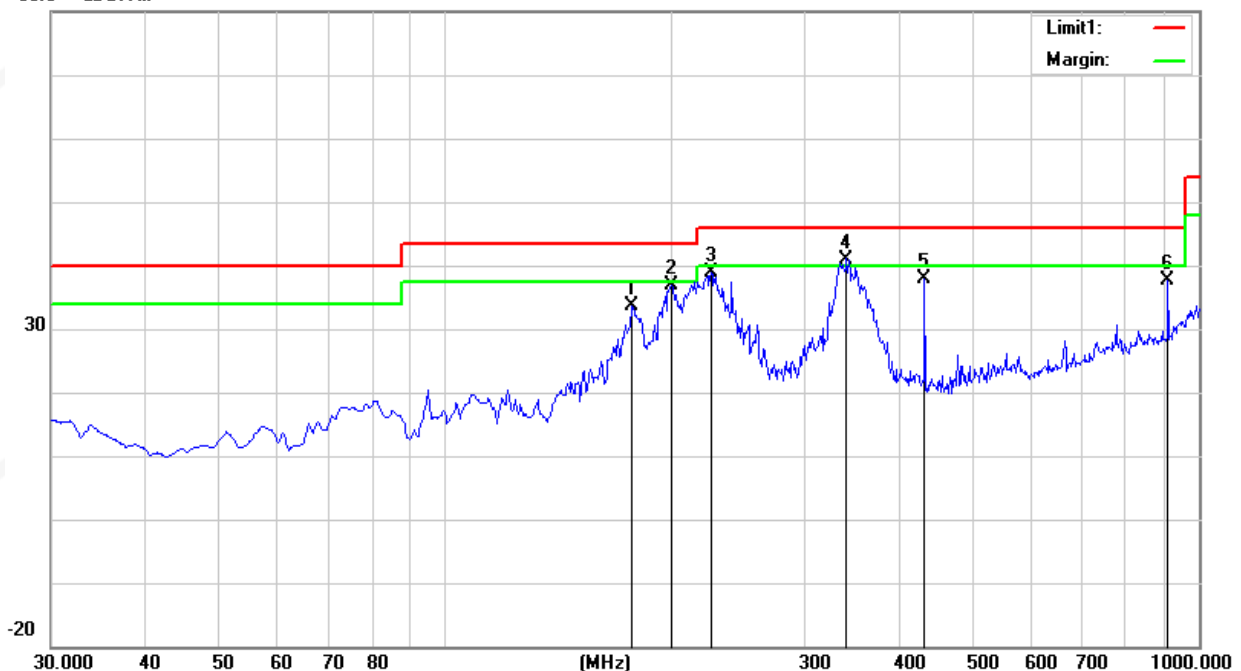




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	33.71	-13.86	19.85	40.00	-20.15	peak
2	40.6700	37.42	-18.40	19.02	40.00	-20.98	peak
3	188.1100	51.13	-20.76	30.37	43.50	-13.13	peak
4	339.4300	54.85	-13.43	41.42	46.00	-4.58	peak
5	666.3200	32.18	-4.66	27.52	46.00	-18.48	peak
6	910.7600	39.84	-0.17	39.67	46.00	-6.33	peak

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
- All modes have been tested, only show the worst case.

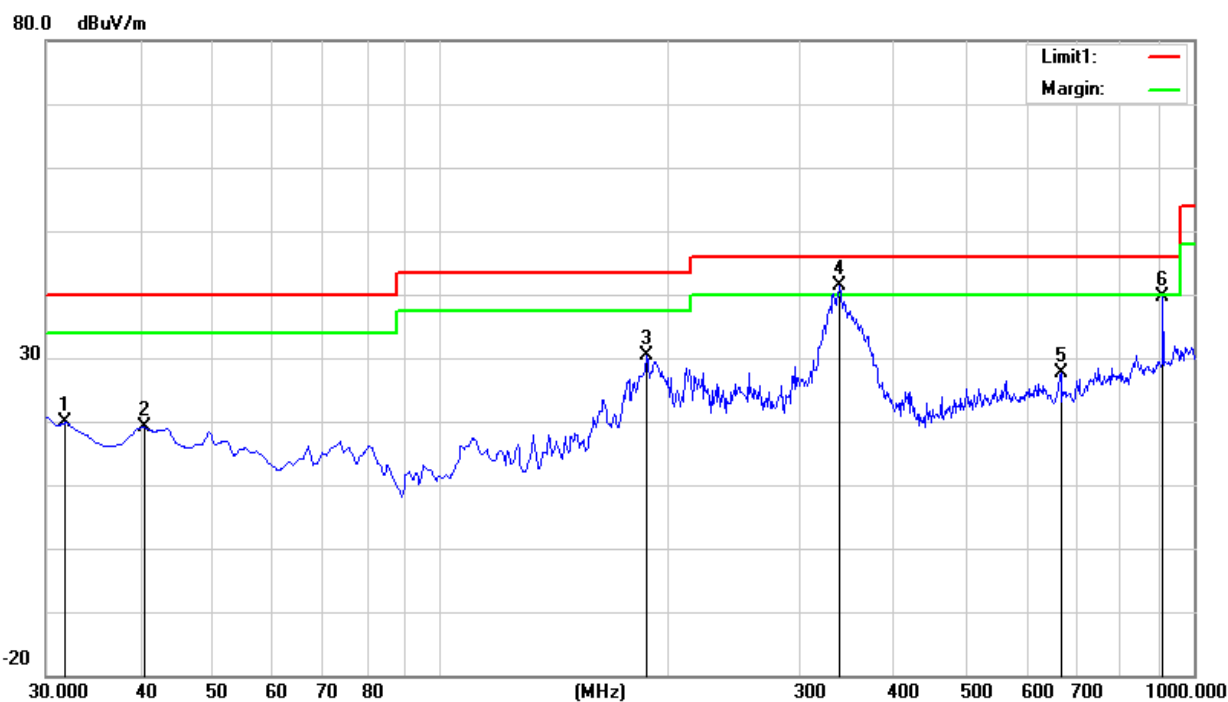



2M PHY


Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Horizontal
Test Mode:	Mode 4/5/6 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.4400	51.63	-20.03	31.60	43.50	-11.90	peak
2	200.7200	57.55	-21.06	36.49	43.50	-7.01	peak
3	226.9100	59.92	-19.24	40.68	46.00	-5.32	peak
4	334.5800	48.00	-13.56	34.44	46.00	-11.56	peak
5	433.5200	47.54	-10.13	37.41	46.00	-8.59	peak
6	982.5400	31.45	2.52	33.97	54.00	-20.03	peak

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
- All modes have been tested, only show the worst case.

80.0 dBuV/m

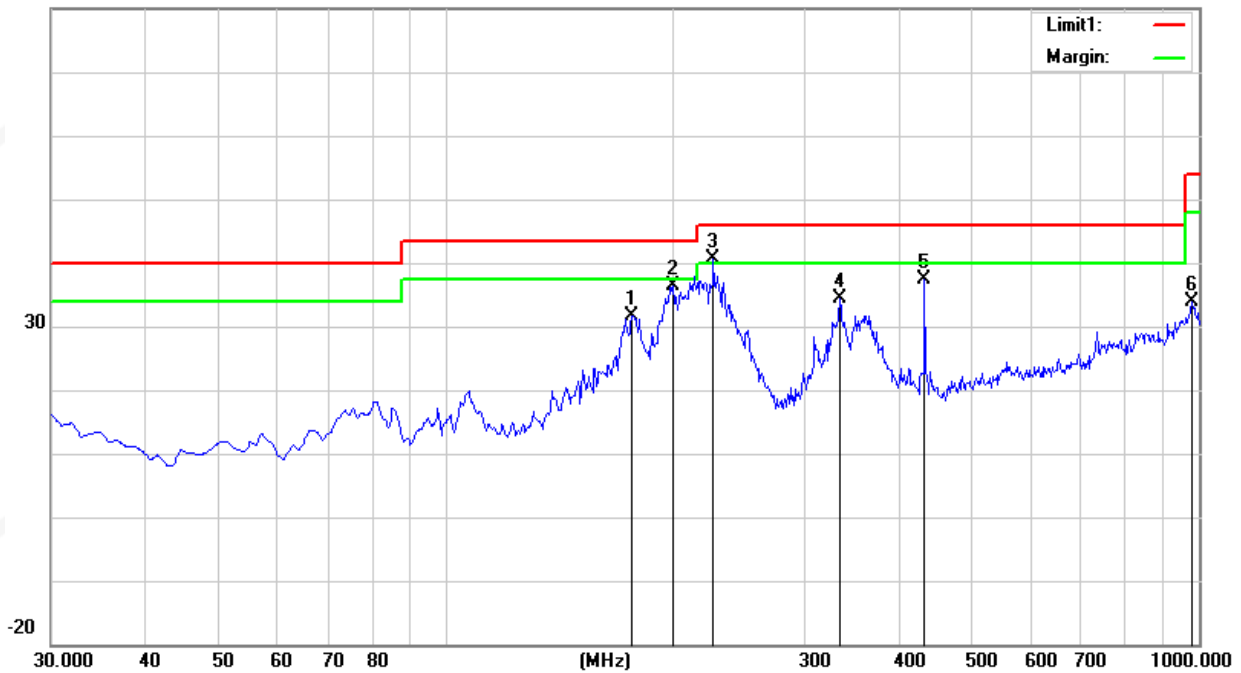




Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Phase:	Vertical
Test Mode:	Mode 4/5/6 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	194.9000	54.44	-21.14	33.30	43.50	-10.20	peak
2	217.2100	54.21	-19.93	34.28	46.00	-11.72	peak
3	336.5200	53.70	-13.51	40.19	46.00	-5.81	peak
4	506.2700	36.72	-7.97	28.75	46.00	-17.25	peak
5	665.3500	33.78	-4.69	29.09	46.00	-16.91	peak
6	901.0600	40.58	-0.43	40.15	46.00	-5.85	peak

Remark:

4. $\text{Margin} = \text{Result} (\text{Result} = \text{Reading} + \text{Factor}) - \text{Limit}$
5. $\text{Factor} = \text{Antenna factor} + \text{Cable attenuation factor (cable loss)} - \text{Amplifier gain}$
6. All modes have been tested, only show the worst case.

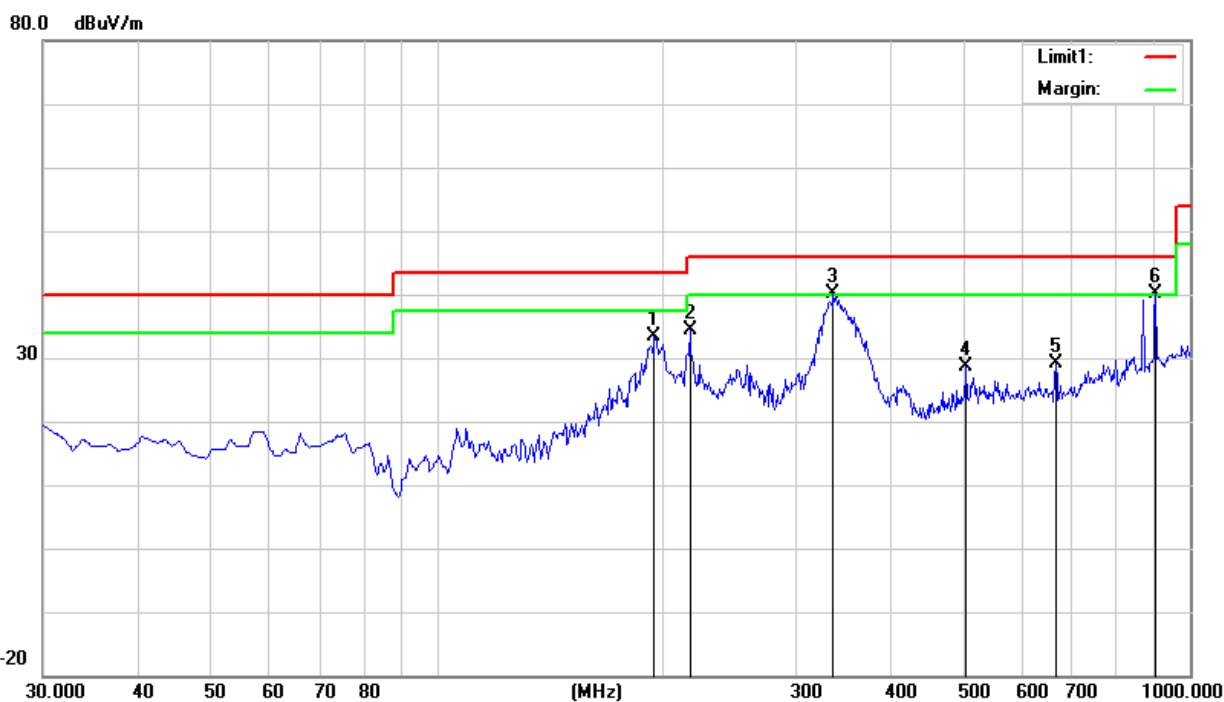




(1GHz-25GHz) Spurious emission Requirements

Left
1M PHY
RSE-L-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

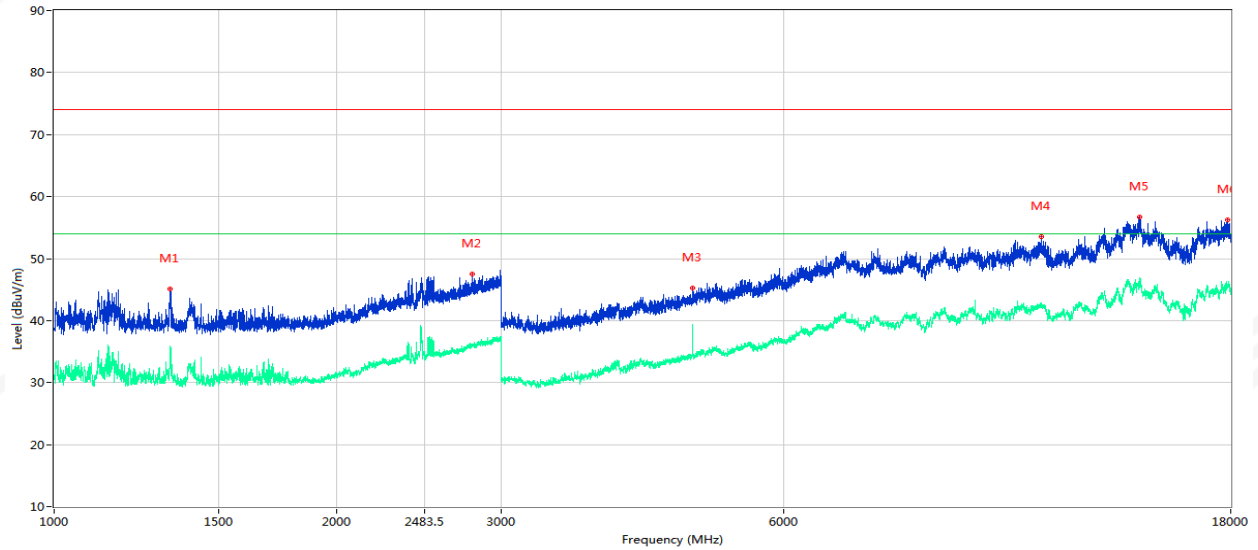


No	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1329.500	45.08	-1.29	74.0	28.92	Peak	245.30	Horizontal	Pass
1**	1329.500	35.92	-1.29	54.0	18.08	AV	245.30	Horizontal	Pass
2	2794.000	47.48	4.71	74.0	26.52	Peak	197.40	Horizontal	Pass
2**	2794.000	35.92	4.71	54.0	18.08	AV	197.40	Horizontal	Pass
3	4801.000	45.20	-7.14	74.0	28.80	Peak	244.60	Horizontal	Pass
3**	4801.000	39.42	-7.14	54.0	14.58	AV	244.60	Horizontal	Pass
4	11312.000	53.53	2.24	74.0	20.47	Peak	106.60	Horizontal	Pass
4**	11312.000	42.45	2.24	54.0	11.55	AV	106.60	Horizontal	Pass
5	14397.500	56.67	6.99	74.0	17.33	Peak	269.60	Horizontal	Pass
5**	14397.500	46.54	6.99	54.0	7.46	AV	269.60	Horizontal	Pass
6	17859.750	56.28	6.89	74.0	17.72	Peak	50.80	Horizontal	Pass
6**	17859.750	45.57	6.89	54.0	8.43	AV	50.80	Horizontal	Pass



RSE-L-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

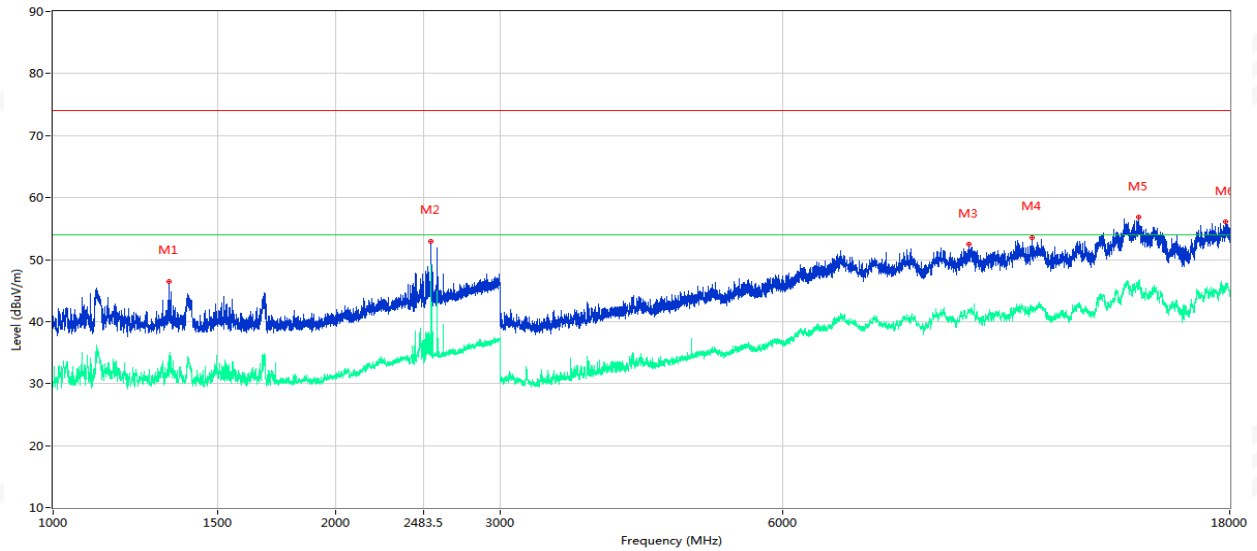


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1330.500	46.51	-1.29	74.0	27.49	Peak	188.40	Vertical	Pass
1**	1330.500	34.08	-1.29	54.0	19.92	AV	188.40	Vertical	Pass
2	2532.000	52.99	3.41	74.0	21.01	Peak	188.40	Vertical	Pass
2**	2532.000	47.68	3.41	54.0	6.32	AV	188.40	Vertical	Pass
3	9494.250	52.53	1.51	74.0	21.47	Peak	217.20	Vertical	Pass
3**	9494.250	41.63	1.51	54.0	12.37	AV	217.20	Vertical	Pass
4	11086.500	53.60	2.04	74.0	20.40	Peak	66.20	Vertical	Pass
4**	11086.500	42.19	2.04	54.0	11.81	AV	66.20	Vertical	Pass
5	14403.000	56.78	6.97	74.0	17.22	Peak	182.60	Vertical	Pass
5**	14403.000	46.40	6.97	54.0	7.60	AV	182.60	Vertical	Pass
6	17810.250	56.06	6.47	74.0	17.94	Peak	37.90	Vertical	Pass
6**	17810.250	45.36	6.47	54.0	8.64	AV	37.90	Vertical	Pass



RSE-L-18G-26G-H

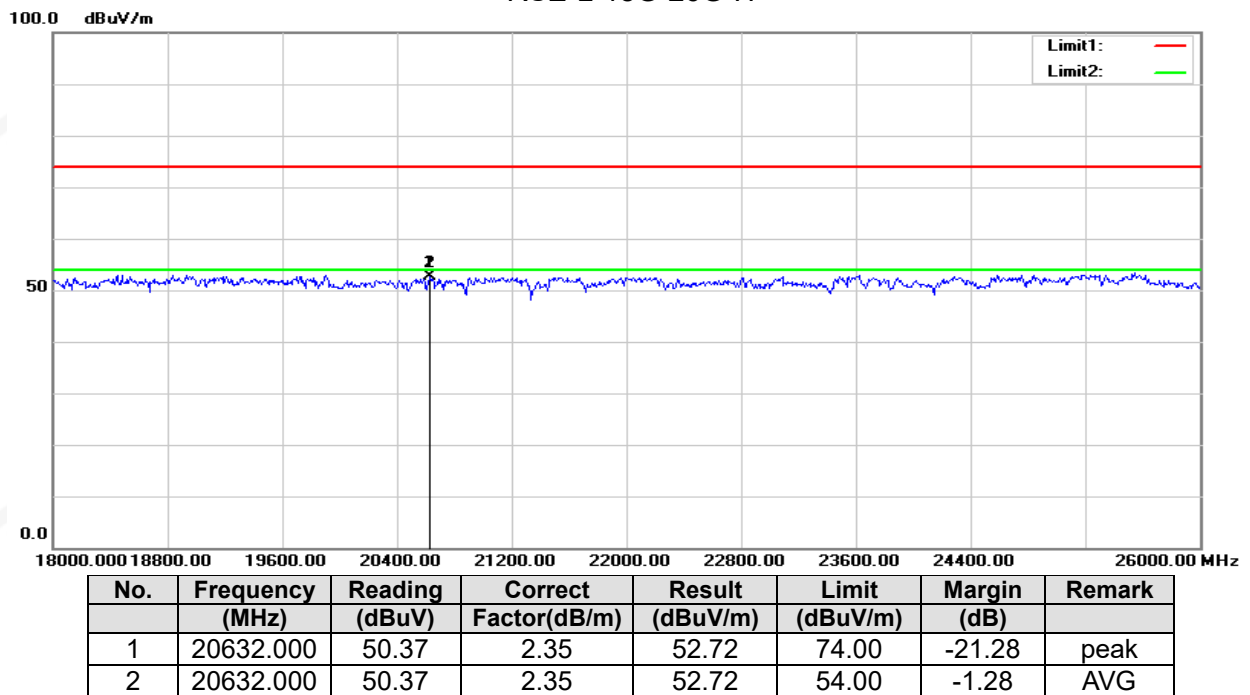


RSE-L-18G-26G-V

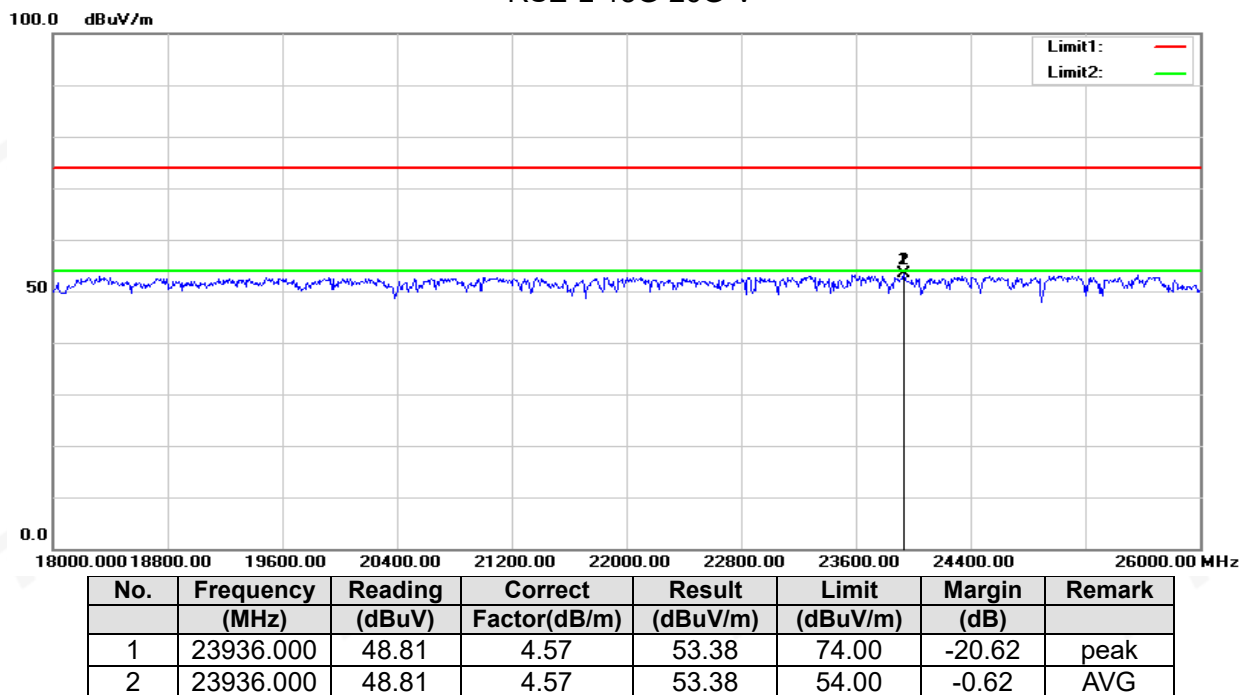



RSE-M-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

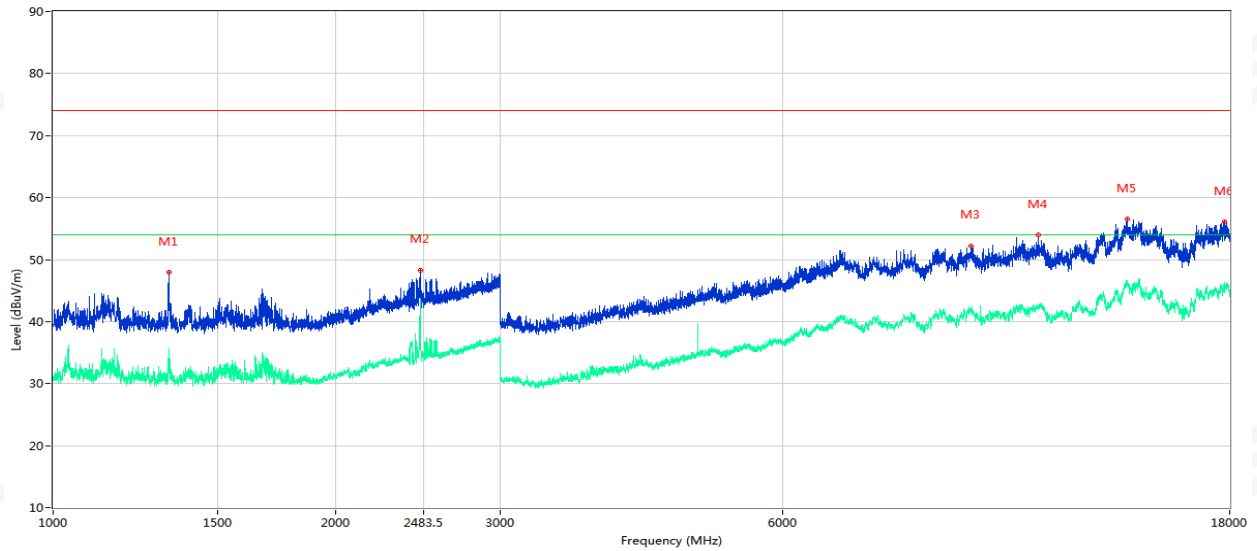


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1328.000	47.99	-1.29	74.0	26.01	Peak	173.60	Horizontal	Pass
1**	1328.000	35.61	-1.29	54.0	18.39	AV	173.60	Horizontal	Pass
2	2464.000	48.33	3.21	74.0	25.67	Peak	169.20	Horizontal	Pass
2**	2464.000	43.11	3.21	54.0	10.89	AV	169.20	Horizontal	Pass
3	9527.250	52.13	1.28	74.0	21.87	Peak	181.40	Horizontal	Pass
3**	9527.250	41.83	1.28	54.0	12.17	AV	181.40	Horizontal	Pass
4	11248.750	53.97	2.45	74.0	20.03	Peak	294.50	Horizontal	Pass
4**	11248.750	42.18	2.45	54.0	11.82	AV	294.50	Horizontal	Pass
5	14009.750	56.59	8.29	74.0	17.41	Peak	153.50	Horizontal	Pass
5**	14009.750	45.91	8.29	54.0	8.09	AV	153.50	Horizontal	Pass
6	17774.500	56.07	6.27	74.0	17.93	Peak	228.30	Horizontal	Pass
6**	17774.500	45.49	6.27	54.0	8.51	AV	228.30	Horizontal	Pass



RSE-M-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

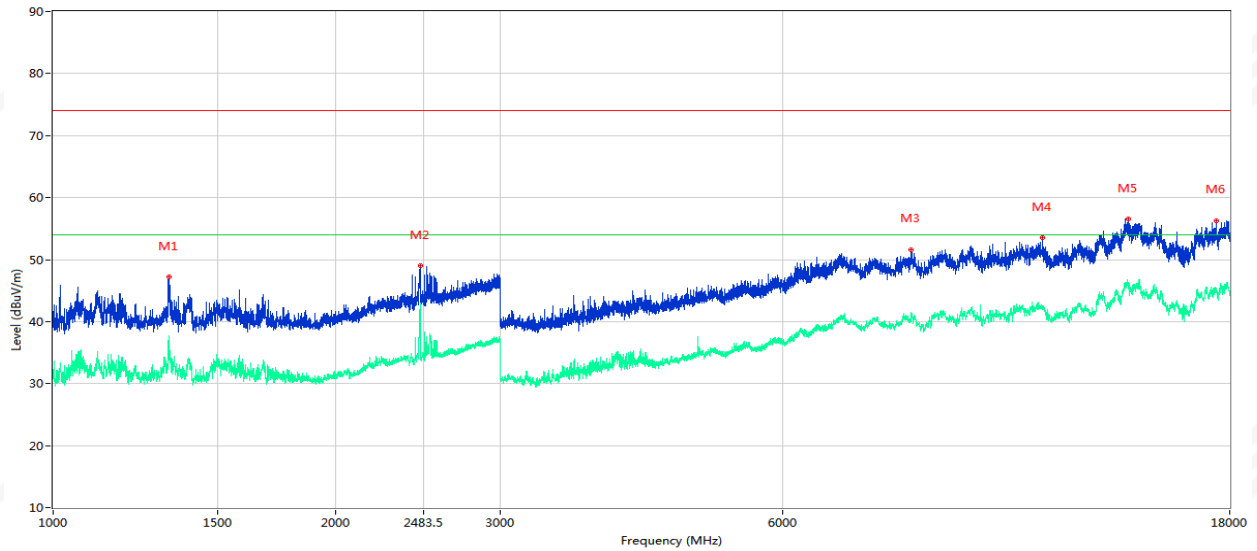

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1328.000	47.18	-1.29	74.0	26.82	Peak	199.50	Vertical	Pass
1**	1328.000	37.73	-1.29	54.0	16.27	AV	199.50	Vertical	Pass
2	2464.000	48.99	3.21	74.0	25.01	Peak	206.90	Vertical	Pass
2**	2464.000	43.06	3.21	54.0	10.94	AV	206.90	Vertical	Pass
3	8232.000	51.63	-0.52	74.0	22.37	Peak	309.80	Vertical	Pass
3**	8232.000	40.65	-0.52	54.0	13.35	AV	309.80	Vertical	Pass
4	11353.250	53.53	2.10	74.0	20.47	Peak	222.50	Vertical	Pass
4**	11353.250	42.12	2.10	54.0	11.88	AV	222.50	Vertical	Pass
5	14048.250	56.59	7.68	74.0	17.41	Peak	20.10	Vertical	Pass
5**	14048.250	46.08	7.68	54.0	7.92	AV	20.10	Vertical	Pass
6	17397.750	56.31	6.96	74.0	17.69	Peak	149.90	Vertical	Pass
6**	17397.750	44.79	6.96	54.0	9.21	AV	149.90	Vertical	Pass




RSE-M-18G-26G-H

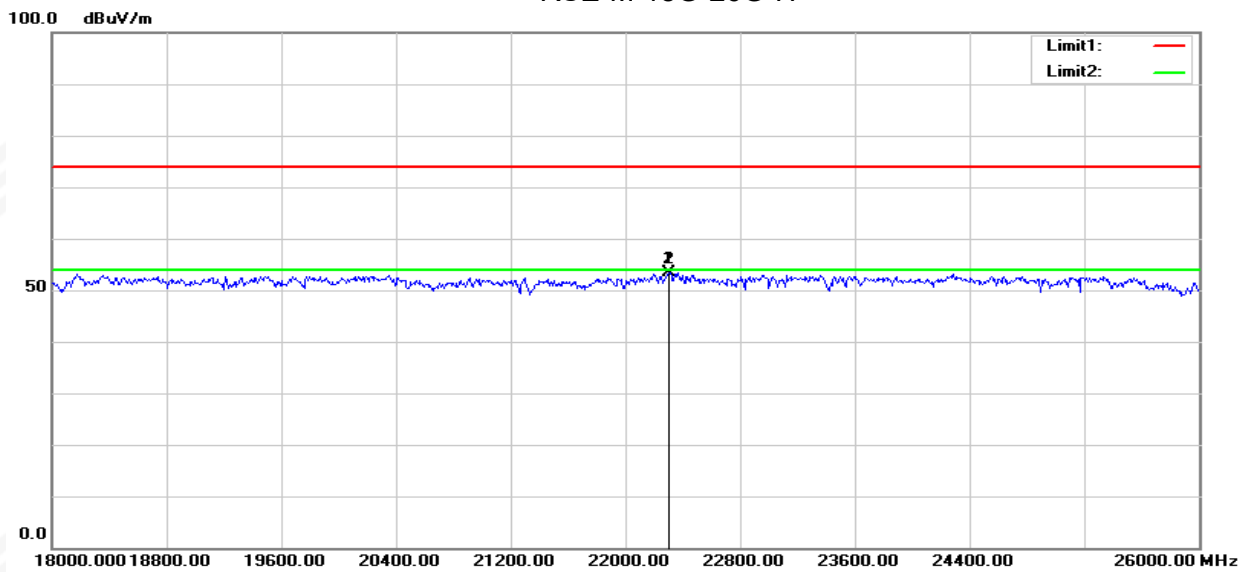

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22304.000	49.70	3.72	53.42	74.00	-20.58	peak
2	22304.000	49.70	3.72	53.42	54.00	-0.58	AVG

RSE-M-18G-26G-V

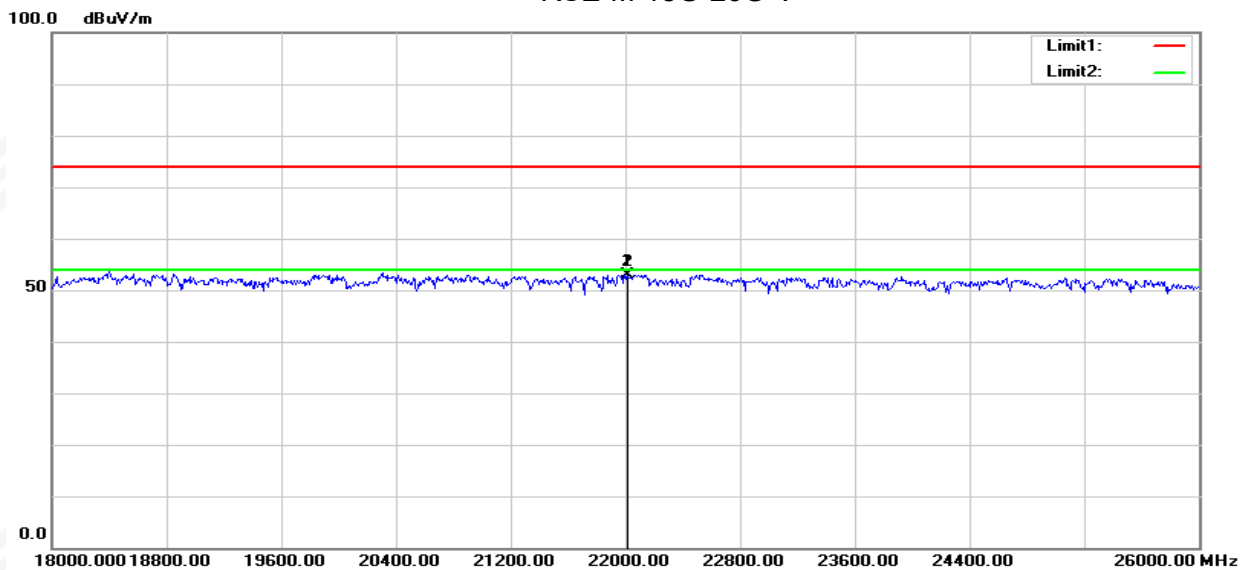


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22016.000	49.57	3.42	52.99	74.00	-21.01	peak
2	22016.000	49.57	3.42	52.99	54.00	-1.01	AVG



RSE-H-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

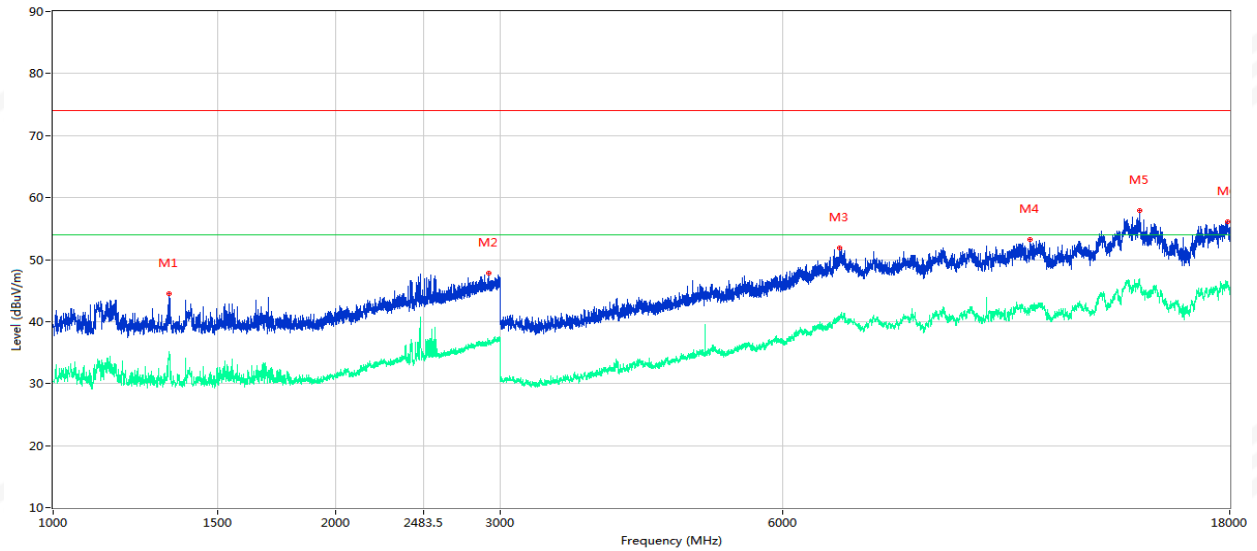


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1328.500	44.45	-1.29	74.0	29.55	Peak	191.10	Horizontal	Pass
1**	1328.500	34.86	-1.29	54.0	19.14	AV	191.10	Horizontal	Pass
2	2915.000	47.76	4.99	74.0	26.24	Peak	149.00	Horizontal	Pass
2**	2915.000	36.61	4.99	54.0	17.39	AV	149.00	Horizontal	Pass
3	6908.000	51.83	0.57	74.0	22.17	Peak	352.00	Horizontal	Pass
3**	6908.000	40.69	0.57	54.0	13.31	AV	352.00	Horizontal	Pass
4	11034.250	53.26	1.88	74.0	20.74	Peak	341.00	Horizontal	Pass
4**	11034.250	42.60	1.88	54.0	11.40	AV	341.00	Horizontal	Pass
5	14444.250	57.90	6.68	74.0	16.10	Peak	287.80	Horizontal	Pass
5**	14444.250	45.99	6.68	54.0	8.01	AV	287.80	Horizontal	Pass
6	17925.751	56.04	7.04	74.0	17.96	Peak	54.10	Horizontal	Pass
6**	17925.751	45.74	7.04	54.0	8.26	AV	54.10	Horizontal	Pass



RSE-H-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

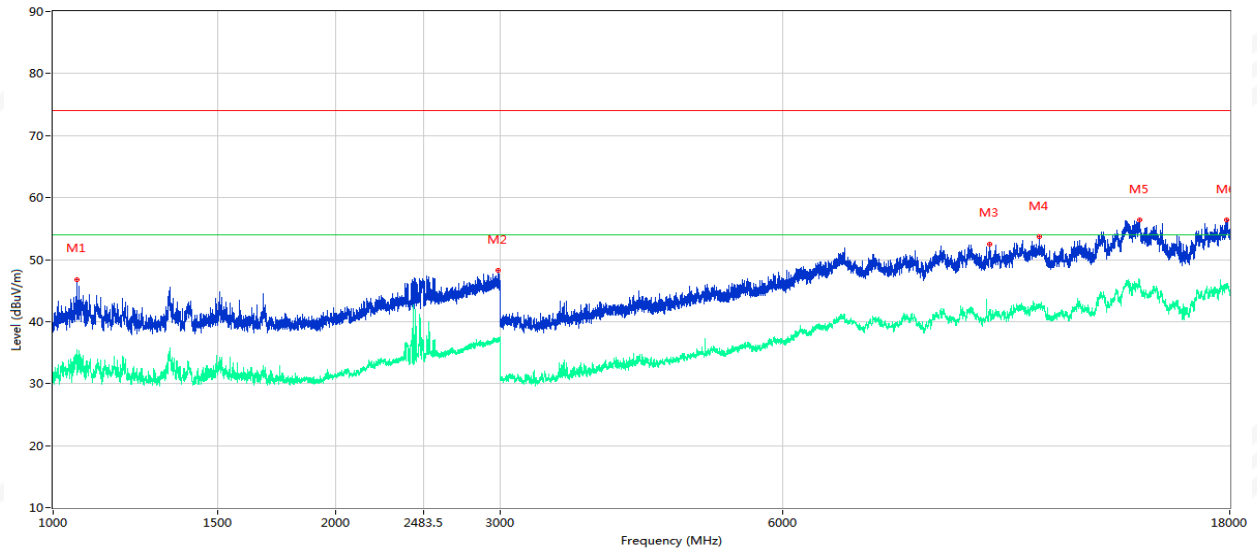

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1059.000	46.83	-2.03	74.0	27.17	Peak	170.30	Vertical	Pass
1**	1059.000	35.51	-2.03	54.0	18.49	AV	170.30	Vertical	Pass
2	2983.500	48.21	5.38	74.0	25.79	Peak	69.50	Vertical	Pass
2**	2983.500	37.14	5.38	54.0	16.86	AV	69.50	Vertical	Pass
3	9991.999	52.54	1.15	74.0	21.46	Peak	145.40	Vertical	Pass
3**	9991.999	41.85	1.15	54.0	12.15	AV	145.40	Vertical	Pass
4	11265.250	53.66	2.40	74.0	20.34	Peak	0.00	Vertical	Pass
4**	11265.250	42.29	2.40	54.0	11.71	AV	0.00	Vertical	Pass
5	14411.250	56.38	6.91	74.0	17.62	Peak	303.80	Vertical	Pass
5**	14411.250	46.49	6.91	54.0	7.51	AV	303.80	Vertical	Pass
6	17881.750	56.37	7.08	74.0	17.63	Peak	167.70	Vertical	Pass
6**	17881.750	46.07	7.08	54.0	7.93	AV	167.70	Vertical	Pass




RSE-H-18G-26G-H

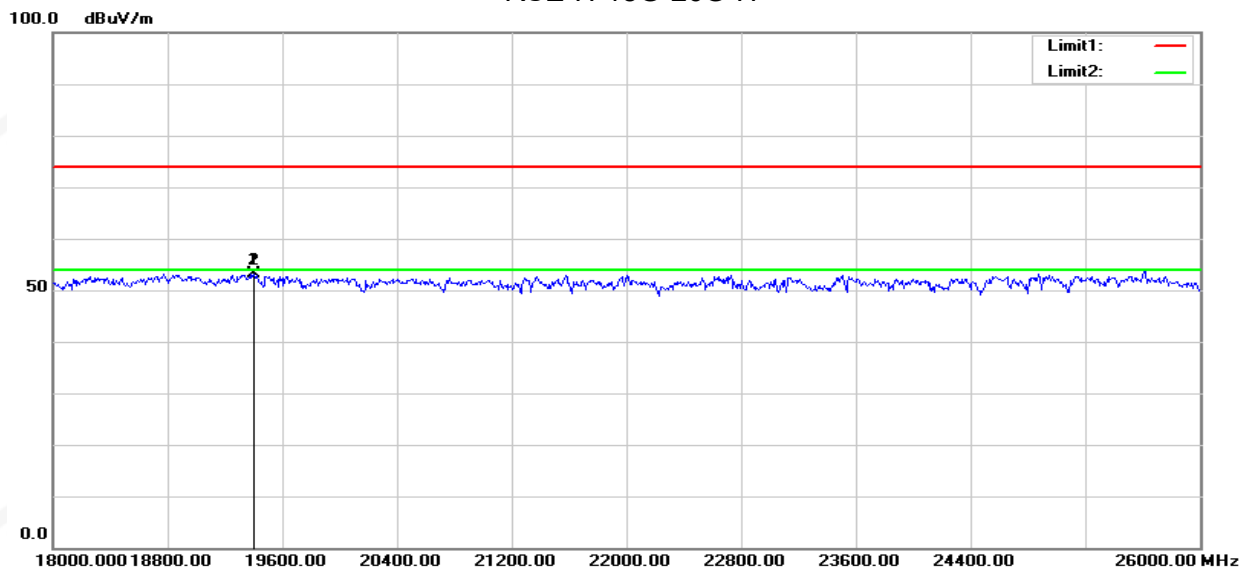

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19400.000	51.49	1.53	53.02	74.00	-20.98	peak
2	19400.000	51.49	1.53	53.02	54.00	-0.98	AVG


RSE-H-18G-26G-V

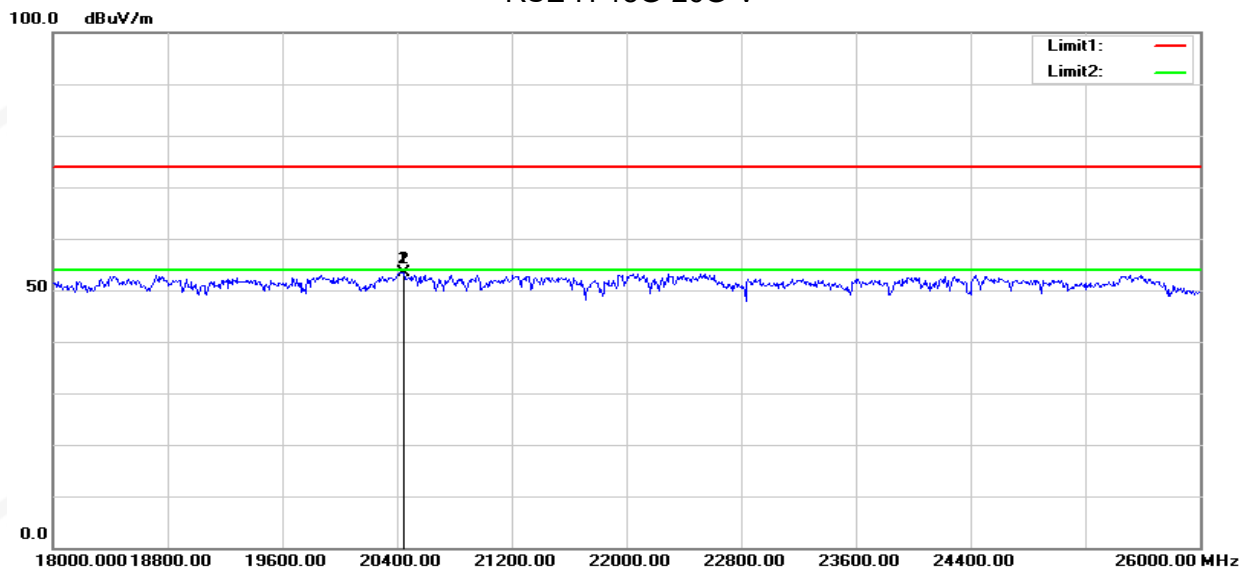

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	20448.000	51.31	2.19	53.50	74.00	-20.50	peak
2	20448.000	51.31	2.19	53.50	54.00	-0.50	AVG

Right
RSE-L-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

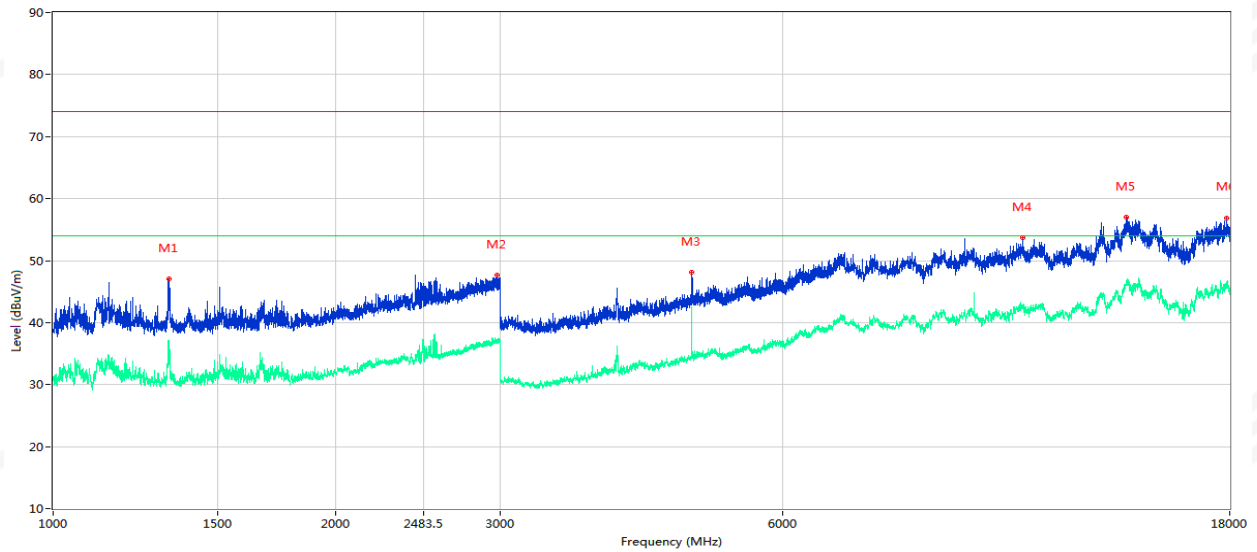


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1328.000	47.01	-1.29	74.0	26.99	Peak	183.00	Horizontal	Pass
1**	1328.000	37.15	-1.29	54.0	16.85	AV	183.00	Horizontal	Pass
2	2975.000	47.60	5.34	74.0	26.40	Peak	278.70	Horizontal	Pass
2**	2975.000	36.70	5.34	54.0	17.30	AV	278.70	Horizontal	Pass
3	4801.000	48.11	-7.14	74.0	25.89	Peak	238.00	Horizontal	Pass
3**	4801.000	42.48	-7.14	54.0	11.52	AV	238.00	Horizontal	Pass
4	10825.250	53.72	1.97	74.0	20.28	Peak	290.40	Horizontal	Pass
4**	10825.250	42.58	1.97	54.0	11.42	AV	290.40	Horizontal	Pass
5	13976.750	56.94	8.16	74.0	17.06	Peak	137.10	Horizontal	Pass
5**	13976.750	46.77	8.16	54.0	7.23	AV	137.10	Horizontal	Pass
6	17870.750	56.93	6.99	74.0	17.07	Peak	137.10	Horizontal	Pass
6**	17870.750	46.01	6.99	54.0	7.99	AV	137.10	Horizontal	Pass



RSE-L-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

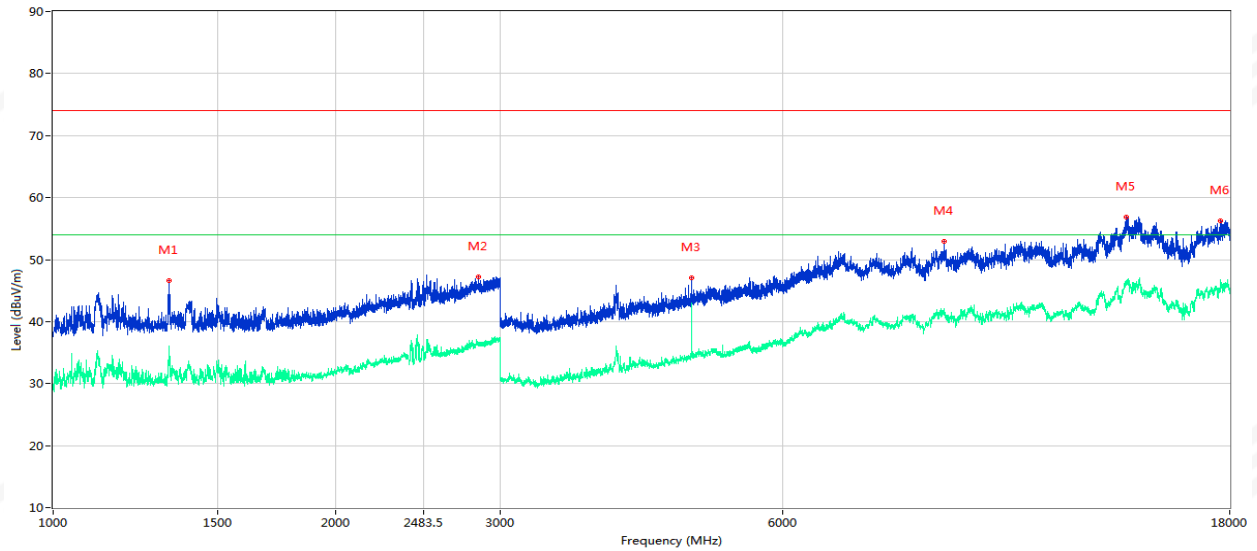

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1328.500	46.60	-1.29	74.0	27.40	Peak	270.20	Vertical	Pass
1**	1328.500	35.92	-1.29	54.0	18.08	AV	270.20	Vertical	Pass
2	2844.500	47.18	4.97	74.0	26.82	Peak	193.30	Vertical	Pass
2**	2844.500	36.12	4.97	54.0	17.88	AV	193.30	Vertical	Pass
3	4801.000	47.10	-7.14	74.0	26.90	Peak	155.70	Vertical	Pass
3**	4801.000	42.94	-7.14	54.0	11.06	AV	155.70	Vertical	Pass
4	8922.250	52.92	1.25	74.0	21.08	Peak	6.80	Vertical	Pass
4**	8922.250	42.10	1.25	54.0	11.90	AV	6.80	Vertical	Pass
5	13976.750	56.89	8.16	74.0	17.11	Peak	310.70	Vertical	Pass
5**	13976.750	46.41	8.16	54.0	7.59	AV	310.70	Vertical	Pass
6	17598.501	56.27	6.59	74.0	17.73	Peak	5.60	Vertical	Pass
6**	17598.501	46.69	6.59	54.0	7.31	AV	5.60	Vertical	Pass




RSE-L-18G-26G-H

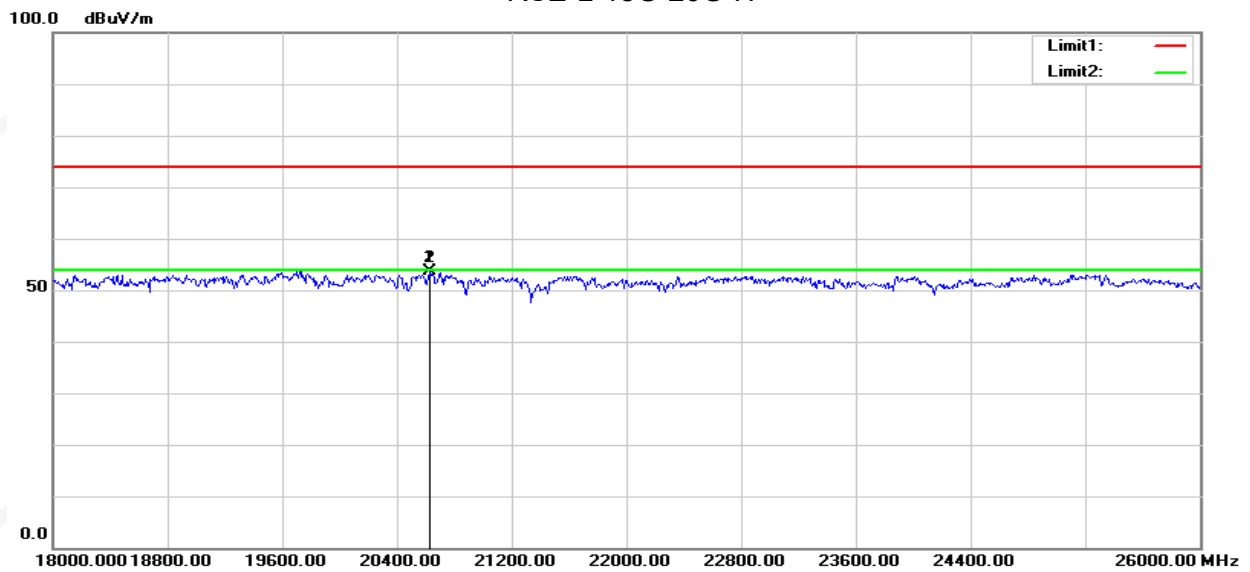

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	20632.000	51.37	2.35	53.72	74.00	-20.28	peak
2	20632.000	51.37	2.35	53.72	54.00	-0.28	AVG

RSE-L-18G-26G-V

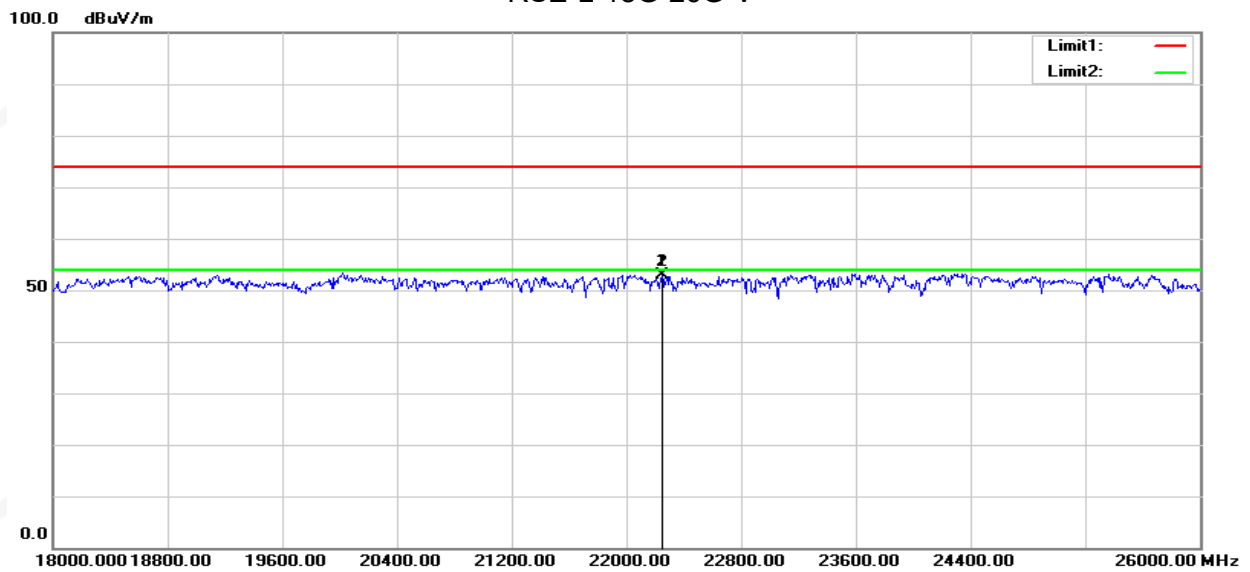


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22248.000	49.31	3.67	52.98	74.00	-21.02	peak
2	22248.000	49.31	3.67	52.98	54.00	-1.02	AVG



RSE-M-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

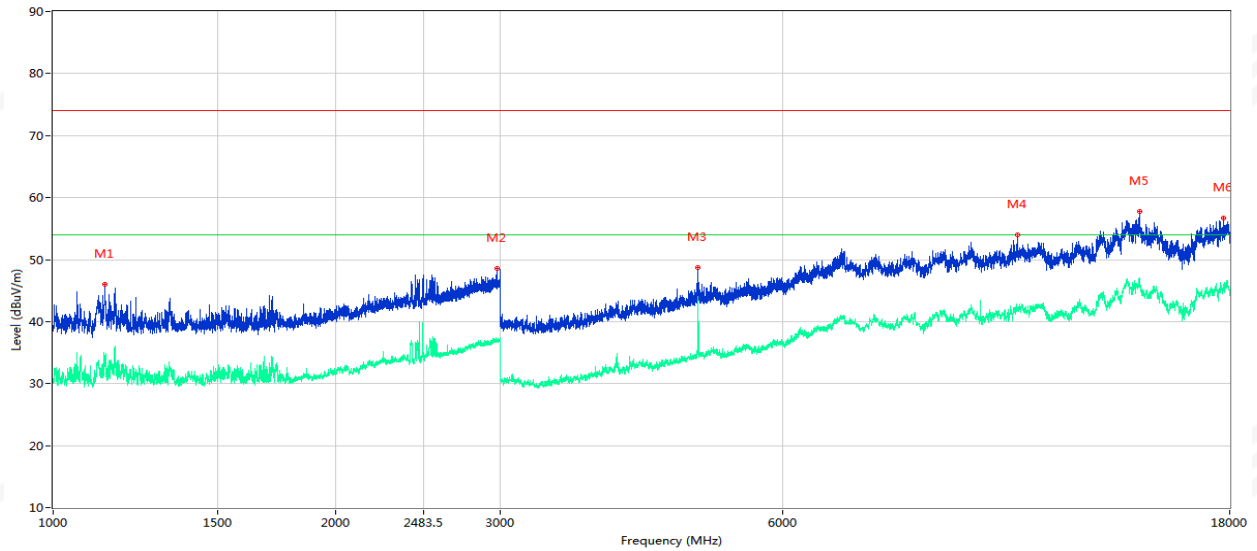


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1135.500	46.05	-1.70	74.0	27.95	Peak	294.90	Horizontal	Pass
1**	1135.500	34.50	-1.70	54.0	19.50	AV	294.90	Horizontal	Pass
2	2978.500	48.54	5.35	74.0	25.46	Peak	187.00	Horizontal	Pass
2**	2978.500	36.83	5.35	54.0	17.17	AV	187.00	Horizontal	Pass
3	4877.000	48.75	-6.32	74.0	25.25	Peak	237.20	Horizontal	Pass
3**	4877.000	43.98	-6.32	54.0	10.02	AV	237.20	Horizontal	Pass
4	10698.750	53.93	1.16	74.0	20.07	Peak	94.70	Horizontal	Pass
4**	10698.750	42.02	1.16	54.0	11.98	AV	94.70	Horizontal	Pass
5	14441.500	57.70	6.70	74.0	16.30	Peak	30.00	Horizontal	Pass
5**	14441.500	45.71	6.70	54.0	8.29	AV	30.00	Horizontal	Pass
6	17725.000	56.74	6.04	74.0	17.26	Peak	131.20	Horizontal	Pass
6**	17725.000	46.05	6.04	54.0	7.95	AV	131.20	Horizontal	Pass



RSE-M-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

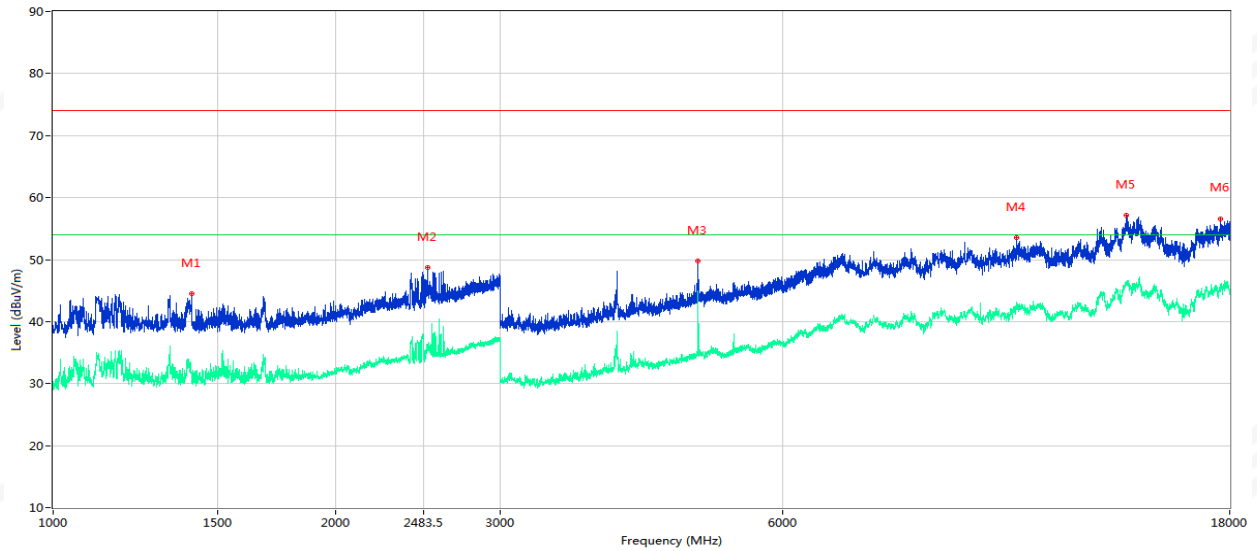

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1406.000	44.51	-1.18	74.0	29.49	Peak	250.30	Vertical	Pass
1**	1406.000	31.59	-1.18	54.0	22.41	AV	250.30	Vertical	Pass
2	2511.000	48.72	3.23	74.0	25.28	Peak	164.50	Vertical	Pass
2**	2511.000	36.36	3.23	54.0	17.64	AV	164.50	Vertical	Pass
3	4877.000	49.74	-6.32	74.0	24.26	Peak	159.10	Vertical	Pass
3**	4877.000	44.98	-6.32	54.0	9.02	AV	159.10	Vertical	Pass
4	10674.000	53.56	1.32	74.0	20.44	Peak	70.10	Vertical	Pass
4**	10674.000	42.65	1.32	54.0	11.35	AV	70.10	Vertical	Pass
5	13952.000	57.10	7.85	74.0	16.90	Peak	224.30	Vertical	Pass
5**	13952.000	46.37	7.85	54.0	7.63	AV	224.30	Vertical	Pass
6	17598.501	56.61	6.59	74.0	17.39	Peak	271.60	Vertical	Pass
6**	17598.501	46.06	6.59	54.0	7.94	AV	271.60	Vertical	Pass




RSE-M-18G-26G-H

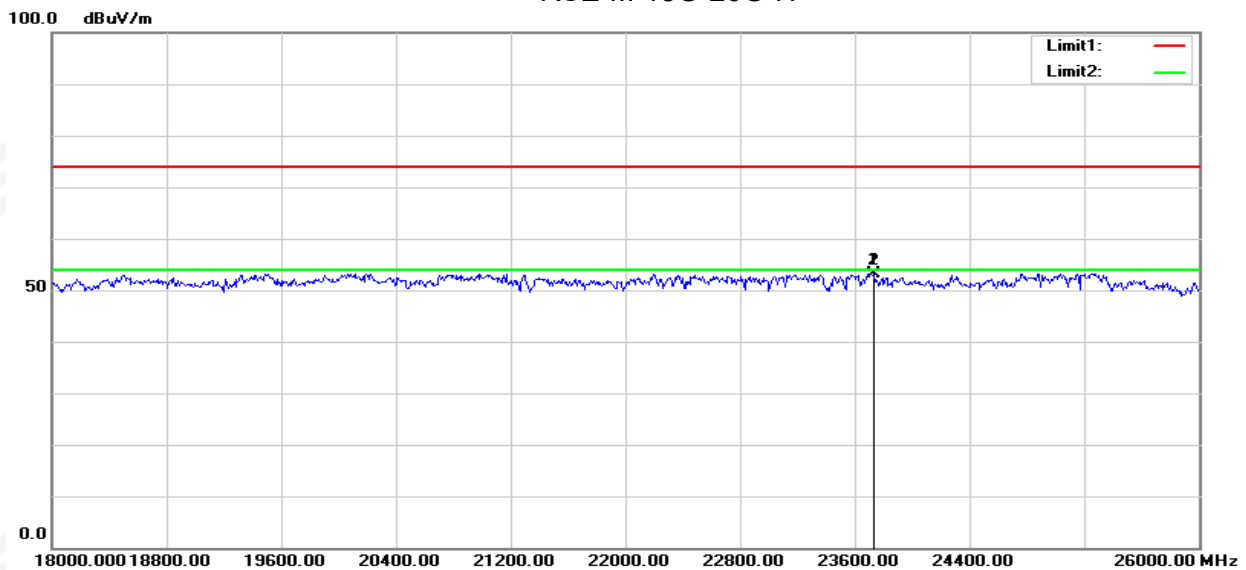

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23736.000	48.86	4.37	53.23	74.00	-20.77	peak
2	23736.000	48.86	4.37	53.23	54.00	-0.77	AVG

RSE-M-18G-26G-V

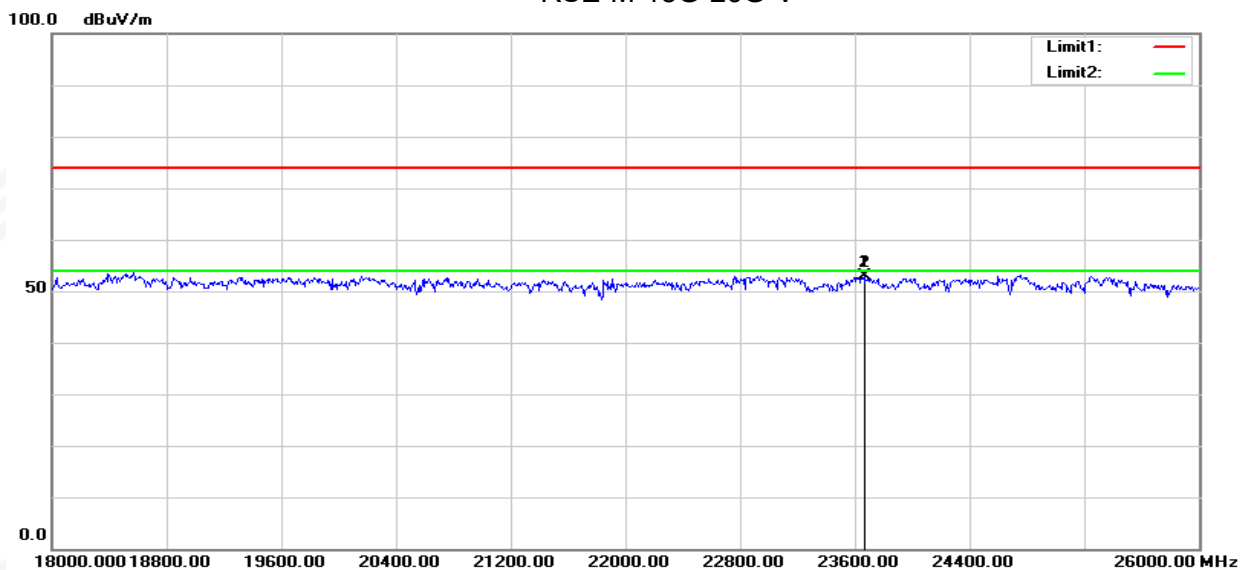


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23664.000	48.55	4.29	52.84	74.00	-21.16	peak
2	23664.000	48.55	4.29	52.84	54.00	-1.16	AVG



RSE-H-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

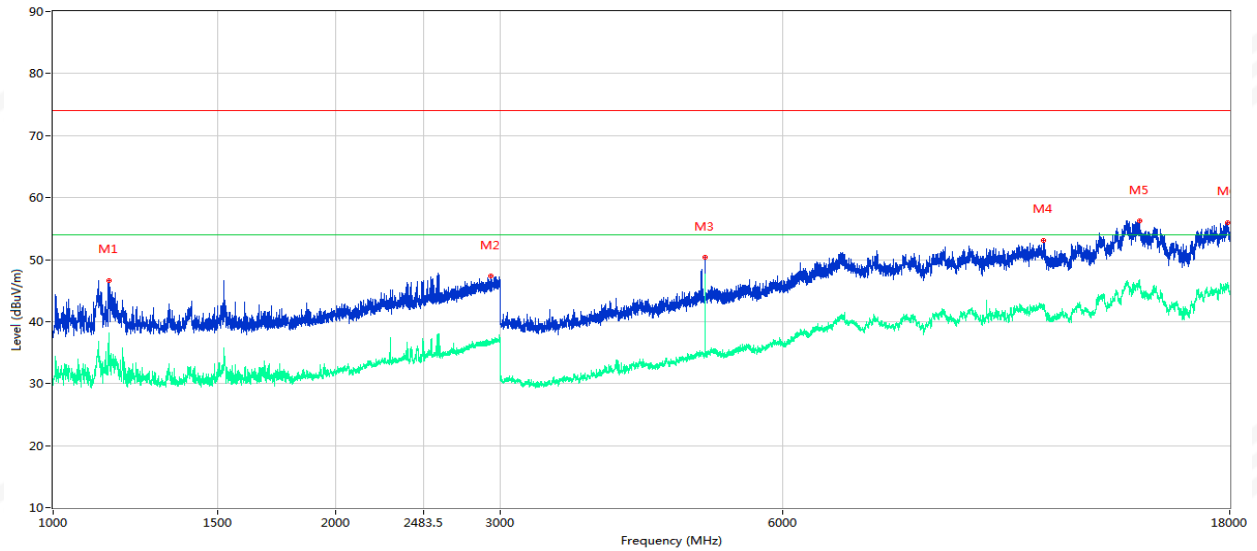


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1146.500	46.67	-1.68	74.0	27.33	Peak	274.70	Horizontal	Pass
1**	1146.500	37.63	-1.68	54.0	16.37	AV	274.70	Horizontal	Pass
2	2927.500	47.35	5.07	74.0	26.65	Peak	213.40	Horizontal	Pass
2**	2927.500	36.60	5.07	54.0	17.40	AV	213.40	Horizontal	Pass
3	4959.000	50.42	-5.99	74.0	23.58	Peak	259.50	Horizontal	Pass
3**	4959.000	38.55	-5.99	54.0	15.45	AV	259.50	Horizontal	Pass
4	11397.250	53.15	1.96	74.0	20.85	Peak	150.20	Horizontal	Pass
4**	11397.250	42.43	1.96	54.0	11.57	AV	150.20	Horizontal	Pass
5	14433.250	56.30	6.75	74.0	17.70	Peak	195.50	Horizontal	Pass
5**	14433.250	45.97	6.75	54.0	8.03	AV	195.50	Horizontal	Pass
6	17901.001	56.02	7.23	74.0	17.98	Peak	355.80	Horizontal	Pass
6**	17901.001	46.22	7.23	54.0	7.78	AV	355.80	Horizontal	Pass



RSE-H-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

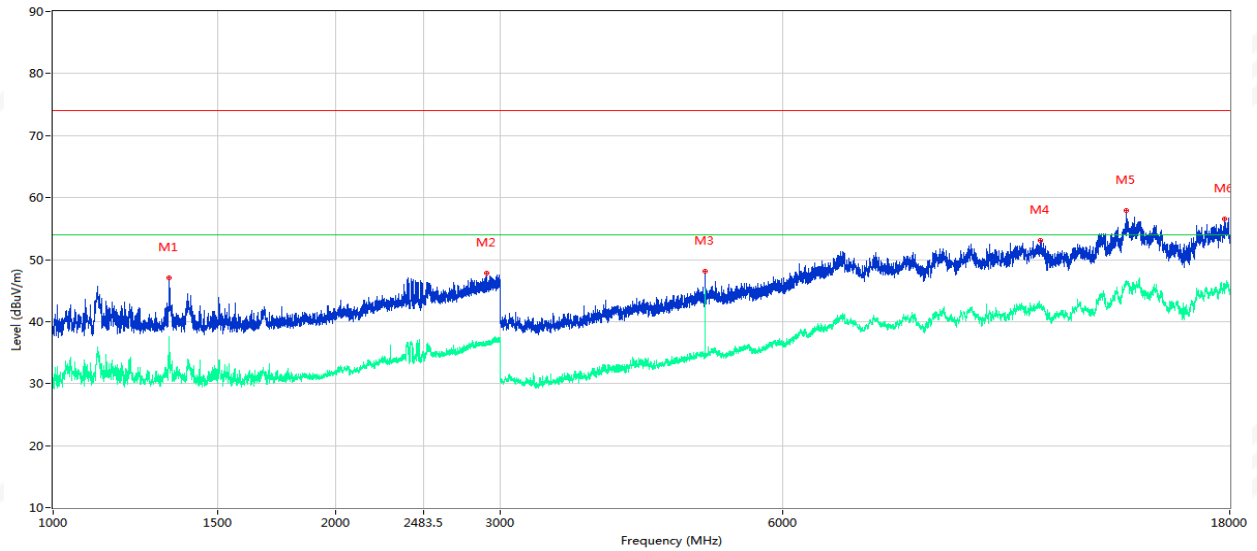

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1330.500	47.02	-1.29	74.0	26.98	Peak	194.10	Vertical	Pass
1**	1330.500	37.59	-1.29	54.0	16.41	AV	194.10	Vertical	Pass
2	2898.000	47.80	4.90	74.0	26.20	Peak	120.80	Vertical	Pass
2**	2898.000	36.53	4.90	54.0	17.47	AV	120.80	Vertical	Pass
3	4957.000	48.15	-6.00	74.0	25.85	Peak	156.50	Vertical	Pass
3**	4957.000	45.18	-6.00	54.0	8.82	AV	156.50	Vertical	Pass
4	11292.750	53.11	2.30	74.0	20.89	Peak	281.80	Vertical	Pass
4**	11292.750	42.32	2.30	54.0	11.68	AV	281.80	Vertical	Pass
5	13976.750	57.88	8.16	74.0	16.12	Peak	50.50	Vertical	Pass
5**	13976.750	46.66	8.16	54.0	7.34	AV	50.50	Vertical	Pass
6	17785.500	56.62	6.31	74.0	17.38	Peak	160.20	Vertical	Pass
6**	17785.500	46.22	6.31	54.0	7.78	AV	160.20	Vertical	Pass




RSE-H-18G-26G-H

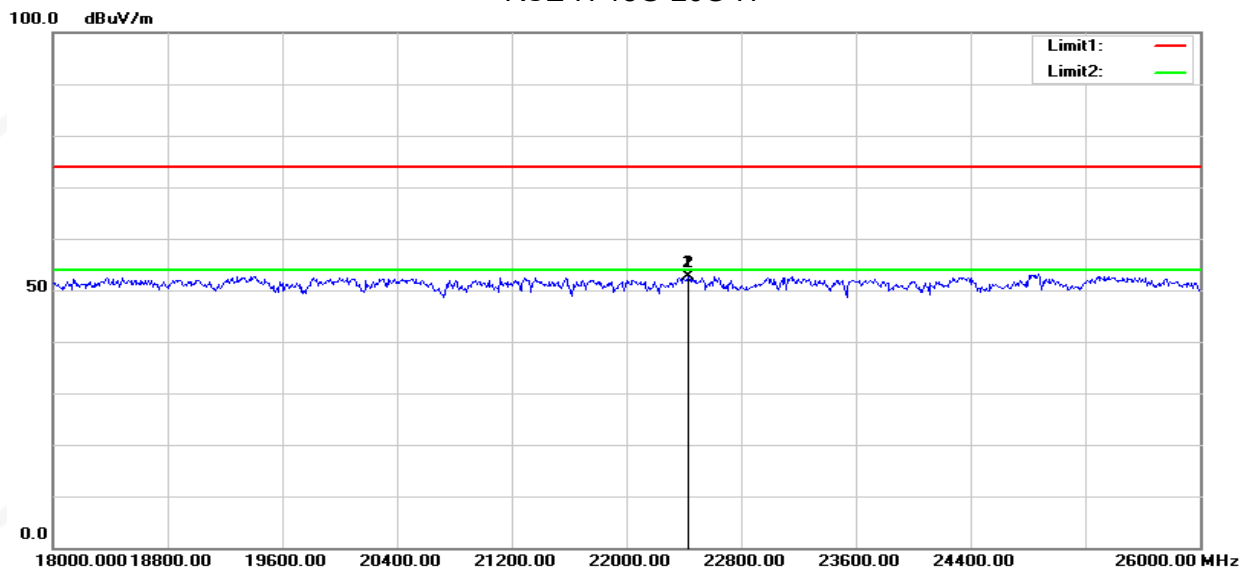

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22432.000	48.73	3.85	52.58	74.00	-21.42	peak
2	22432.000	48.73	3.85	52.58	54.00	-1.42	AVG

RSE-H-18G-26G-V

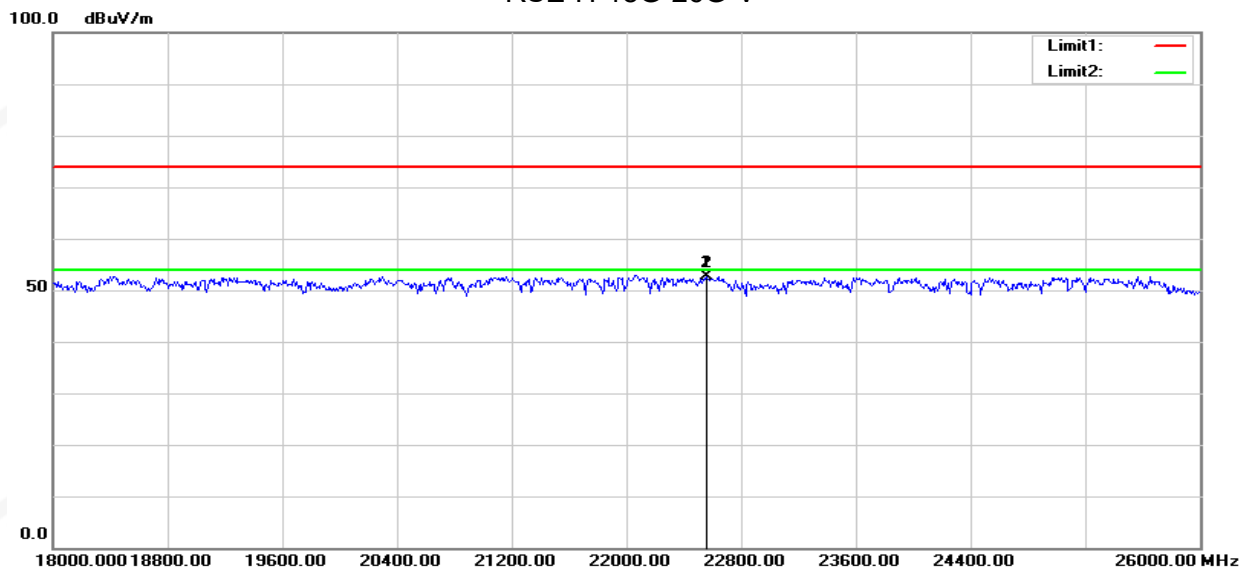

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22560.000	48.80	3.89	52.69	74.00	-21.31	peak
2	22560.000	48.80	3.89	52.69	54.00	-1.31	AVG


Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor.
- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



2M PHY
Left
RSE-L-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

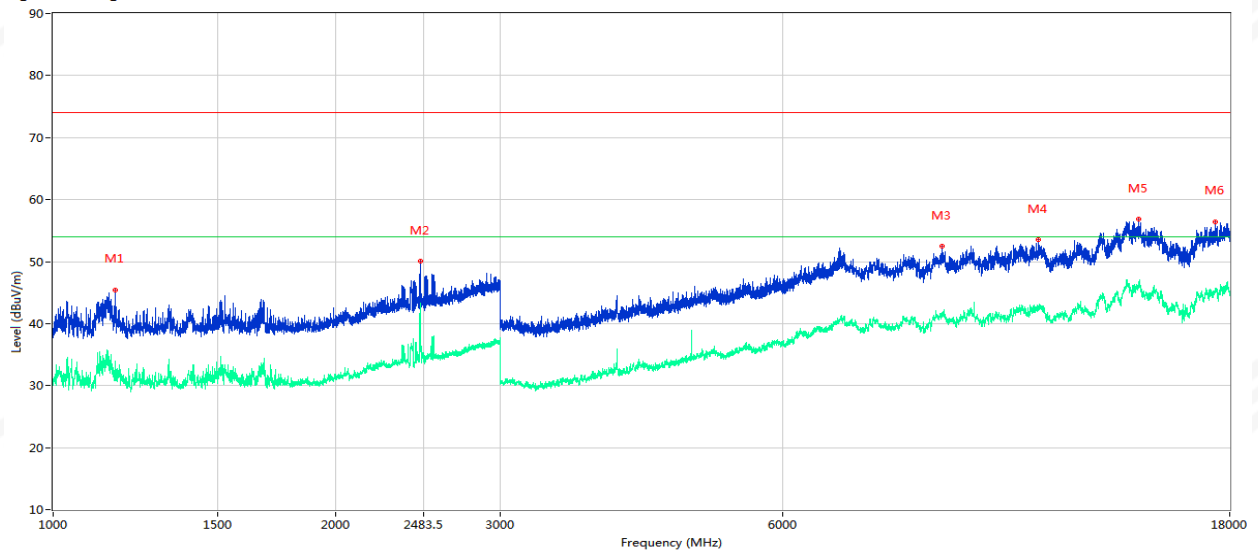


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1165.000	45.46	-1.62	74.0	28.54	Peak	276.60	Horizontal	Pass
1**	1165.000	33.90	-1.62	54.0	20.10	AV	276.60	Horizontal	Pass
2	2464.000	50.02	3.21	74.0	23.98	Peak	102.50	Horizontal	Pass
2**	2464.000	43.27	3.21	54.0	10.73	AV	102.50	Horizontal	Pass
3	8875.500	52.44	1.28	74.0	21.56	Peak	358.70	Horizontal	Pass
3**	8875.500	41.34	1.28	54.0	12.66	AV	358.70	Horizontal	Pass
4	11254.250	53.47	2.44	74.0	20.53	Peak	347.00	Horizontal	Pass
4**	11254.250	42.79	2.44	54.0	11.21	AV	347.00	Horizontal	Pass
5	14405.750	56.84	6.95	74.0	17.16	Peak	13.60	Horizontal	Pass
5**	14405.750	46.69	6.95	54.0	7.31	AV	13.60	Horizontal	Pass
6	17375.750	56.47	6.78	74.0	17.53	Peak	183.70	Horizontal	Pass
6**	17375.750	45.77	6.78	54.0	8.23	AV	183.70	Horizontal	Pass



RSE-L-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

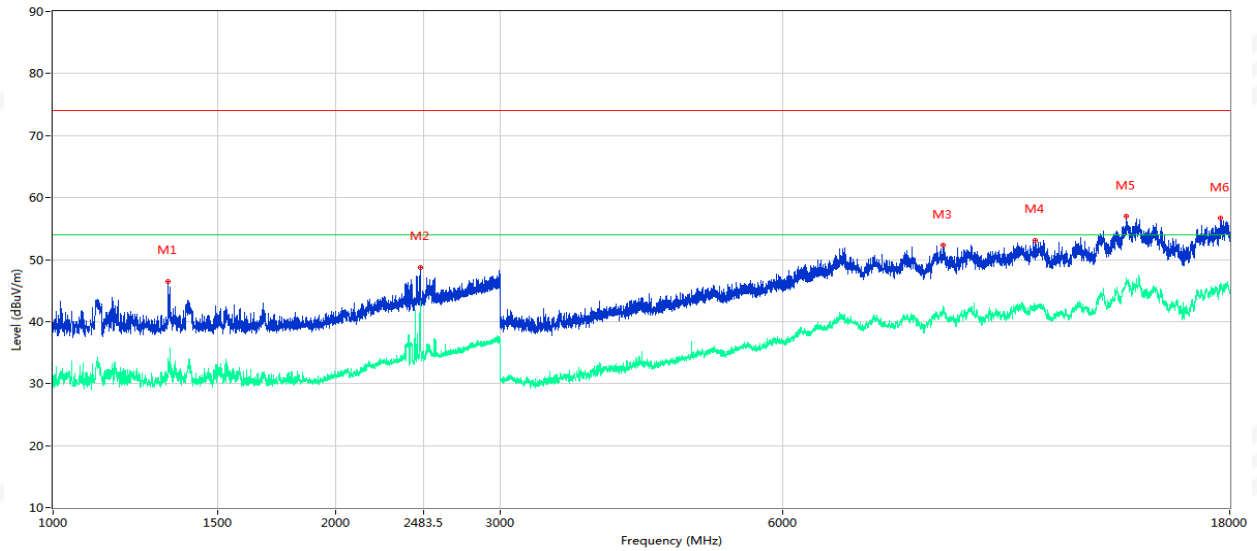

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1327.500	46.52	-1.29	74.0	27.48	Peak	247.20	Vertical	Pass
1**	1327.500	34.14	-1.29	54.0	19.86	AV	247.20	Vertical	Pass
2	2464.000	48.79	3.21	74.0	25.21	Peak	219.00	Vertical	Pass
2**	2464.000	42.73	3.21	54.0	11.27	AV	219.00	Vertical	Pass
3	8911.250	52.30	1.45	74.0	21.70	Peak	114.00	Vertical	Pass
3**	8911.250	42.57	1.45	54.0	11.43	AV	114.00	Vertical	Pass
4	11171.750	53.16	2.47	74.0	20.84	Peak	0.60	Vertical	Pass
4**	11171.750	42.25	2.47	54.0	11.75	AV	0.60	Vertical	Pass
5	13960.250	57.01	7.95	74.0	16.99	Peak	325.20	Vertical	Pass
5**	13960.250	46.24	7.95	54.0	7.76	AV	325.20	Vertical	Pass
6	17598.501	56.73	6.59	74.0	17.27	Peak	0.10	Vertical	Pass
6**	17598.501	46.09	6.59	54.0	7.91	AV	0.10	Vertical	Pass




RSE-L-18G-26G-H

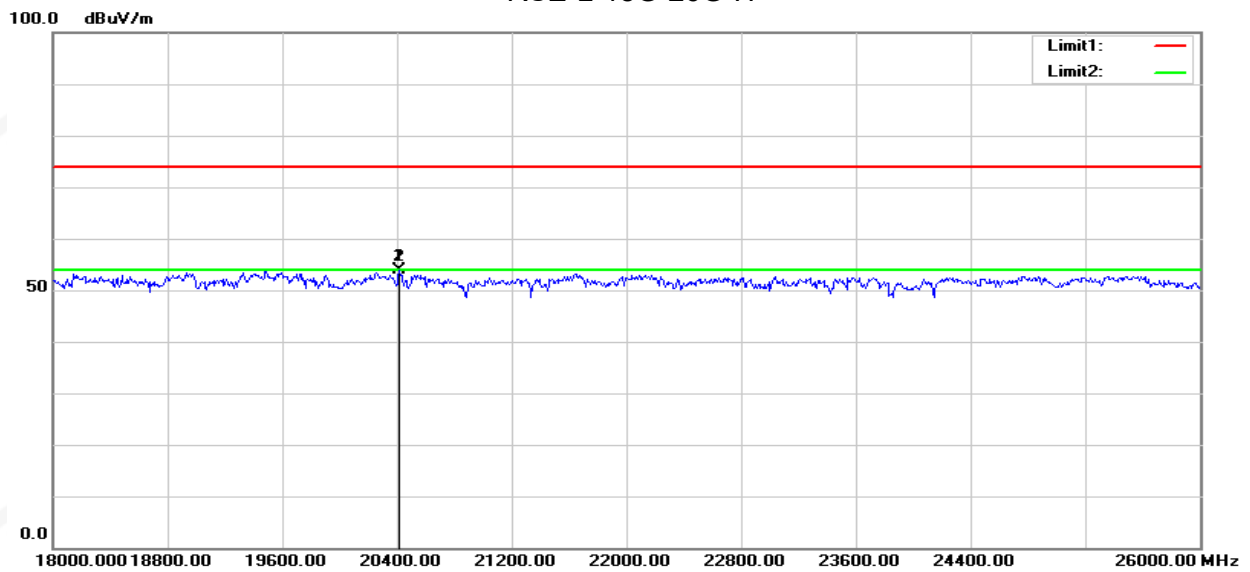

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	20416.000	51.70	2.16	53.86	74.00	-20.14	peak
2	20416.000	51.70	2.16	53.86	54.00	-0.14	AVG

RSE-L-18G-26G-V

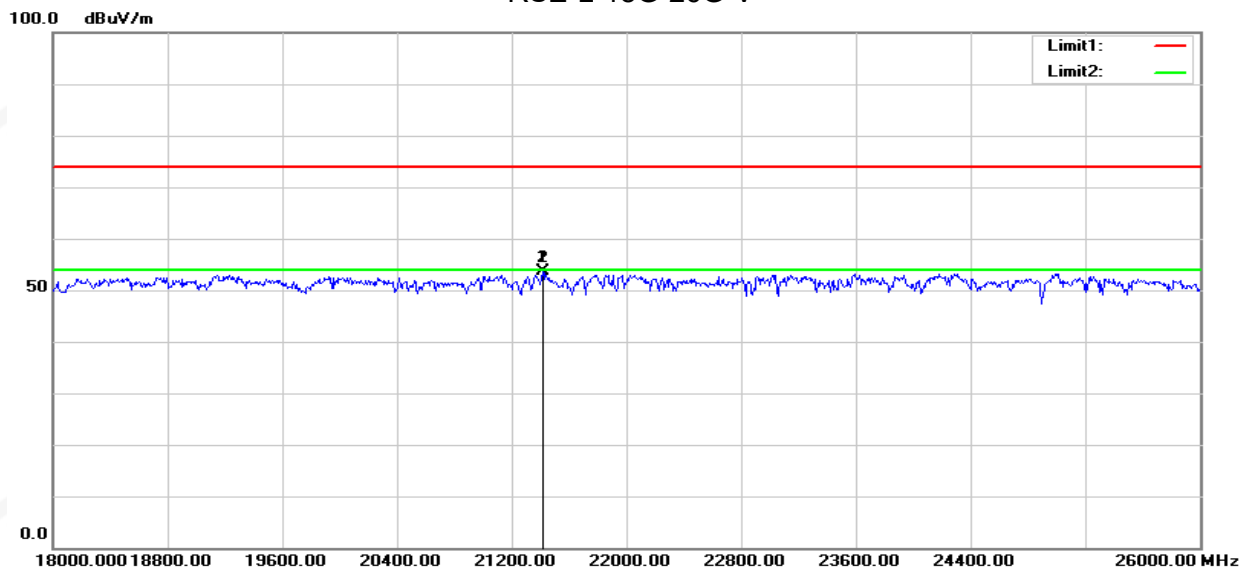


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	21416.000	50.81	2.89	53.70	74.00	-20.30	peak
2	21416.000	50.81	2.89	53.70	54.00	-0.30	AVG



RSE-M-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

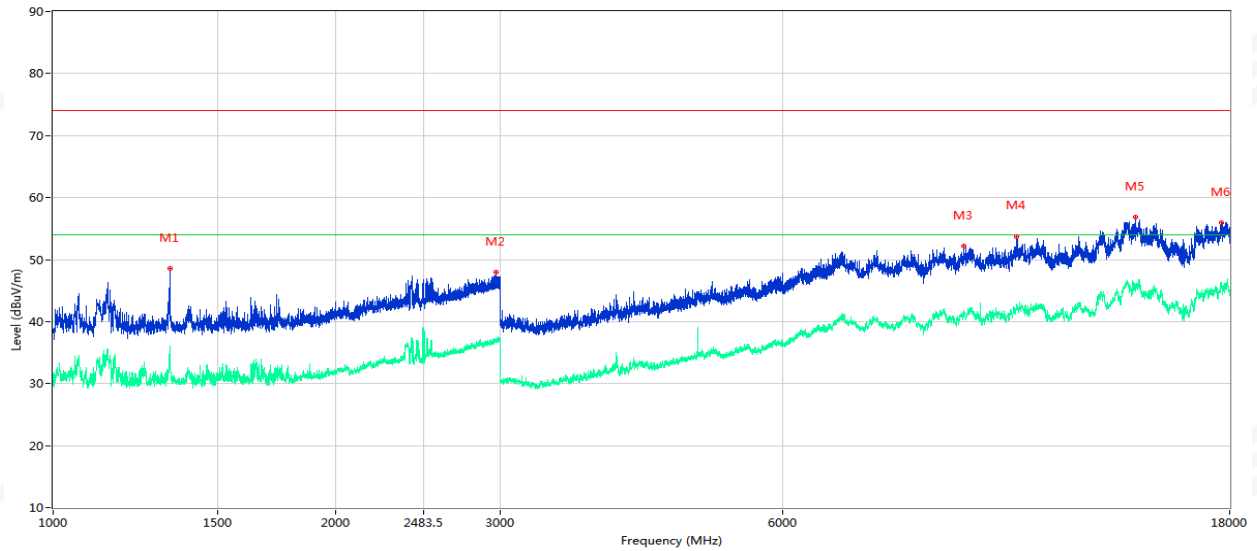


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1331.500	48.54	-1.29	74.0	25.46	Peak	181.40	Horizontal	Pass
1**	1331.500	36.13	-1.29	54.0	17.87	AV	181.40	Horizontal	Pass
2	2967.000	47.95	5.30	74.0	26.05	Peak	198.50	Horizontal	Pass
2**	2967.000	37.13	5.30	54.0	16.87	AV	198.50	Horizontal	Pass
3	9376.000	52.13	0.93	74.0	21.87	Peak	357.00	Horizontal	Pass
3**	9376.000	41.80	0.93	54.0	12.20	AV	357.00	Horizontal	Pass
4	10668.500	53.76	1.36	74.0	20.24	Peak	20.20	Horizontal	Pass
4**	10668.500	42.62	1.36	54.0	11.38	AV	20.20	Horizontal	Pass
5	14273.750	56.86	6.90	74.0	17.14	Peak	226.00	Horizontal	Pass
5**	14273.750	45.45	6.90	54.0	8.55	AV	226.00	Horizontal	Pass
6	17645.251	55.91	6.30	74.0	18.09	Peak	22.10	Horizontal	Pass
6**	17645.251	45.69	6.30	54.0	8.31	AV	22.10	Horizontal	Pass



RSE-M-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

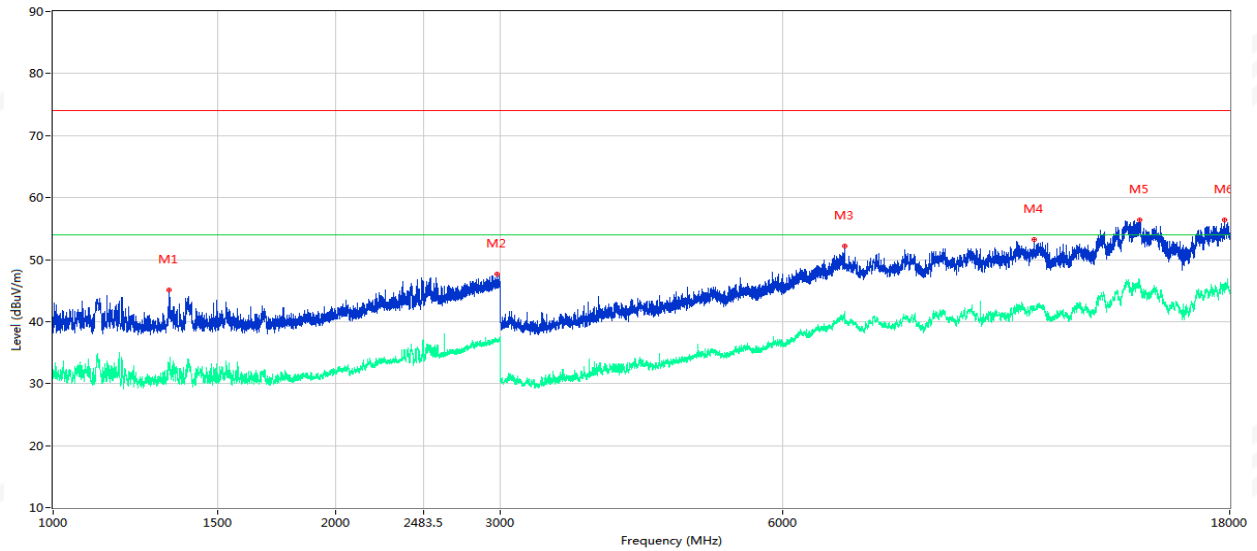

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1329.500	45.09	-1.29	74.0	28.91	Peak	180.80	Vertical	Pass
1**	1329.500	33.09	-1.29	54.0	20.91	AV	180.80	Vertical	Pass
2	2972.500	47.65	5.33	74.0	26.35	Peak	197.90	Vertical	Pass
2**	2972.500	36.99	5.33	54.0	17.01	AV	197.90	Vertical	Pass
3	6984.000	52.17	1.19	74.0	21.83	Peak	172.80	Vertical	Pass
3**	6984.000	40.53	1.19	54.0	13.47	AV	172.80	Vertical	Pass
4	11125.000	53.24	2.22	74.0	20.76	Peak	173.20	Vertical	Pass
4**	11125.000	42.05	2.22	54.0	11.95	AV	173.20	Vertical	Pass
5	14425.000	56.37	6.81	74.0	17.63	Peak	54.60	Vertical	Pass
5**	14425.000	46.75	6.81	54.0	7.25	AV	54.60	Vertical	Pass
6	17791.001	56.36	6.34	74.0	17.64	Peak	69.10	Vertical	Pass
6**	17791.001	46.07	6.34	54.0	7.93	AV	69.10	Vertical	Pass




RSE-M-18G-26G-H

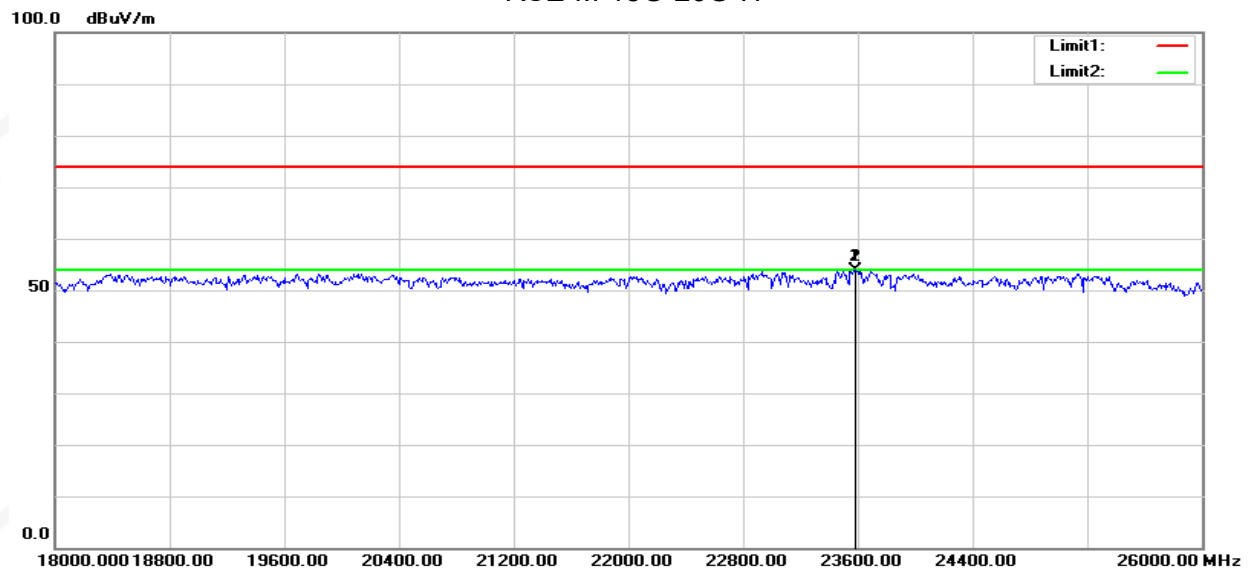

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23584.000	49.64	4.22	53.86	74.00	-20.14	peak
2	23584.000	49.64	4.22	53.86	54.00	-0.14	AVG

RSE-M-18G-26G-V

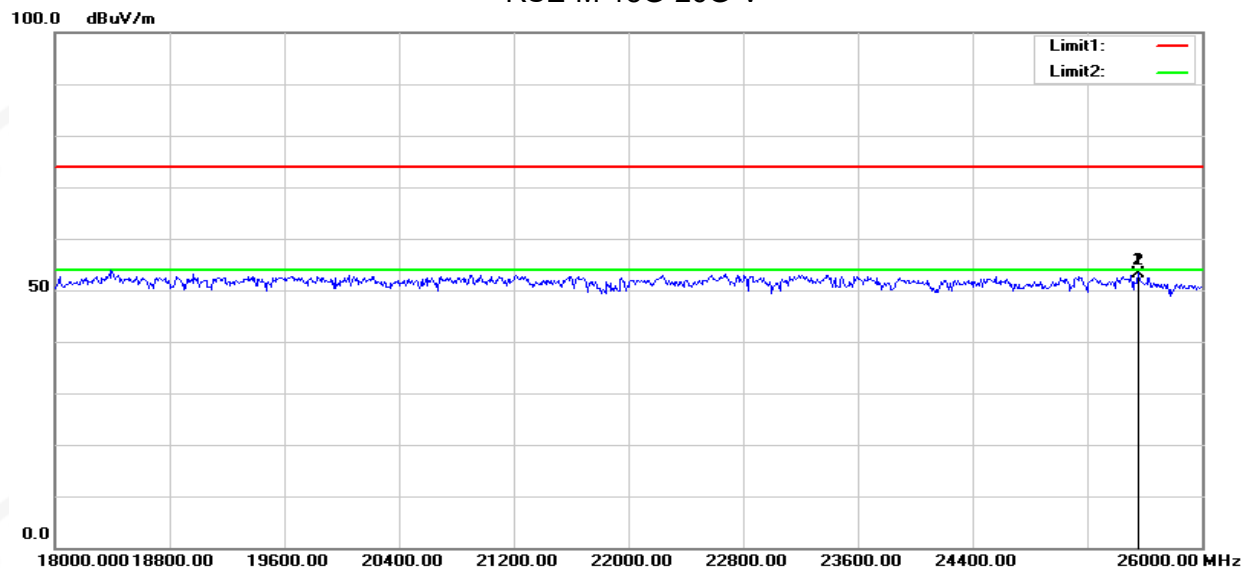


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	25552.000	47.59	5.66	53.25	74.00	-20.75	peak
2	25552.000	47.59	5.66	53.25	54.00	-0.75	AVG



RSE-H-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

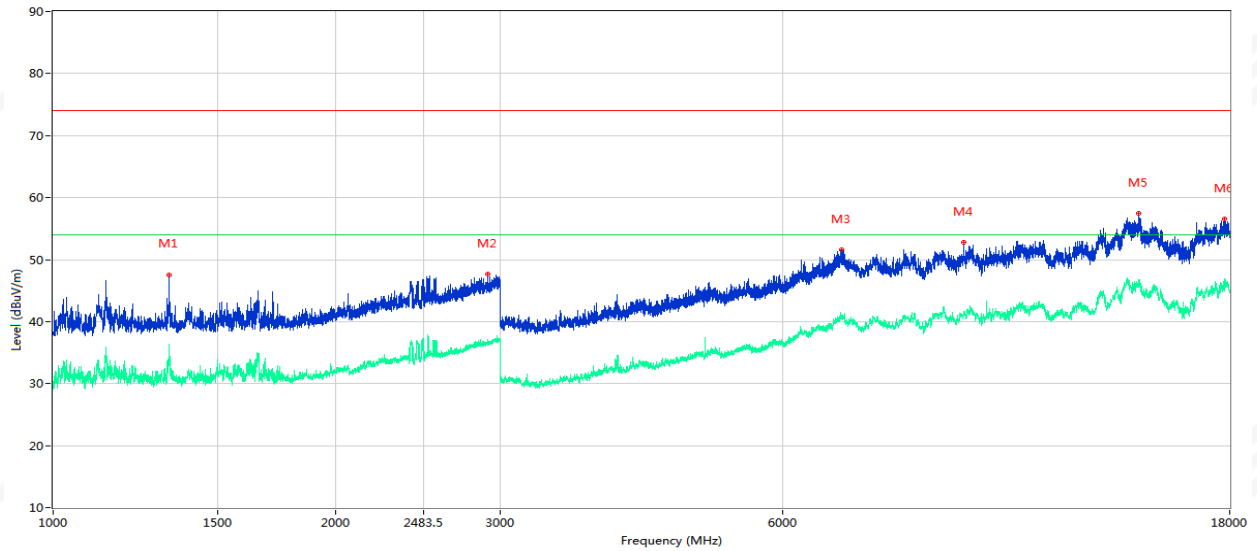


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1329.000	47.57	-1.29	74.0	26.43	Peak	180.00	Horizontal	Pass
1**	1329.000	36.38	-1.29	54.0	17.62	AV	180.00	Horizontal	Pass
2	2907.500	47.67	4.95	74.0	26.33	Peak	283.40	Horizontal	Pass
2**	2907.500	36.29	4.95	54.0	17.71	AV	283.40	Horizontal	Pass
3	6942.000	51.62	0.85	74.0	22.38	Peak	177.40	Horizontal	Pass
3**	6942.000	40.61	0.85	54.0	13.39	AV	177.40	Horizontal	Pass
4	9359.500	52.76	0.92	74.0	21.24	Peak	57.90	Horizontal	Pass
4**	9359.500	41.46	0.92	54.0	12.54	AV	57.90	Horizontal	Pass
5	14403.000	57.46	6.97	74.0	16.54	Peak	118.60	Horizontal	Pass
5**	14403.000	46.49	6.97	54.0	7.51	AV	118.60	Horizontal	Pass
6	17785.500	56.60	6.31	74.0	17.40	Peak	350.60	Horizontal	Pass
6**	17785.500	45.98	6.31	54.0	8.02	AV	350.60	Horizontal	Pass



RSE-H-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

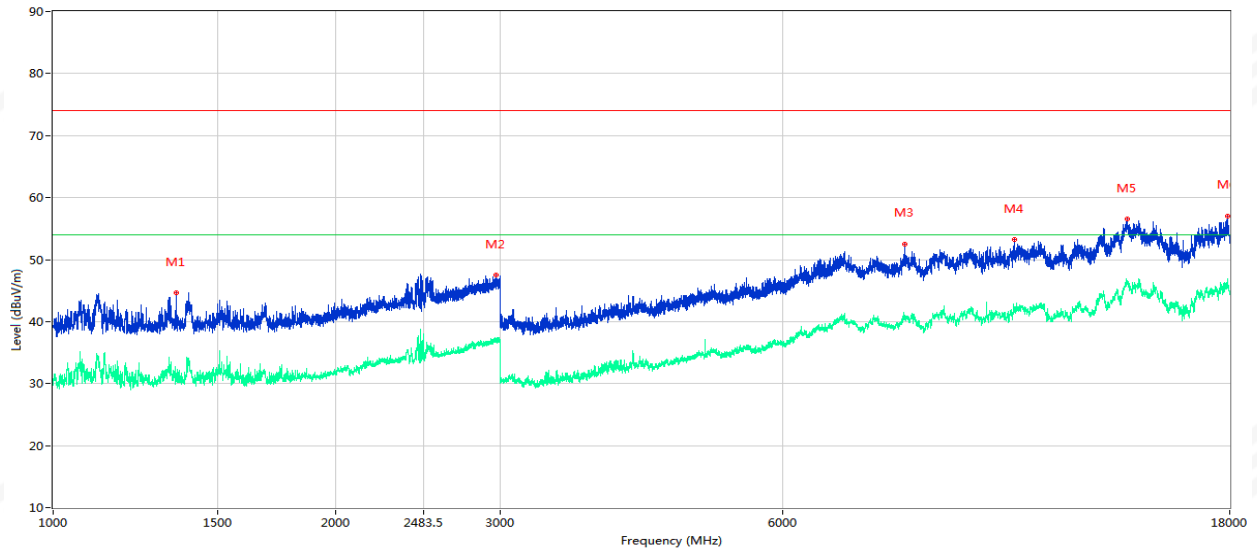

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1352.500	44.64	-1.25	74.0	29.36	Peak	180.80	Vertical	Pass
1**	1352.500	31.65	-1.25	54.0	22.35	AV	180.80	Vertical	Pass
2	2970.000	47.49	5.31	74.0	26.51	Peak	133.20	Vertical	Pass
2**	2970.000	37.03	5.31	54.0	16.97	AV	133.20	Vertical	Pass
3	8111.000	52.54	-0.06	74.0	21.46	Peak	49.50	Vertical	Pass
3**	8111.000	40.59	-0.06	54.0	13.41	AV	49.50	Vertical	Pass
4	10599.750	53.28	1.82	74.0	20.72	Peak	71.40	Vertical	Pass
4**	10599.750	42.34	1.82	54.0	11.66	AV	71.40	Vertical	Pass
5	14001.500	56.51	8.43	74.0	17.49	Peak	71.40	Vertical	Pass
5**	14001.500	45.99	8.43	54.0	8.01	AV	71.40	Vertical	Pass
6	17917.499	57.07	7.11	74.0	16.93	Peak	124.20	Vertical	Pass
6**	17917.499	46.10	7.11	54.0	7.90	AV	124.20	Vertical	Pass




RSE-H-18G-26G-H

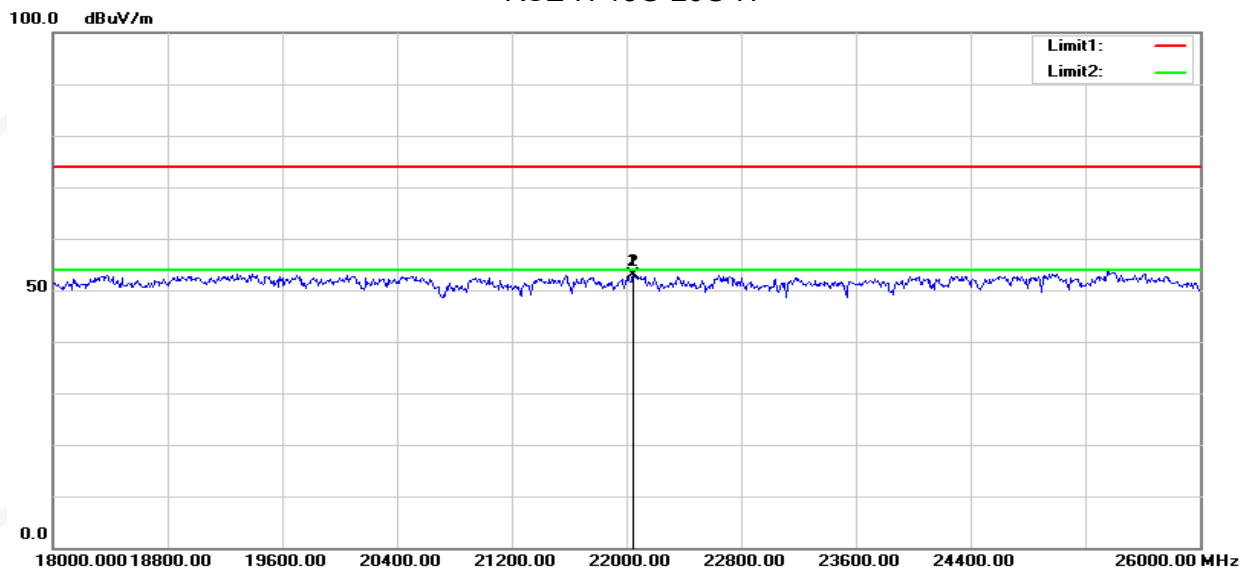

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22048.000	49.52	3.46	52.98	74.00	-21.02	peak
2	22048.000	49.52	3.46	52.98	54.00	-1.02	AVG


RSE-H-18G-26G-V

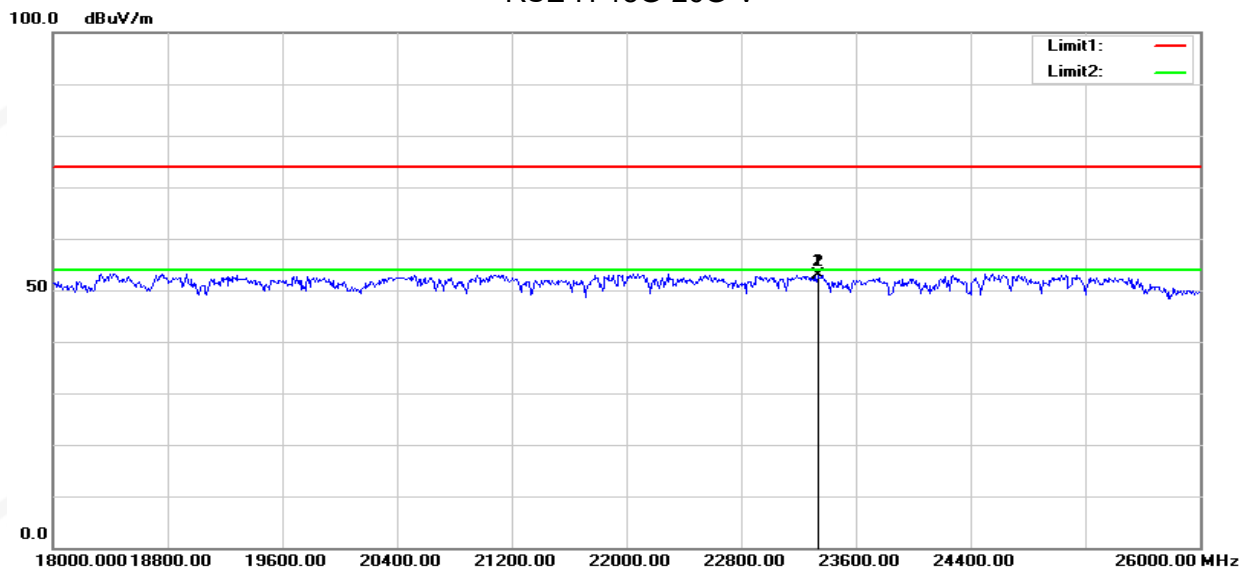

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23336.000	48.99	3.97	52.96	74.00	-21.04	peak
2	23336.000	48.99	3.97	52.96	54.00	-1.04	AVG

Right
RSE-L-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

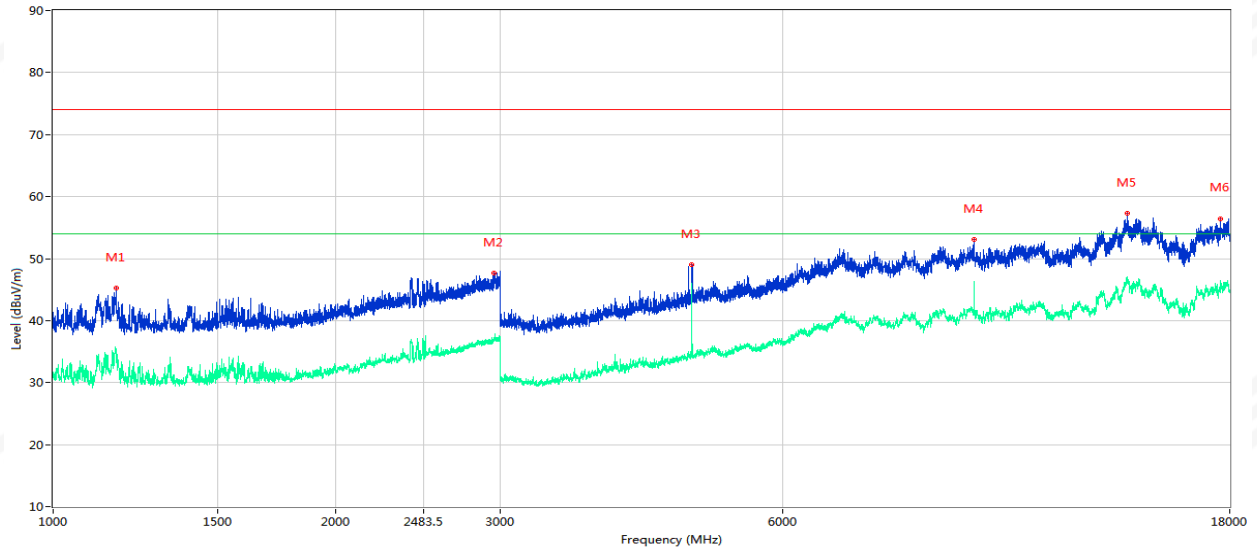


No	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1167.000	45.22	-1.62	74.0	28.78	Peak	271.10	Horizontal	Pass
1**	1167.000	34.73	-1.62	54.0	19.27	AV	271.10	Horizontal	Pass
2	2952.000	47.73	5.22	74.0	26.27	Peak	4.00	Horizontal	Pass
2**	2952.000	37.23	5.22	54.0	16.77	AV	4.00	Horizontal	Pass
3	4801.000	49.06	-7.14	74.0	24.94	Peak	256.90	Horizontal	Pass
3**	4801.000	46.04	-7.14	54.0	7.96	AV	256.90	Horizontal	Pass
4	9601.500	53.09	0.57	74.0	20.91	Peak	245.10	Horizontal	Pass
4**	9601.500	46.24	0.57	54.0	7.76	AV	245.10	Horizontal	Pass
5	13987.750	57.33	8.30	74.0	16.67	Peak	96.30	Horizontal	Pass
5**	13987.750	46.57	8.30	54.0	7.43	AV	96.30	Horizontal	Pass
6	17601.249	56.45	6.60	74.0	17.55	Peak	229.80	Horizontal	Pass
6**	17601.249	46.15	6.60	54.0	7.85	AV	229.80	Horizontal	Pass



RSE-L-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

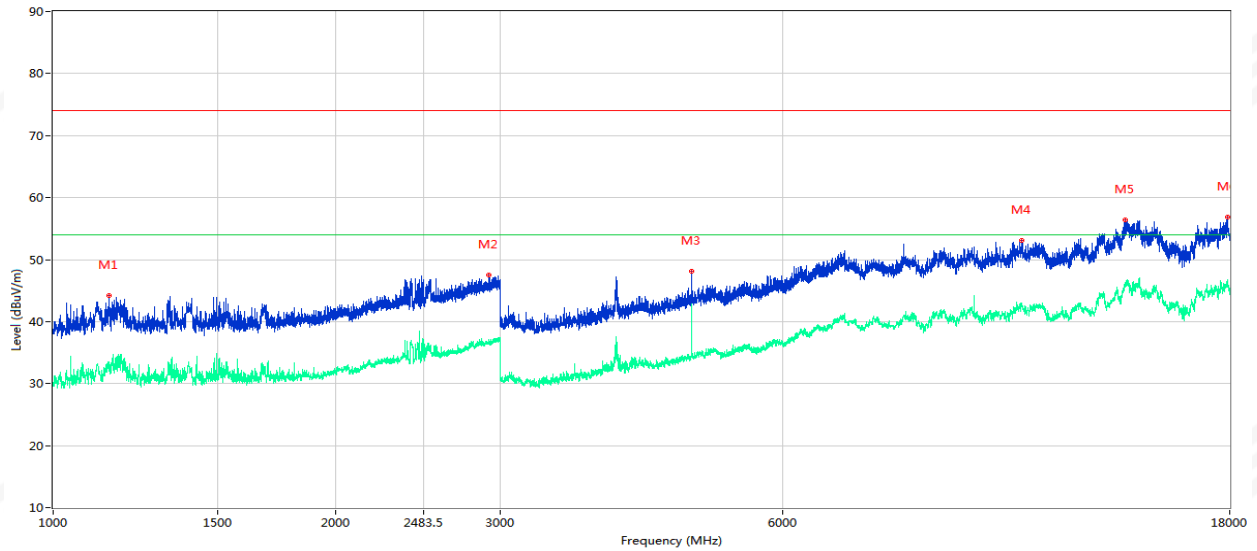

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1147.000	44.15	-1.68	74.0	29.85	Peak	272.90	Vertical	Pass
1**	1147.000	33.44	-1.68	54.0	20.56	AV	272.90	Vertical	Pass
2	2919.500	47.46	5.02	74.0	26.54	Peak	229.40	Vertical	Pass
2**	2919.500	36.45	5.02	54.0	17.55	AV	229.40	Vertical	Pass
3	4801.000	48.14	-7.14	74.0	25.86	Peak	275.00	Vertical	Pass
3**	4801.000	42.85	-7.14	54.0	11.15	AV	275.00	Vertical	Pass
4	10803.250	53.09	2.03	74.0	20.91	Peak	208.60	Vertical	Pass
4**	10803.250	42.39	2.03	54.0	11.61	AV	208.60	Vertical	Pass
5	13913.500	56.45	7.37	74.0	17.55	Peak	319.40	Vertical	Pass
5**	13913.500	45.79	7.37	54.0	8.21	AV	319.40	Vertical	Pass
6	17906.500	56.89	7.19	74.0	17.11	Peak	165.10	Vertical	Pass
6**	17906.500	46.36	7.19	54.0	7.64	AV	165.10	Vertical	Pass




RSE-L-18G-26G-H

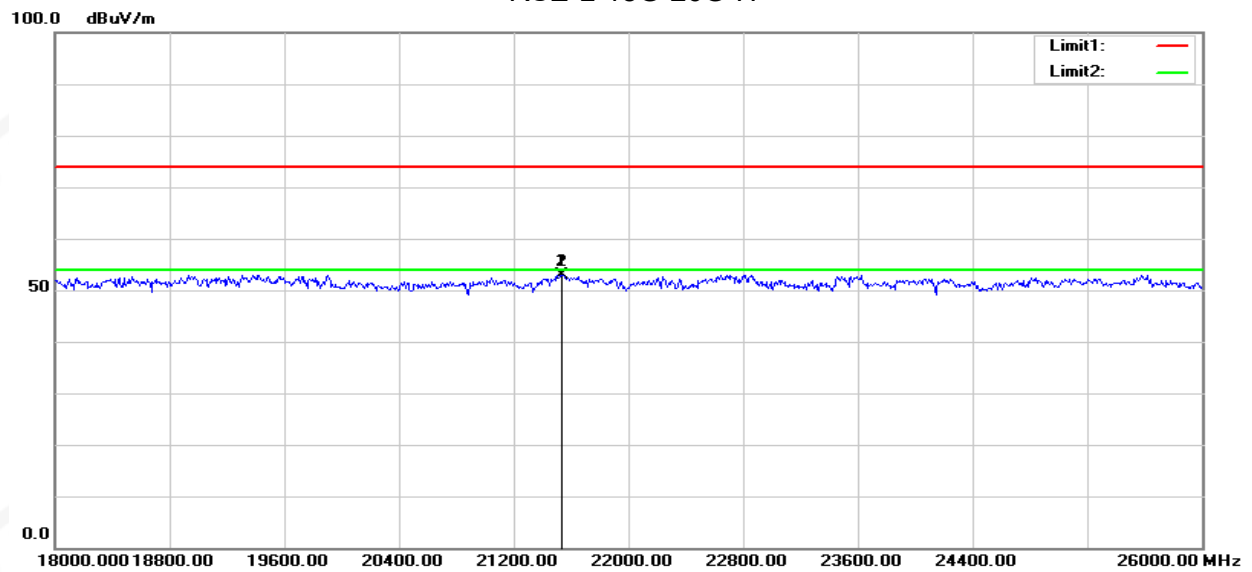

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	21536.000	50.03	2.96	52.99	74.00	-21.01	peak
2	21536.000	50.03	2.96	52.99	54.00	-1.01	AVG

RSE-L-18G-26G-V

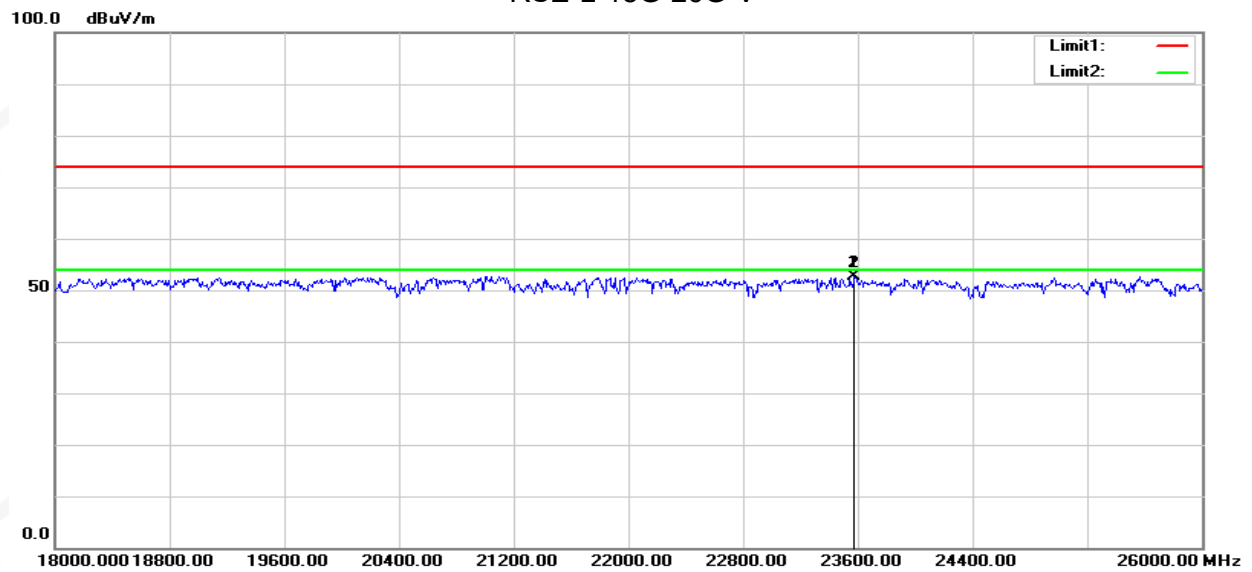


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23576.000	48.45	4.21	52.66	74.00	-21.34	peak
2	23576.000	48.45	4.21	52.66	54.00	-1.34	AVG



RSE-M-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

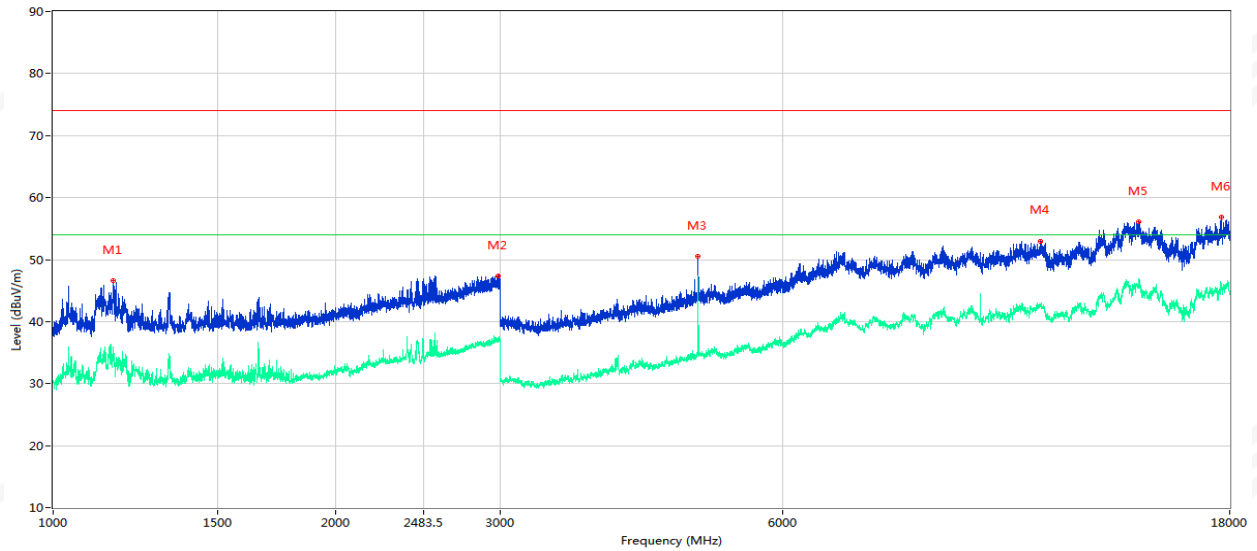


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1160.000	46.62	-1.64	74.0	27.38	Peak	283.70	Horizontal	Pass
1**	1160.000	35.70	-1.64	54.0	18.30	AV	283.70	Horizontal	Pass
2	2980.000	47.36	5.36	74.0	26.64	Peak	303.80	Horizontal	Pass
2**	2980.000	36.93	5.36	54.0	17.07	AV	303.80	Horizontal	Pass
3	4877.000	50.52	-6.32	74.0	23.48	Peak	261.00	Horizontal	Pass
3**	4877.000	47.39	-6.32	54.0	6.61	AV	261.00	Horizontal	Pass
4	11298.250	53.00	2.29	74.0	21.00	Peak	72.70	Horizontal	Pass
4**	11298.250	42.81	2.29	54.0	11.19	AV	72.70	Horizontal	Pass
5	14408.500	56.13	6.93	74.0	17.87	Peak	276.10	Horizontal	Pass
5**	14408.500	46.51	6.93	54.0	7.49	AV	276.10	Horizontal	Pass
6	17617.750	56.87	6.49	74.0	17.13	Peak	334.50	Horizontal	Pass
6**	17617.750	45.66	6.49	54.0	8.34	AV	334.50	Horizontal	Pass



RSE-M-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

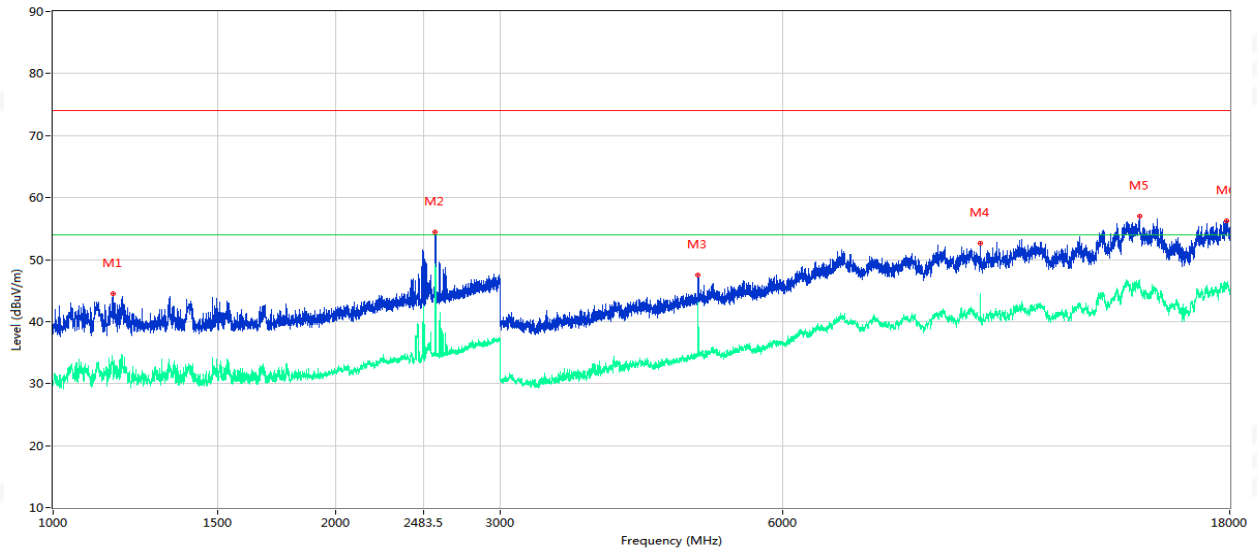

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1158.000	44.43	-1.65	74.0	29.57	Peak	257.70	Vertical	Pass
1**	1158.000	31.47	-1.65	54.0	22.53	AV	257.70	Vertical	Pass
2	2558.000	54.49	3.54	74.0	19.51	Peak	7.80	Vertical	Pass
2**	2558.000	49.39	3.54	54.0	4.61	AV	7.80	Vertical	Pass
3	4877.000	47.44	-6.32	74.0	26.56	Peak	215.20	Vertical	Pass
3**	4877.000	43.14	-6.32	54.0	10.86	AV	215.20	Vertical	Pass
4	9752.750	52.63	0.29	74.0	21.37	Peak	278.10	Vertical	Pass
4**	9752.750	44.48	0.29	54.0	9.52	AV	278.10	Vertical	Pass
5	14430.500	56.94	6.77	74.0	17.06	Peak	360.00	Vertical	Pass
5**	14430.500	46.52	6.77	54.0	7.48	AV	360.00	Vertical	Pass
6	17878.999	56.29	7.06	74.0	17.71	Peak	129.70	Vertical	Pass
6**	17878.999	46.12	7.06	54.0	7.88	AV	129.70	Vertical	Pass




RSE-M-18G-26G-H

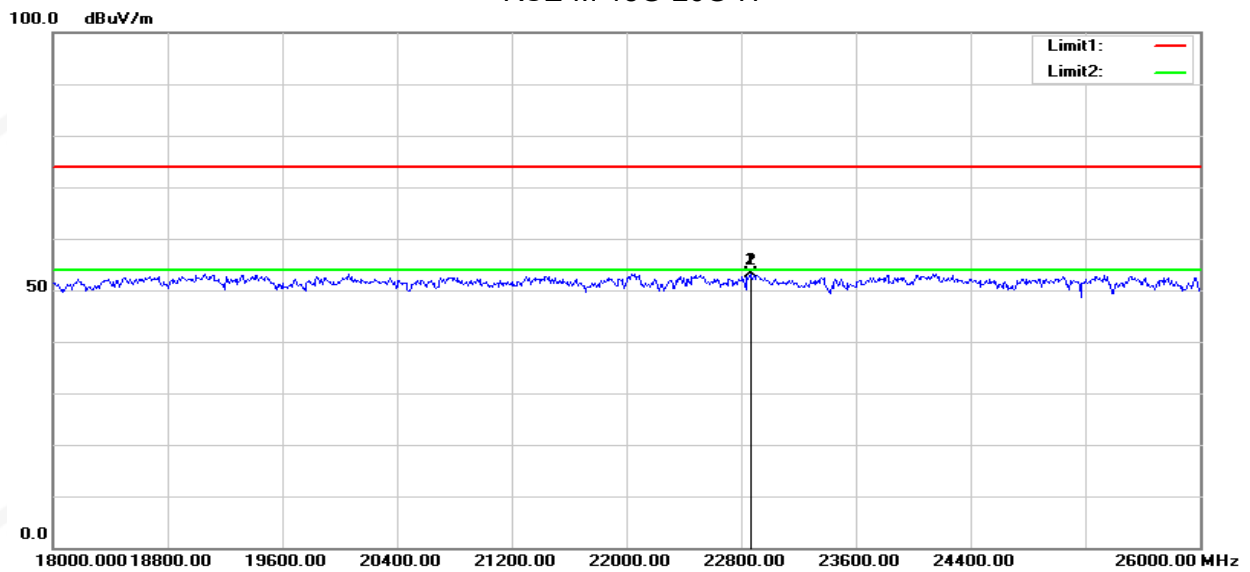

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22864.000	49.49	3.71	53.20	74.00	-20.80	peak
2	22864.000	49.49	3.71	53.20	54.00	-0.80	AVG

RSE-M-18G-26G-V

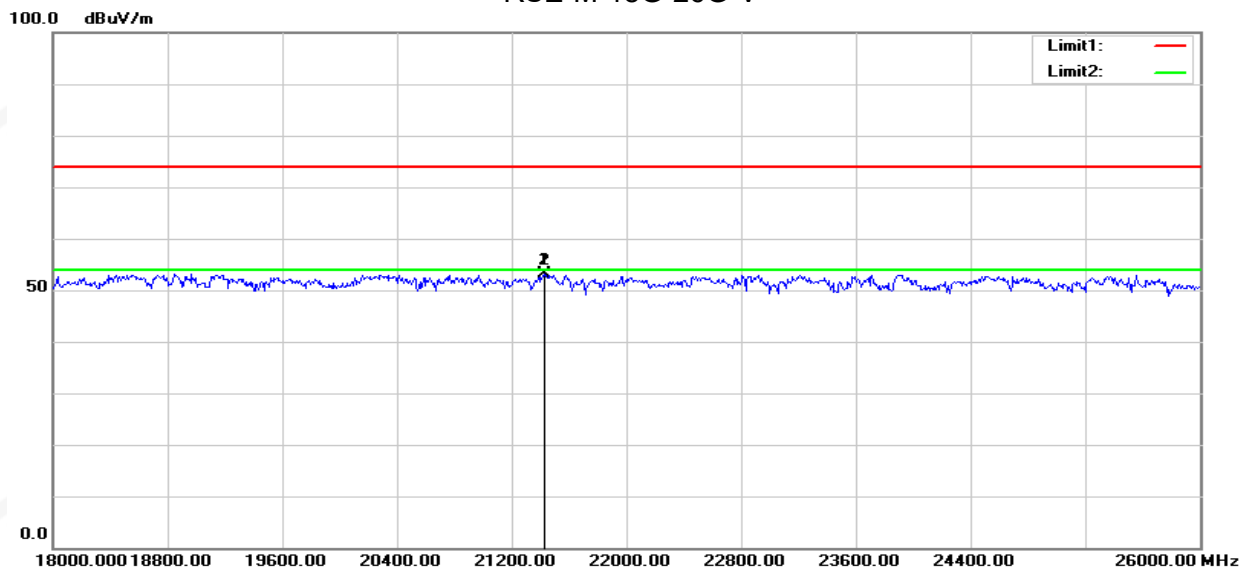


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	21424.000	50.26	2.89	53.15	74.00	-20.85	peak
2	21424.000	50.26	2.89	53.15	54.00	-0.85	AVG



RSE-H-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

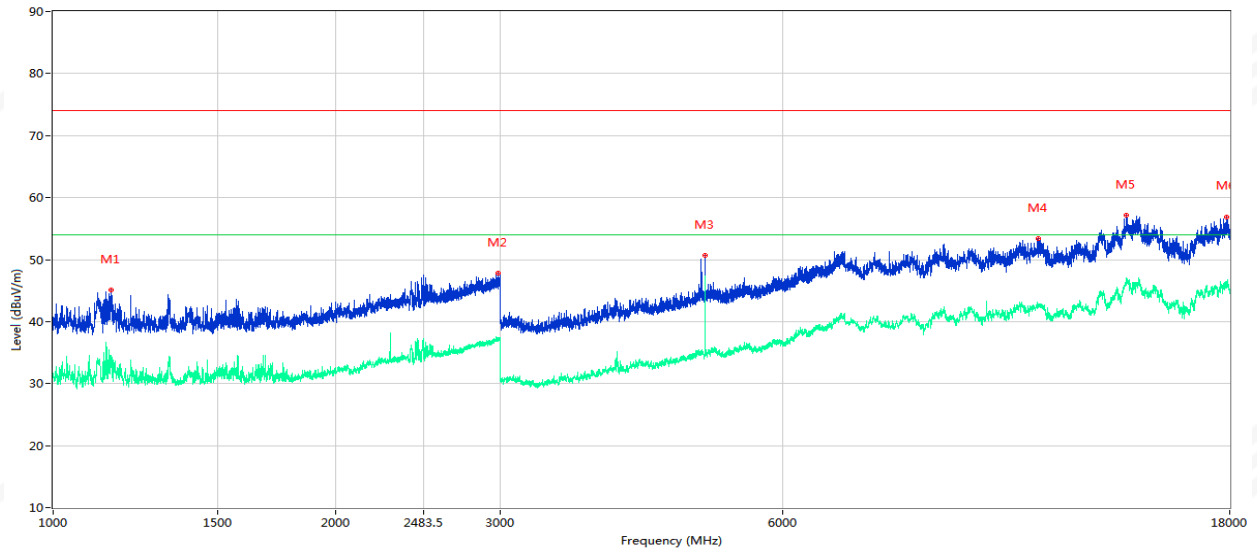


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1153.500	45.06	-1.66	74.0	28.94	Peak	264.70	Horizontal	Pass
1**	1153.500	34.50	-1.66	54.0	19.50	AV	264.70	Horizontal	Pass
2	2983.500	47.84	5.38	74.0	26.16	Peak	47.40	Horizontal	Pass
2**	2983.500	37.01	5.38	54.0	16.99	AV	47.40	Horizontal	Pass
3	4957.000	50.67	-6.00	74.0	23.33	Peak	262.50	Horizontal	Pass
3**	4957.000	47.29	-6.00	54.0	6.71	AV	262.50	Horizontal	Pass
4	11246.000	53.37	2.46	74.0	20.63	Peak	214.50	Horizontal	Pass
4**	11246.000	42.57	2.46	54.0	11.43	AV	214.50	Horizontal	Pass
5	13957.500	57.10	7.92	74.0	16.90	Peak	218.90	Horizontal	Pass
5**	13957.500	46.45	7.92	54.0	7.55	AV	218.90	Horizontal	Pass
6	17848.750	56.92	6.80	74.0	17.08	Peak	198.80	Horizontal	Pass
6**	17848.750	46.15	6.80	54.0	7.85	AV	198.80	Horizontal	Pass



RSE-H-1G-18G-V


RE_FCC Test Case_FCC 15C 1GHz-18GHz - 2.4G

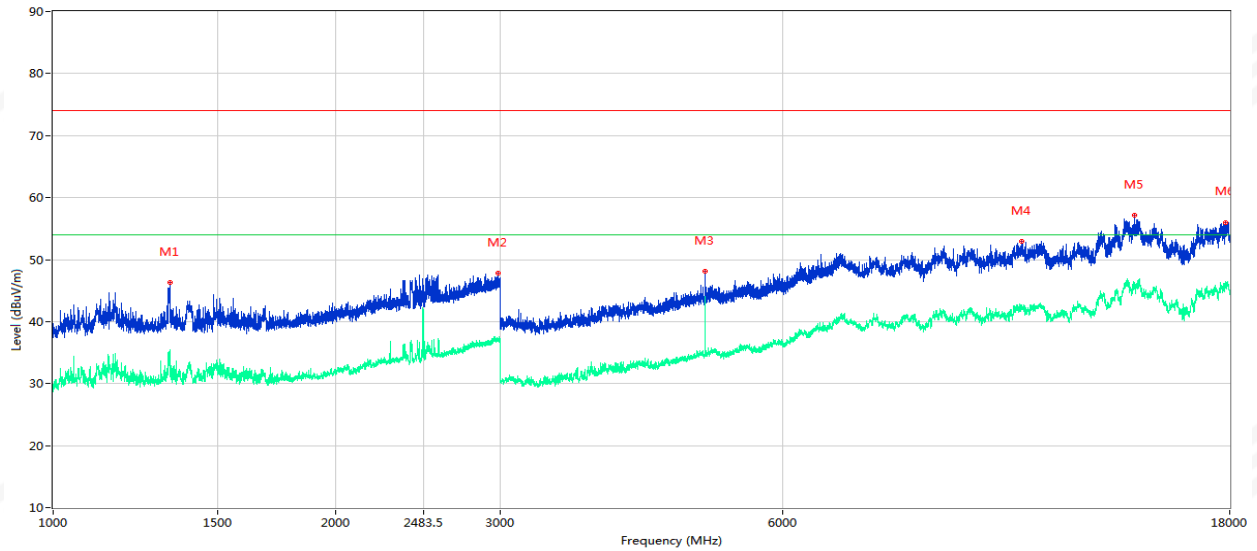

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	1332.000	46.28	-1.29	74.0	27.72	Peak	358.30	Vertical	Pass
1**	1332.000	35.46	-1.29	54.0	18.54	AV	358.30	Vertical	Pass
2	2985.500	47.77	5.39	74.0	26.23	Peak	177.60	Vertical	Pass
2**	2985.500	37.00	5.39	54.0	17.00	AV	177.60	Vertical	Pass
3	4957.000	48.14	-6.00	74.0	25.86	Peak	277.60	Vertical	Pass
3**	4957.000	44.07	-6.00	54.0	9.93	AV	277.60	Vertical	Pass
4	10811.500	52.86	2.01	74.0	21.14	Peak	12.90	Vertical	Pass
4**	10811.500	42.47	2.01	54.0	11.53	AV	12.90	Vertical	Pass
5	14262.750	57.19	6.91	74.0	16.81	Peak	322.00	Vertical	Pass
5**	14262.750	45.70	6.91	54.0	8.30	AV	322.00	Vertical	Pass
6	17810.250	56.01	6.47	74.0	17.99	Peak	84.30	Vertical	Pass
6**	17810.250	46.39	6.47	54.0	7.61	AV	84.30	Vertical	Pass




RSE-H-18G-26G-H

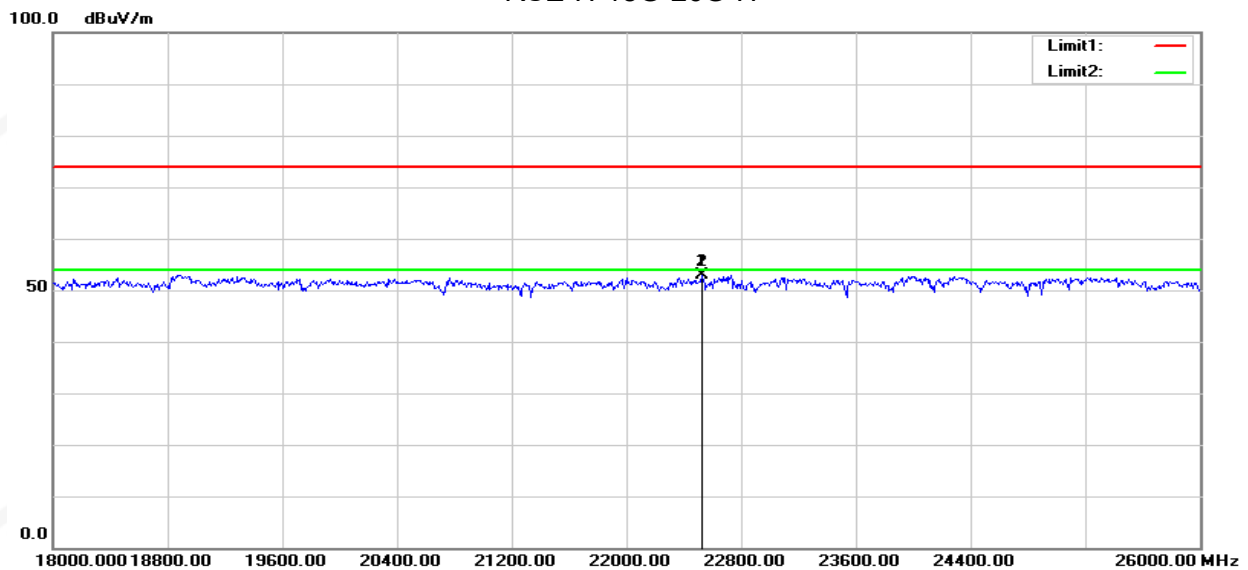

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	22528.000	48.91	3.90	52.81	74.00	-21.19	peak
2	22528.000	48.91	3.90	52.81	54.00	-1.19	AVG

RSE-H-18G-26G-V

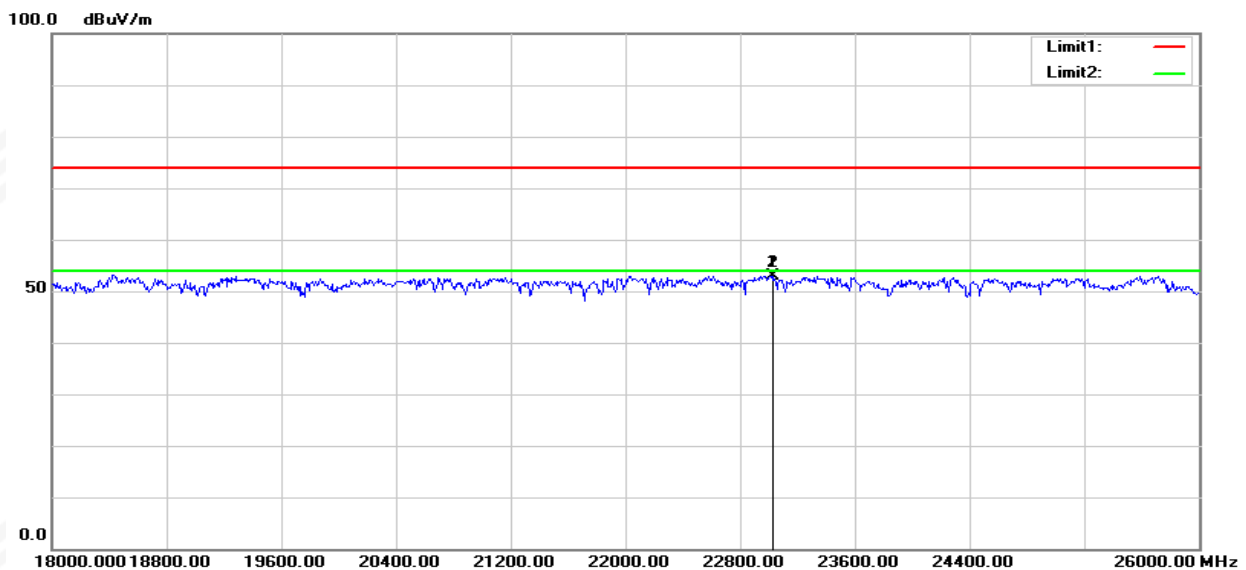

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	23032.000	49.33	3.67	53.00	74.00	-21.00	peak
2	23032.000	49.33	3.67	53.00	54.00	-1.00	AVG


Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor.
- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




4.6 TEST RESULTS (Restricted Bands Requirements)

Left
1M PHY
GFSK-Low
Horizontal

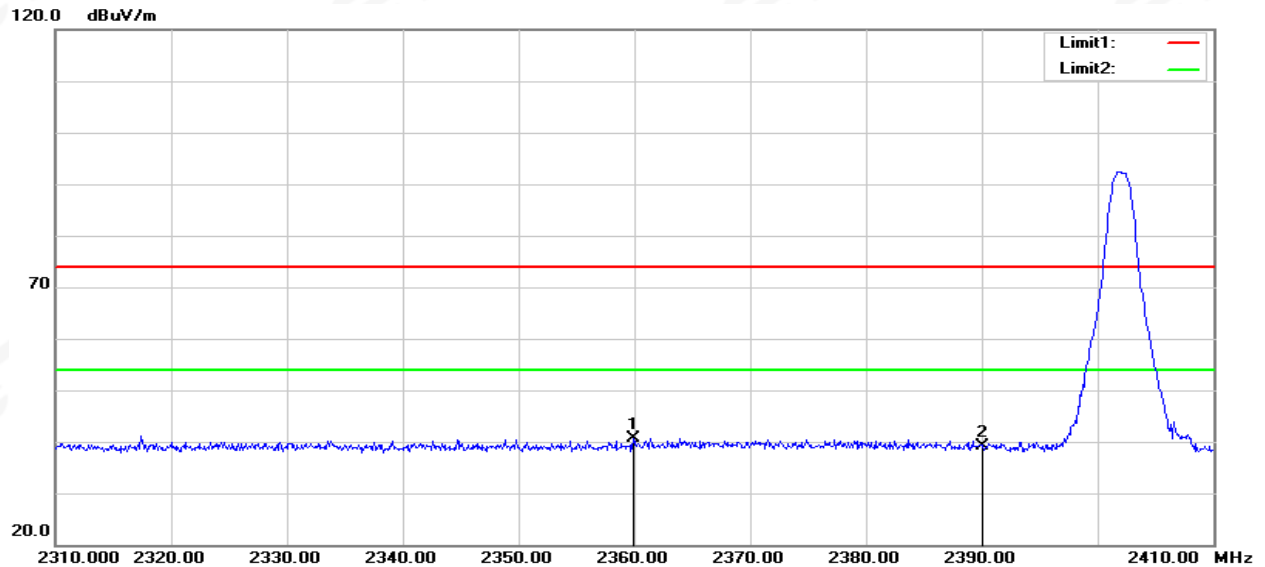


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2359.900	40.13	0.58	40.71	54.00	-13.29	peak
2	2390.000	38.36	0.81	39.17	54.00	-14.83	peak

Vertical

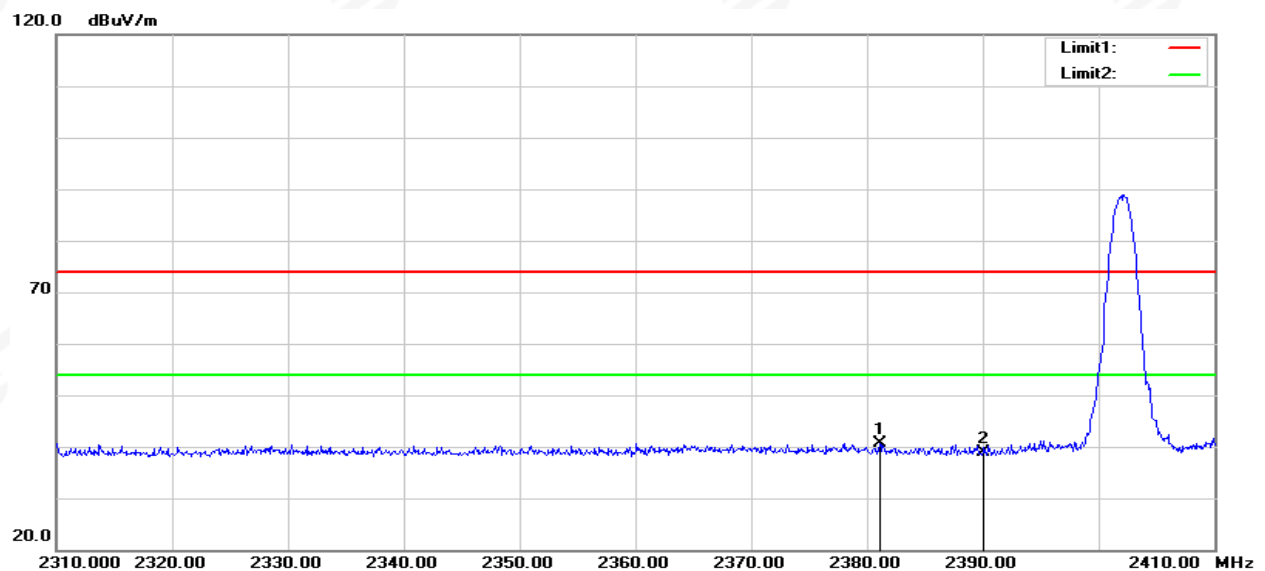


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.100	39.98	0.75	40.73	54.00	-13.27	peak
2	2390.000	38.09	0.81	38.90	54.00	-15.10	peak

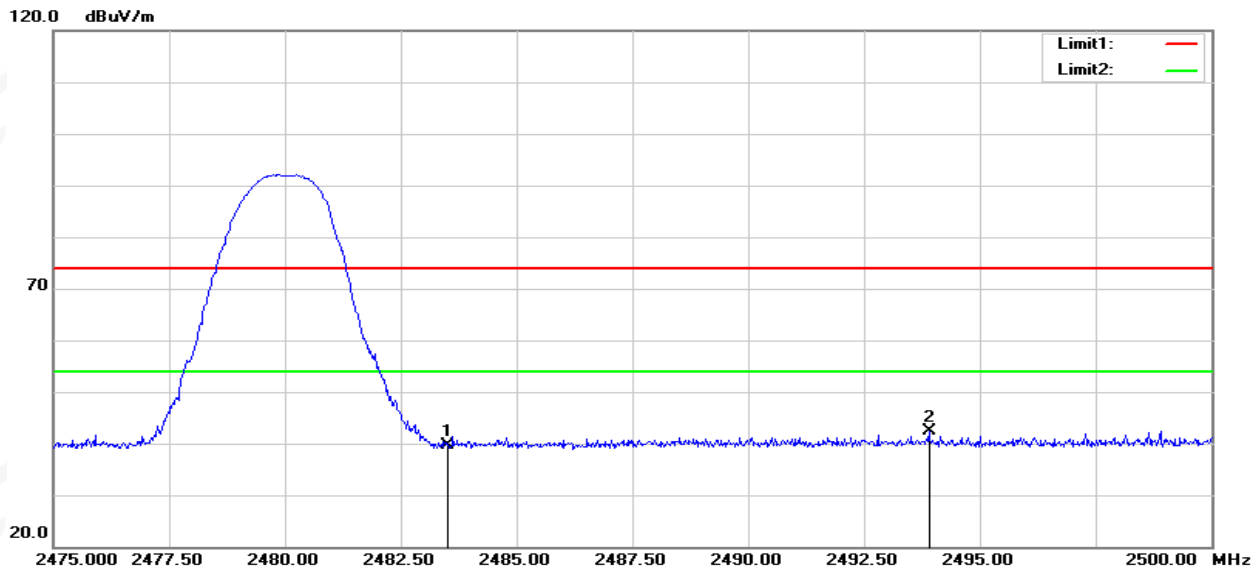GFSK-High
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.50	1.02	39.52	54.00	-14.48	peak
2	2493.900	41.41	1.04	42.45	54.00	-11.55	peak


Vertical

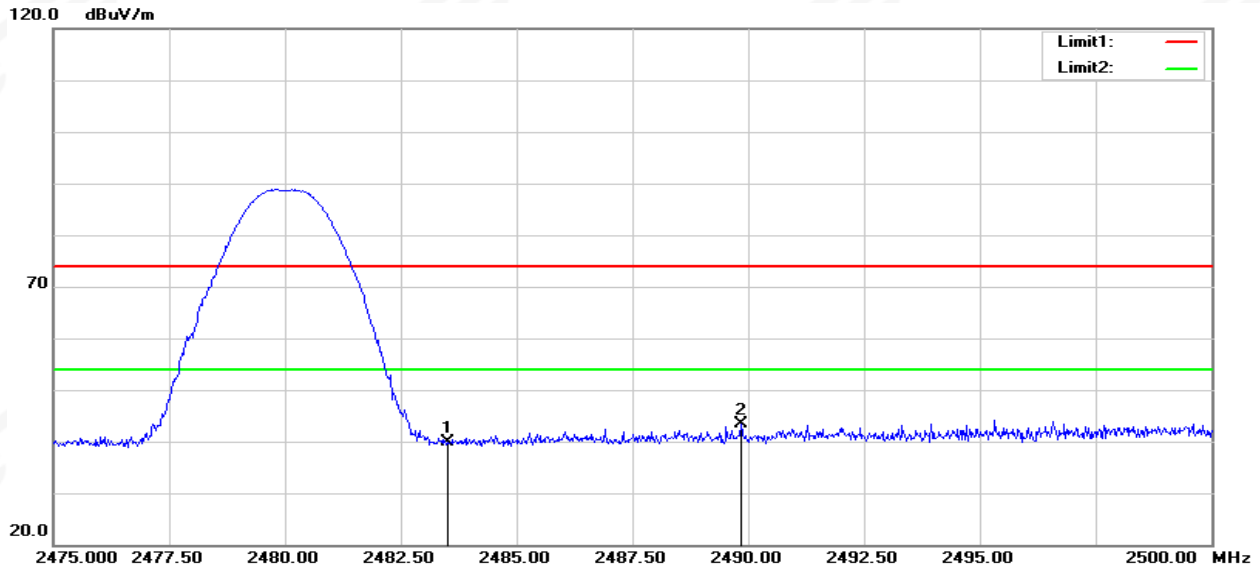

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.87	1.02	39.89	54.00	-14.11	peak
2	2489.850	42.38	1.04	43.42	54.00	-10.58	peak




Right
GFSK-Low
Horizontal

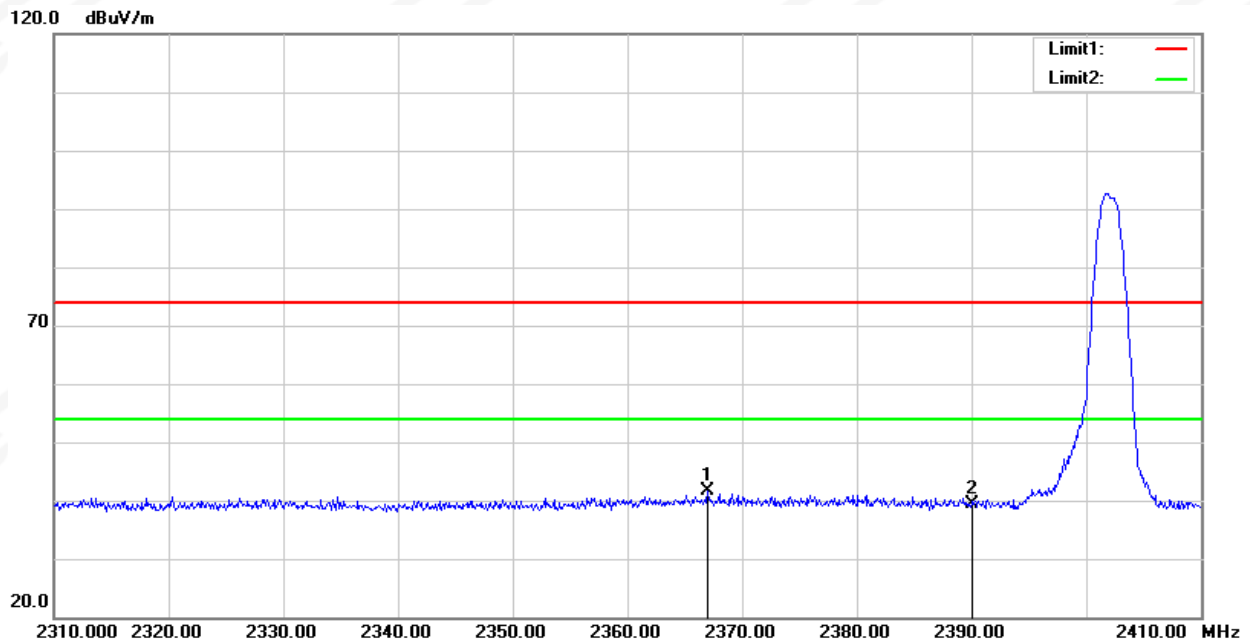


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.000	41.11	0.64	41.75	54.00	-12.25	peak
2	2390.000	38.48	0.81	39.29	54.00	-14.71	peak

Vertical

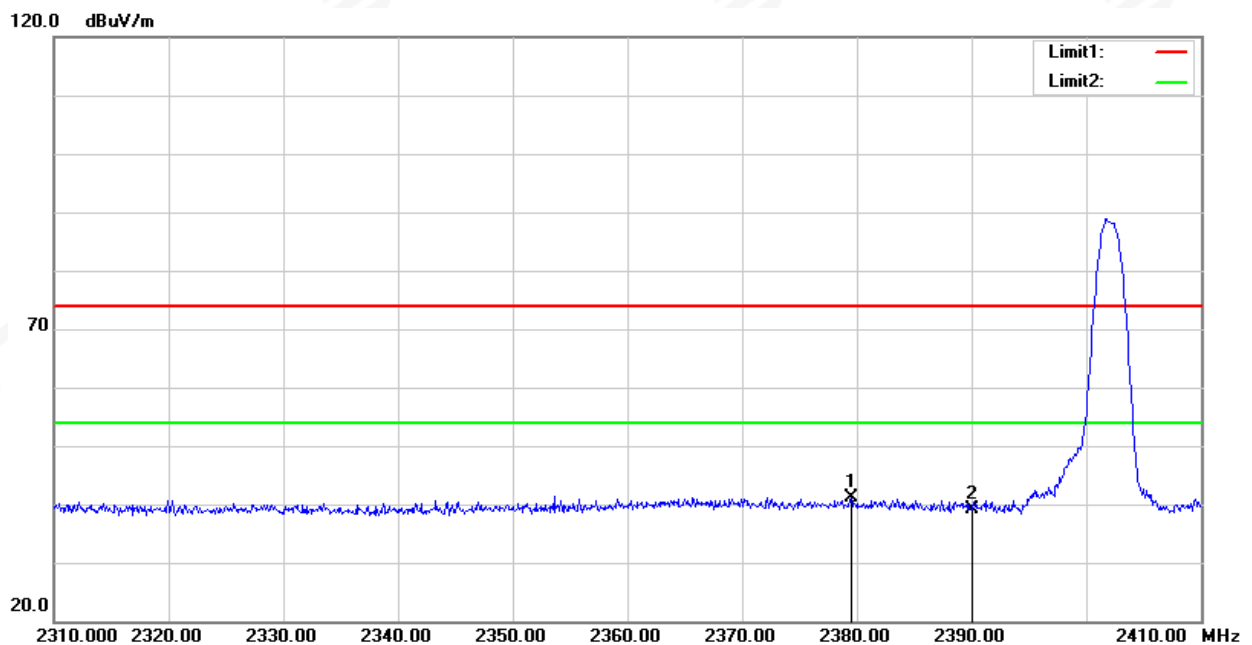


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.500	40.50	0.73	41.23	54.00	-12.77	peak
2	2390.000	38.32	0.81	39.13	54.00	-14.87	peak

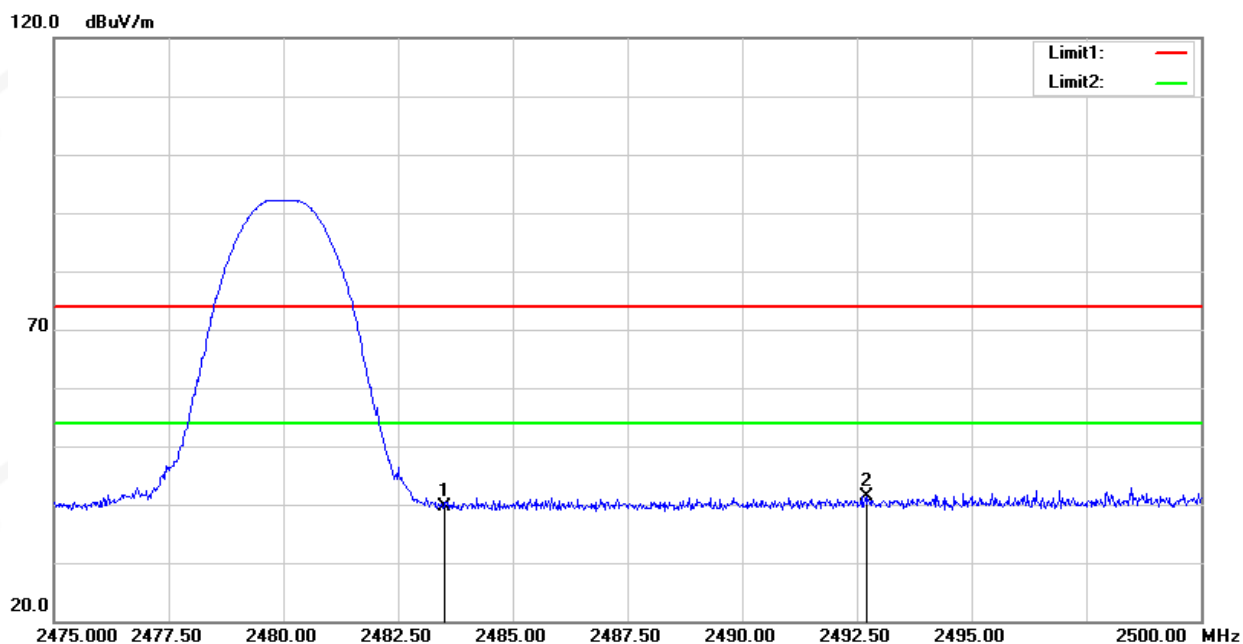GFSK-High
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.64	1.02	39.66	54.00	-14.34	peak
2	2492.725	40.40	1.04	41.44	54.00	-12.56	peak


Vertical

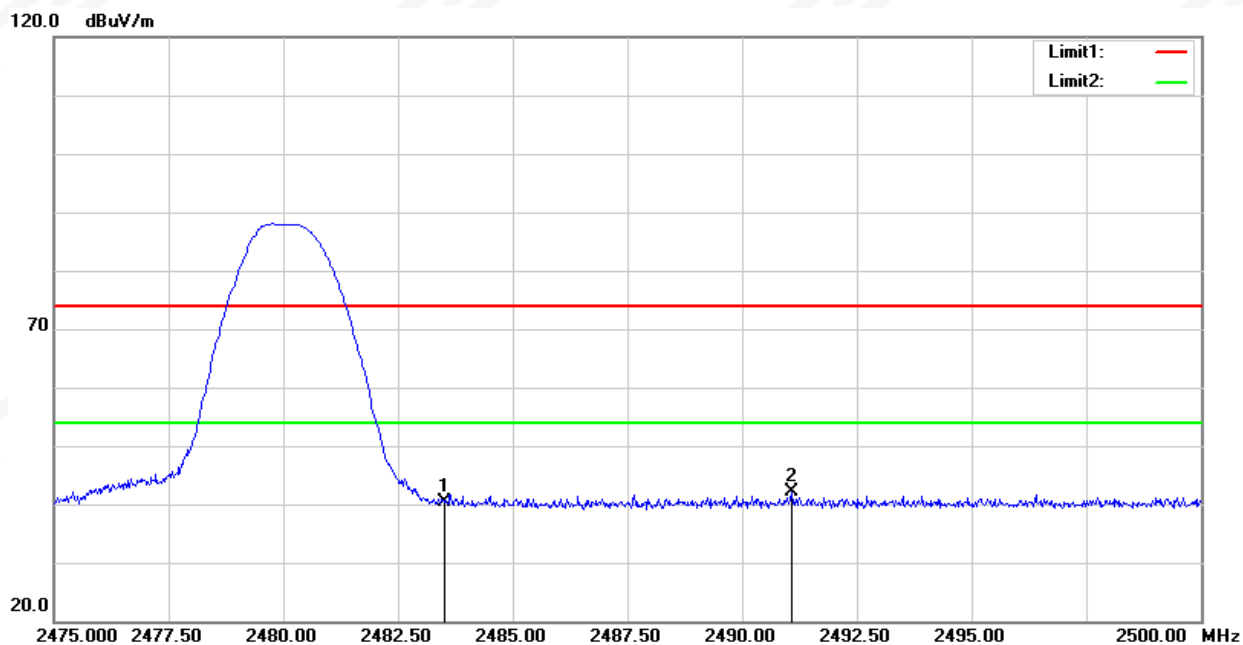

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.39	1.02	40.41	54.00	-13.59	peak
2	2491.075	40.99	1.04	42.03	54.00	-11.97	peak




2M PHY
GFSK-Low
Horizontal

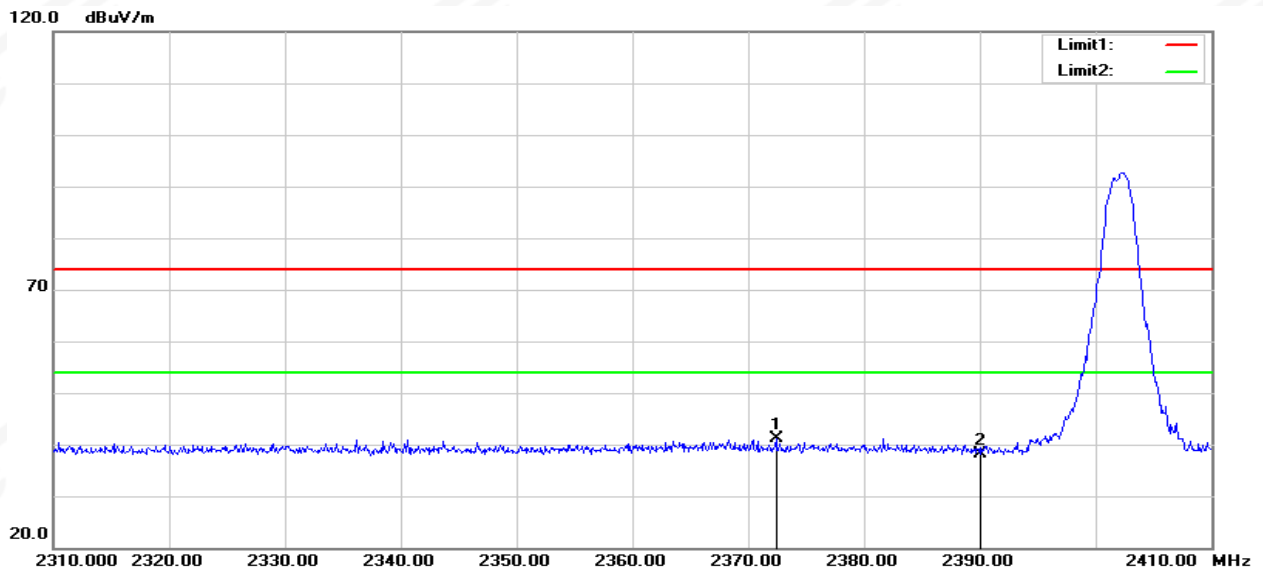


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.400	40.44	0.68	41.12	54.00	-12.88	peak
2	2390.000	37.40	0.81	38.21	54.00	-15.79	peak

Vertical

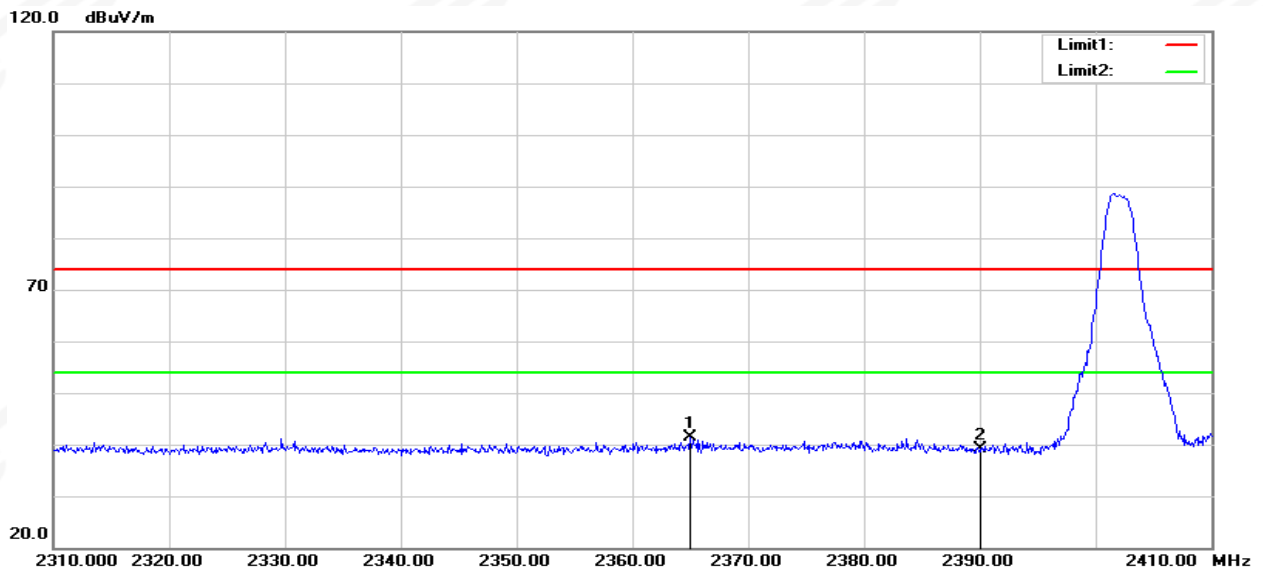


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.000	40.66	0.62	41.28	54.00	-12.72	peak
2	2390.000	38.27	0.81	39.08	54.00	-14.92	peak

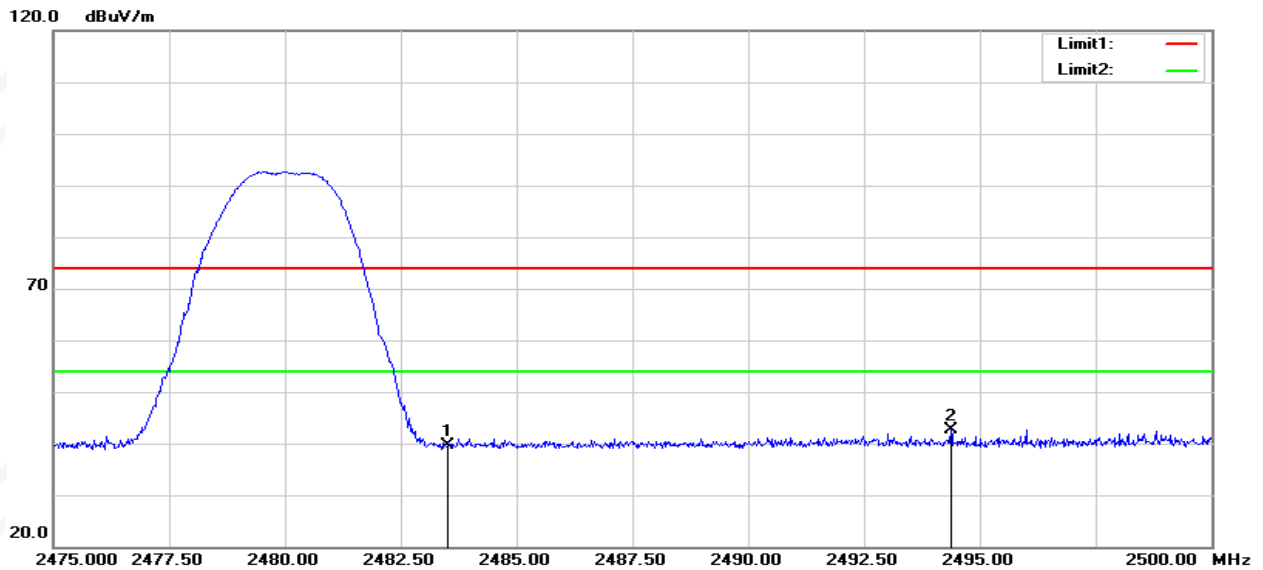GFSK-High
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.51	1.02	39.53	54.00	-14.47	peak
2	2494.375	41.63	1.04	42.67	54.00	-11.33	peak


Vertical

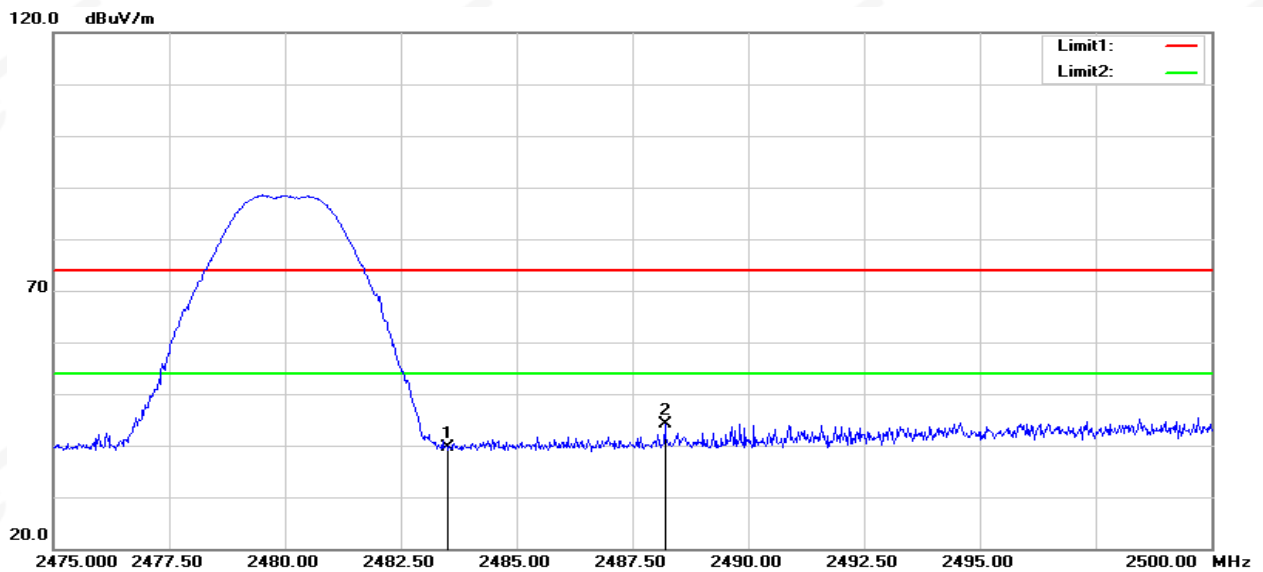

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.69	1.02	39.71	54.00	-14.29	peak
2	2488.200	43.17	1.03	44.20	54.00	-9.80	peak




Right
GFSK-Low
Horizontal

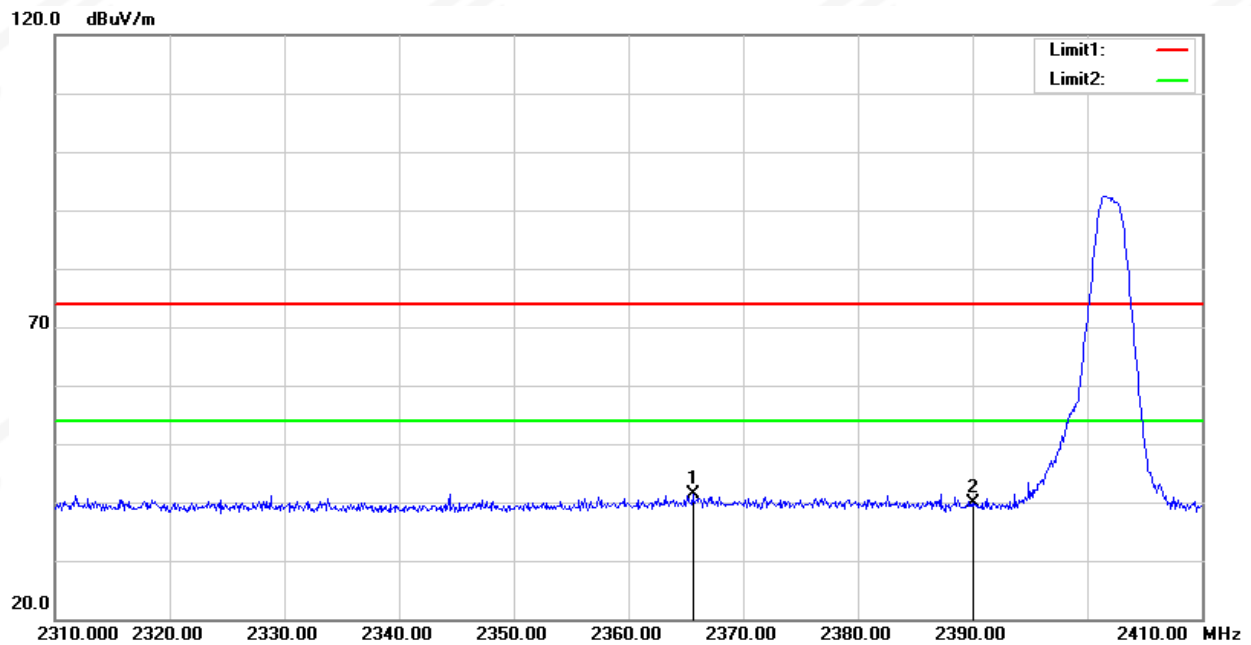


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.600	40.81	0.63	41.44	54.00	-12.56	peak
2	2390.000	39.02	0.81	39.83	54.00	-14.17	peak

Vertical

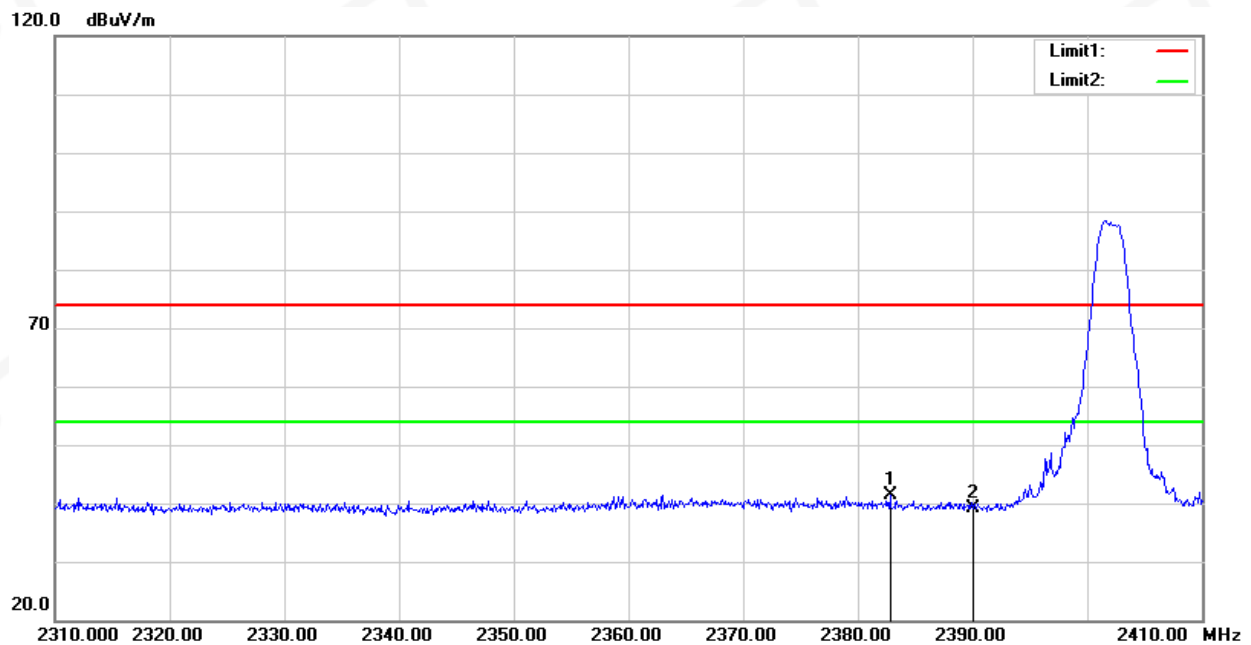


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.800	40.56	0.75	41.31	54.00	-12.69	peak
2	2390.000	38.38	0.81	39.19	54.00	-14.81	peak

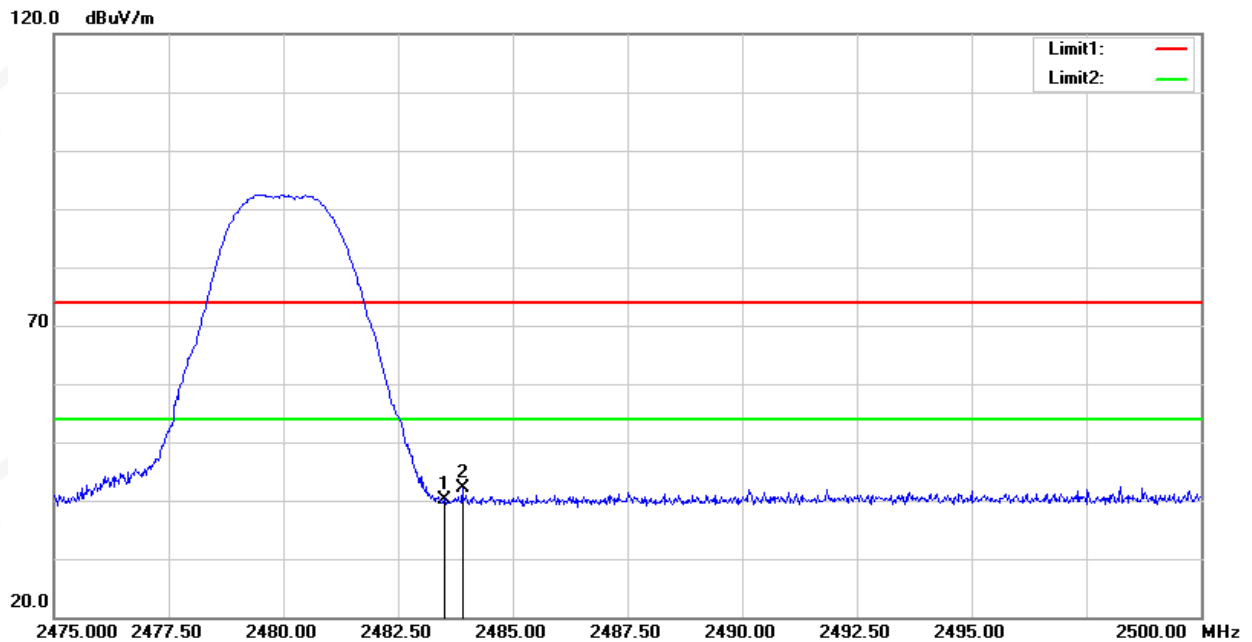GFSK-High
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.11	1.02	40.13	54.00	-13.87	peak
2	2483.900	41.15	1.03	42.18	54.00	-11.82	peak

Vertical

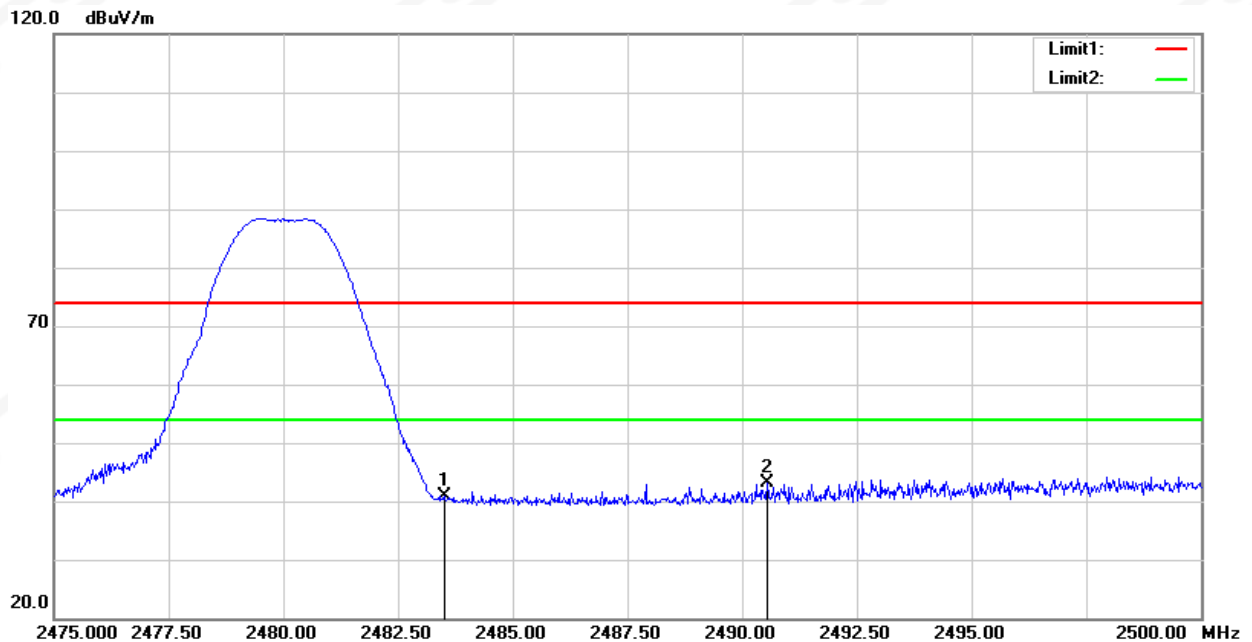

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.82	1.02	40.84	54.00	-13.16	peak
2	2490.550	42.15	1.04	43.19	54.00	-10.81	peak

5. DUTY CYCLE

5.1 TEST STANDARD

Please refer to ANSI C63.10-2020 Section 11.6

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Zero
RB	set RBW to the largest available value
VB	VBW $\geq$ RBW.
Detector	Peak
Trace	Clear Write
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

6. CONDUCTED SPURIOUS & BAND EDGE EMISSION

6.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

6.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

6.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminals is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

7. POWER SPECTRAL DENSITY TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ ($\text{RBW} \geq 3 \text{ KHz}$)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. BANDWIDTH TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

8.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

9. PEAK OUTPUT POWER TEST

9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

9.3 TEST SETUP



9.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

9.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.


**APPENDIX 1-TEST DATA****Duty Cycle**

Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	0.442	0.625	70.72	1.5	2.26
NVNT	BLE 1M	2440	0.442	0.625	70.72	1.5	2.26
NVNT	BLE 1M	2480	0.443	0.625	70.88	1.49	2.26
NVNT	BLE 2M	2402	0.26	0.626	41.53	3.82	3.85
NVNT	BLE 2M	2440	0.258	0.624	41.35	3.84	3.88
NVNT	BLE 2M	2480	0.258	0.626	41.21	3.85	3.88

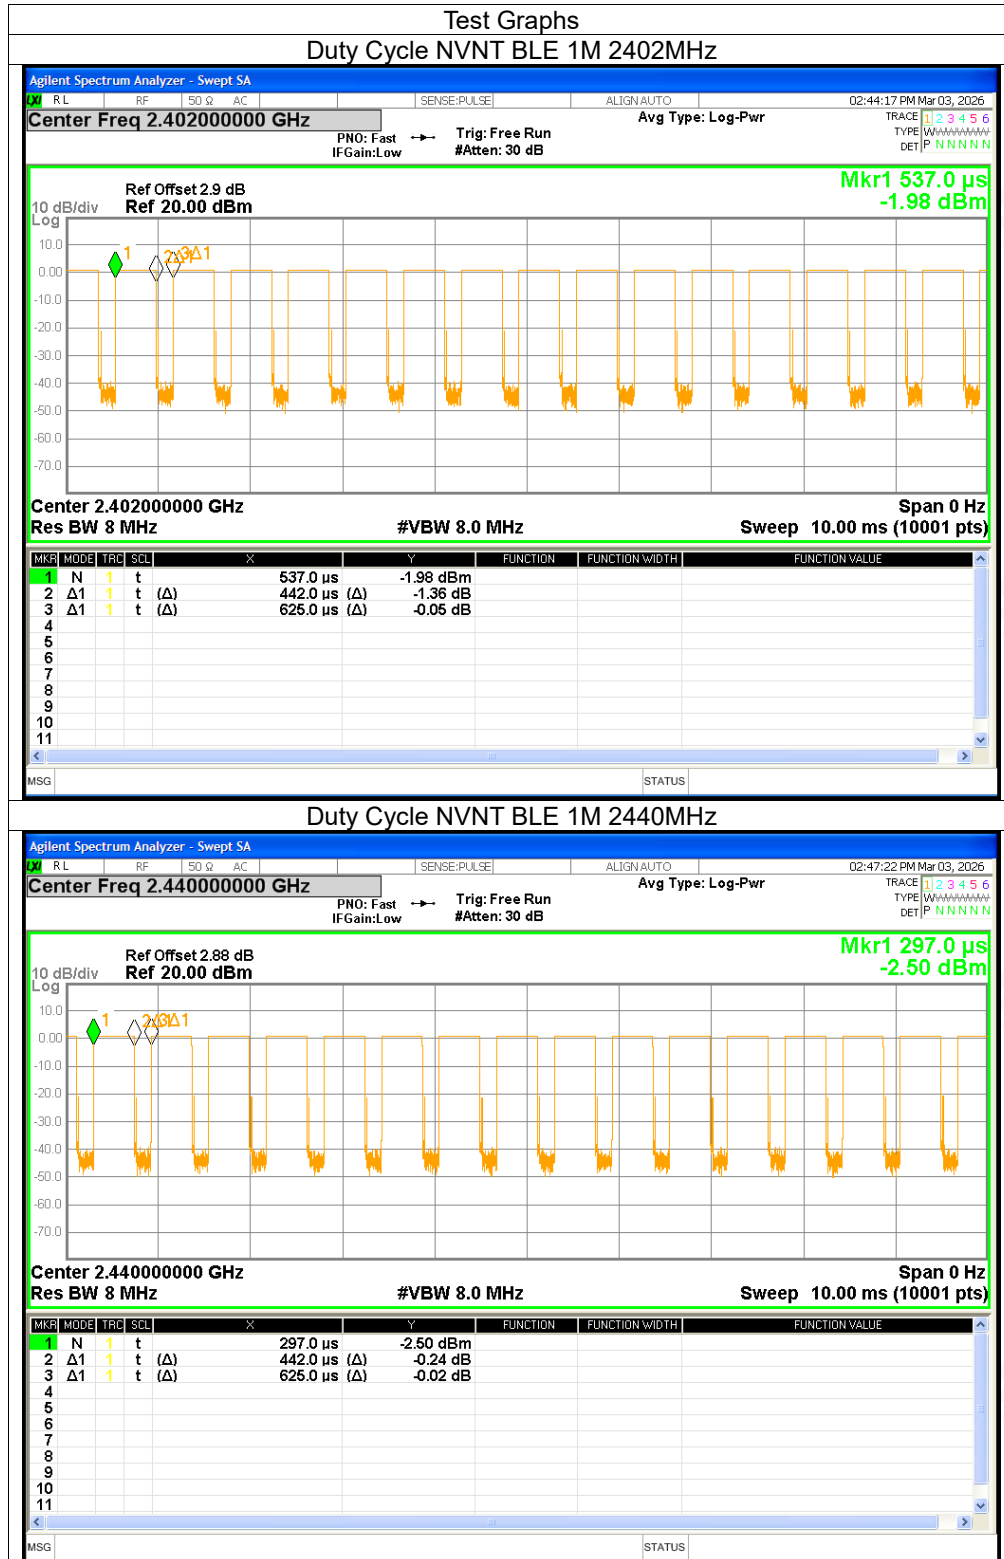





Duty Cycle NVNT BLE 1M 2480MHz

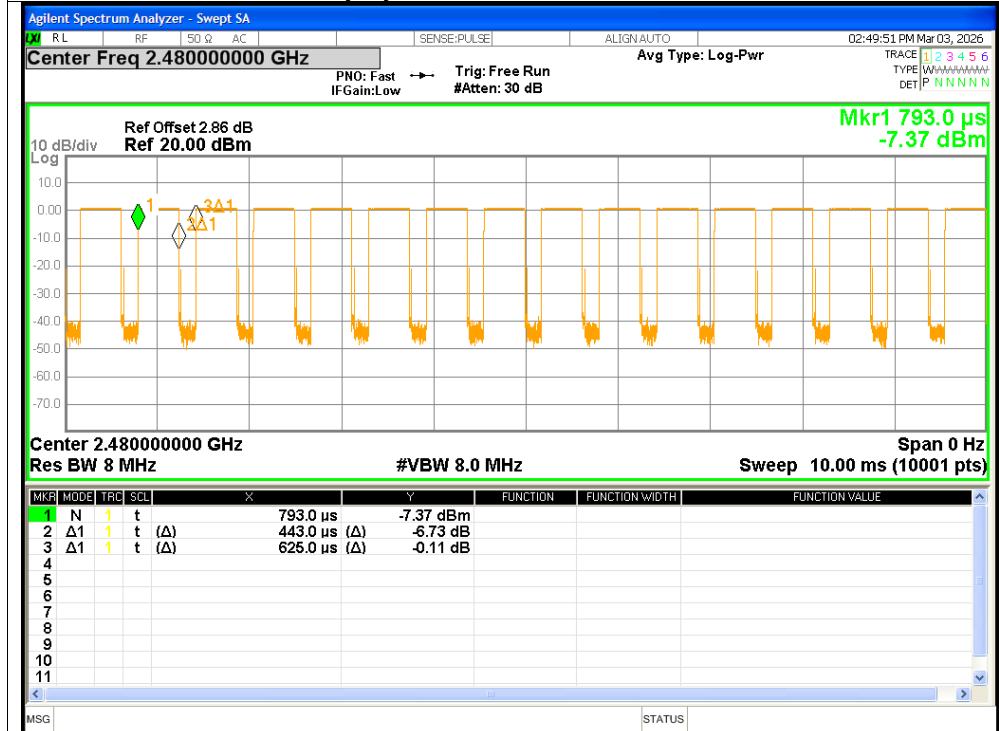

Duty Cycle NVNT BLE 2M 2402MHz

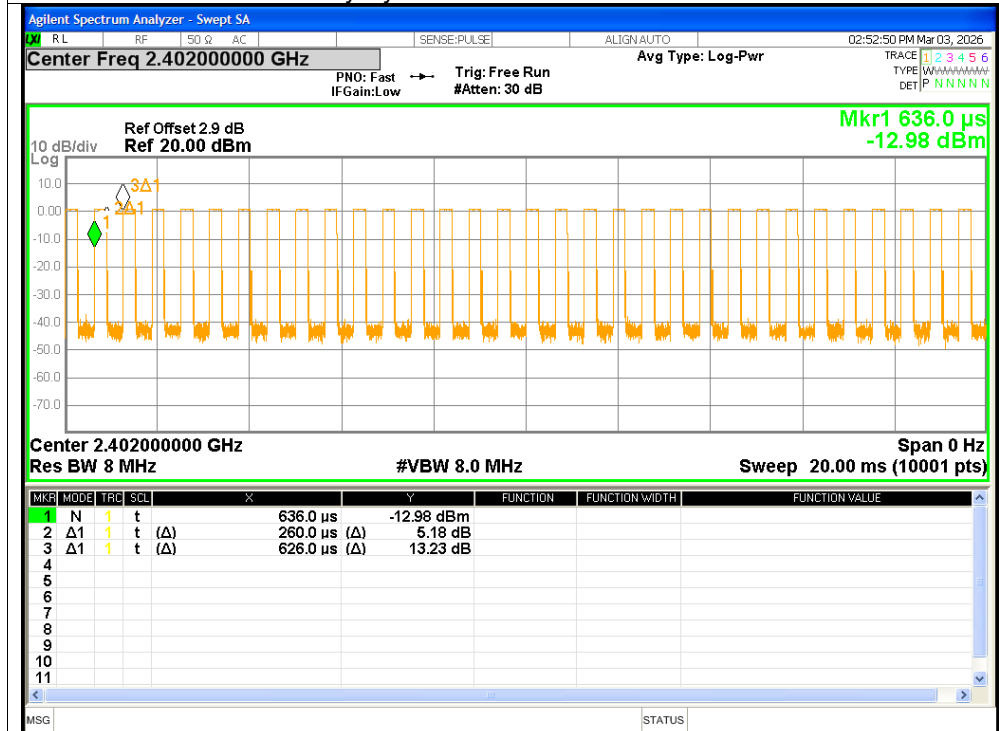


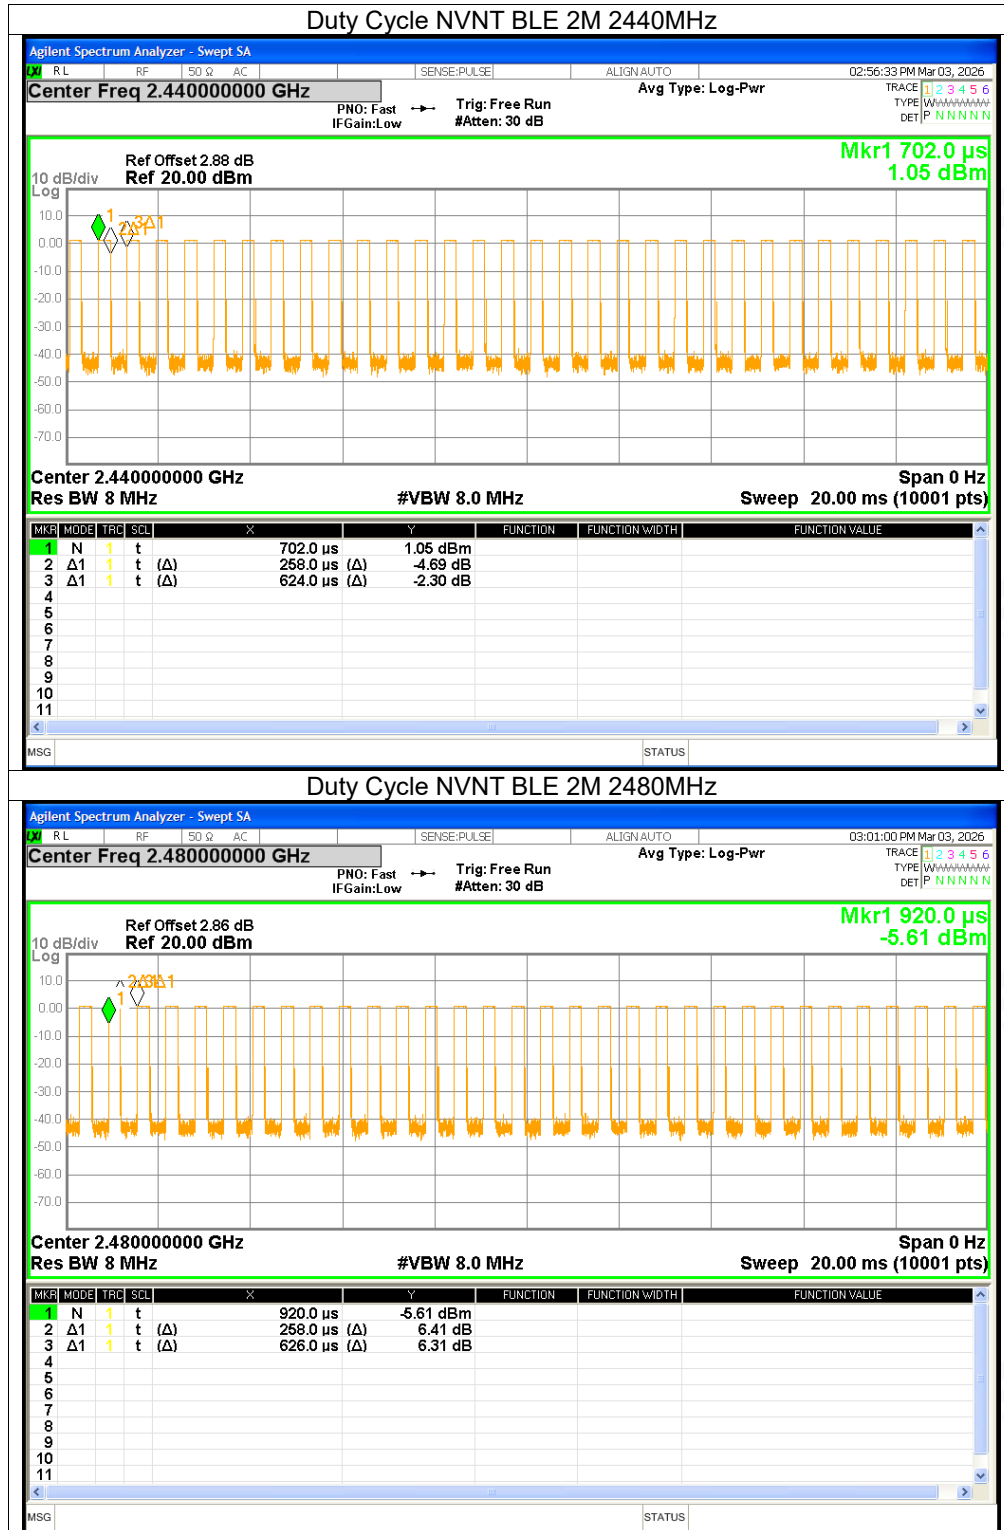





Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	0.85	<=30	Pass
NVNT	BLE 1M	2440	0.83	<=30	Pass
NVNT	BLE 1M	2480	0.64	<=30	Pass
NVNT	BLE 2M	2402	0.82	<=30	Pass
NVNT	BLE 2M	2440	1.17	<=30	Pass
NVNT	BLE 2M	2480	0.83	<=30	Pass

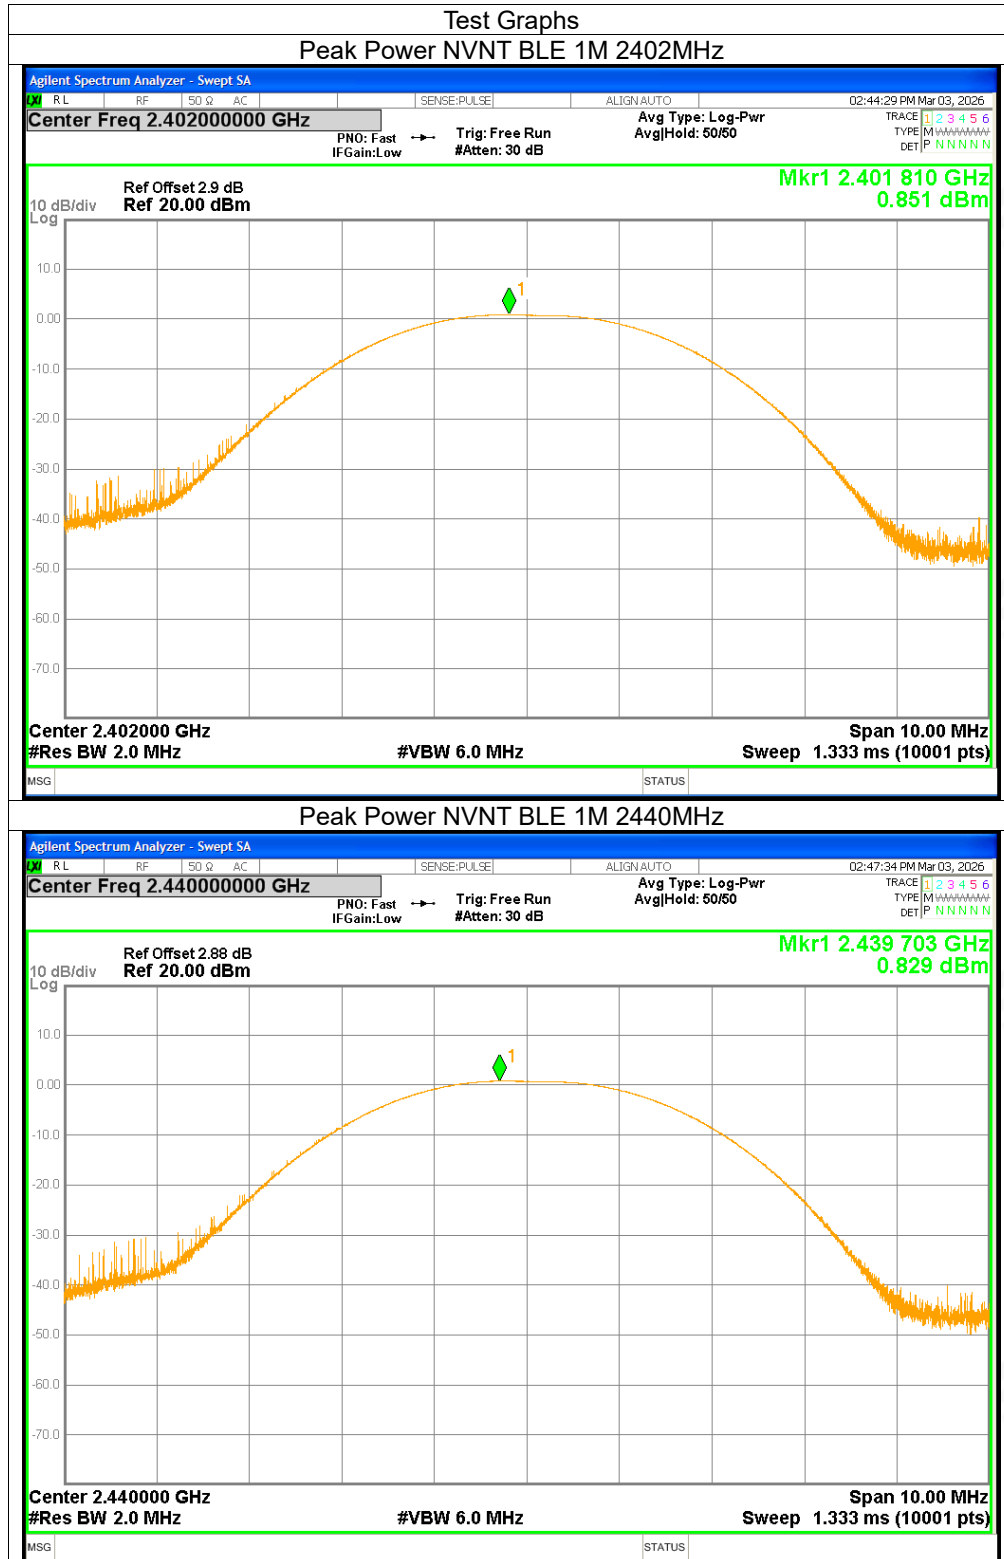


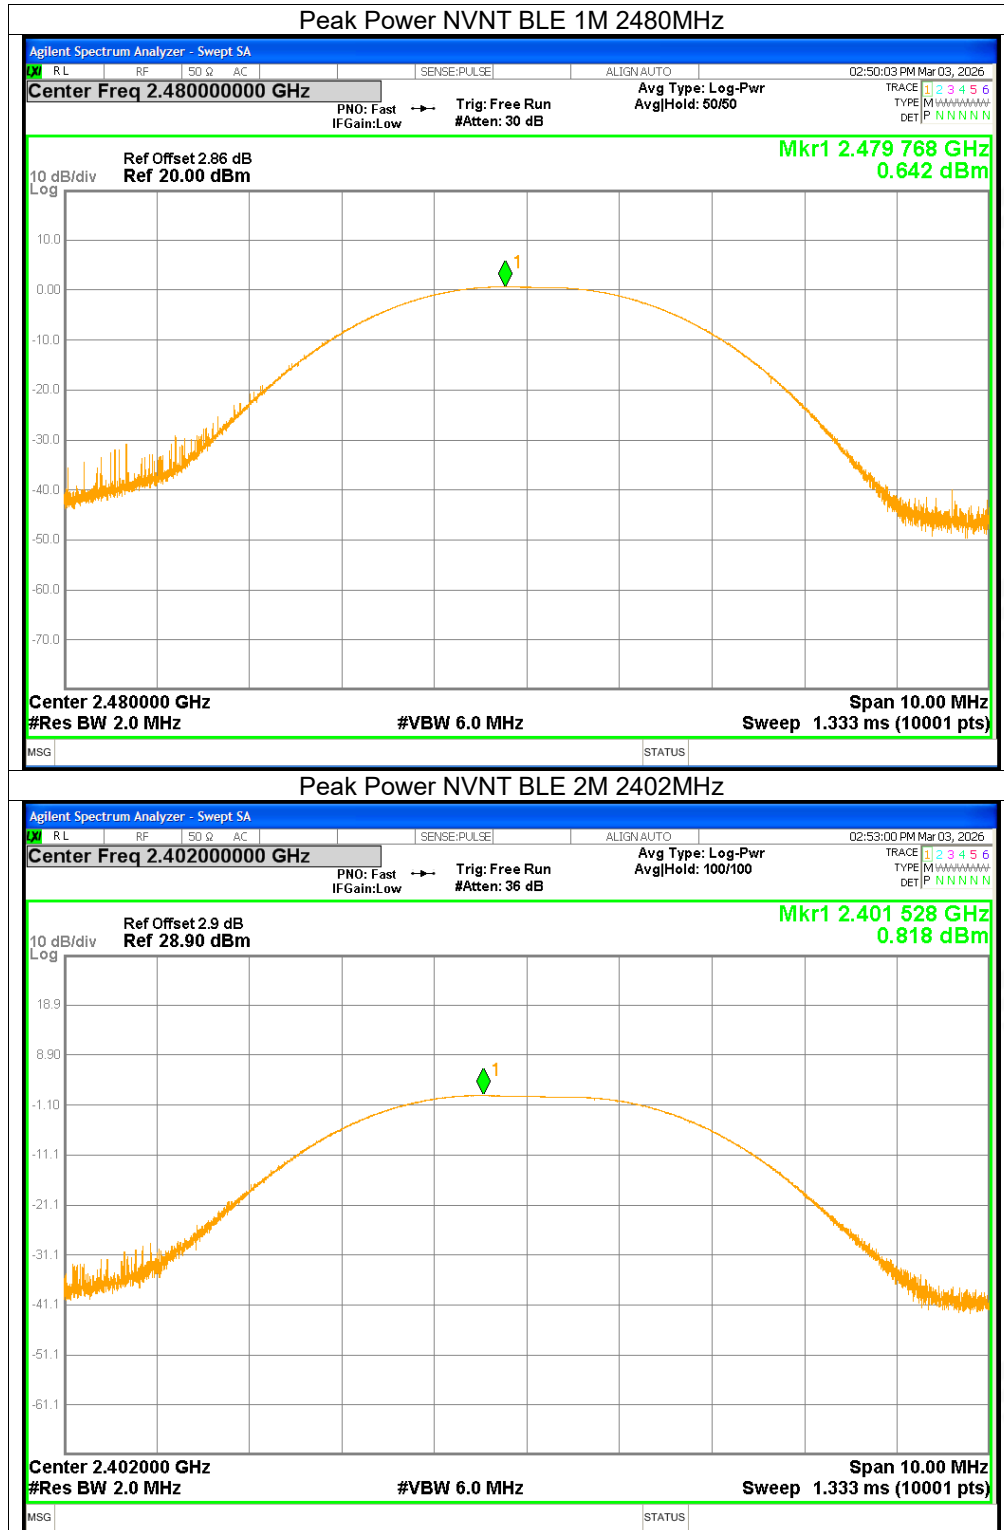


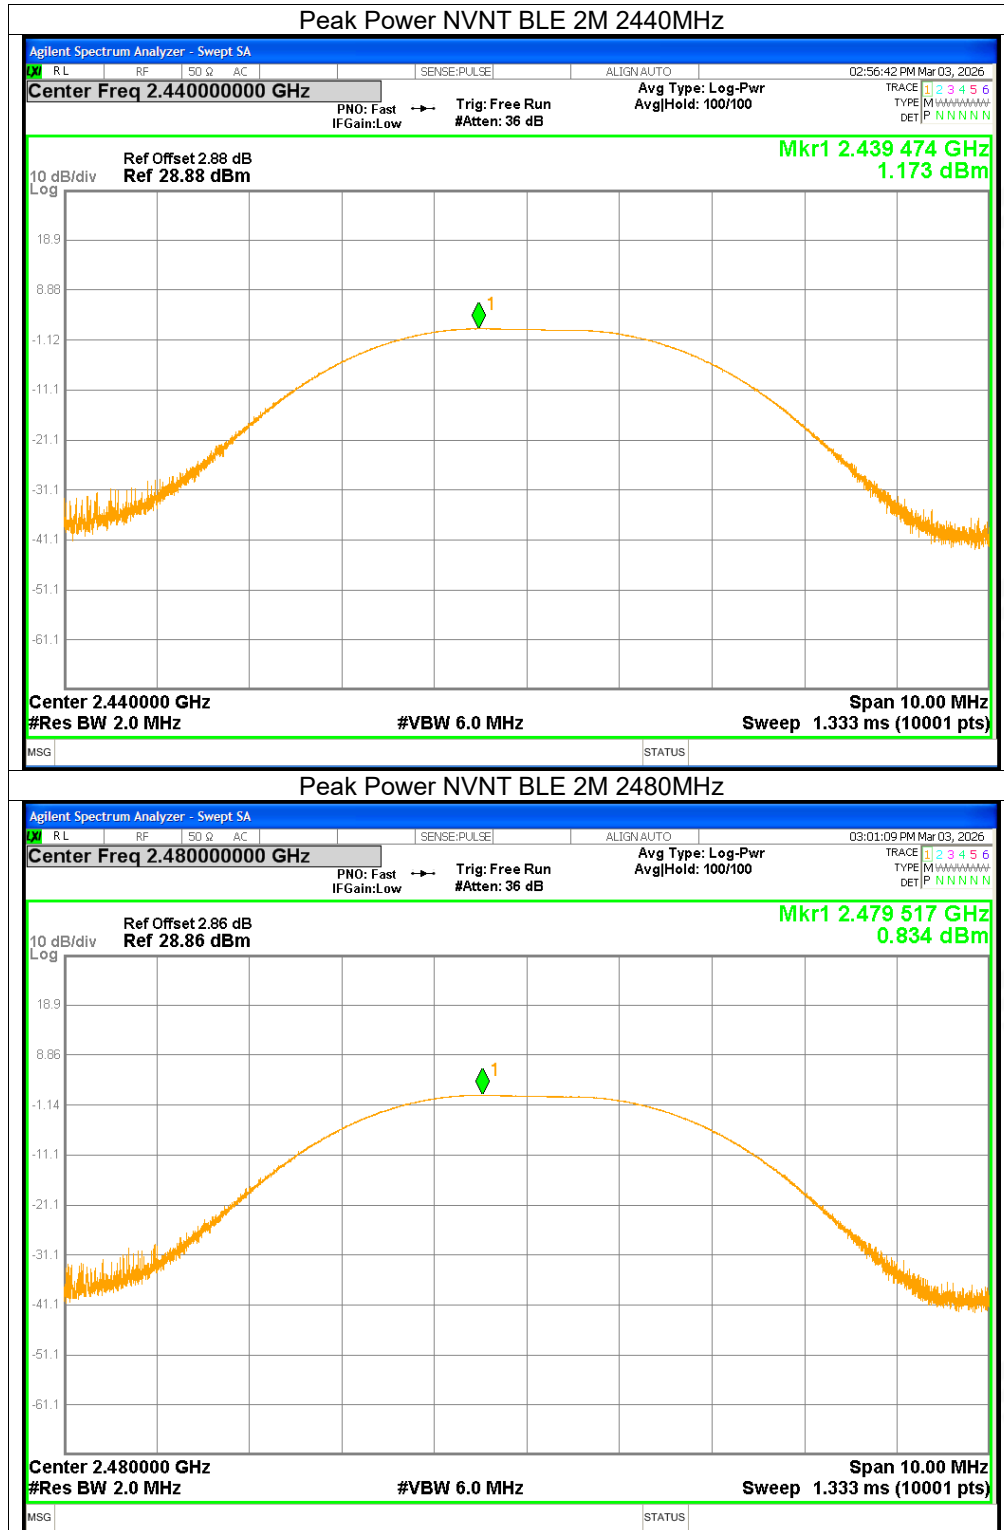


**-6dB Bandwidth**

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.658	≥ 0.5	Pass
NVNT	BLE 1M	2440	0.6493	≥ 0.5	Pass
NVNT	BLE 1M	2480	0.6521	≥ 0.5	Pass
NVNT	BLE 2M	2402	1.147	≥ 0.5	Pass
NVNT	BLE 2M	2440	1.147	≥ 0.5	Pass
NVNT	BLE 2M	2480	1.146	≥ 0.5	Pass

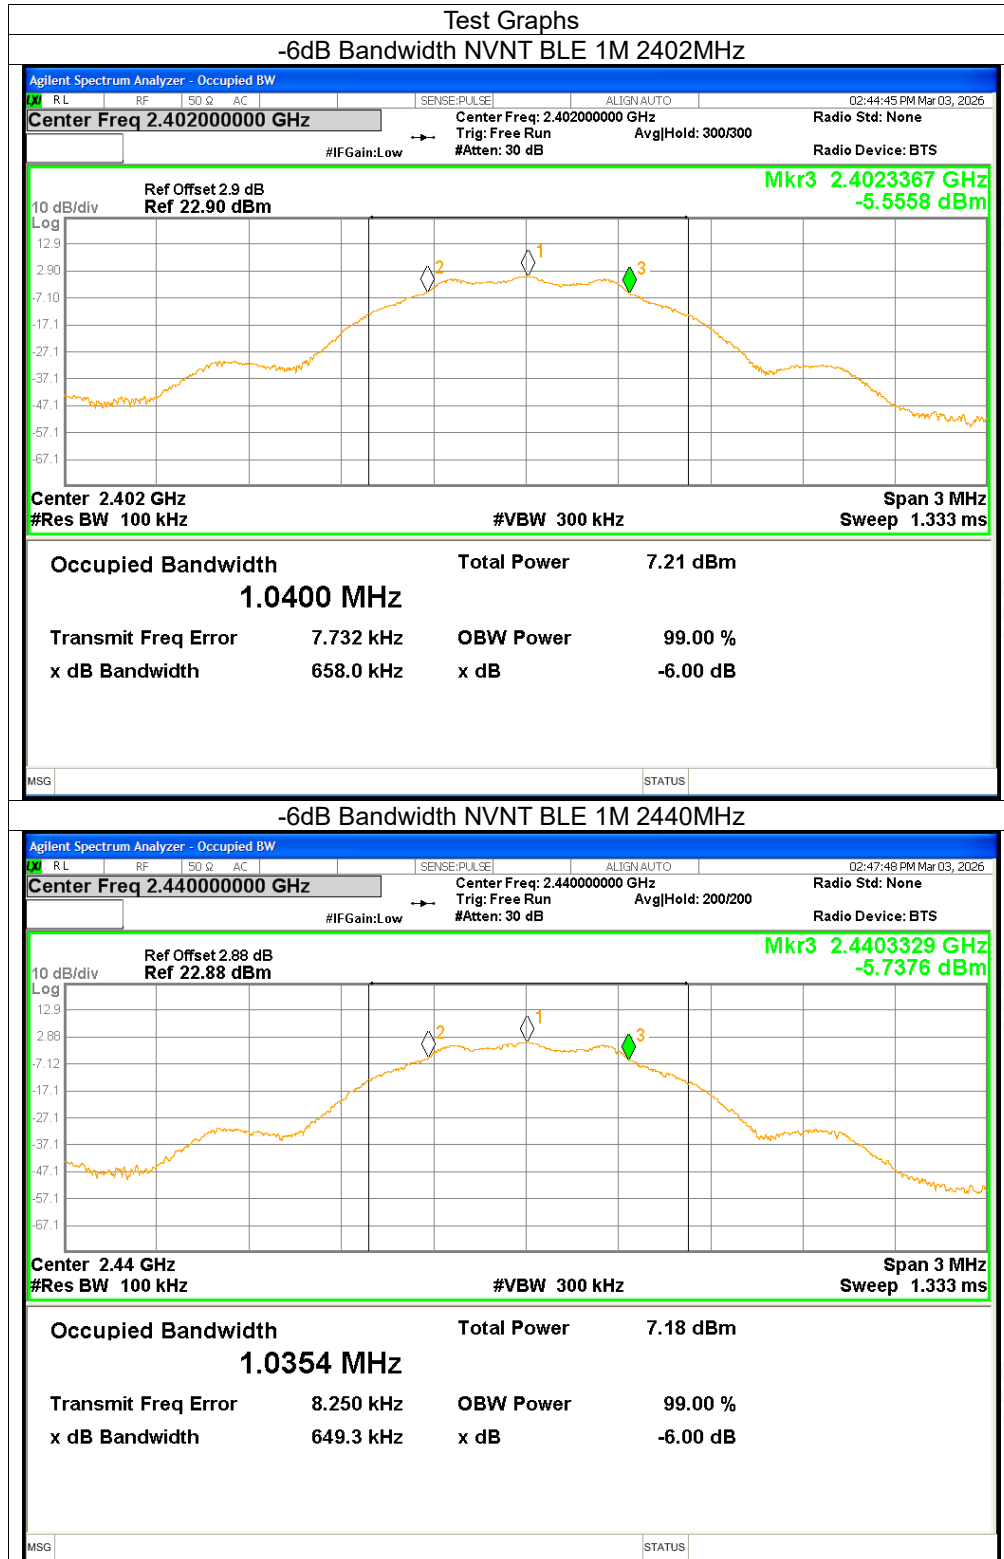

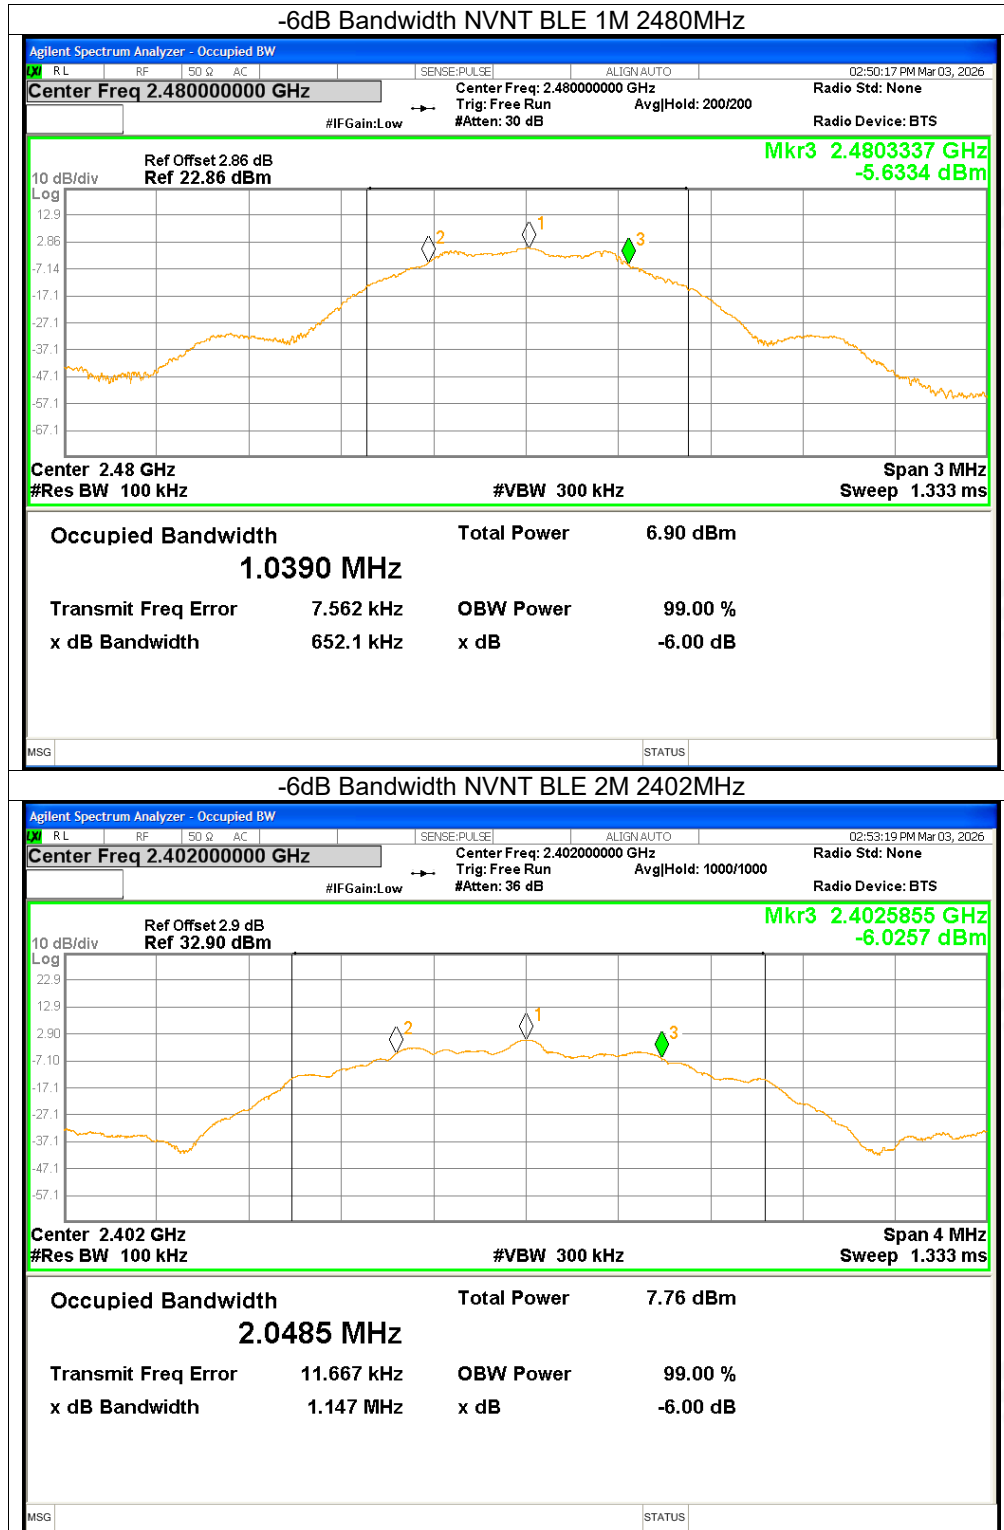


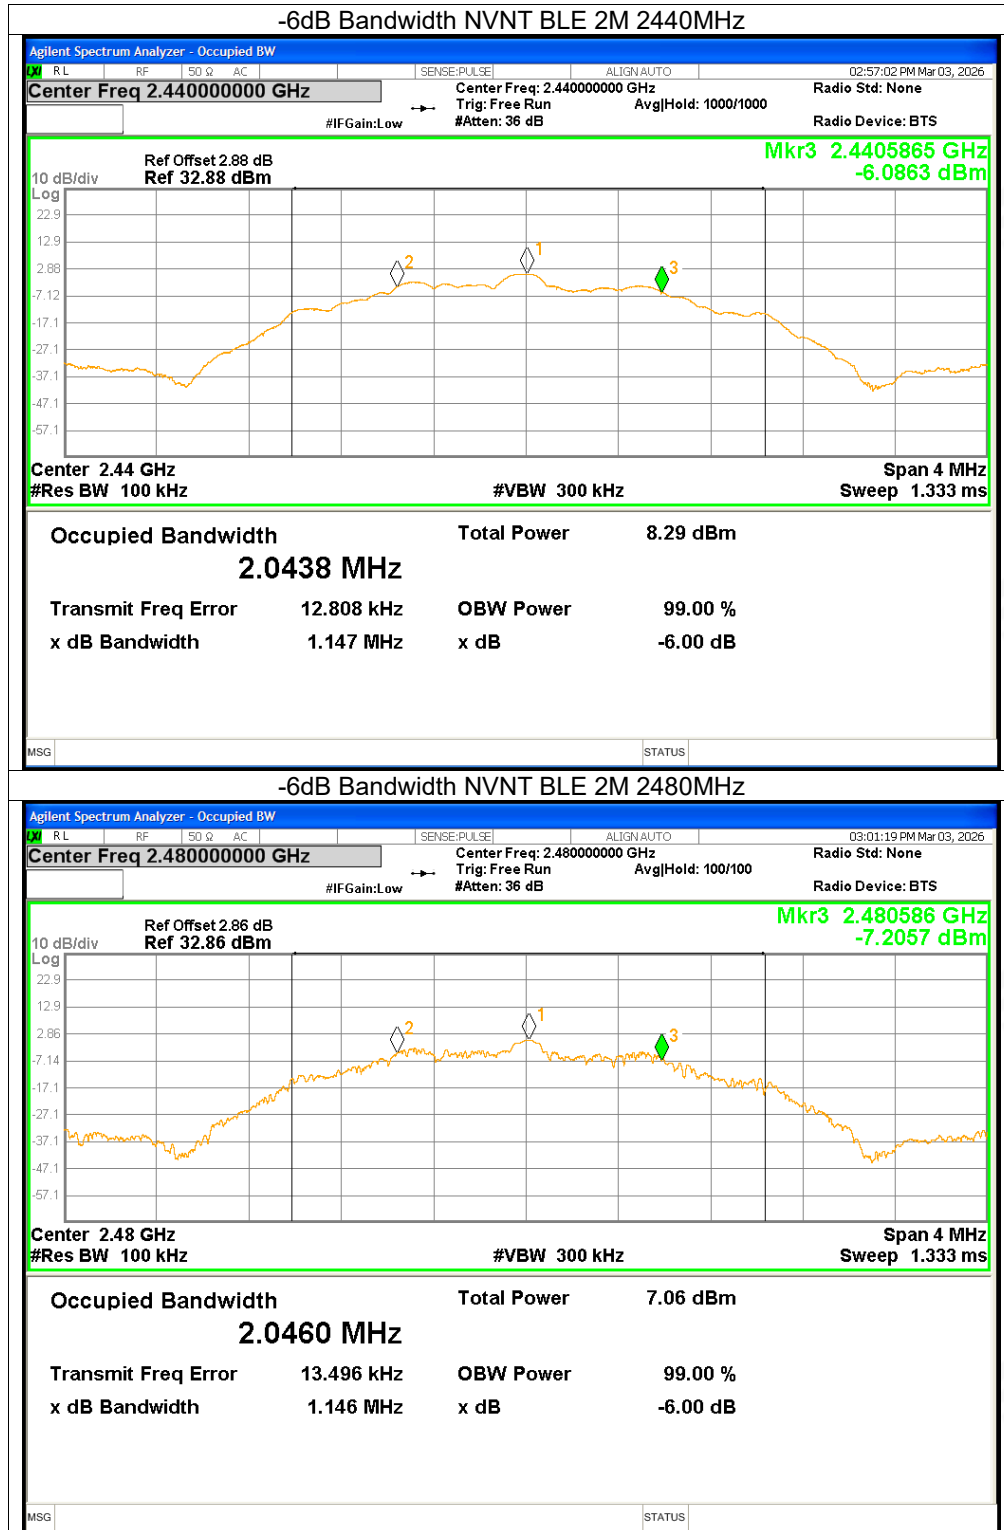





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-9.1	≤ 8	Pass
NVNT	BLE 1M	2440	-9.83	≤ 8	Pass
NVNT	BLE 1M	2480	-9.17	≤ 8	Pass
NVNT	BLE 2M	2402	-9.74	≤ 8	Pass
NVNT	BLE 2M	2440	-10.13	≤ 8	Pass
NVNT	BLE 2M	2480	-9.7	≤ 8	Pass

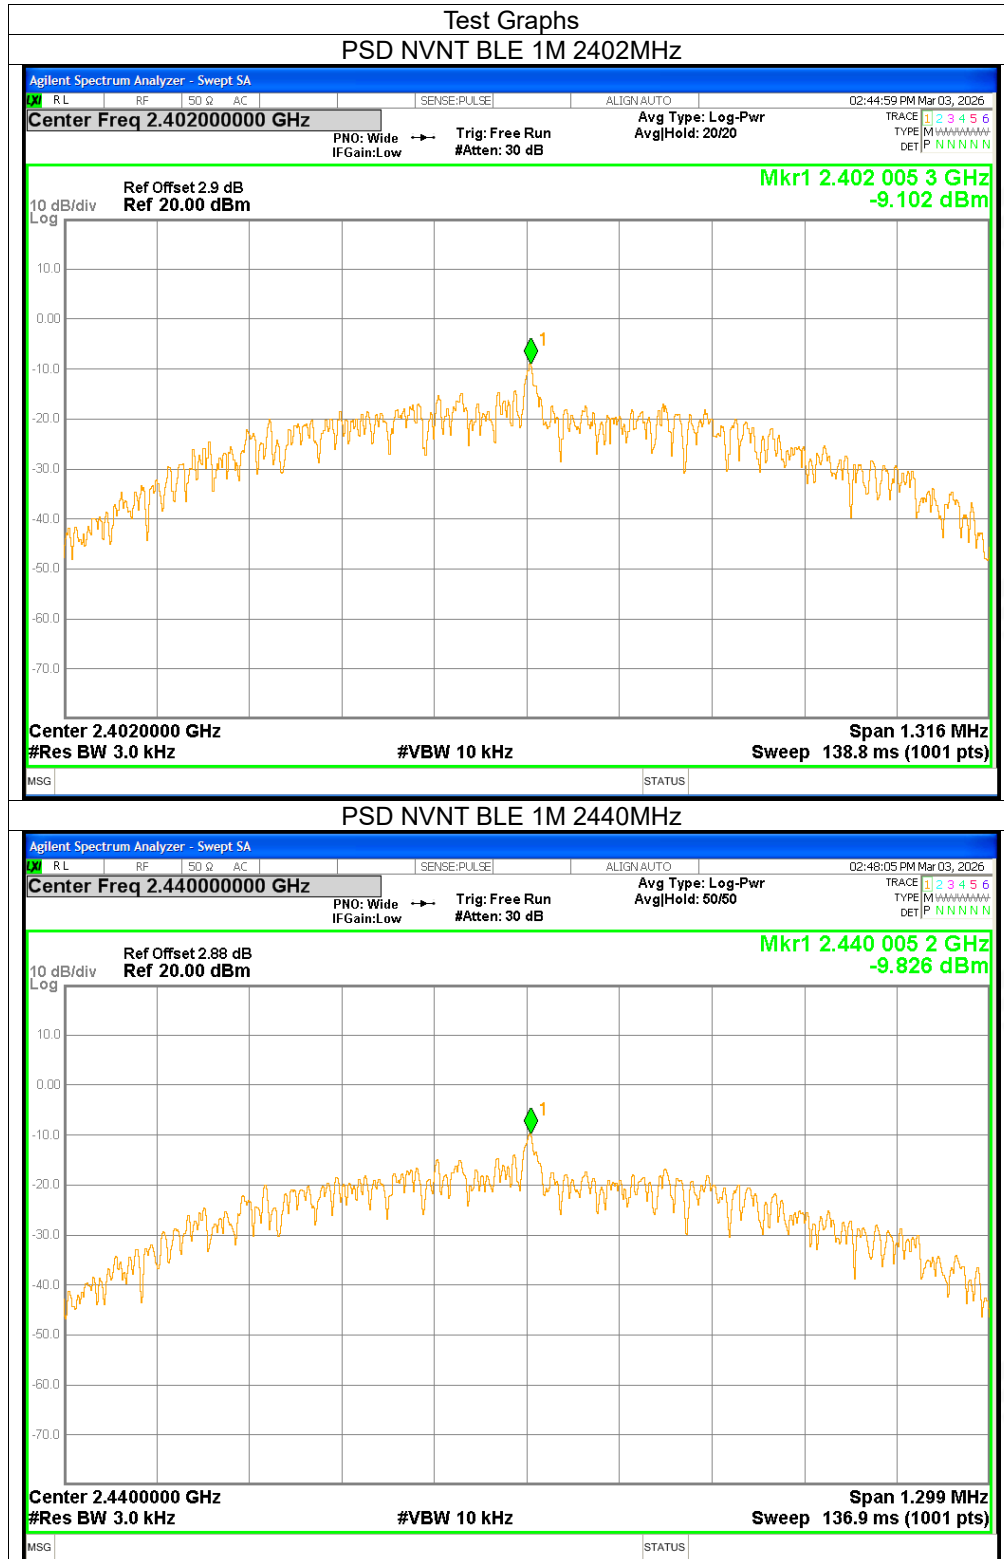

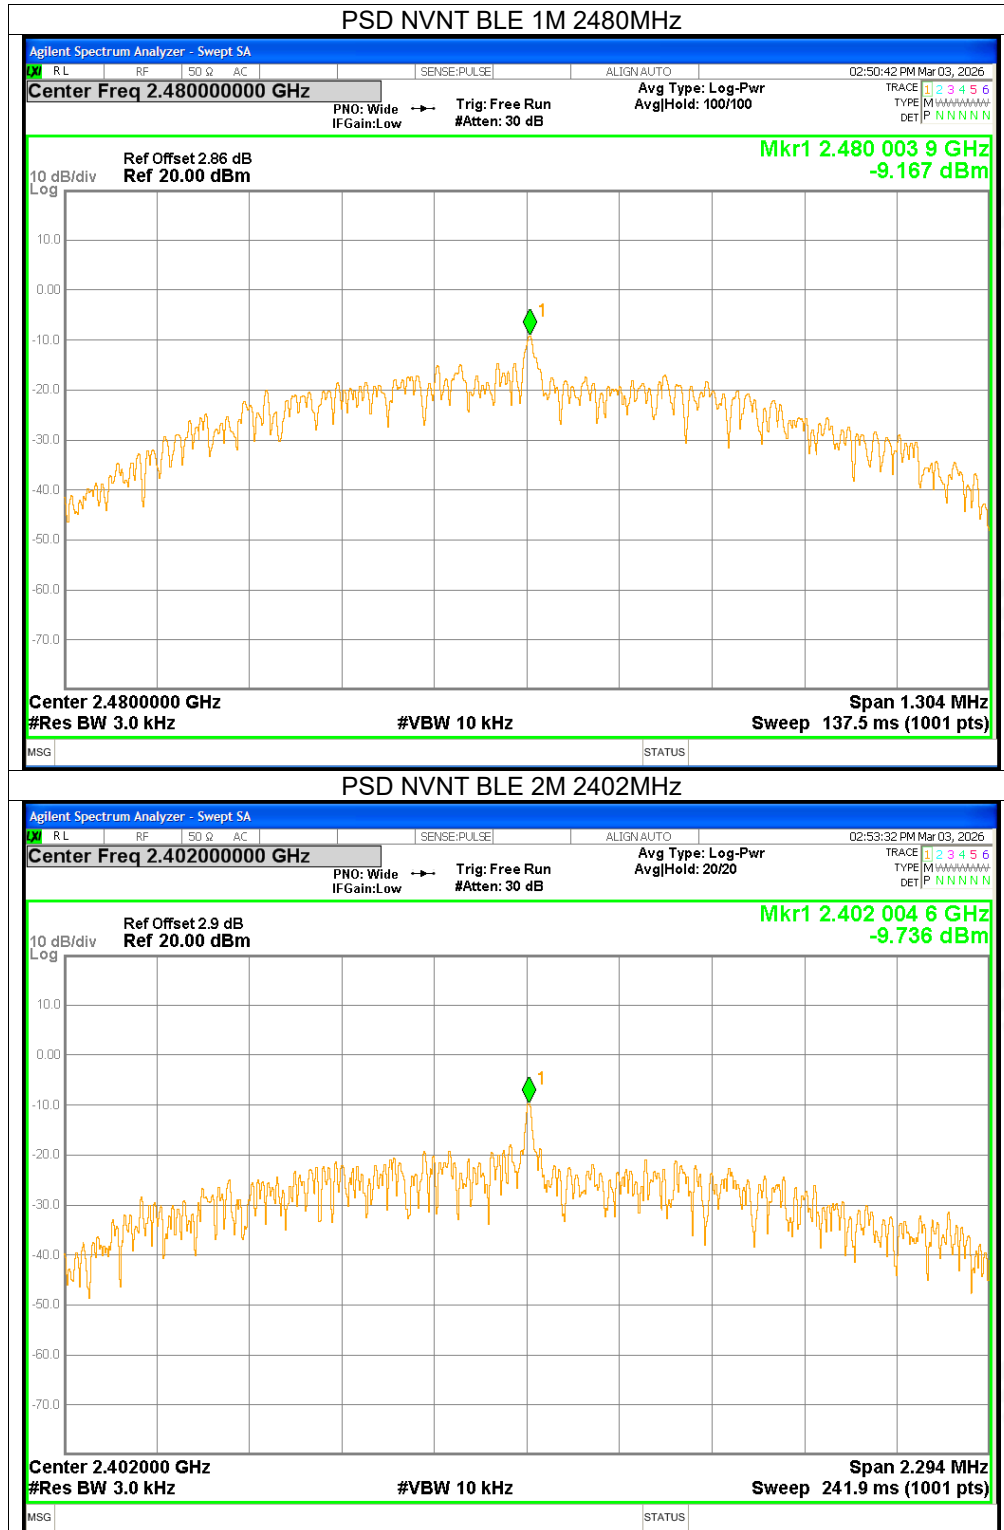


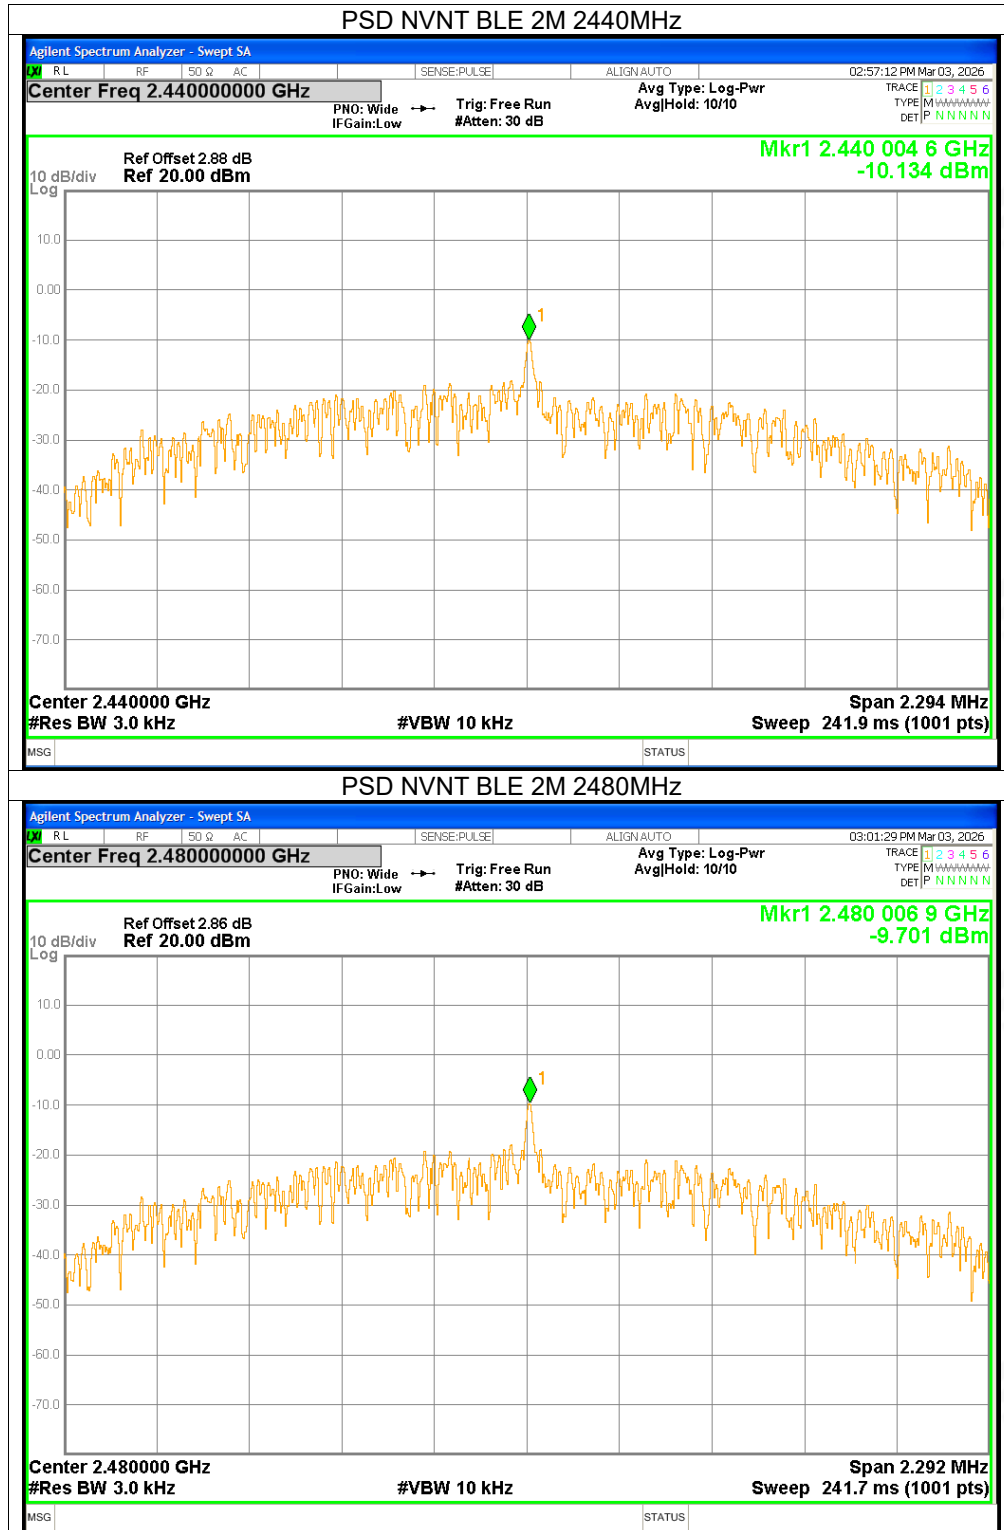






Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-38.63	≤ -20	Pass
NVNT	BLE 1M	2480	-54.8	≤ -20	Pass
NVNT	BLE 2M	2402	-33.47	≤ -20	Pass
NVNT	BLE 2M	2480	-49.61	≤ -20	Pass

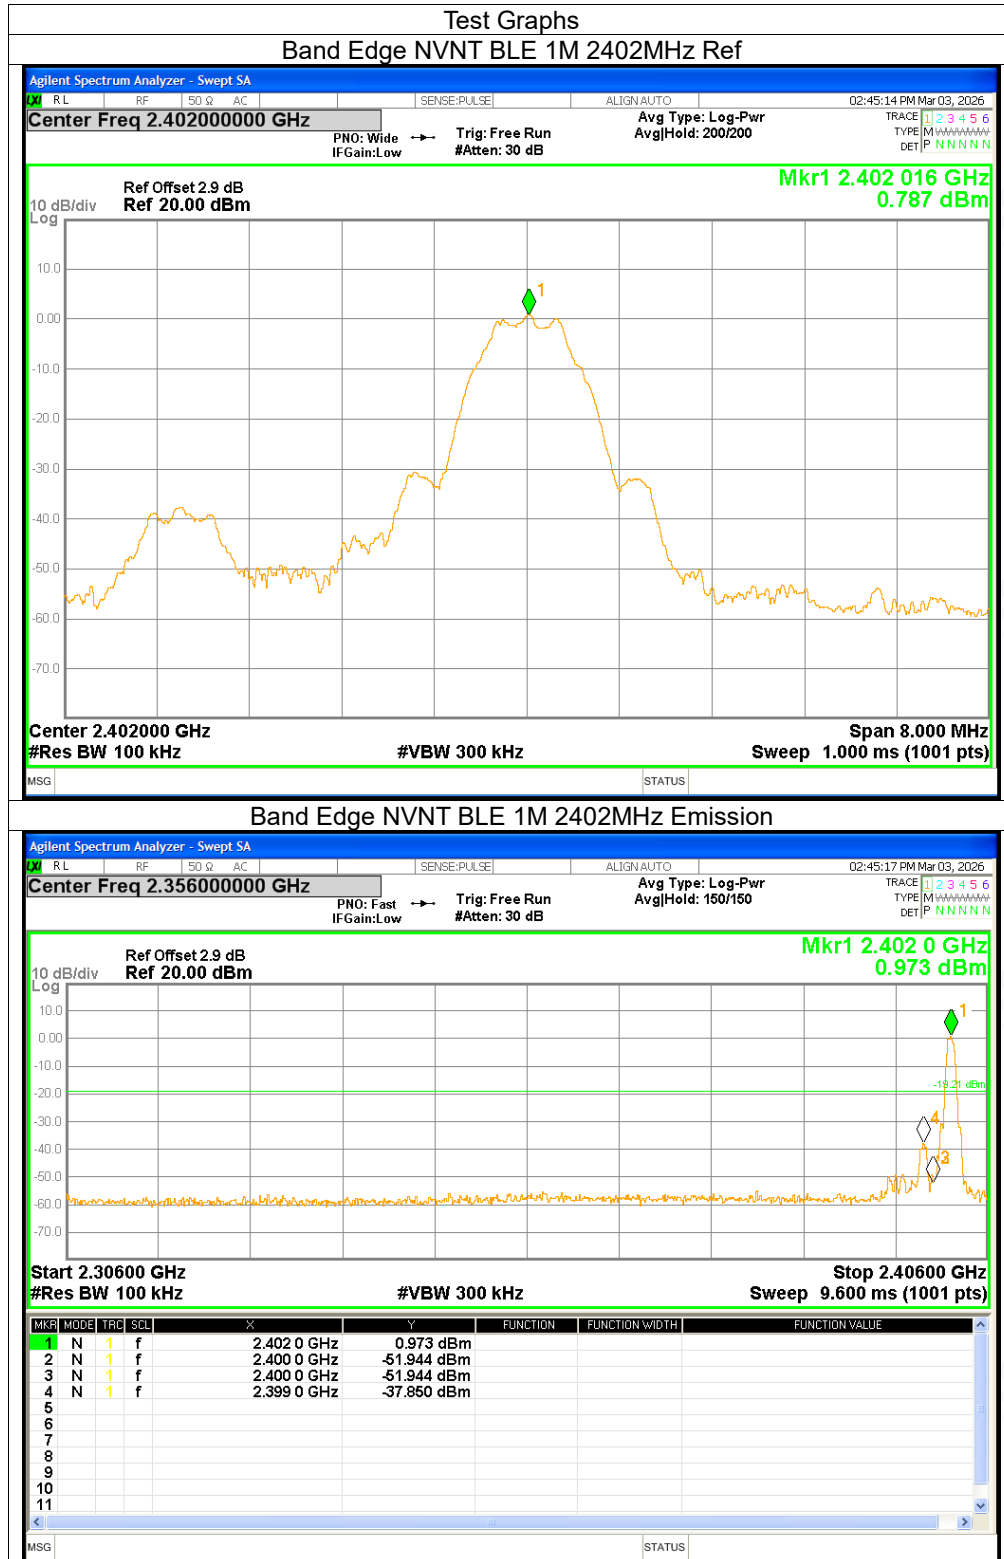

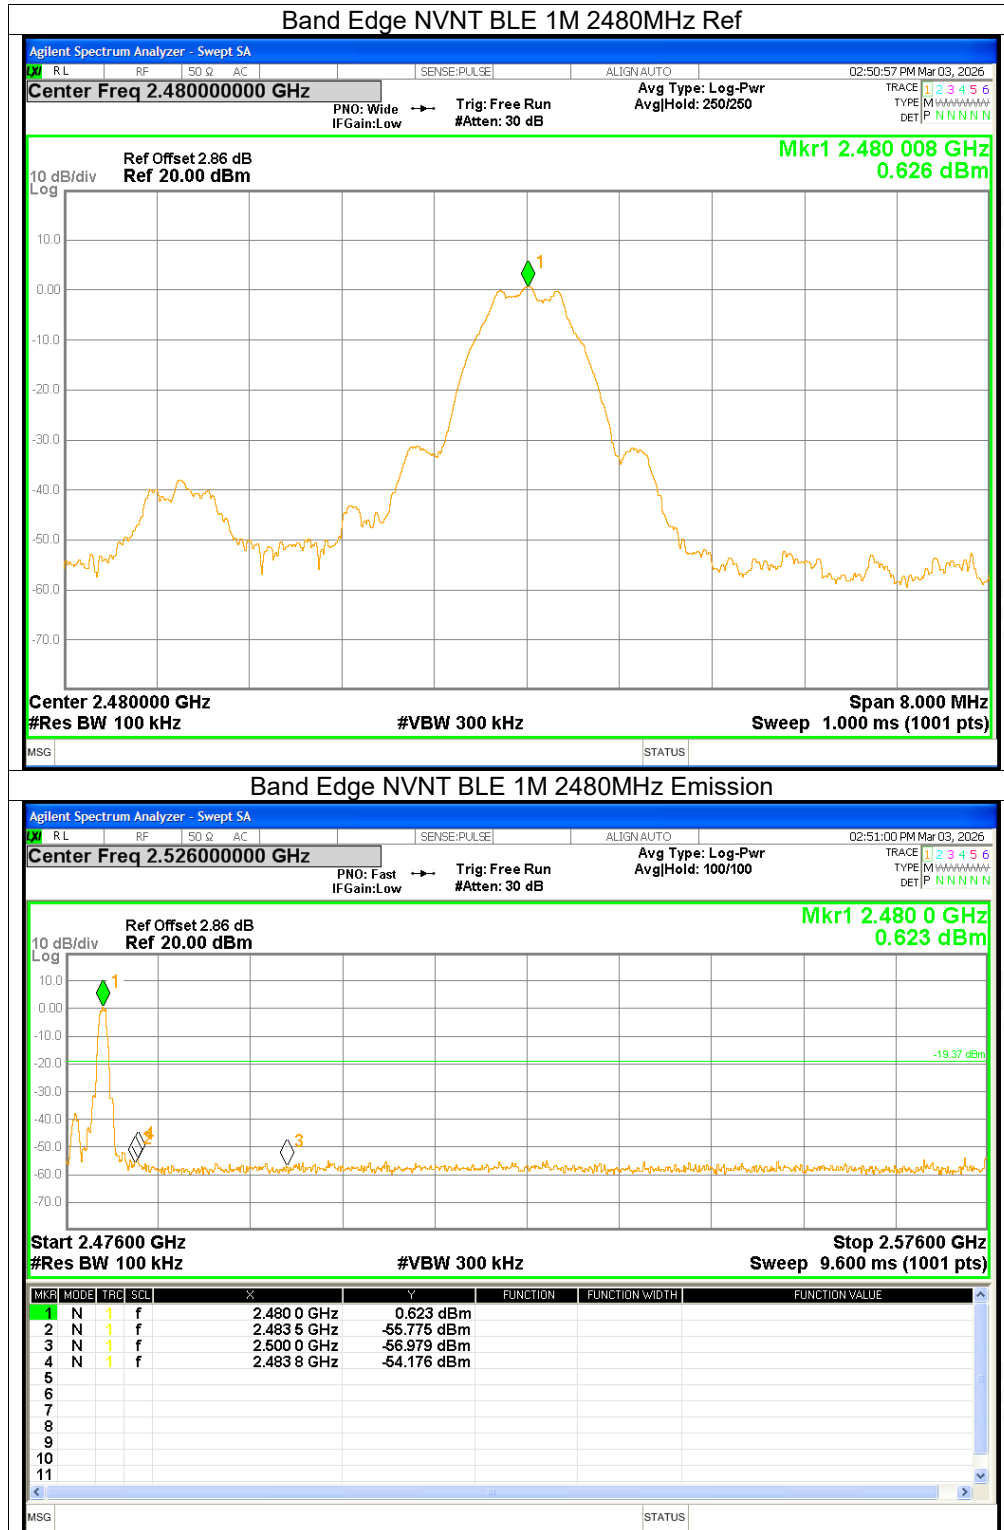

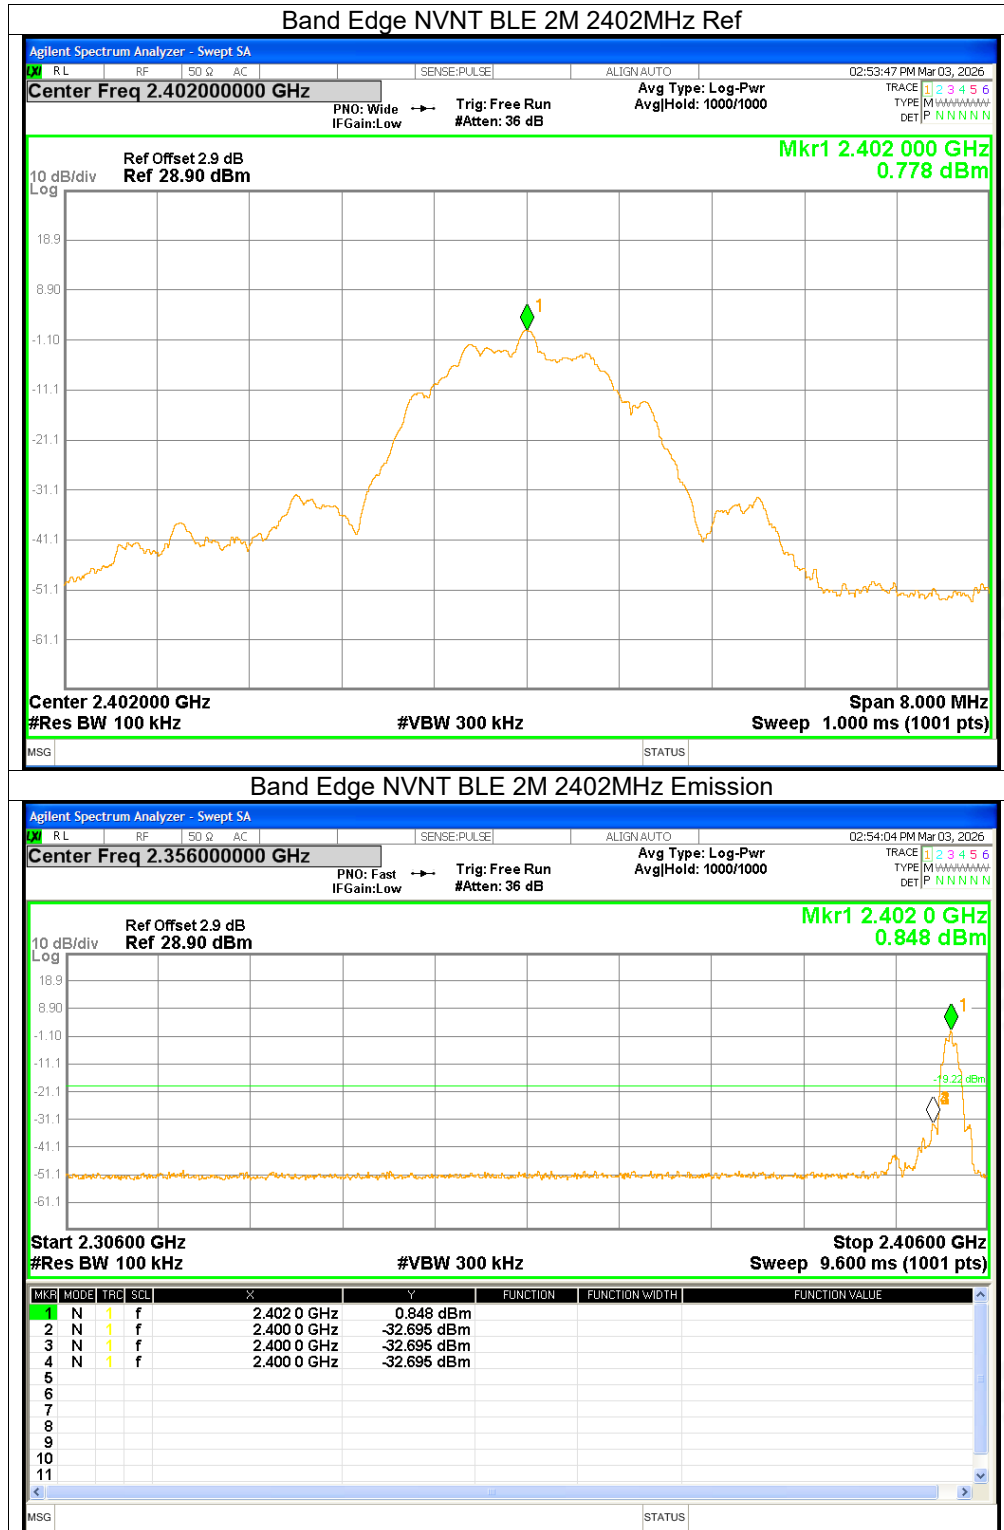


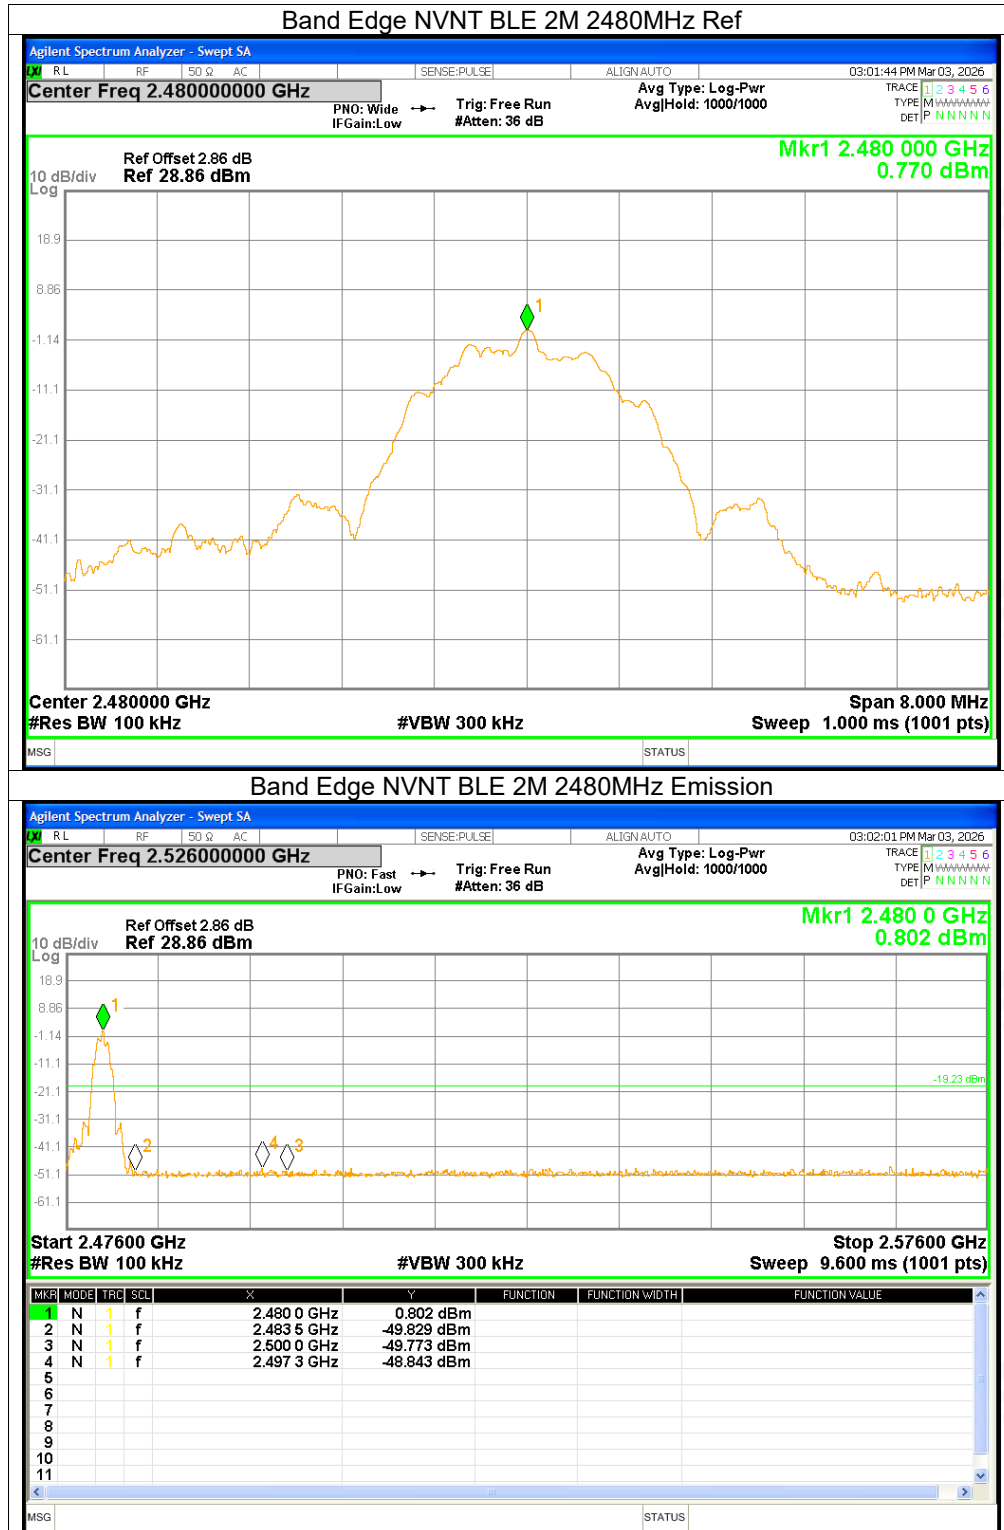






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-35.68	<=-20	Pass
NVNT	BLE 1M	2440	-34.96	<=-20	Pass
NVNT	BLE 1M	2480	-32.71	<=-20	Pass
NVNT	BLE 2M	2402	-36.15	<=-20	Pass
NVNT	BLE 2M	2440	-34.95	<=-20	Pass
NVNT	BLE 2M	2480	-37.87	<=-20	Pass

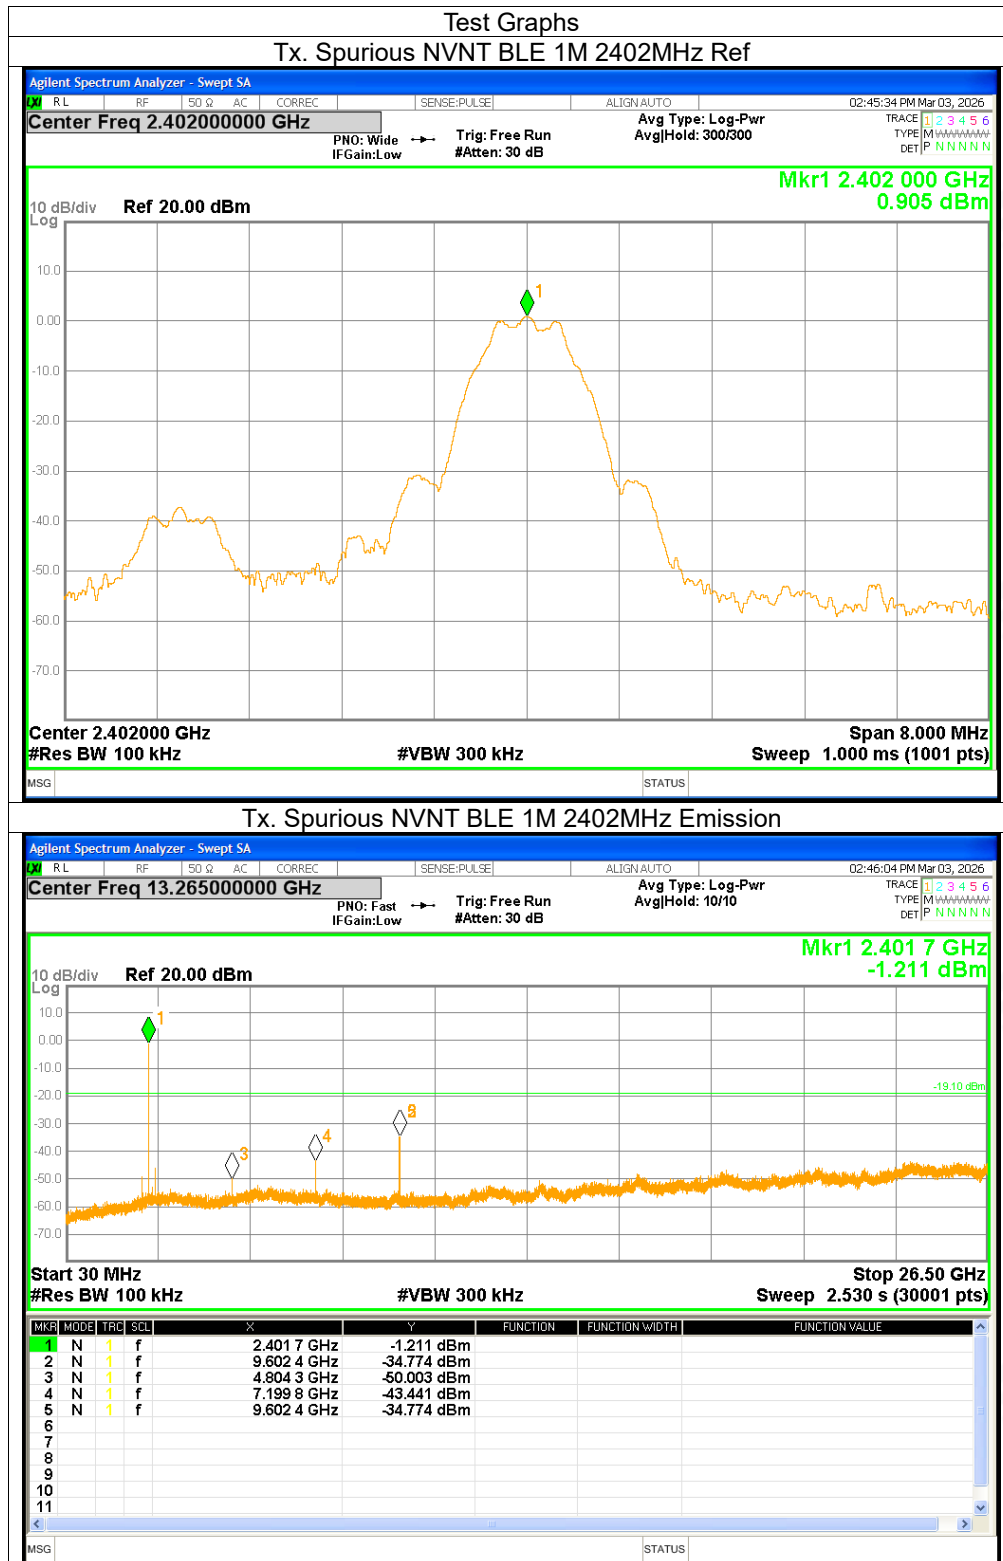


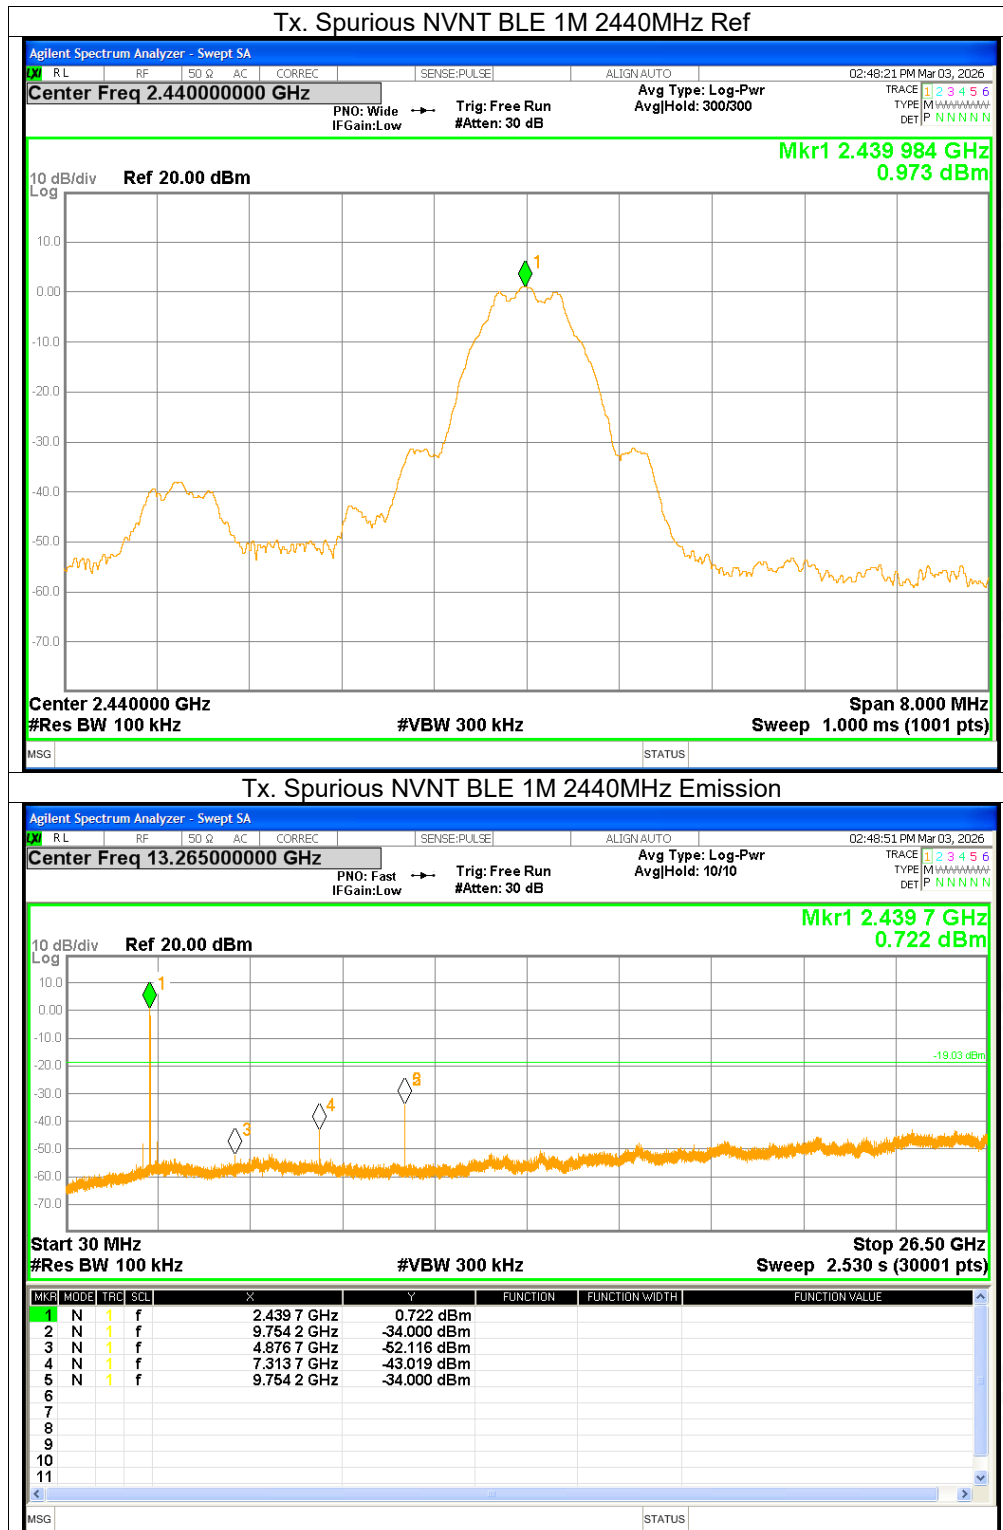

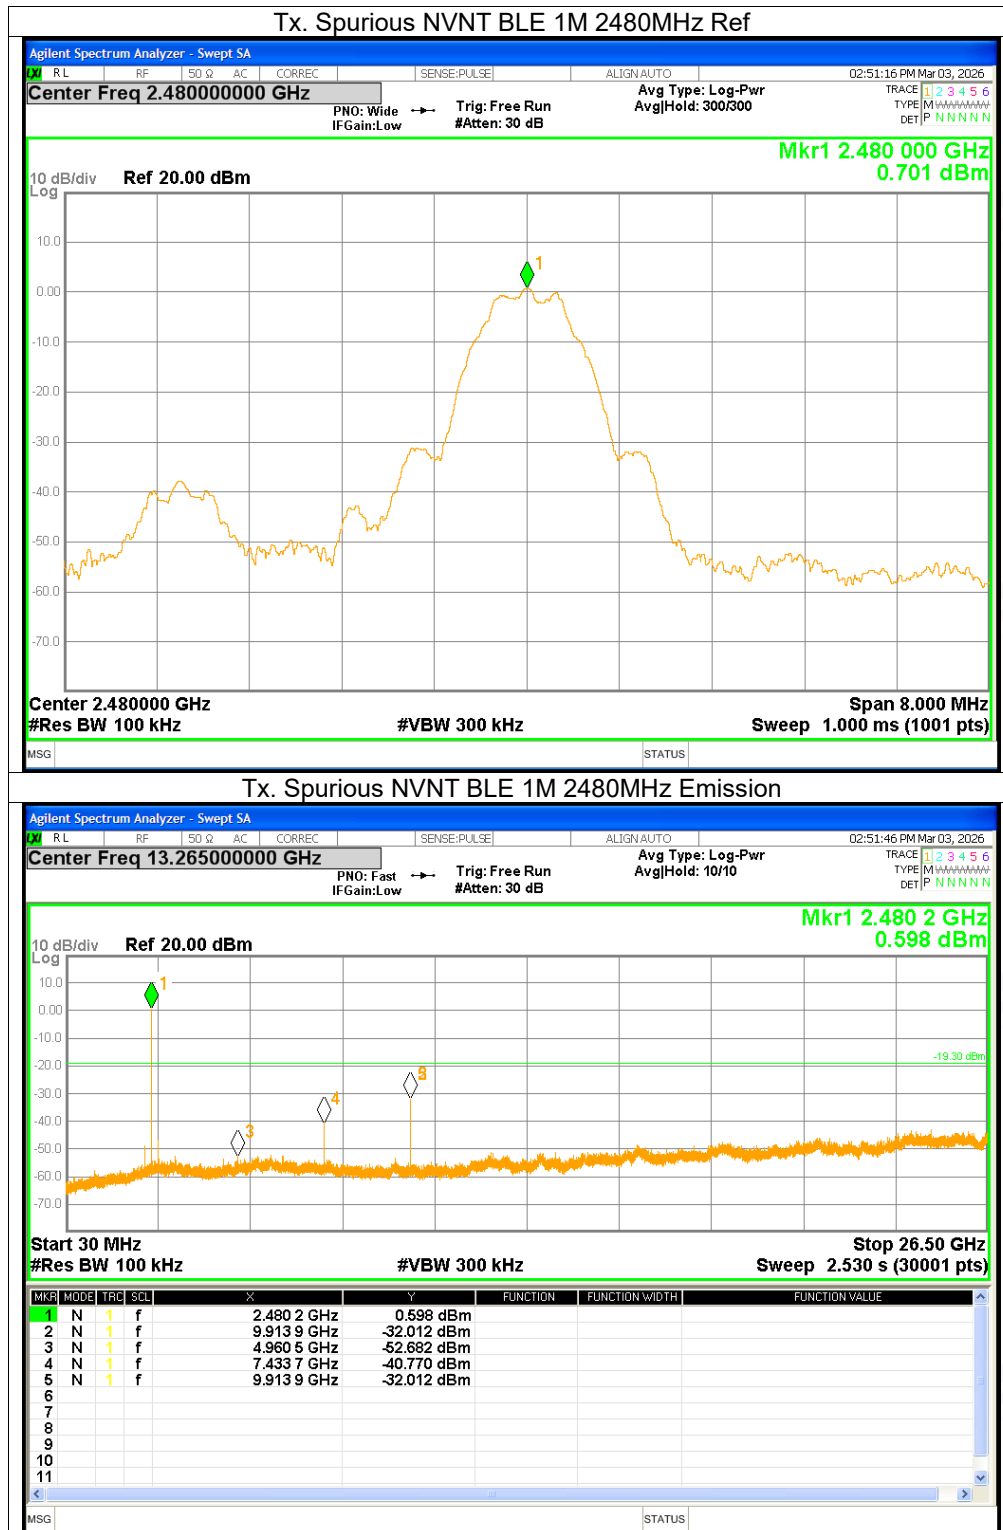

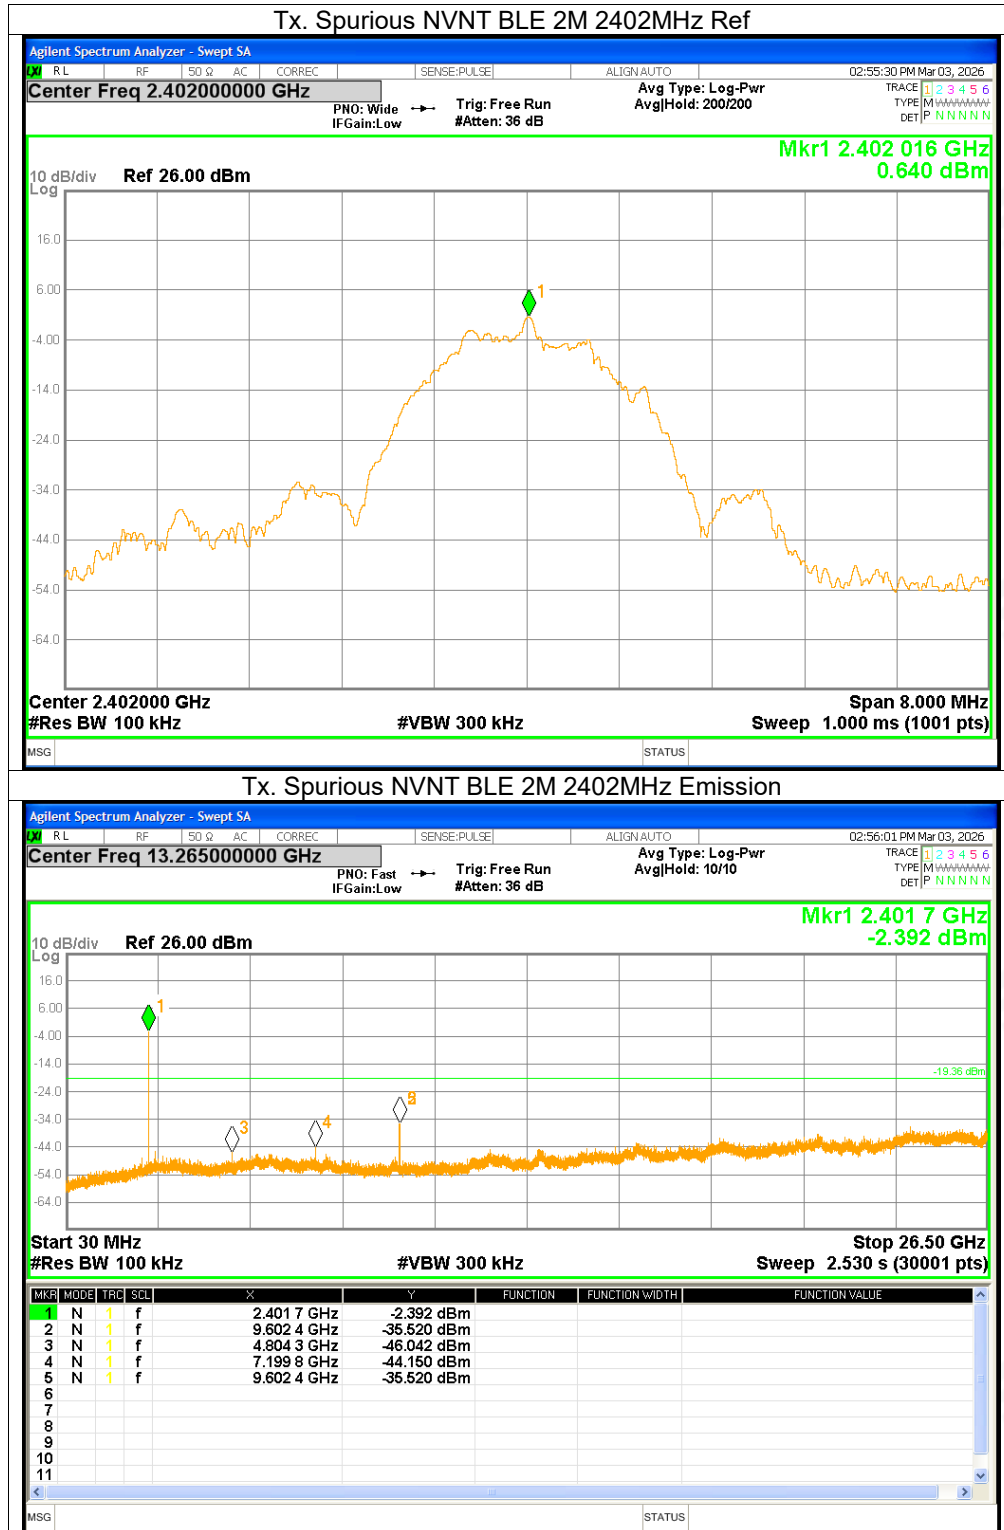

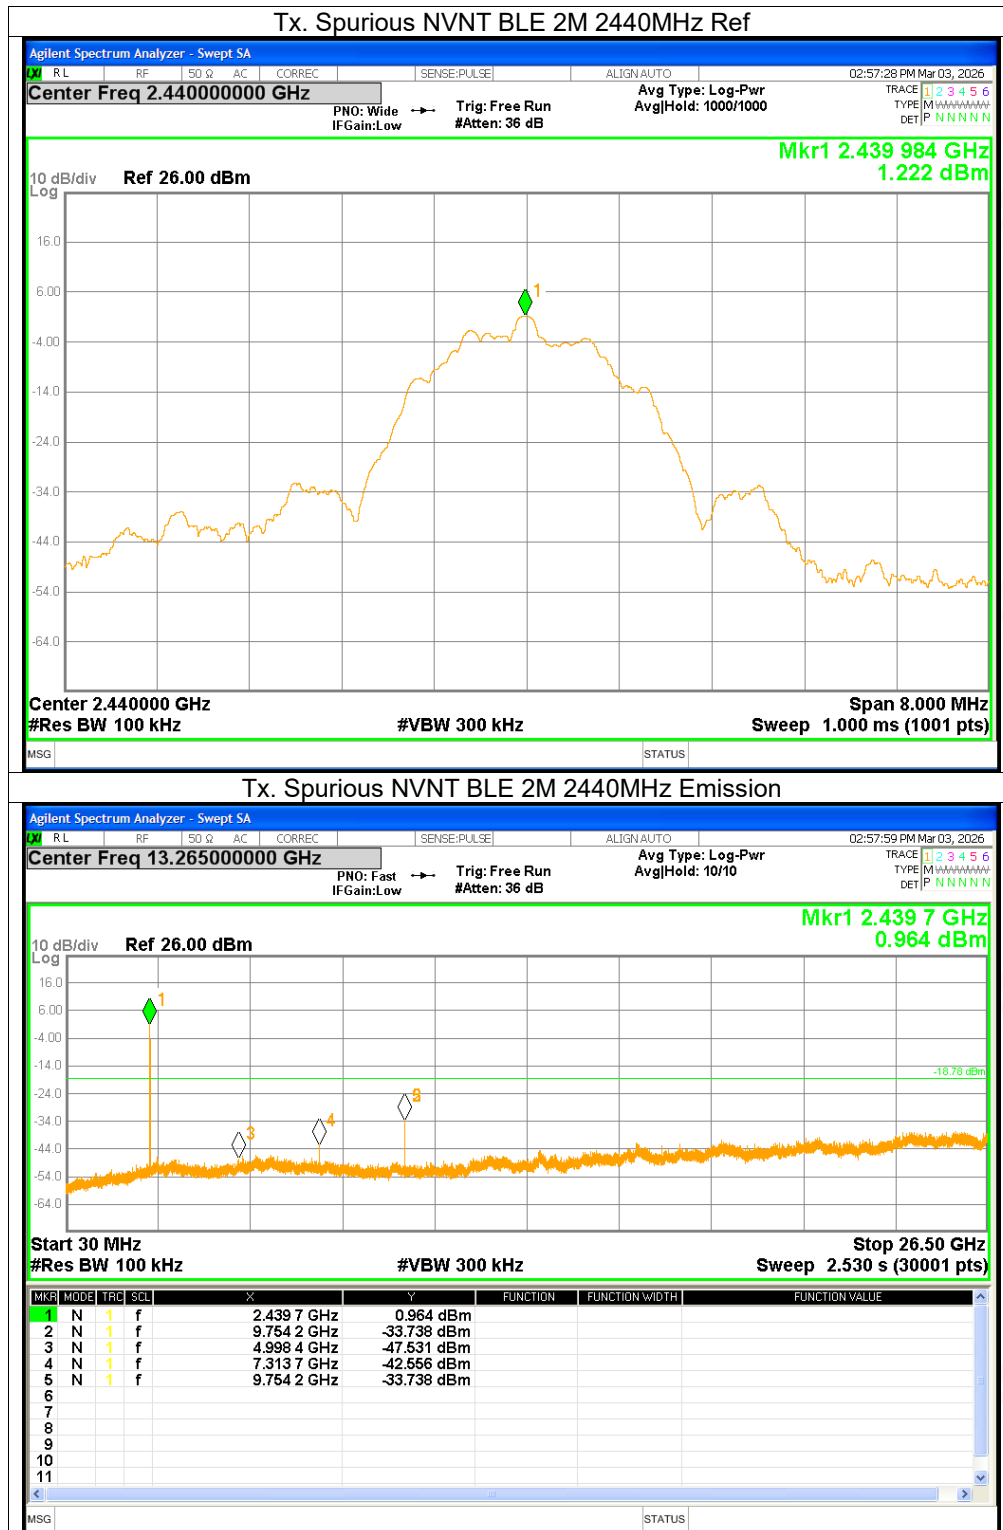

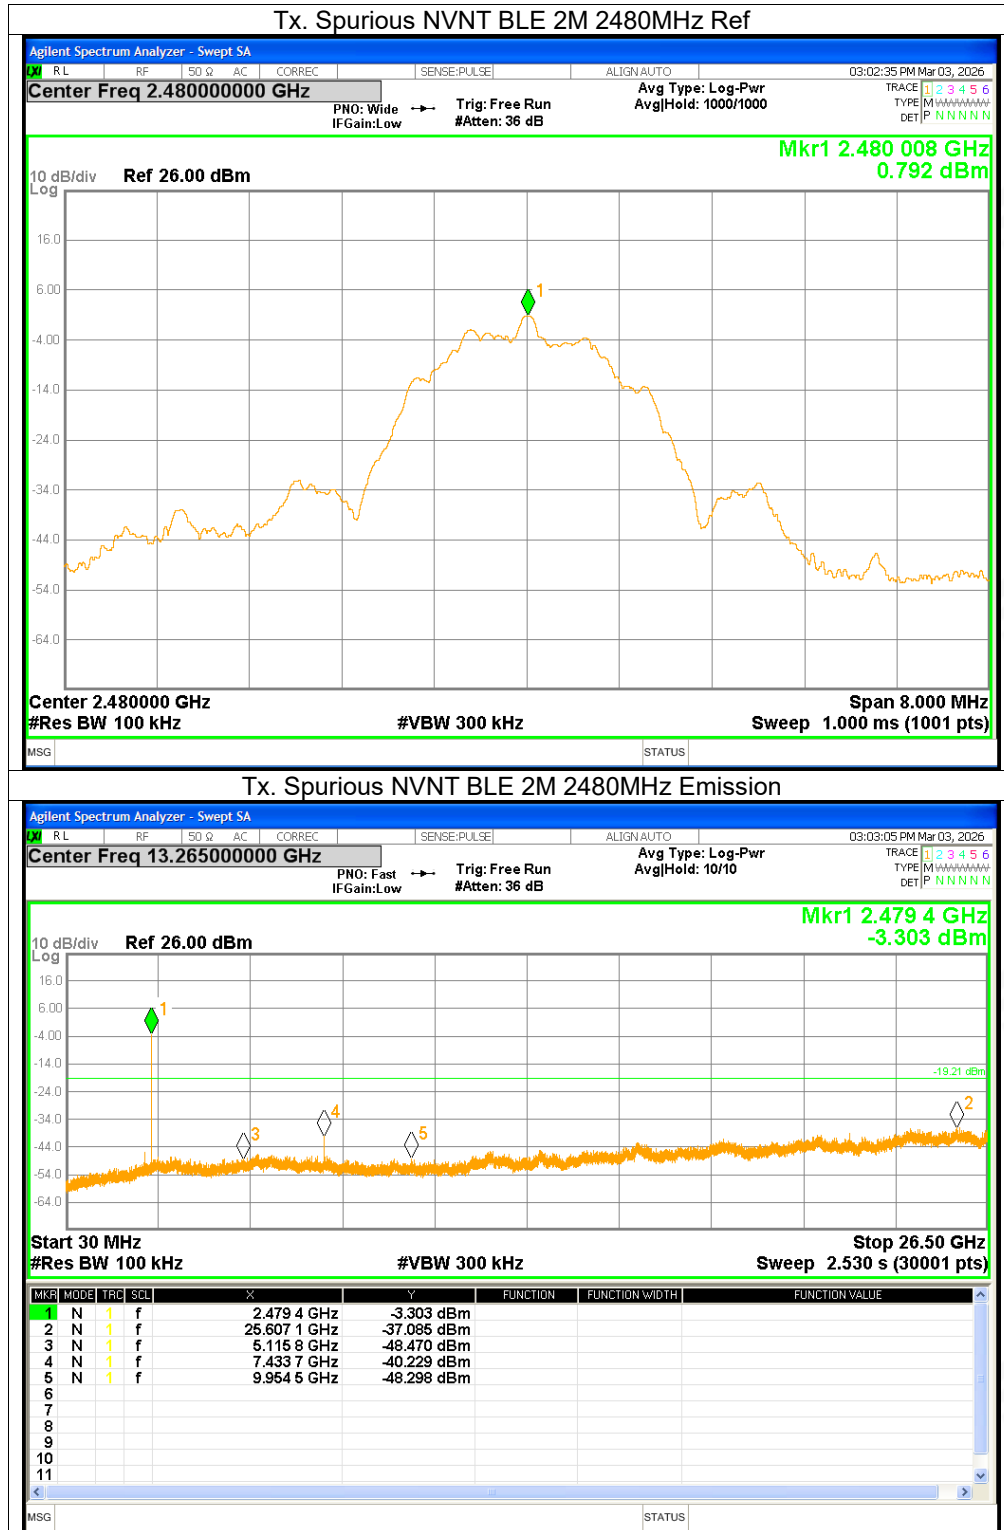



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※