

LTE/WIFI Antenna Parameter Testing Report




Customer:		Report Date	2023.03.28
Project		Report Version	1.0
Product Description	LTE*3+WIF Antenna	Prepared by	Chao xing.Wang
Sample Version	A02	Approved by	

Contents:

-  1. Product Photos
-  2. Specification
-  3. S Parameter Test
 - 3.1 Test Cable Setup
 - 3.2 S.W.R & Return Loss Test Data
-  4. Antenna Gain Test
 - 4.1 Chamber Setup and Angle Definition
 - 4.2 Antenna Radiation Pattern
 - 4.3 Gain and Efficiency Test Data
-  5. Dimension Drawing and Layout


1. Product Photos

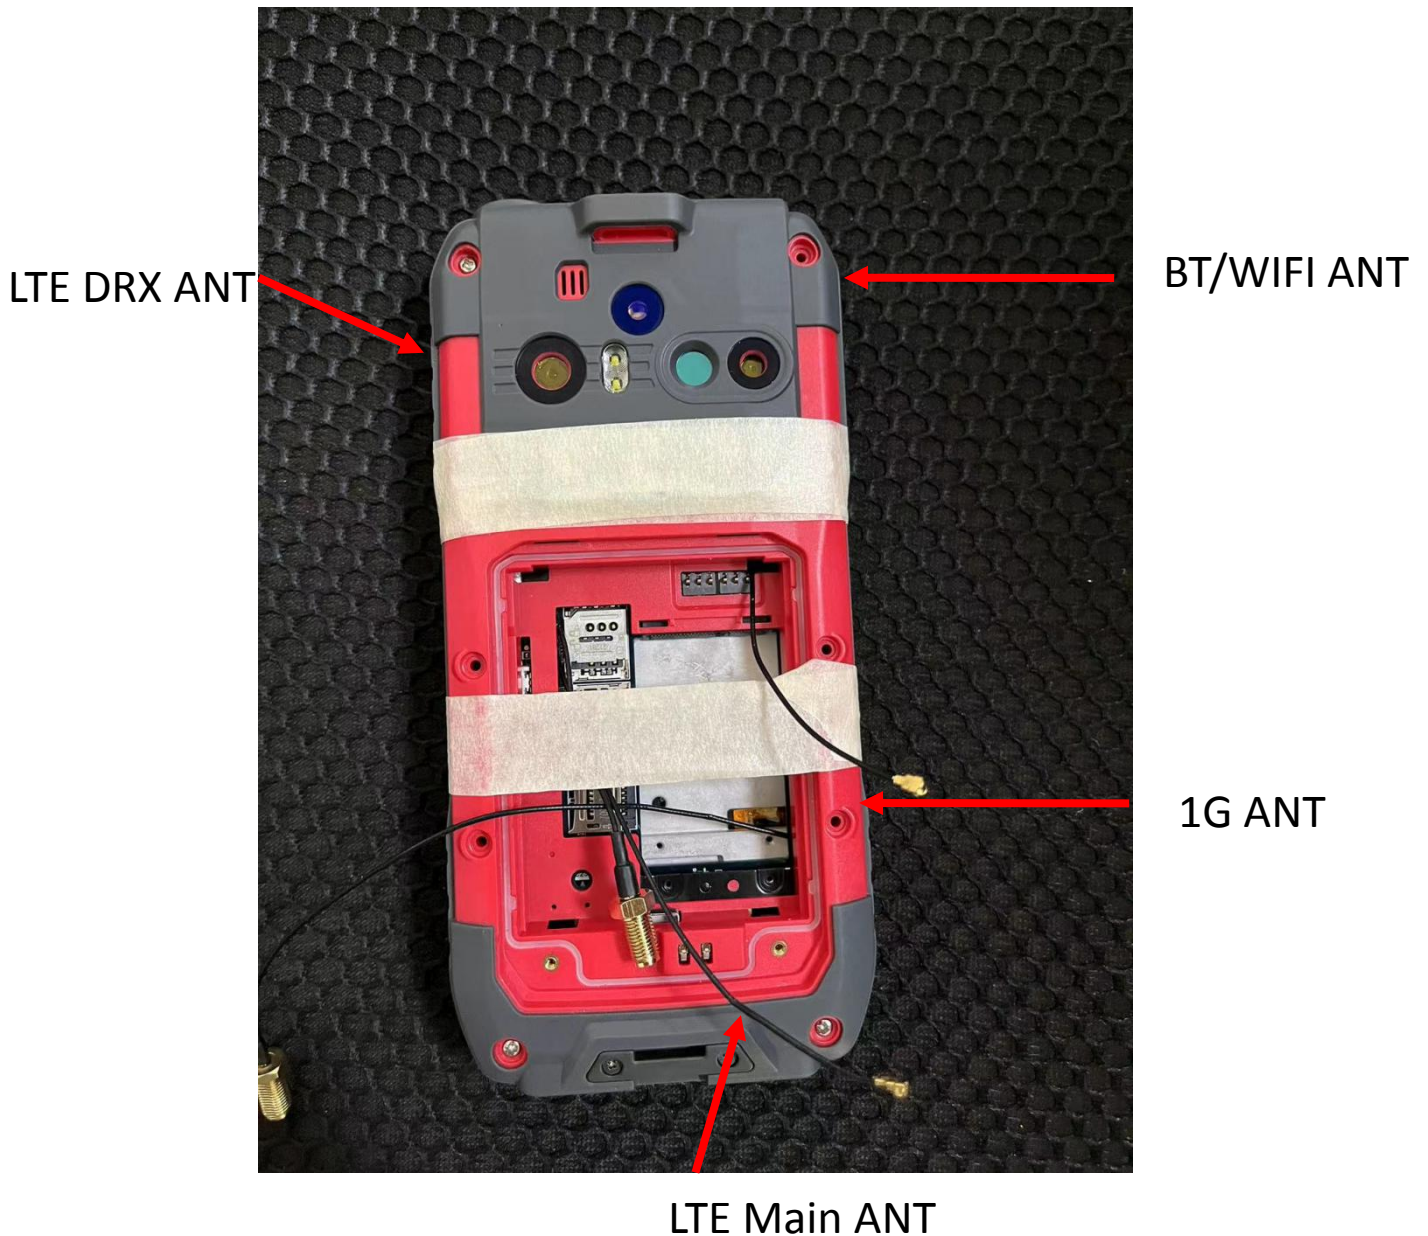

3. S Parameter Test


3.1 Test Cable Setup



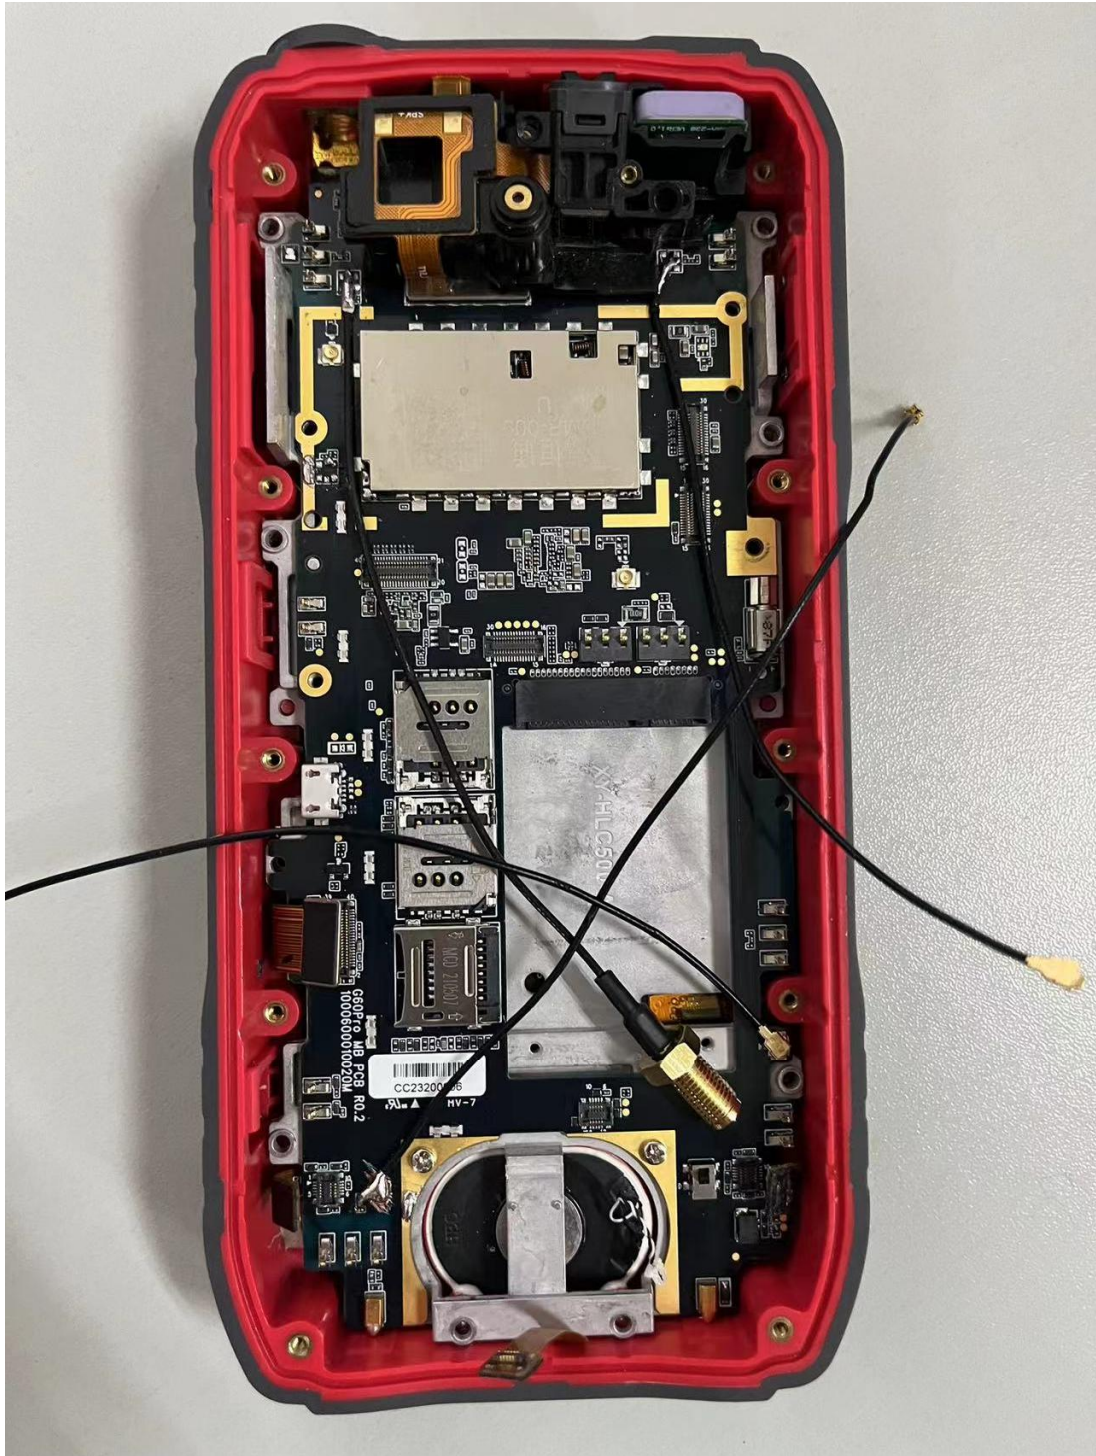


3.2 S.W.R & Return Loss Test Data


WIFI ANT

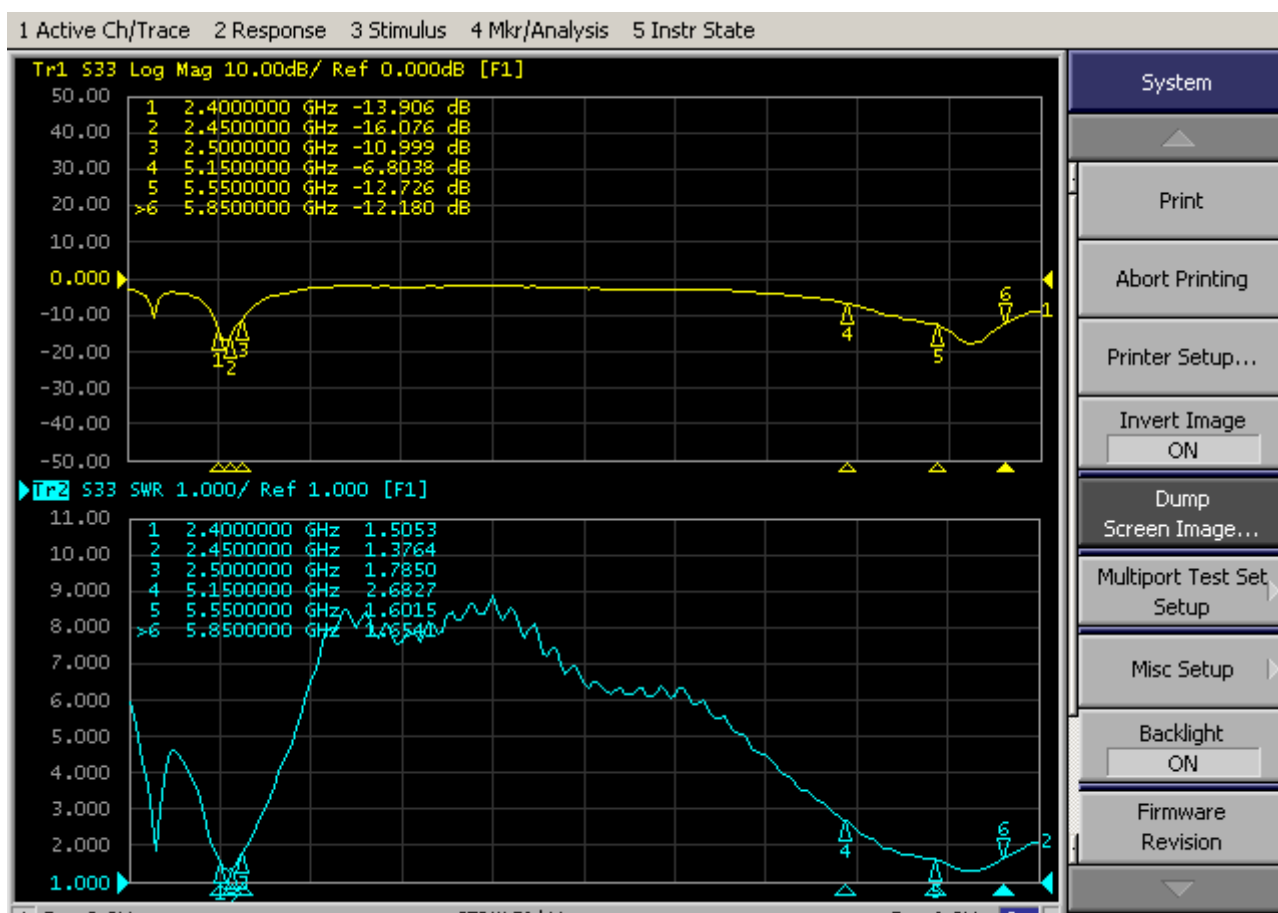


LTE Main ANT

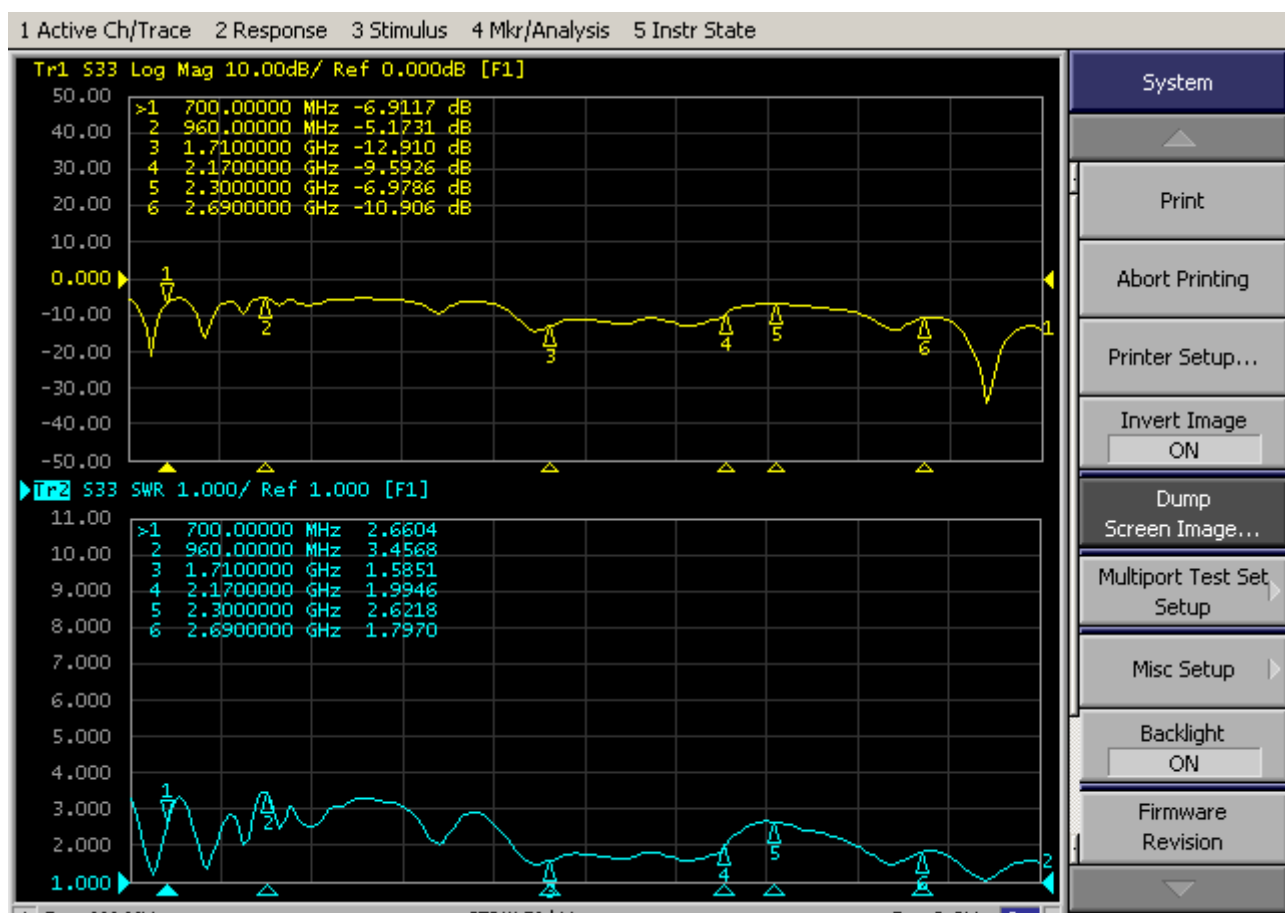

LTE DRX ANT

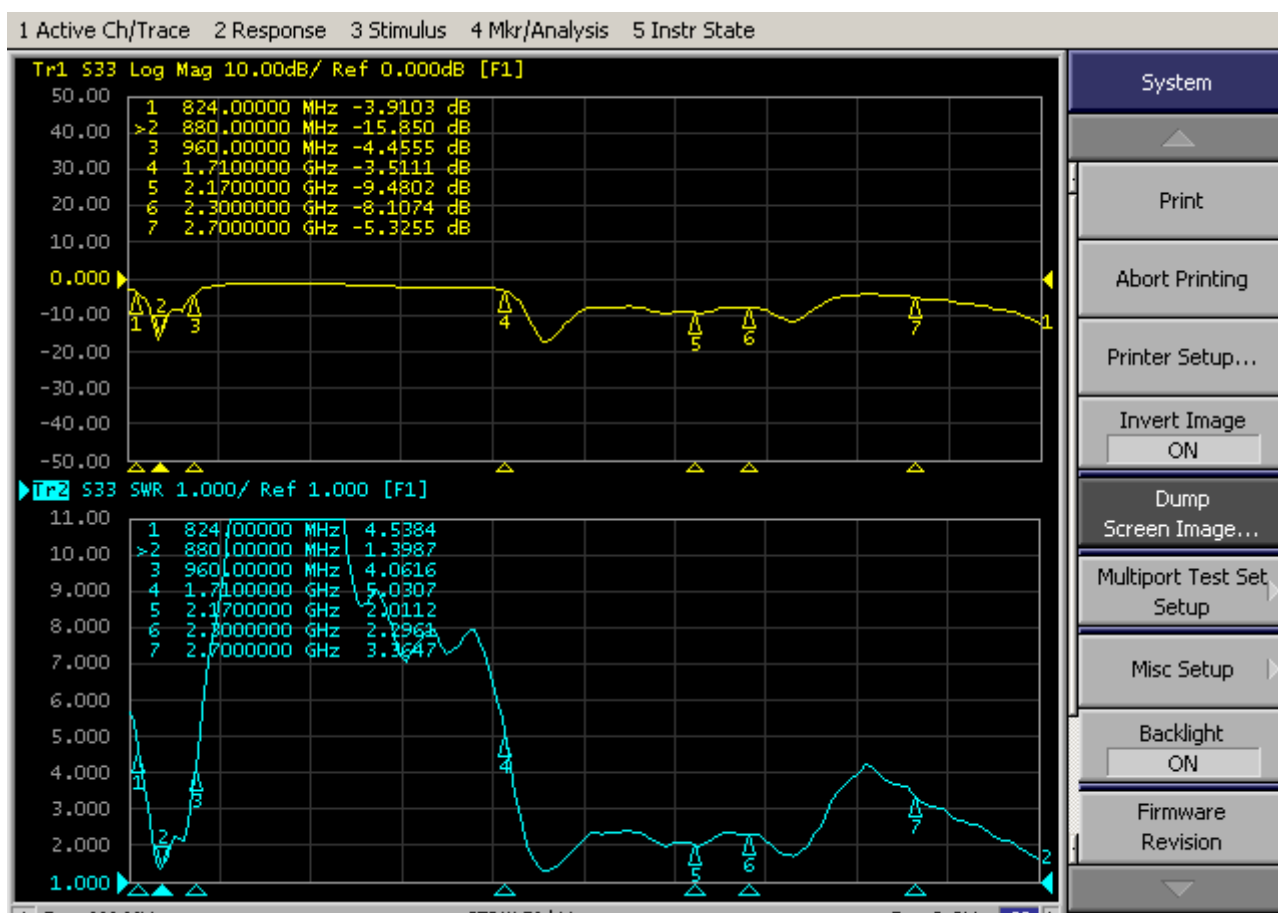


1G ANT

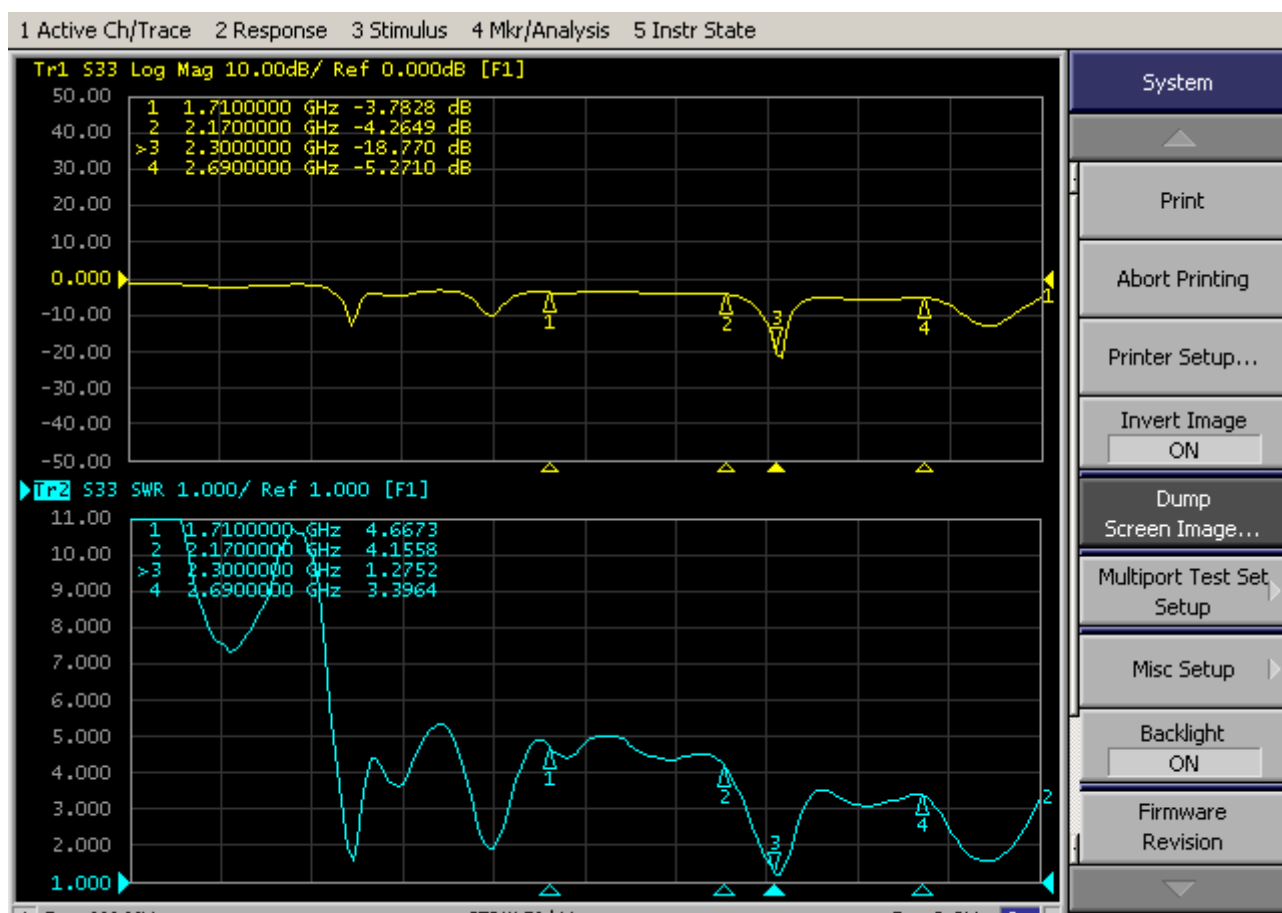

4. Antenna Gain Test

4.1 Chamber Setup and Angle Definition


In free space

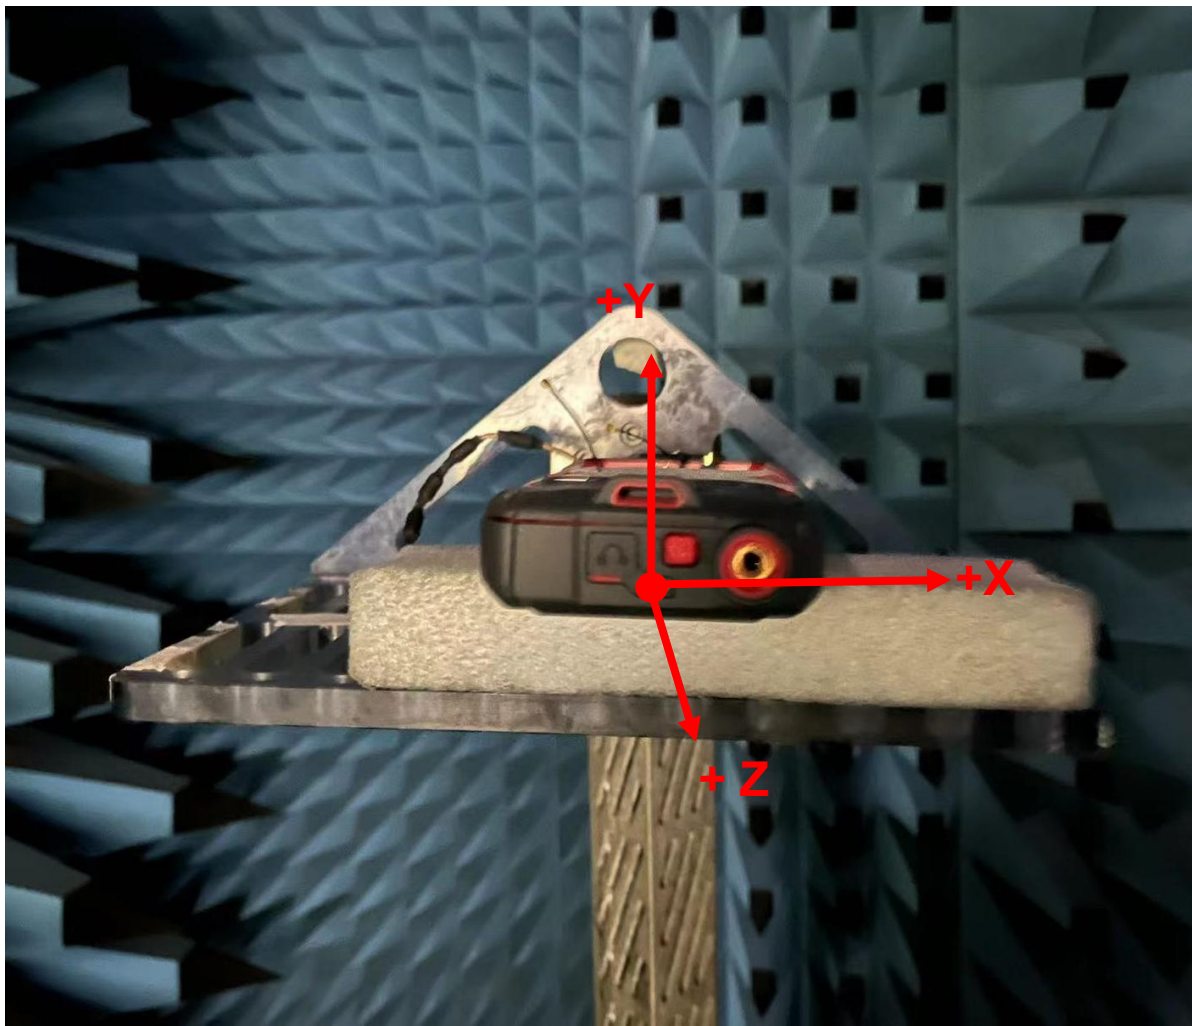


4. Antenna Gain Test

4.2 Antenna Radiation Pattern


BT/WIFI ANT

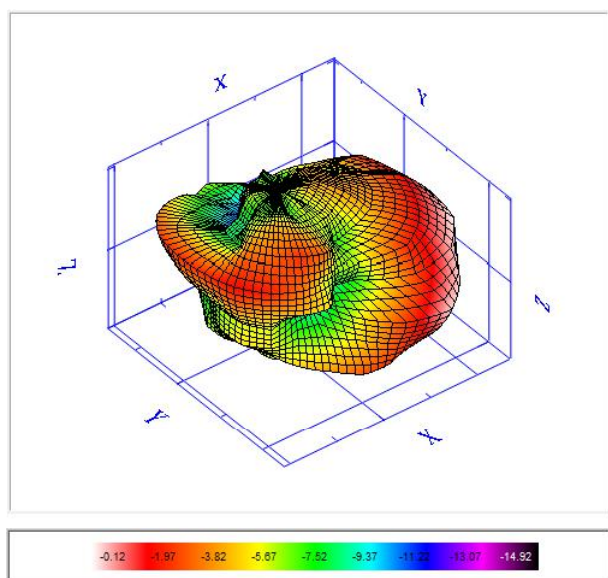

2400MHz

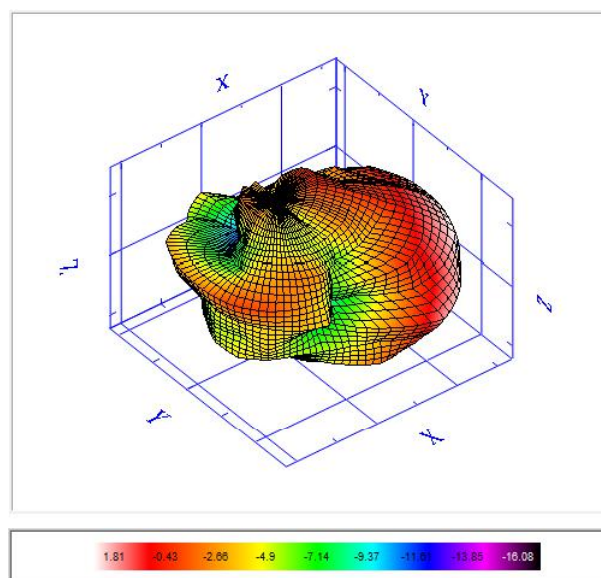


2450MHz

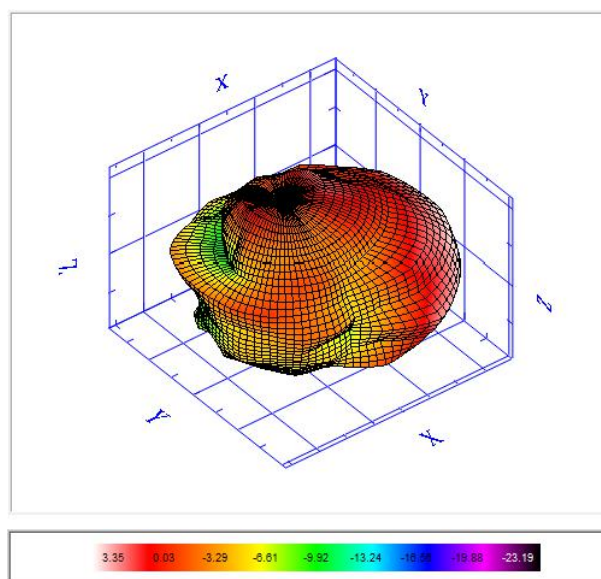


2500MHz


BT/WIFI ANT

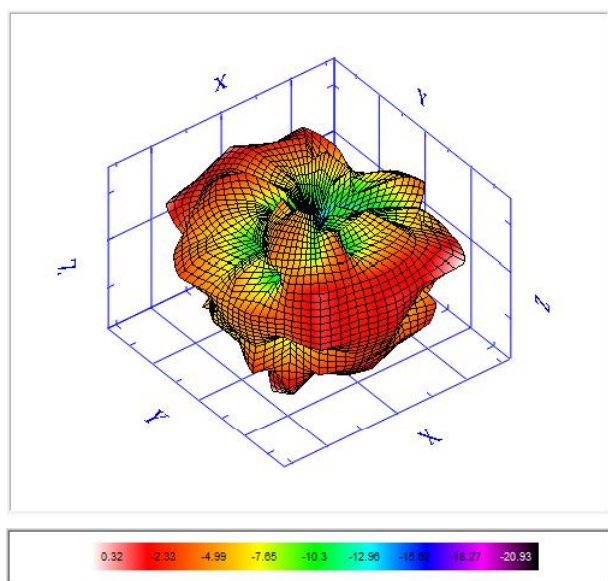

5150MHz

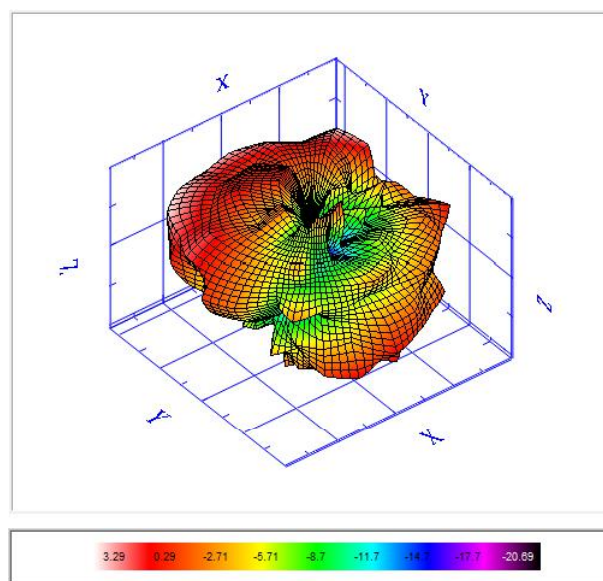


5725MHz

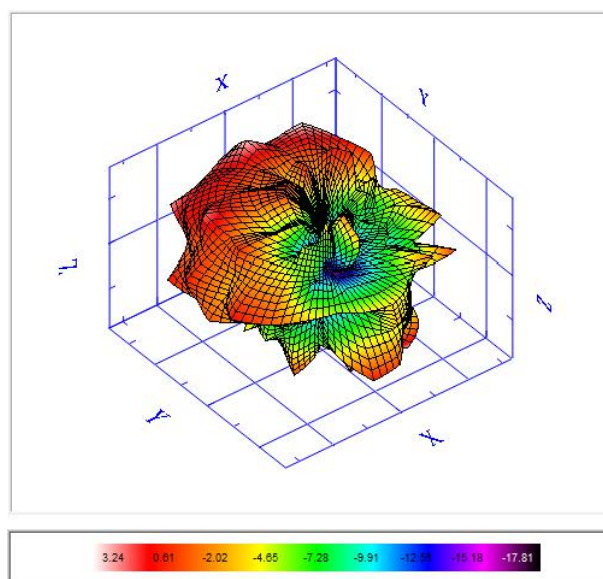


5850MHz


1G ANT

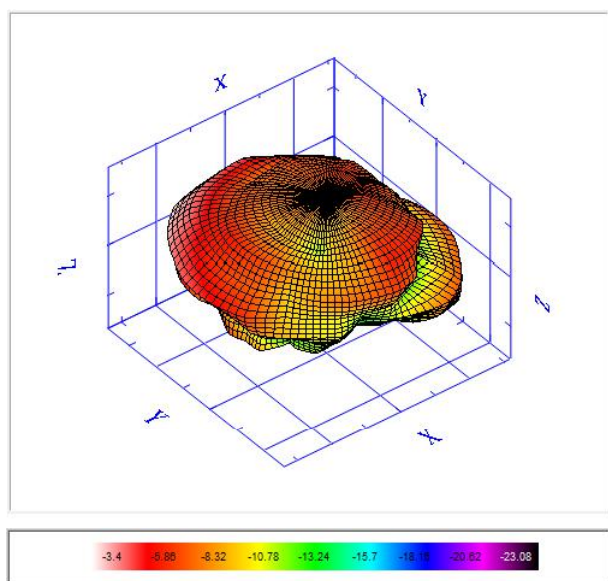

1710MHz

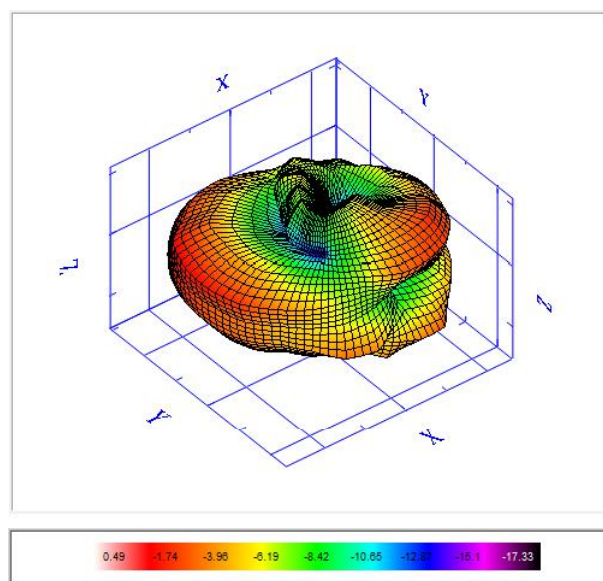


2170MHz

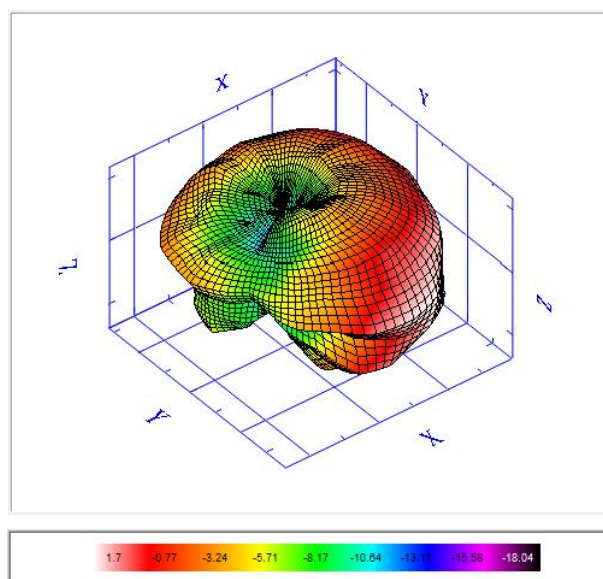


2690MHz


LTE Main ANT

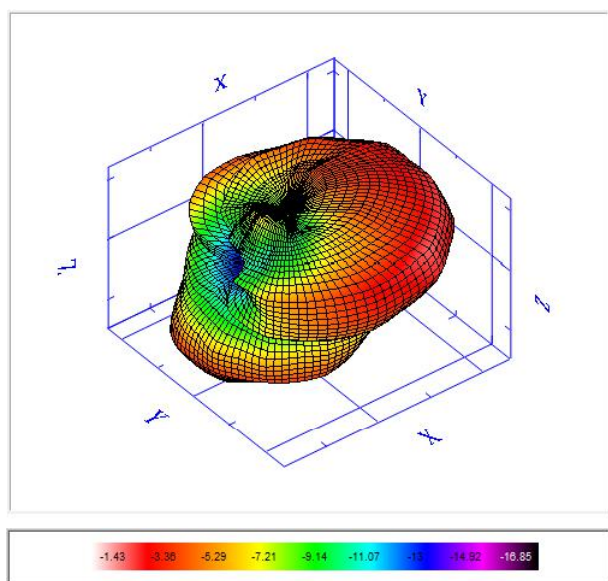

703MHz

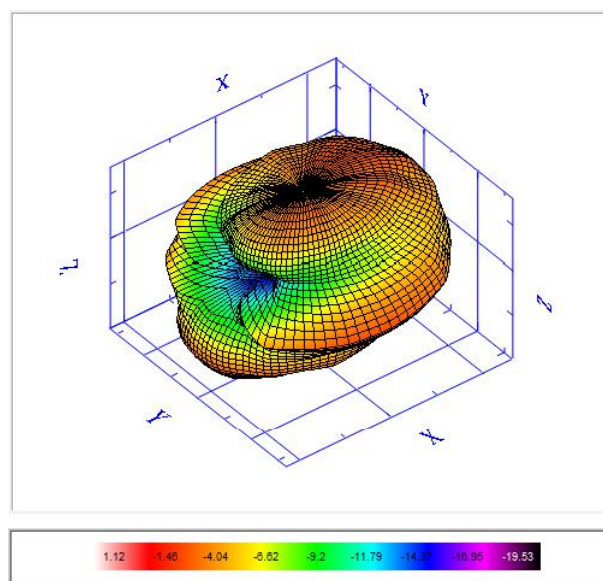


880MHz

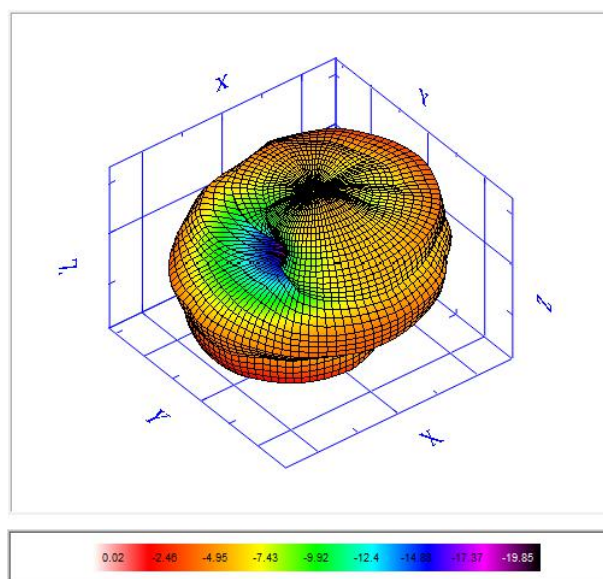


960MHz


LTE Main ANT

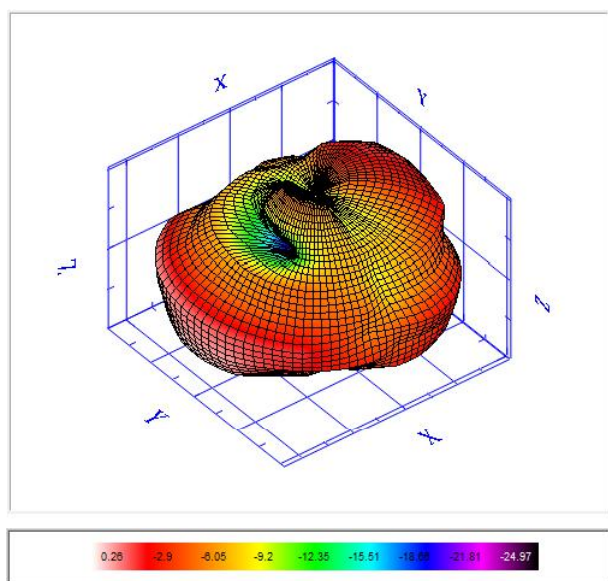

1710MHz

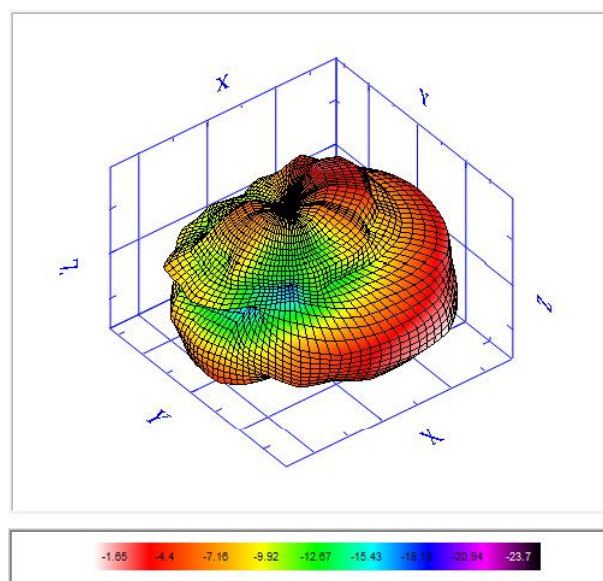


2170MHz

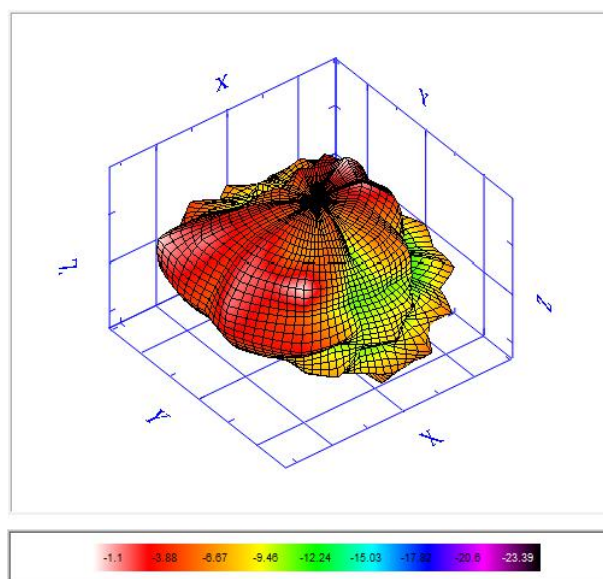


2690MHz


LTE DRX ANT

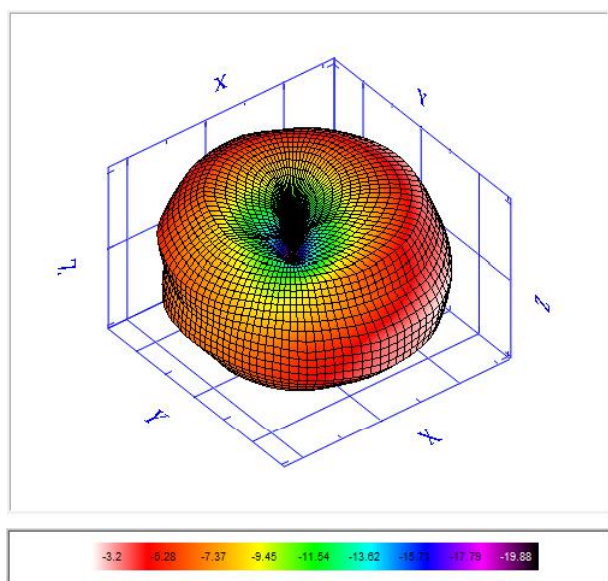

703MHz

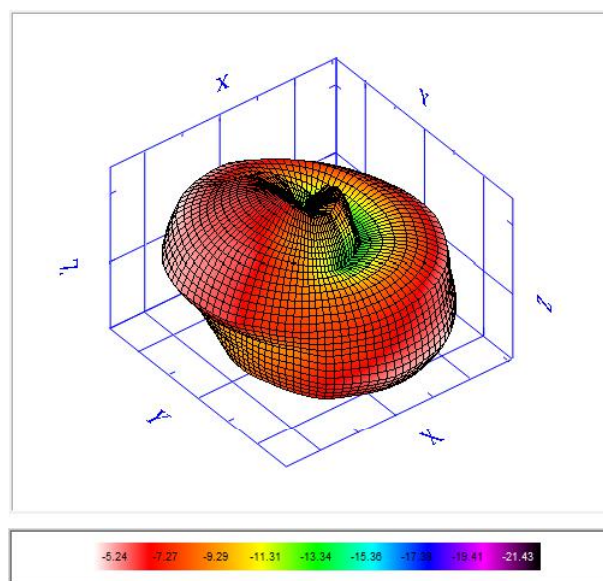


880MHz

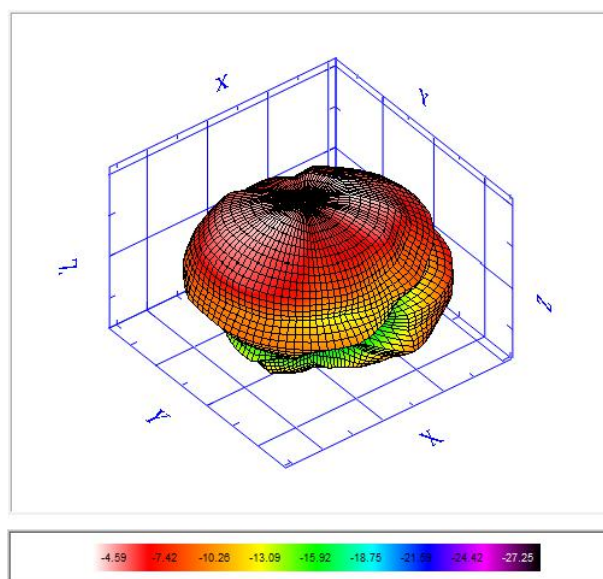


960MHz


LTE DRX ANT

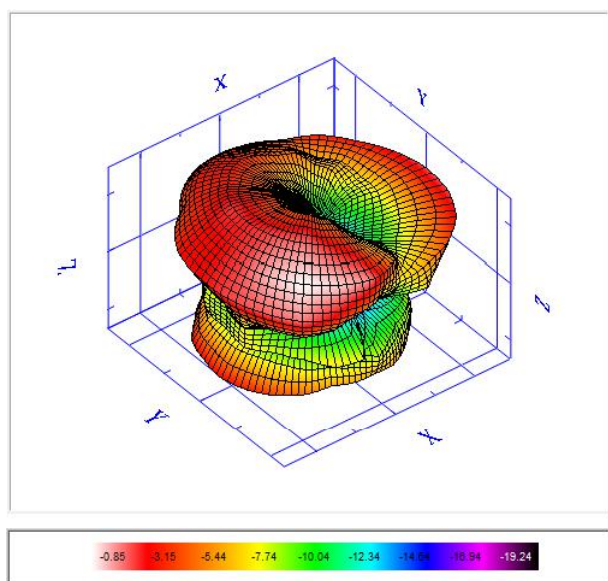

1710MHz

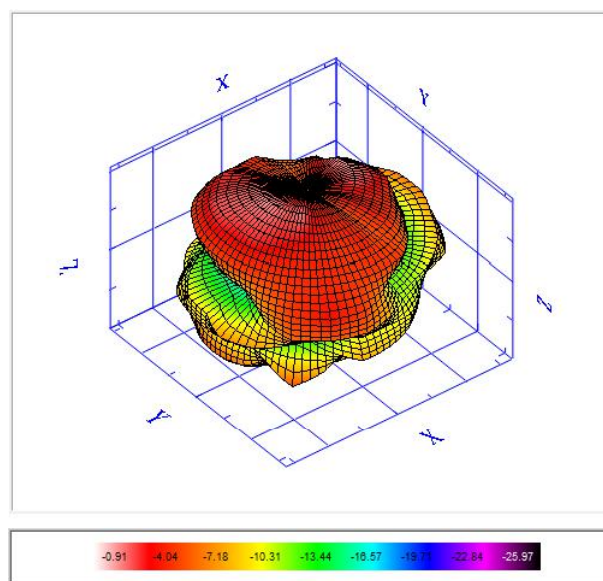

2170MHz

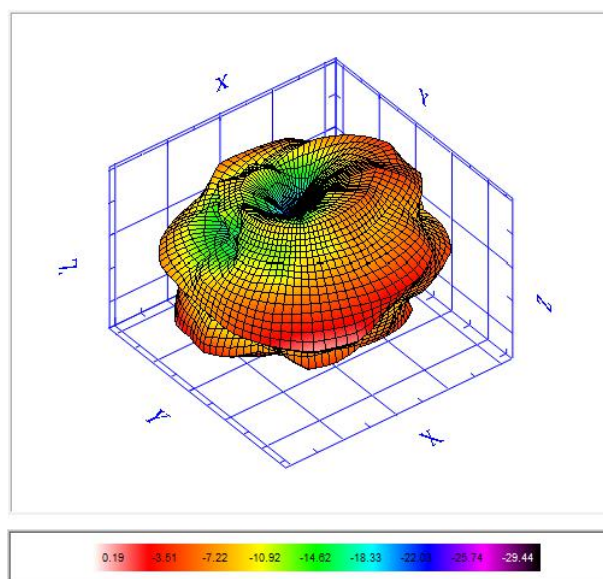

2690MHz

4. Antenna Gain Test

4.3 Gain and Efficiency Test Data

BT/WiFi ANT

Frequency	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
E-Total Peak Gain (dBi)	-0.12	0.48	1.07	1.44	1.43	1.81	2.47	2.51	2.3	2.05	3.35
Efficiency (%)	29.03	32.82	35	38.57	37.12	38.7	38.78	37.72	35.07	34.26	41.13
Average Gain (dB)	-5.37	-4.84	-4.56	-4.14	-4.3	-4.12	-4.11	-4.23	-4.55	-4.65	-3.86

Frequency	5150	5250	5350	5470	5600	5700	5725	5785	5800	5850
E-Total Peak Gain (dBi)	0.32	1.6	0.81	2.5	1.7	3.44	3.29	2.51	2.94	3.24
Efficiency (%)	30.69	34.32	32.59	35.66	34.03	51.62	50.5	45.07	44.81	47.01
Average Gain (dB)	-5.13	-4.64	-4.87	-4.48	-4.68	-2.87	-2.97	-3.46	-3.49	-3.28

1G ANT

Frequency	1710	1880	1920	1990	2000	2100	2170	2200	2300	2400	2500
E-Total Peak Gain (dBi)	-3.4	-2.71	-2.04	-1.34	-1.53	0.14	0.49	-0.02	-1.37	-1.25	-2.08
Efficiency (%)	14.94	17.5	20.43	23.98	22.94	33.86	32.57	31.1	33.71	29.59	24.77
Average Gain (dB)	-8.26	-7.57	-6.9	-6.2	-6.39	-4.7	-4.87	-5.07	-4.72	-5.29	-6.06

Frequency	2600	2690	2700
E-Total Peak Gain (dBi)	-1.96	1.7	1.95
Efficiency (%)	22.21	49.75	48.04
Average Gain (dB)	-6.53	-3.03	-3.18

LTE Main ANT

Frequency	699	724	782	824	839	854	869	884	899	914	929	944	960
E-Total Peak Gain (dBi)	-1.43	-3.33	-2.11	0.96	1.57	1.79	2.48	1.12	0.93	-1.23	-2.31	0.37	0.02
Efficiency (%)	25.85	22.4	21.2	36.37	37.73	36.93	39.4	29.75	29.72	20.58	21.39	31.39	26.71
Average Gain (dB)	-5.88	-6.5	-6.74	-4.39	-4.23	-4.33	-4.05	-5.26	-5.27	-6.87	-6.7	-5.03	-5.73

Frequency	1710	1880	1920	1990	2000	2100	2170	2200	2300	2400
E-Total Peak Gain (dBi)	0.26	-1.55	-3.13	-2.92	-2.53	-2.18	-0.65	0.51	-1.54	-0.89
Efficiency (%)	31.75	21.3	16.42	16.62	17.38	17.75	22.28	22.85	12.99	12.66
Average Gain (dB)	-4.98	-6.72	-7.85	-7.79	-7.6	-7.51	-6.52	-6.41	-8.87	-8.98

Frequency	2500	2600	2690	2700
E-Total Peak Gain (dBi)	1.32	0.88	-0.14	-0.1
Efficiency (%)	13.75	15.04	16.3	15.71
Average Gain (dB)	-8.62	-8.23	-7.88	-8.04

LTE DRX ANT

Frequency	699	724	782	824	839	854	869	884	899	914	929	944	960
E-Total Peak Gain (dBi)	-3.2	-2.3	-2.31	-2.14	-2.34	-2.94	-4.4	-5.24	-6.35	-3.97	-4.16	-4.11	-4.59
Efficiency (%)	21.61	26.85	28.24	29.13	26.4	22.65	17.08	15.37	10.52	13.29	10.81	10.08	10.46
Average Gain (dB)	-6.65	-5.71	-5.49	-5.36	-5.78	-6.45	-7.67	-8.13	-9.78	-8.76	-9.66	-9.96	-9.8

Frequency	1710	1880	1920	1990	2000	2100	2170	2200	2300	2400
E-Total Peak Gain (dBi)	-0.85	-0.39	-0.12	0.8	0.7	1.3	-0.91	-1.48	-0.88	0.52
Efficiency (%)	21.75	27.66	29.29	23.78	23.07	18.73	10.55	11.57	14.71	19.85
Average Gain (dB)	-6.63	-5.58	-5.33	-6.24	-6.37	-7.27	-9.77	-9.37	-8.32	-7.02

Frequency	2500	2600	2690	2700
E-Total Peak Gain (dBi)	-0.1	-1.54	0.26	0.19
Efficiency (%)	20.78	17.67	21.87	19.85
Average Gain (dB)	-6.82	-7.53	-6.6	-7.02