



Test Data



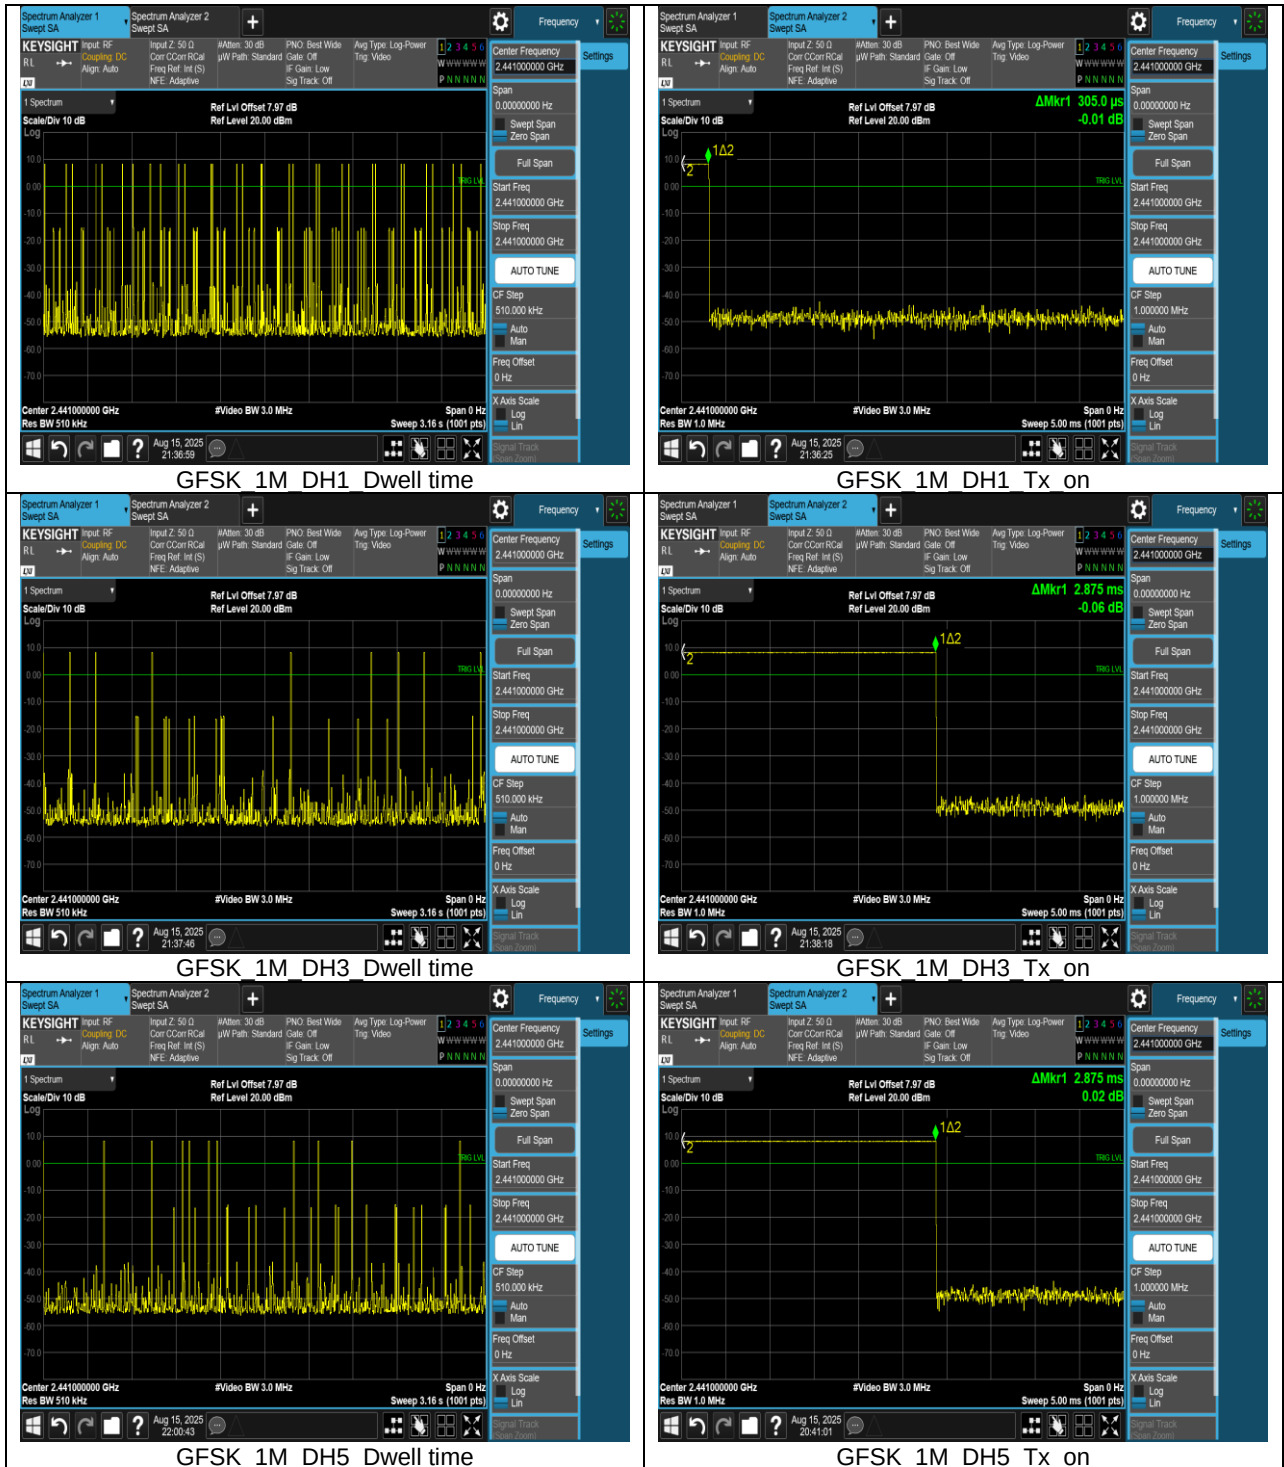

4DQPSK 2M DH1 Dwell time

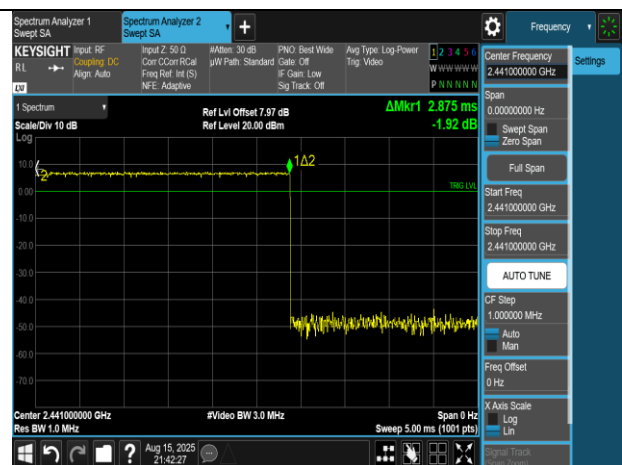

4DQPSK 2M DH1 Tx on



4DQPSK 2M DH3 Dwell time



4DQPSK 2M DH3 Tx on



4DQPSK 2M DH5 Dwell time




4DQPSK 2M DH5 Tx on




8DPSK 3M DH1 Dwell time




8DPSK 3M DH1 Tx on

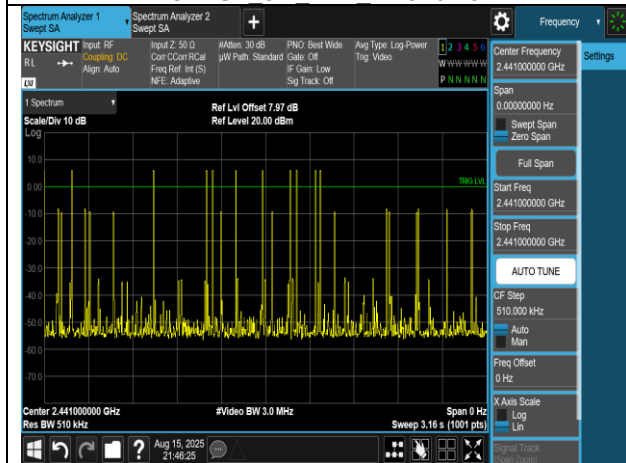


8DPSK 3M DH3 Dwell time

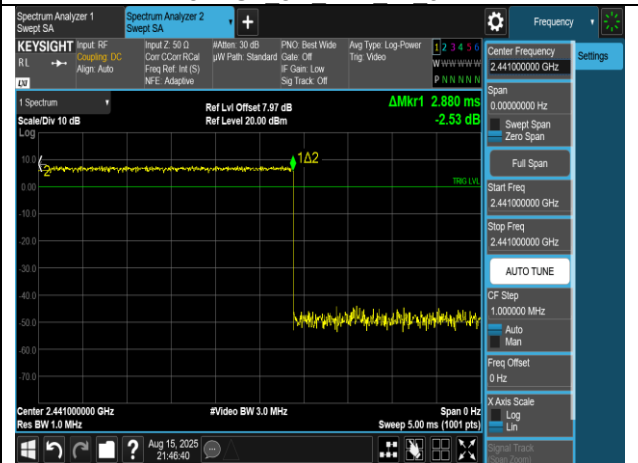

8DPSK 3M DH3 Tx on

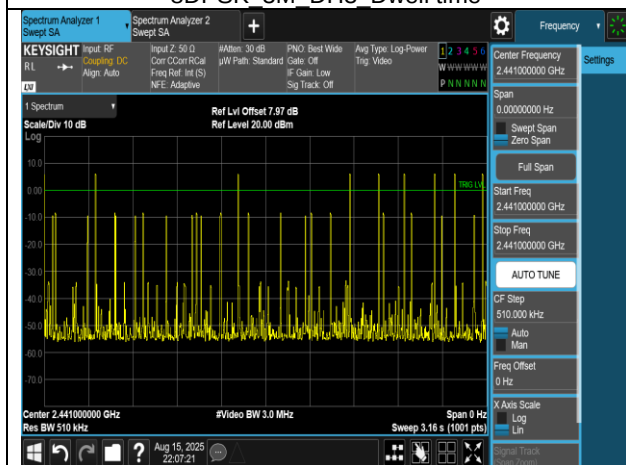

8DPSK 3M DH5 Dwell time

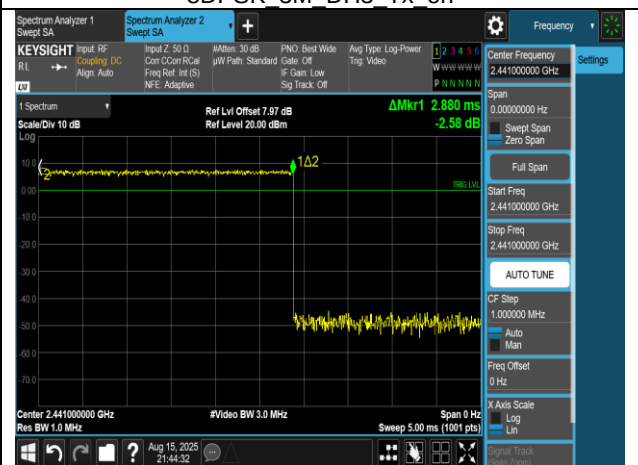

8DPSK 3M DH5 Tx on

4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.8.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

- (1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

- (2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq$ 3*RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

- (3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq$ 98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW=1/T.


6. Data result

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.8.3 Test Setup


9kHz ~ 30MHz

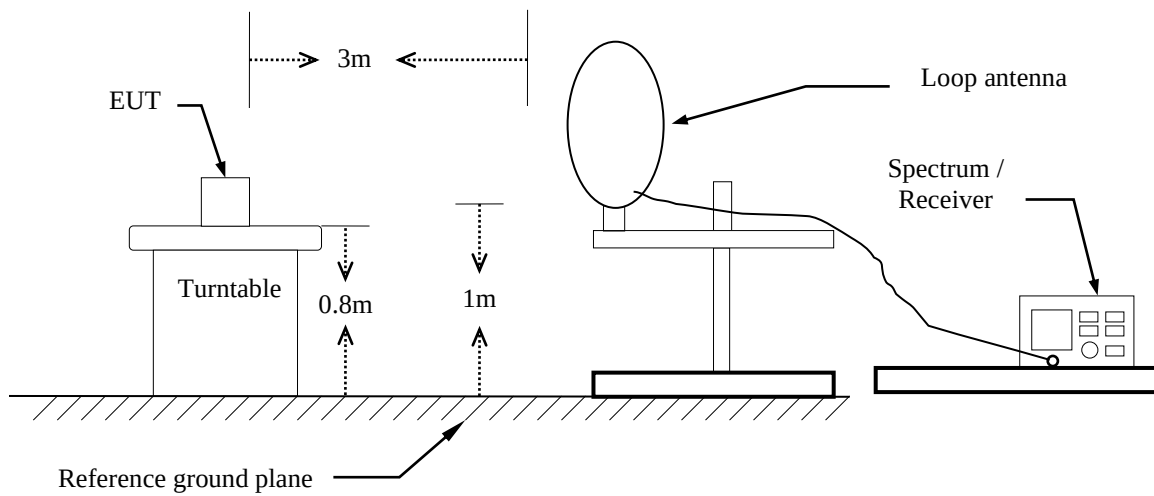

30MHz ~ 1GHz

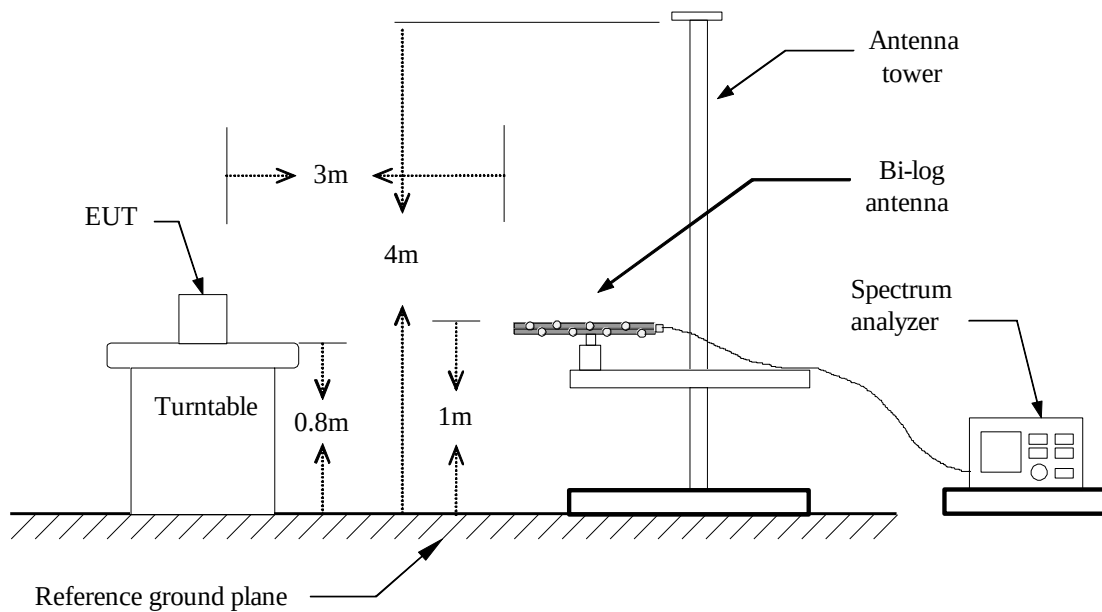

Above 1 GHz

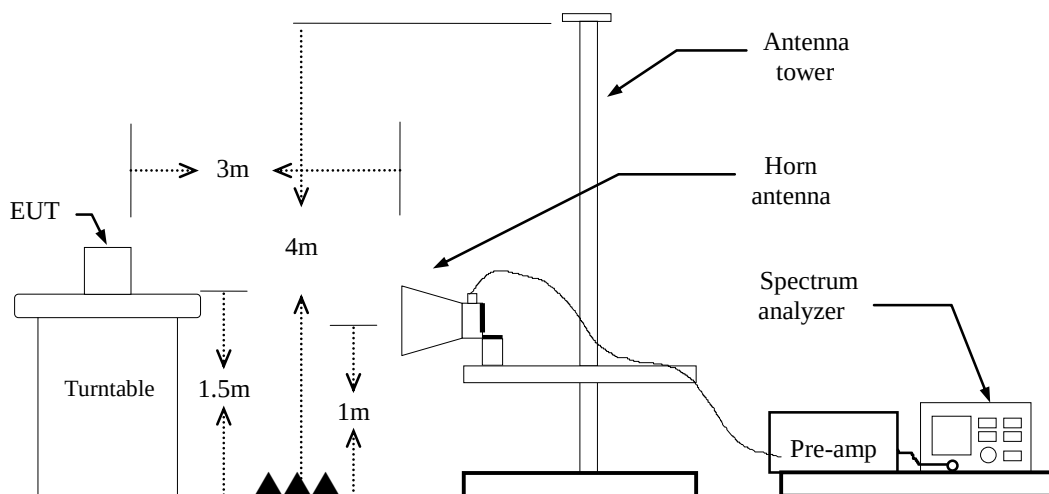


4.8.4 Test Result

Band Edge Test Data

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : Vertical
Engineer : Ben.Yang
Test Chamber : 966A

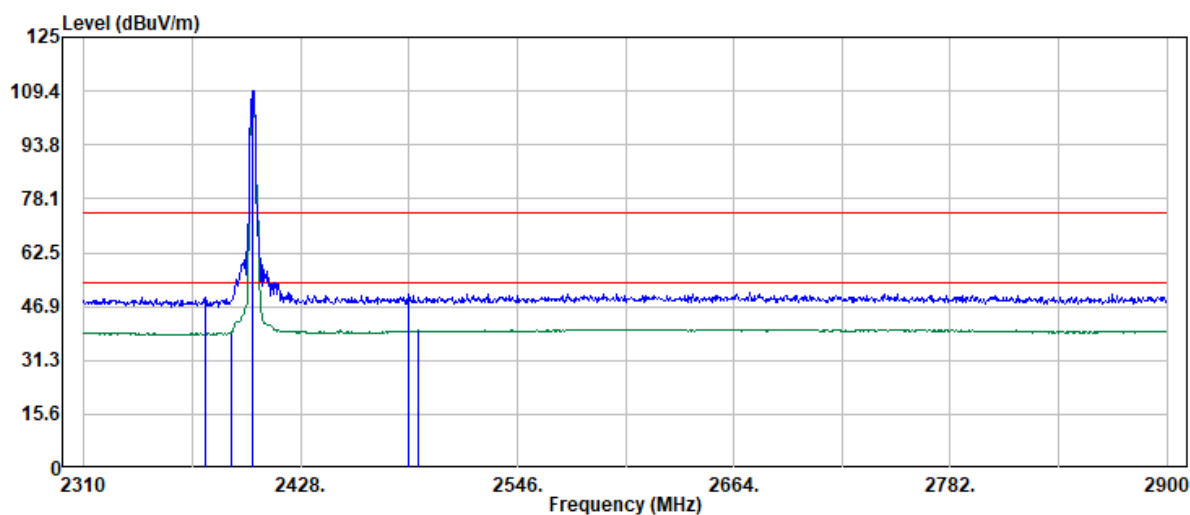

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2376.44	43.46	6.24	49.70	74.00	-24.30	Peak
2389.93	32.99	6.32	39.31	54.00	-14.69	Average
2402.00	103.26	6.38	109.64	--	--	Peak
2402.00	103.16	6.38	109.54	--	--	Average
2486.85	43.66	6.80	50.46	74.00	-23.54	Peak
2492.35	33.04	6.82	39.86	54.00	-14.14	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 49 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

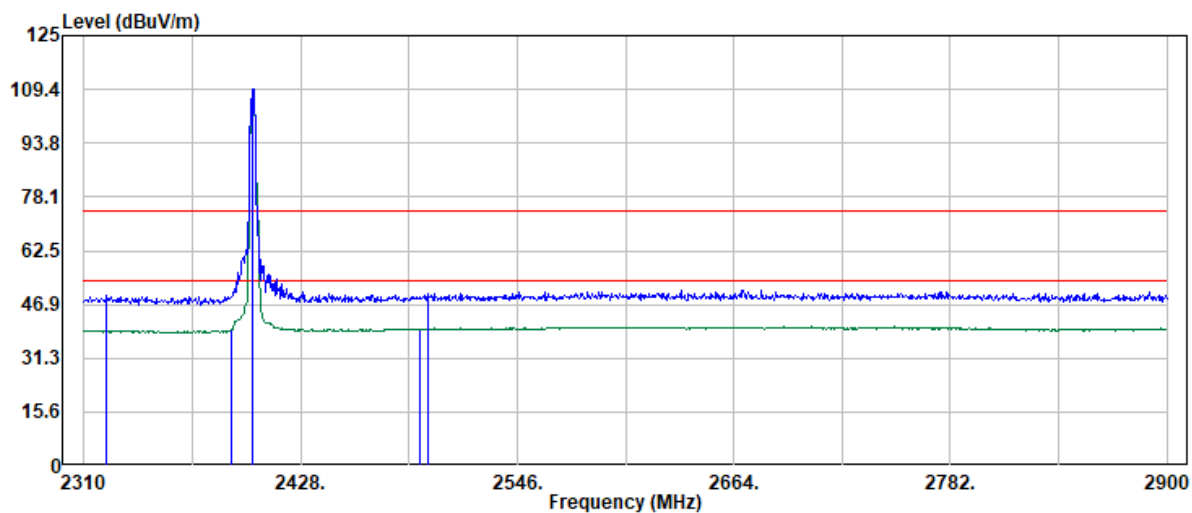

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2322.49	43.33	6.26	49.59	74.00	-24.41	Peak
2389.93	33.11	6.32	39.43	54.00	-14.57	Average
2402.00	103.05	6.38	109.43	--	--	Peak
2402.00	102.96	6.38	109.34	--	--	Average
2492.85	33.02	6.82	39.84	54.00	-14.16	Average
2497.34	42.96	6.82	49.78	74.00	-24.22	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 50 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

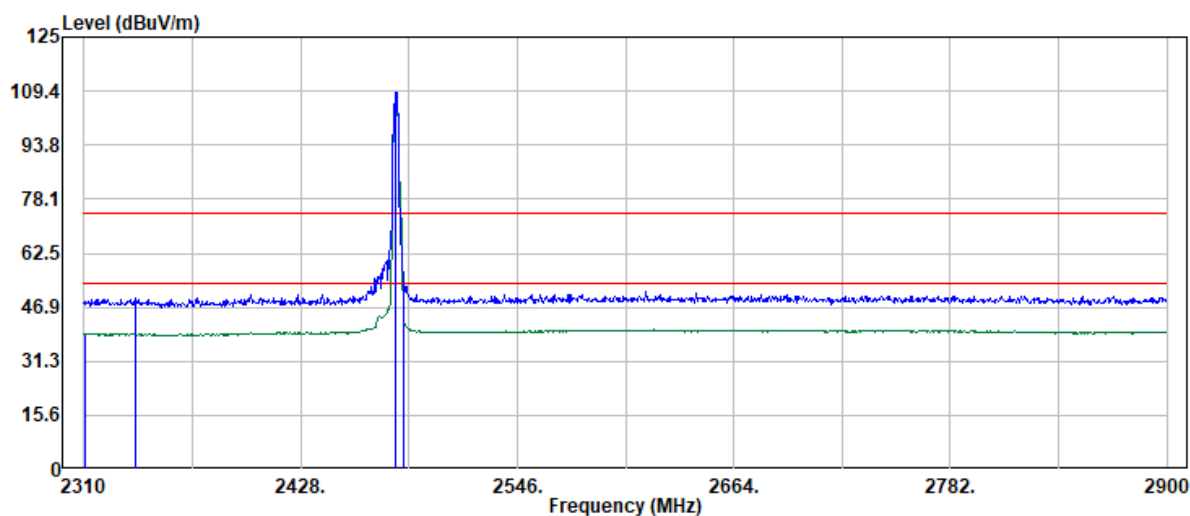

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.50	32.91	6.39	39.30	54.00	-14.70	Average
2338.48	43.35	6.21	49.56	74.00	-24.44	Peak
2480.00	102.44	6.73	109.17	--	--	Peak
2480.00	102.32	6.73	109.05	--	--	Average
2483.85	49.50	6.77	56.27	74.00	-17.73	Peak
2483.85	40.55	6.77	47.32	54.00	-6.68	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 51 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

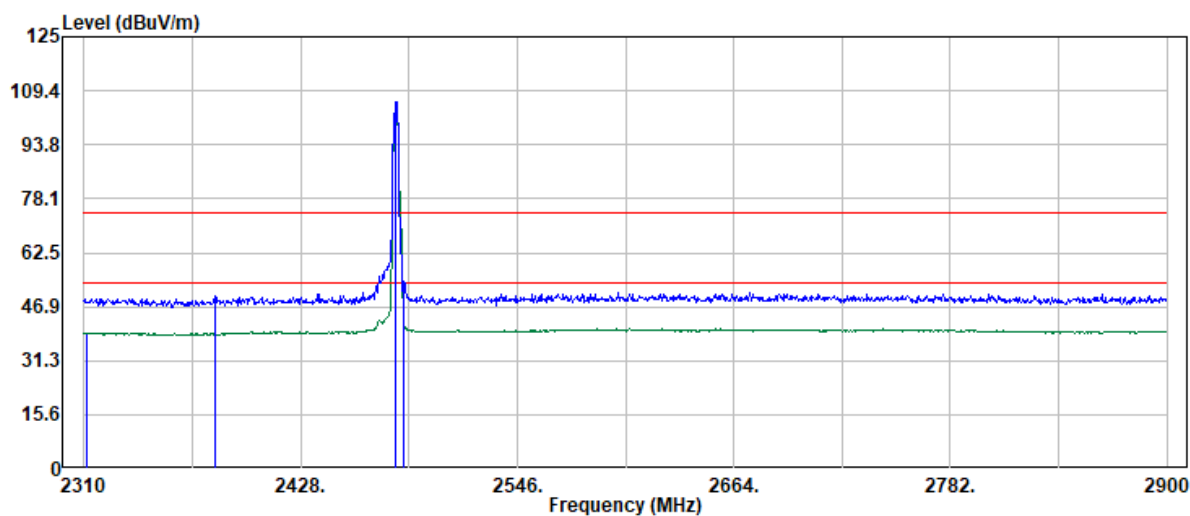

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.50	32.93	6.38	39.31	54.00	-14.69	Average
2381.44	43.84	6.27	50.11	74.00	-23.89	Peak
2480.00	99.57	6.73	106.30	--	--	Peak
2480.00	99.44	6.73	106.17	--	--	Average
2483.85	47.63	6.77	54.40	74.00	-19.60	Peak
2483.85	38.39	6.77	45.16	54.00	-8.84	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 52 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

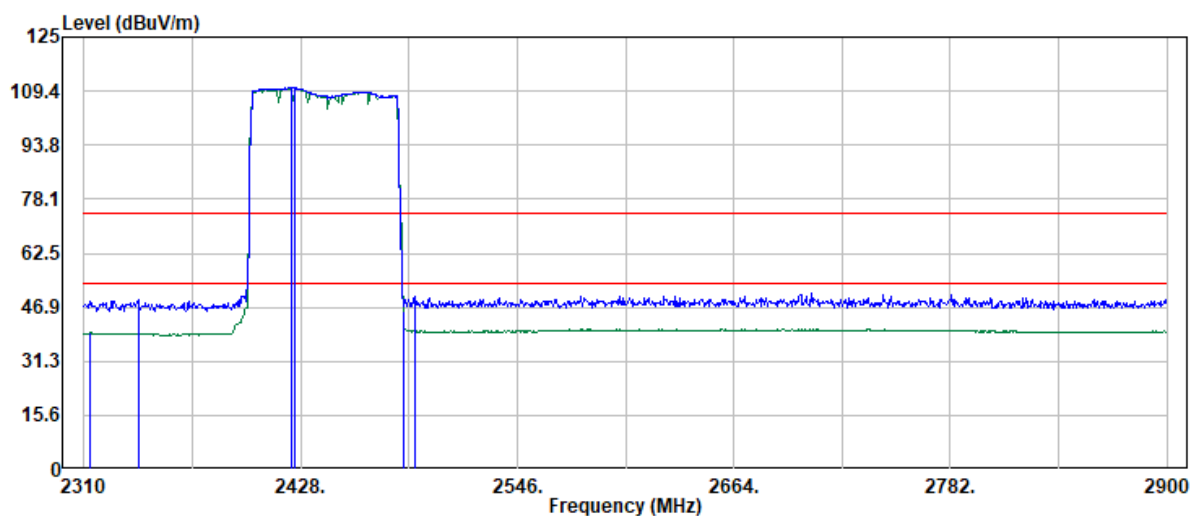

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2313.50	33.06	6.36	39.42	54.00	-14.58	Average
2339.48	42.66	6.21	48.87	74.00	-25.13	Peak
2422.90	103.78	6.47	110.25	--	--	Average
2424.40	103.98	6.47	110.45	--	--	Peak
2483.85	38.77	6.77	45.54	54.00	-8.46	Average
2490.35	42.95	6.82	49.77	74.00	-24.23	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 53 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

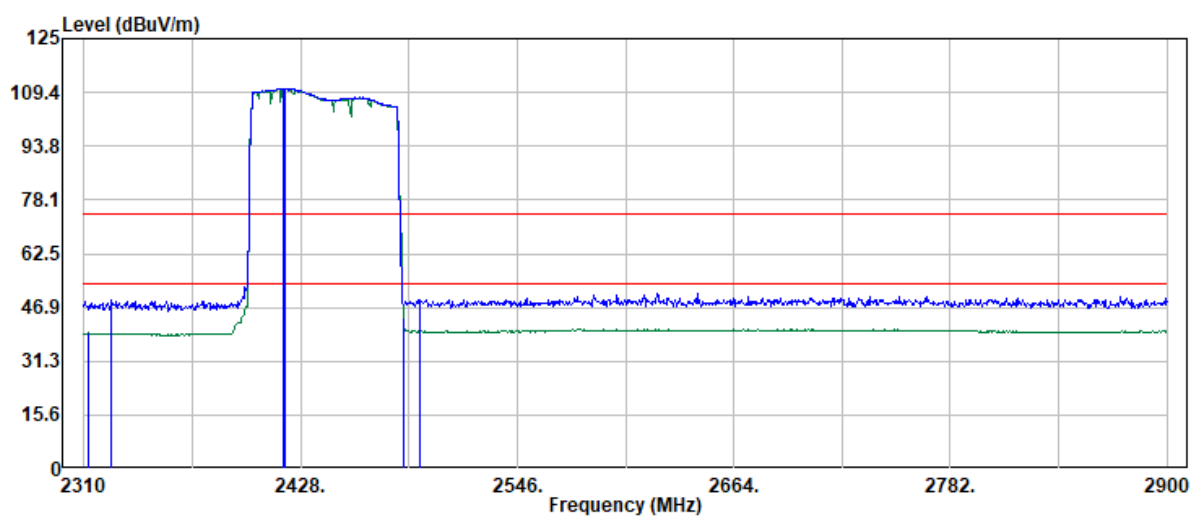

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.50	33.05	6.37	39.42	54.00	-14.58	Average
2324.99	42.87	6.25	49.12	74.00	-24.88	Peak
2418.91	103.90	6.47	110.37	--	--	Average
2419.41	104.05	6.47	110.52	--	--	Peak
2483.85	37.02	6.77	43.79	54.00	-10.21	Average
2493.35	42.28	6.81	49.09	74.00	-24.91	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 54 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

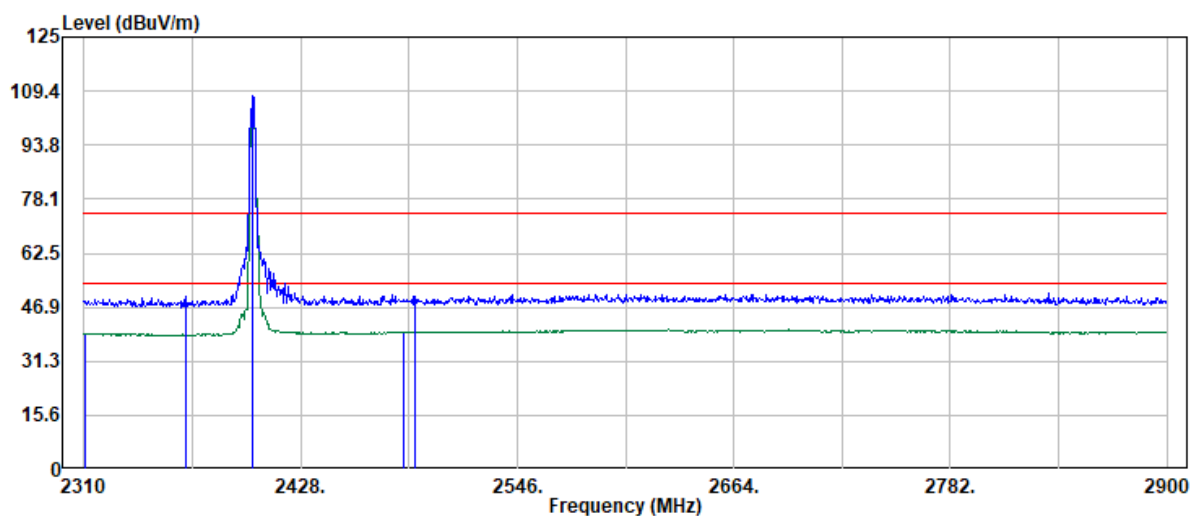

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.00	32.84	6.38	39.22	54.00	-14.78	Average
2365.45	43.89	6.16	50.05	74.00	-23.95	Peak
2402.00	101.41	6.38	107.79	--	--	Peak
2402.00	100.35	6.38	106.73	--	--	Average
2483.85	33.02	6.77	39.79	54.00	-14.21	Average
2490.35	43.14	6.82	49.96	74.00	-24.04	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 55 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

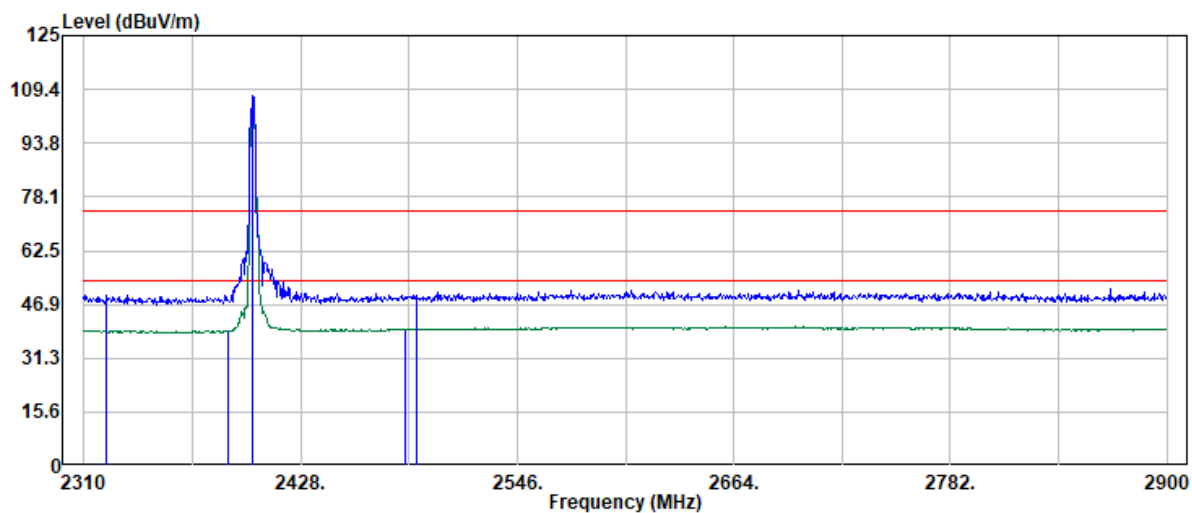

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2322.49	43.37	6.26	49.63	74.00	-24.37	Peak
2388.93	32.93	6.32	39.25	54.00	-14.75	Average
2402.00	101.11	6.38	107.49	--	--	Peak
2402.00	100.10	6.38	106.48	--	--	Average
2484.85	33.04	6.77	39.81	54.00	-14.19	Average
2490.85	42.66	6.82	49.48	74.00	-24.52	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 56 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

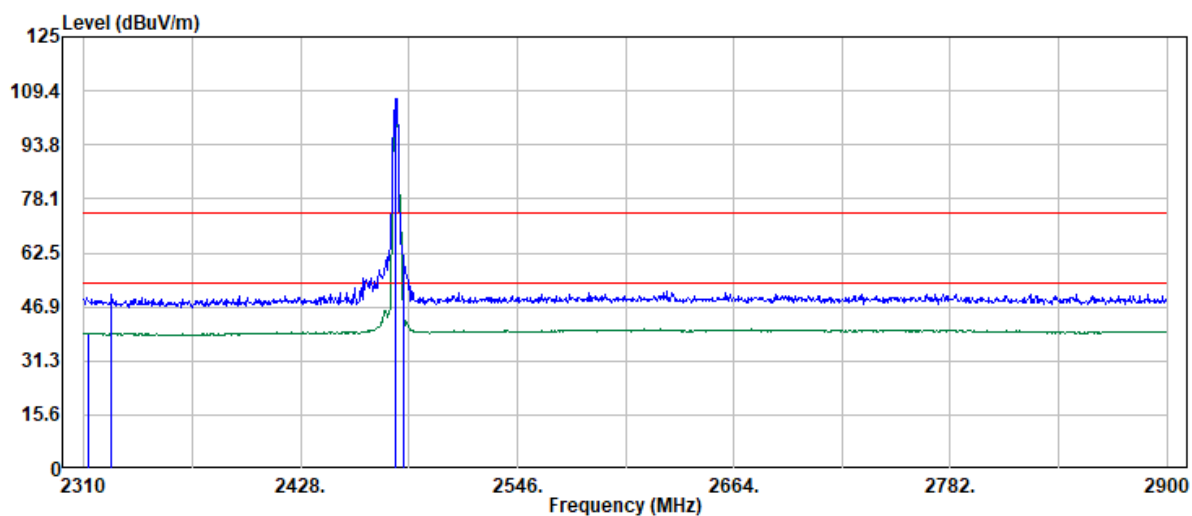

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.00	32.94	6.37	39.31	54.00	-14.69	Average
2324.99	43.99	6.25	50.24	74.00	-23.76	Peak
2480.00	100.37	6.73	107.10	--	--	Peak
2480.00	99.36	6.73	106.09	--	--	Average
2483.85	54.12	6.77	60.89	74.00	-13.11	Peak
2483.85	38.47	6.77	45.24	54.00	-8.76	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 57 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

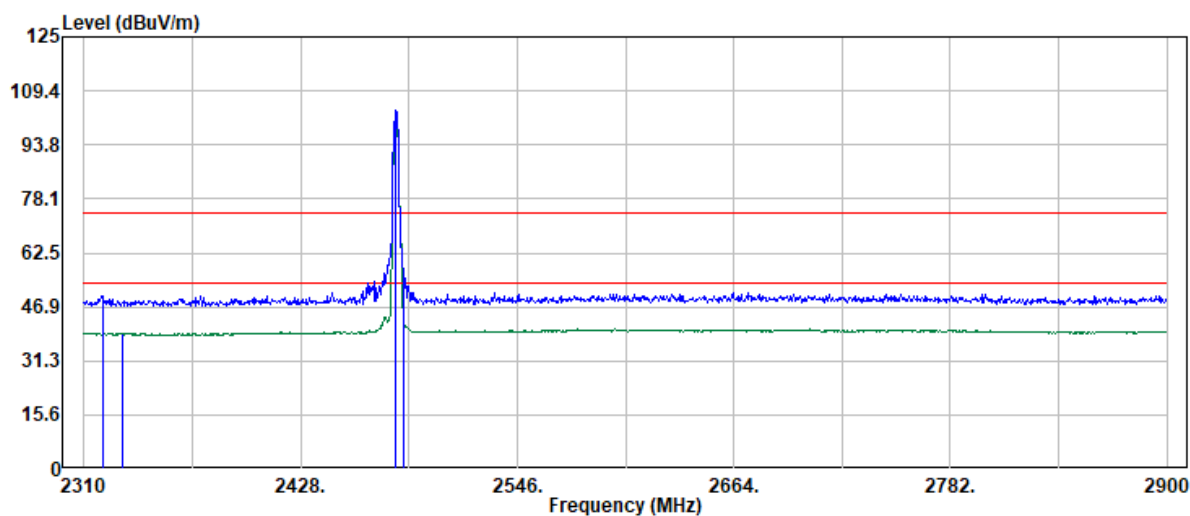

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2319.99	43.81	6.26	50.07	74.00	-23.93	Peak
2330.98	33.07	6.23	39.30	54.00	-14.70	Average
2480.00	97.16	6.73	103.89	--	--	Peak
2480.00	96.46	6.73	103.19	--	--	Average
2483.85	36.43	6.77	43.20	54.00	-10.80	Average
2484.35	50.88	6.76	57.64	74.00	-16.36	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 58 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

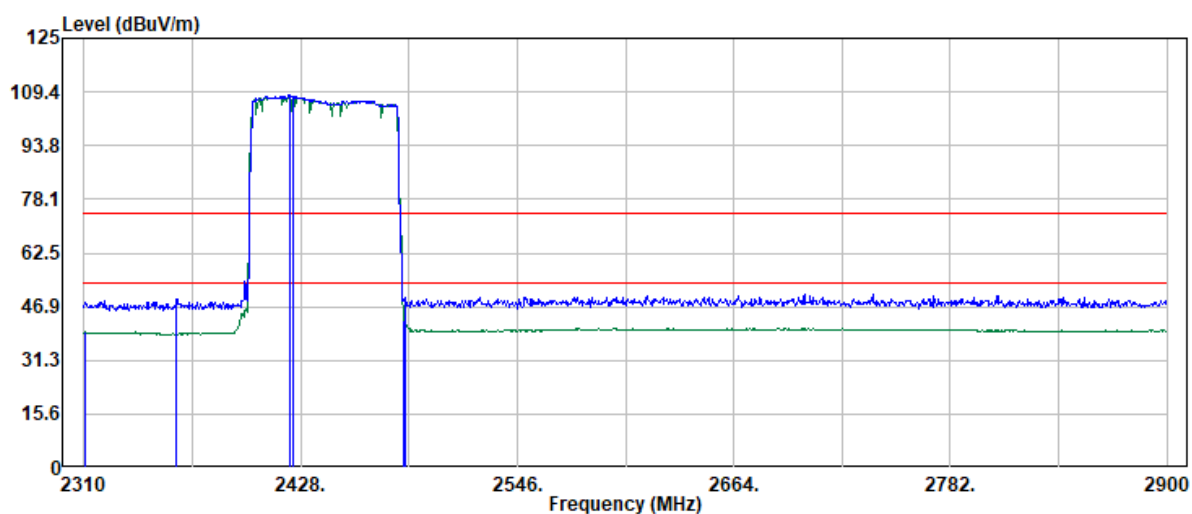

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.00	33.05	6.38	39.43	54.00	-14.57	Average
2360.46	43.11	6.13	49.24	74.00	-24.76	Peak
2421.91	101.85	6.47	108.32	--	--	Peak
2423.90	101.47	6.47	107.94	--	--	Average
2483.85	36.20	6.77	42.97	54.00	-11.03	Average
2484.85	42.85	6.77	49.62	74.00	-24.38	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 59 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

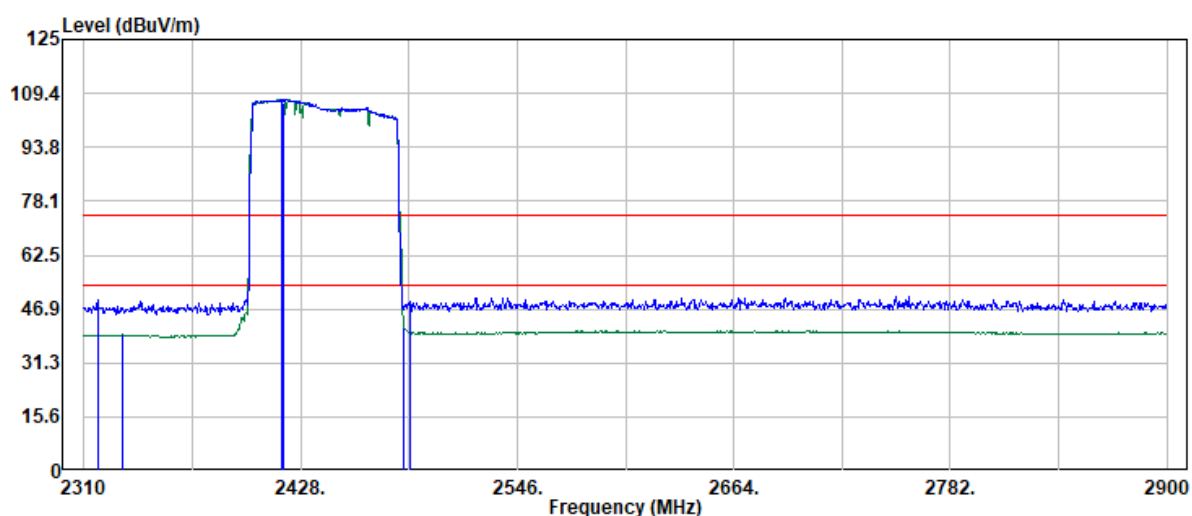

Trace: 1


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2317.49	43.17	6.30	49.47	74.00	-24.53	Peak
2330.98	33.16	6.23	39.39	54.00	-14.61	Average
2417.41	100.91	6.45	107.36	--	--	Peak
2418.91	100.03	6.47	106.50	--	--	Average
2483.85	34.84	6.77	41.61	54.00	-12.39	Average
2487.35	42.27	6.80	49.07	74.00	-24.93	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 60 / 73
Rev.: 01

TX Test Data

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: BT_BR	Temp./Humi.	: 25.4/54
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

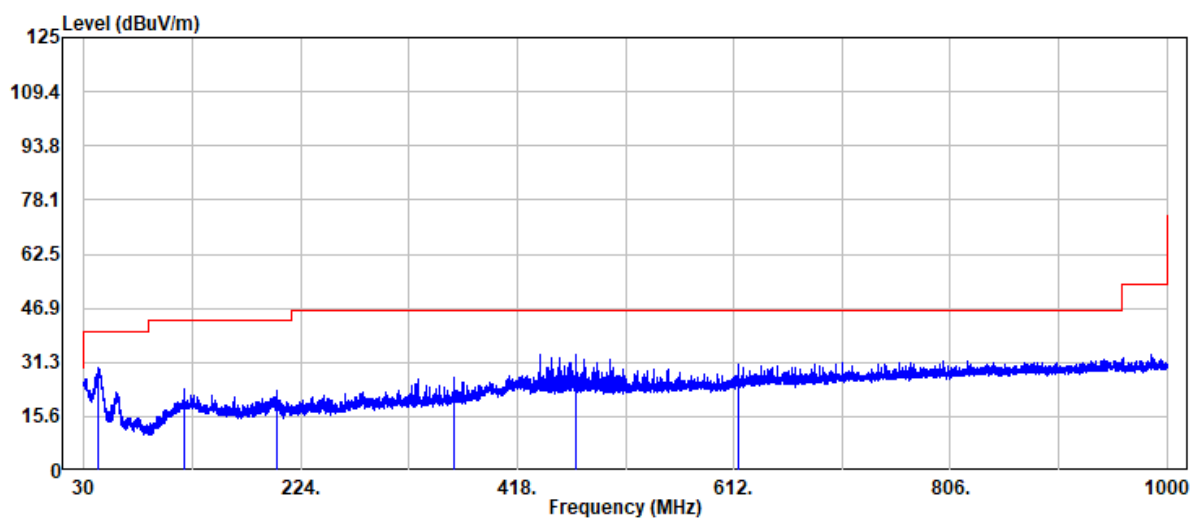


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
43.00	41.91	-12.22	29.69	40.00	-10.31	Peak
120.00	33.08	-9.67	23.41	43.50	-20.09	Peak
202.60	34.54	-11.33	23.21	43.50	-20.29	Peak
362.10	34.81	-7.95	26.86	46.00	-19.14	Peak
470.10	38.37	-4.82	33.55	46.00	-12.45	Peak
615.60	33.18	-2.43	30.75	46.00	-15.25	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 61 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

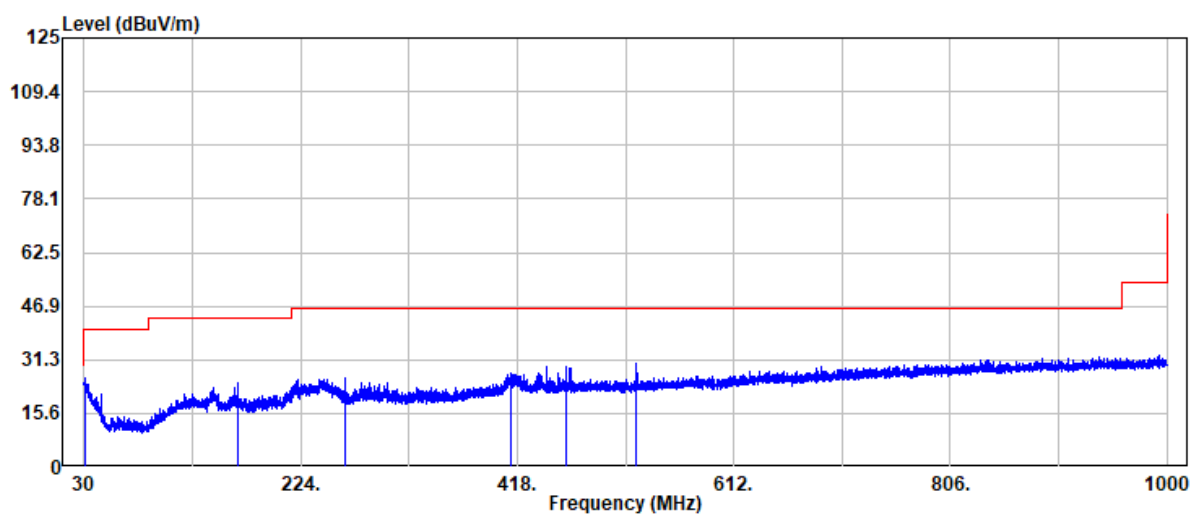


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
31.20	29.28	-3.56	25.72	40.00	-14.28	Peak
168.00	36.02	-11.51	24.51	43.50	-18.99	Peak
264.00	36.28	-10.18	26.10	46.00	-19.90	Peak
413.10	33.95	-6.37	27.58	46.00	-18.42	Peak
462.30	34.37	-5.02	29.35	46.00	-16.65	Peak
524.80	34.64	-4.22	30.42	46.00	-15.58	Peak

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 62 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

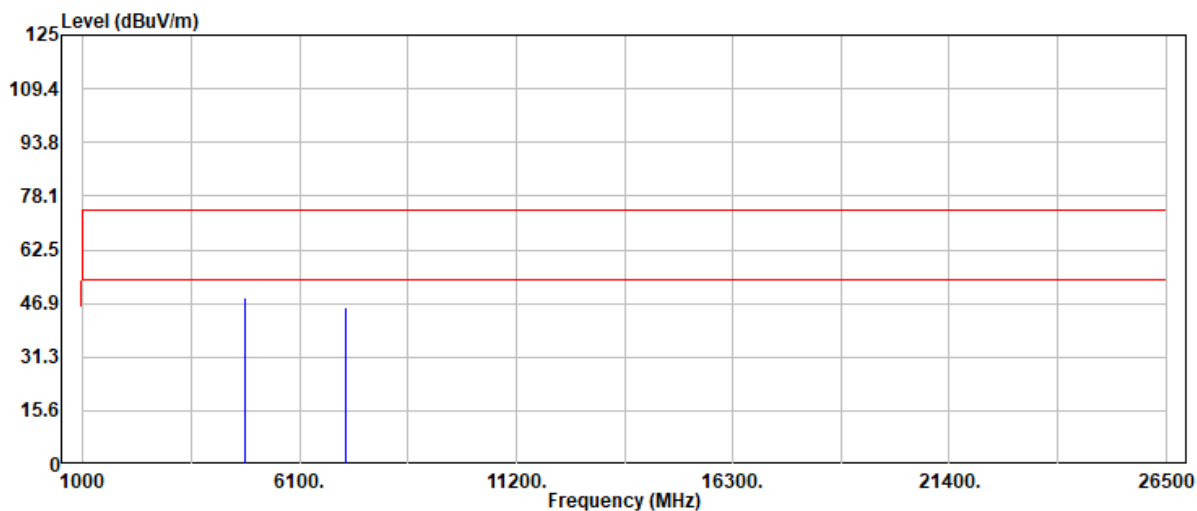


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	46.10	2.40	48.50	74.00	-25.50	Peak
4804.00	44.06	2.40	46.46	54.00	-7.54	Average
7206.00	37.01	8.96	45.97	74.00	-28.03	Peak
7206.00	32.86	8.96	41.82	54.00	-12.18	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 63 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

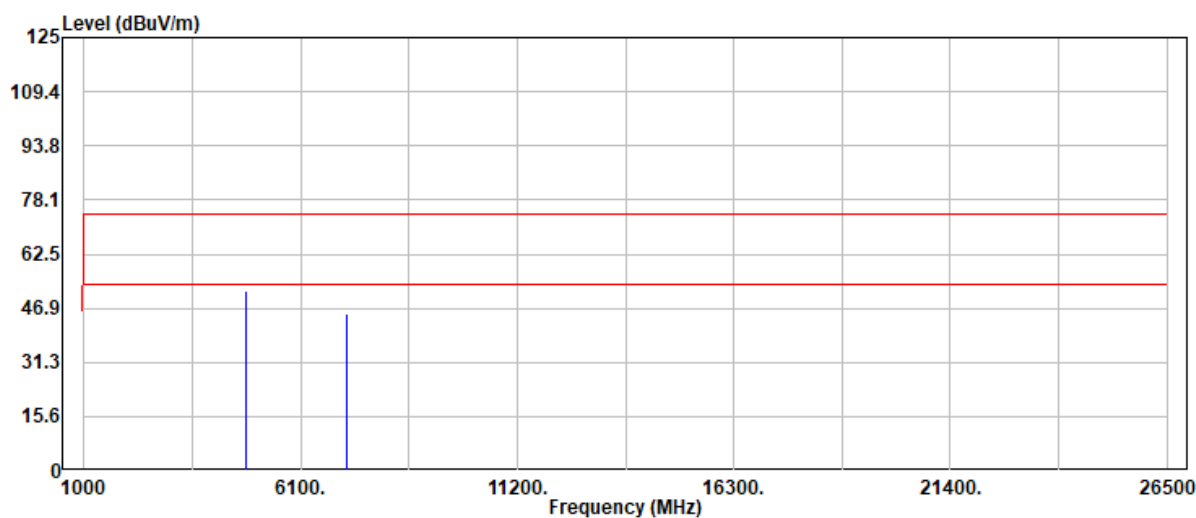


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	49.58	2.40	51.98	74.00	-22.02	Peak
4804.00	47.59	2.40	49.99	54.00	-4.01	Average
7206.00	36.36	8.96	45.32	74.00	-28.68	Peak
7206.00	32.02	8.96	40.98	54.00	-13.02	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 64 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

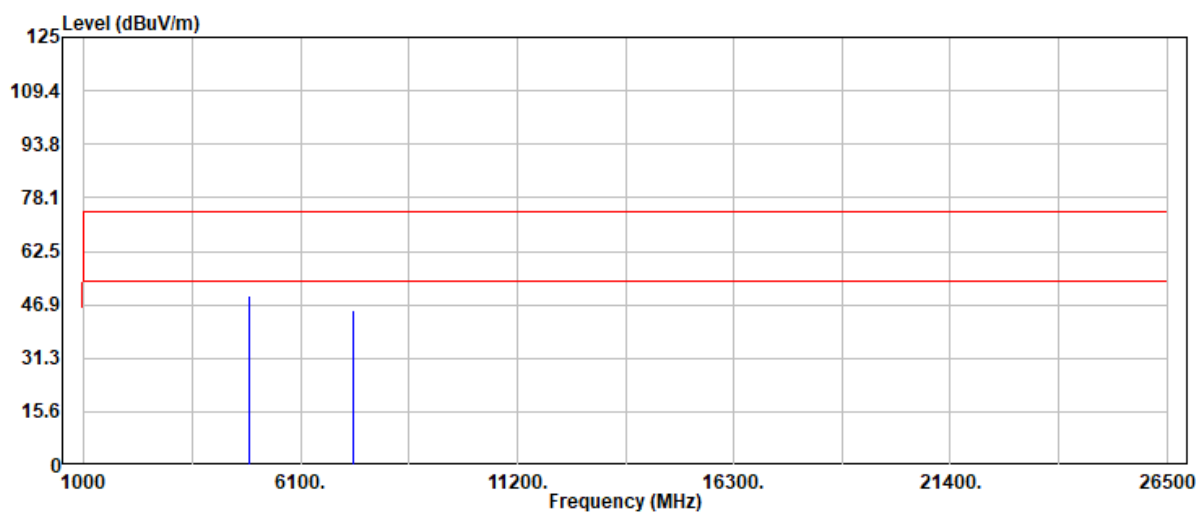


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	46.71	2.69	49.40	74.00	-24.60	Peak
4882.00	45.11	2.69	47.80	54.00	-6.20	Average
7323.00	35.91	9.37	45.28	74.00	-28.72	Peak
7323.00	31.80	9.37	41.17	54.00	-12.83	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 65 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

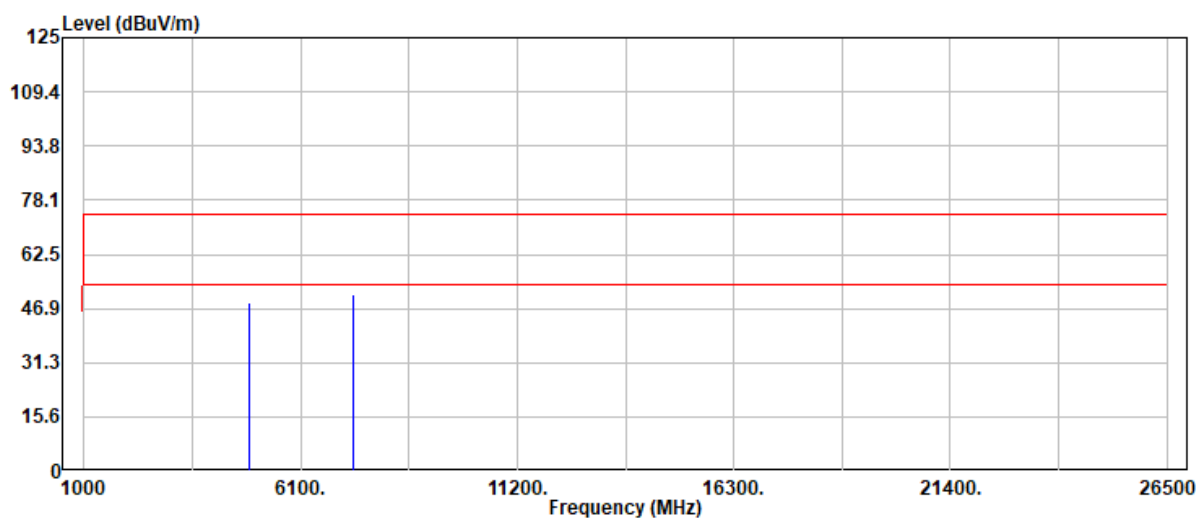


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	46.04	2.69	48.73	74.00	-25.27	Peak
4882.00	44.39	2.69	47.08	54.00	-6.92	Average
7323.00	41.55	9.37	50.92	74.00	-23.08	Peak
7323.00	38.50	9.37	47.87	54.00	-6.13	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 66 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

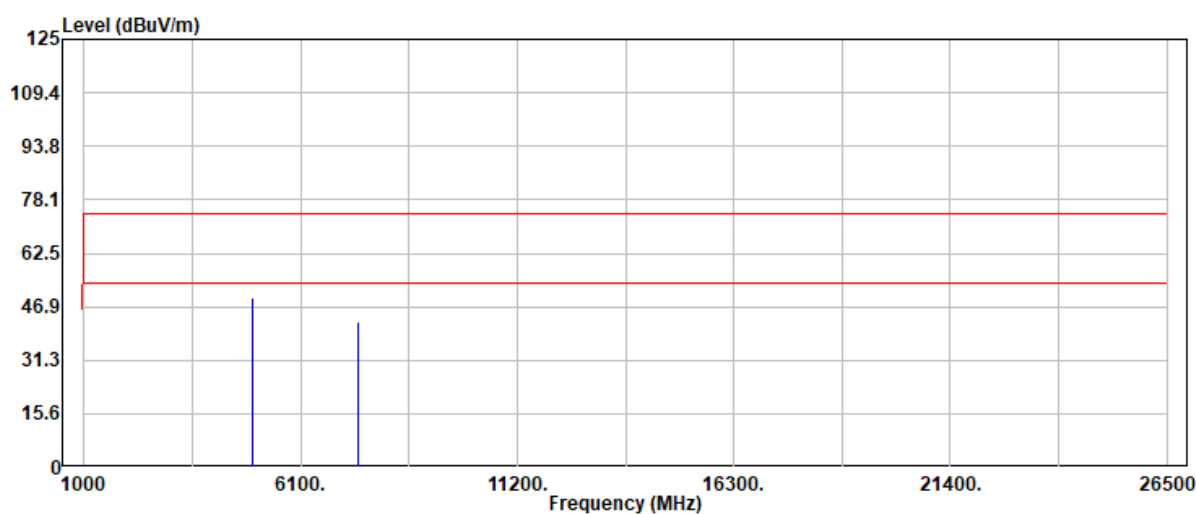


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	45.84	3.52	49.36	74.00	-24.64	Peak
4960.00	44.75	3.52	48.27	54.00	-5.73	Average
7440.00	32.85	9.46	42.31	74.00	-31.69	Peak
7440.00	28.80	9.46	38.26	54.00	-15.74	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 67 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-18
Temp./Humi. : 25.2/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

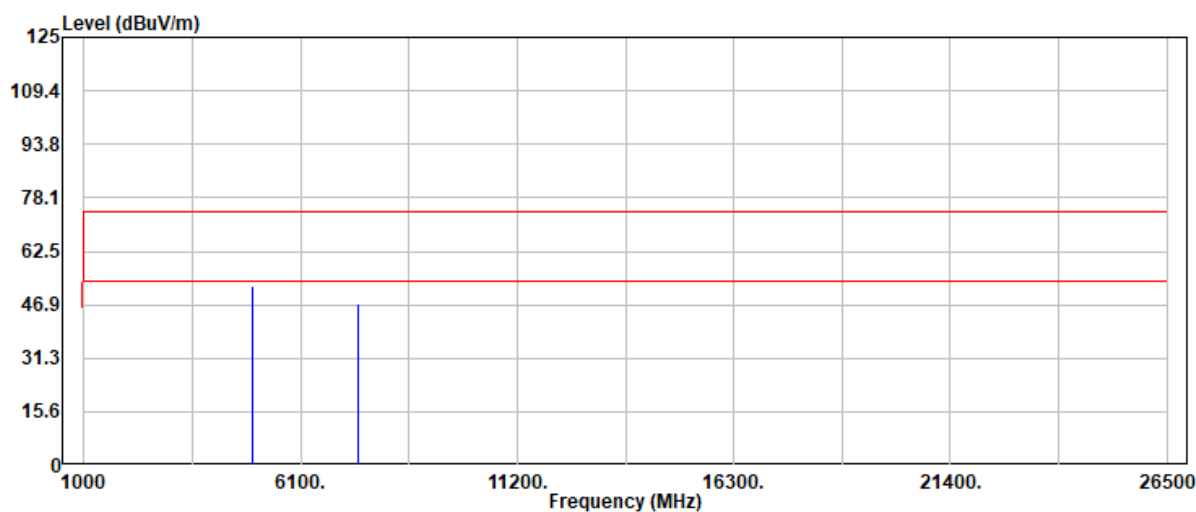


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	48.63	3.52	52.15	74.00	-21.85	Peak
4960.00	47.08	3.52	50.60	54.00	-3.40	Average
7440.00	37.92	9.46	47.38	74.00	-26.62	Peak
7440.00	34.61	9.46	44.07	54.00	-9.93	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 68 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

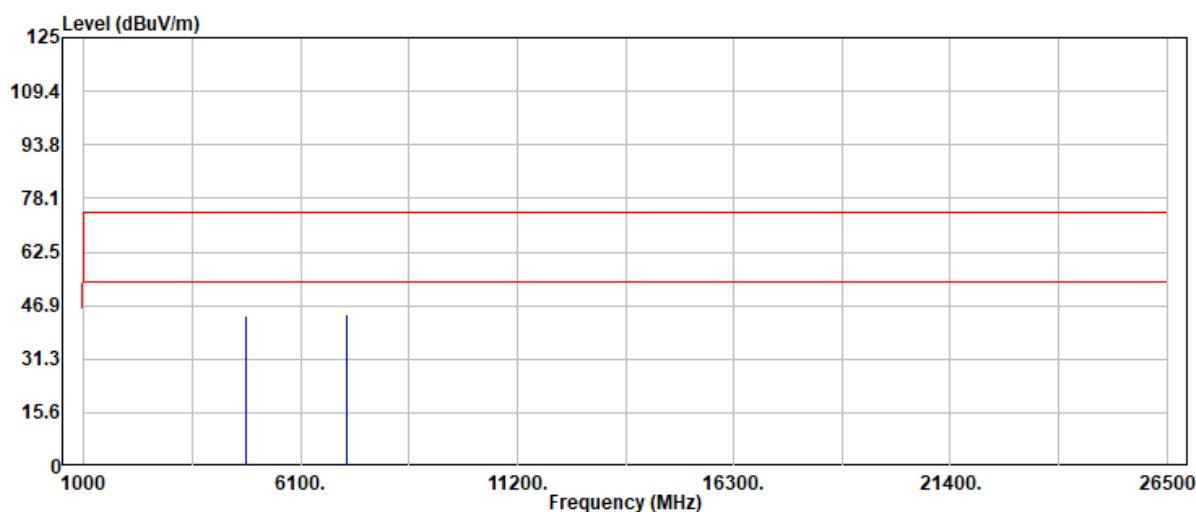


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	41.50	2.40	43.90	74.00	-30.10	Peak
4804.00	40.18	2.40	42.58	54.00	-11.42	Average
7206.00	35.21	8.96	44.17	74.00	-29.83	Peak
7206.00	29.60	8.96	38.56	54.00	-15.44	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 69 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

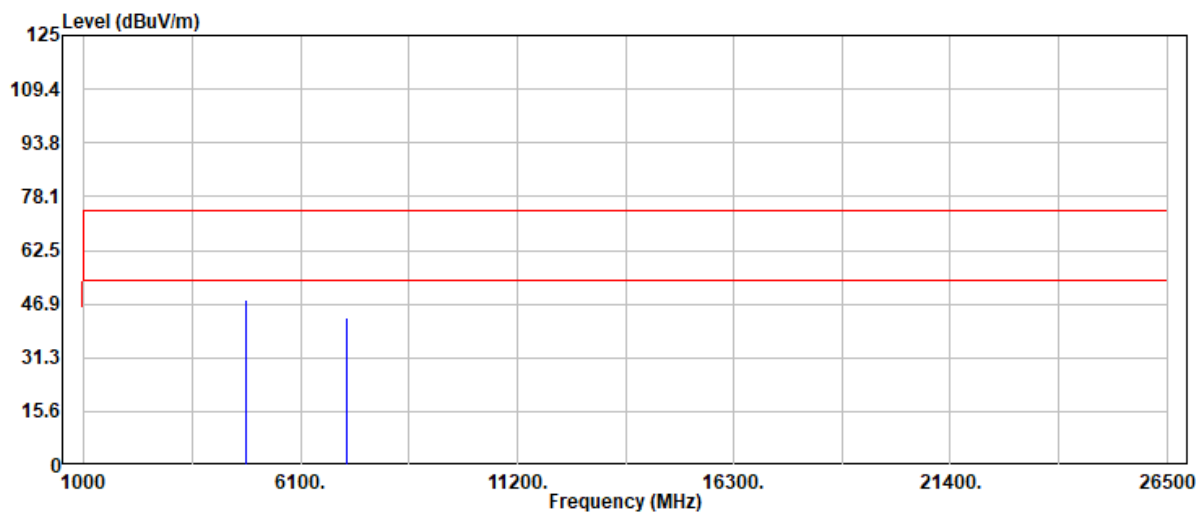


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	45.67	2.40	48.07	74.00	-25.93	Peak
4804.00	43.39	2.40	45.79	54.00	-8.21	Average
7206.00	33.77	8.96	42.73	74.00	-31.27	Peak
7206.00	28.61	8.96	37.57	54.00	-16.43	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 70 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

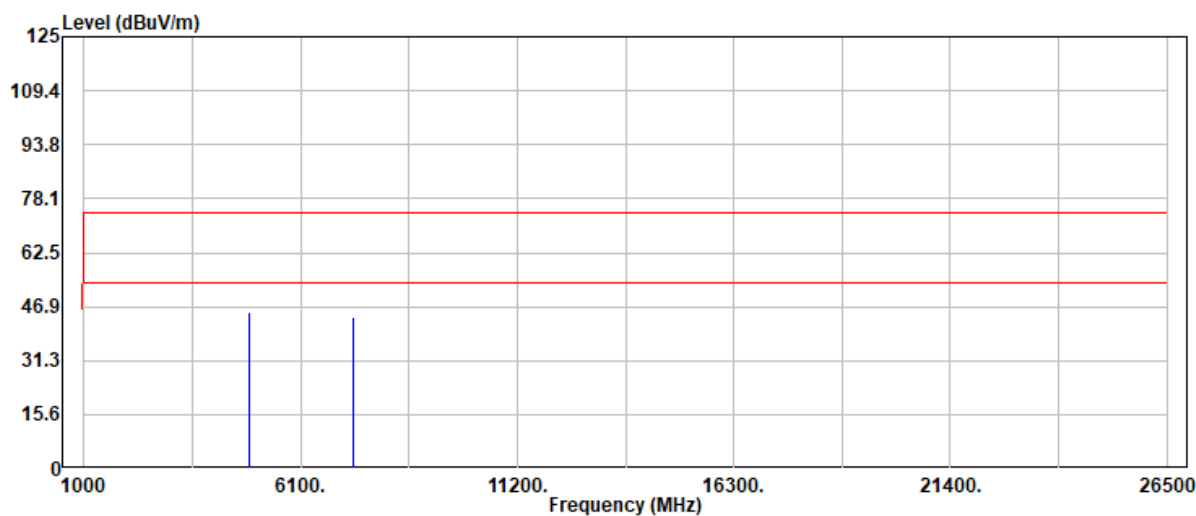


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	42.65	2.69	45.34	74.00	-28.66	Peak
4882.00	39.66	2.69	42.35	54.00	-11.65	Average
7323.00	34.50	9.37	43.87	74.00	-30.13	Peak
7323.00	28.85	9.37	38.22	54.00	-15.78	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 71 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

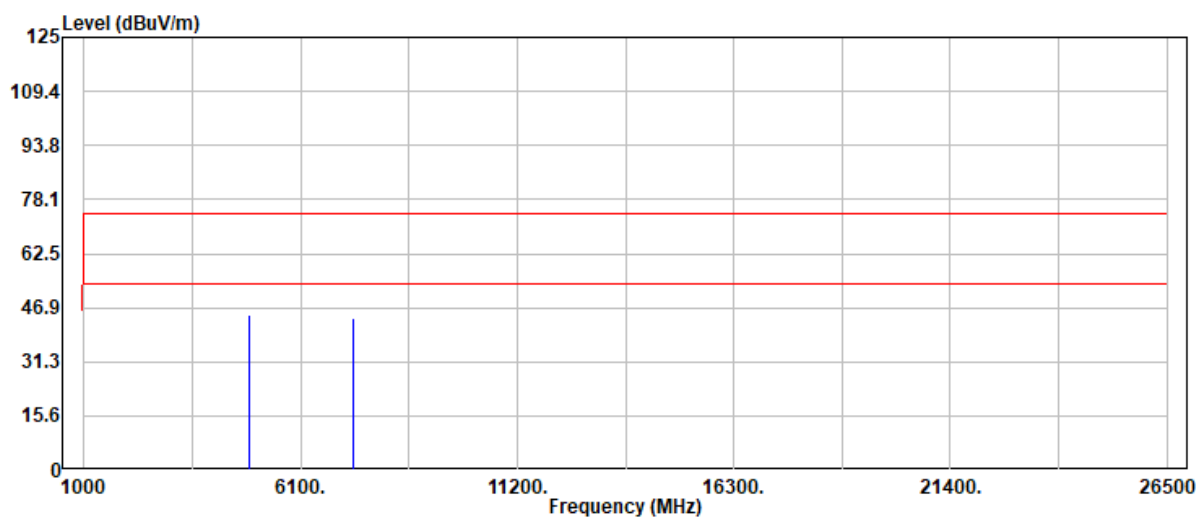


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	42.26	2.69	44.95	74.00	-29.05	Peak
4882.00	41.63	2.69	44.32	54.00	-9.68	Average
7323.00	34.66	9.37	44.03	74.00	-29.97	Peak
7323.00	28.50	9.37	37.87	54.00	-16.13	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 72 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

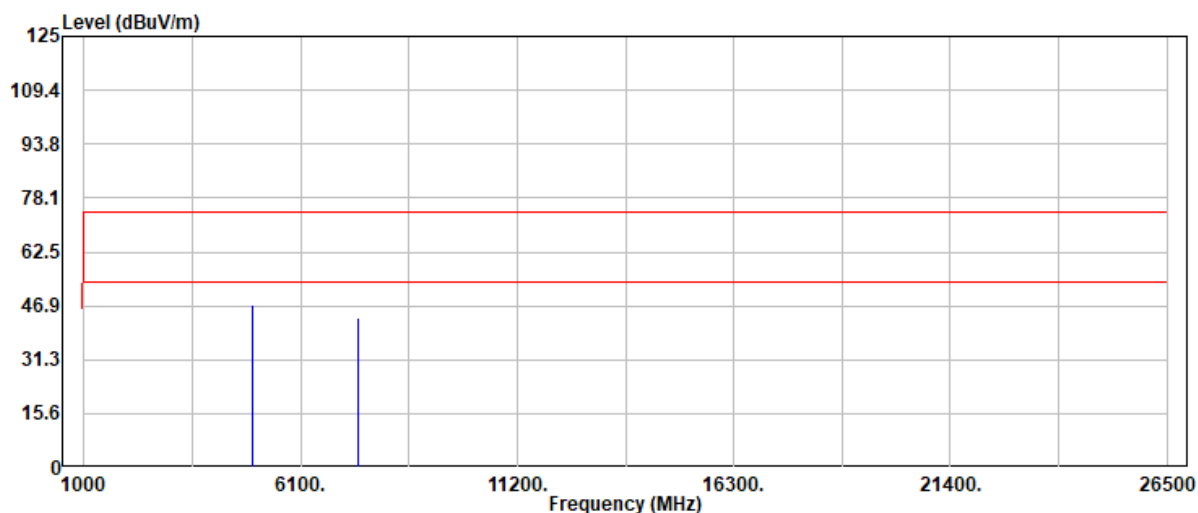


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	43.45	3.52	46.97	74.00	-27.03	Peak
4960.00	41.20	3.52	44.72	54.00	-9.28	Average
7440.00	34.16	9.46	43.62	74.00	-30.38	Peak
7440.00	28.97	9.46	38.43	54.00	-15.57	Average

Project No: TM-2506000042P
Report No.: TMWK2506002191KR

Page: 73 / 73
Rev.: 01

Project No : TM-2506000042P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : H
Setting : 0X09

Test Date : 2025-08-19
Temp./Humi. : 25.4/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

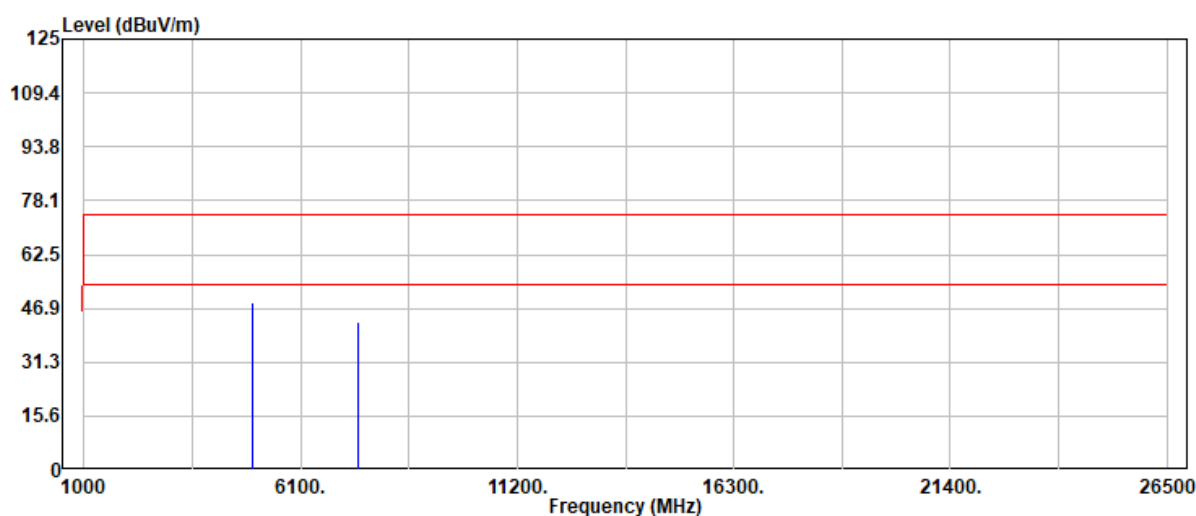

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	45.02	3.52	48.54	74.00	-25.46	Peak
4960.00	43.41	3.52	46.93	54.00	-7.07	Average
7440.00	33.27	9.46	42.73	74.00	-31.27	Peak
7440.00	28.88	9.46	38.34	54.00	-15.66	Average

- End of Test Report -