





Project No: TM-2506000042P
Report No.: TMWK2506002192KR




Page: 39 / 108
Rev.: 01

Test Data

Reference Level

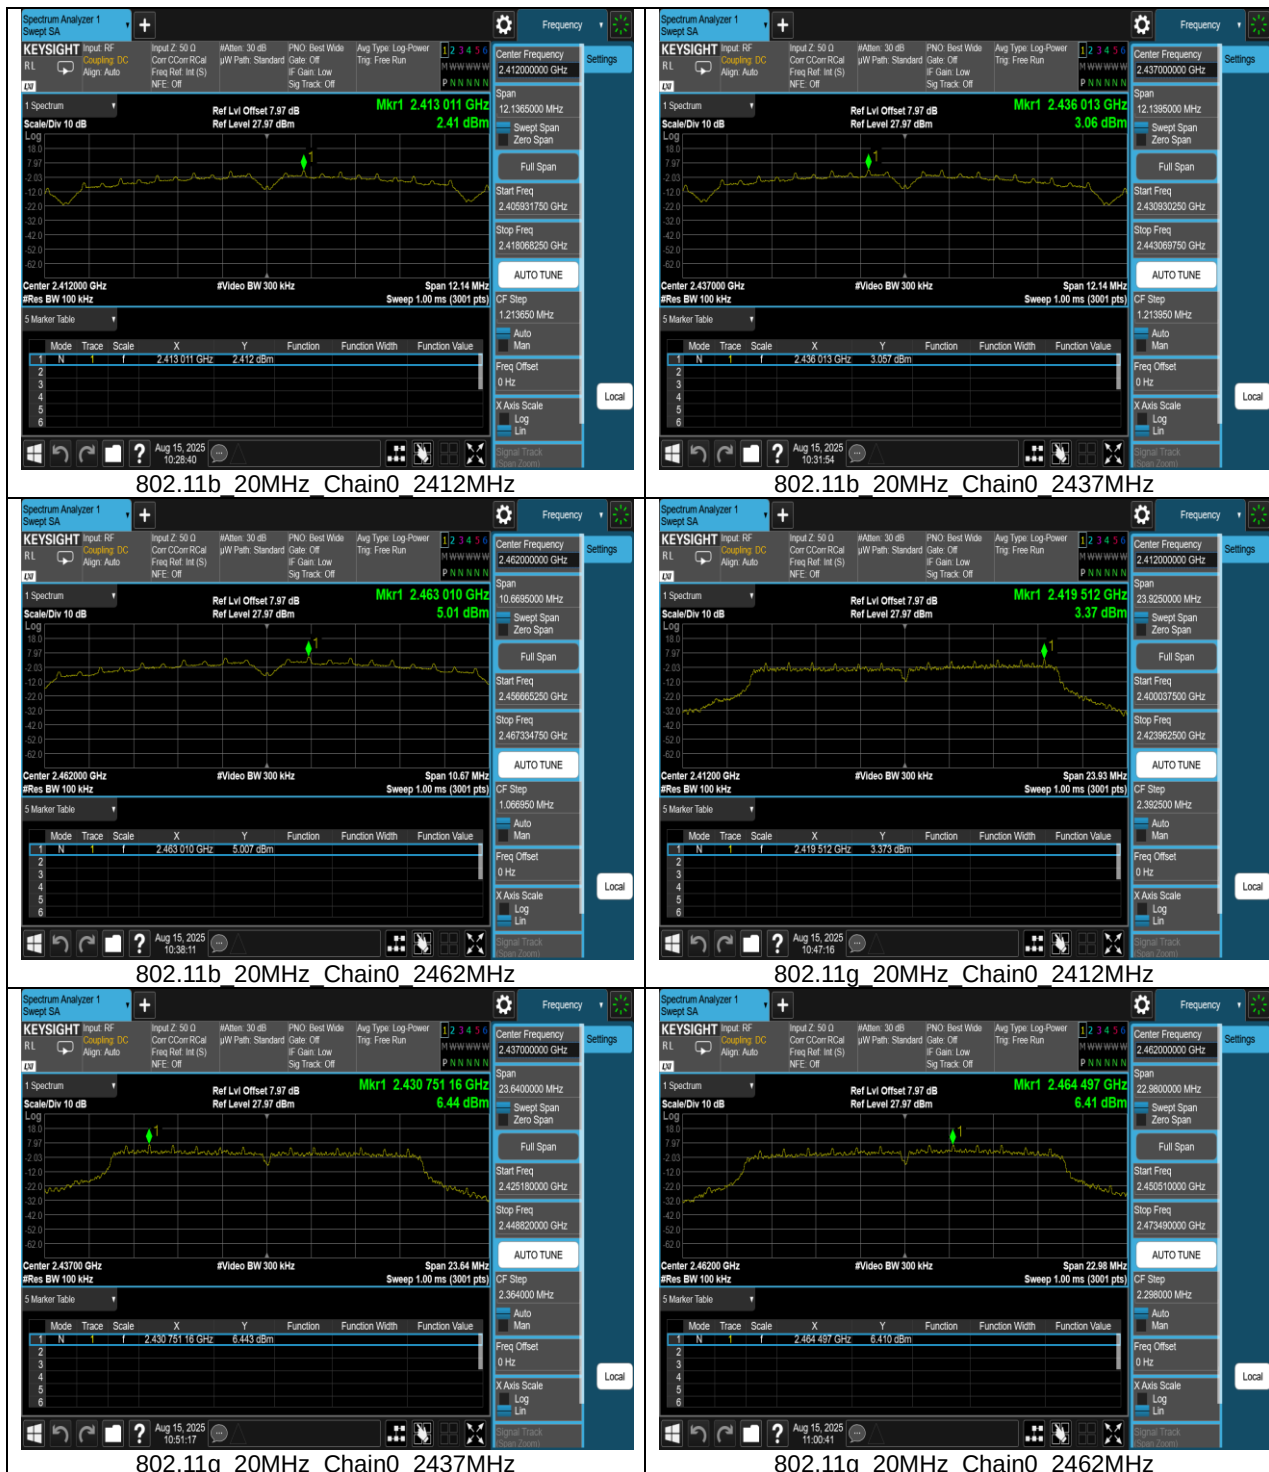

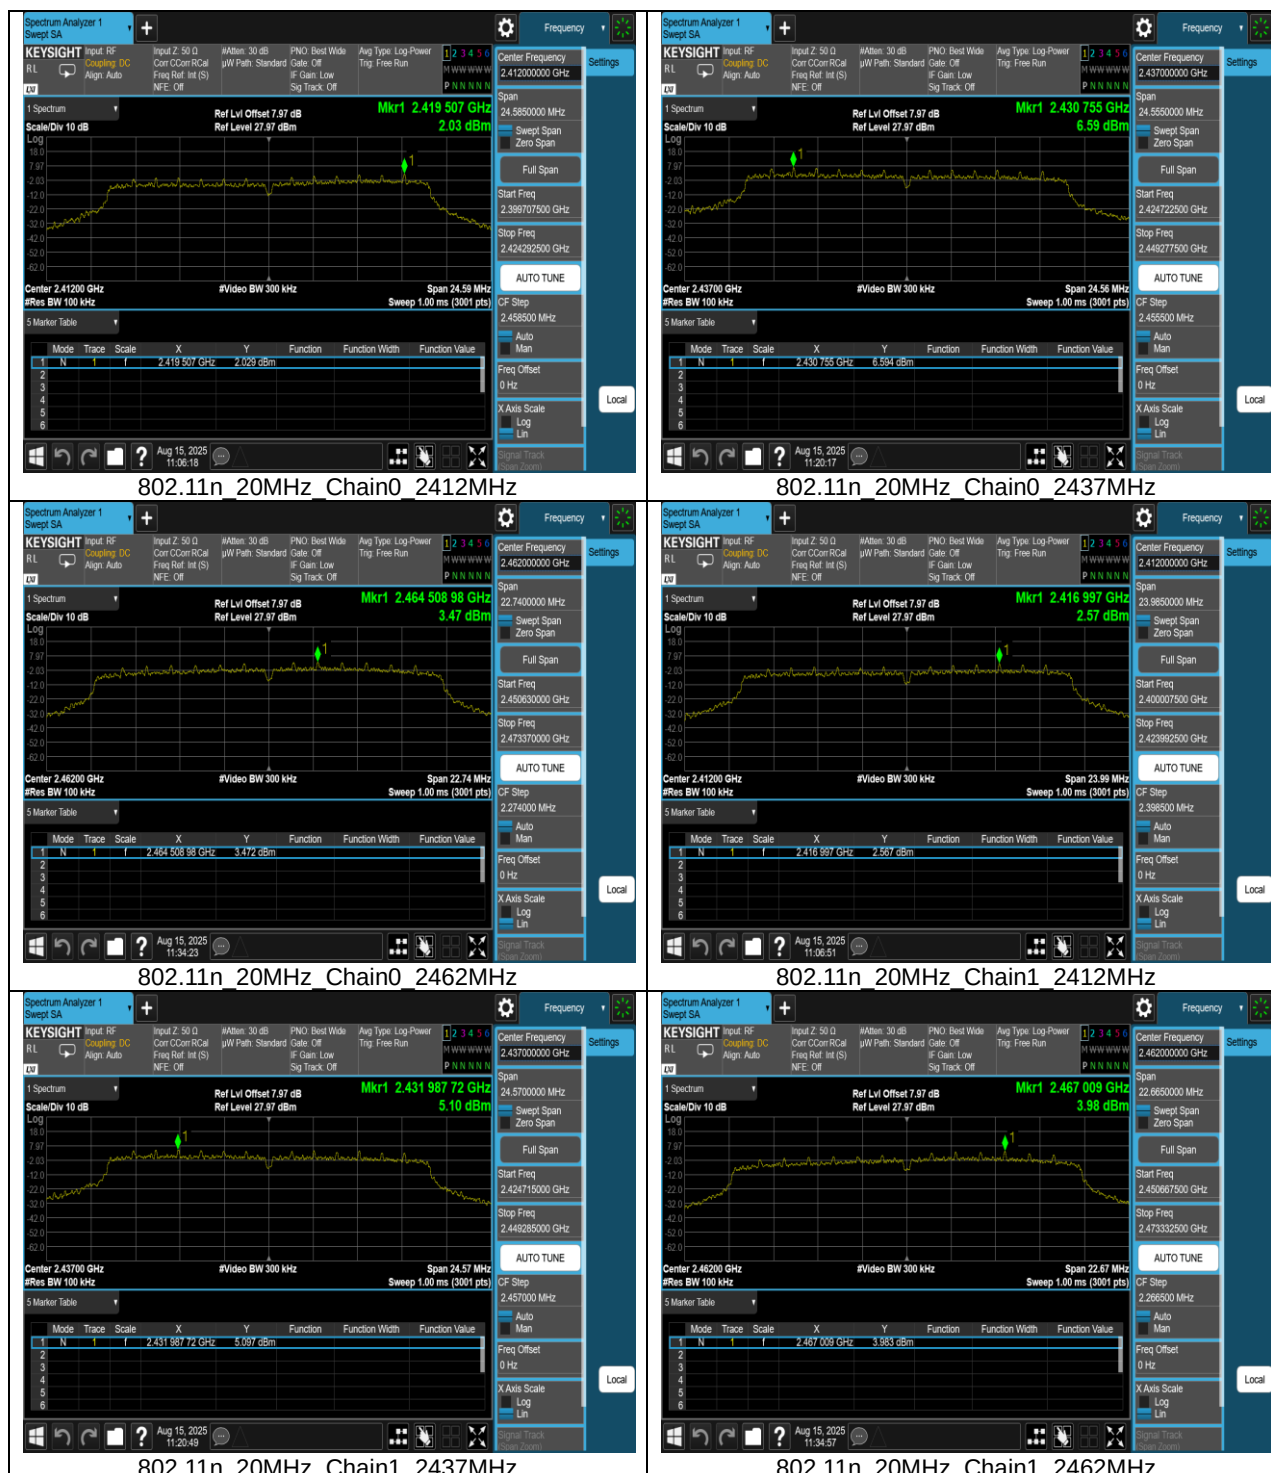

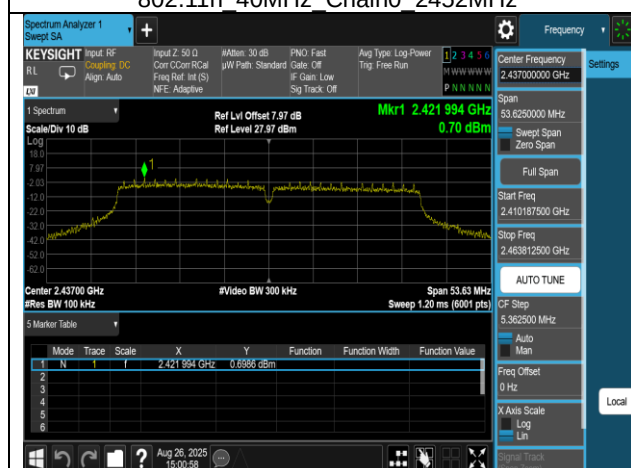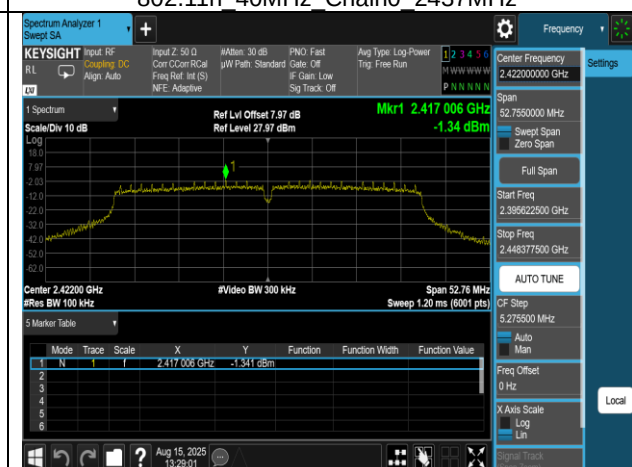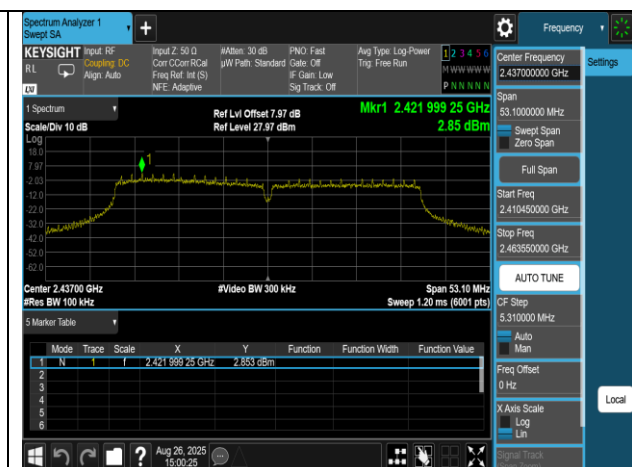

Band Edge



802.11b 20MHz Chain0 2412MHz



802.11b 20MHz Chain0 2462MHz



802.11g 20MHz Chain0 2412MHz




802.11g 20MHz Chain0 2462MHz




802.11n 20MHz Chain0 2412MHz




802.11n 20MHz Chain0 2462MHz

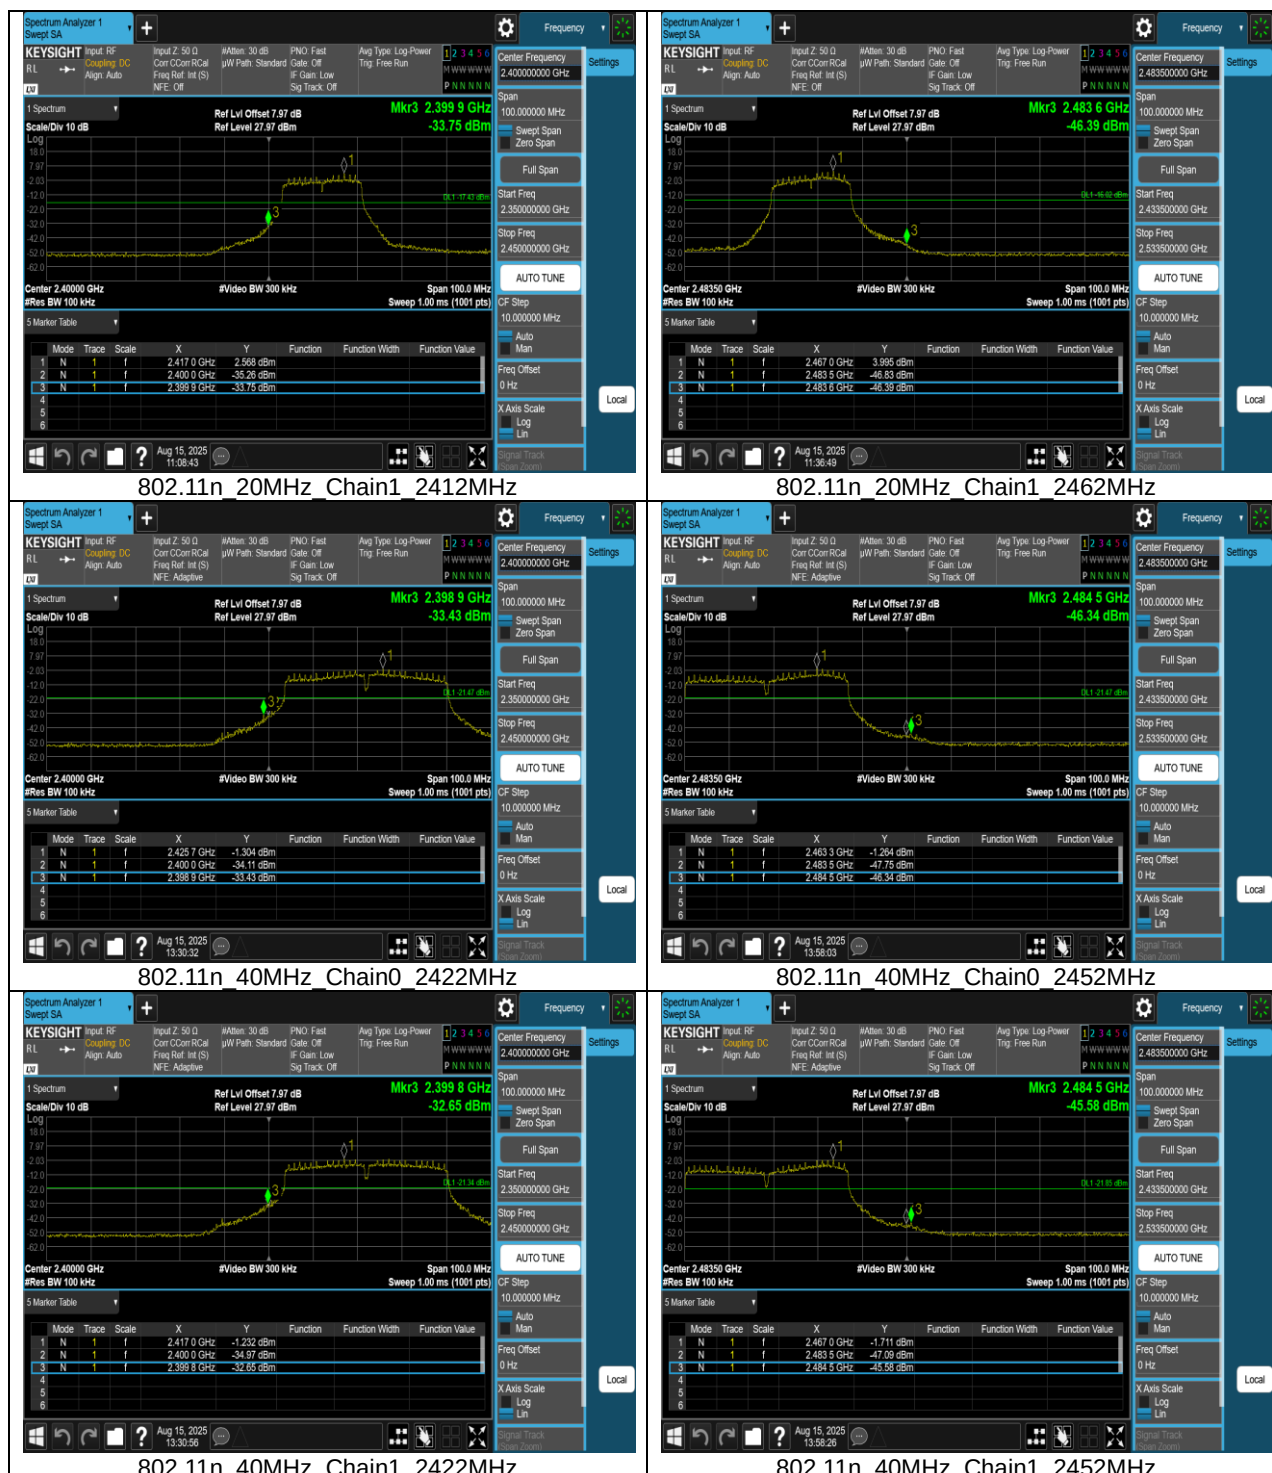

Spurious Emission

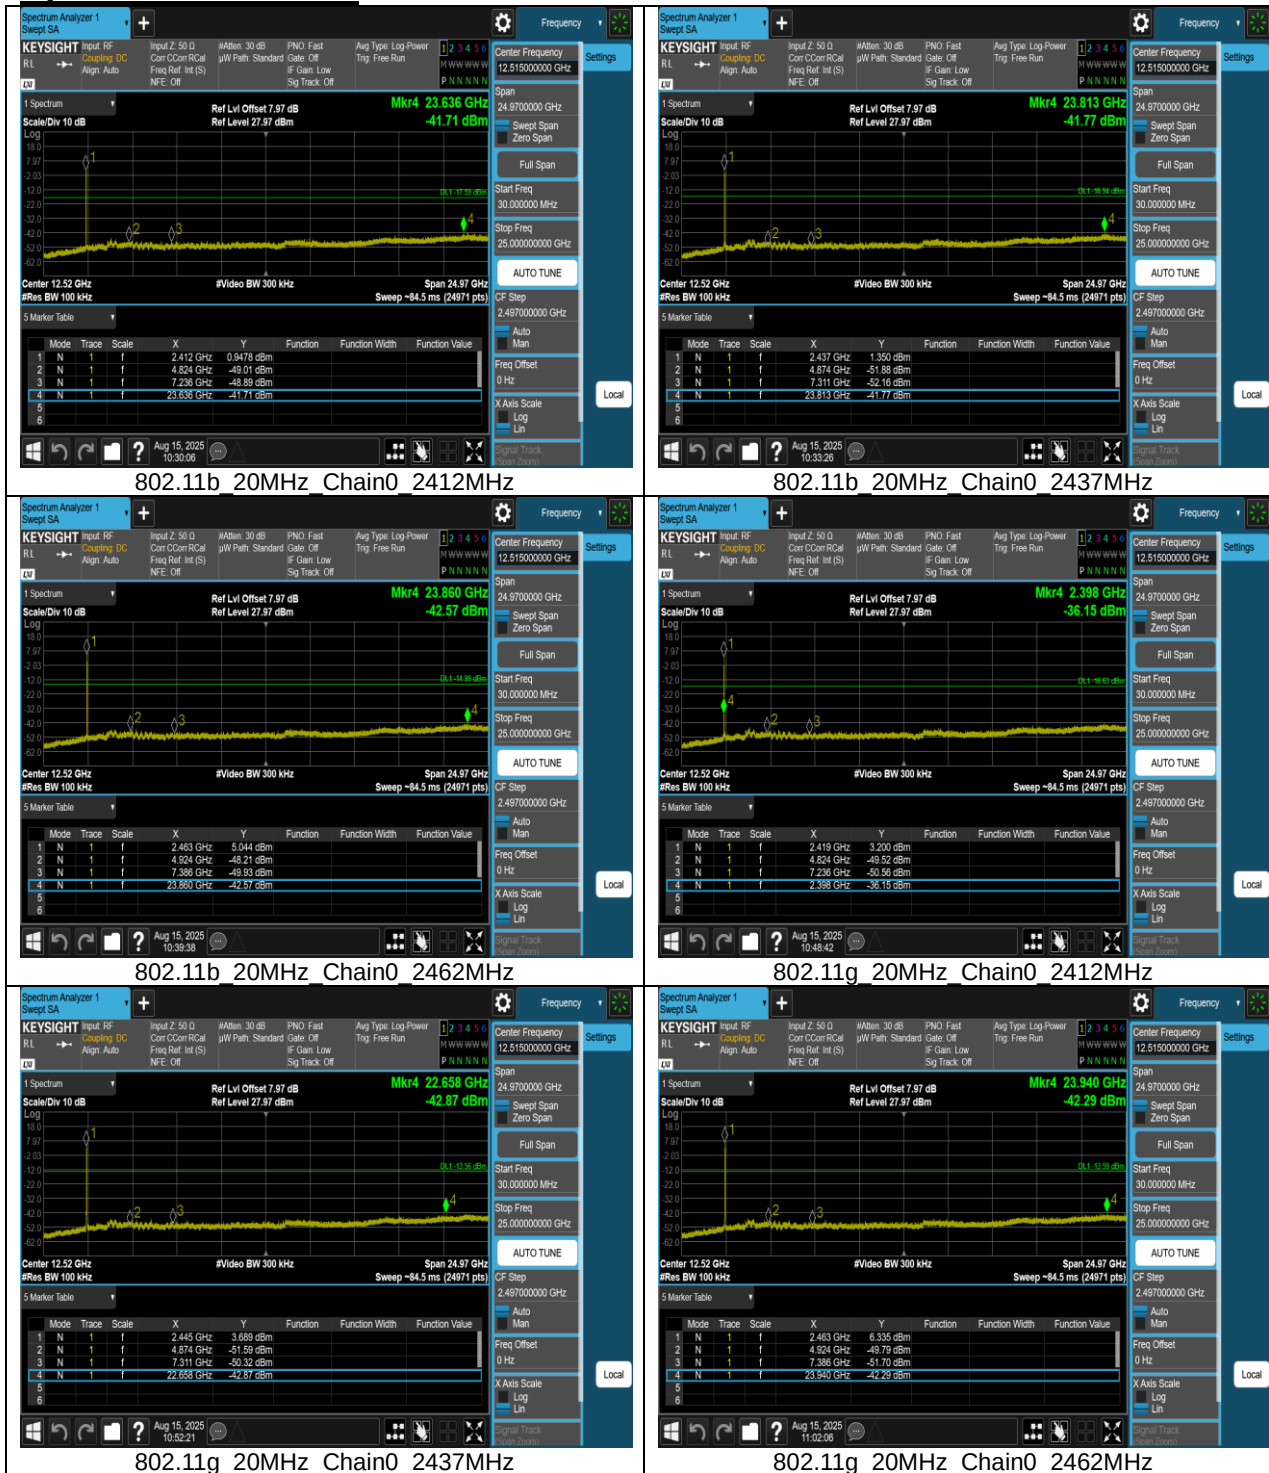

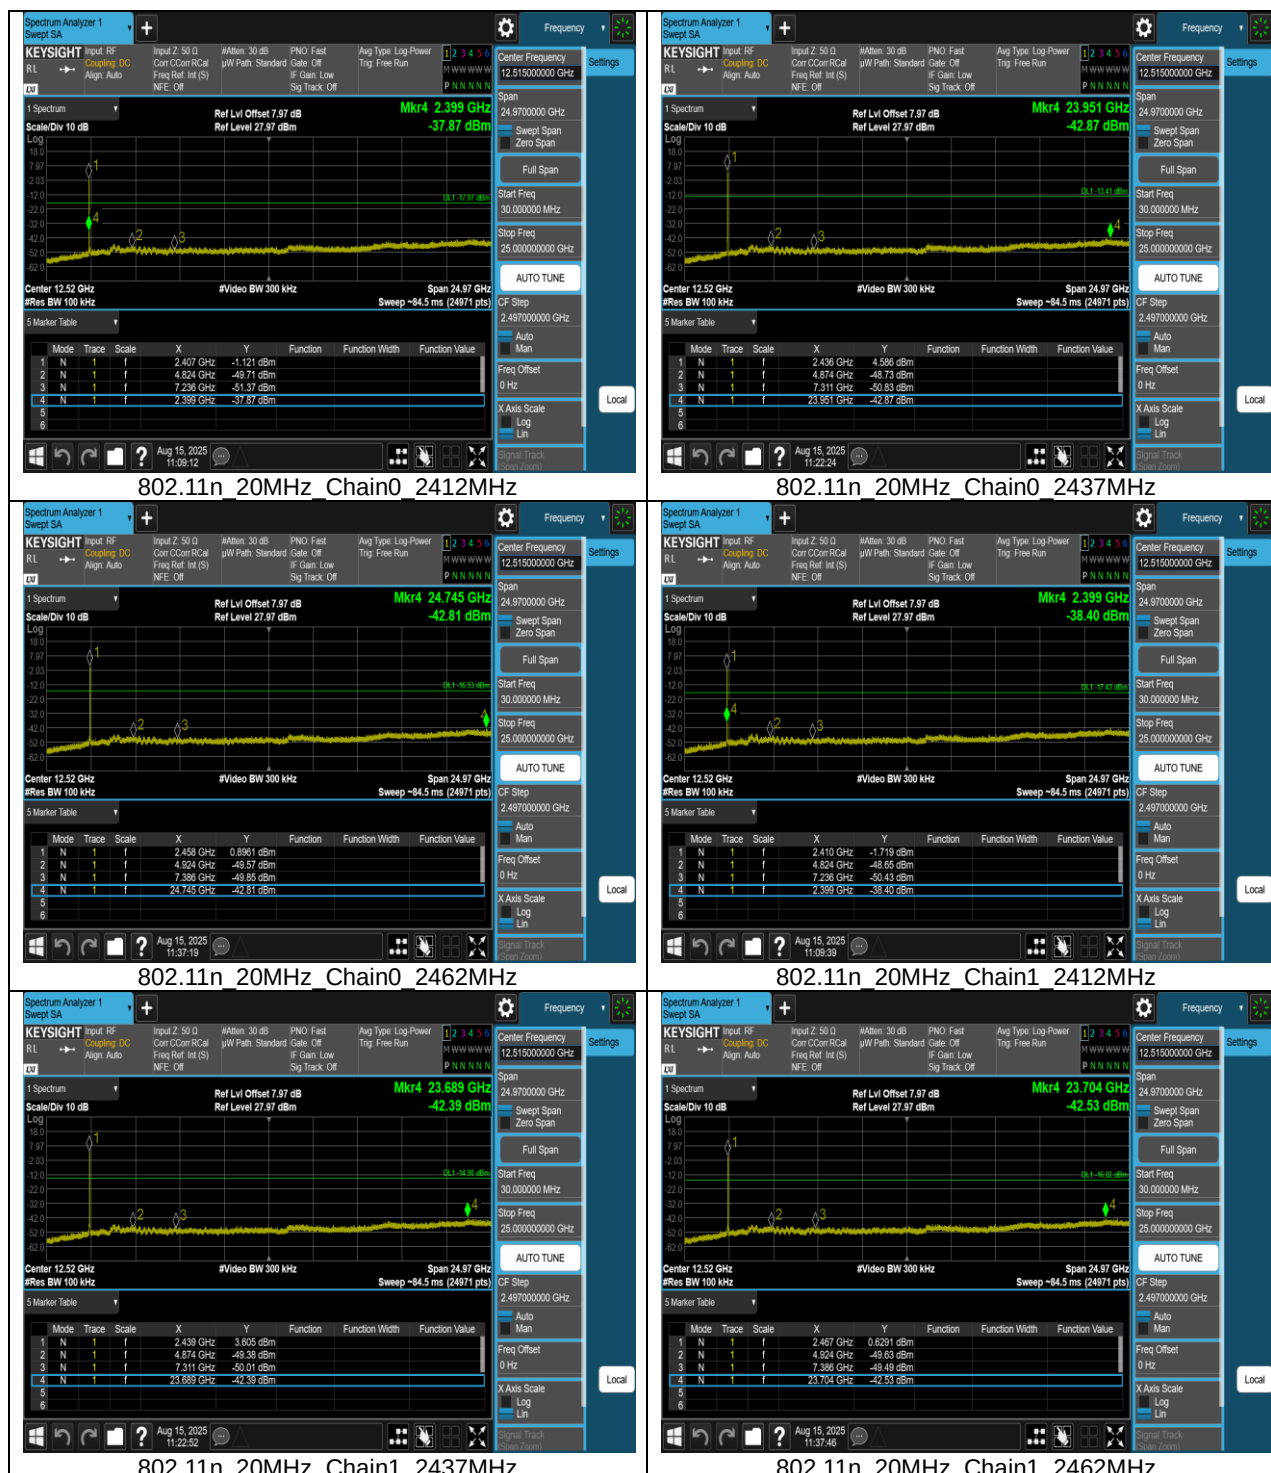





Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 47 / 108
Rev.: 01

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 48 / 108
Rev.: 01

4.6.2 Test Procedure

Test method Refer as ANSI C63.10-2020.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020+, and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,

Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq 98\%$, VBW=10Hz.

·If Duty Cycle $< 98\%$, VBW=1/T.


6. Data result :

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

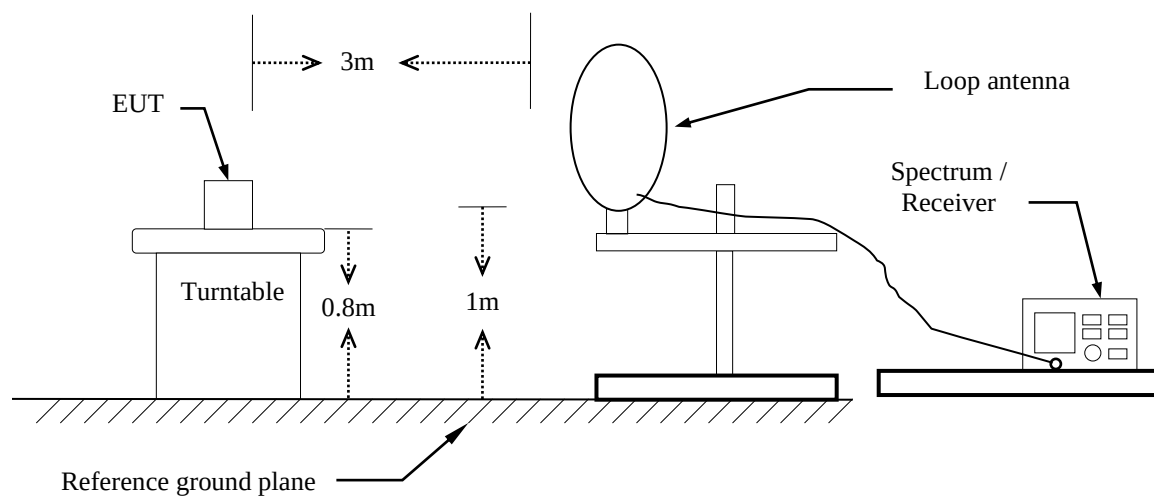

30MHz ~ 1GHz

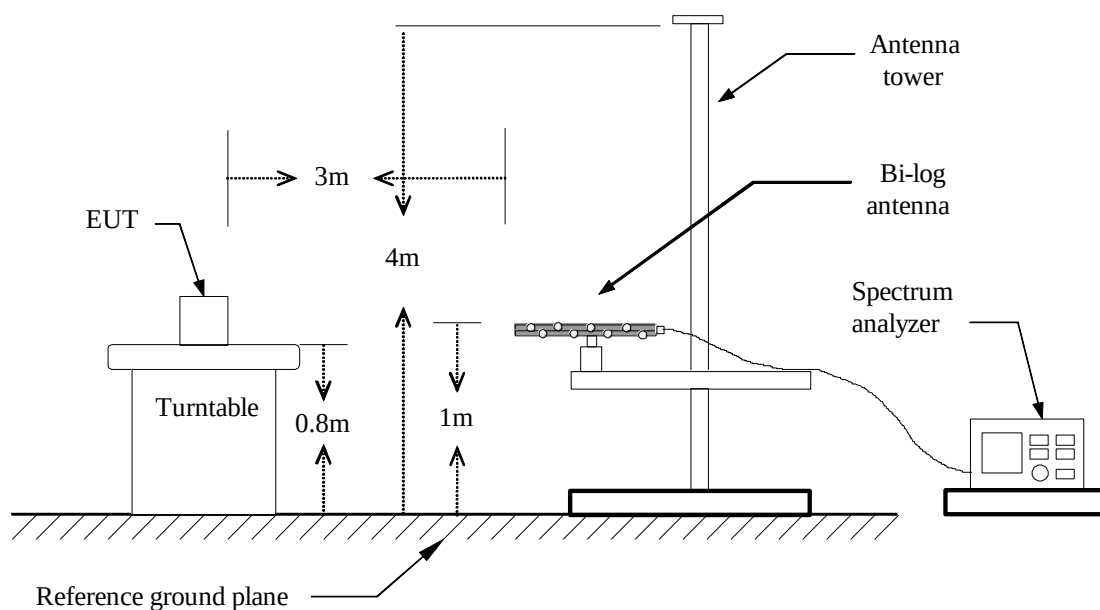

Above 1 GHz

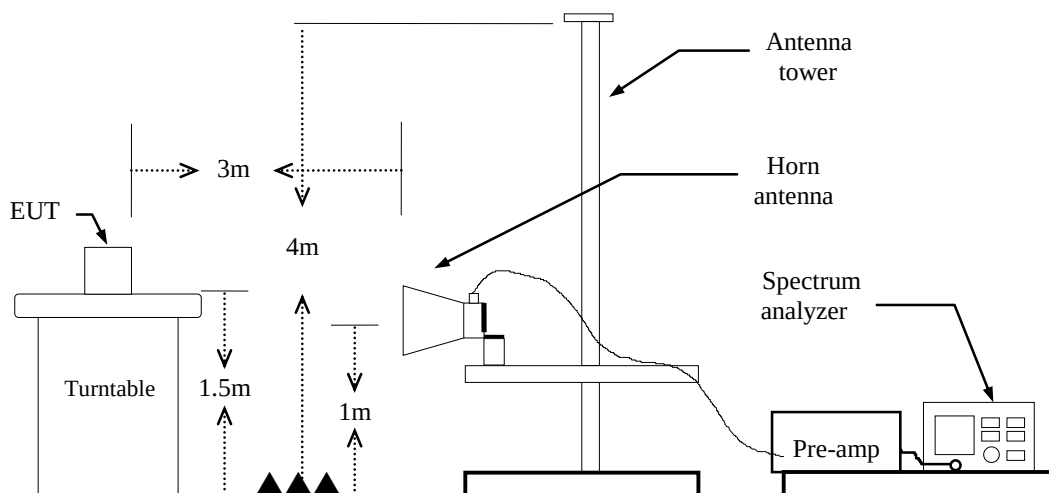




Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 51 / 108
Rev.: 01

4.6.4 Test Result

Band Edge Test Data

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

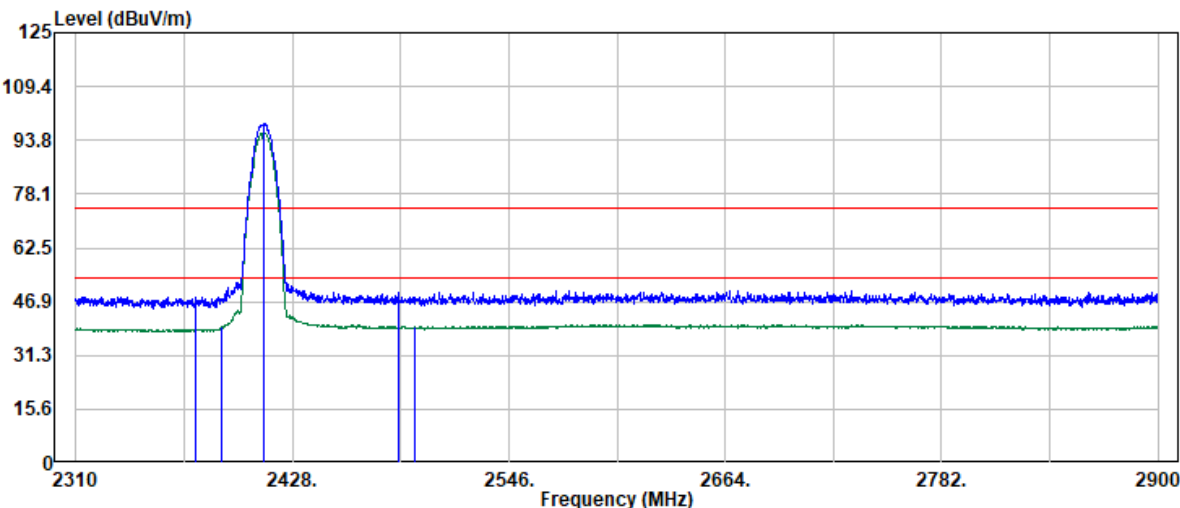


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2375.47	42.11	6.23	48.34	74.00	-25.66	Peak
2389.62	33.20	6.32	39.52	54.00	-14.48	Average
2412.00	92.09	6.40	98.49	--	--	Peak
2412.00	89.36	6.40	95.76	--	--	Average
2486.16	42.85	6.79	49.64	74.00	-24.36	Peak
2494.61	32.86	6.81	39.67	54.00	-14.33	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 52 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

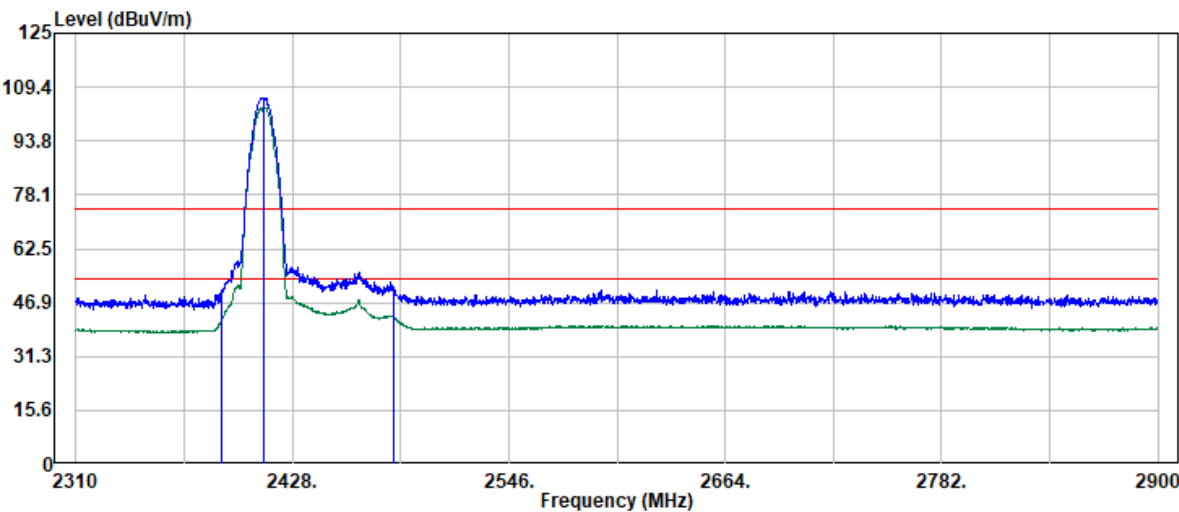

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.82	44.32	6.32	50.64	74.00	-23.36	Peak
2389.82	36.11	6.32	42.43	54.00	-11.57	Average
2412.00	99.81	6.40	106.21	--	--	Peak
2412.00	97.06	6.40	103.46	--	--	Average
2483.50	35.64	6.76	42.40	54.00	-11.60	Average
2483.60	44.35	6.77	51.12	74.00	-22.88	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 53 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

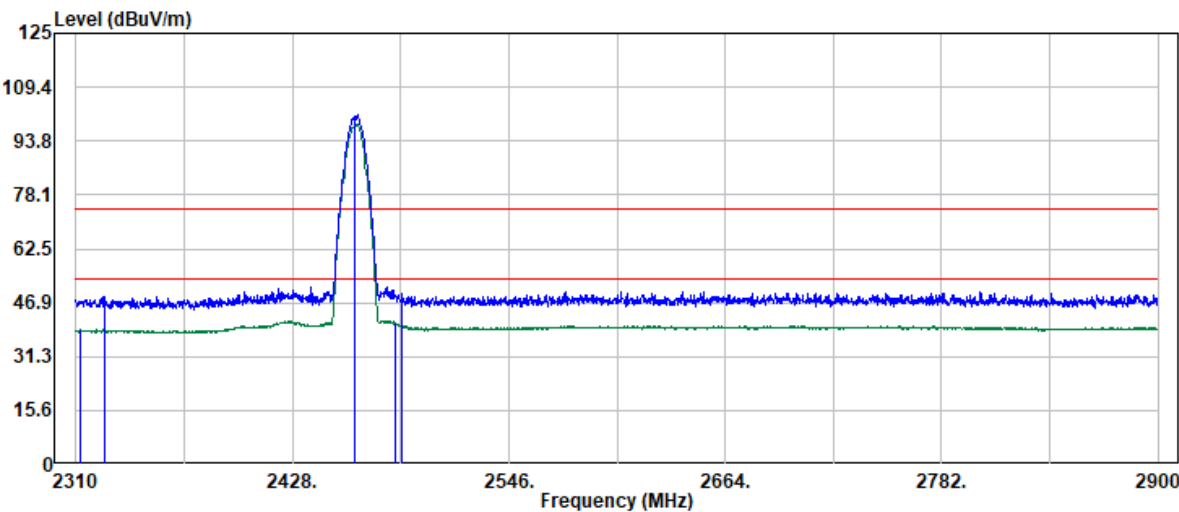

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2312.75	32.57	6.36	38.93	54.00	-15.07	Average
2325.34	42.46	6.25	48.71	74.00	-25.29	Peak
2462.00	94.66	6.54	101.20	--	--	Peak
2462.00	92.04	6.54	98.58	--	--	Average
2483.80	34.28	6.77	41.05	54.00	-12.95	Average
2487.92	42.83	6.81	49.64	74.00	-24.36	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 54 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

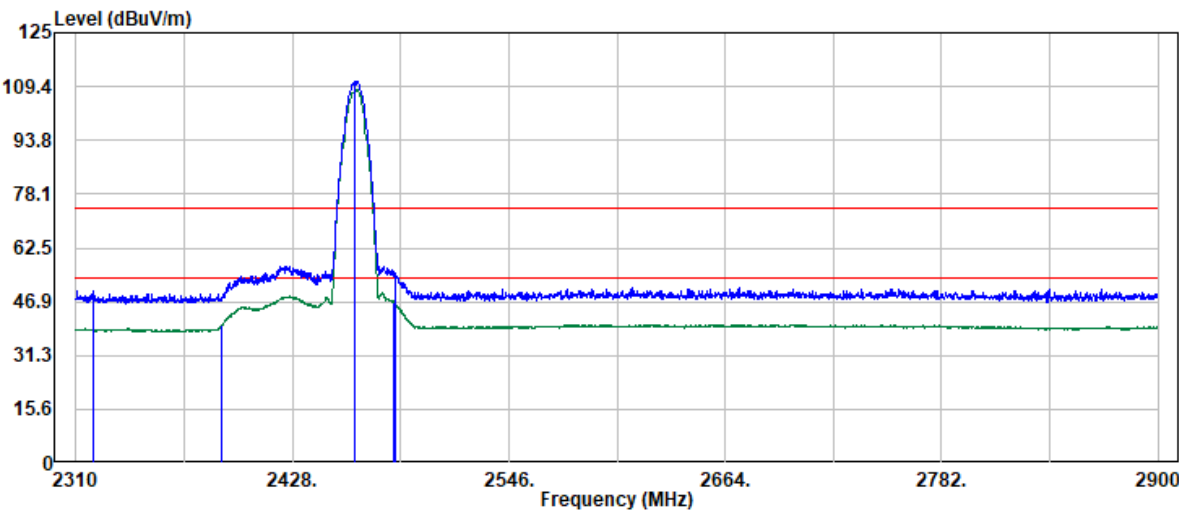

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2319.24	43.54	6.28	49.82	74.00	-24.18	Peak
2389.62	33.89	6.32	40.21	54.00	-13.79	Average
2462.00	104.54	6.54	111.08	--	--	Peak
2462.00	101.88	6.54	108.42	--	--	Average
2483.60	40.00	6.77	46.77	54.00	-7.23	Average
2483.80	48.32	6.77	55.09	74.00	-18.91	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 55 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

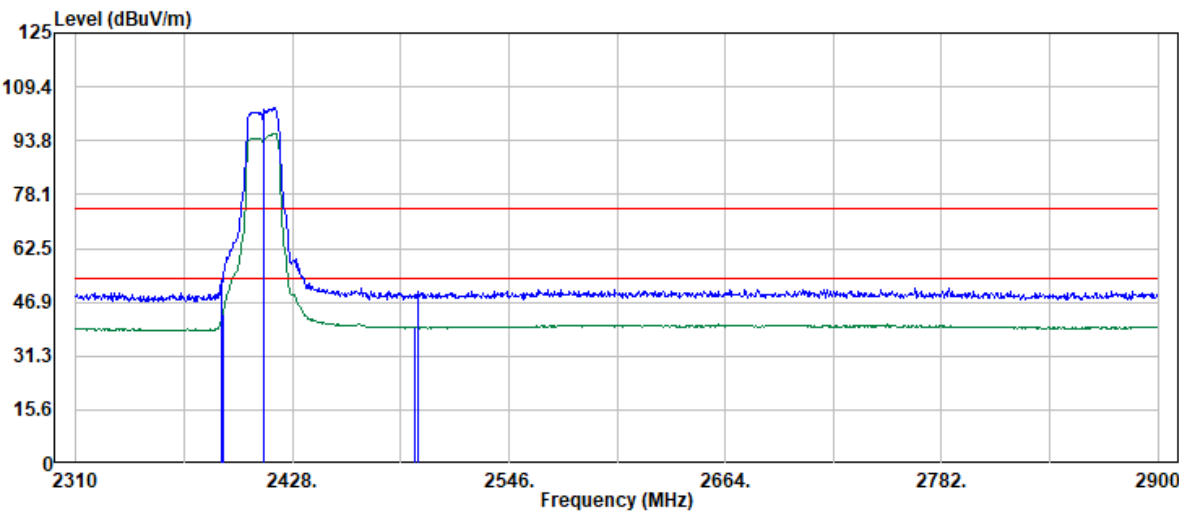

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	46.77	6.32	53.09	74.00	-20.91	Peak
2389.93	36.85	6.32	43.17	54.00	-10.83	Average
2412.00	97.01	6.40	103.41	--	--	Peak
2412.00	89.47	6.40	95.87	--	--	Average
2494.34	32.89	6.81	39.70	54.00	-14.30	Average
2496.34	43.11	6.82	49.93	74.00	-24.07	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 56 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

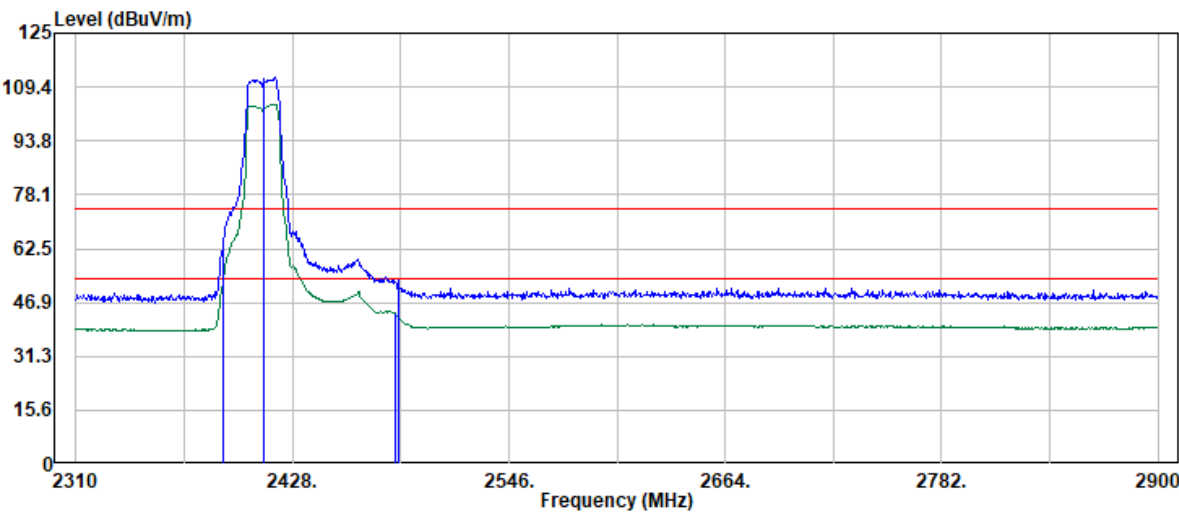

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	57.04	6.32	63.36	74.00	-10.64	Peak
2389.93	46.17	6.32	52.49	54.00	-1.51	Average
2412.00	105.65	6.40	112.05	--	--	Peak
2412.00	98.06	6.40	104.46	--	--	Average
2483.85	36.89	6.77	43.66	54.00	-10.34	Average
2485.85	46.28	6.79	53.07	74.00	-20.93	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 57 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: G_CH0	Temp./Humi.	: 25.4/54
Frequency	: 2417 MHz	Antenna Pol.	: Vertical
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

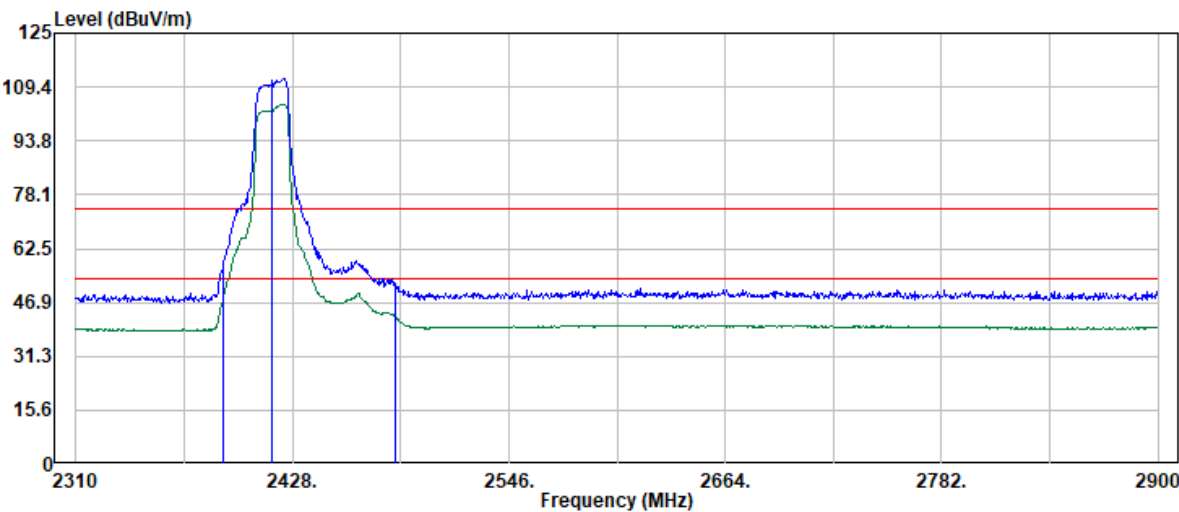


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	50.47	6.32	56.79	74.00	-17.21	Peak
2389.93	41.18	6.32	47.50	54.00	-6.50	Average
2417.00	105.27	6.45	111.72	--	--	Peak
2417.00	97.81	6.45	104.26	--	--	Average
2483.85	36.24	6.77	43.01	54.00	-10.99	Average
2484.35	45.44	6.76	52.20	74.00	-21.80	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 58 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: G_CH0	Temp./Humi.	: 25.4/54
Frequency	: 2417 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

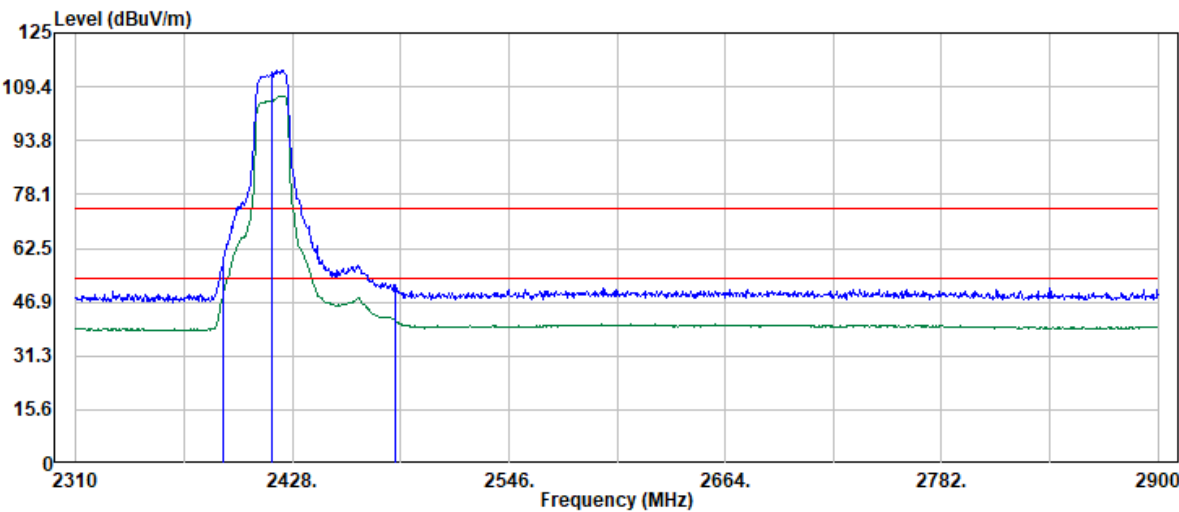


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	52.17	6.32	58.49	74.00	-15.51	Peak
2389.93	41.91	6.32	48.23	54.00	-5.77	Average
2417.00	107.58	6.45	114.03	--	--	Peak
2417.00	100.19	6.45	106.64	--	--	Average
2483.85	45.16	6.77	51.93	74.00	-22.07	Peak
2483.85	35.04	6.77	41.81	54.00	-12.19	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 59 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

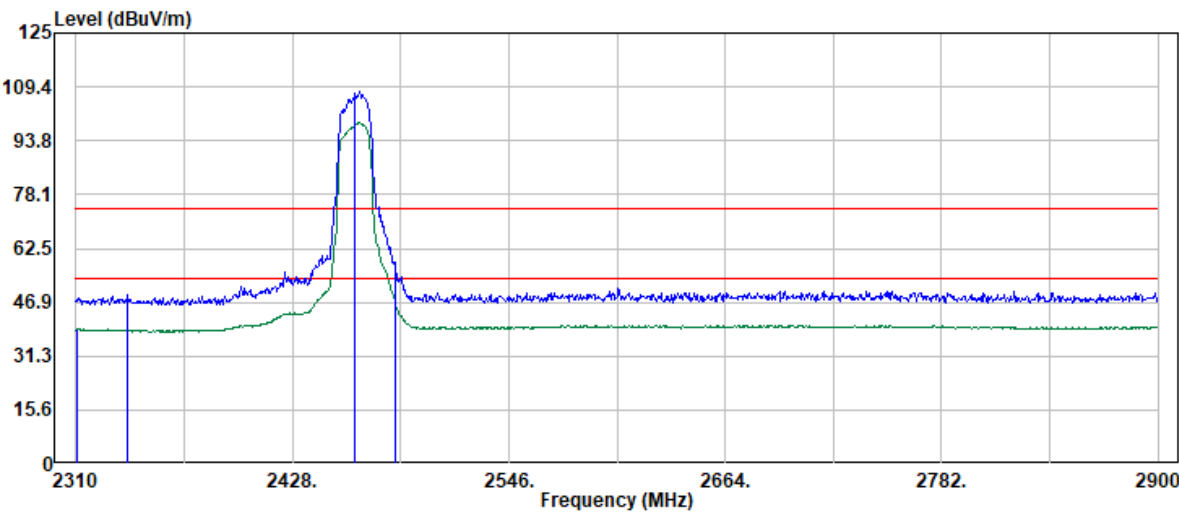


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.50	32.67	6.39	39.06	54.00	-14.94	Average
2338.48	42.84	6.21	49.05	74.00	-24.95	Peak
2462.00	101.55	6.54	108.09	--	--	Peak
2462.00	92.36	6.54	98.90	--	--	Average
2483.85	51.59	6.77	58.36	74.00	-15.64	Peak
2483.85	40.88	6.77	47.65	54.00	-6.35	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 60 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

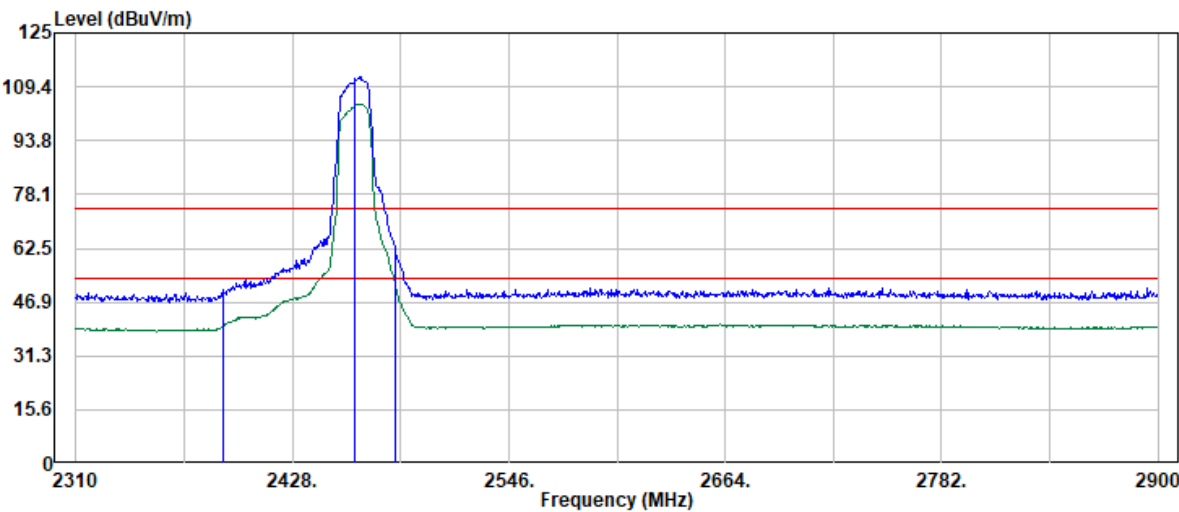

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	43.98	6.32	50.30	74.00	-23.70	Peak
2389.93	33.61	6.32	39.93	54.00	-14.07	Average
2462.00	105.61	6.54	112.15	--	--	Peak
2462.00	97.93	6.54	104.47	--	--	Average
2483.85	56.42	6.77	63.19	74.00	-10.81	Peak
2483.85	45.82	6.77	52.59	54.00	-1.41	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 61 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

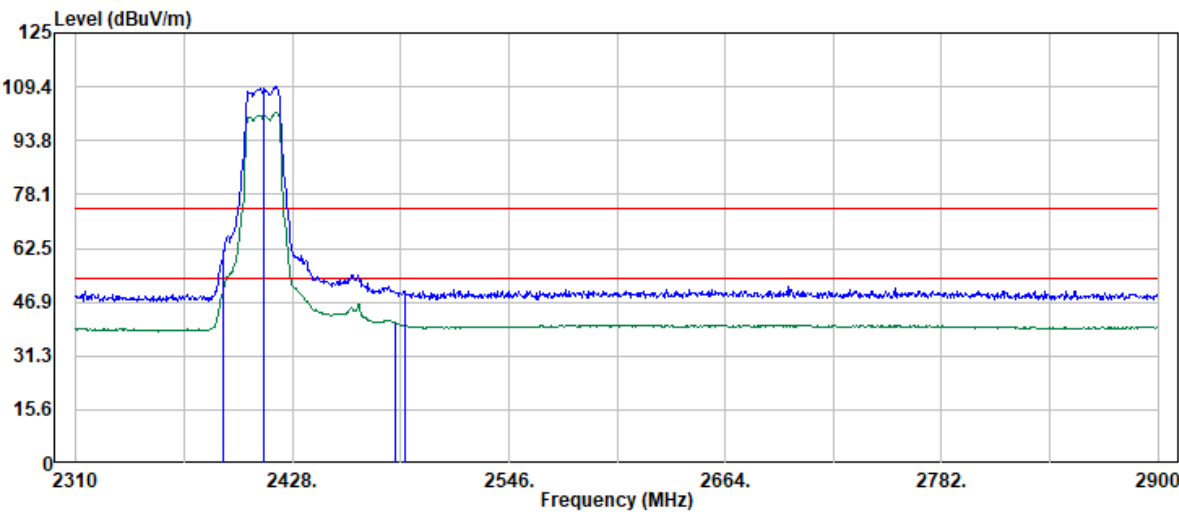

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	53.47	6.32	59.79	74.00	-14.21	Peak
2389.93	43.86	6.32	50.18	54.00	-3.82	Average
2412.00	102.90	6.40	109.30	--	--	Peak
2412.00	95.53	6.40	101.93	--	--	Average
2483.85	34.18	6.77	40.95	54.00	-13.05	Average
2489.35	43.29	6.81	50.10	74.00	-23.90	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 62 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

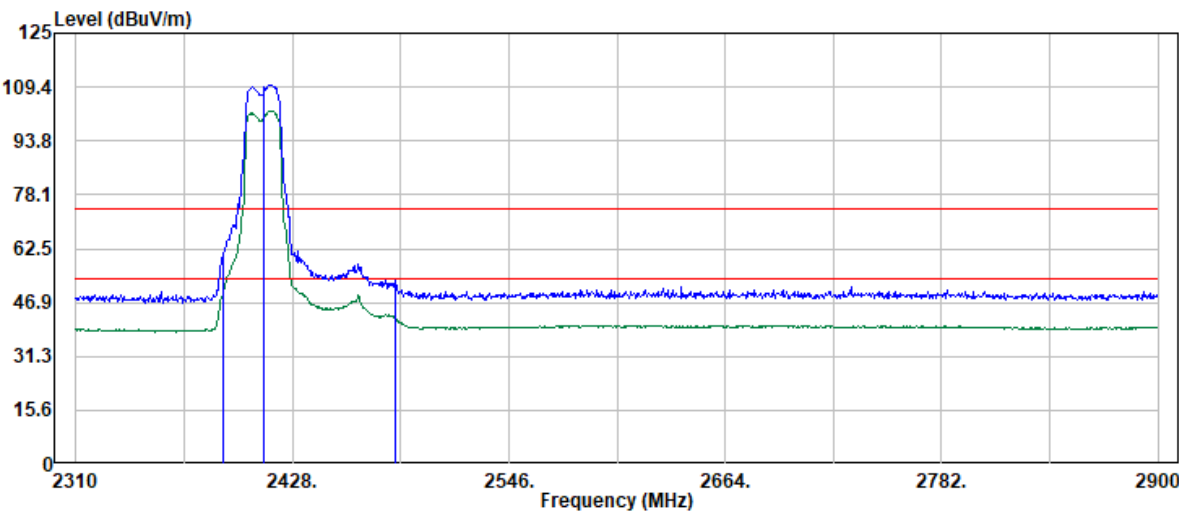

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	54.30	6.32	60.62	74.00	-13.38	Peak
2389.93	43.21	6.32	49.53	54.00	-4.47	Average
2412.00	103.56	6.40	109.96	--	--	Peak
2412.00	96.16	6.40	102.56	--	--	Average
2483.85	46.49	6.77	53.26	74.00	-20.74	Peak
2483.85	35.45	6.77	42.22	54.00	-11.78	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 63 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N20	Temp./Humi.	: 25.4/54
Frequency	: 2417 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

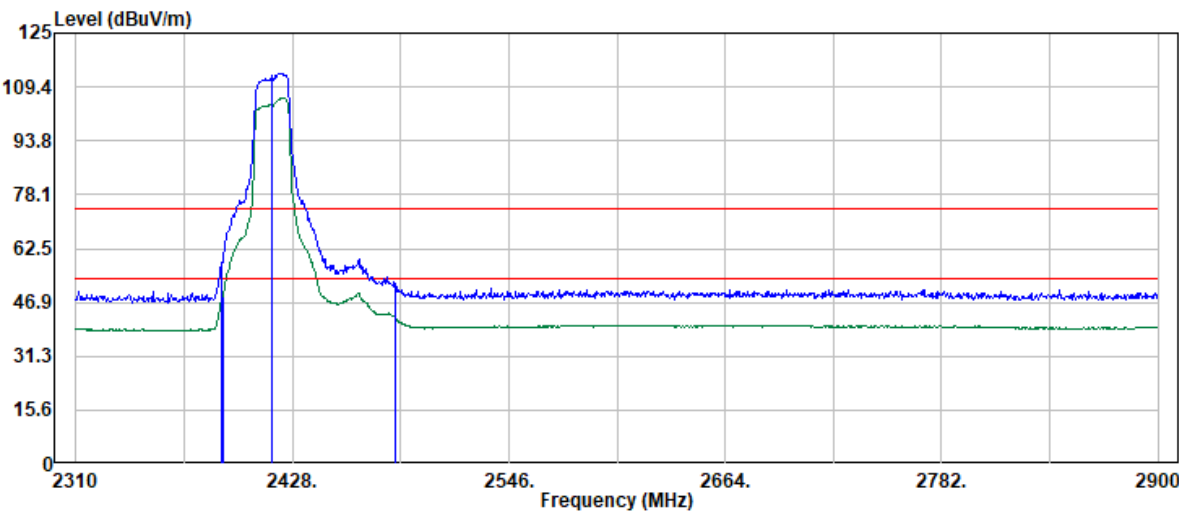

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	52.04	6.32	58.36	74.00	-15.64	Peak
2389.93	42.34	6.32	48.66	54.00	-5.34	Average
2417.00	106.96	6.45	113.41	--	--	Peak
2417.00	99.67	6.45	106.12	--	--	Average
2483.85	45.47	6.77	52.24	74.00	-21.76	Peak
2483.85	35.83	6.77	42.60	54.00	-11.40	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 64 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N20	Temp./Humi.	: 25.4/54
Frequency	: 2417 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

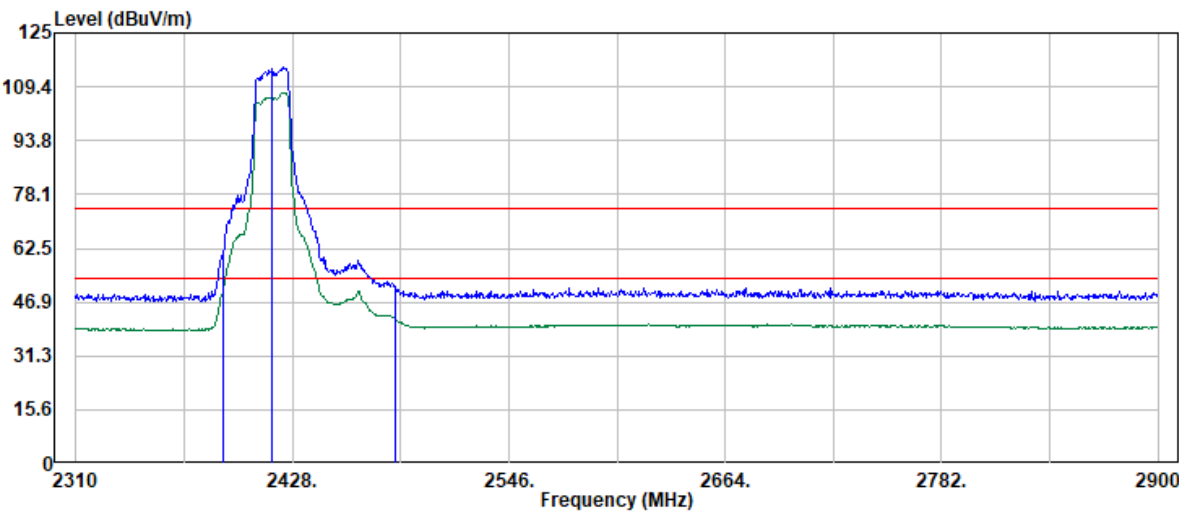


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	54.35	6.32	60.67	74.00	-13.33	Peak
2389.93	43.88	6.32	50.20	54.00	-3.80	Average
2417.00	108.54	6.45	114.99	--	--	Peak
2417.00	101.17	6.45	107.62	--	--	Average
2483.85	35.38	6.77	42.15	54.00	-11.85	Average
2484.35	44.66	6.76	51.42	74.00	-22.58	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 65 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N20	Temp./Humi.	: 25.4/54
Frequency	: 2457 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

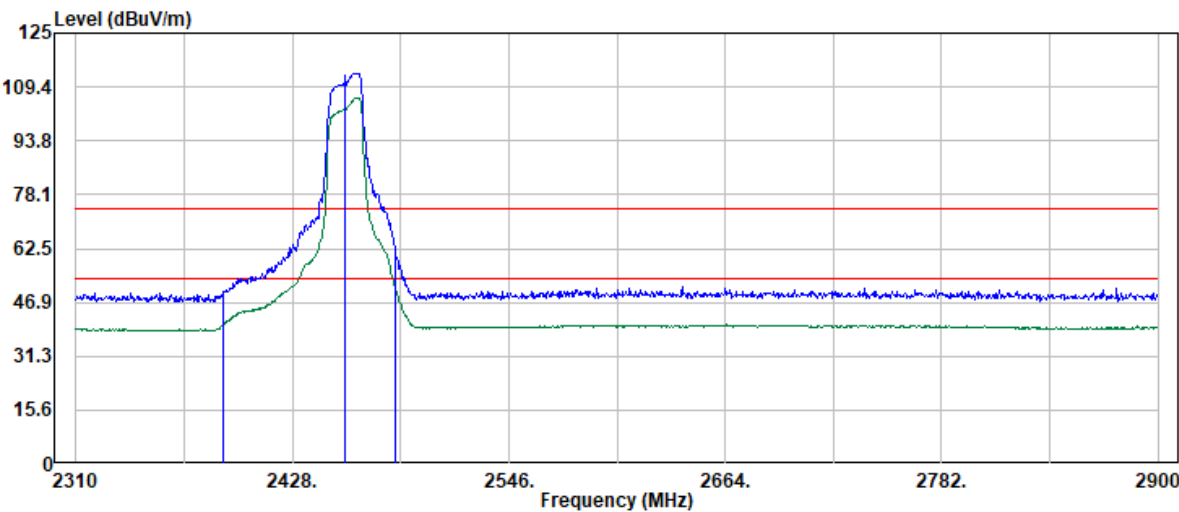


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	43.19	6.32	49.51	74.00	-24.49	Peak
2389.93	33.86	6.32	40.18	54.00	-13.82	Average
2457.00	106.82	6.55	113.37	--	--	Peak
2457.00	99.54	6.55	106.09	--	--	Average
2483.85	56.24	6.77	63.01	74.00	-10.99	Peak
2483.85	44.78	6.77	51.55	54.00	-2.45	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 66 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N20	Temp./Humi.	: 25.4/54
Frequency	: 2457 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17		

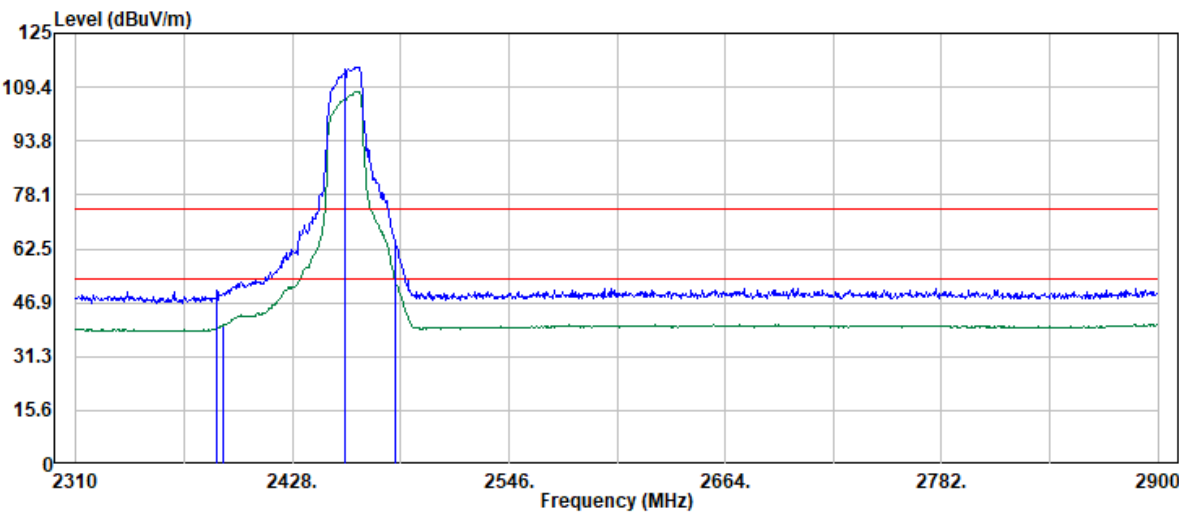


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.94	43.97	6.30	50.27	74.00	-23.73	Peak
2389.93	33.96	6.32	40.28	54.00	-13.72	Average
2457.00	108.67	6.55	115.22	--	--	Peak
2457.00	101.59	6.55	108.14	--	--	Average
2483.85	57.73	6.77	64.50	74.00	-9.50	Peak
2483.85	46.41	6.77	53.18	54.00	-0.82	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 67 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14.5		

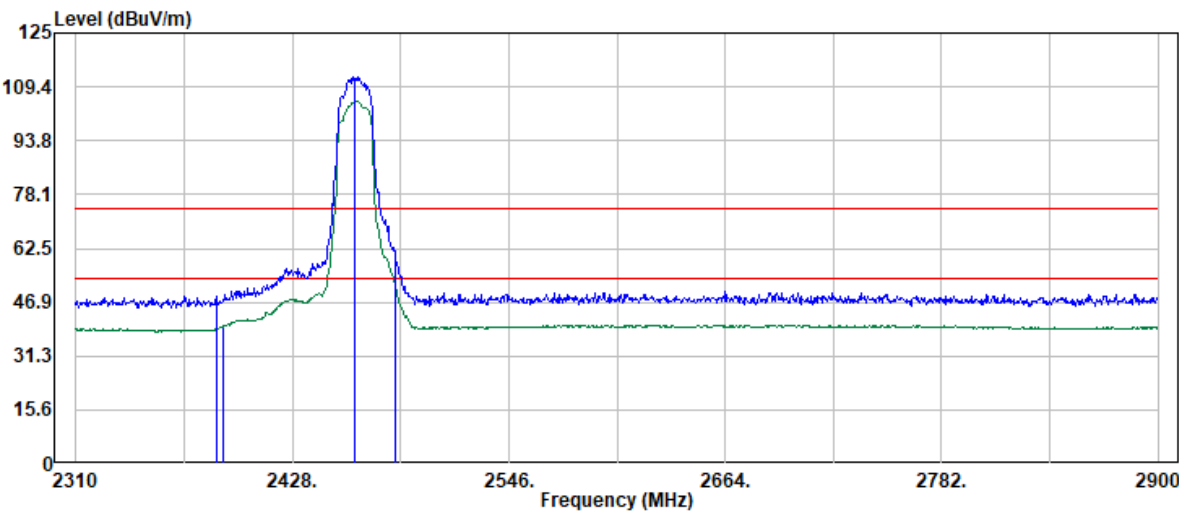


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2386.44	42.53	6.29	48.82	74.00	-25.18	Peak
2389.93	33.42	6.32	39.74	54.00	-14.26	Average
2462.00	105.63	6.54	112.17	--	--	Peak
2462.00	98.62	6.54	105.16	--	--	Average
2483.85	54.80	6.77	61.57	74.00	-12.43	Peak
2483.85	45.82	6.77	52.59	54.00	-1.41	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 68 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14.5		

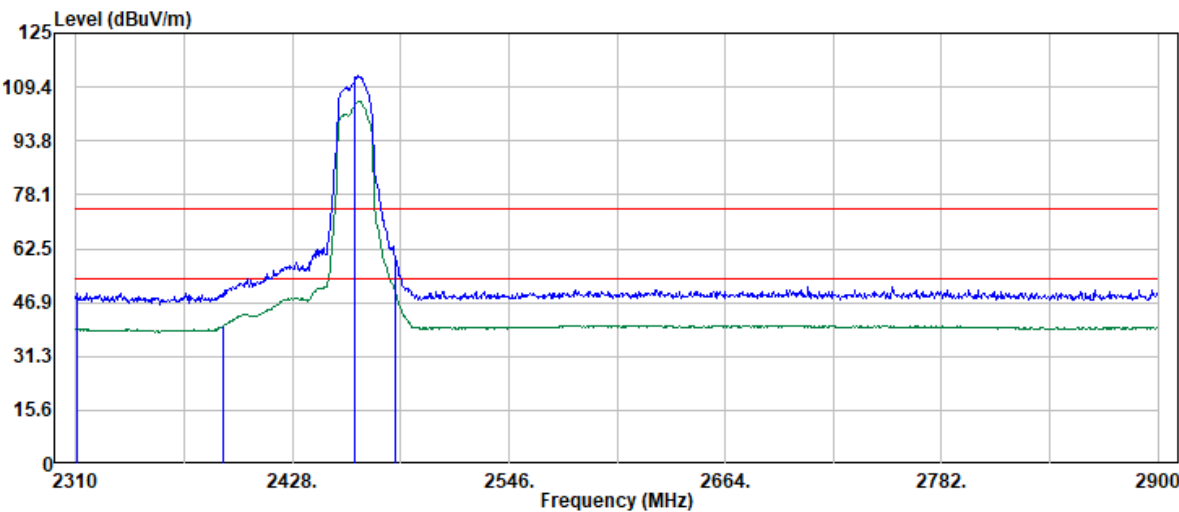


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2310.50	43.15	6.39	49.54	74.00	-24.46	Peak
2389.93	33.61	6.32	39.93	54.00	-14.07	Average
2462.00	106.13	6.54	112.67	--	--	Peak
2462.00	98.56	6.54	105.10	--	--	Average
2483.85	53.55	6.77	60.32	74.00	-13.68	Peak
2483.85	43.83	6.77	50.60	54.00	-3.40	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 69 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2422 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

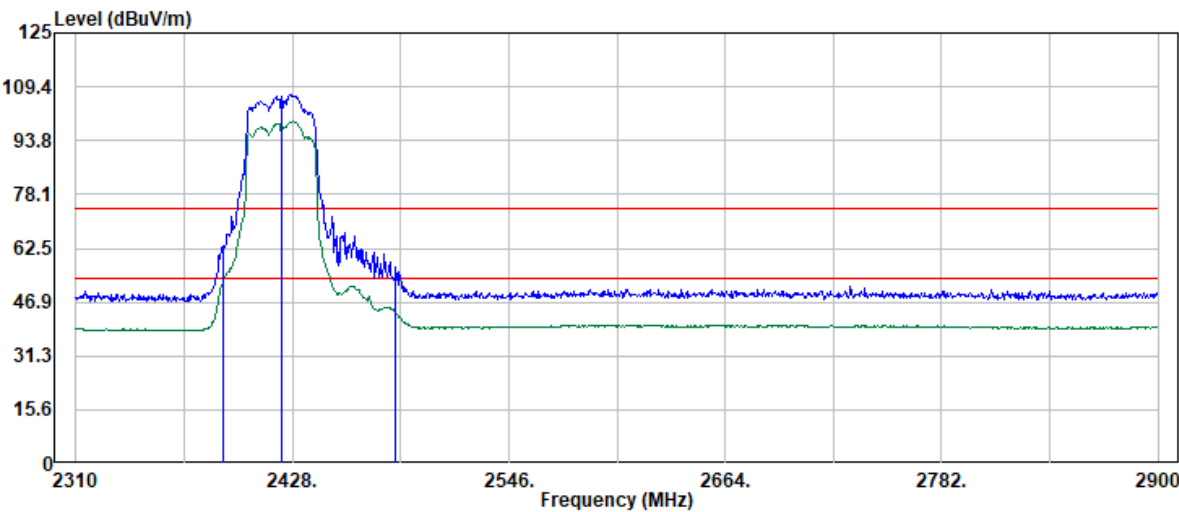

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	56.80	6.32	63.12	74.00	-10.88	Peak
2389.93	46.05	6.32	52.37	54.00	-1.63	Average
2422.00	100.45	6.47	106.92	--	--	Peak
2422.00	92.83	6.47	99.30	--	--	Average
2483.85	37.37	6.77	44.14	54.00	-9.86	Average
2484.35	50.08	6.76	56.84	74.00	-17.16	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 70 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2422 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

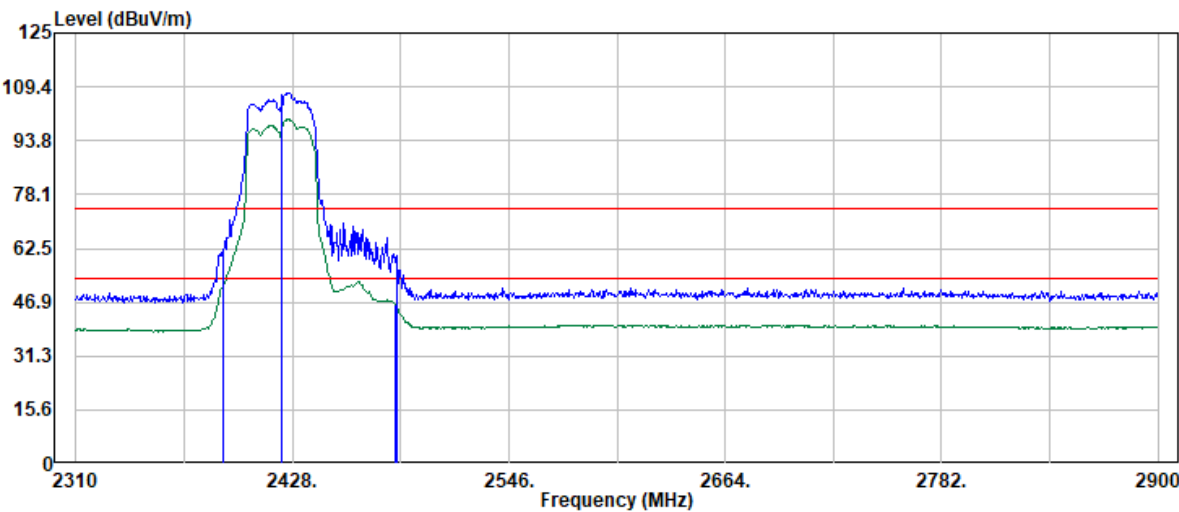

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	56.12	6.32	62.44	74.00	-11.56	Peak
2389.93	45.27	6.32	51.59	54.00	-2.41	Average
2422.00	101.27	6.47	107.74	--	--	Peak
2422.00	93.49	6.47	99.96	--	--	Average
2483.85	39.53	6.77	46.30	54.00	-7.70	Average
2484.85	53.58	6.77	60.35	74.00	-13.65	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 71 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2427 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 11.5		

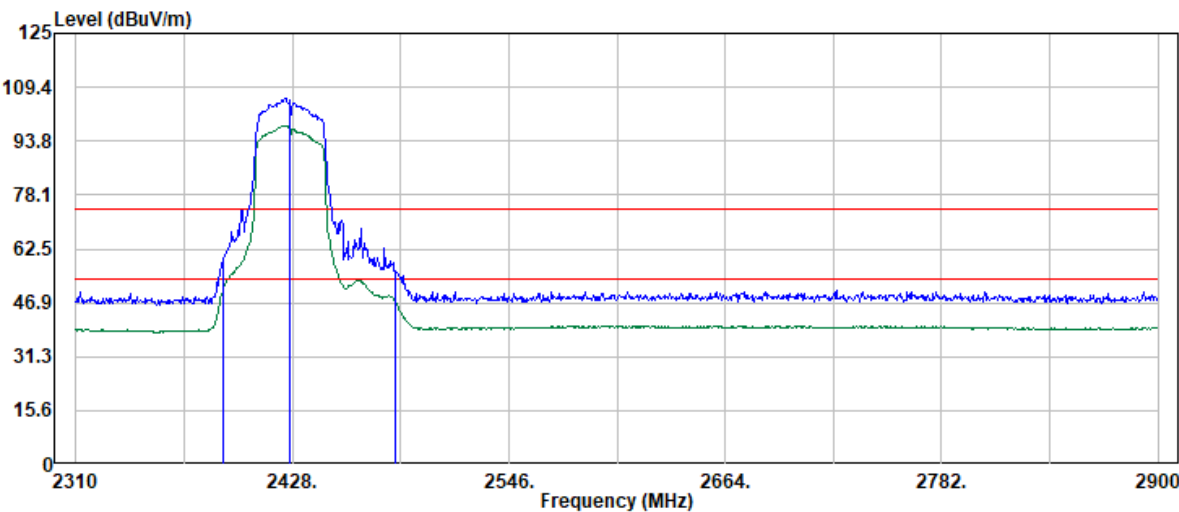

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	53.34	6.32	59.66	74.00	-14.34	Peak
2389.93	43.77	6.32	50.09	54.00	-3.91	Average
2427.00	99.72	6.47	106.19	--	--	Peak
2427.00	91.88	6.47	98.35	--	--	Average
2483.85	40.91	6.77	47.68	54.00	-6.32	Average
2484.35	49.45	6.76	56.21	74.00	-17.79	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 72 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2427 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 11.5		

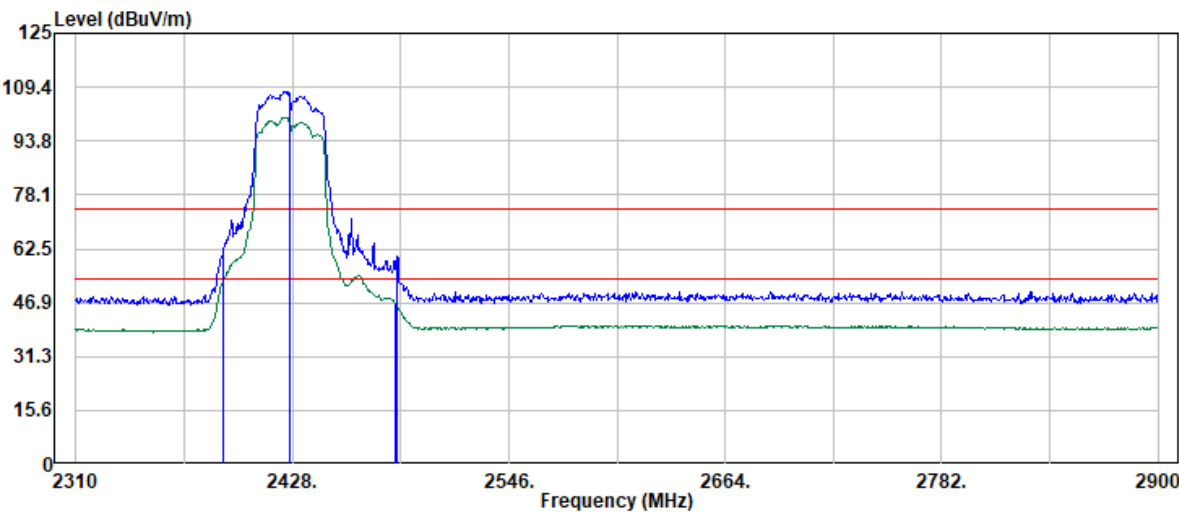


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	55.08	6.32	61.40	74.00	-12.60	Peak
2389.93	46.40	6.32	52.72	54.00	-1.28	Average
2427.00	101.50	6.47	107.97	--	--	Peak
2427.00	94.05	6.47	100.52	--	--	Average
2483.85	40.06	6.77	46.83	54.00	-7.17	Average
2485.35	53.79	6.78	60.57	74.00	-13.43	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 73 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2432 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

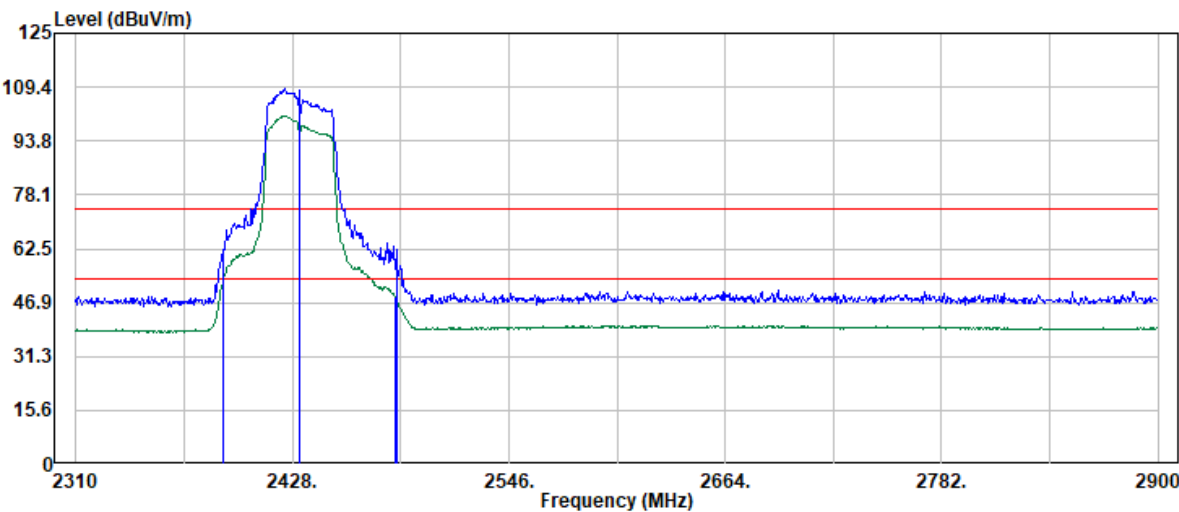

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	55.86	6.32	62.18	74.00	-11.82	Peak
2389.93	46.38	6.32	52.70	54.00	-1.30	Average
2432.00	102.38	6.46	108.84	--	--	Peak
2432.00	94.61	6.46	101.07	--	--	Average
2483.85	41.73	6.77	48.50	54.00	-5.50	Average
2484.85	55.64	6.77	62.41	74.00	-11.59	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 74 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2432 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

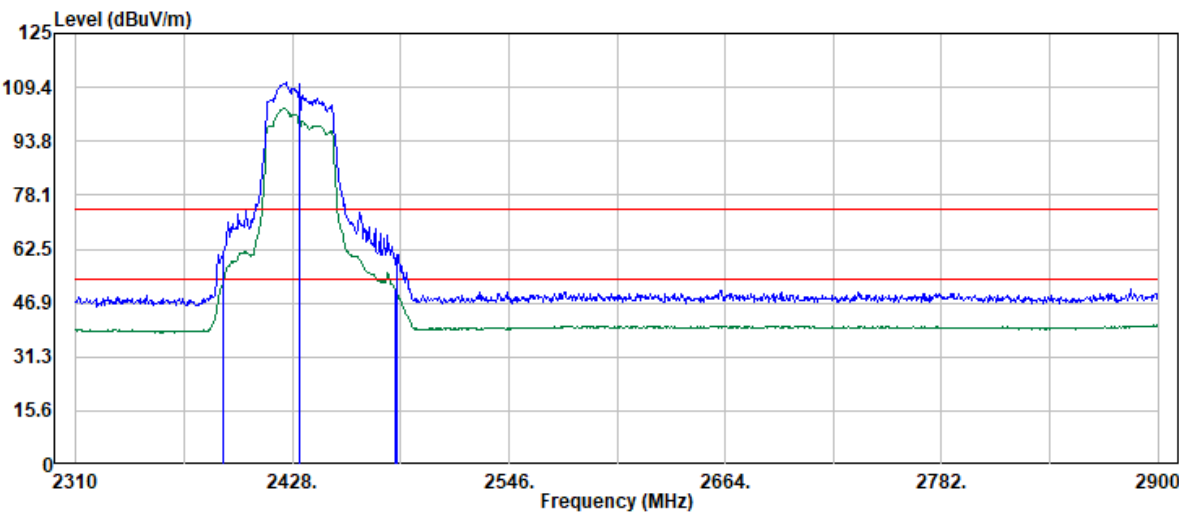

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	55.01	6.32	61.33	74.00	-12.67	Peak
2389.93	46.49	6.32	52.81	54.00	-1.19	Average
2432.00	104.17	6.46	110.63	--	--	Peak
2432.00	96.72	6.46	103.18	--	--	Average
2483.85	44.13	6.77	50.90	54.00	-3.10	Average
2485.35	54.29	6.78	61.07	74.00	-12.93	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 75 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-26
Operation Band	: N40	Temp./Humi.	: 25.6/51
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

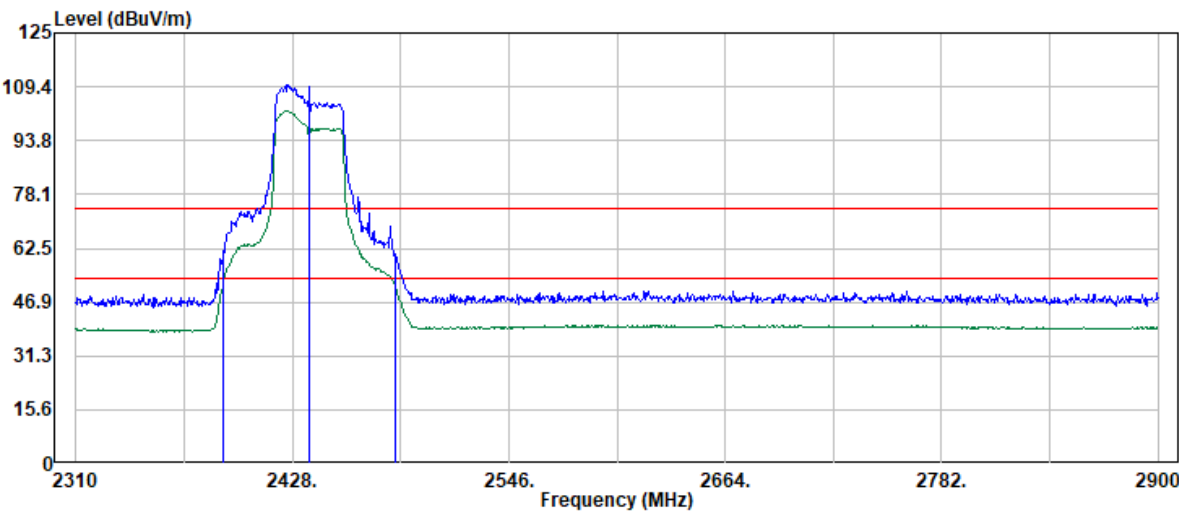

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	53.43	6.32	59.75	74.00	-14.25	Peak
2389.93	45.01	6.32	51.33	54.00	-2.67	Average
2437.00	103.55	6.47	110.02	--	--	Peak
2437.00	95.84	6.47	102.31	--	--	Average
2483.85	53.91	6.77	60.68	74.00	-13.32	Peak
2483.85	45.25	6.77	52.02	54.00	-1.98	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 76 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-26
Operation Band	: N40	Temp./Humi.	: 25.6/51
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

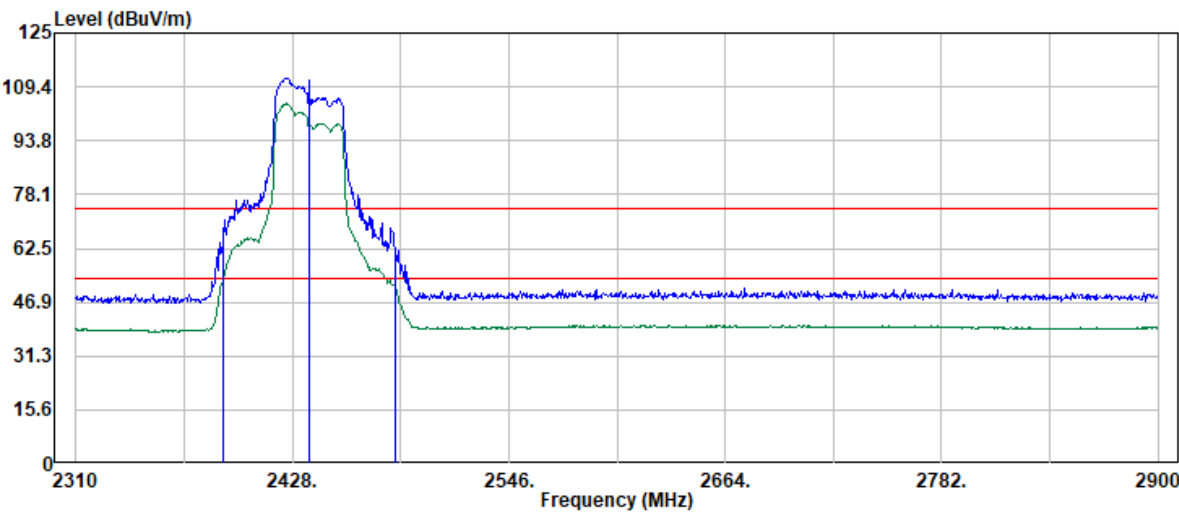

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	58.46	6.32	64.78	74.00	-9.22	Peak
2389.93	46.47	6.32	52.79	54.00	-1.21	Average
2437.00	105.55	6.47	112.02	--	--	Peak
2437.00	98.08	6.47	104.55	--	--	Average
2483.85	44.83	6.77	51.60	54.00	-2.40	Average
2484.35	55.79	6.76	62.55	74.00	-11.45	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 77 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2442 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

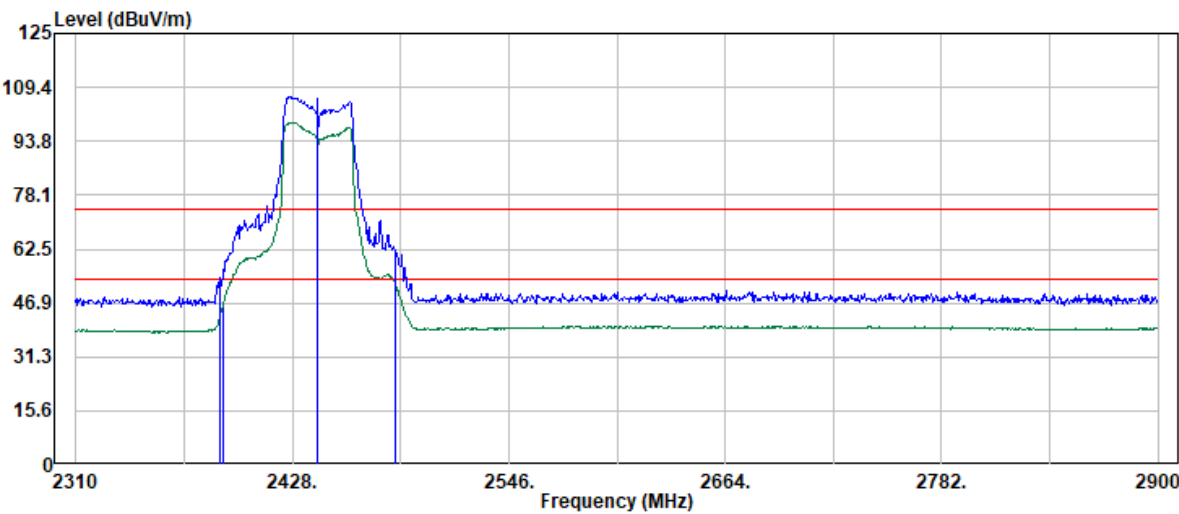

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.43	48.16	6.31	54.47	74.00	-19.53	Peak
2389.93	39.52	6.32	45.84	54.00	-8.16	Average
2442.00	100.34	6.48	106.82	--	--	Peak
2442.00	92.78	6.48	99.26	--	--	Average
2483.85	55.28	6.77	62.05	74.00	-11.95	Peak
2483.85	46.06	6.77	52.83	54.00	-1.17	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 78 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2442 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

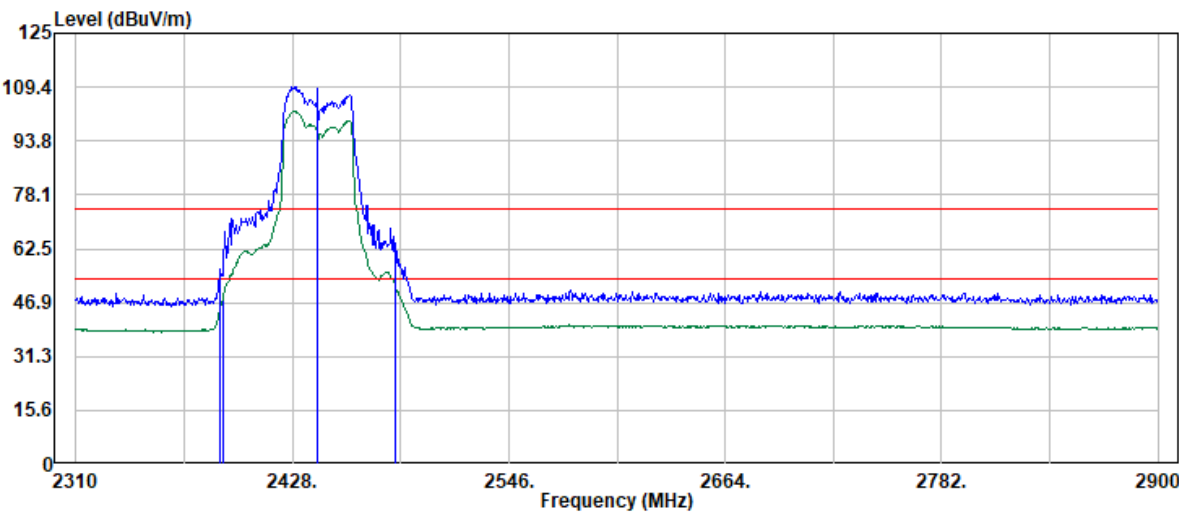

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.93	50.12	6.32	56.44	74.00	-17.56	Peak
2389.93	41.38	6.32	47.70	54.00	-6.30	Average
2442.00	103.03	6.48	109.51	--	--	Peak
2442.00	95.84	6.48	102.32	--	--	Average
2483.85	56.34	6.77	63.11	74.00	-10.89	Peak
2483.85	45.38	6.77	52.15	54.00	-1.85	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 79 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2447 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10		

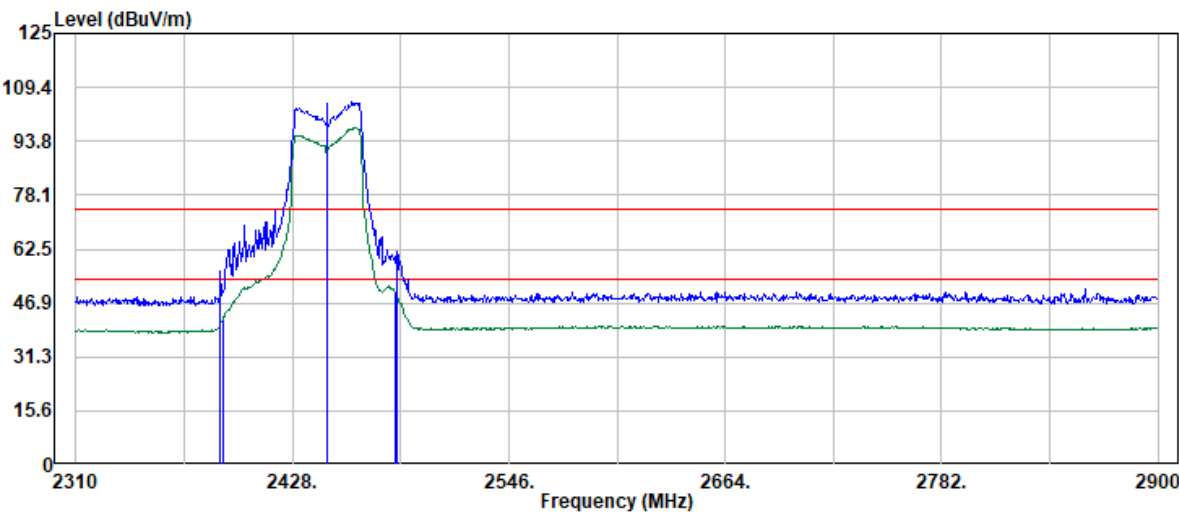

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.93	49.70	6.32	56.02	74.00	-17.98	Peak
2389.93	35.74	6.32	42.06	54.00	-11.94	Average
2447.00	98.58	6.53	105.11	--	--	Peak
2447.00	91.02	6.53	97.55	--	--	Average
2483.85	43.26	6.77	50.03	54.00	-3.97	Average
2485.35	54.90	6.78	61.68	74.00	-12.32	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 80 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N40	Temp./Humi.	: 25.4/54
Frequency	: 2447 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10		

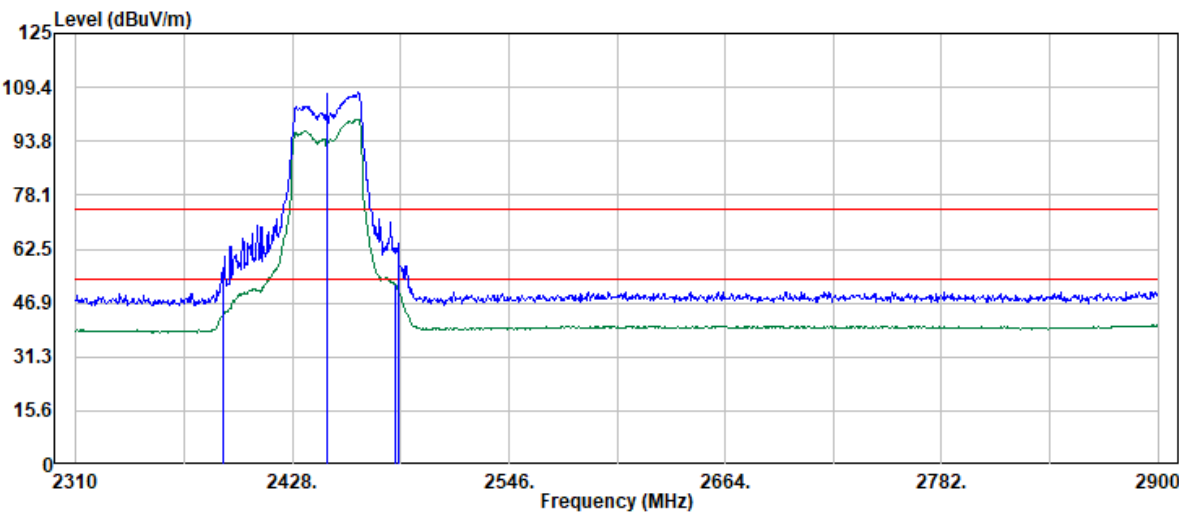

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	50.63	6.32	56.95	74.00	-17.05	Peak
2389.93	37.04	6.32	43.36	54.00	-10.64	Average
2447.00	101.26	6.53	107.79	--	--	Peak
2447.00	93.60	6.53	100.13	--	--	Average
2484.35	45.38	6.76	52.14	54.00	-1.86	Average
2485.85	57.54	6.79	64.33	74.00	-9.67	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 81 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2452 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

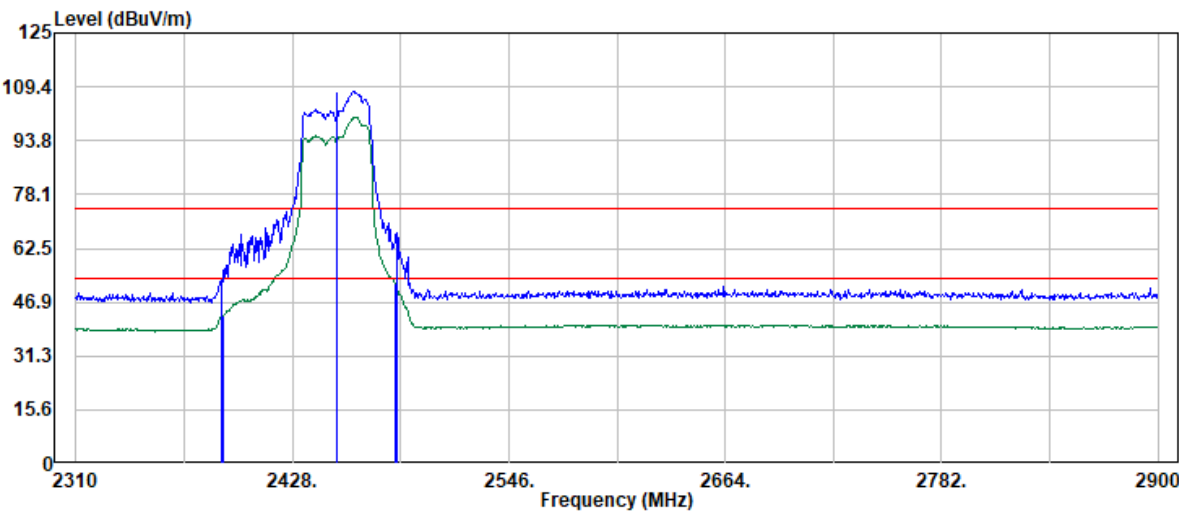

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	46.94	6.32	53.26	74.00	-20.74	Peak
2389.93	36.47	6.32	42.79	54.00	-11.21	Average
2452.00	101.45	6.56	108.01	--	--	Peak
2452.00	93.87	6.56	100.43	--	--	Average
2483.85	45.78	6.77	52.55	54.00	-1.45	Average
2485.35	60.00	6.78	66.78	74.00	-7.22	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 82 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N40	Temp./Humi.	: 25.2/55
Frequency	: 2452 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

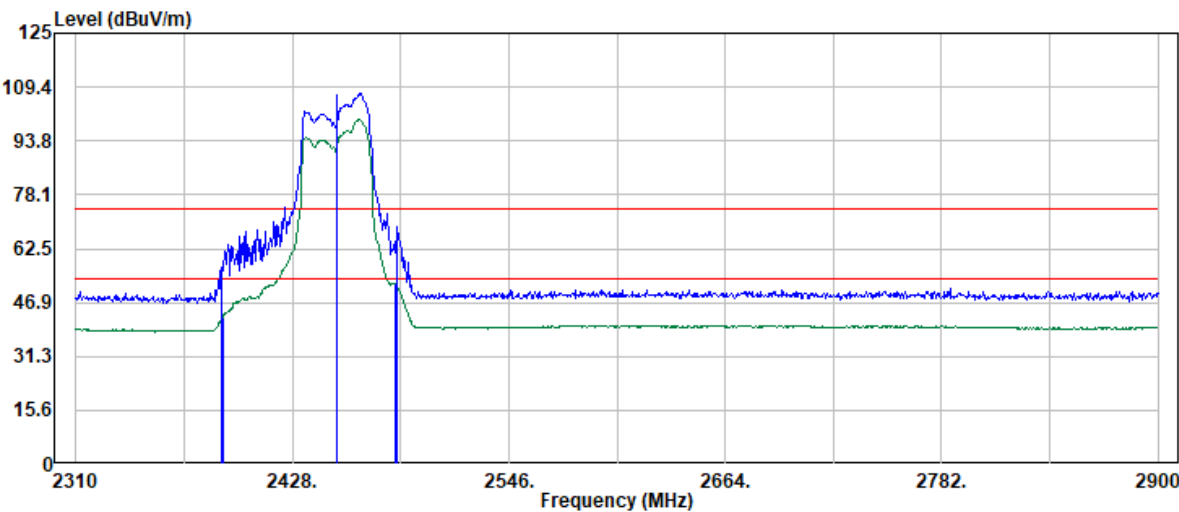

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	50.64	6.32	56.96	74.00	-17.04	Peak
2389.93	36.30	6.32	42.62	54.00	-11.38	Average
2452.00	100.80	6.56	107.36	--	--	Peak
2452.00	93.44	6.56	100.00	--	--	Average
2483.85	45.56	6.77	52.33	54.00	-1.67	Average
2485.35	61.95	6.78	68.73	74.00	-5.27	Peak




Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 83 / 108
Rev.: 01

TX Test Data

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N20	Temp./Humi.	: 25.4/54
Frequency	: 2457 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

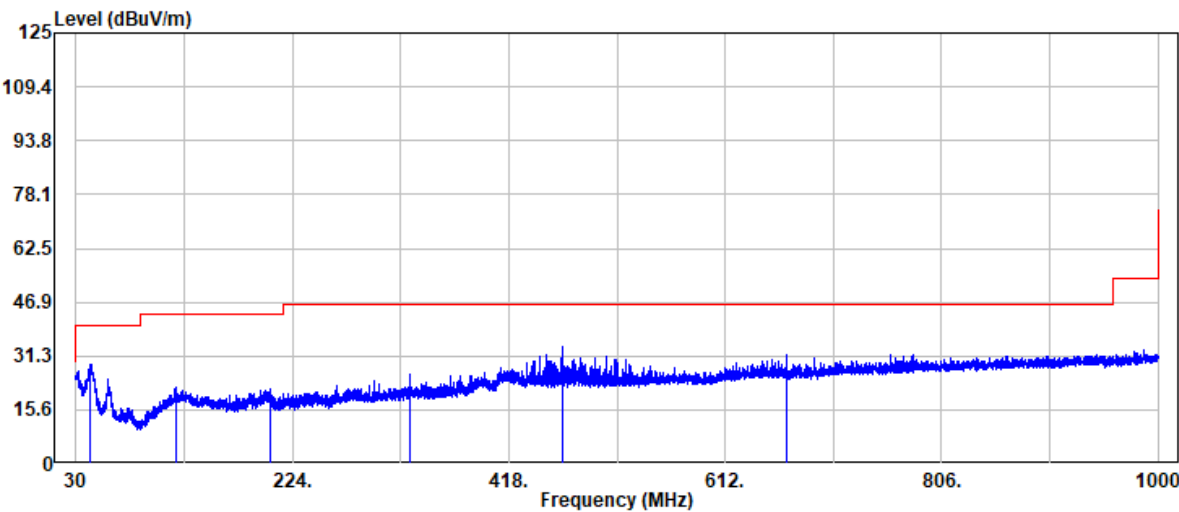


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
42.90	41.08	-12.16	28.92	40.00	-11.08	Peak
120.00	31.97	-9.67	22.30	43.50	-21.20	Peak
204.10	33.51	-11.96	21.55	43.50	-21.95	Peak
329.00	34.94	-8.79	26.15	46.00	-19.85	Peak
465.60	38.64	-4.91	33.73	46.00	-12.27	Peak
667.00	33.39	-1.71	31.68	46.00	-14.32	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 84 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-19
Operation Band	: N20	Temp./Humi.	: 25.4/54
Frequency	: 2457 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

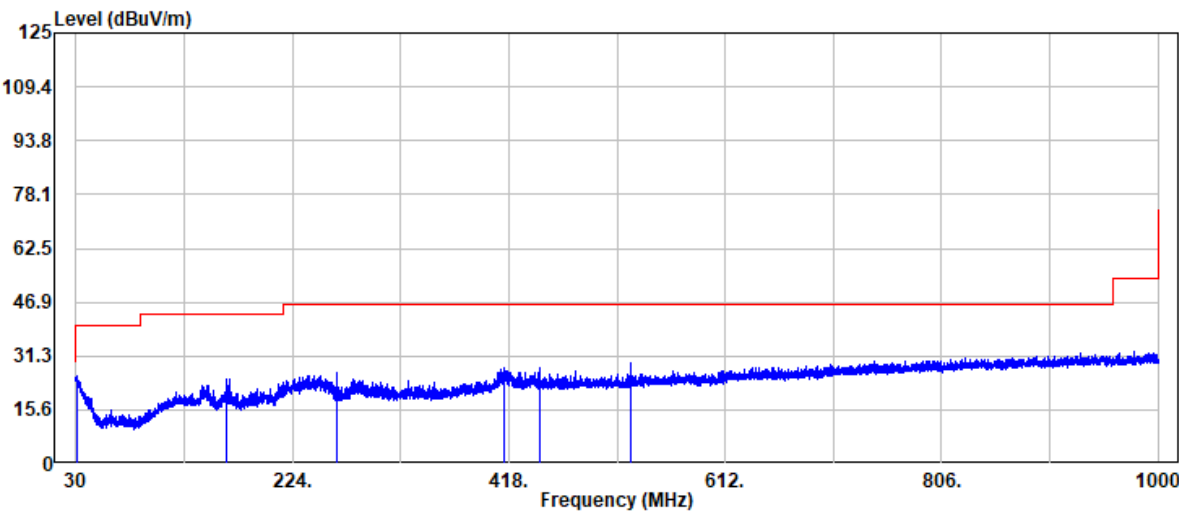


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
30.50	28.61	-3.12	25.49	40.00	-14.51	Peak
164.80	35.96	-11.41	24.55	43.50	-18.95	Peak
264.00	36.60	-10.18	26.42	46.00	-19.58	Peak
413.80	34.00	-6.35	27.65	46.00	-18.35	Peak
445.20	33.22	-5.42	27.80	46.00	-18.20	Peak
526.90	33.42	-4.12	29.30	46.00	-16.70	Peak



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 85 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

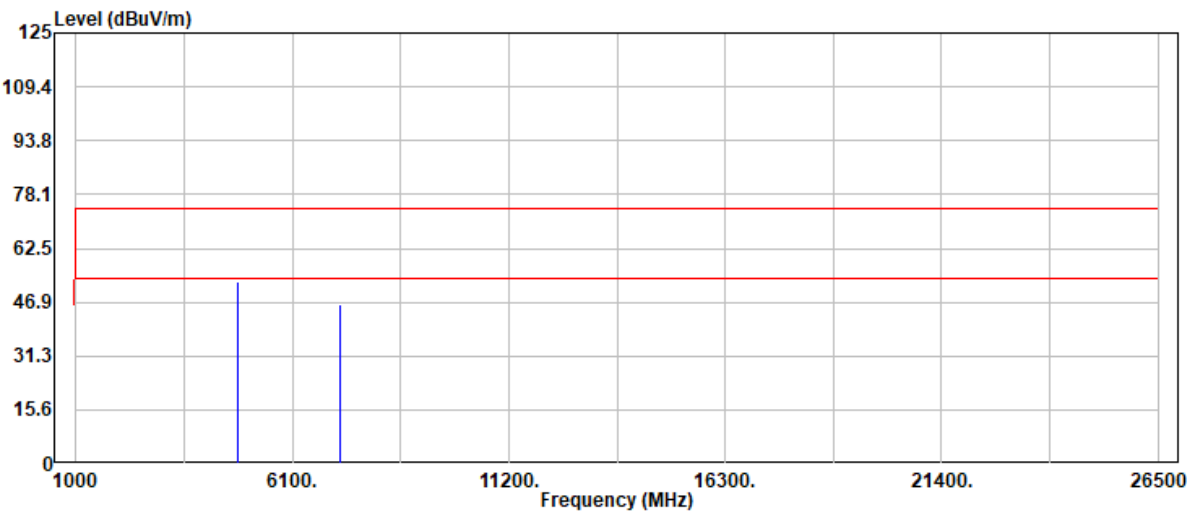


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	50.23	2.39	52.62	74.00	-21.38	Peak
4824.00	48.80	2.39	51.19	54.00	-2.81	Average
7236.00	37.12	9.13	46.25	74.00	-27.75	Peak
7236.00	31.00	9.13	40.13	54.00	-13.87	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 86 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

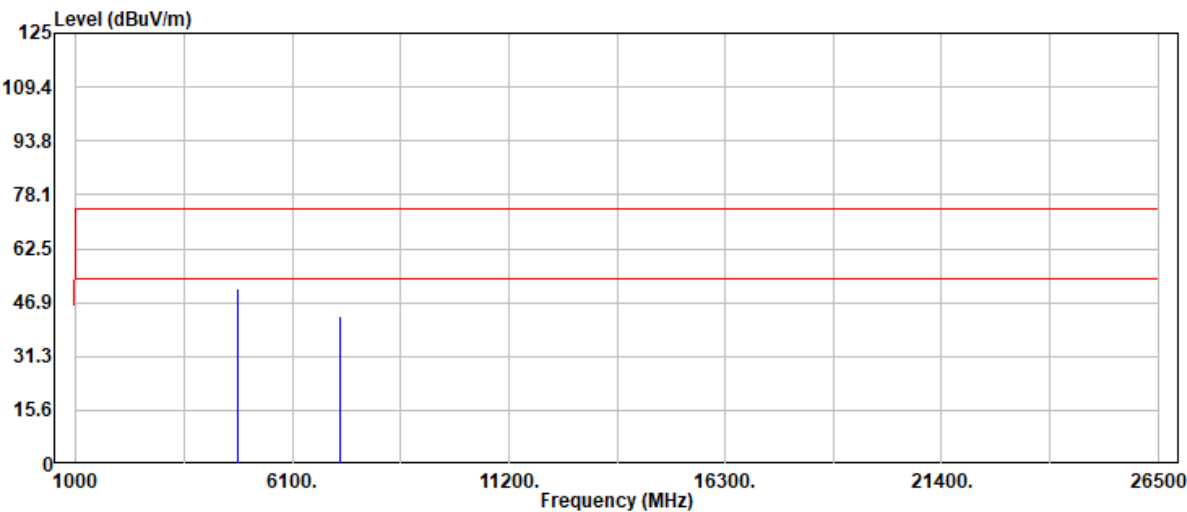


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	48.58	2.39	50.97	74.00	-23.03	Peak
4824.00	46.69	2.39	49.08	54.00	-4.92	Average
7236.00	33.99	9.13	43.12	74.00	-30.88	Peak
7236.00	28.94	9.13	38.07	54.00	-15.93	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 87 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

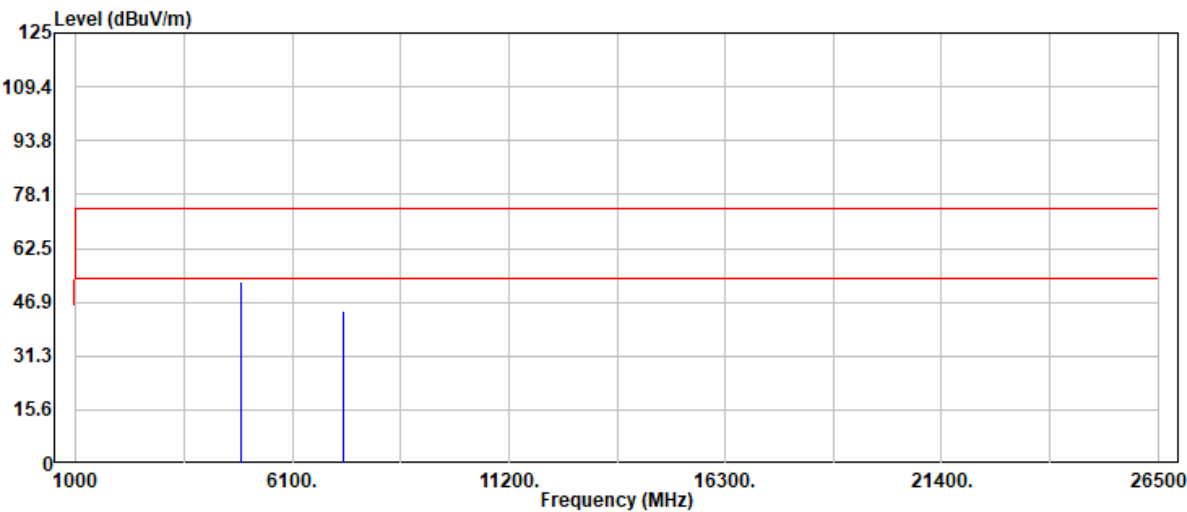


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	50.20	2.61	52.81	74.00	-21.19	Peak
4874.00	47.73	2.61	50.34	54.00	-3.66	Average
7311.00	35.25	9.31	44.56	74.00	-29.44	Peak
7311.00	28.84	9.31	38.15	54.00	-15.85	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 88 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 10.5		

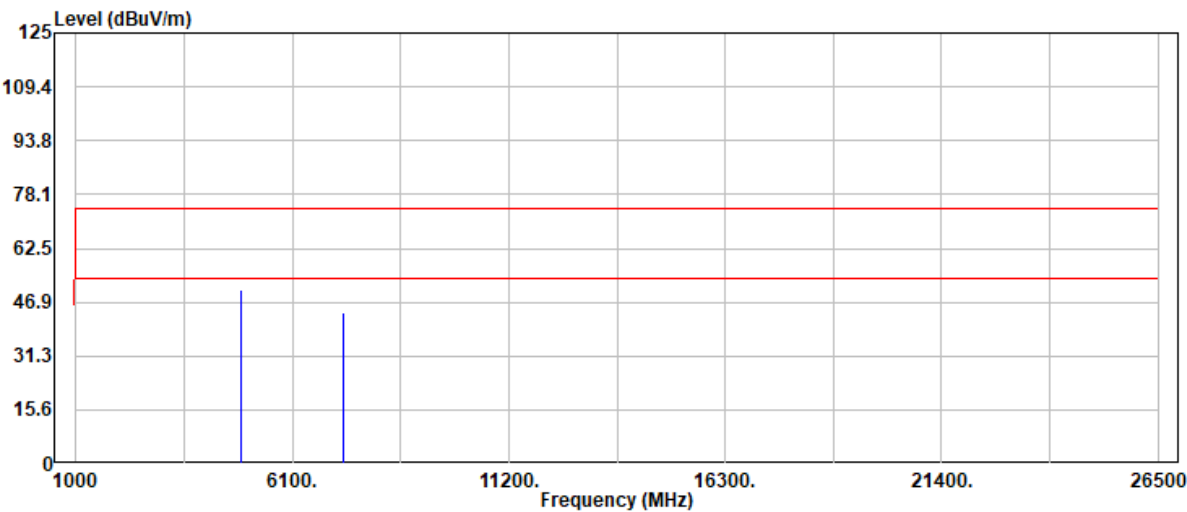


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	47.99	2.61	50.60	74.00	-23.40	Peak
4874.00	45.48	2.61	48.09	54.00	-5.91	Average
7311.00	34.51	9.31	43.82	74.00	-30.18	Peak
7311.00	27.86	9.31	37.17	54.00	-16.83	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 89 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

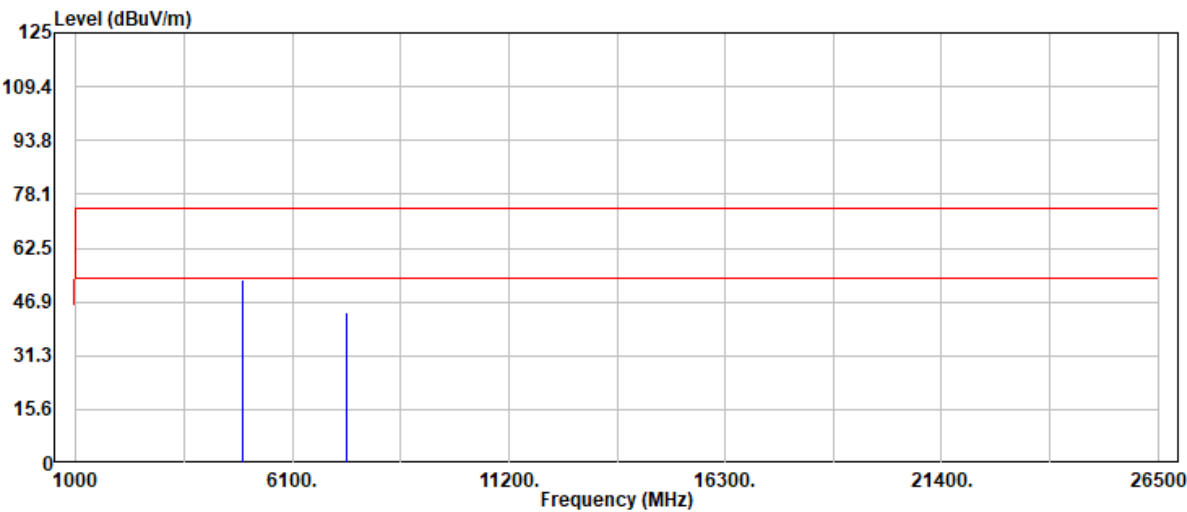


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	50.04	3.15	53.19	74.00	-20.81	Peak
4924.00	48.30	3.15	51.45	54.00	-2.55	Average
7386.00	34.33	9.53	43.86	74.00	-30.14	Peak
7386.00	29.81	9.53	39.34	54.00	-14.66	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 90 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: B_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

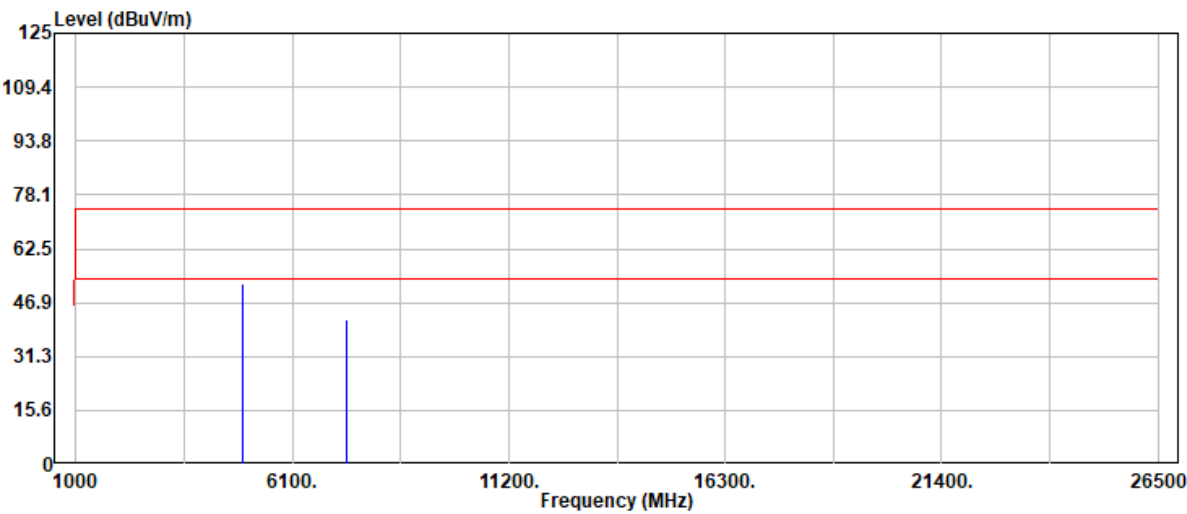


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	49.10	3.15	52.25	74.00	-21.75	Peak
4924.00	47.25	3.15	50.40	54.00	-3.60	Average
7386.00	32.68	9.53	42.21	74.00	-31.79	Peak
7386.00	28.98	9.53	38.51	54.00	-15.49	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 91 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

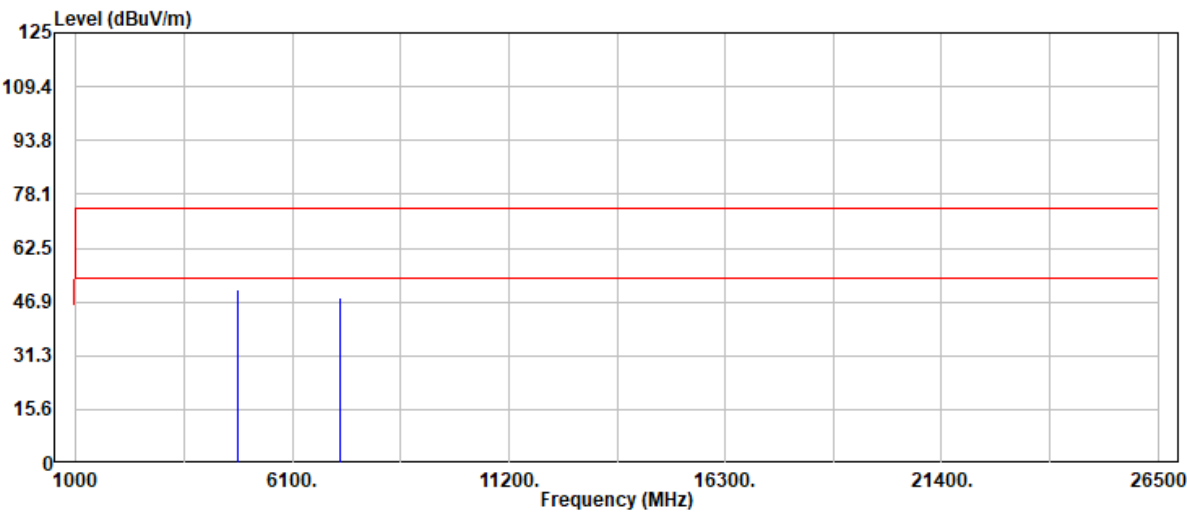


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	47.95	2.39	50.34	74.00	-23.66	Peak
4824.00	41.61	2.39	44.00	54.00	-10.00	Average
7236.00	39.02	9.13	48.15	74.00	-25.85	Peak
7236.00	29.61	9.13	38.74	54.00	-15.26	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 92 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 13.5		

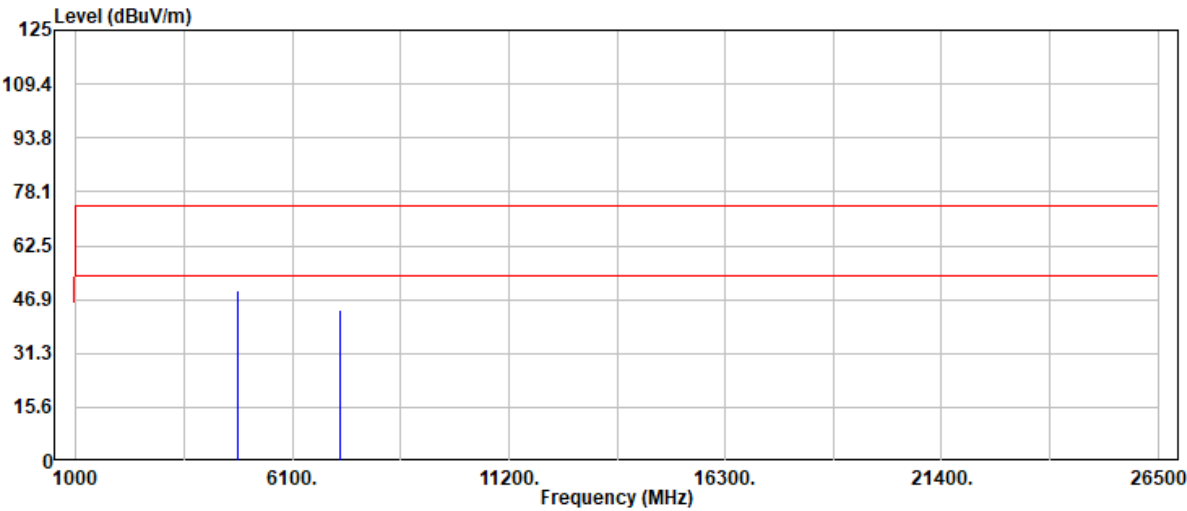


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	47.19	2.39	49.58	74.00	-24.42	Peak
4824.00	38.89	2.39	41.28	54.00	-12.72	Average
7236.00	34.95	9.13	44.08	74.00	-29.92	Peak
7236.00	28.54	9.13	37.67	54.00	-16.33	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 93 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

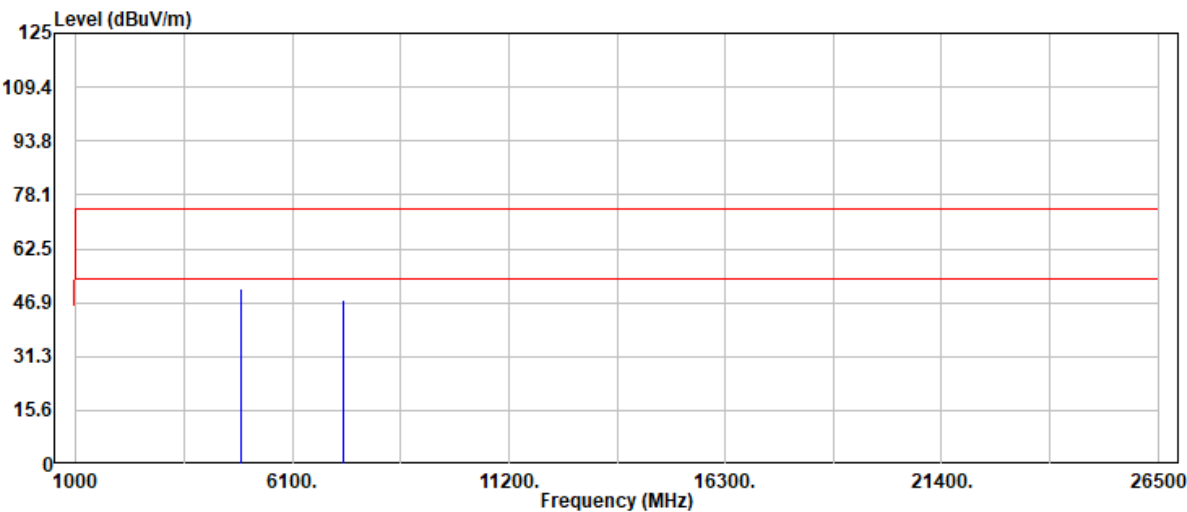


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	48.35	2.61	50.96	74.00	-23.04	Peak
4874.00	39.28	2.61	41.89	54.00	-12.11	Average
7311.00	38.31	9.31	47.62	74.00	-26.38	Peak
7311.00	30.20	9.31	39.51	54.00	-14.49	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 94 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2437 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

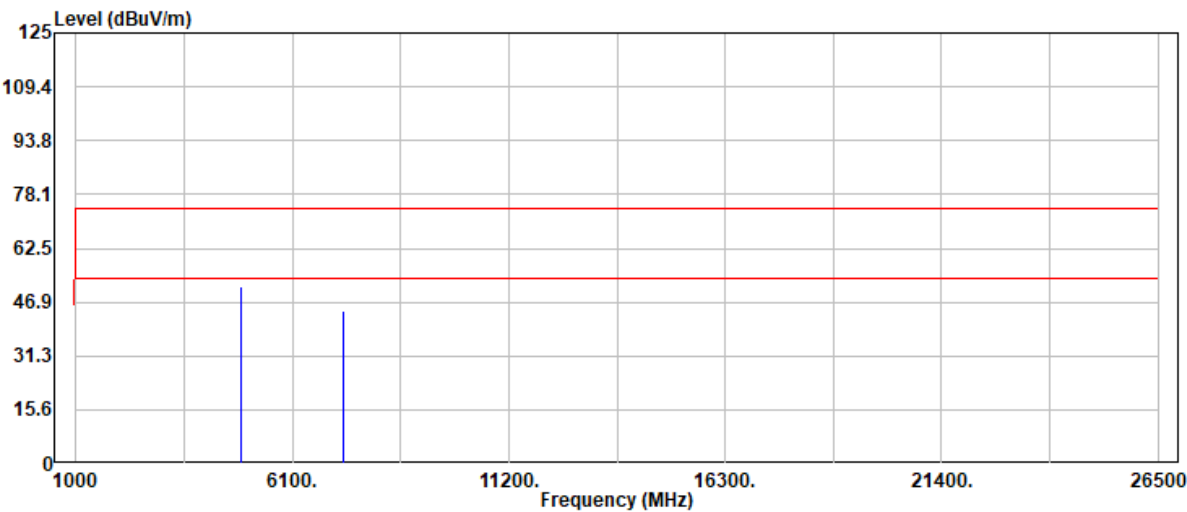


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	48.62	2.61	51.23	74.00	-22.77	Peak
4874.00	39.41	2.61	42.02	54.00	-11.98	Average
7311.00	35.17	9.31	44.48	74.00	-29.52	Peak
7311.00	29.02	9.31	38.33	54.00	-15.67	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 95 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

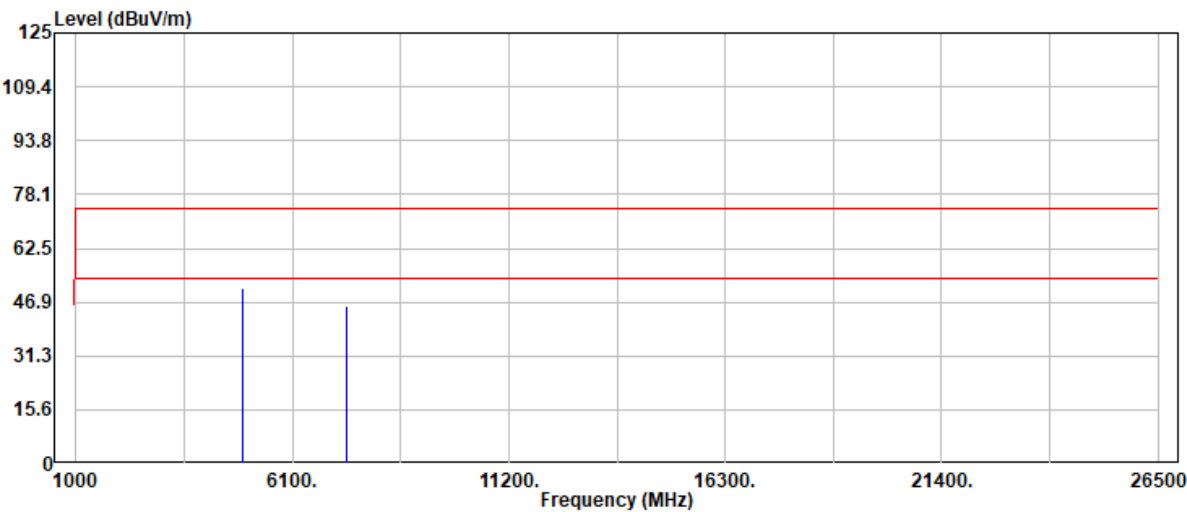


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	47.76	3.15	50.91	74.00	-23.09	Peak
4924.00	40.65	3.15	43.80	54.00	-10.20	Average
7386.00	36.21	9.53	45.74	74.00	-28.26	Peak
7386.00	28.08	9.53	37.61	54.00	-16.39	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 96 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: G_CH0	Temp./Humi.	: 25.2/55
Frequency	: 2462 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

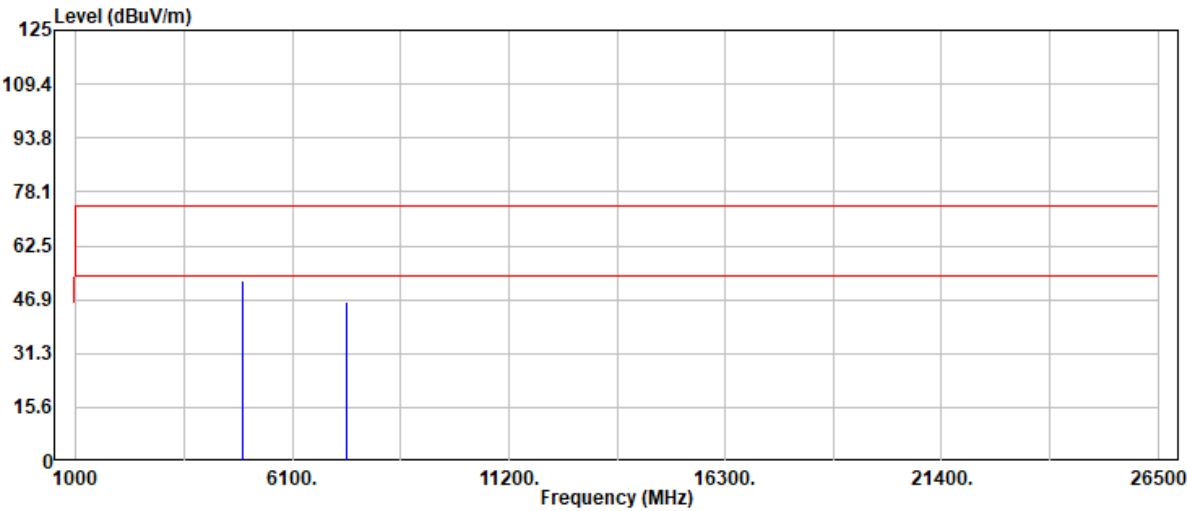


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	49.19	3.15	52.34	74.00	-21.66	Peak
4924.00	42.87	3.15	46.02	54.00	-7.98	Average
7386.00	36.85	9.53	46.38	74.00	-27.62	Peak
7386.00	29.91	9.53	39.44	54.00	-14.56	Average



Project No: TM-2506000042P
Report No.: TMWK2506002192KR

Page: 97 / 108
Rev.: 01

Project No	: TM-2506000042P	Test Date	: 2025-08-18
Operation Band	: N20	Temp./Humi.	: 25.2/55
Frequency	: 2412 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

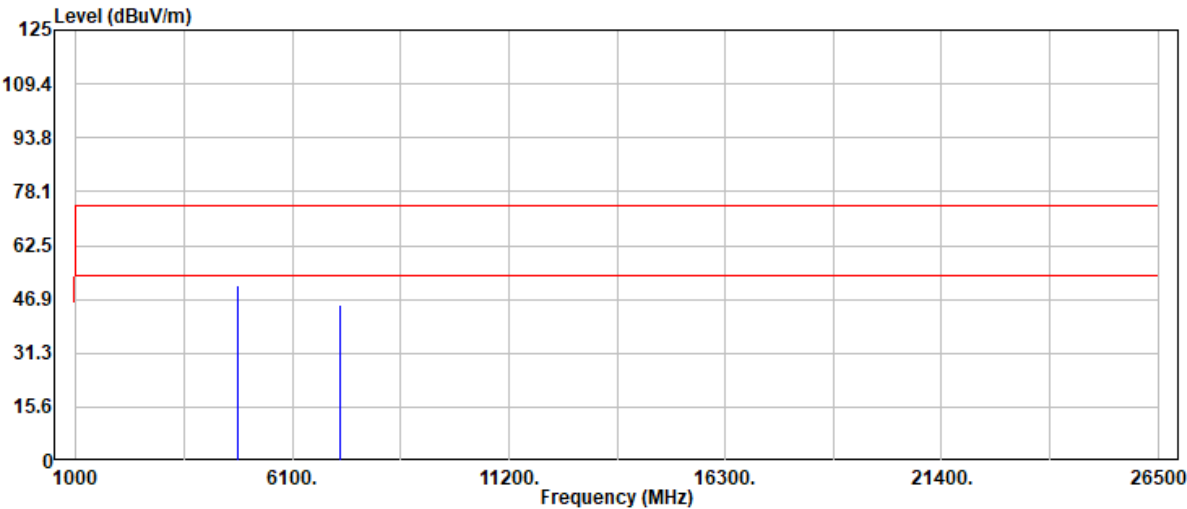

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	48.41	2.39	50.80	74.00	-23.20	Peak
4824.00	41.50	2.39	43.89	54.00	-10.11	Average
7236.00	36.33	9.13	45.46	74.00	-28.54	Peak
7236.00	29.89	9.13	39.02	54.00	-14.98	Average